



(51) International Patent Classification:
H04N 19/52 (2014.01)

(21) International Application Number:
PCT/CN2019/127010

(22) International Filing Date:
20 December 2019 (20.12.2019)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PCT/CN2018/122740
21 December 2018 (21.12.2018) CN

(71) Applicants: **BEIJING BYTEDANCE NETWORK TECHNOLOGY CO., LTD.** [CN/CN]; Room B-0035, 2/F, No. 3 Building, No. 30, Shixing Road, Shijingshan District, Beijing 100041 (CN). **BYTEDANCE INC.** [US/US]; 12655 West Jefferson Boulevard, Sixth Floor, Suite No. 137, Los Angeles, California 90066 (US).

(72) Inventors: **ZHANG, Li**; 12655 West Jefferson Boulevard, Sixth Floor, Suite No. 137, Los Angeles, California 90066 (US). **ZHANG, Kai**; 12655 West Jefferson Boulevard, Sixth Floor, Suite No. 137, Los Angeles, California 90066

(US). **LIU, Hongbin**; Jinritoutiao Post Office, China Satellite Communications Tower, No. 63, Zhichun Road, Haidian District, Beijing 100080 (CN). **XU, Jizheng**; 12655 West Jefferson Boulevard, Sixth Floor, Suite No. 137, Los Angeles, California 90066 (US). **WANG, Yue**; Jinritoutiao Post Office, China Satellite Communications Tower, No. 63, Zhichun Road, Haidian District, Beijing 100080 (CN).

(74) Agent: **LIU, SHEN & ASSOCIATES**; 10th Floor, Building 1, 10 Caihefang Road, Haidian District, Beijing 100080 (CN).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH,

(54) Title: MOTION VECTOR DERIVATION USING HIGHER BIT-DEPTH PRECISION

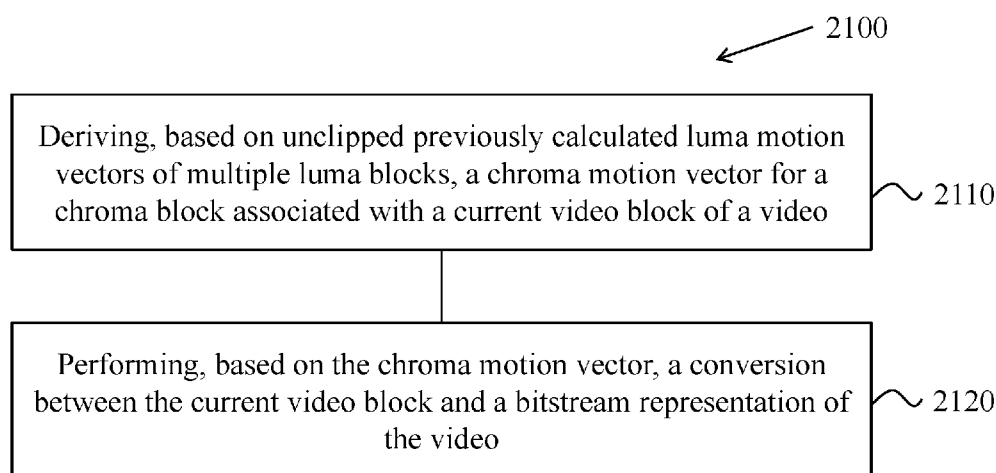


FIG. 21

(57) Abstract: A method for video processing is provided to comprise: deriving, based on unclipped previously calculated luma motion vectors of multiple luma blocks, a chroma motion vector for a chroma block associated with a current video block of a video; and performing, based on the chroma motion vector, a conversion between the current video block and a bitstream representation of the video.

GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report (Art. 21(3))*

MOTION VECTOR DERIVATION USING HIGHER BIT-DEPTH PRECISION

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] Under the applicable patent law and/or rules pursuant to the Paris Convention, this application is made to timely claim the priority to and benefit of International Patent Application No. PCT/CN2018/122740, filed on December 21, 2018. For all purposes under the U.S. law, the entire disclosure of the aforementioned application is incorporated by reference as part of the disclosure of this application.

TECHNICAL FIELD

[0002] This patent document relates to video coding techniques, devices and systems.

BACKGROUND

[0003] In spite of the advances in video compression, digital video still accounts for the largest bandwidth use on the internet and other digital communication networks. As the number of connected user devices capable of receiving and displaying video increases, it is expected that the bandwidth demand for digital video usage will continue to grow.

SUMMARY

[0004] Devices, systems and methods related to digital video coding, and specifically, to selecting and applying motion vector ranges for video coding are described. The described methods may be applied to both the existing video coding standards (e.g., High Efficiency Video Coding (HEVC)) and future video coding standards or video codecs.

[0005] In one representative aspect, the disclosed technology may be used to provide a method for video processing. This method includes deriving, based on unclipped previously calculated luma motion vectors of multiple luma blocks, a chroma motion vector for a chroma block associated with a current video block of a video; and performing, based on the chroma motion vector, a conversion between the current video block and a bitstream representation of the video.

[0006] In another representative aspect, the disclosed technology may be used to provide a

method for video processing. This method includes determining a motion vector precision of one or more motion vectors related to a current video block of a video; selecting, based on the motion vector precision, a motion vector range; and performing, based on the motion vector range, a conversion between the current video block and a bitstream representation of the video.

[0007] In another representative aspect, the disclosed technology may be used to provide a method for video processing. This method includes determining to use an internal bit-depth of one or more motion vectors related to a current video block of a video, wherein the internal bit-depth have M bits, M is greater than 16, and the current video block uses a temporal motion vector prediction, performing a conversion between the current video block and a bitstream representation of the video based on at least M-bit motion vectors.

[0008] In another representative aspect, the disclosed technology may be used to provide a method for video processing. This method includes: determining to use a motion vector precision value for a precision of motion vectors for a conversion between a current video block of a video unit of a video and a coded representation of the video; and performing the conversion based on the precision of motion vectors according to the motion vector precision value, wherein a syntax element at the video unit level indicates the motion vector precision value.

[0009] In another representative aspect, the disclosed technology may be used to provide a method for video processing. This method includes: determining a parameter for a conversion between a current video block of a video and a bitstream representation of the current video block; and performing the conversion based on the parameter, wherein the determining the parameter is based on a height or a width of a current picture that comprises the current video block.

[0010] In another representative aspect, the disclosed technology may be used to provide a method for video processing. This method includes: clipping a temporary motion vector to generate a clipped motion vector; deriving a motion vector associated with a current video block of a video at least based on the clipped motion vector; and performing a conversion between the current video block of a video and a bitstream representation of the video based on the motion vector associated with the current video block, wherein the clipping of the temporary motion vector is based on at least one of a height (H) or a width (W) of a reference picture of the current video block, a top-left position (x0, y0) of the current video block, or a motion vector precision or an internal bit-depth (M) of the motion vector.

[0011] In another representative aspect, the disclosed technology may be used to provide a

method for video processing. This method includes: performing a conversion between a current video block of a video and a bitstream representation of the video, wherein the conversion uses a scaling process to obtain motion vector differences of a first reference picture from motion vector differences from a second reference picture, and wherein the scaling process uses a clipping operation to constrain the motion vector differences of the first reference picture to fall in a range $[-((1 \ll (M-1))), (1 \ll (M-1))-1]$, where M is a number greater than 16.

[0012] In another representative aspect, the disclosed technology may be used to provide a method for video processing. This method includes: determining to use an internal bit-depth of one or more motion vectors for a conversion between a current video block of a video unit of a video and a bitstream representation of the video; and performing the conversion using the one or more motion vectors, wherein a syntax element at a video unit level indicates the internal bit-depth.

[0013] In another representative aspect, the disclosed technology may be used to provide a method for video processing. This method includes: determining to use an internal bit-depth of affine motion parameters for a conversion between a current video block of a video unit of a video and a bitstream representation of the video; and performing the conversion based on the determining, wherein the internal bit-depth of the affine motion parameters has a same range for non-affine motion parameters.

[0014] In yet another representative aspect, the above-described method is embodied in the form of processor-executable code and stored in a computer-readable program medium.

[0015] In yet another representative aspect, a device that is configured or operable to perform the above-described method is disclosed. The device may include a processor that is programmed to implement this method.

[0016] In yet another representative aspect, a video decoder apparatus may implement a method as described herein.

[0017] The above and other aspects and features of the disclosed technology are described in greater detail in the drawings, the description and the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0018] FIG. 1 shows an example of constructing a merge candidate list.

[0019] FIG. 2 shows an example of positions of spatial candidates.

[0020] FIG. 3 shows an example of candidate pairs subject to a redundancy check of spatial

merge candidates.

[0021] FIGS. 4A and 4B show examples of the position of a second prediction unit (PU) based on the size and shape of the current block.

[0022] FIG. 5 shows an example of motion vector scaling for temporal merge candidates.

[0023] FIG. 6 shows an example of candidate positions for temporal merge candidates.

[0024] FIG. 7 shows an example of generating a combined bi-predictive merge candidate.

[0025] FIG. 8 shows an example of constructing motion vector prediction candidates.

[0026] FIG. 9 shows an example of motion vector scaling for spatial motion vector candidates.

[0027] FIG. 10 shows an example of motion prediction using the alternative temporal motion vector prediction (ATMVP) algorithm for a coding unit (CU).

[0028] FIG. 11 shows an example of a coding unit (CU) with sub-blocks and neighboring blocks used by the spatial-temporal motion vector prediction (STMVP) algorithm.

[0029] FIGS. 12A and 12B show examples of the simplified 4-parameter affine model and the simplified 6-parameter affine model, respectively.

[0030] FIG. 13 shows an example of an affine motion vector field (MVF) per sub-block.

[0031] FIGS. 14A and 14B show examples of the 4-parameter and 6-parameter affine models, respectively.

[0032] FIG. 15 shows an example of motion vector prediction for AF_INTER for inherited affine candidates.

[0033] FIG. 16 shows an example of motion vector prediction for AF_INTER for constructed affine candidates.

[0034] FIGS. 17A and 17B show example candidate blocks and the CPMV predictor derivation, respectively, for the AF_MERGE mode.

[0035] FIG. 18 shows an example of candidate positions for affine merge mode.

[0036] FIG. 19 shows an example of an UMVE search process.

[0037] FIG. 20 shows an example of an UMVE search point.

[0038] FIG. 21 shows a flowchart of an example method for video processing based on some implementations of the disclosed technology.

[0039] FIGS. 22A-22E show flowcharts of example methods for video processing based on some implementations of the disclosed technology.

[0040] FIGS. 23A-23C show a flowcharts of examples methods for video processing based on some implementations of the disclosed technology.

[0041] FIGS. 24A and 24B show examples of hardware platforms for implementing a visual media decoding or a visual media encoding technique described in the present document.

DETAILED DESCRIPTION

[0042] Due to the increasing demand of higher resolution video, video coding methods and techniques are ubiquitous in modern technology. Video codecs typically include an electronic circuit or software that compresses or decompresses digital video, and are continually being improved to provide higher coding efficiency. A video codec converts uncompressed video to a compressed format or vice versa. There are complex relationships between the video quality, the amount of data used to represent the video (determined by the bit rate), the complexity of the encoding and decoding algorithms, sensitivity to data losses and errors, ease of editing, random access, and end-to-end delay (latency). The compressed format usually conforms to a standard video compression specification, e.g., the High Efficiency Video Coding (HEVC) standard (also known as H.265 or MPEG-H Part 2) [1], the Versatile Video Coding standard to be finalized, or other current and/or future video coding standards.

[0043] Embodiments of the disclosed technology may be applied to existing video coding standards (e.g., HEVC, H.265) and future standards to improve compression performance. Section headings are used in the present document to improve readability of the description and do not in any way limit the discussion or the embodiments (and/or implementations) to the respective sections only.

1 Examples of inter-prediction in HEVC/H.265

[0044] Video coding standards have significantly improved over the years, and now provide, in part, high coding efficiency and support for higher resolutions. Recent standards such as HEVC and H.265 are based on the hybrid video coding structure wherein temporal prediction plus transform coding are utilized.

1.1 Examples of prediction modes

[0045] Each inter-predicted PU (prediction unit) has motion parameters for one or two reference picture lists. In some embodiments, motion parameters include a motion vector and a reference picture index. In other embodiments, the usage of one of the two reference picture lists

may also be signaled using *inter_pred_idc*. In yet other embodiments, motion vectors may be explicitly coded as deltas relative to predictors.

[0046] When a CU is coded with skip mode, one PU is associated with the CU, and there are no significant residual coefficients, no coded motion vector delta or reference picture index. A merge mode is specified whereby the motion parameters for the current PU are obtained from neighboring PUs, including spatial and temporal candidates. The merge mode can be applied to any inter-predicted PU, not only for skip mode. The alternative to merge mode is the explicit transmission of motion parameters, where motion vector, corresponding reference picture index for each reference picture list and reference picture list usage are signaled explicitly per each PU.

[0047] When signaling indicates that one of the two reference picture lists is to be used, the PU is produced from one block of samples. This is referred to as ‘uni-prediction’. Uni-prediction is available both for P-slices and B-slices [2].

[0048] When signaling indicates that both of the reference picture lists are to be used, the PU is produced from two blocks of samples. This is referred to as ‘bi-prediction’. Bi-prediction is available for B-slices only.

[0049] Reference picture list

[0050] In HEVC, the term inter prediction is used to denote prediction derived from data elements (e.g., sample values or motion vectors) of reference pictures other than the current decoded picture. Like in H.264/AVC, a picture can be predicted from multiple reference pictures. The reference pictures that are used for inter prediction are organized in one or more reference picture lists. The reference index identifies which of the reference pictures in the list should be used for creating the prediction signal.

[0051] A single reference picture list, List 0, is used for a P slice and two reference picture lists, List 0 and List 1 are used for B slices. It should be noted reference pictures included in List 0/1 could be from past and future pictures in terms of capturing/display order.

1.1.1 Embodiments of constructing candidates for merge mode

[0052] When a PU is predicted using merge mode, an index pointing to an entry in the *merge candidates list* is parsed from the bitstream and used to retrieve the motion information. The construction of this list can be summarized according to the following sequence of steps:

[0053] Step 1: Initial candidates derivation

[0054] Step 1.1: Spatial candidates derivation

[0055] Step 1.2: Redundancy check for spatial candidates

[0056] Step 1.3: Temporal candidates derivation

[0057] Step 2: Additional candidates insertion

[0058] Step 2.1: Creation of bi-predictive candidates

[0059] Step 2.2: Insertion of zero motion candidates

[0060] FIG. 1 shows an example of constructing a merge candidate list based on the sequence of steps summarized above. For spatial merge candidate derivation, a maximum of four merge candidates are selected among candidates that are located in five different positions. For temporal merge candidate derivation, a maximum of one merge candidate is selected among two candidates. Since constant number of candidates for each PU is assumed at decoder, additional candidates are generated when the number of candidates does not reach to maximum number of merge candidate (MaxNumMergeCand) which is signaled in slice header. Since the number of candidates is constant, index of best merge candidate is encoded using truncated unary binarization (TU). If the size of CU is equal to 8, all the PUs of the current CU share a single merge candidate list, which is identical to the merge candidate list of the $2N \times 2N$ prediction unit.

1.1.2 Constructing spatial merge candidates

[0061] In the derivation of spatial merge candidates, a maximum of four merge candidates are selected among candidates located in the positions depicted in FIG. 2. The order of derivation is A_1 , B_1 , B_0 , A_0 and B_2 . Position B_2 is considered only when any PU of position A_1 , B_1 , B_0 , A_0 is not available (e.g. because it belongs to another slice or tile) or is intra coded. After candidate at position A_1 is added, the addition of the remaining candidates is subject to a redundancy check which ensures that candidates with same motion information are excluded from the list so that coding efficiency is improved.

[0062] To reduce computational complexity, not all possible candidate pairs are considered in the mentioned redundancy check. Instead only the pairs linked with an arrow in FIG. 3 are considered and a candidate is only added to the list if the corresponding candidate used for redundancy check has not the same motion information. Another source of duplicate motion information is the “*second PU*” associated with partitions different from $2N \times 2N$. As an example, FIG. 4A and 4B depict the second PU for the case of $N \times 2N$ and $2N \times N$, respectively. When the current PU is partitioned as $N \times 2N$, candidate at position A_1 is not considered for list construction. In some embodiments, adding this candidate may lead to two prediction units

having the same motion information, which is redundant to just have one PU in a coding unit. Similarly, position B₁ is not considered when the current PU is partitioned as 2N×N.

1.1.3 Constructing temporal merge candidates

[0063] In this step, only one candidate is added to the list. Particularly, in the derivation of this temporal merge candidate, a scaled motion vector is derived based on co-located PU belonging to the picture which has the smallest POC difference with current picture within the given reference picture list. The reference picture list to be used for derivation of the co-located PU is explicitly signaled in the slice header.

[0064] FIG. 5 shows an example of the derivation of the scaled motion vector for a temporal merge candidate (as the dotted line), which is scaled from the motion vector of the co-located PU using the POC distances, t_b and t_d , where t_b is defined to be the POC difference between the reference picture of the current picture and the current picture and t_d is defined to be the POC difference between the reference picture of the co-located picture and the co-located picture. The reference picture index of temporal merge candidate is set equal to zero. For a B-slice, two motion vectors, one is for reference picture list 0 and the other is for reference picture list 1, are obtained and combined to make the bi-predictive merge candidate.

[0065] In the co-located PU (Y) belonging to the reference frame, the position for the temporal candidate is selected between candidates C₀ and C₁, as depicted in FIG. 6. If PU at position C₀ is not available, is intra coded, or is outside of the current CTU, position C₁ is used. Otherwise, position C₀ is used in the derivation of the temporal merge candidate.

1.1.4 Constructing additional types of merge candidates

[0066] Besides spatio-temporal merge candidates, there are two additional types of merge candidates: combined bi-predictive merge candidate and zero merge candidate. Combined bi-predictive merge candidates are generated by utilizing spatio-temporal merge candidates. Combined bi-predictive merge candidate is used for B-Slice only. The combined bi-predictive candidates are generated by combining the first reference picture list motion parameters of an initial candidate with the second reference picture list motion parameters of another. If these two tuples provide different motion hypotheses, they will form a new bi-predictive candidate.

[0067] FIG. 7 shows an example of this process, wherein two candidates in the original list (710, on the left), which have $mvL0$ and $refIdxL0$ or $mvL1$ and $refIdxL1$, are used to create a combined bi-predictive merge candidate added to the final list (720, on the right).

[0068] Zero motion candidates are inserted to fill the remaining entries in the merge candidates list and therefore hit the MaxNumMergeCand capacity. These candidates have zero spatial displacement and a reference picture index which starts from zero and increases every time a new zero motion candidate is added to the list. The number of reference frames used by these candidates is one and two for uni- and bi-directional prediction, respectively. In some embodiments, no redundancy check is performed on these candidates.

1.2 Embodiments of advanced motion vector prediction (AMVP)

[0069] AMVP exploits spatio-temporal correlation of motion vector with neighboring PUs, which is used for explicit transmission of motion parameters. It constructs a motion vector candidate list by firstly checking availability of left, above temporally neighboring PU positions, removing redundant candidates and adding zero vector to make the candidate list to be constant length. Then, the encoder can select the best predictor from the candidate list and transmit the corresponding index indicating the chosen candidate. Similarly with merge index signaling, the index of the best motion vector candidate is encoded using truncated unary. The maximum value to be encoded in this case is 2 (see FIG. 8). In the following sections, details about derivation process of motion vector prediction candidate are provided.

1.2.1 Examples of deriving AMVP candidates

[0070] FIG. 8 summarizes derivation process for motion vector prediction candidate, and may be implemented for each reference picture list with refidx as an input.

[0071] In motion vector prediction, two types of motion vector candidates are considered: spatial motion vector candidate and temporal motion vector candidate. For spatial motion vector candidate derivation, two motion vector candidates are eventually derived based on motion vectors of each PU located in five different positions as previously shown in FIG. 2.

[0072] For temporal motion vector candidate derivation, one motion vector candidate is selected from two candidates, which are derived based on two different co-located positions. After the first list of spatio-temporal candidates is made, duplicated motion vector candidates in the list are removed. If the number of potential candidates is larger than two, motion vector candidates whose reference picture index within the associated reference picture list is larger than 1 are removed from the list. If the number of spatio-temporal motion vector candidates is smaller than two, additional zero motion vector candidates is added to the list.

1.2.2 Constructing spatial motion vector candidates

[0073] In the derivation of spatial motion vector candidates, a maximum of two candidates are considered among five potential candidates, which are derived from PUs located in positions as previously shown in FIG. 2, those positions being the same as those of motion merge. The order of derivation for the left side of the current PU is defined as A_0 , A_1 , and scaled A_0 , scaled A_1 . The order of derivation for the above side of the current PU is defined as B_0 , B_1 , B_2 , scaled B_0 , scaled B_1 , scaled B_2 . For each side there are therefore four cases that can be used as motion vector candidate, with two cases not required to use spatial scaling, and two cases where spatial scaling is used. The four different cases are summarized as follows:

[0074] -- No spatial scaling

[0075] (1) Same reference picture list, and same reference picture index (same POC)

[0076] (2) Different reference picture list, but same reference picture (same POC)

[0077] -- Spatial scaling

[0078] (3) Same reference picture list, but different reference picture (different POC)

[0079] (4) Different reference picture list, and different reference picture (different POC)

[0080] The no-spatial-scaling cases are checked first followed by the cases that allow spatial scaling. Spatial scaling is considered when the POC is different between the reference picture of the neighboring PU and that of the current PU regardless of reference picture list. If all PUs of left candidates are not available or are intra coded, scaling for the above motion vector is allowed to help parallel derivation of left and above MV candidates. Otherwise, spatial scaling is not allowed for the above motion vector.

[0081] As shown in the example in FIG. 9, for the spatial scaling case, the motion vector of the neighboring PU is scaled in a similar manner as for temporal scaling. One difference is that the reference picture list and index of current PU is given as input; the actual scaling process is the same as that of temporal scaling.

1.2.3 Constructing temporal motion vector candidates

[0082] Apart from the reference picture index derivation, all processes for the derivation of temporal merge candidates are the same as for the derivation of spatial motion vector candidates (as shown in the example in FIG. 6). In some embodiments, the reference picture index is signaled to the decoder.

2. Example of inter prediction methods in Joint Exploration Model (JEM)

[0083] In some embodiments, future video coding technologies are explored using a

reference software known as the Joint Exploration Model (JEM) [3][4]. In JEM, sub-block based prediction is adopted in several coding tools, such as affine prediction, alternative temporal motion vector prediction (ATMVP), spatial-temporal motion vector prediction (STMVP), bi-directional optical flow (BIO), Frame-Rate Up Conversion (FRUC), Locally Adaptive Motion Vector Resolution (LAMVR), Overlapped Block Motion Compensation (OBMC), Local Illumination Compensation (LIC), and Decoder-side Motion Vector Refinement (DMVR).

2.1 Examples of sub-CU based motion vector prediction

[0084] In the JEM with quadtrees plus binary trees (QTBT), each CU can have at most one set of motion parameters for each prediction direction. In some embodiments, two sub-CU level motion vector prediction methods are considered in the encoder by splitting a large CU into sub-CUs and deriving motion information for all the sub-CUs of the large CU. Alternative temporal motion vector prediction (ATMVP) method allows each CU to fetch multiple sets of motion information from multiple blocks smaller than the current CU in the collocated reference picture. The ATMVP method is also known as SbTMVP (sub-block temporal motion vector prediction). In spatial-temporal motion vector prediction (STMVP) method motion vectors of the sub-CUs are derived recursively by using the temporal motion vector predictor and spatial neighbouring motion vector. In some embodiments, and to preserve more accurate motion field for sub-CU motion prediction, the motion compensation for the reference frames may be disabled.

2.1.1 Examples of alternative temporal motion vector prediction (ATMVP)

[0085] In the ATMVP method, the temporal motion vector prediction (TMVP) method is modified by fetching multiple sets of motion information (including motion vectors and reference indices) from blocks smaller than the current CU.

[0086] FIG. 10 shows an example of ATMVP motion prediction process for a CU 1000. The ATMVP method predicts the motion vectors of the sub-CUs 1001 within a CU 1000 in two steps. The first step is to identify the corresponding block 1051 in a reference picture 1050 with a temporal vector. The reference picture 1050 is also referred to as the motion source picture. The second step is to split the current CU 1000 into sub-CUs 1001 and obtain the motion vectors as well as the reference indices of each sub-CU from the block corresponding to each sub-CU.

[0087] In the first step, a reference picture 1050 and the corresponding block is determined by the motion information of the spatial neighboring blocks of the current CU 1000. To avoid the repetitive scanning process of neighboring blocks, the first merge candidate in the merge

candidate list of the current CU 1000 is used. The first available motion vector as well as its associated reference index are set to be the temporal vector and the index to the motion source picture. This way, the corresponding block may be more accurately identified, compared with TMVP, wherein the corresponding block (sometimes called collocated block) is always in a bottom-right or center position relative to the current CU.

[0088] In the second step, a corresponding block of the sub-CU 1051 is identified by the temporal vector in the motion source picture 1050, by adding to the coordinate of the current CU the temporal vector. For each sub-CU, the motion information of its corresponding block (e.g., the smallest motion grid that covers the center sample) is used to derive the motion information for the sub-CU. After the motion information of a corresponding $N \times N$ block is identified, it is converted to the motion vectors and reference indices of the current sub-CU, in the same way as TMVP of HEVC, wherein motion scaling and other procedures apply. For example, the decoder checks whether the low-delay condition (e.g. the POCs of all reference pictures of the current picture are smaller than the POC of the current picture) is fulfilled and possibly uses motion vector MV_x (e.g., the motion vector corresponding to reference picture list X) to predict motion vector MV_y (e.g., with X being equal to 0 or 1 and Y being equal to $1-X$) for each sub-CU.

2.1.2 Examples of spatial-temporal motion vector prediction (STMVP)

[0089] In the STMVP method, the motion vectors of the sub-CUs are derived recursively, following raster scan order. FIG. 11 shows an example of one CU with four sub-blocks and neighboring blocks. Consider an 8×8 CU 1100 that includes four 4×4 sub-CUs A (1101), B (1102), C (1103), and D (1104). The neighboring 4×4 blocks in the current frame are labelled as a (1111), b (1112), c (1113), and d (1114).

[0090] The motion derivation for sub-CU A starts by identifying its two spatial neighbors. The first neighbor is the $N \times N$ block above sub-CU A 1101 (block c 1113). If this block c (1113) is not available or is intra coded the other $N \times N$ blocks above sub-CU A (1101) are checked (from left to right, starting at block c 1113). The second neighbor is a block to the left of the sub-CU A 1101 (block b 1112). If block b (1112) is not available or is intra coded other blocks to the left of sub-CU A 1101 are checked (from top to bottom, starting at block b 1112). The motion information obtained from the neighboring blocks for each list is scaled to the first reference frame for a given list. Next, temporal motion vector predictor (TMVP) of sub-block A 1101 is derived by following the same procedure of TMVP derivation as specified in HEVC. The motion

information of the collocated block at block D 1104 is fetched and scaled accordingly. Finally, after retrieving and scaling the motion information, all available motion vectors are averaged separately for each reference list. The averaged motion vector is assigned as the motion vector of the current sub-CU.

2.1.3 Examples of sub-CU motion prediction mode signaling

[0091] In some embodiments, the sub-CU modes are enabled as additional merge candidates and there is no additional syntax element required to signal the modes. Two additional merge candidates are added to merge candidates list of each CU to represent the ATMVP mode and STMVP mode. In other embodiments, up to seven merge candidates may be used, if the sequence parameter set indicates that ATMVP and STMVP are enabled. The encoding logic of the additional merge candidates is the same as for the merge candidates in the HM, which means, for each CU in P or B slice, two more RD checks may be needed for the two additional merge candidates. In some embodiments, e.g., JEM, all bins of the merge index are context coded by CABAC (Context-based Adaptive Binary Arithmetic Coding). In other embodiments, e.g., HEVC, only the first bin is context coded and the remaining bins are context by-pass coded.

2.2 Example of inter prediction methods in VVC

[0092] There are several new coding tools for inter prediction improvement, such as Adaptive motion vector difference resolution (AMVR) for signaling MVD, affine prediction mode, Triangular prediction mode (TPM), ATMVP, Generalized Bi-Prediction (GBI), Bi-directional Optical flow (BIO).

2.2.1 Examples of adaptive motion vector difference resolution

[0093] In some embodiments, motion vector differences (MVDs) (between the motion vector and predicted motion vector of a PU) are signalled in units of quarter luma samples when `use_integer_mv_flag` is equal to 0 in the slice header. In the JEM, a locally adaptive motion vector resolution (LAMVR) is introduced. In the JEM, MVD can be coded in units of quarter luma samples, integer luma samples or four luma samples. The MVD resolution is controlled at the coding unit (CU) level, and MVD resolution flags are conditionally signalled for each CU that has at least one non-zero MVD components.

[0094] For a CU that has at least one non-zero MVD components, a first flag is signalled to indicate whether quarter luma sample MV precision is used in the CU. When the first flag (equal to 1) indicates that quarter luma sample MV precision is not used, another flag is signalled to

indicate whether integer luma sample MV precision or four luma sample MV precision is used.

[0095] When the first MVD resolution flag of a CU is zero, or not coded for a CU (meaning all MVDs in the CU are zero), the quarter luma sample MV resolution is used for the CU. When a CU uses integer-luma sample MV precision or four-luma-sample MV precision, the MVPs in the AMVP candidate list for the CU are rounded to the corresponding precision.

2.2.2 Examples of affine motion compensation prediction

[0096] In HEVC, only a translation motion model is applied for motion compensation prediction (MCP). However, the camera and objects may have many kinds of motion, e.g. zoom in/out, rotation, perspective motions, and/or other irregular motions. In VVC, a simplified affine transform motion compensation prediction is applied with 4-parameter affine model and 6-parameter affine model. As shown in FIGS. 12A and 12B, the affine motion field of the block is described by two (in the 4-parameter affine model that uses the variables a , b , e and f) or three (in the 6-parameter affine model that uses the variables a , b , c , d , e and f) control point motion vectors, respectively.

[0097] The motion vector field (MVF) of a block is described by the following equation with the 4-parameter affine model and 6-parameter affine model respectively:

$$[0098] \quad \begin{cases} mv^h(x, y) = ax - by + e = \frac{(mv_1^h - mv_0^h)}{w}x - \frac{(mv_1^v - mv_0^v)}{w}y + mv_0^h \\ mv^v(x, y) = bx + ay + f = \frac{(mv_1^v - mv_0^v)}{w}x + \frac{(mv_1^h - mv_0^h)}{w}y + mv_0^v \end{cases} \quad \text{Eq. (1)}$$

$$[0099] \quad \begin{cases} mv^h(x, y) = ax + cy + e = \frac{(mv_1^h - mv_0^h)}{w}x + \frac{(mv_2^h - mv_0^h)}{h}y + mv_0^h \\ mv^v(x, y) = bx + dy + f = \frac{(mv_1^v - mv_0^v)}{w}x + \frac{(mv_2^v - mv_0^v)}{h}y + mv_0^v \end{cases} \quad \text{Eq. (2)}$$

[00100] Herein, (mv_0^h, mv_0^v) is motion vector of the top-left corner control point (CP), and (mv_1^h, mv_1^v) is motion vector of the top-right corner control point and (mv_2^h, mv_2^v) is motion vector of the bottom-left corner control point, (x, y) represents the coordinate of a **representative point** relative to the top-left sample within current block. The CP motion vectors may be signaled (like in the affine AMVP mode) or derived on-the-fly (like in the affine merge mode). w and h are the width and height of the current block. In practice, the division is implemented by right-shift with a rounding operation. In VTM, the **representative point** is defined to be the center position of a sub-block, e.g., when the coordinate of the left-top corner

of a sub-block relative to the top-left sample within current block is (x_s, y_s) , the coordinate of the representative point is defined to be (x_s+2, y_s+2) . For each sub-block (e.g., 4×4 in VTM), the representative point is utilized to derive the motion vector for the whole sub-block.

[00101] FIG. 13 shows an example of affine MVF per sub-block for a block 1300, wherein in order to further simplify the motion compensation prediction, sub-block based affine transform prediction is applied. To derive motion vector of each $M \times N$ sub-block, the motion vector of the center sample of each sub-block can be calculated according to Eqs. (1) and (2), and rounded to the motion vector fraction accuracy (e.g., $1/16$ in JEM). Then the motion compensation interpolation filters can be applied to generate the prediction of each sub-block with derived motion vector. The interpolation filters for $1/16$ -pel are introduced by the affine mode. After the MCP, the high accuracy motion vector of each sub-block is rounded and saved as the same accuracy as the normal motion vector.

2.2.3 Examples for signaling of affine prediction

[00102] Similar to the translational motion model, there are also two modes for signaling the side information due affine prediction. They are AFFINE_INTER and AFFINE_MERGE modes.

2.2.4 Examples of AF_INTER mode

[00103] For CUs with both width and height larger than 8, AF_INTER mode can be applied. An affine flag in CU level is signaled in the bitstream to indicate whether AF_INTER mode is used.

In this mode, for each reference picture list (List 0 or List 1), an affine AMVP candidate list is constructed with three types of affine motion predictors in the following order, wherein each candidate includes the estimated CPMVs of the current block. The differences of the best CPMVs found at the encoder side (such as mv_0, mv_1, mv_2 in FIG. 16) and the estimated CPMVs are signalled. In addition, the index of affine AMVP candidate from which the estimated CPMVs are derived is further signalled.

1) Inherited affine motion predictors

The checking order is similar to that of spatial MVPs in HEVC AMVP list construction. First, a left inherited affine motion predictor is derived from the first block in $\{A1, A0\}$ that is affine coded and has the same reference picture as in current block. Second, an above inherited affine motion predictor is derived from the first block in $\{B1, B0, B2\}$ that is affine coded and has the

same reference picture as in current block. The five blocks A1, A0, B1, B0, B2 are depicted in FIG. 15.

Once a neighboring block is found to be coded with affine mode, the CPMVs of the coding unit covering the neighboring block are used to derive predictors of CPMVs of current block. For example, if A1 is coded with non-affine mode and A0 is coded with 4-parameter affine mode, the left inherited affine MV predictor will be derived from A0. In this case, the CPMVs of a CU covering A0, as denoted by MV_0^N for the top-left CPMV and MV_1^N for the top-right CPMV in FIG. 17B are utilized to derive the estimated CPMVs of current block, denoted by MV_0^C , MV_1^C , MV_2^C for the top-left (with coordinate (x0, y0)), top-right (with coordinate (x1, y1)) and bottom-right positions (with coordinate (x2, y2)) of current block.

2) Constructed affine motion predictors

A constructed affine motion predictor consists of control-point motion vectors (CPMV) that are derived from neighboring inter coded blocks, as shown in FIG. 16, that have the same reference picture. If the current affine motion model is 4-parameter affine, the number of CPMVs is 2, otherwise if the current affine motion model is 6-parameter affine, the number of CPMVs is 3. The top-left CPMV $\overline{mv}_0$ is derived by the MV at the first block in the group {A, B, C} that is inter coded and has the same reference picture as in current block. The top-right CPMV $\overline{mv}_1$ is derived by the MV at the first block in the group {D, E} that is inter coded and has the same reference picture as in current block. The bottom-left CPMV $\overline{mv}_2$ is derived by the MV at the first block in the group {F, G} that is inter coded and has the same reference picture as in current block.

- If the current affine motion model is 4-parameter affine, then a constructed affine motion predictor is inserted into the candidate list only if both $\overline{mv}_0$ and $\overline{mv}_1$ are founded, that is, $\overline{mv}_0$ and $\overline{mv}_1$ are used as the estimated CPMVs for top-left (with coordinate (x0, y0)), top-right (with coordinate (x1, y1)) positions of current block.
- If the current affine motion model is 6-parameter affine, then a constructed affine motion predictor is inserted into the candidate list only if $\overline{mv}_0$, $\overline{mv}_1$ and $\overline{mv}_2$ are all founded, that is, $\overline{mv}_0$, $\overline{mv}_1$ and $\overline{mv}_2$ are used as the estimated CPMVs for top-left (with coordinate (x0, y0)), top-right (with coordinate (x1, y1)) and bottom-right (with coordinate (x2, y2)) positions of current block.

No pruning process is applied when inserting a constructed affine motion predictor into the candidate list.

3) Normal AMVP motion predictors

The following applies until the number of affine motion predictors reaches the maximum.

- 1) Derive an affine motion predictor by setting all CPMVs equal to $\overline{mv}_2$ if available.
- 2) Derive an affine motion predictor by setting all CPMVs equal to $\overline{mv}_1$ if available.
- 3) Derive an affine motion predictor by setting all CPMVs equal to $\overline{mv}_0$ if available.
- 4) Derive an affine motion predictor by setting all CPMVs equal to HEVC TMVP if available.
- 5) Derive an affine motion predictor by setting all CPMVs to zero MV.

Note that $\overline{mv}_i$ is already derived in constructed affine motion predictor.

[00104] In AF_INTER mode, when 4/6 parameter affine mode is used, 2/3 control points are required, and therefore 2/3 MVD needs to be coded for these control points, as shown in FIGS. 14A and 14B. In an existing implementation [5], the MV may be derived as follows, e.g., it predicts mvd_1 and mvd_2 from mvd_0 .

$$\textbf{[00105]} \quad mv_0 = \overline{mv}_0 + mvd_0$$

$$\textbf{[00106]} \quad mv_1 = \overline{mv}_1 + mvd_1 + mvd_0$$

$$\textbf{[00107]} \quad mv_2 = \overline{mv}_2 + mvd_2 + mvd_0$$

[00108] Herein, $\overline{mv}_i$, mvd_i and mv_i are the predicted motion vector, motion vector difference and motion vector of the top-left pixel ($i = 0$), top-right pixel ($i = 1$) or left-bottom pixel ($i = 2$) respectively, as shown in FIG. 14B. In some embodiments, the addition of two motion vectors (e.g., $mvA(xA, yA)$ and $mvB(xB, yB)$) is equal to summation of two components separately. For example, $newMV = mvA + mvB$ implies that the two components of newMV are set to $(xA + xB)$ and $(yA + yB)$, respectively.

2.2.5 Examples of AF_MERGE mode

[00109] When a CU is applied in AF_MERGE mode, it gets the first block coded with an affine mode from the valid neighboring reconstructed blocks. And the selection order for the candidate block is from left, above, above right, left bottom to above left as shown in FIG. 17A (denoted by A, B, C, D, E in order). For example, if the neighbour left bottom block is coded in affine mode as denoted by A0 in FIG. 17B, the Control Point (CP) motion vectors mv_0^N , mv_1^N and mv_2^N of the top left corner, above right corner and left bottom corner of the neighbouring

CU/PU which contains the block A are fetched. And the motion vector mv_0^C , mv_1^C and mv_2^C (which is only used for the 6-parameter affine model) of the top left corner/top right/bottom left on the current CU/PU is calculated based on mv_0^N , mv_1^N and mv_2^N . It should be noted that in VTM-2.0, sub-block (e.g. 4×4 block in VTM) located at the top-left corner stores mv_0 , the sub-block located at the top-right corner stores mv_1 if the current block is affine coded. If the current block is coded with the 6-parameter affine model, the sub-block located at the bottom-left corner stores mv_2 ; otherwise (with the 4-parameter affine model), LB stores mv_2' . Other sub-blocks stores the MVs used for MC.

[00110] After the CPMV of the current CU v_0 and v_1 are computed according to the affine motion model in Eqs. (1) and (2), the MVF of the current CU can be generated. In order to identify whether the current CU is coded with AF_MERGE mode, an affine flag can be signaled in the bitstream when there is at least one neighboring block is coded in affine mode.

[00111] In some embodiments (e.g., JVET-L0142 and JVET-L0632), an affine merge candidate list may be constructed with following steps:

[00112] 1) Insert inherited affine candidates

[00113] Inherited affine candidate means that the candidate is derived from the affine motion model of its valid neighbor affine coded block. The maximum two inherited affine candidates are derived from affine motion model of the neighboring blocks and inserted into the candidate list. For the left predictor, the scan order is {A0, A1}; for the above predictor, the scan order is {B0, B1, B2}.

[00114] 2) Insert constructed affine candidates

[00115] If the number of candidates in affine merge candidate list is less than MaxNumAffineCand (set to 5 in this contribution), constructed affine candidates are inserted into the candidate list. Constructed affine candidate means the candidate is constructed by combining the neighbor motion information of each control point.

[00116] a) The motion information for the control points is derived firstly from the specified spatial neighbors and temporal neighbor shown in FIG. 18. CP_k ($k=1, 2, 3, 4$) represents the k -th control point. A0, A1, A2, B0, B1, B2 and B3 are spatial positions for predicting CP_k ($k=1, 2, 3$); T is temporal position for predicting CP_4 .

[00117] The coordinates of CP1, CP2, CP3 and CP4 is (0, 0), (W, 0), (H, 0) and (W, H), respectively, where W and H are the width and height of current block.

[00118] The motion information of each control point is obtained according to the following priority order:

[00119] For CP1, the checking priority is $B2 \rightarrow B3 \rightarrow A2$. B2 is used if it is available. Otherwise, if B2 is available, B3 is used. If both B2 and B3 are unavailable, A2 is used. If all the three candidates are unavailable, the motion information of CP1 cannot be obtained.

[00120] For CP2, the checking priority is $B1 \rightarrow B0$.

[00121] For CP3, the checking priority is $A1 \rightarrow A0$.

[00122] For CP4, T is used.

[00123] b) Secondly, the combinations of controls points are used to construct an affine merge candidate.

[00124] I. Motion information of three control points are needed to construct a 6-parameter affine candidate. The three control points can be selected from one of the following four combinations ($\{CP1, CP2, CP4\}$, $\{CP1, CP2, CP3\}$, $\{CP2, CP3, CP4\}$, $\{CP1, CP3, CP4\}$). Combinations $\{CP1, CP2, CP3\}$, $\{CP2, CP3, CP4\}$, $\{CP1, CP3, CP4\}$ will be converted to a 6-parameter motion model represented by top-left, top-right and bottom-left control points.

[00125] II. Motion information of two control points are needed to construct a 4-parameter affine candidate. The two control points can be selected from one of the following six combinations ($\{CP1, CP4\}$, $\{CP2, CP3\}$, $\{CP1, CP2\}$, $\{CP2, CP4\}$, $\{CP1, CP3\}$, $\{CP3, CP4\}$). Combinations $\{CP1, CP4\}$, $\{CP2, CP3\}$, $\{CP2, CP4\}$, $\{CP1, CP3\}$, $\{CP3, CP4\}$ will be converted to a 4-parameter motion model represented by top-left and top-right control points.

[00126] III. The combinations of constructed affine candidates are inserted into to candidate list as following order:

[00127] $\{CP1, CP2, CP3\}$, $\{CP1, CP2, CP4\}$, $\{CP1, CP3, CP4\}$, $\{CP2, CP3, CP4\}$, $\{CP1, CP2\}$, $\{CP1, CP3\}$, $\{CP2, CP3\}$, $\{CP1, CP4\}$, $\{CP2, CP4\}$, $\{CP3, CP4\}$

[00128] i. For reference list X (X being 0 or 1) of a combination, the reference index with highest usage ratio in the control points is selected as the reference index of list X, and motion vectors point to difference reference picture will be scaled.

[00129] After a candidate is derived, full pruning process is performed to check whether same candidate has been inserted into the list. If a same candidate exists, the derived candidate is

discarded.

[00130] 3) Padding with zero motion vectors

[00131] If the number of candidates in affine merge candidate list is less than 5, zero motion vectors with zero reference indices are insert into the candidate list, until the list is full.

[00132] More specifically, for the sub-block merge candidate list, a 4-parameter merge candidate with MVs set to (0, 0) and prediction direction set to uni-prediction from list 0 (for P slice) and bi-prediction (for B slice).

2.2.6 Examples of sub-block sizes for chroma affine coded blocks

[00133] In the proposal JVET-L0265, adopted by VTM3.0, the chroma sub-block size is modified from 2x2 to 4x4. The MV of a 4x4 chroma sub-block is calculated as the average of the MVs of the four corresponding 4x4 luma sub-blocks. With the expanded sub-block size, the bandwidth in the worst case is reduced; e.g.,

[00134]
$$\text{MV_Chroma} = \text{Average}(\text{clipped}(\text{MV_luma0}) + \text{clipped}(\text{MV_luma1}) + \text{clipped}(\text{MV_luma2}) + \text{clipped}(\text{MV_luma3}))$$

2.4 Examples of Merge with Motion Vector Differences (MMVD)

[00135] In JVET-L0054, ultimate motion vector expression (UMVE, also known as MMVD) is presented. UMVE is used for either skip or merge modes with a proposed motion vector expression method.

[00136] UMVE re-uses merge candidate as same as those included in the regular merge candidate list in VVC. Among the merge candidates, a base candidate can be selected, and is further expanded by the proposed motion vector expression method.

[00137] UMVE provides a new motion vector difference (MVD) representation method, in which a starting point, a motion magnitude and a motion direction are used to represent a MVD.

[00138] This proposed technique uses a merge candidate list as it is. But only candidates which are default merge type (MRG_TYPE_DEFAULT_N) are considered for UMVE's expansion.

[00139] Base candidate index defines the starting point. Base candidate index indicates the best candidate among candidates in the list as follows.

Table 1: Base candidate IDX

Base candidate IDX	0	1	2	3
N th MVP	1 st MVP	2 nd MVP	3 rd MVP	4 th MVP

[00140] If the number of base candidate is equal to 1, Base candidate IDX is not signaled.

[00141] Distance index is motion magnitude information. Distance index indicates the pre-defined distance from the starting point information. Pre-defined distance is as follows:

Table 2: Distance IDX

Distance IDX	0	1	2	3	4	5	6	7
Pixel distance	1/4-pel	1/2-pel	1-pel	2-pel	4-pel	8-pel	16-pel	32-pel

[00142] Direction index represents the direction of the MVD relative to the starting point. The direction index can represent of the four directions as shown below.

Table 3: Direction IDX

Direction IDX	00	01	10	11
x-axis	+	–	N/A	N/A
y-axis	N/A	N/A	+	–

[00143] In some embodiments, the UMVE flag is signaled right after sending a skip flag or merge flag. If skip or merge flag is true, UMVE flag is parsed. If UMVE flag is equal to 1, UMVE syntaxes are parsed. But, if not 1, AFFINE flag is parsed. If AFFINE flag is equal to 1, that is AFFINE mode, But, if not 1, skip/merge index is parsed for VTM's skip/merge mode.

[00144] Additional line buffer due to UMVE candidates is not needed. Because a skip/merge candidate of software is directly used as a base candidate. Using input UMVE index, the supplement of MV is decided right before motion compensation. There is no need to hold long line buffer for this.

[00145] In current common test condition, either the first or the second merge candidate in the merge candidate list could be selected as the base candidate.

2.5 Details for the MVD derivation process

The following text are from JVET-L1001-v6.

The luma merge motion vector differences mMvdL0 and mMvdL1 are derived as follows:

- If both predFlagL0 and predFlagL1 are equal to 1, the following applies:

$$\text{currPocDiffL0} = \text{DiffPicOrderCnt}(\text{currPic}, \text{RefPicList0}[\text{refIdxL0}]) \quad (8-272)$$

$$\text{currPocDiffL1} = \text{DiffPicOrderCnt}(\text{currPic}, \text{RefPicList1}[\text{refIdxL1}]) \quad (8-273)$$

- If $-\text{currPocDiffL0} * \text{currPocDiffL1}$ is greater than 0, the following applies:

$$\text{mMvdL0}[0] = \text{MmvdOffset}[0]$$

(8-274)

$$\text{mMvdL0}[1] = \text{MmvdOffset}[1]$$

(8-275)

$$\text{mMvdL1}[0] = -\text{MmvdOffset}[0] \quad (8-276)$$

$$\text{mMvdL1}[1] = -\text{MmvdOffset}[1] \quad (8-277)$$

- Otherwise ($-\text{currPocDiffL0} * \text{currPocDiffL1}$ is less than 0), the following applies:

$$\text{mMvdL0}[0] = \text{MmvdOffset}[0]$$

(8-278)

$$\text{mMvdL0}[1] = \text{MmvdOffset}[1]$$

(8-279)

$$\text{mMvdL1}[0] = \text{MmvdOffset}[0]$$

(8-280)

$$\text{mMvdL1}[1] = \text{MmvdOffset}[1]$$

(8-281)

- If $\text{Abs}(\text{currPocDiffL0})$ is greater than $\text{Abs}(\text{currPocDiffL1})$, the following applies:

$$\text{td} = \text{Clip3}(-128, 127, \text{currPocDiffL0}) \quad (8-282)$$

$$\text{tb} = \text{Clip3}(-128, 127, \text{currPocDiffL1}) \quad (8-283)$$

$$\text{tx} = (16384 + (\text{Abs}(\text{td}) \gg 1)) / \text{td} \quad (8-284)$$

$$\text{distScaleFactor} = \text{Clip3}(-4096, 4095, (\text{tb} * \text{tx} + 32) \gg 6) \quad (8-285)$$

$$\text{mMvdL1}[0] = \text{Clip3}(-2^{15}, 2^{15} - 1, \text{Sign}(\text{distScaleFactor} * \text{mMvdL1}[0]) * \quad (8-286)$$

$$((\text{Abs}(\text{distScaleFactor} * \text{mMvdL1}[0]) + 127) \gg 8))$$

$$\text{mMvdL1}[1] = \text{Clip3}(-2^{15}, 2^{15} - 1, \text{Sign}(\text{distScaleFactor} * \text{mMvdL1}[1]) * \quad (8-287)$$

$$((\text{Abs}(\text{distScaleFactor} * \text{mMvdL1}[1]) + 127) >> 8))$$

- Otherwise if $\text{Abs}(\text{currPocDiffL0})$ is less than $\text{Abs}(\text{currPocDiffL0})$, the following applies:

$$\text{td} = \text{Clip3}(-128, 127, \text{currPocDiffL1}) \quad (8-288)$$

$$\text{tb} = \text{Clip3}(-128, 127, \text{currPocDiffL0}) \quad (8-289)$$

$$\text{tx} = (16384 + (\text{Abs}(\text{td}) >> 1)) / \text{td} \quad (8-290)$$

$$\text{distScaleFactor} = \text{Clip3}(-4096, 4095, (\text{tb} * \text{tx} + 32) >> 6) \quad (8-291)$$

$$\begin{aligned} \text{mMvdL0}[0] &= \text{Clip3}(-2^{15}, 2^{15} - 1, \text{Sign}(\text{distScaleFactor} * \text{mMvdL0}[0]) * \\ &\quad ((\text{Abs}(\text{distScaleFactor} * \text{mMvdL0}[0]) + 127) >> 8)) \end{aligned} \quad (8-292)$$

$$\begin{aligned} \text{mMvdL0}[1] &= \text{Clip3}(-2^{15}, 2^{15} - 1, \text{Sign}(\text{distScaleFactor} * \text{mMvdL0}[1]) * \\ &\quad ((\text{Abs}(\text{distScaleFactor} * \text{mMvdL0}[1]) + 127) >> 8)) \end{aligned} \quad (8-293)$$

- Otherwise (predFlagL0 or predFlagL1 are equal to 1), the following applies for X being 0 and 1:

$$\text{mMvdLX}[0] = (\text{predFlagLX} == 1) ? \text{MmvdOffset}[0] : 0 \quad (8-294)$$

$$\text{mMvdLX}[1] = (\text{predFlagLX} == 1) ? \text{MmvdOffset}[1] : 0 \quad (8-295)$$

3 Drawbacks of existing implementations

[00146] In existing implementations (e.g., VTM-3.0), due to the increased MV precision to 1/16-pel, the original restriction of MV range is not meaningful especially for 8K resolution videos. In addition, for 4x4 sub-PU prediction (i.e. affine mode), the minimum chroma sub-block size is not limited to 4x4. Four luma motion vectors are averaged together to form a single motion vector for the corresponding chroma 4x4 sub-block. By clipping luma motion vectors before averaging to form chroma vectors (clip-then-average), every decoder would have to implement that clipping to get a match even for majority of cases MV are not exceeding the restricted ranges.

4 Example methods for selecting and applying motion vector ranges for video coding

[00147] Embodiments of the presently disclosed technology overcome the drawbacks of existing implementations, thereby providing video coding with higher coding efficiencies. The selection and application of motion vector ranges for video coding, based on the disclosed technology, may enhance both existing and future video coding standards, is elucidated in the following examples described for various implementations. The examples of the disclosed

technology provided below explain general concepts, and are not meant to be interpreted as limiting. In an example, unless explicitly indicated to the contrary, the various features described in these examples may be combined. It should be noted that some of the proposed technologies could be applied to existing candidate list construction process.

[00148] Example 1. It is proposed to use the originally derived luma motion vectors of multiple luma blocks (e.g., un-clipped) to derive the chroma motion vector of one chroma block. The ‘block’ may be defined as prediction unit, coding unit, a sub-block utilized in a prediction/coding unit coded with sub-block based technologies (e.g., affine, ATMVP). In some examples, the ‘luma’ and ‘chroma’ may be interpreted to Y color component and Cb/Cr color components. In some examples, the ‘luma’ and ‘chroma’ may be interpreted to G color component and B/R color components. In the following examples, ‘sub-block’ may be also replaced by the terminology ‘block’.

[00149] (a) In one example, how to derive sub-blocks’ motion vectors of chroma components may depend on color formats such as 4:2:0, 4:2:2 or 4:4:4.

[00150] i. In one example, the four $M \times N$ luma blocks’ motion vectors are utilized to derive a $M \times N$ chroma block’ motion vector. Alternatively, furthermore, it may be invoked under the condition of 4:2:0 color subsampling format.

[00151] ii. In one example, the two $M \times N$ luma blocks’ motion vectors are utilized to derive a $M \times N$ chroma block’ motion vector. Alternatively, furthermore, it may be invoked under the condition of 4:2:2 color subsampling format.

[00152] iii. In one example, the one $M \times N$ luma block’s motion vector are utilized as the $M \times N$ chroma block’ motion vector. Furthermore, it may be invoked under the 4:4:4 color format.

[00153] (b) In one example, linear function of the multiple luma motion vectors may be applied to derive the chroma motion vector.

[00154] (c) Alternatively, furthermore, the derived chroma motion vector may be further clipped before being utilized for motion compensation of the chroma block.

[00155] (d) Above methods may be applied to sub-block based technologies, e.g., affine, ATMVP, STMVP etc. al. Alternatively, furthermore, $M \times N$ may denote the sub-block size and the multiple luma/chroma block may denote the multiple luma sub-blocks and one chroma sub-block.

[00156] (e) In one example, for the affine mode, MV_Chroma may be set to the average of four corresponding luma blocks, such as Average (MV_luma0 + MV_luma1 + MV_luma2 + MV_luma3).

[00157] (f) The above mentioned Luma/Chroma components may refer to Y/Cb/Cr, or other color representations such as G/R/B.

[00158] Example 2. It is proposed to restrict the MV ranges based on the MV precisions.

[00159] (a) In one example, different MV ranges may be defined based on the usage of AMVR, and it could be different for different profiles/levels.

[00160] (b) MV ranges may be different for different modes, such as affine or non-affine.

[00161] (c) When the restricted range is different, the clipping of motion vectors may be applied with different input parameters (i.e., based on the range).

[00162] Example 3. The internal bit-depth of motion vectors may be increased to M bits (e.g., $M > 16$).

[00163] (a) In one example, for the AMVP process, when motion vector prediction candidate is derived from a motion vector associated with a different reference picture from the target reference picture, each component of the motion vector may be scaled to the target reference picture with the range of $[-((1 \ll (M-1))), (1 \ll (M-1))-1]$. In one implementation, M is set to 18 and the range of $[-((1 \ll (M-1))), (1 \ll (M-1))-1]$ is $[-131072, 131071]$.

[00164] (b) In one example, for the TMVP process for either AMVP/merge mode and/or ATMVP/STMVP, when motion vector prediction candidate is derived from a motion vector associated with a temporal reference picture from the target reference picture, the motion vector may be scaled to the target reference picture with the range of $[-((1 \ll (M-1))), (1 \ll (M-1))-1]$.

[00165] (c) In one example, for the MVD derivation process for MMVD, when MVD of one reference picture list is scaled to another reference picture list, the scaled MVD may be restricted to be with the range of $[-((1 \ll (M-1))), (1 \ll (M-1))-1]$.

[00166] (d) In one example, above methods may be invoked when affine is enabled for a sequence/picture/slice/tile.

[00167] Example 4. MV precision (e.g., used for MV storage, internal MV precision) may be signaled from encoder to decoder in VPS/PPS/Slice header/tile group/tile/CTU row/CTU.

[00168] (a) MV precision may be different in different standard profiles/levels/tiers.

[00169] Example 5. The internal bit-depth of MVs may be signaled from encoder to decoder

in VPS/PPS/Slice header/tile group/tile/CTU row/CTU.

[00170] (a) The internal bit-depth of MVs may be different in different standard profiles/levels/tiers.

[00171] Example 6. MV precision may depend on picture width and/or height.

[00172] Example 7. The internal bit-depth of MVs may depend on picture width and/or height.

[00173] Example 8. In one example, the clipping of a MV component may depend on the dimensions of the reference picture, the top-left position of the current block, the MV precision and the MV internal bit-depth.

[00174] (a) For example, suppose the width and height of the reference picture is W and H, the top-left position of the current block is (x0, y0), MV precision is $1/(1 \ll \text{Shift})$ sub-pixel (for example, 1/16 sub-pixel when Shift is equal to 4). CW and CH are the maximum width and maximum height of a CU/PU/video data processing unit, respectively. Then

[00175] i. $\text{PicMinH} = (-x0+1+\text{Offset1}) \ll \text{Shift}$; or $\text{PicMinH} = (-x0+\text{Offset1}) \ll \text{Shift}$;

[00176] ii. $\text{PicMaxH} = (W-1-x0+\text{Offset2}) \ll \text{Shift}$; or $\text{PicMaxH} = (W-x0+\text{Offset2}) \ll \text{Shift}$;

[00177] iii. $\text{PicMinV} = (-y0+1+\text{Offset3}) \ll \text{Shift}$; or $\text{PicMinV} = (-y0+\text{Offset3}) \ll \text{Shift}$;

[00178] iv. $\text{PicMaxV} = (H-1-y0+\text{Offset4}) \ll \text{Shift}$. or $\text{PicMaxV} = (H-y0+\text{Offset4}) \ll \text{Shift}$.

[00179] Herein, Offset1, Offset2, Offset3 and Offset4 are offsets which may depend on padding methods. For example, $\text{Offset1} = -CW-8$, $\text{Offset3} = -CH-8$, $\text{Offset2}=\text{Offset4}=8$.

[00180] Then

[00181] $\text{MVMinH} = \max(\text{PicMinH}, -((1 \ll (M-1))))$,

[00182] $\text{MVMinV} = \max(\text{PicMinV}, -((1 \ll (M-1))))$,

[00183] $\text{MVMaxH} = \min(\text{PicMaxH}, ((1 \ll (M-1))-1))$, and

[00184] $\text{MVMaxV} = \min(\text{PicMaxV}, ((1 \ll (M-1))-1))$.

[00185] The x-component of a MV may be clipped to be in the range [MVMinH, MVMaxH], and the y-component of a MV may be clipped to be in the range [MVMinV, MVMaxV].

[00186] Example 9. The internal bit-depth of affine motion vectors/affine motion vector predictors/control point motion vectors may be restricted to the same range as non-affine motion vectors.

[00187] (a) In one example, the control point motion vectors may be restricted to be within the range $[-2^{15}, 2^{15} - 1]$.

[00188] The examples described above may be incorporated in the context of the method described below, e.g., methods 2100 and 2200, which may be implemented at a video decoder or a video encoder.

[00189] FIG. 21 shows a flowchart of an exemplary method for video processing. The method 2100 includes, at step 2110, deriving, based on unclipped previously calculated luma motion vectors of multiple luma blocks, a chroma motion vector for a chroma block associated with a current video block of a video. The method 2100 includes, at step 2120, performing, based on the chroma motion vector, a conversion between the current video block and a bitstream representation of the video.

[00190] FIG. 22A shows a flowchart of an exemplary method for video processing. The method 2200 includes, at step 2202, determining a motion vector precision of one or more motion vectors related to a current video block of a video. The method 2200 includes, at step 2204, selecting, based on the motion vector precision, a motion vector range. The method 2200 includes, at step 2206, performing, based on the motion vector range, a conversion between the current video block and a bitstream representation of the video.

[00191] FIG. 22B shows a flowchart of an exemplary method for video processing. The method 2210 includes, at step 2212, determining to use an internal bit-depth of one or more motion vectors related to a current video block of a video, wherein the internal bit-depth have M bits, M is greater than 16, and the current video block uses a temporal motion vector prediction. The method 2210 further includes, at step 2214, performing a conversion between the current video block and a bitstream representation of the video based on at least M-bit motion vectors.

[00192] FIG. 22C shows a flowchart of an exemplary method for video processing. The method 2220 includes, at step 2222, determining to use a motion vector precision value for a precision of motion vectors for a conversion between a current video block of a video unit of a video and a coded representation of the video. The method 2220 further includes, at step 2224, performing the conversion based on the precision of motion vectors according to the motion vector precision value. In some implementations, a syntax element at the video unit level indicates the motion vector precision value.

[00193] FIG. 22D shows a flowchart of an exemplary method for video processing. The method 2230 includes, at step 2232, determining a parameter for a conversion between a current video block of a video and a bitstream representation of the current video block. The method 2230

further includes, at step 2234, performing the conversion based on the parameter. In some implementations, the determining the parameter is based on a height or a width of a current picture that comprises the current video block.

[00194] FIG. 22E shows a flowchart of an exemplary method for video processing. The method 2240 includes, at step 2242, clipping a temporary motion vector to generate a clipped motion vector. The method 2240 further includes, at step 2244, deriving a motion vector associated with a current video block of a video at least based on the clipped motion vector. The method 2240 further includes, at step 2246, performing a conversion between the current video block of a video and a bitstream representation of the video based on the motion vector associated with the current video block. In some implementations, the clipping of the temporary motion vector is based on at least one of a height (H) or a width (W) of a reference picture of the current video block, a top-left position (x0, y0) of the current video block, or a motion vector precision or an internal bit-depth (M) of the motion vector.

[00195] FIG. 23A shows a flowchart of an exemplary method for video processing. The method 2300 includes, at step 2302, performing a conversion between a current video block of a video and a bitstream representation of the video, wherein the conversion uses a scaling process to obtain motion vector differences of a first reference picture from motion vector differences from a second reference picture, and wherein the scaling process uses a clipping operation to constrain the motion vector differences of the first reference picture to fall in a range $[-((1 \ll (M-1))), (1 \ll (M-1)) - 1]$, where M is a number greater than 16.

[00196] FIG. 23B shows a flowchart of an exemplary method for video processing. The method 2310 includes, at step 2312, determining to use an internal bit-depth of one or more motion vectors for a conversion between a current video block of a video unit of a video and a bitstream representation of the video. The method 2310 further includes, at step 2314, performing the conversion using the one or more motion vectors. In some implementations, a syntax element at a video unit level indicates the internal bit-depth.

[00197] FIG. 23C shows a flowchart of an exemplary method for video processing. The method 2320 includes, at step 2322, determining to use an internal bit-depth of affine motion parameters for a conversion between a current video block of a video unit of a video and a bitstream representation of the video. The method 2320 further includes, at step 2324, performing the conversion based on the determining, wherein the internal bit-depth of the affine motion

parameters has a same range for non-affine motion parameters.

5 Example implementations of the disclosed technology

[00198] In some embodiments, the modifications in the JVET-L1001-v6 specification are as shown below, with both deletions and additions indicated using `\begin{DELETE}` and `\end{ADD}` tags, respectively.

8.3.3 Derivation process for subblock motion vector components and reference indices

8.3.3.1 General

Inputs to this process are:

- a luma location (x_{Cb} , y_{Cb}) of the top-left sample of the current luma coding block relative to the top-left luma sample of the current picture,
- a variable $cbWidth$ specifying the width of the current coding block in luma samples,
- a variable $cbHeight$ specifying the height of the current coding block in luma samples.

Outputs of this process are:

- the reference indices $refIdxL0$ and $refIdxL1$,
- the number of luma coding subblocks in horizontal direction $numSbX$ and in vertical direction $numSbY$,
- the prediction list utilization flag arrays $predFlagL0[xSbIdx][ySbIdx]$ and $predFlagL1[xSbIdx][ySbIdx]$ with $xSbIdx = 0..numSbX - 1$, $ySbIdx = 0..numSbY - 1$,
- the luma subblock motion vector arrays in 1/16 fractional-sample accuracy $mvL0[xSbIdx][ySbIdx]$ and $mvL1[xSbIdx][ySbIdx]$ with $xSbIdx = 0..numSbX - 1$, $ySbIdx = 0..numSbY - 1$,
- the chroma subblock motion vector arrays in 1/32 fractional-sample accuracy $mvCL0[xSbIdx][ySbIdx]$ and $mvCL1[xSbIdx][ySbIdx]$ with $xSbIdx = 0..numSbX - 1$, $ySbIdx = 0..numSbY - 1$,
- the bi-prediction weight index $gbiIdx$.

For the derivation of the variables $mvL0[xSbIdx][ySbIdx]$, $mvL1[xSbIdx][ySbIdx]$, $mvCL0[xSbIdx][ySbIdx]$ and $mvCL1[xSbIdx][ySbIdx]$, $refIdxL0$, $refIdxL1$, $numSbX$, $numSbY$, $predFlagL0[xSbIdx][ySbIdx]$ and $predFlagL1[xSbIdx][ySbIdx]$, the following applies:

- If $\text{merge_subblock_flag}[x_{Cb}][y_{Cb}]$ is equal to 1, the derivation process for motion vectors and reference indices in subblock merge mode as specified in 8.3.3.2 is invoked with the luma coding block location (x_{Cb}, y_{Cb}) , the luma coding block width cbWidth and the luma coding block height cbHeight as inputs, the number of luma coding subblocks in horizontal direction numSbX and in vertical direction numSbY , the reference indices refIdxL0 , refIdxL1 , the prediction list utilization flag arrays $\text{predFlagL0}[x_{SbIdx}][y_{SbIdx}]$ and $\text{predFlagL1}[x_{SbIdx}][y_{SbIdx}]$, the luma subblock motion vector arrays $\text{mvL0}[x_{SbIdx}][y_{SbIdx}]$ and $\text{mvL1}[x_{SbIdx}][y_{SbIdx}]$, and the chroma subblock motion vector arrays $\text{mvCL0}[x_{SbIdx}][y_{SbIdx}]$ and $\text{mvCL1}[x_{SbIdx}][y_{SbIdx}]$, with $x_{SbIdx} = 0.. \text{numSbX} - 1$, $y_{SbIdx} = 0.. \text{numSbY} - 1$, and the bi-prediction weight index gbiIdx as outputs.
- Otherwise ($\text{merge_subblock_flag}[x_{Cb}][y_{Cb}]$ is equal to 0), for X being replaced by either 0 or 1 in the variables predFlagLX , cpMvLX , MvdCpLX , and refIdxLX , in PRED_LX , and in the syntax element ref_idx_IX , the following ordered steps apply:
 - For the derivation of the number of control point motion vectors numCpMv , the control point motion vectors $\text{cpMvLX}[cpIdx]$ with $cpIdx$ ranging from 0 to $\text{numCpMv} - 1$, refIdxLX , $\text{predFlagLX}[0][0]$, the following applies:
 1. The number of control point motion vectors numCpMv is set equal to $\text{MotionModelIdx}[x_{Cb}][y_{Cb}] + 1$.
 2. The variables refIdxLX and predFlagLX are derived as follows:
 - If $\text{inter_pred_idc}[x_{Cb}][y_{Cb}]$ is equal to PRED_LX or PRED_BI ,

$$\text{refIdxLX} = \text{ref_idx_IX}[x_{Cb}][y_{Cb}] \quad (8-347)$$

$$\text{predFlagLX}[0][0] = 1 \quad (8-348)$$
 - Otherwise, the variables refIdxLX and predFlagLX are specified by:

$$\text{refIdxLX} = -1 \quad (8-349)$$

$$\text{predFlagLX}[0][0] = 0 \quad (8-350)$$
 3. The variable $\text{mvdCpLX}[cpIdx]$ with $cpIdx$ ranging from 0 to $\text{numCpMv} - 1$, is derived as follows:

$$\text{mvdCpLX}[cpIdx][0] = \text{MvdCpLX}[x_{Cb}][y_{Cb}][cpIdx][0] \quad (8-351)$$

$$\text{mvdCpLX}[cpIdx][1] = \text{MvdCpLX}[x_{Cb}][y_{Cb}][cpIdx][1] \quad (8-352)$$

4. When $\text{predFlagLX}[0][0]$ is equal to 1, the derivation process for luma affine control point motion vector predictors as specified in clause 8.3.3.7 is invoked with the luma coding block location (x_{Cb}, y_{Cb}) , and the variables $cbWidth$, $cbHeight$, $refIdxLX$, and the number of control point motion vectors $numCpMv$ as inputs, and the output being $mvpCpLX[cpIdx]$ with $cpIdx$ ranging from 0 to $numCpMv - 1$.
5. When $\text{predFlagLX}[0][0]$ is equal to 1, the luma motion vectors $cpMvLX[cpIdx]$ with $cpIdx$ ranging from 0 to $NumCpMv - 1$, are derived as follows:

\begin{DELETE}

$$uLX[cpIdx][0] = (mvpCpLX[cpIdx][0] + mvdCpLX[cpIdx][0] + 2^{18}) \% 2^{18} \quad (8-353)$$

$$cpMvLX[cpIdx][0] = (uLX[cpIdx][0] \geq 2^{17}) ? (uLX[cpIdx][0] - 2^{18}) :$$

$$uLX[cpIdx][0] \quad (8-354)$$

$$uLX[cpIdx][1] = (mvpCpLX[cpIdx][1] + mvdCpLX[cpIdx][1] + 2^{18}) \% 2^{18} \quad (8-355)$$

$$cpMvLX[cpIdx][1] = (uLX[cpIdx][1] \geq 2^{17}) ? (uLX[cpIdx][1] - 2^{18}) :$$

$$uLX[cpIdx][1] \quad (8-356)$$

\end{DELETE}

\begin{ADD}

$$cpMvLX[cpIdx][0] = \text{Clip3}(-2^{M-1}, 2^{M-1} - 1, (mvpCpLX[cpIdx][0] + mvdCpLX[cpIdx][0]))$$

$$cpMvLX[cpIdx][1] = \text{Clip3}(-2^{M-1}, 2^{M-1} - 1, (mvpCpLX[cpIdx][1] + mvdCpLX[cpIdx][1]))$$

\end{ADD}

- The variables $numSbX$ and $numSbY$ are derived as follows:

$$numSbX = (cbWidth \gg 2)$$

$$(8-357)$$

$$numSbY = (cbHeight \gg 2)$$

$$(8-358)$$

- For $xSbIdx = 0..numSbX - 1$, $ySbIdx = 0..numSbY - 1$, the following applies:

$$\text{predFlagLX}[xSbIdx][ySbIdx] = \text{predFlagLX}[0][0] \quad (8-359)$$

- When $\text{predFlagLX}[0][0]$ is equal to 1, the derivation process for motion vector arrays from affine control point motion vectors as specified in subclause 8.3.3.9 is invoked

with the luma coding block location (x_{Cb} , y_{Cb}), the luma coding block width $cbWidth$, the luma prediction block height $cbHeight$, the number of control point motion vectors $numCpMv$, the control point motion vectors $cpMvLX[cpIdx]$ with $cpIdx$ being 0..2, and the number of luma coding subblocks in horizontal direction $numSbX$ and in vertical direction $numSbY$ as inputs, the luma motion vector array $mvLX[xSbIdx][ySbIdx]$ and the chroma motion vector array $mvCLX[xSbIdx][ySbIdx]$ with $xSbIdx = 0..numSbX - 1$, $ySbIdx = 0..numSbY - 1$ as outputs.

- The bi-prediction weight index $gbiIdx$ is set equal to $gbi_idx[xCb][yCb]$.

[00199] FIG. 24A is a block diagram of a video processing apparatus 2400. The apparatus 2400 may be used to implement one or more of the methods described herein. The apparatus 2400 may be embodied in a smartphone, tablet, computer, Internet of Things (IoT) receiver, and so on. The apparatus 2400 may include one or more processors 2402, one or more memories 2404 and video processing hardware 2406. The processor(s) 2402 may be configured to implement one or more methods as shown in FIGS. 21 to 23C described in the present document. The memory (memories) 2404 may be used for storing data and code used for implementing the methods and techniques described herein. The video processing hardware 2406 may be used to implement, in hardware circuitry, some techniques described in the present document.

[00200] FIG. 24B is another example of a block diagram of a video processing system in which disclosed techniques may be implemented. FIG. 24B is a block diagram showing an example video processing system 3100 in which various techniques disclosed herein may be implemented. Various implementations may include some or all of the components of the system 3100. The system 3100 may include input 3102 for receiving video content. The video content may be received in a raw or uncompressed format, e.g., 8 or 10 bit multi-component pixel values, or may be in a compressed or encoded format. The input 3102 may represent a network interface, a peripheral bus interface, or a storage interface. Examples of network interface include wired interfaces such as Ethernet, passive optical network (PON), etc. and wireless interfaces such as Wi-Fi or cellular interfaces.

[00201] The system 3100 may include a coding component 3104 that may implement the various coding or encoding methods described in the present document. The coding component 3104 may reduce the average bitrate of video from the input 3102 to the output of the coding

component 3104 to produce a coded representation of the video. The coding techniques are therefore sometimes called video compression or video transcoding techniques. The output of the coding component 3104 may be either stored, or transmitted via a communication connected, as represented by the component 3106. The stored or communicated bitstream (or coded) representation of the video received at the input 3102 may be used by the component 3108 for generating pixel values or displayable video that is sent to a display interface 3110. The process of generating user-viewable video from the bitstream representation is sometimes called video decompression. Furthermore, while certain video processing operations are referred to as “coding” operations or tools, it will be appreciated that the coding tools or operations are used at an encoder and corresponding decoding tools or operations that reverse the results of the coding will be performed by a decoder.

[00202] Examples of a peripheral bus interface or a display interface may include universal serial bus (USB) or high definition multimedia interface (HDMI) or Displayport, and so on. Examples of storage interfaces include SATA (serial advanced technology attachment), PCI, IDE interface, and the like. The techniques described in the present document may be embodied in various electronic devices such as mobile phones, laptops, smartphones or other devices that are capable of performing digital data processing and/or video display.

[00203] In some embodiments, the video coding methods may be implemented using an apparatus that is implemented on a hardware platform as described with respect to FIG. 24A or 24B.

[00204] Various techniques and embodiments may be described using the following clause-based format.

[00205] The first set of clauses describe certain features and aspects of the disclosed techniques listed in the previous section, including, for example, Examples 1 and 3(a).

[00206] 1. A method for video processing, comprising: deriving, based on unclipped previously calculated luma motion vectors of multiple luma blocks, a chroma motion vector for a chroma block associated with a current video block of a video; and performing, based on the chroma motion vector, a conversion between the current video block and a bitstream representation of the video.

[00207] 2. The method of clause 1, wherein the method for deriving the chroma motion vector is further based on a color format of the current video block.

- [00208] 3. The method of clause 2, wherein the color format of the current video block is 4:2:0, 4:2:2 or 4:4:4.
- [00209] 4. The method of clause 1, wherein the deriving the chroma motion vector is based on four luma motion vectors of the unclipped previously calculated luma motion vectors.
- [00210] 5. The method of clause 4, wherein the color format is 4:2:0.
- [00211] 6. The method of clause 1, wherein the deriving the chroma motion vector is based on two luma motion vectors of the unclipped previously calculated luma motion vectors.
- [00212] 7. The method of clause 6, wherein the color format is 4:2:2.
- [00213] 8. The method of clause 1, wherein the deriving the chroma motion vector is based on one luma motion vector of the unclipped previously calculated luma motion vectors.
- [00214] 9. The method of clause 8, wherein the color format is 4:4:4.
- [00215] 10. The method of clause 1, wherein the deriving the chroma motion vector is based on a linear function of the plurality of luma motion vectors.
- [00216] 11. The method of clause 1, further comprising: clipping the chroma motion vector to generate a clipped chroma motion vector, wherein the performing the conversion comprises motion compensation based on the clipped chroma motion vector.
- [00217] 12. The method of any of clauses 1 to 11, wherein the current video block comprises sub-blocks, and wherein the performing the conversion is based on at least one of affine prediction, sub-block temporal motion vector prediction (SbTMVP), or spatial-temporal motion vector prediction (STMVP).
- [00218] 13. The method of clause 12, wherein the performing the conversion is based on the affine prediction and the chroma motion vector is set as an average of motion vectors of four corresponding luma blocks.
- [00219] 14. The method of any of clauses 1 to 11, wherein the chroma block and the multiple luma blocks correspond to a Y/Cb/Cr color space.
- [00220] 15. The method of any of clauses 1 to 11, wherein the chroma block and the plurality of luma blocks correspond to an R/G/B color space.
- [00221] 16. A method for video processing, comprising: determining to use an internal bit-depth of one or more motion vectors related to a current video block of a video, the internal bit-depth being M bits, wherein M is greater than 16; and performing a conversion between the current video block and a bitstream representation of the video based on an advanced motion vector

prediction (AMVP) process and the M-bit motion vectors.

[00222] 17. The method of clause 16, wherein at least one of the one or more motion vectors is derived from a motion vector predictor, and wherein the motion vector predictor is scaled to a range $[-((1 \ll (M-1))), (1 \ll (M-1))-1]$.

[00223] 18. The method of clause 17, wherein M is 18 and the range is $[-131072, 131071]$.

[00224] 19. The method of clause 17, wherein the motion vector predictor is associated with a block which has a reference picture that is different from a target reference picture of the current video block.

[00225] 20. The method of any of clauses 1 to 19, wherein the conversion comprises generating pixel values of the current video block from the bitstream representation.

[00226] 21. The method of any of clauses 1 to 19, wherein the conversion comprises generating the bitstream representation from pixel values of the current video block.

[00227] 22. An apparatus in a video system comprising a processor and a non-transitory memory with instructions thereon, wherein the instructions upon execution by the processor, cause the processor to implement the method in any one of clauses 1 to 21.

[00228] 23. A computer program product stored on a non-transitory computer readable media, the computer program product including program code for carrying out the method in any one of clauses 1 to 21.

[00229] The second set of clauses describe certain features and aspects of the disclosed techniques listed in the previous section, including, for example, Examples 2, 3(b), 4, 6, and 8.

[00230] 1. A method for video processing, comprising: determining a motion vector precision of one or more motion vectors related to a current video block of a video; selecting, based on the motion vector precision, a motion vector range; and performing, based on the motion vector range, a conversion between the current video block and a bitstream representation of the video.

[00231] 2. The method of clause 1, wherein the performing the conversion uses an adaptive motion vector difference resolution (AMVR) coding tool.

[00232] 3. The method of clause 1, wherein the selecting the motion vector range is further based on a profile or a level of the AMVR coding tool.

[00233] 4. The method of clause 1, wherein the selecting the motion vector range is further based on a coding mode of the current video block.

[00234] 5. The method of clause 1, further comprising: clipping, based on the motion vector

range, the one or more motion vectors prior to the performing the conversion.

[00235] 6. The method of clause 5, wherein the clipping the one or more motion vectors is performed with input parameters that are determined based on the motion vector range.

[00236] 7. A method for video processing, comprising: determining to use an internal bit-depth of one or more motion vectors related to a current video block of a video, wherein the internal bit-depth have M bits, M is greater than 16, and the current video block uses a temporal motion vector prediction; and performing a conversion between the current video block and a bitstream representation of the video based on at least M-bit motion vectors.

[00237] 8. The method of clause 7, wherein the conversion is performed based on the temporal motion vector prediction for an advanced motion vector prediction (AMVP) mode of the current video block.

[00238] 9. The method of clause 7, wherein the conversion is performed based on the temporal motion vector prediction for a merge mode of the current video block.

[00239] 10. The method of clause 7, wherein the conversion is performed based on the temporal motion vector prediction for an alternative temporal motion vector prediction (ATMVP) mode of the current video block, wherein the ATMVP mode allows at least one set of motion information to be derived from blocks smaller than a current coding unit.

[00240] 11. The method of clause 7, wherein the conversion is performed based on the temporal motion vector prediction for a spatial-temporal motion vector prediction (STMVP) mode of the current video block.

[00241] 12. The method of clause 7, wherein the one or more motion vectors are derived from a motion vector prediction candidate, the motion vector prediction candidate is derived at least based on a motion vector associated with a temporal reference picture, the motion vector is scaled to a target reference picture, and the scaled motion vector is clipped to be within the range of $[-((1 \ll (M-1))), (1 \ll (M-1))-1]$.

[00242] 13. The method of clause 12, wherein M is 18 and the range is $[-131072, 131071]$.

[00243] 14. A method of video processing, comprising: determining to use a motion vector precision value for a precision of motion vectors for a conversion between a current video block of a video unit of a video and a coded representation of the video; and performing the conversion based on the precision of motion vectors according to the motion vector precision value, wherein a syntax element at the video unit level indicates the motion vector precision value.

[00244] 15. The method of clause 14, wherein the video unit corresponds to a video sequence a video picture, a slice, a tile, a coding tree unit row or a coding tree unit.

[00245] 16. The method of clause 14, wherein the syntax element is in a video parameter set, a picture parameter set, a slice header, a tile group header, a tile header, a coding tree unit header or a coding tree unit header.

[00246] 17. The method of any one of clauses 14-16, wherein the determining to use the motion vector precision value is based on a profile or a level or a tier used for the conversion.

[00247] 18. A method for video processing, comprising: determining a parameter for a conversion between a current video block of a video and a bitstream representation of the current video block; and performing the conversion based on the parameter, wherein the determining the parameter is based on a height or a width of a current picture that comprises the current video block.

[00248] 19. The method of clause 18, wherein the parameter is a motion vector precision of one or more motion vectors used during the conversion.

[00249] 20. The method of clause 18, wherein the parameter is an internal bit-depth of one or more motion vectors used during the conversion.

[00250] 21. A method for video processing, comprising: clipping a temporary motion vector to generate a clipped motion vector; deriving a motion vector associated with a current video block of a video at least based on the clipped motion vector; and performing a conversion between the current video block of a video and a bitstream representation of the video based on the motion vector associated with the current video block, wherein the clipping of the temporary motion vector is based on at least one of a height (H) or a width (W) of a reference picture of the current video block, a top-left position (x0, y0) of the current video block, or a motion vector precision or an internal bit-depth (M) of the motion vector.

[00251] 22. The method of clause 21, wherein the motion vector precision is $1/(1 \ll \text{Shift})$ sub-pixels, wherein Shift is a positive integer, wherein CW and CH are a maximum width and a maximum height, respectively, of a coding unit of the current video block, wherein an x-component of the motion vecto is clipped to a range [MVMinH, MVMaxH], wherein a y component of the one or more motion vectors is clipped to a range [MVMinV, MVMaxV], wherein $\text{MVMinH} = \max(\text{PicMinH}, -(1 \ll (M-1)))$, $\text{MVMinV} = \max(\text{PicMinV}, -(1 \ll (M-1)))$, $\text{MVMaxH} = \min(\text{PicMaxH}, (1 \ll (M-1)) - 1)$, and $\text{MVMaxV} = \min(\text{PicMaxV}, (1 \ll (M-1)) -$

1), wherein $\text{PicMinH} = (-x_0 + 1 + \text{Offset1}) \ll \text{Shift}$, $\text{PicMaxH} = (W - 1 - x_0 + \text{Offset2}) \ll \text{Shift}$, $\text{PicMinV} = (-y_0 + 1 + \text{Offset3}) \ll \text{Shift}$, and $\text{PicMaxV} = (H - 1 - y_0 + \text{Offset4}) \ll \text{Shift}$, and wherein Offset1, Offset2, Offset3 and Offset4 are non-negative integers based on one or more padding methods.

[00252] 23. The method of clause 22, wherein $\text{Offset1} = -\text{CW} - 8$, $\text{Offset3} = -\text{CH} - 8$, $\text{Offset2} = 8$ and $\text{Offset4} = 8$.

[00253] 24. The method of any of clauses 1 to 23, wherein the conversion comprises generating pixel values of the current video block from the bitstream representation.

[00254] 25. The method of any of clauses 1 to 23, wherein the conversion comprises generating the bitstream representation from pixel values of the current video block.

[00255] 26. An apparatus in a video system comprising a processor and a non-transitory memory with instructions thereon, wherein the instructions upon execution by the processor, cause the processor to implement the method in any one of clauses 1 to 25.

[00256] 27. A computer program product stored on a non-transitory computer readable media, the computer program product including program code for carrying out the method in any one of clauses 1 to 25.

[00257] The third set of clauses describe certain features and aspects of the disclosed techniques listed in the previous section, including, for example, Examples 3(c)-(d), 5, 7, and 9.

[00258] 1. A method for video processing, comprising: performing a conversion between a current video block of a video and a bitstream representation of the video, wherein the conversion uses a scaling process to obtain motion vector differences of a first reference picture from motion vector differences from a second reference picture, and wherein the scaling process uses a clipping operation to constrain the motion vector differences of the first reference picture to fall in a range $[-((1 \ll (M-1))), (1 \ll (M-1))-1]$, where M is a number greater than 16.

[00259] 2. The method of clause 1, wherein the first reference picture is associated with a first reference picture list.

[00260] 3. The method of clause 1, wherein the first reference picture is associated with a second reference picture list.

[00261] 4. The method of clause 3, wherein the first reference picture list is different from the second reference picture list.

[00262] 5. The method of clause 1, wherein an affine coding tool is enabled for the conversion.

[00263] 6. The method of clause 5, wherein a field in the bitstream representation indicates that the affine coding tool is enabled.

[00264] 7. The method of clause 1, wherein the conversion is performed based on a motion vector difference (MVD) derivation process for a merge with motion vector difference (MMVD) mode and wherein the MMVD mode comprises a motion vector expression that includes a starting point, a motion vector distance and a motion direction for the current video block.

[00265] 8. The method of clause 7, wherein at least one of the motion vector differences of the first reference picture or the second reference picture is derived based on at least one of the motion vector distance or the motion direction for the current video block.

[00266] 9. The method of clause 8, wherein at least one merge candidate is selected based on the motion vector expression and further refined by the at least one of the motion vector differences.

[00267] 10. The method of clause 1, wherein an internal bit-depth of the one or more motion vectors is signaled in a video parameter set (VPS), a picture parameter set (PPS), a slice header, a tile, a tile group, a coding tree unit (CTU) or a CTU row.

[00268] 11. A method for video processing, comprising: determining to use an internal bit-depth of one or more motion vectors for a conversion between a current video block of a video unit of a video and a bitstream representation of the video; and performing the conversion using the one or more motion vectors, wherein a syntax element at a video unit level indicates the internal bit-depth.

[00269] 12. The method of clause 11, wherein the video unit corresponds to a video sequence, a video picture, a slice, a tile, a coding tree unit row or a coding tree unit.

[00270] 13. The method of clause 12, further comprising: correspondingly the syntax element is in a video parameter set, a picture parameter set, a slice header, a tile group header, a tile header, a coding tree unit header or a coding tree unit header.

[00271] 14. The method of clause 11 or 12, wherein the determining to use the internal bit-depth is based on a profile or a level or a tier used for the conversion.

[00272] 15. The method of clause 11 or 12, wherein the internal bit-depth is based on a height or a width of a current picture that comprises the current video block.

[00273] 16. A method for video processing, comprising: determining to use an internal bit-depth of affine motion parameters for a conversion between a current video block of a video unit

of a video and a bitstream representation of the video; and performing the conversion based on the determining, wherein the internal bit-depth of the affine motion parameters has a same range for non-affine motion parameters.

[00274] 17. The method of clause 16, wherein the range is $[-2^{15}, 2^{15}-1]$.

[00275] 18. The method of clause 16, wherein the range is $[-2^{17}, 2^{17}-1]$.

[00276] 19. The method of clause 16, wherein the affine motion parameters include at least one of affine motion vectors, affine motion vector predictors, or control point motion vectors (CPMVs).

[00277] 20. The method of any of clauses 1 to 19, wherein the conversion comprises generating pixel values of the current video block from the bitstream representation.

[00278] 21. The method of any of clauses 1 to 19, wherein the conversion comprises generating the bitstream representation from pixel values of the current video block.

[00279] 22. An apparatus in a video system comprising a processor and a non-transitory memory with instructions thereon, wherein the instructions upon execution by the processor, cause the processor to implement the method in any one of clauses 1 to 21.

[00280] 23. A computer program product stored on a non-transitory computer readable media, the computer program product including program code for carrying out the method in any one of clauses 1 to 21.

[00281] From the foregoing, it will be appreciated that specific embodiments of the presently disclosed technology have been described herein for purposes of illustration, but that various modifications may be made without deviating from the scope of the invention. Accordingly, the presently disclosed technology is not limited except as by the appended claims.

[00282] Implementations of the subject matter and the functional operations described in this patent document can be implemented in various systems, digital electronic circuitry, or in computer software, firmware, or hardware, including the structures disclosed in this specification and their structural equivalents, or in combinations of one or more of them. Implementations of the subject matter described in this specification can be implemented as one or more computer program products, i.e., one or more modules of computer program instructions encoded on a tangible and non-transitory computer readable medium for execution by, or to control the operation of, data processing apparatus. The computer readable medium can be a machine-readable storage device, a machine-readable storage substrate, a memory device, a composition

of matter effecting a machine-readable propagated signal, or a combination of one or more of them. The term “data processing unit” or “data processing apparatus” encompasses all apparatus, devices, and machines for processing data, including by way of example a programmable processor, a computer, or multiple processors or computers. The apparatus can include, in addition to hardware, code that creates an execution environment for the computer program in question, e.g., code that constitutes processor firmware, a protocol stack, a database management system, an operating system, or a combination of one or more of them.

[00283] A computer program (also known as a program, software, software application, script, or code) can be written in any form of programming language, including compiled or interpreted languages, and it can be deployed in any form, including as a stand-alone program or as a module, component, subroutine, or other unit suitable for use in a computing environment. A computer program does not necessarily correspond to a file in a file system. A program can be stored in a portion of a file that holds other programs or data (e.g., one or more scripts stored in a markup language document), in a single file dedicated to the program in question, or in multiple coordinated files (e.g., files that store one or more modules, sub programs, or portions of code). A computer program can be deployed to be executed on one computer or on multiple computers that are located at one site or distributed across multiple sites and interconnected by a communication network.

[00284] The processes and logic flows described in this specification can be performed by one or more programmable processors executing one or more computer programs to perform functions by operating on input data and generating output. The processes and logic flows can also be performed by, and apparatus can also be implemented as, special purpose logic circuitry, e.g., an FPGA (field programmable gate array) or an ASIC (application specific integrated circuit).

[00285] Processors suitable for the execution of a computer program include, by way of example, both general and special purpose microprocessors, and any one or more processors of any kind of digital computer. Generally, a processor will receive instructions and data from a read only memory or a random access memory or both. The essential elements of a computer are a processor for performing instructions and one or more memory devices for storing instructions and data. Generally, a computer will also include, or be operatively coupled to receive data from or transfer data to, or both, one or more mass storage devices for storing data, e.g., magnetic,

magneto optical disks, or optical disks. However, a computer need not have such devices. Computer readable media suitable for storing computer program instructions and data include all forms of nonvolatile memory, media and memory devices, including by way of example semiconductor memory devices, e.g., EPROM, EEPROM, and flash memory devices. The processor and the memory can be supplemented by, or incorporated in, special purpose logic circuitry.

[00286] It is intended that the specification, together with the drawings, be considered exemplary only, where exemplary means an example. As used herein, the use of “or” is intended to include “and/or”, unless the context clearly indicates otherwise.

[00287] While this patent document contains many specifics, these should not be construed as limitations on the scope of any invention or of what may be claimed, but rather as descriptions of features that may be specific to particular embodiments of particular inventions. Certain features that are described in this patent document in the context of separate embodiments can also be implemented in combination in a single embodiment. Conversely, various features that are described in the context of a single embodiment can also be implemented in multiple embodiments separately or in any suitable subcombination. Moreover, although features may be described above as acting in certain combinations and even initially claimed as such, one or more features from a claimed combination can in some cases be excised from the combination, and the claimed combination may be directed to a subcombination or variation of a subcombination.

[00288] Similarly, while operations are depicted in the drawings in a particular order, this should not be understood as requiring that such operations be performed in the particular order shown or in sequential order, or that all illustrated operations be performed, to achieve desirable results. Moreover, the separation of various system components in the embodiments described in this patent document should not be understood as requiring such separation in all embodiments.

[00289] Only a few implementations and examples are described and other implementations, enhancements and variations can be made based on what is described and illustrated in this patent document.

CLAIMS

What is claimed is:

1. A method for video processing, comprising:
deriving, based on unclipped previously calculated luma motion vectors of multiple luma blocks, a chroma motion vector for a chroma block associated with a current video block of a video; and
performing, based on the chroma motion vector, a conversion between the current video block and a bitstream representation of the video.
2. The method of claim 1, wherein the method for deriving the chroma motion vector is further based on a color format of the current video block.
3. The method of claim 2, wherein the color format of the current video block is 4:2:0, 4:2:2 or 4:4:4.
4. The method of claim 1, wherein the deriving the chroma motion vector is based on four luma motion vectors of the unclipped previously calculated luma motion vectors.
5. The method of claim 4, wherein the color format is 4:2:0.
6. The method of claim 1, wherein the deriving the chroma motion vector is based on two luma motion vectors of the unclipped previously calculated luma motion vectors.
7. The method of claim 6, wherein the color format is 4:2:2.
8. The method of claim 1, wherein the deriving the chroma motion vector is based on one luma motion vector of the unclipped previously calculated luma motion vectors.
9. The method of claim 8, wherein the color format is 4:4:4.

10. The method of claim 1, wherein the deriving the chroma motion vector is based on a linear function of the plurality of luma motion vectors.
11. The method of claim 1, further comprising:
clipping the chroma motion vector to generate a clipped chroma motion vector,
wherein the performing the conversion comprises motion compensation based on the clipped chroma motion vector.
12. The method of any of claims 1 to 11, wherein the current video block comprises sub-blocks, and wherein the performing the conversion is based on at least one of affine prediction, sub-block temporal motion vector prediction (SbTMVP), or spatial-temporal motion vector prediction (STMVP).
13. The method of claim 12, wherein the performing the conversion is based on the affine prediction and the chroma motion vector is set as an average of motion vectors of four corresponding luma blocks.
14. The method of any of claims 1 to 11, wherein the chroma block and the multiple luma blocks correspond to a Y/Cb/Cr color space.
15. The method of any of claims 1 to 11, wherein the chroma block and the plurality of luma blocks correspond to an R/G/B color space.
16. A method for video processing, comprising:
determining to use an internal bit-depth of one or more motion vectors related to a current video block of a video, the internal bit-depth being M bits, wherein M is greater than 16; and
performing a conversion between the current video block and a bitstream representation of the video based on an advanced motion vector prediction (AMVP) process and the M-bit motion vectors.

17. The method of claim 16, wherein at least one of the one or more motion vectors is derived from a motion vector predictor, and wherein the motion vector predictor is scaled to a range $[-((1 \ll (M-1))), (1 \ll (M-1))-1]$.
18. The method of claim 17, wherein M is 18 and the range is $[-131072, 131071]$.
19. The method of claim 17, wherein the motion vector predictor is associated with a block which has a reference picture that is different from a target reference picture of the current video block.
20. The method of any of claims 1 to 19, wherein the conversion comprises generating pixel values of the current video block from the bitstream representation.
21. The method of any of claims 1 to 19, wherein the conversion comprises generating the bitstream representation from pixel values of the current video block.
22. An apparatus in a video system comprising a processor and a non-transitory memory with instructions thereon, wherein the instructions upon execution by the processor, cause the processor to implement the method recited in one or more of claims 1 to 21.
23. A computer program product stored on a non-transitory computer readable media, the computer program product including program code for carrying out the method recited in one or more of claims 1 to 21.

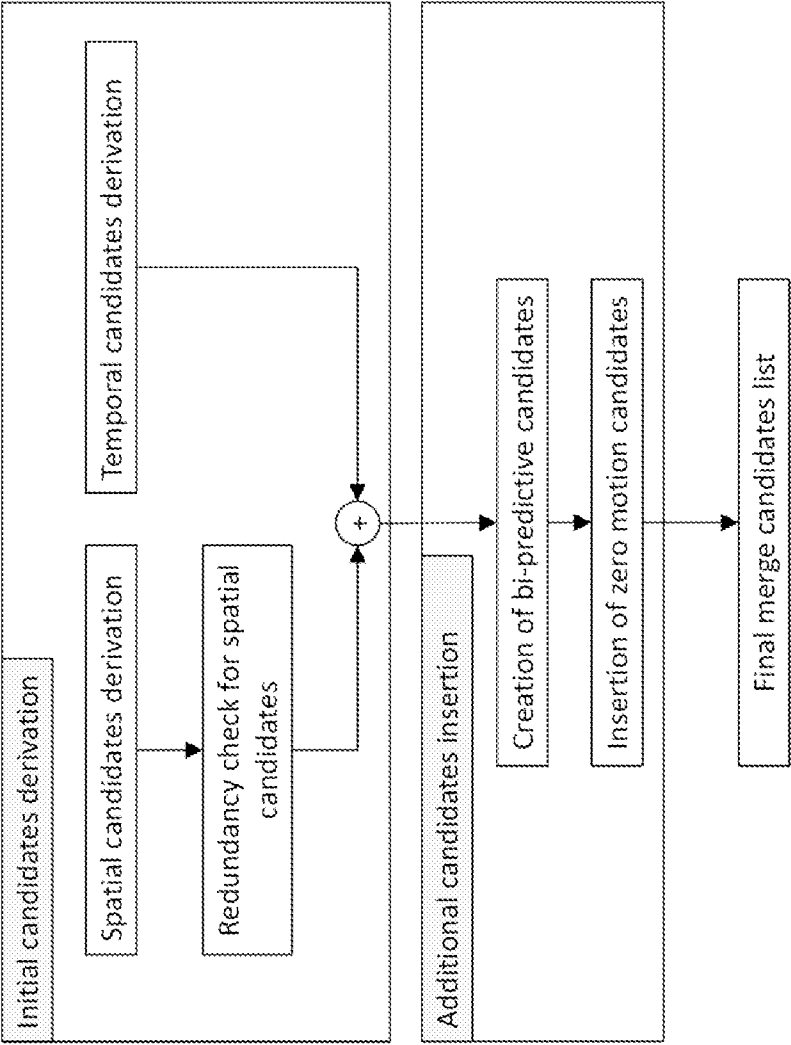


FIG. 1

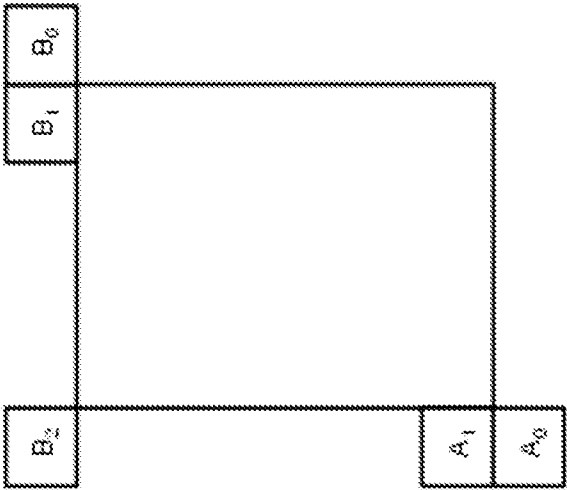


FIG. 2

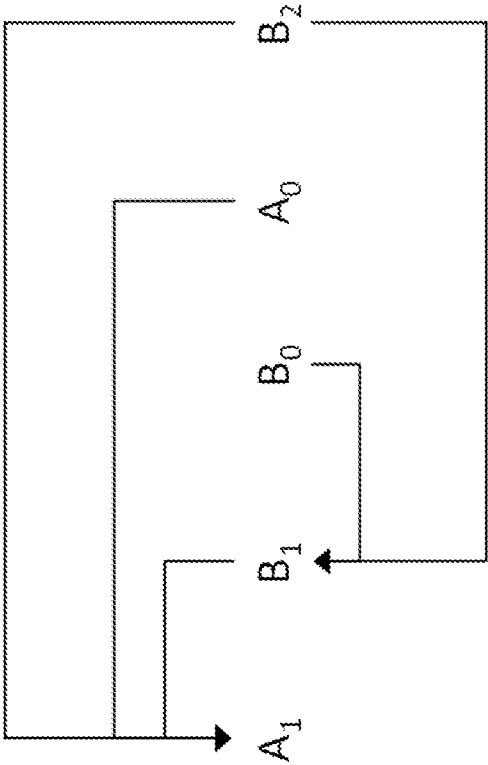


FIG. 3

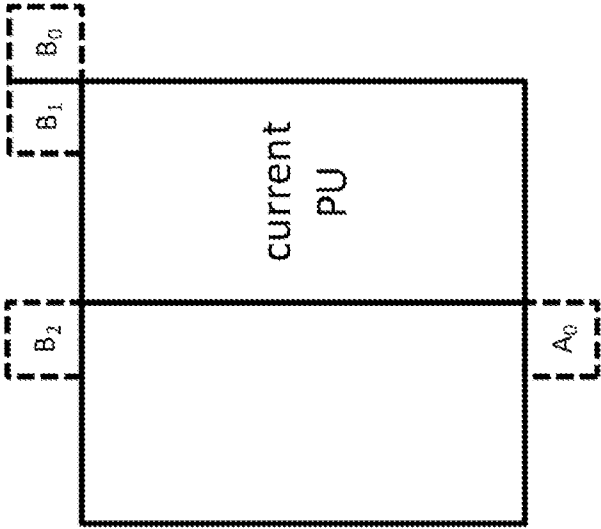


FIG. 4A

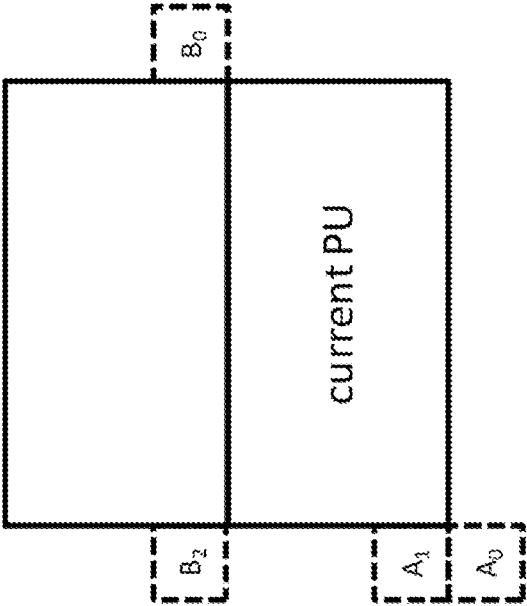


FIG. 4B

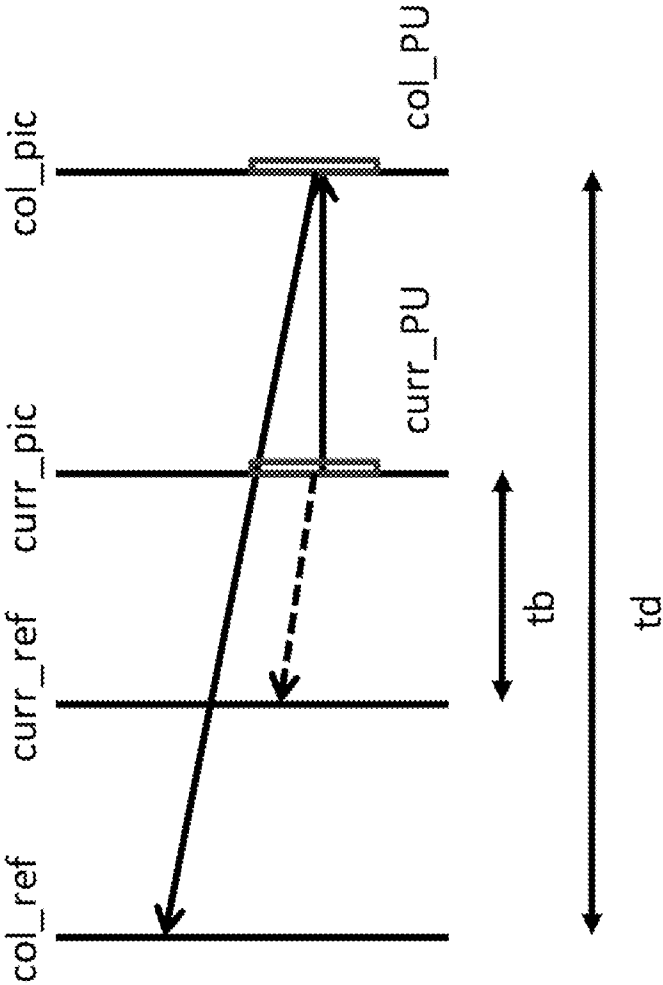


FIG. 5

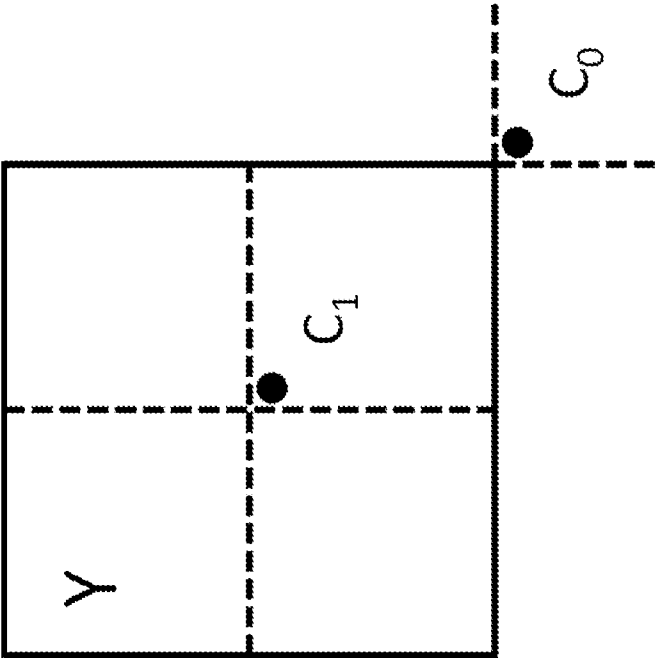


FIG. 6

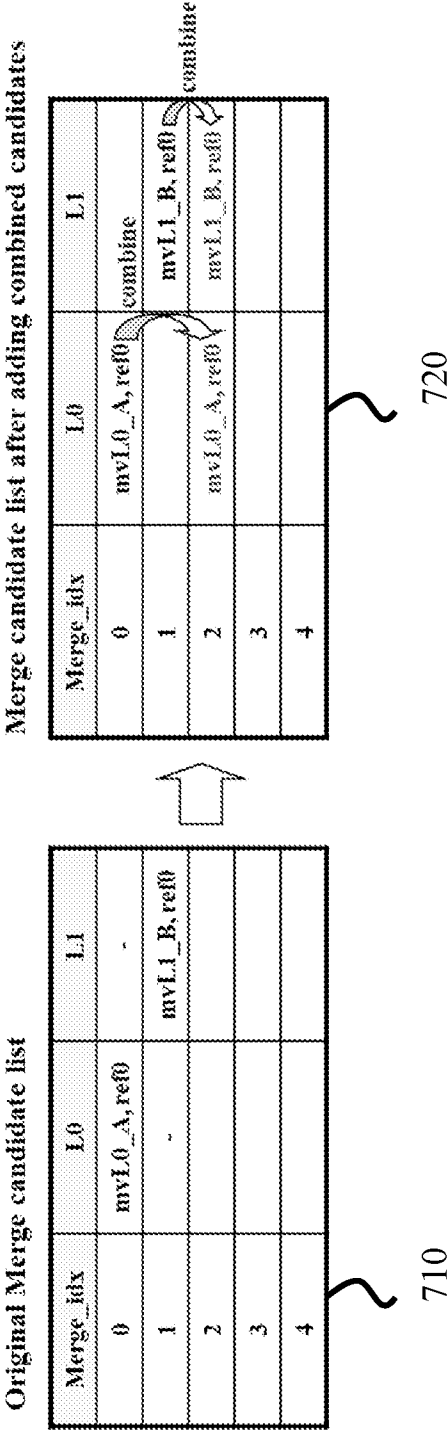


FIG. 7

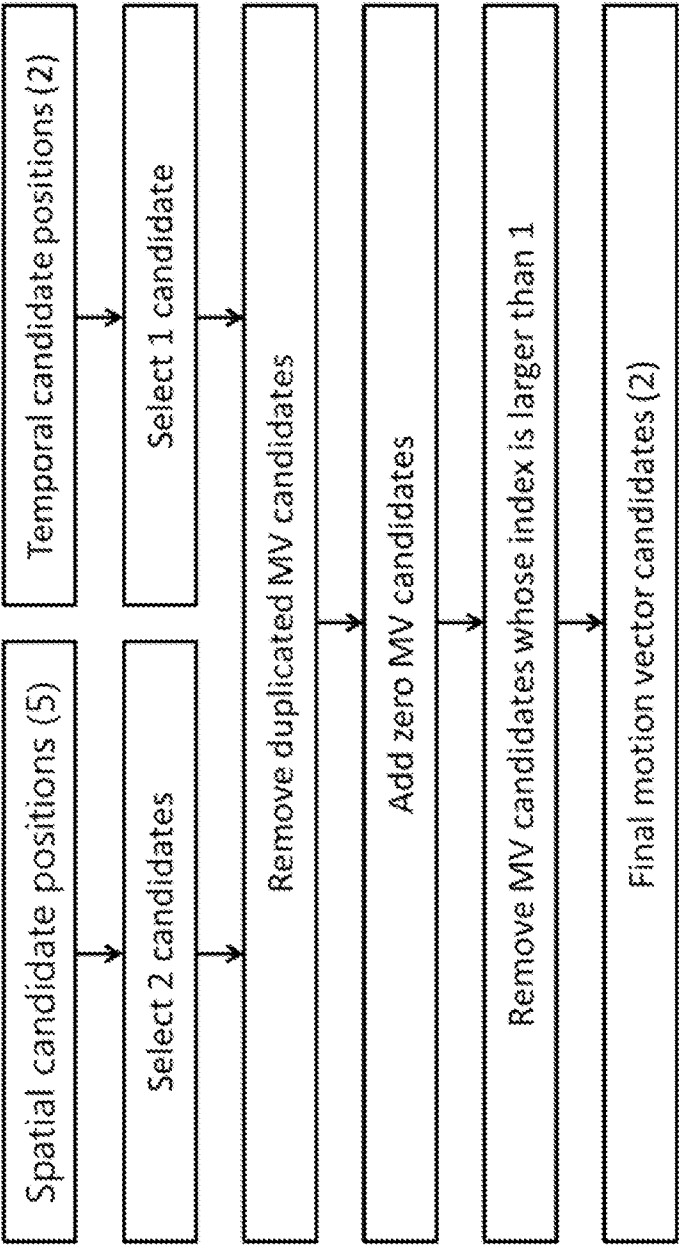


FIG. 8

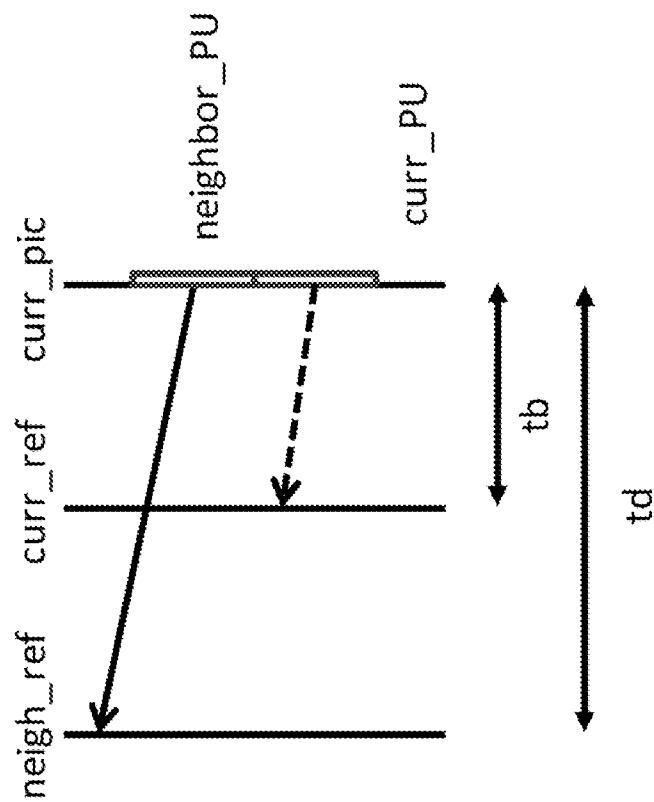


FIG. 9

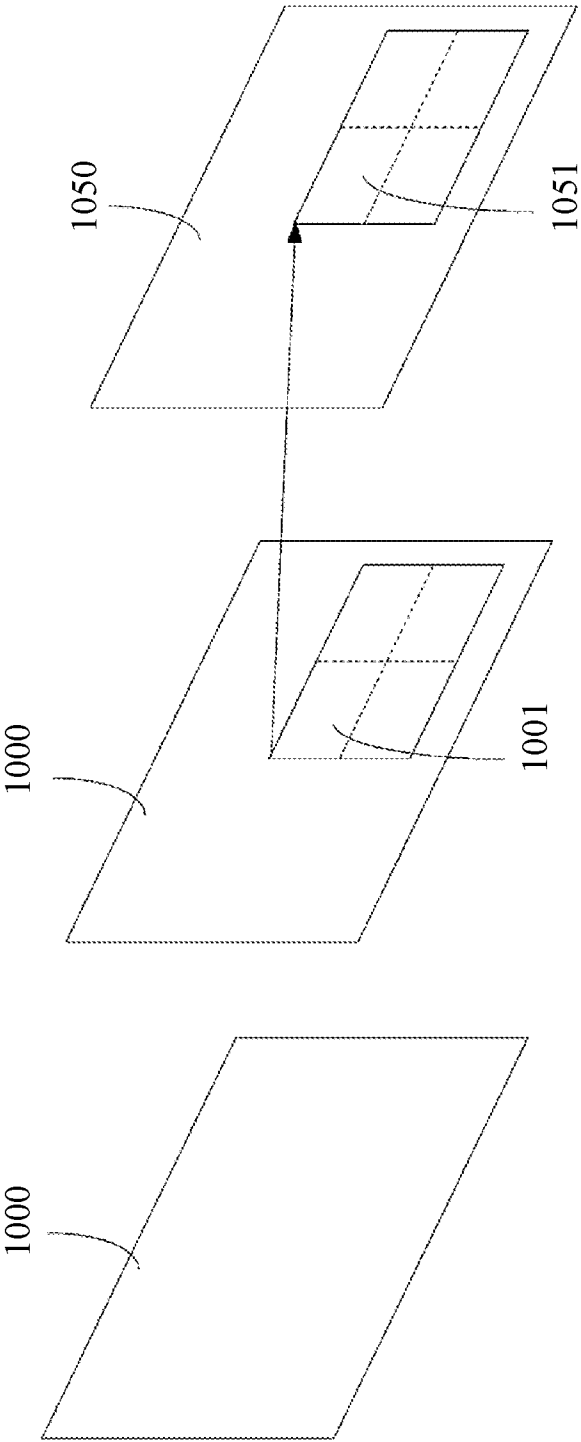


FIG. 10

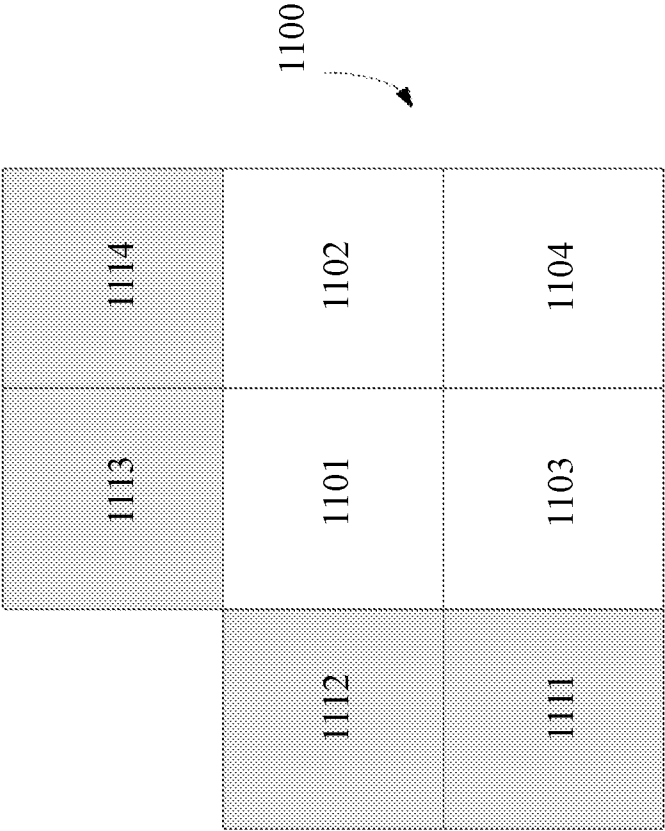


FIG. 11

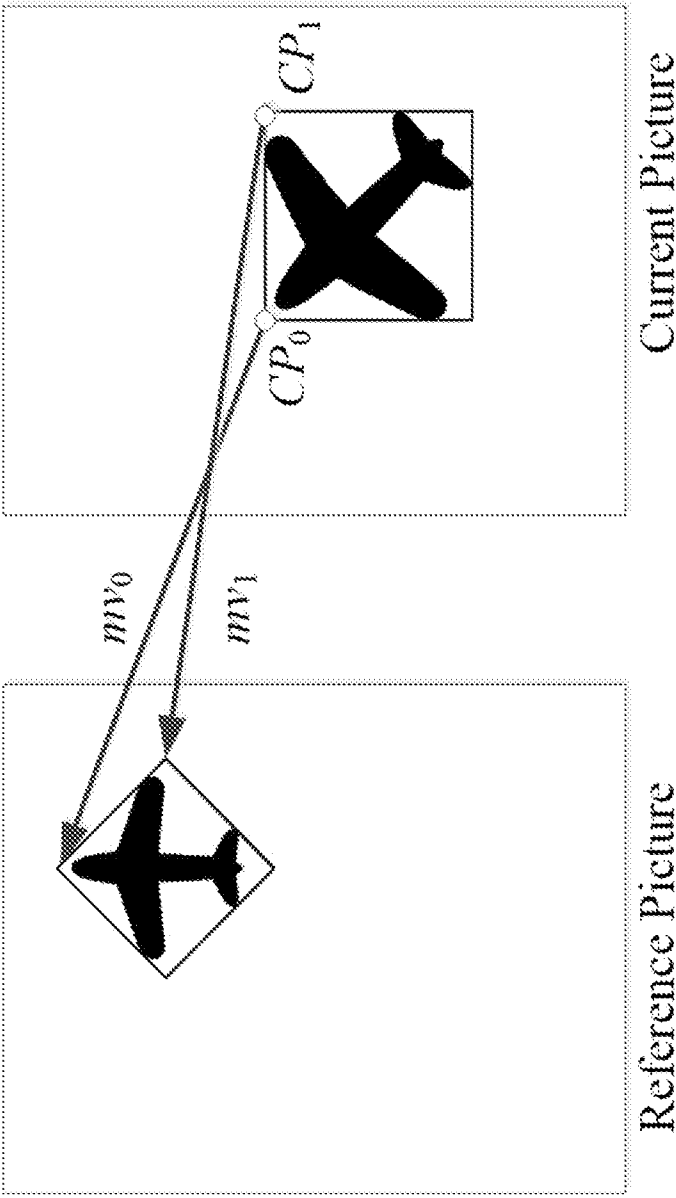


FIG. 12A

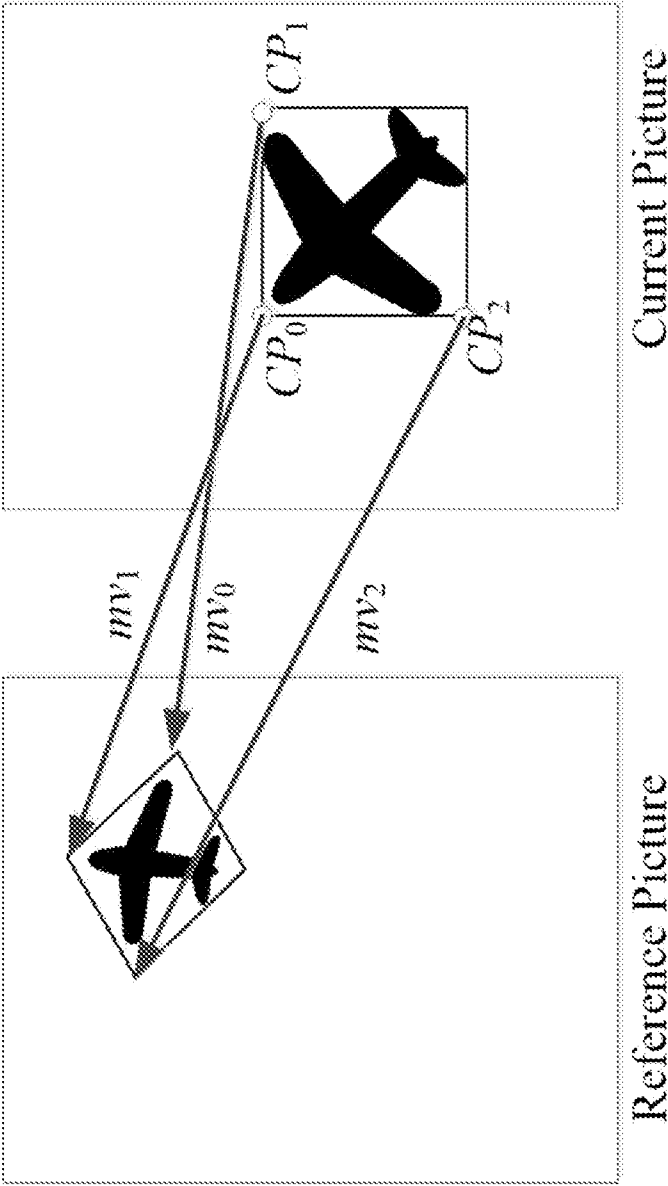


FIG. 12B

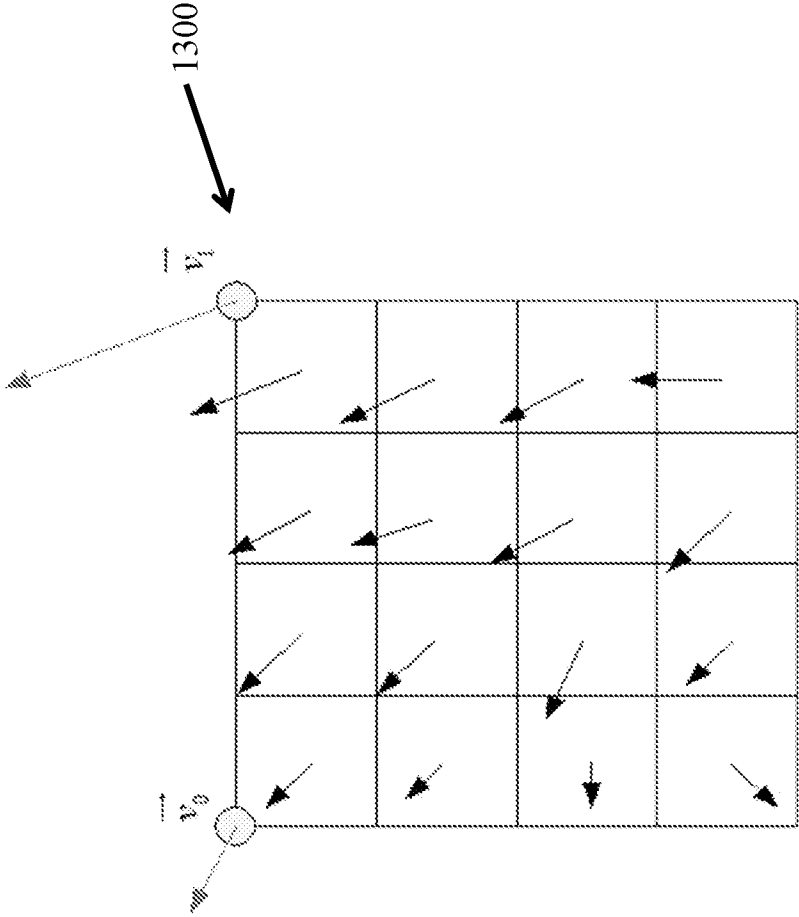


FIG. 13

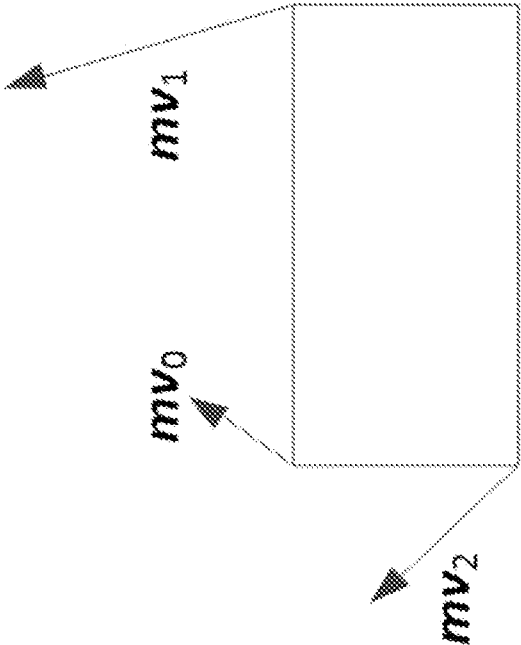


FIG. 14B

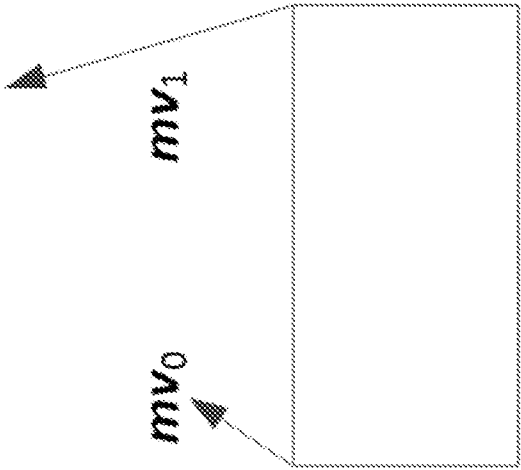


FIG. 14A



FIG. 15

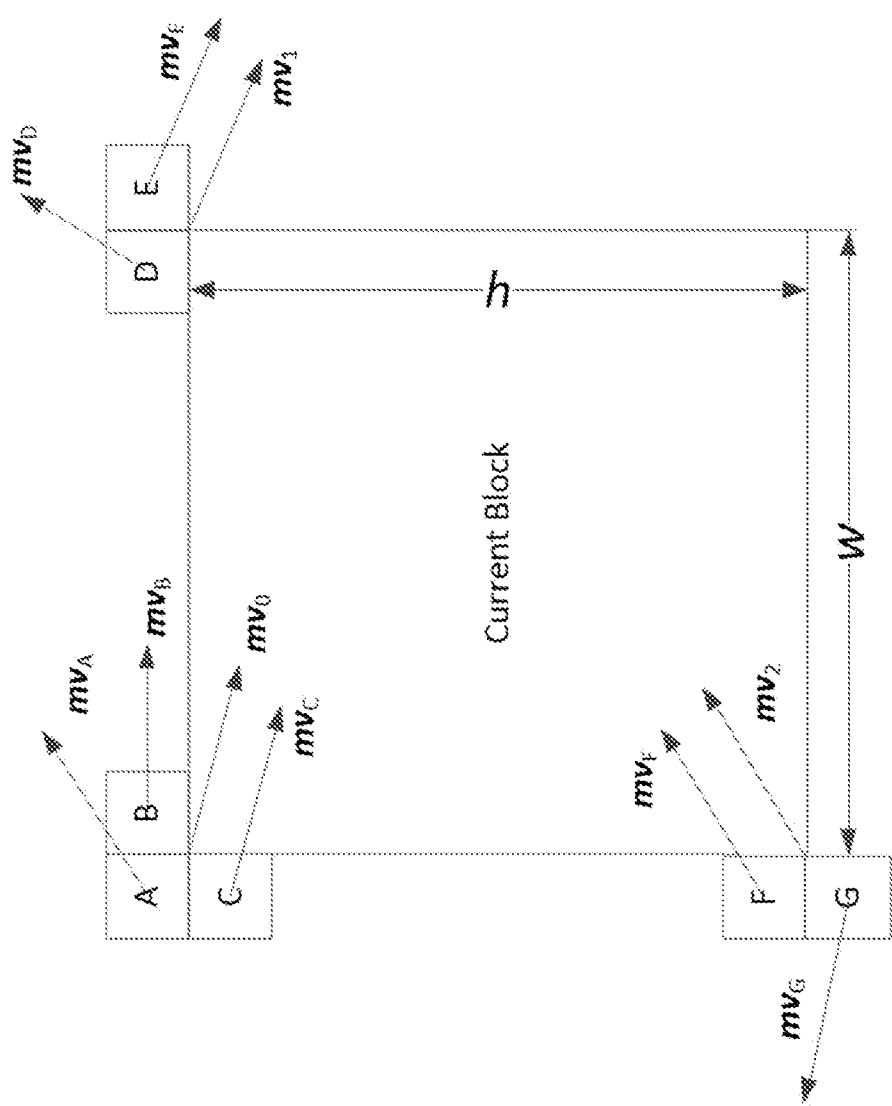


FIG. 16

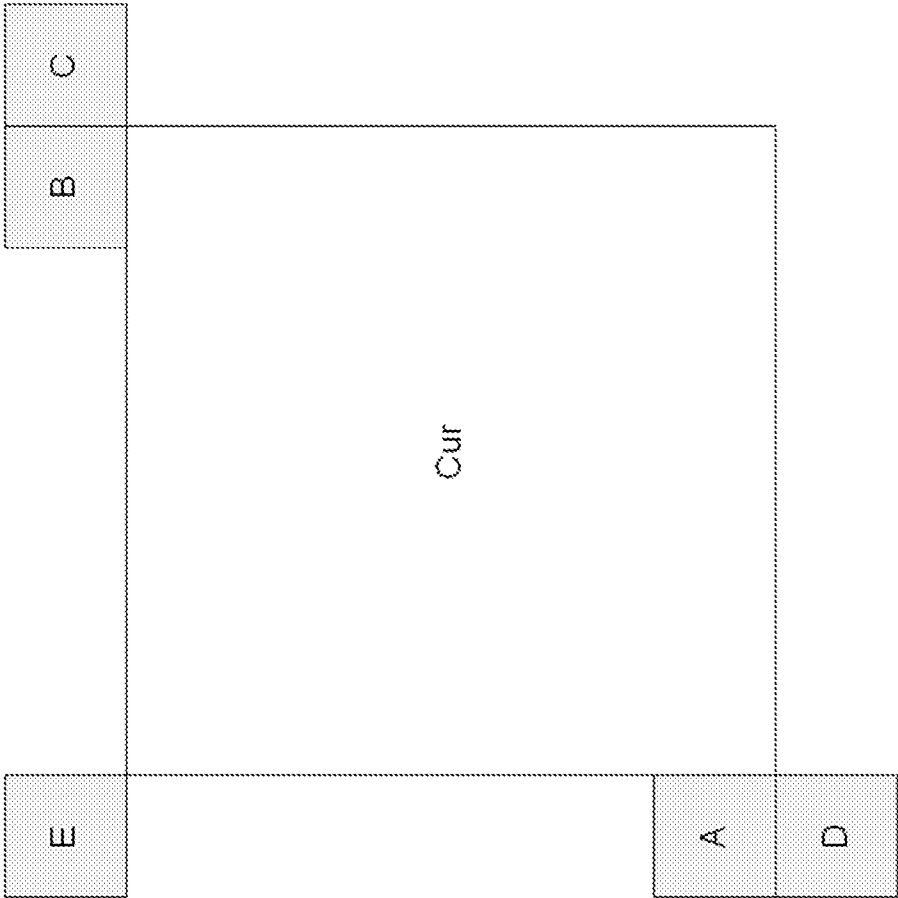


FIG. 17A

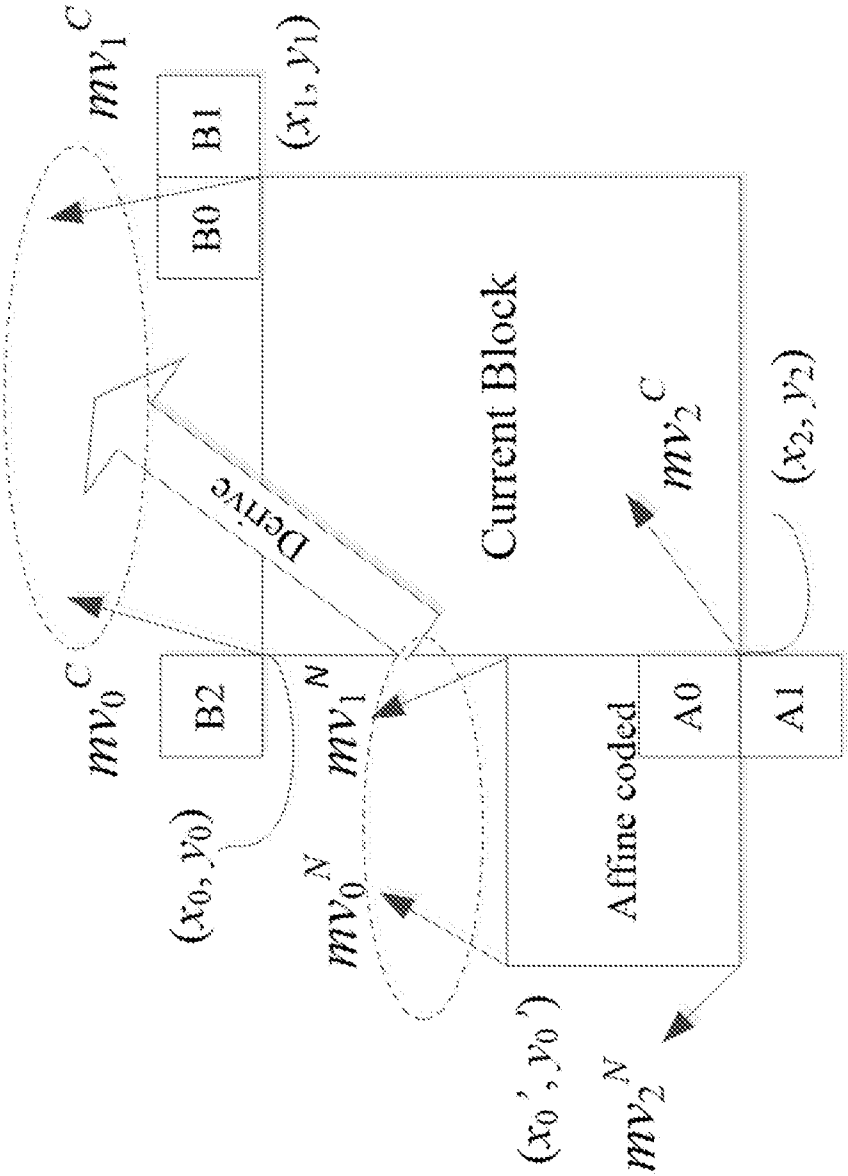


FIG. 17B

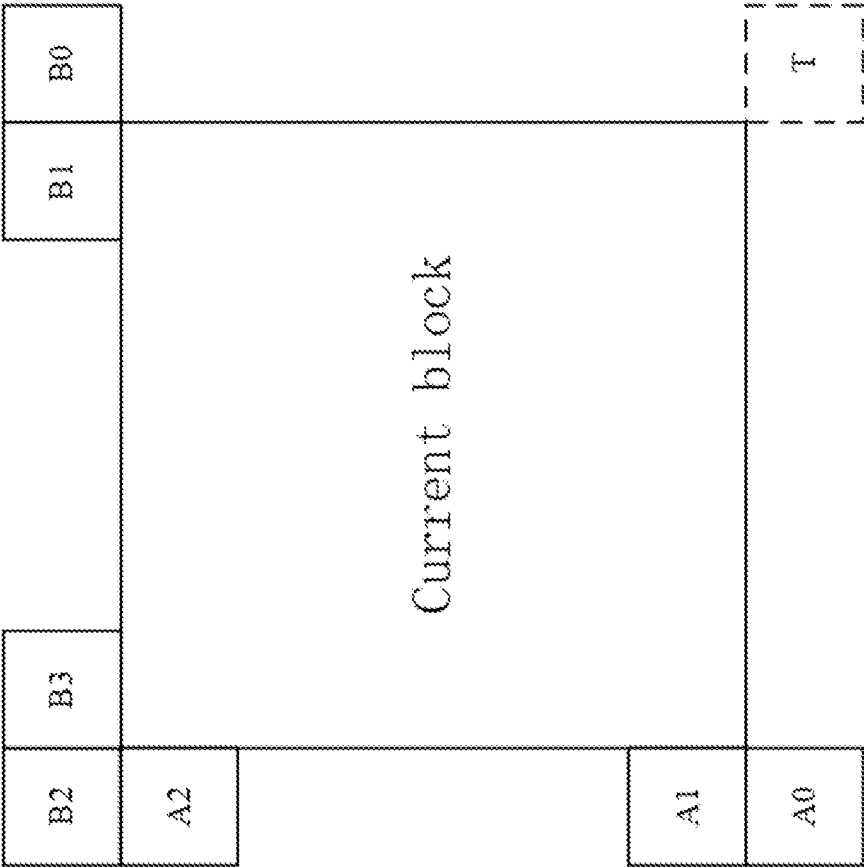


FIG. 18

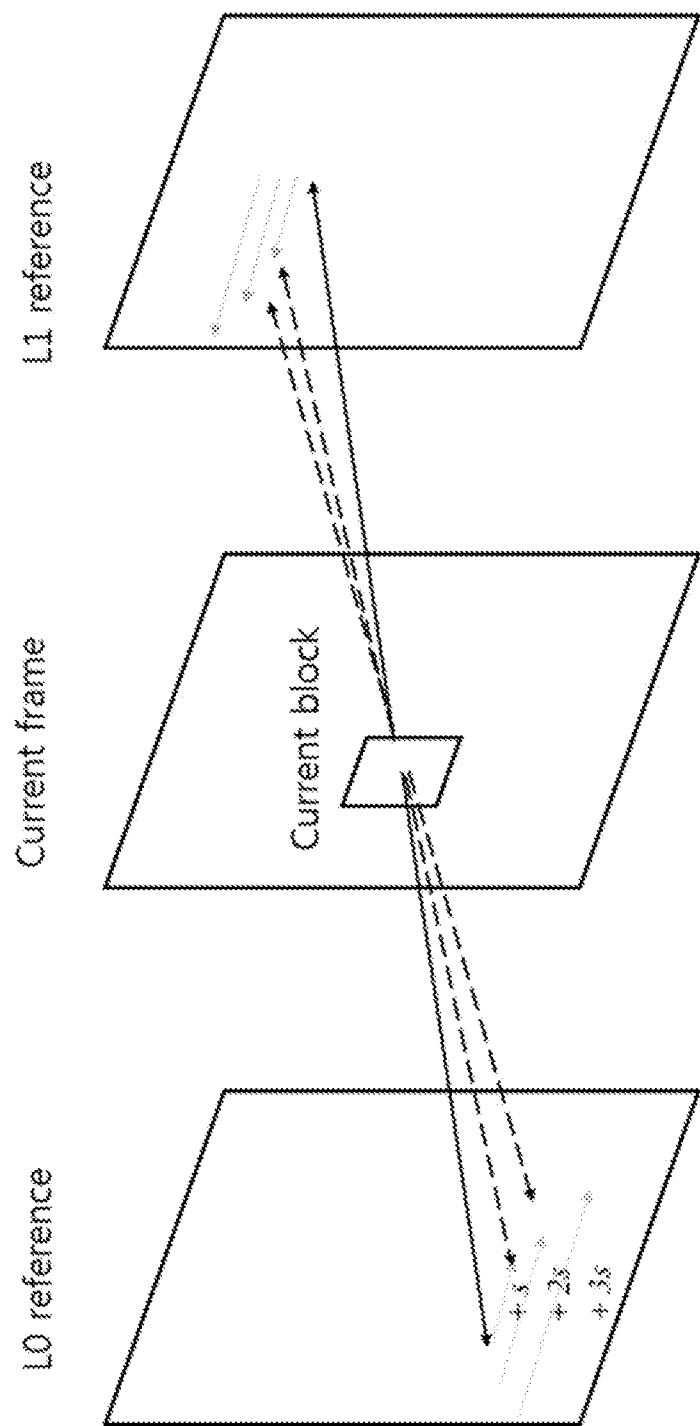


FIG. 19

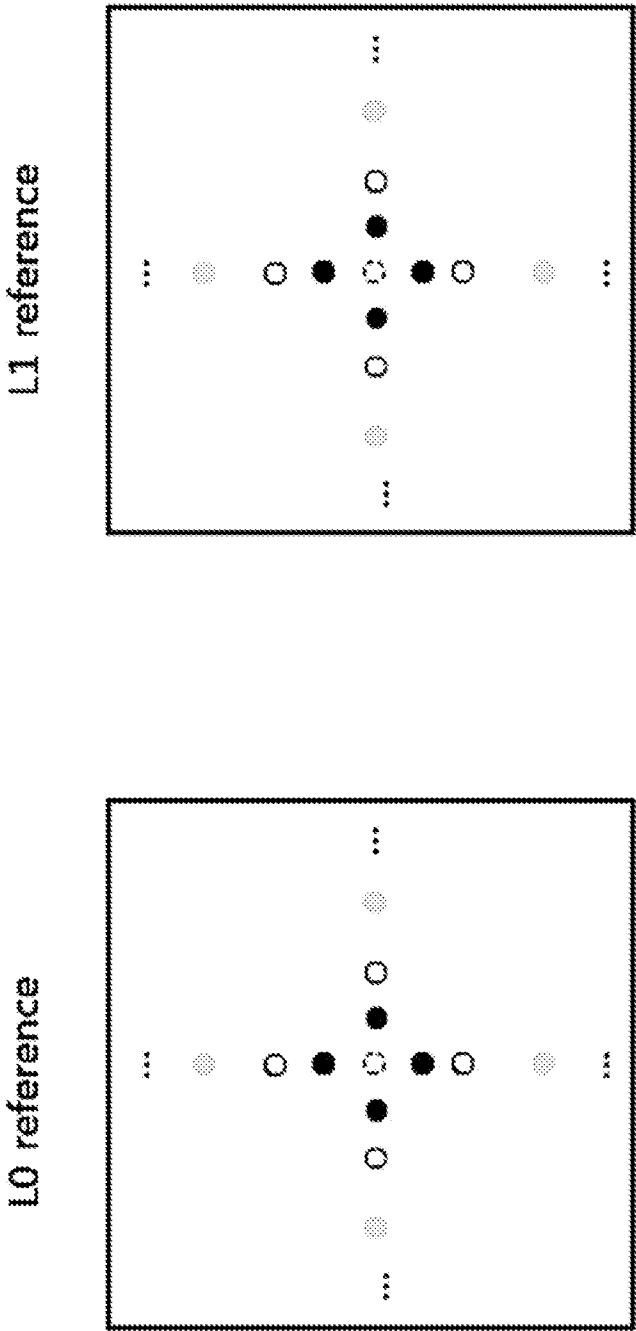


FIG. 20

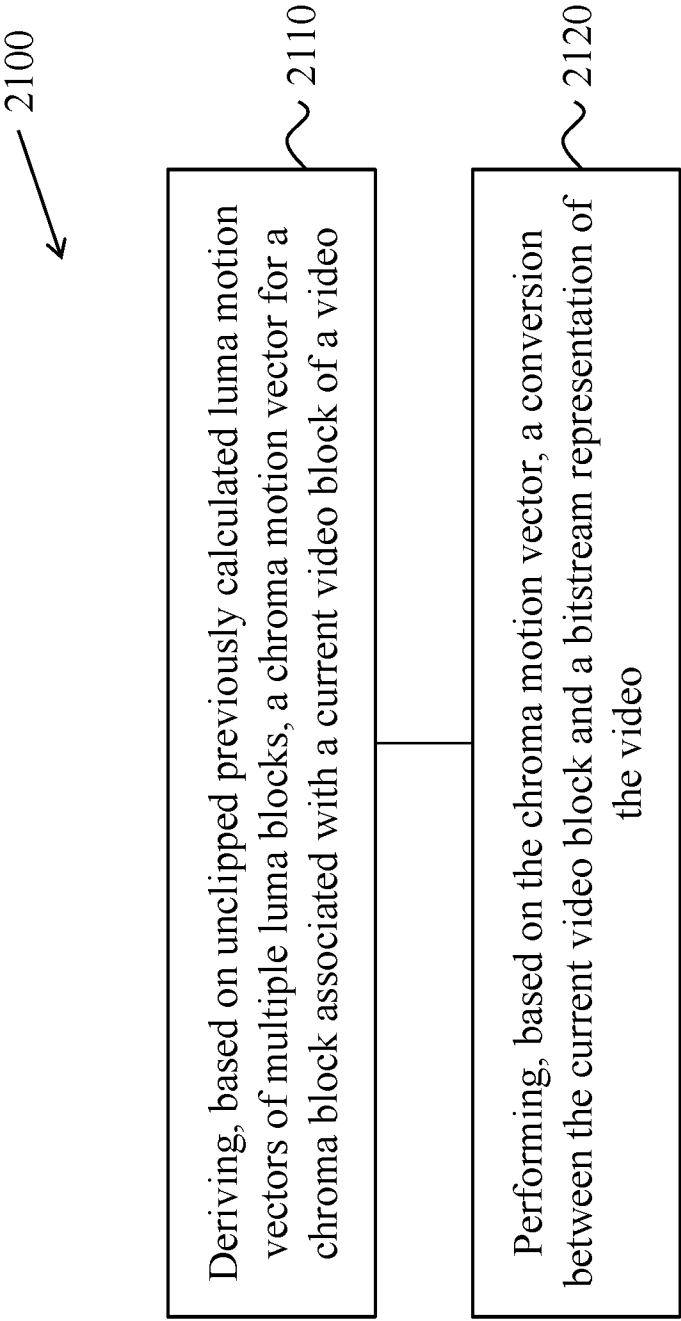


FIG. 21

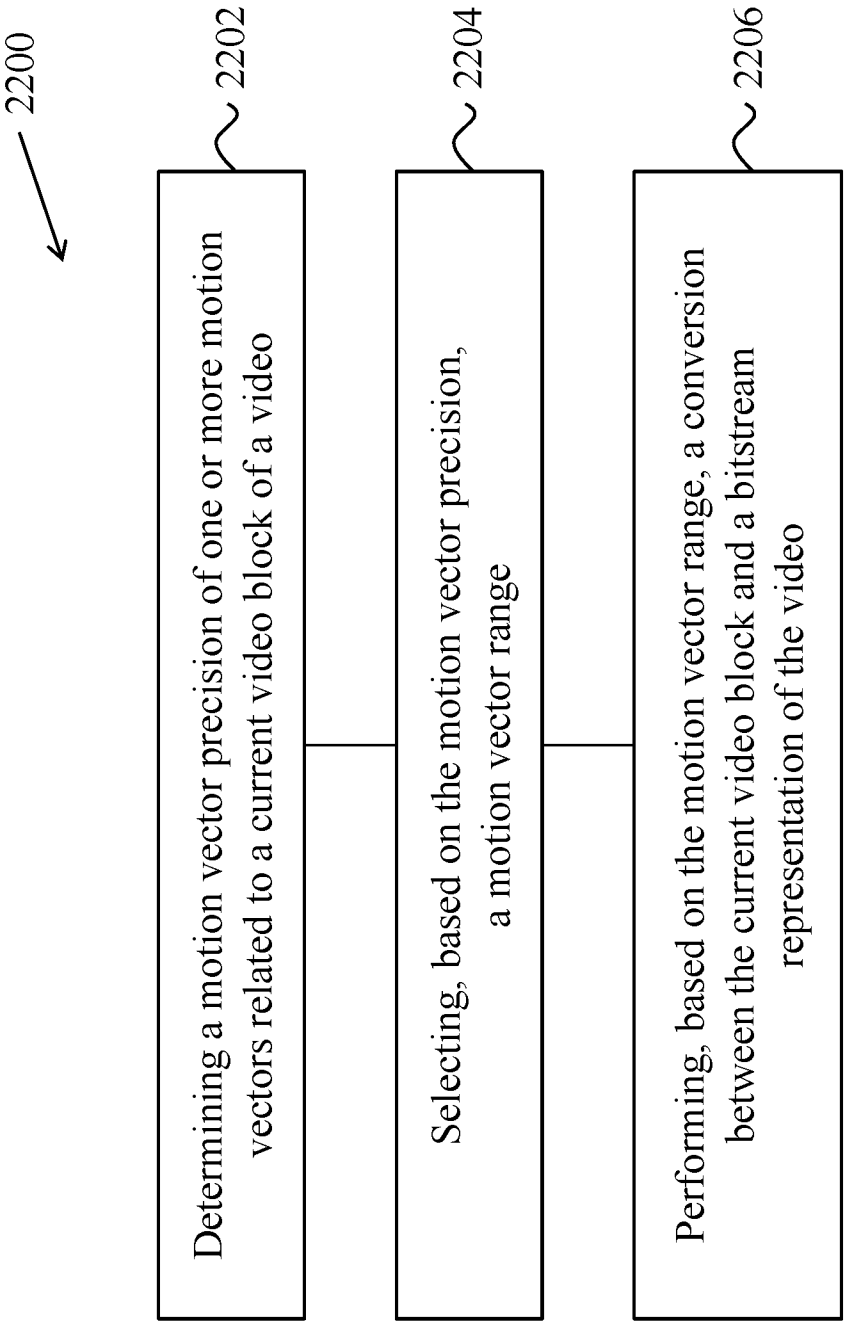


FIG. 22A

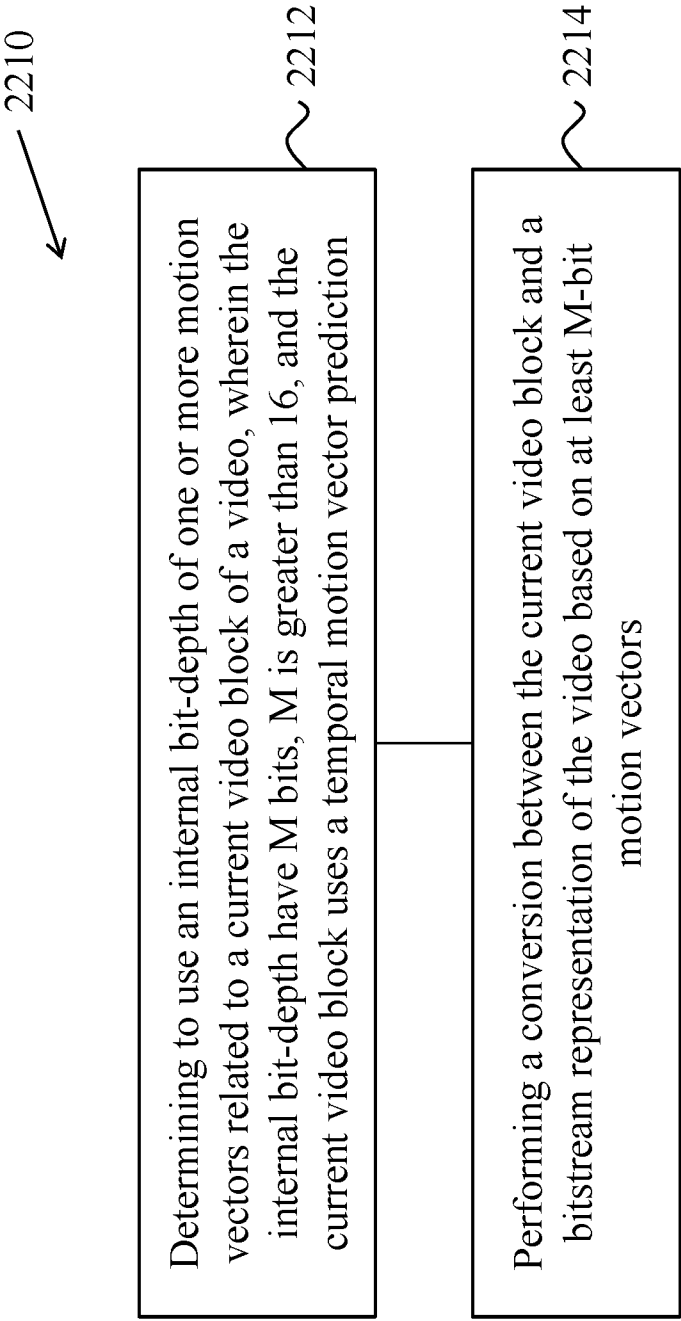


FIG. 22B

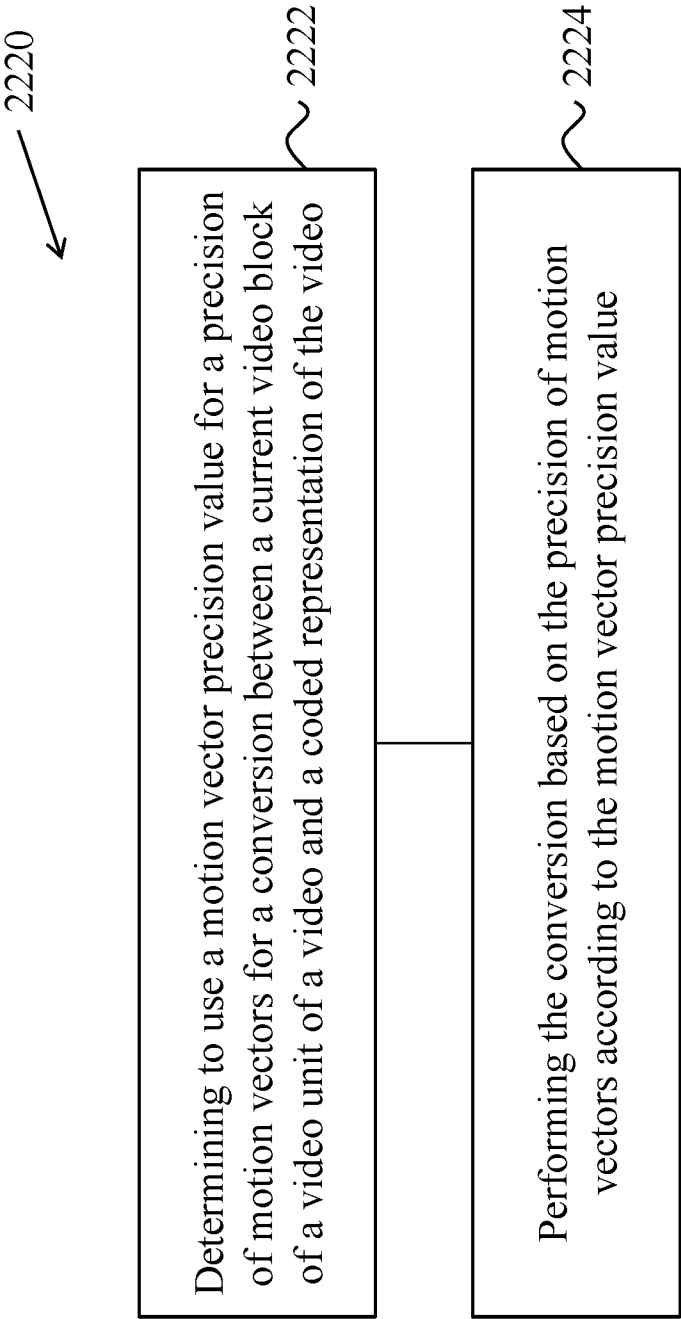


FIG. 22C

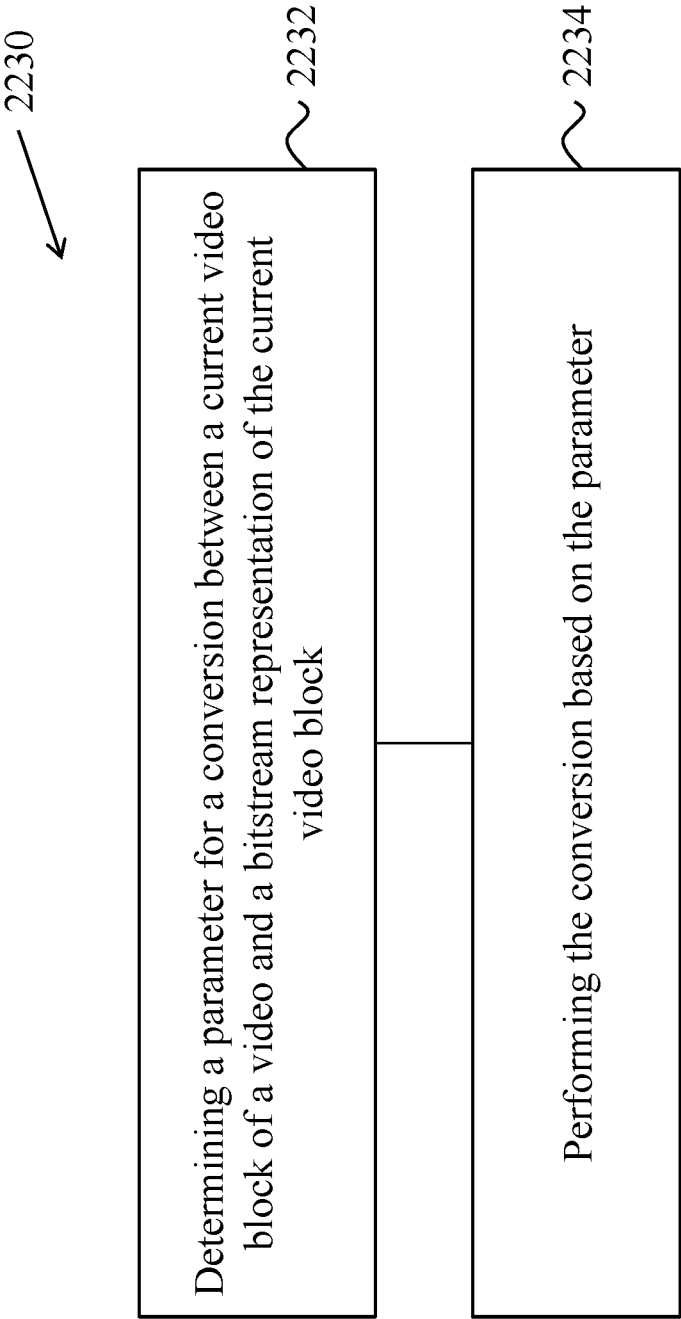


FIG. 22D

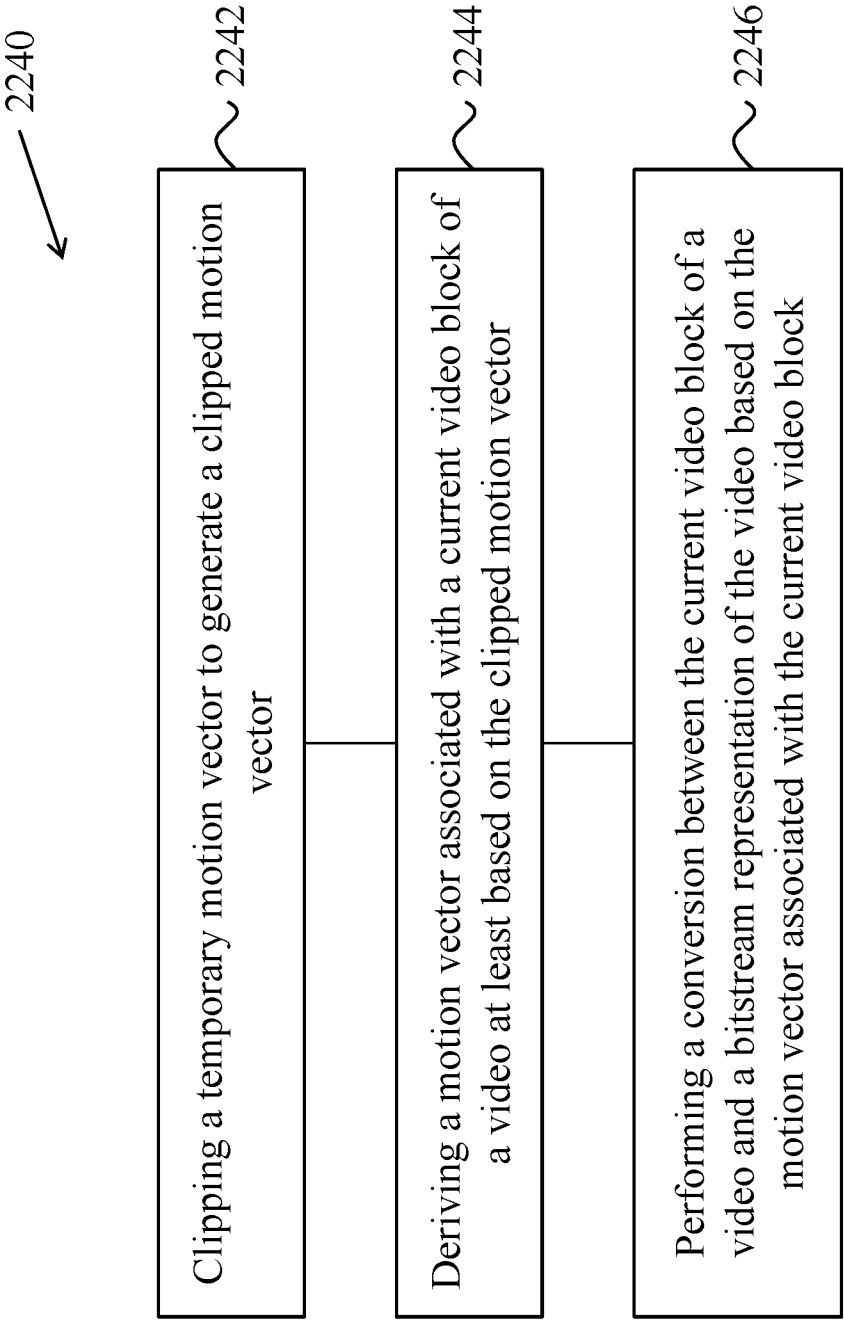


FIG. 22E

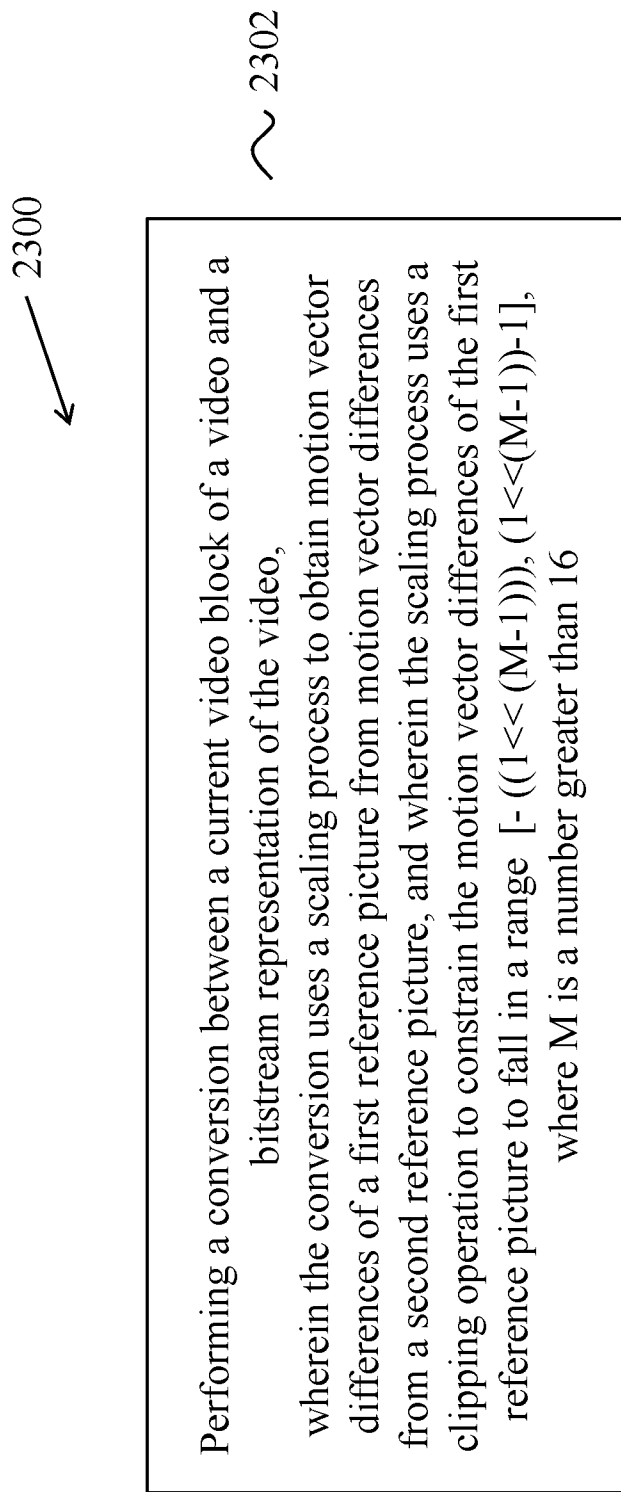


FIG. 23A

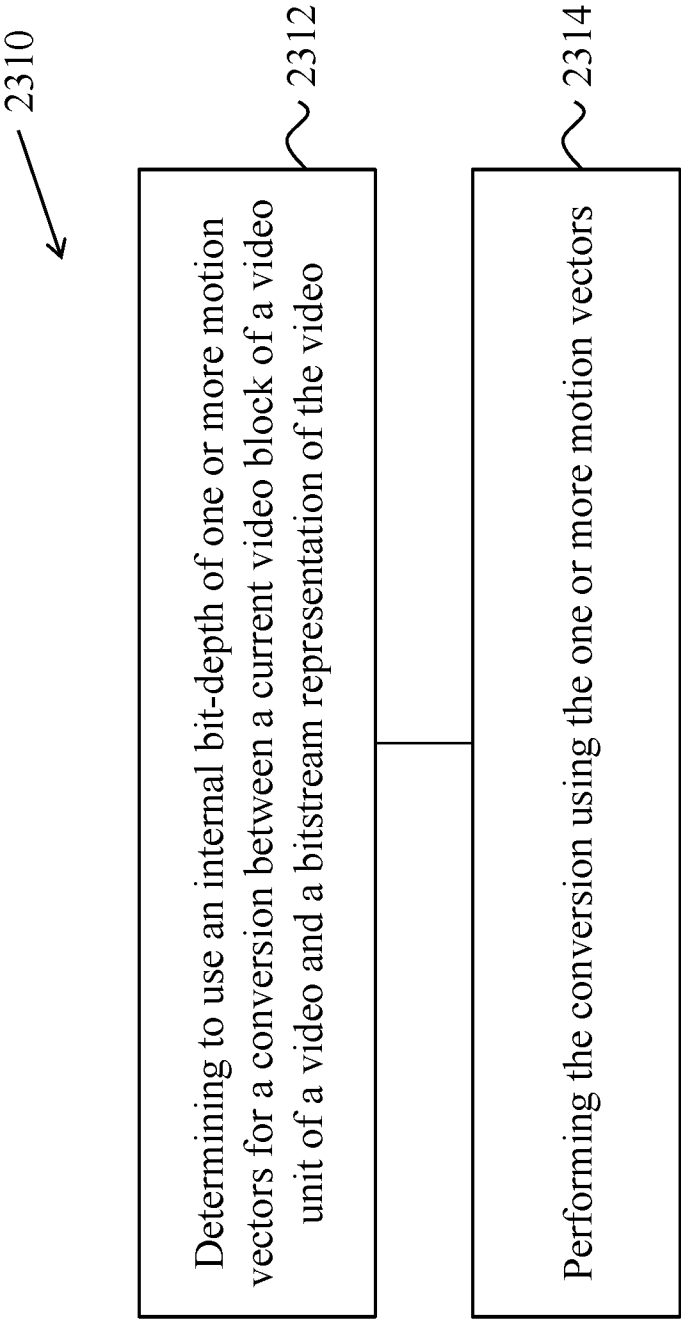


FIG. 23B

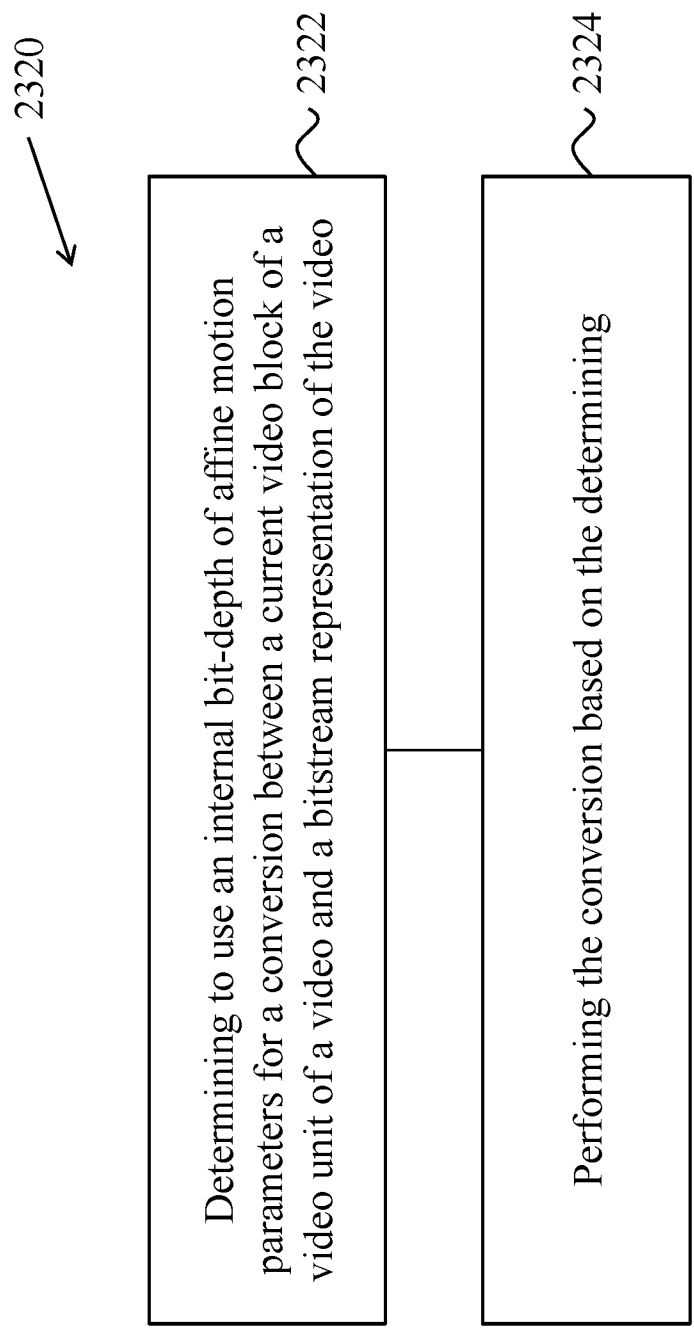


FIG. 23C

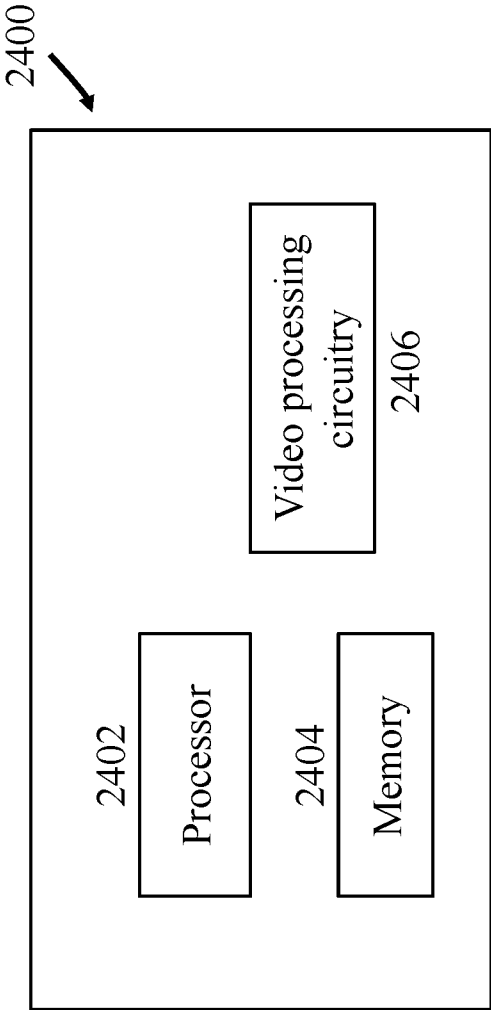


FIG. 24A

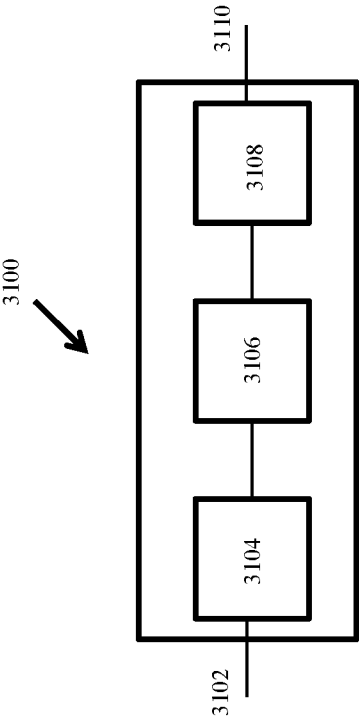


FIG. 24B

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2019/127010

A. CLASSIFICATION OF SUBJECT MATTER

H04N 19/52(2014.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

CNABS,CNKI,CNTXT,VEN,USTXT,EPTXT,WOTXT:encode, decode, video, indicate, flag, precision, motion vector, fractional, integar, MMVD, block, tile, signal, sample, motion distance, index, affine, MVD

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	CN 105900425 A (MICROSOFT TECHNOLOGY LICENSING LLC) 24 August 2016 (2016-08-24) description paragraphs [0008]-[0016], [0042], [0068], [0071], [0073] and [0083]-[0094]	1-49
A	CN 105900420 A (MICROSOFT TECHNOLOGY LICENSING LLC) 24 August 2016 (2016-08-24) the whole document	1-49
A	CN 102783149 A (QUALCOMM INC) 14 November 2012 (2012-11-14) the whole document	1-49
A	CN 105874789 A (MEDIATEK INC) 17 August 2016 (2016-08-17) the whole document	1-49
A	EP 0527011 B1 (SONY CORP) 12 May 1999 (1999-05-12) the whole document	1-49
A	WO 2012120863 A1 (PANASONIC CORP et al.) 13 September 2012 (2012-09-13) the whole document	1-49



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

“A” document defining the general state of the art which is not considered to be of particular relevance

“E” earlier application or patent but published on or after the international filing date

“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

“O” document referring to an oral disclosure, use, exhibition or other means

“P” document published prior to the international filing date but later than the priority date claimed

“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

“&” document member of the same patent family

Date of the actual completion of the international search

03 March 2020

Date of mailing of the international search report

13 March 2020

Name and mailing address of the ISA/CN

National Intellectual Property Administration, PRC
6, Xitucheng Rd., Jimen Bridge, Haidian District, Beijing
100088
China

Authorized officer

LIU,Yuanyuan

Facsimile No. (86-10)62019451

Telephone No. 86-010-62411513

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/CN2019/127010

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)			Publication date (day/month/year)
CN	105900425	A	24 August 2016	RU	2679979	C1	14 February 2019
				AU	2015204953	B2	01 November 2018
				CN	110460861	A	15 November 2019
				CN	105900425	B	01 October 2019
				US	2018109806	A1	19 April 2018
				CA	2935425	A1	16 July 2015
				KR	20160106127	A	09 September 2016
				EP	3075156	A2	05 October 2016
				US	2015195527	A1	09 July 2015
				WO	2015105816	A2	16 July 2015
				WO	2015105816	A3	28 April 2016
				MX	361790	B	17 December 2018
				US	9774881	B2	26 September 2017
				JP	2017508349	A	23 March 2017
				JP	6588441	B2	09 October 2019
				AU	2015204953	A1	21 July 2016
				MX	2016008974	A	04 October 2016
CN	105900420	A	24 August 2016	US	2018131947	A1	10 May 2018
				RU	2016127410	A	10 January 2018
				CN	105900420	B	11 June 2019
				EP	3075154	A1	05 October 2016
				AU	2014376190	B2	20 December 2018
				US	2015195525	A1	09 July 2015
				US	9900603	B2	20 February 2018
				US	2019281309	A1	12 September 2019
				JP	6498679	B2	10 April 2019
				KR	20160106703	A	12 September 2016
				CN	110099278	A	06 August 2019
				US	10313680	B2	04 June 2019
				RU	2682859	C1	21 March 2019
				AU	2014376190	A1	07 July 2016
				CA	2935340	A1	16 July 2015
				JP	2017508344	A	23 March 2017
				MX	359698	B	08 October 2018
				CN	110177274	A	27 August 2019
				WO	2015105662	A1	16 July 2015
				CN	110149513	A	20 August 2019
CN	102783149	A	14 November 2012	MX	2016009025	A	28 September 2016
				US	2017359587	A1	14 December 2017
				US	9749642	B2	29 August 2017
				US	9237355	B2	12 January 2016
				JP	2013520875	A	06 June 2013
				EP	2537341	A1	26 December 2012
				KR	101387255	B1	21 April 2014
				US	2011206125	A1	25 August 2011
				KR	20120126108	A	20 November 2012
				JP	2015156653	A	27 August 2015
CN	102783149	A	14 November 2012	WO	2011103206	A1	25 August 2011
				TW	201218774	A	01 May 2012
				JP	6042470	B2	14 December 2016

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/CN2019/127010

Patent document cited in search report				Publication date (day/month/year)			Patent family member(s)	Publication date (day/month/year)		
							CN 102783149 B	25 November 2015		
CN 105874789 A				17 August 2016			CN 105874789 B	29 October 2019		
							EP 3085085 A1	26 October 2016		
							EP 3085085 A4	08 November 2017		
							WO 2015113510 A1	06 August 2015		
							US 2016337649 A1	17 November 2016		
							CN 110572643 A	13 December 2019		
EP 0527011 B1				12 May 1999			EP 1032210 A1	30 August 2000		
							EP 1028592 B1	04 February 2004		
							DE 69232597 D1	06 June 2002		
							DE 69229153 D1	17 June 1999		
							JP H11113004 A	23 April 1999		
							US 5298991 A	29 March 1994		
							DE 69232824 D1	21 November 2002		
							HK 1013570 A1	23 June 2000		
							EP 0891090 B1	16 October 2002		
							JP H11112996 A	23 April 1999		
							HK 1030123 A1	09 July 2004		
							EP 0527011 A2	10 February 1993		
							EP 0891091 B1	02 May 2002		
							HK 1030322 A1	05 September 2003		
							EP 0527011 A3	27 July 1994		
							EP 1028592 A1	16 August 2000		
							EP 1032210 B1	26 February 2003		
							JP H0541862 A	19 February 1993		
							JP H11112995 A	23 April 1999		
							DE 69232597 T2	05 December 2002		
							DE 69229153 T2	25 November 1999		
							EP 0891090 A2	13 January 1999		
							DE 69232824 T2	07 August 2003		
							EP 0891091 A2	13 January 1999		
							EP 0891090 A3	20 January 1999		
							EP 0891091 A3	27 January 1999		
WO 2012120863 A1				13 September 2012			None			