

(51) International Patent Classification:
F25J 3/02 (2006.01)(21) International Application Number:
PCT/EP2013/058850(22) International Filing Date:
29 April 2013 (29.04.2013)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12305503.0 7 May 2012 (07.05.2012) EP(71) Applicant: L'AIR LIQUIDE, SOCIETE ANONYME
POUR L'ETUDE ET L'EXPLOITATION DES PRO-
CEDES GEORGES CLAUDE [FR/FR]; 75, Quai d'Or-
say, F-75007 Paris (FR).(72) Inventors: BRIGLIA, Alain; Les Epineaux, F-49140
Corze (FR). BROCHERIOU, Emmanuelle; 7 avenue
Maurice Ravel, F-94430 Chennevières Sur Marne (FR).
MARTY, Pascal; 29 rue du Four, F-94360 Bry Sur Marne
(FR). PRASAD, Bhadri; 198 Rue Diderot, F-94500
Champigny Sur Marne (FR).(74) Agent: MERCEY, Fiona; L'air Liquide S.A, Intellectual
Property Dept, 75, Quai d'Orsay, F-75321 Paris Cedex 07
(FR).(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

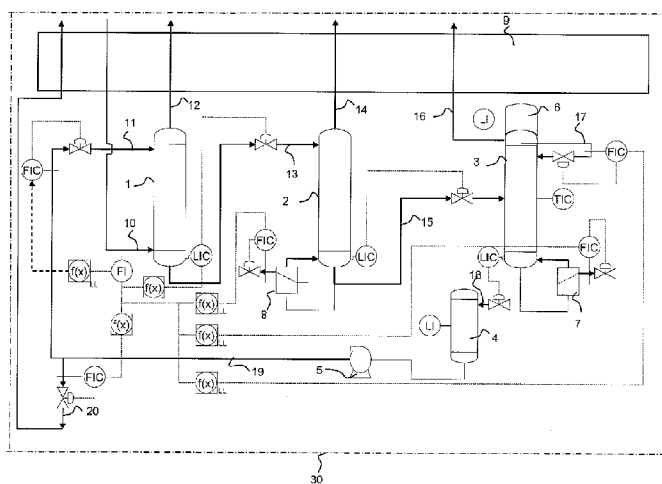
— without international search report and to be republished
upon receipt of that report (Rule 48.2(g))(54) Title: PROCESS AND APPARATUS FOR THE SEPARATION BY CRYOGENIC DISTILLATION OF A MIXTURE OF
METHANE, CARBON DIOXIDE AND HYDROGEN

Figure 1

(57) Abstract: In a process for the cryogenic separation of a feed mixture of at least carbon monoxide, hydrogen and methane, the feed mixture is separated in a methane wash column (1) fed by a liquid methane stream (11) at the top of the methane wash column to produce a gas (12) enriched in hydrogen, a liquid stream (13) from the bottom of the methane wash column is treated to produce a mixture of carbon monoxide and methane (15), the mixture of carbon monoxide and methane is separated in a separation column (3) to produce a gas enriched in carbon monoxide (16) and a liquid methane flow (4) at least part of which forms a purge stream (20), the purge stream being varied to take account of load variations.

**Process and apparatus for the separation by cryogenic distillation of
a mixture of methane, carbon dioxide and hydrogen**

5 The present invention relates to a process and to an apparatus for the separation by cryogenic distillation of a mixture of methane, carbon dioxide and hydrogen. The mixture may also contain nitrogen. Preferably the mixture contains at least 2% methane, all the percentages relating to purities in this document being molar percentages.

10 The speed of change of production requirement for a unit producing carbon monoxide and hydrogen, in connection with a synthesis gas generation unit, a CO₂ removal unit and a cold box, is highly dependent on the time of reaction of the cold box.

15 In a process as described in EP-A-0359629, the acceptable variations of the feed stream at the entrance of the cooling system upstream of the cryogenic separation are very limited. If the changes in feed flow are excessive, the cryogenic separation does not perform correctly and so the speed of feed change is limited to changes of 0.5% of the nominal flow per minute.

20 Since the synthesis gas generator can react more quickly than the cryogenic separation to changes in feed flow, this means that the cryogenic separation determines the maximum flowrate change.

25 It has been proposed to use a storage tank containing liquid carbon monoxide to improve the speed of variation of feed flow to produce carbon monoxide. When the demand for carbon monoxide increases quickly, the storage tank is emptied and the carbon monoxide is vaporized in an external vaporizer. This solution does not provide for a fast increase in supply of hydrogen.

 Furthermore the storage of large amounts of liquid carbon monoxide presents a security hazard.

30 The present invention is intended to increase the speed of change of flowrate for carbon monoxide and hydrogen and to make those changes easier to implement.

According to the invention, the molecules of liquid methane are stored within the process, preferably downstream of the CO/CH₄ column and upstream of the methane wash column.

The liquid methane in a purification unit for synthesis gas serves two purposes:

- purification of hydrogen in the wash column,
- provision of refrigeration by vaporization of the liquid methane purge in the heat exchange line.

A process according to the preamble of Claim 1 is shown in US-A-4102659.

In liquid methane wash processes, when comparing the amount of liquid within the process (essentially in the columns, where the feed flow change is present), the amount of liquid methane varies far more than the liquid carbon monoxide.

For a given plant the variation of the amount of liquid methane varies about 4 times more than the amount of liquid carbon monoxide, whereas the feed gas contains 4 times less methane than carbon monoxide, and sometimes more than 4 times less.

Consequently it is very slow to build up the amount of liquid methane in the unit, in particular when the amount of feed to be separated increases.

It is therefore impossible to increase the feed flow by several % of the nominal flow per minute without controlling the liquid methane within the system.

The amount of liquid methane includes the volume of methane in the heat exchangers, the volume of methane in the piping, the volume of methane in the column distributors, the volume of methane in the column packings and the volume of methane in the bottom of columns.

When product demands or feed flow reduces, the amount of liquid held in the distributors reduces. The liquid, rich in methane, tends to fall into the sump of the column and the liquid level there rises. Previously, the solution, as shown in FR-A-2881063, was to vary the methane purge as a function of the column liquid

level. Typically, the process increased the methane purge, to keep the liquid level constant. However this makes the process unstable.

The advantages of the process are that the use of a carbon monoxide storage tank can be avoided, variations in demand for hydrogen and carbon
5 monoxide can be accommodated and the overall amount of liquid carbon monoxide in the process can be decreased.

The amount of synthesis gas entering the cold box regulates a number of control points in particular for the wash liquid flow, the reboil flow for the flash column and CO/CH₄ column and the cycle flowrate. The other control points do not
10 depend on the synthesis flow rate, in particular the methane purge flowrate which depends only on the amount of methane in the system.

Consequently according to the prior art, when the amount of synthesis gas is reduced, the amount of gas and liquid in the columns changes and the amount of collected liquid reduces. The flowrate of purge methane .depends on the amount
15 of methane in the system and so the amount purged and vaporised can increase when the synthesis gas flowrate decreases. Since the increased methane vaporisation seriously affects the thermal equilibrium of the heat exchange line, this contrary effect perturbs the operation of the system and makes it difficult to change flowrates quickly.

20 When the synthesis gas flow rate increases, the amount of liquid in the columns has to build up, and the methane purge flowrate tends to reduce. This also affects the heat exchange line, as explained above.

By using a methane storage tank, the liquid can be stored when the feed flowrate reduces and used when the flowrate increases. Thus the methane purge
25 is no longer an element which destabilizes the heat exchange line.

According to an object of the invention, there is provided a process for the cryogenic separation of a feed mixture of at least carbon monoxide, hydrogen and at least 2% methane wherein:

i) the feed mixture is separated in a methane wash column fed by a liquid
30 methane stream at the top of the methane wash column to produce a gas enriched in hydrogen, the volume of the liquid methane stream of step i) being varied to take

account of varying demands for the gas enriched in carbon monoxide and/or the gas enriched in hydrogen

ii) a liquid stream from the bottom of the methane wash column is treated to produce a mixture of carbon monoxide and methane,

5 iii) the mixture of carbon monoxide and methane is separated in a separation column to produce a gas enriched in carbon monoxide and a liquid methane flow a first part of which forms the liquid methane stream of step i),

iv) a second part of the liquid methane flow is removed from the process as a purge stream and characterized in that the flowrate of the second part is varied as a function of the feed mixture flowrate .

10

According to optional features:

- the liquid methane is removed from the separation column and stored in a storage tank, the liquid level of which varies to account for the varying amount of liquid sent to the methane wash column.

15 - the amount of liquid methane removed from the separation column is regulated so that the liquid level at the bottom of the separation column is constant.

- the liquid level in the storage tank decreases if the synthesis gas flowrate increases.

- the volume of the liquid methane stream of step i) increases with an increase in demand for the gas enriched in carbon monoxide and/or the gas enriched in hydrogen and/or an increase in the amount of feed mixture separated in the methane wash column.

20

- the liquid methane to be sent to the methane wash column is stored at the bottom of the carbon monoxide/methane column, the bottom of the carbon monoxide/methane column comprising a reboiler section operates at constant level and a storage section from which the liquid methane is withdrawn, operating with a variable level.

25

- the flowrate of the purge stream is controlled with a lead time with respect to the feed mixture flowrate.

30 - the flowrate of the purge stream is controlled with a lag time with respect to the feed mixture flowrate.

- the purge stream vaporizes by heat exchange with the feed mixture.
- the purge stream flowrate increases if the feed mixture flowrate increases and decreases if the feed mixture flowrate decreases.
- the liquid methane is not stored in a storage tank and wherein if the
5 feed mixture flowrate increases, the liquid level in the separation column decreases.

According to another object of the invention, there is provided an apparatus for the cryogenic separation of a feed mixture of at least carbon monoxide, hydrogen and methane comprising a cryogenic enclosure and within the
10 cryogenic enclosure, a heat exchanger, a methane wash column, a separation column, treatment means, a conduit for sending the feed mixture to be separated in the methane wash column, a conduit for sending a liquid methane stream to the top of the methane wash column, a conduit for removing a gas enriched in hydrogen from the methane wash column, a conduit for sending a liquid stream
15 from the bottom of the methane wash column to the treatment means to be treated to produce a mixture of carbon monoxide and methane, a conduit for sending the mixture of carbon monoxide and methane to be separated in the separation column, a conduit for removing a gas enriched in carbon monoxide from the separation column, a conduit for removing a liquid methane flow from the
20 separation column, means for removing a first part of the liquid methane flow to form the liquid methane stream and means for increasing the volume of the liquid methane stream in dependence on an increased demand for the gas enriched in carbon monoxide and/or the gas enriched in hydrogen and/or an increased amount of feed mixture sent to the methane wash column, means for removing a second
25 part of the liquid methane flow as a purge flow and characterized in that it comprises means for varying the flowrate of the second part as a function of the feed mixture flowrate.

According to other optional features, the apparatus comprises:

- means for sending the purge flow to the heat exchanger .

- a storage tank wherein the liquid methane removed from the separation column is stored, the liquid level of the storage tank being variable to account for the varying amount of liquid sent to the methane wash column.

5 - a storage section at the bottom of the separation column, capable of receiving overflow liquid from a reboiler section at the bottom of the separation column.

10 - the treatment means comprises a column, connected at the top to the conduit for sending a liquid stream from the bottom of the methane wash column to the treatment means and at the bottom to the conduit for sending the mixture of carbon monoxide and methane to be separated in the carbon monoxide/methane column.

The invention will be described in greater detail with reference to the figures.

15 Figures 1 and 2 show processes according to the invention and Figure 3 shows a detail of the process of Figure 2.

The process is a cryogenic separation process taking place within a cold box 30.

20 A feed stream 10 cooled in heat exchanger 9 and containing hydrogen, carbon monoxide and at least 2% methane is sent to the bottom of a methane wash column 1 fed by liquid methane 11 at the top of the column.

A gas enriched in hydrogen 12 is removed at the top of the methane wash column 1 and warmed in the heat exchanger 9. A liquid 13 with a reduced hydrogen content is sent to a flash column 2 having a bottom reboiler 8. Gas 14 is removed from the top of the flash column and warmed in heat exchanger 9.

25 The bottom liquid 15 from the flash column contains principally carbon monoxide and methane and is sent to the middle of a carbon monoxide/methane column 3 having a reflux capacity (or a condenser) 6 and a bottom reboiler 7. Liquid 17 from the reflux capacity 6 is sent back to column 3.

30 Carbon monoxide rich gas 16 is removed from the top of column 3 and sent to heat exchanger 9.

Methane rich liquid 18 is removed from the bottom of the column 3. The liquid from the tank 4 is pumped using pump 5 and divided into two parts (or even three parts). One part 11 is sent to the top of the methane wash column 1, the other part 20 is removed, possibly as a product. The second part may be vaporized in heat exchanger 9.

The process can be controlled as follows:

The flowrate of the synthesis gas feed stream 10 is measured. Variations of this stream 10 are used to lead or lag other process parameters in order to ensure the plant load change.

10 Liquid methane stream 11 feeding the methane wash column 1 at the top is controlled in flow. The set-point of this flow controller is set via a calculation which is a function of the total synthesis gas flow 10. A lead or a lag time can be applied to the value of the set-point according the dynamics of the system.

15 The sump level of the methane wash column 1 is controlled by the stream 13 extraction from the bottom of the methane wash column. The set point of this level controller will also be linked to the variation of the synthesis gas stream 10. This level set point will vary in the opposite direction to the plant load; this is the result of the liquid inventory variation in the distributors in the methane wash column 1.

20 The streams used to heat reboilers 7 and 8 are controlled in flow. The set-points of these flow controllers are set via calculations which are function of the total synthesis gas flow 10. A lead or a lag time can be applied to the value of the set-point according the dynamics of the system.

25 Sump level of the column 2 is maintained constant, by the stream 15 extraction.

30 Reflux 17 is controlled in flow. The set-point of this flow controller is set via a calculation which is a function of the total synthesis gas flow 10. A lead or a lag time can be applied to the value of the set-point according the dynamics of the system. This set point also can be corrected by a temperature controller set in the middle of the carbon monoxide/methane column 3.

Sump level of the carbon monoxide/methane column 3 is maintained constant, by the stream 18 extraction.

Methane purge flow 20 is also controlled in flow. The set-point of this flow controller is set via a calculation which is a function of the total synthesis gas flow 10 so that the methane purge flow 20 increases when the synthesis gas flow 10 increases and decreases when the synthesis gas flow decreases . A lead or a lag time can be applied to the value of the set-point according the dynamics of the system.

As a consequence, the level in tank 4 and the reflux capacity 6 will vary according the load of the plant. Thus if the synthesis gas flowrate increases, the level in the tank 4 will fall to allow the purge flow 20 to increase whilst leaving the liquid level in the column 3 constant. Similarly if the synthesis gas flowrate decreases, the level in the tank 4 will increase to allow the purge flow 20 to decrease whilst leaving the liquid level in the column 3 constant.

Tank 4 will accumulate the methane molecules resulting from a load decrease due to the inventory change in the column liquid distributors. This accumulated methane will be used again during the load increase to reload the distributors of the methane wash column 1 with methane.

Reflux capacity 6 will accumulate the liquid carbon monoxide molecules resulting from a load decrease due to the inventory change in the column liquid distributors. This accumulated liquid carbon monoxide will be used again during the load increase to reload the distributors.

Figure 2 shows processes according to the invention similar to Figure 1, with the exception of the tank 4 which is integrated in the sump of carbon monoxide/methane column 3. In this case, it is the liquid level at the bottom of column 3 which will increase or decrease in response to the synthesis gas flowrate, so that the purge flow 20 may increase when the synthesis gas flowrate increases and vice versa.

In both Figures 1 and 2, the column 2 may be fed at the top with pumped methane liquid from pump 5.

The tank 4 may be integrated into the bottom of the carbon monoxide/methane column 3 (as shown in figure 3).

Element 41 at the bottom of column 3 is a liquid distributor and collector which allows falling liquid to be sent from the packing above the distributor to the reboiler section 43 at one side of the sump of column 3. Tank 4 is the section 42 at the other side of the sump of column 3, separated by a partition plate 44 from where stream 21 is withdrawn to feed the pump 5.

The reboiler section 43 operates at constant level and overflows into the tank section 42 where the methane inventory varies according to the plant load.

Claims

5 1. Process for the cryogenic separation of a feed mixture of at least carbon monoxide, hydrogen and at least 2% methane wherein:

 i) the feed mixture is separated in a methane wash column (1) fed by a liquid methane stream (11) at the top of the methane wash column to produce a gas (12) enriched in hydrogen, the volume of the liquid methane stream of step i) being varied to take account of varying demands for the gas enriched in carbon monoxide and/or the gas enriched in hydrogen

 ii) a liquid stream (13) from the bottom of the methane wash column is treated to produce a mixture of carbon monoxide and methane (15),

 iii) the mixture of carbon monoxide and methane is separated in a separation column (3) to produce a gas enriched in carbon monoxide (16) and a liquid methane flow (18), a first part of which forms the liquid methane stream (11) of step i) and

 iv) a second part (20) of the liquid methane flow (18) is removed from the process as a purge stream characterized in that the flowrate of the second part is varied as a function of the feed mixture flowrate.

2. Process according to Claim 1 wherein the liquid methane is removed from the separation column (3) and stored in a storage tank (4), the liquid level of which varies to account for the varying amount of liquid sent to the methane wash column (1).

3. Process according to Claim 2 wherein the amount of liquid methane removed from the separation column (3) is regulated so that the liquid level at the bottom of the separation column is constant.

4. Process according to Claim 2 or 3 wherein the liquid level in the storage tank (4) decreases if the synthesis gas flowrate increases.

5. Process according to any preceding claim wherein the volume of the liquid methane stream of step i) increases with an increase in demand for the gas enriched in carbon monoxide and/or the gas enriched in hydrogen and/or an increase in the amount of feed mixture separated in the methane wash column (1).

6. Process according to any preceding claim wherein the liquid methane to be sent to the methane wash column (1) is stored at the bottom of the carbon monoxide/methane column (3), the bottom of the carbon monoxide/methane column comprising a reboiler section (43) which operates at constant level and a storage section (42) from which the liquid methane is withdrawn, operating with a variable level.

7. Process according to any preceding claim wherein the flowrate of the purge stream is controlled with a lead time with respect to the feed mixture flowrate.

8. Process according to any preceding claim wherein the flowrate of the purge stream is controlled with a lag time with respect to the feed mixture flowrate.

9. Process according to any preceding claim wherein the purge stream vaporizes by heat exchange with the feed mixture.

10. Process according to any preceding claim wherein the purge stream flowrate increases if the feed mixture flowrate increases and decreases if the feed mixture flowrate decreases.

11. Process according to any of claims 1 or 5 to 10 wherein the liquid methane is not stored in a storage tank and wherein if the feed mixture flowrate increases, the liquid level in the separation column (3) decreases.

5 12. Apparatus for the cryogenic separation of a feed mixture of at least carbon monoxide, hydrogen and methane comprising a cryogenic enclosure (30) and within the cryogenic enclosure, a heat exchanger (9), a methane wash column (1), a separation column (3), treatment means (2), a conduit for sending the feed
10 methane stream to the top of the methane wash column, a conduit for removing a gas enriched in hydrogen from the methane wash column, a conduit for sending a liquid stream from the bottom of the methane wash column to the treatment means to be treated to produce a mixture of carbon monoxide and methane, a conduit for
15 sending the mixture of carbon monoxide and methane to be separated in the separation column, a conduit for removing a gas enriched in carbon monoxide from the separation column, a conduit for removing a liquid methane flow from the separation column, means for removing a first part of the liquid methane flow to
20 form the liquid methane stream, means for increasing the volume of the liquid methane stream in dependence on an increased demand for the gas enriched in carbon monoxide and/or the gas enriched in hydrogen and/or an increased amount of feed mixture sent to the methane wash column and means for removing a
second part of the liquid methane flow as a purge flow (20) characterized in that it comprises means for varying the flowrate of the second part as a function of the feed mixture flowrate.

25

13. Apparatus according to Claim 12 comprising means for sending the purge flow (20) to the heat exchanger (9).

14. Apparatus according to Claim 12 comprising a storage tank (4) wherein the liquid methane removed from the separation column (3) is stored, the liquid level of the storage tank being variable to account for the varying amount of liquid sent to the methane wash column.

5

15. Apparatus according to Claim 12 comprising a storage section (42) at the bottom of the separation column, capable of receiving overflow liquid from a reboiler section (43) at the bottom of the separation column (3).

10

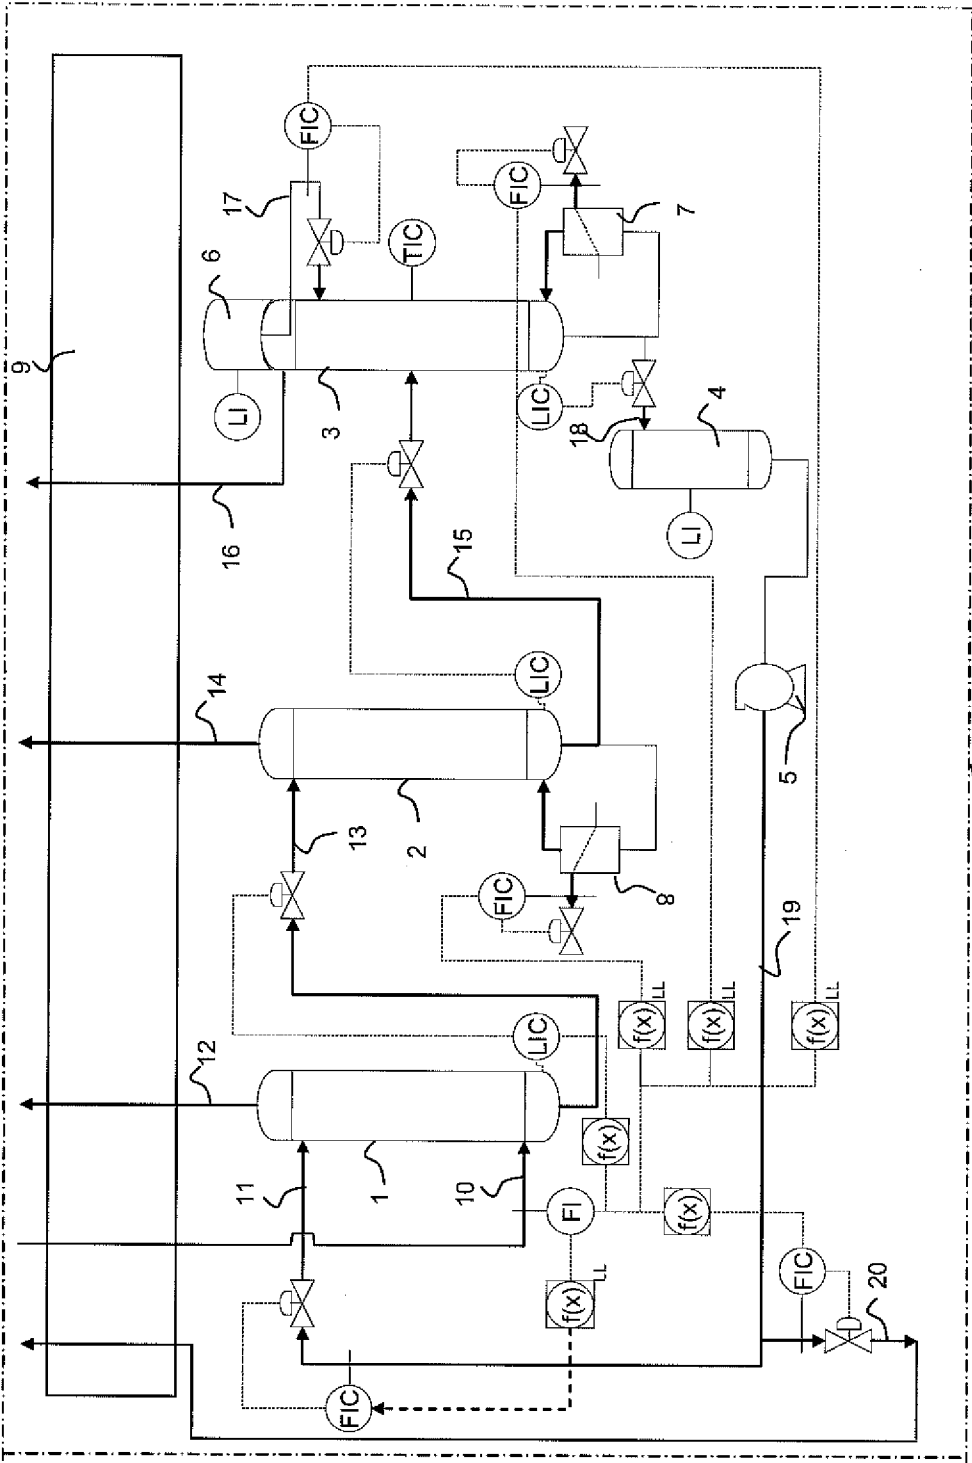


Figure 1

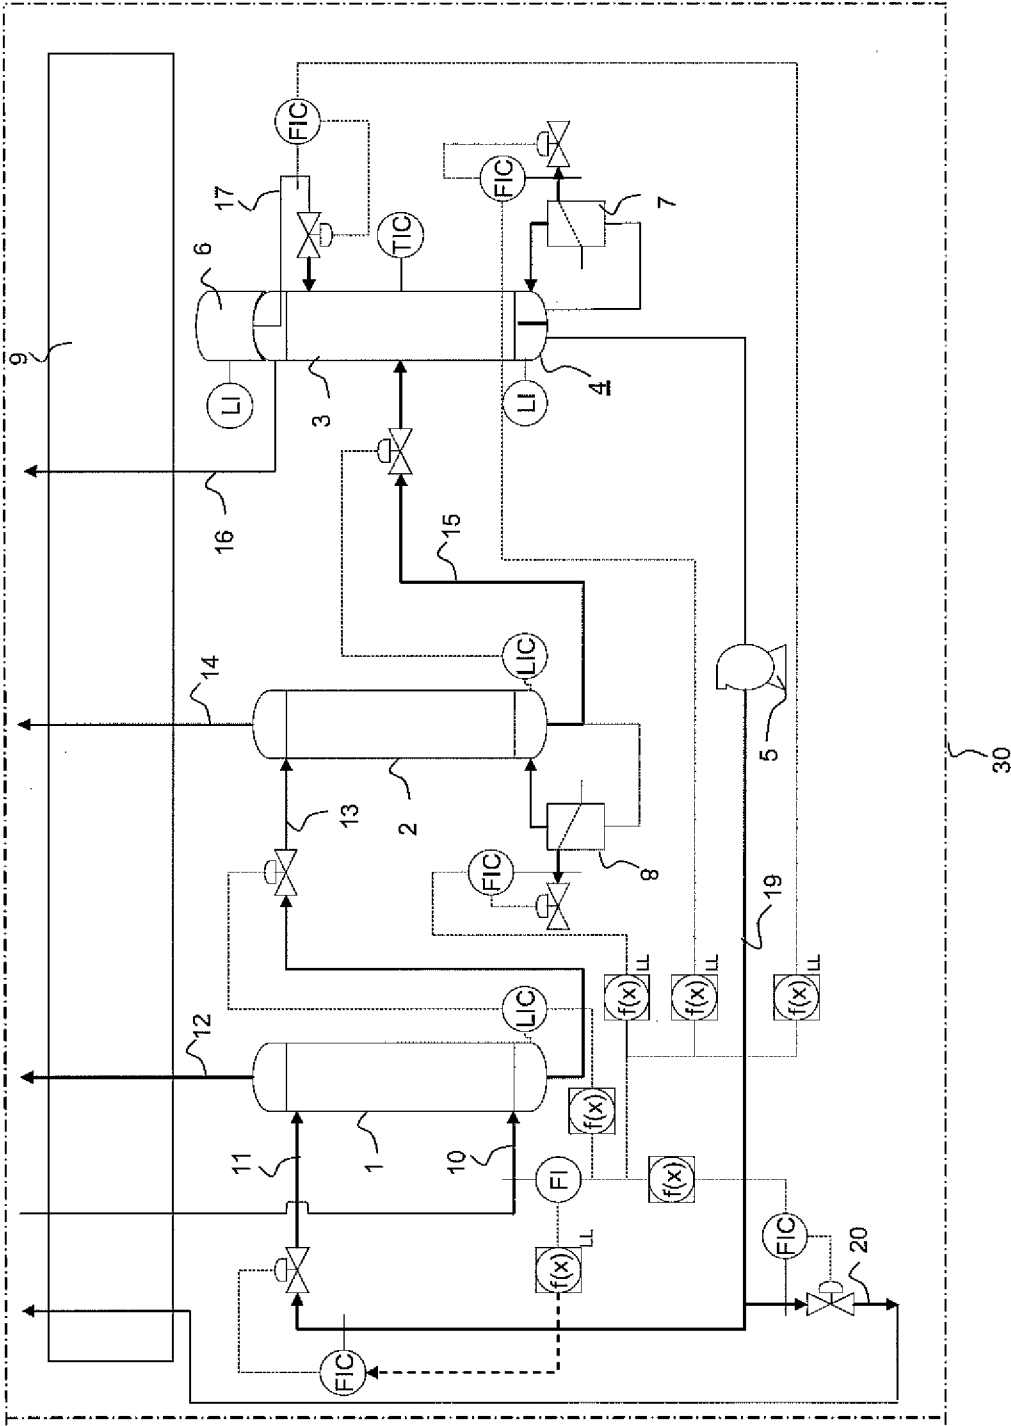


Figure 2

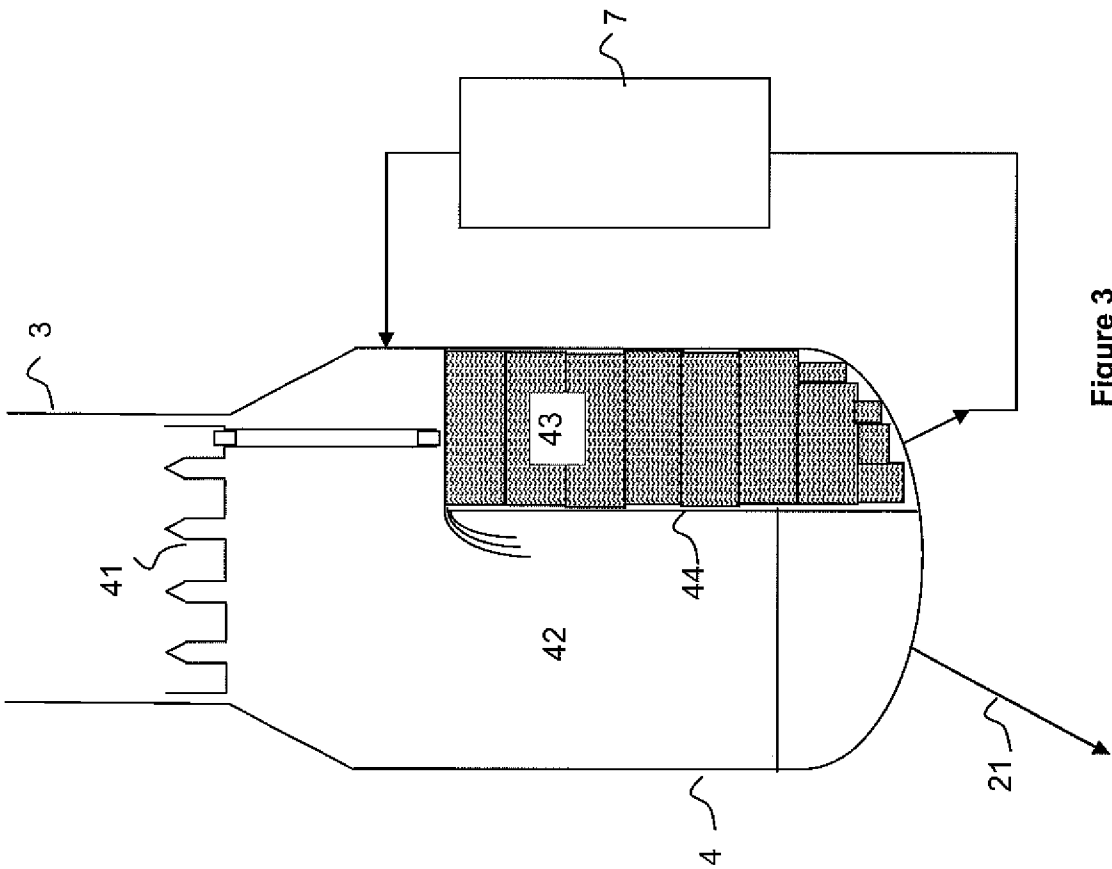


Figure 3