



(51) International Patent Classification:
H04R 9/02 (2006.01)

(21) International Application Number:
PCT/EP2009/055218

(22) International Filing Date:
29 April 2009 (29.04.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
08103799.6 30 April 2008 (30.04.2008) EP

(71) Applicants (for all designated States except US): **RENAULT S.A.S.** [FR/FR]; 13-15 Quai Alphonse Le Gallo, F-92100 Boulogne Billancourt (FR). **UNIVERSITÉ DU MAINE** [FR/FR]; Avenue Olivier Messiaen, F-72085 Le Mans Cedex 9 (FR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **LEMARQUAND, Guy** [FR/FR]; 21, rue d'Isaac, F-72000 Le Mans (FR). **REMY, Mathias** [FR/FR]; 44, route de Gif, F-91190 Villiers-le-Bâcle (FR). **GUYADER, Gaël** [FR/FR]; 35, Allée des Biches, F-28210 Chaudon (FR).

(74) Agents: **GENDRON, Vincent** et al.; c/o SA Fedit-Loriot et autres, 38, avenue Hoche, F-75008 Paris (FR).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: IRONLESS AND LEAKAGE FREE COIL TRANSducer MOTOR ASSEMBLY

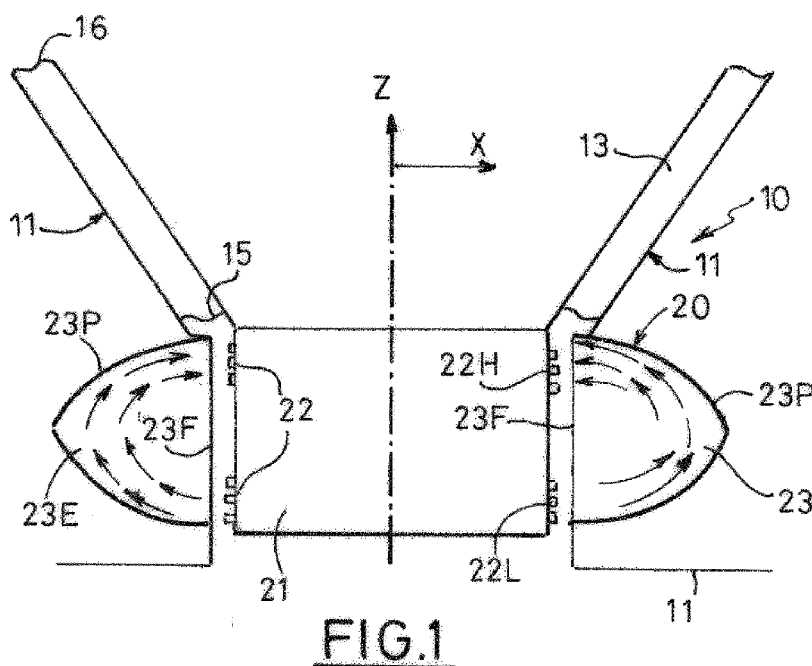

(57) Abstract: The invention relates to a coil transducer motor structure (20) comprising at least one coil (22), at least one magnetic element (23) arranged in use to provide a path for magnetic flux between the ends of said coil (22), characterized in that the magnetic element (23) has a structure providing a curvilinear path therethrough for said magnetic flux.

**IRONLESS AND LEAKAGE FREE COIL TRANSDUCER MOTOR
ASSEMBLY**

5 This invention relates to coil transducer motor assemblies and particularly to ironless and leakage free coil transducer motor assemblies.

 This invention is disclosed in the context of a moving voice-coil transducer motor assembly for a
10 loudspeaker. However, it is believed to be useful in other applications such as microphones, geophones, and shakers.

 Voice-coil transducer motor assemblies, such as those used in traditional electrodynamic loudspeakers
15 comprising magnetic field generating means adapted to generate a magnetic field in which a coil fixed on a moving part can be driven by a driving current in order to induce vibrations to a diaphragm connected to the moving part to produce sound, present a number of well-
20 known drawbacks.

 First, the presence of iron spacers, that usually comprise so called rear and front plates and a pole piece to help control the magnetic field characteristics in such motors leads to several kinds
25 of nonlinearities. These include Eddy currents, the magnetic saturation of the iron and the variation of the coil inductance with its position causing a reluctant effect. However, it is desirable for the force applied on the moving part to be an image of the
30 driving current. The driving forces applied on the

moving part of the loudspeaker can be written as follows:

$$F_{driv} = F_L + F_r = Bli + \frac{1}{2} \frac{dL}{dx} i^2 \quad \text{Equation (1)}$$

5 Where F_L is the Laplace force, F_r the reluctant force, B the induction seen by the voice-coil, l the length of the coil, i the driving current flowing through the coil, L the inductance of the coil and x the displacement of the coil. Thus, equation (1) shows
10 that if the inductance of the coil varies, a reluctant force, proportional to i^2 , occurs and interferes with the Laplace force. This reluctant force creates a force distortion resulting directly in an audible acoustical distortion.

15 Second, a significant part of the magnetic field created by most loudspeaker motors does not contribute towards making the diaphragm move. In addition to a simple loss of magnetic field, this leakage flux can be attracted by any ferromagnetic object placed nearby,
20 leading to a decrease of the device efficiency. Reciprocally, this leakage magnetic field can prevent some devices placed nearby from working properly.

 In order to solve these problems, several structures of ironless coil transducer motor assemblies
25 have been proposed, one example of which is disclosed in the patent document FR2892886.

 This disclosed assembly comprises a plurality of sintered permanent magnets arranged in such a way that
30 the magnetization is always parallel to the outer edge.

The perpendicular arrangement of the magnets leads to the generation of a magnetic field by the motor that is focused on the coil path without the use of iron spacers to focus and guide the magnetic field. The inductance of the coil no longer depends on its position, resulting in the vanishing of the reluctant force and the other nonlinearities due to iron that were listed previously. In addition, the inductance is diminished and consequently, so is the electrical impedance, especially at high frequencies.

However, although some field leakage is prevented in comparison with a traditional coil transducer motor assemblies comprising iron spacers, it is still a drawback that these assemblies have magnetic field leakage especially towards the external parts of the assembly, that prevent integration of such assemblies in close neighborhood of other electrical devices.

Another problem of this ironless coil transducer motor assembly is that the structure made of sintered magnets is difficult to assemble, as it requires the manufacture of magnet rings with distinct magnetization directions especially for the radially magnetized magnet rings and to have them sintered together.

These two problems are emphasized the more the dimensions of the loudspeaker are reduced.

It is an object of the invention to provide an improved ironless coil transducer motor assembly and in particular, an ironless coil transducer motor assembly that is leakage free.

Thereto, the present invention provides an ironless coil transducer motor assembly according to claim 1.

By providing a structure to the magnetic element
5 such as it can provide a curvilinear path therethrough, the magnetization can be made in such a way that the magnetic field lines follow in any point the curve of the structure and leakage of the magnetic field can be prevented within and outside of the ironless coil
10 transducer motor assembly, and especially towards an external direction.

Further advantageous features of the invention are disclosed in the dependant claims:

- 15 - said curvilinear path may be hemi-ellipsoidal;
- said magnetic element may be hemi-ellipsoidal in a [x-z] plane view cross-section, that provides a more compact transducer along the z-component;
- 20 - said hemi-ellipsoidal path or structure in cross-section may have a ratio R of 2 between the lengths of the major axis b and the minor axis h; that provides, to offer a good compromise between magnetic field intensity and
25 the magnet element volume;
- said curvilinear path may be hemi-circular;
- said magnetic structure may be hemi-circular in a [x-z] plane view cross-section, that provides a more compact transducer along the x-
30 component;

- the magnetic element may be magnetized in such a manner that said magnetic path is always substantially tangential to a peripheral edge of said magnetic element, except on the side facing the coil, where it is perpendicular to the edge of the coil-facing face, that provides a high concentration of the magnetic field around the coil;
- the magnetic element may comprise a bonded magnetic structure, that is easier to assemble;
- a preforming molding die, adapted to contain the material constituting the bonded magnet element (23), may be made of a non-magnetic material or a soft-magnetic material or a combination thereof to ensure that a high magnetic field can enter into the mold without any disturbance;
- magnetization of the magnetic element may be realized when the material constituting the bonded magnet is still liquid;
- the bonded magnet element may comprise a rare-earth material based alloy and may be preferably chosen between Nd-Fe-B, Sm-Co and Sm-Fe-N;
- the coil motor transducer structure may further comprise a moving part, such as a piston, on which the coil is mounted and may comprise at least one ferrofluid seal for guiding the movement of said moving part, that reduces the non-linearities in the movement of the moving part in the transducer;

- the ferrofluid seal may be placed between the moving part and the magnet element's coil-facing face in the region where the magnetic flux gradient is the largest, so it can help concentrate the field in that region;
- said ferrofluid seal may be arranged in use to act as a thermal bridge allowing the heat created by the coil to flow therethrough and be dissipated to the atmosphere, to improve the heat dissipation in the coil motor transducer structure;
- the coil motor transducer structure may further comprise a moving part, such as a piston, that is at least partially hollow so as to define a volume therein, and the coil motor transducer structure may further comprise an external magnetic element and an internal magnetic element, the latter being placed in the volume defined in the moving part; which improves the compactness of the transducer.

Furthermore, by using bonded magnets, elaborate cross section shapes and optimized magnetization of the structure can be realized, allowing for more compact coil motor structures.

Even though it is not easy yet to obtain Nd-Fe-B bonded magnets with a magnetization higher than 0.9 T, the possibility to realize almost any shape allows ingenious magnetic structures to be made in order to compensate.

In particular, the ellipsoidal structure permits the creation of an intense magnetic field concentrated on the voice-coil trajectory, which is the aim of a leakage free loudspeaker motor.

5 Finally, the whole structure is directly injected in a mold and no assembly of annular magnets is needed, which is a strong advantage in case of mass production.

The invention also relates to a method of
10 manufacturing a magnetic element for use in a coil transducer motor according to the present invention, the method including the steps of:

- providing a compound of magnetic powder and a binding material, such as a thermosetting
15 resin, in liquid state in a mould, then;
- magnetizing said compound whilst in liquid state in said mould, such that said compound generates said curvilinear path whilst in said liquid state; then
- 20 - setting said compound to form said element.

The invention also relates to a loud speaker incorporating a voice coil motor structure according to the invention for inducing vibrations to a diaphragm
25 (13) that is fixed towards an end of the moving part (21) of the coil transducer motor structure (20) thereon.

The present invention will now be described by way
30 of example only and with reference to the accompanying drawings, in which:

- 5 - figure 1 is a schematic representation of a cross-section of a voice-coil transducer motor assembly comprising an external magnetic field generating means made from bonded magnets;
- 10 - figure 2 is a schematic representation of a cross-section of a voice-coil transducer motor assembly comprising external and internal magnetic field generating means made from bonded magnets;
- 15 - figure 3 is a schematic representation of a cross-section of a voice-coil transducer motor assembly comprising an external magnetic field generating means made from bonded magnets and ferrofluid seals;
- 20 - figure 4a and figure 4b are respective cross-sections of a rectangular section three sintered magnet voice-coil transducer motor structure and of an elliptical section bonded magnet voice coil transducer motor structure;
- 25 - figure 5 is a graph showing results of calculation comparing the magnitude of the magnetic fields in the x-component of the voice-coil transducer motor structures of figures 4a and 4b;
- 30 - figure 6 is a graph showing results of calculation comparing the magnitude of the x-component of the magnetic field relative to the Z-component in each of the voice coil transducer motor structures of figures 4a and 4b;

- figure 7 is a graph showing the effect of the ratio between the lengths of the major axis b and the minor axis h of an ellipsoidal structure on the generated magnetic field.

5

Referring to the figures and for the moment in particular to Figure 1, a crosscut through a loudspeaker 10 is illustrated. This loudspeaker 10 essentially comprises a receiving part 11, and a voice-coil transducer motor structure 20 adapted to move along an axis Z so as to induce movement to a diaphragm 13 attached to the diaphragm 13 by its lower edge.

The diaphragm 13 is maintained at a distance along an axis x from the receiving part 11 by suspension means in order to give it a conical shape. The x axis is defined by the intersection of a radial plane and a longitudinal plane that includes the Z axis. These suspension means comprise an internal suspension usually known as a spider 15 and placed towards its lower edge and an external suspension 16 placed towards its higher edge.

In addition to their guiding function, these suspension elements 15, 16 also serve to protect the voice-coil 22 from dust and particles that could get inside the voice-coil transducer motor structure 20 and stick to it electrostatically because of the magnetic field generated in the loudspeaker 10.

These suspension elements 15, 16 can also comprise ferrofluid seals to guide the moving part 21, and in particular comprise ferrofluid seals 25 to

replace the spider as shown on figure 3 that will be described in more detail later in the description.

The voice-coil transducer motor structure 20 comprises a moving part 21 on which a voice-coil 22 is wound therearound and at least one magnetic element 23 arranged in use to provide a path for magnetic flux between an upper 22H and a lower 22L path of the winding of said voice-coil 22.

The upper 22H and lower 22L windings comprise at least one winding, and preferably less than three.

The moving part 21 or mandrel can be in the shape of a cylinder and can be full or at least partially hollow so as to define a volume therein.

As shown on figure 1, the magnetic element 23 is of hemi-ellipsoidal cross section or at least the magnetic path is of hemi-ellipsoidal shape.

In a particular embodiment, the cross section could be hemi-circular or at least the magnetic path may be of hemi-circular shape.

The magnetic element 23 comprises a peripheral edge 23P that follows a hemi-ellipsoidal line, or in particular a hemi-circular line, and a coil-facing face 23F adapted to face the voice coil 22, so that the magnetic field is perpendicular to it.

The magnetic element 23 can surround the moving part 21 or in the case of a hollow moving part 21, be placed inside the volume defined therein.

By placing the magnetic element 23 inside the moving part 21, a more compact voice coil transducer motor structure 20 can be obtained. Moreover, when using ferrofluid seals to guide the moving part 21,

having the magnetic element 23 inside the moving part 21 is advantageous because it allows the ferrofluid seal to slide all the way along the z axis of the moving part 21.

5 As shown in figure 2, a voice coil motor structure 20 can comprise an external magnetic element 23E and an internal magnetic element 23I placed in the moving part 21.

Such a structure is more efficient, especially
10 when double coil windings 23H,23L are used.

According to the invention, the magnetic element 23 is made of bonded magnets.

This allows the magnetization of the structure to be done in such a way that the magnetic path through it
15 is always at a tangent to the peripheral edge 23P, except on the coil-facing face 23F where it is perpendicular to the edge in order to avoid magnetic flux leakages. The magnetic field created by the motor is then concentrated on the voice-coil 22 path in order
20 to increase the efficiency of the loudspeaker 10.

Although not shown in the figures, several magnet elements and corresponding coils can be stacked along the axis Z. Such an arrangement is advantageous when high energy movement is required such as in shaker
25 applications, the leakage free properties of the structures allowing for more compact motors without having crosstalk between the adjacent generated magnetic fields.

The bonded magnetic elements 23 can be made of a
30 compound that comprises a magnet powder mixed with a binding material, usually a fluid such as a

thermosetting resin in a preforming molding die to form a bonded magnet of the desired shape such as a hemi-elliptical shape as shown on figure 1. These bonded magnets elements 23 can be made for example one of the
5 methods described in the patent document GB2314799.

The magnet powder material, that preferably has anisotropic magnetization properties, can be chosen in the list of materials comprising ferrite material or rare-earth materials that have higher magnetic
10 properties than the ferrite materials, such as alloys of Nd-Fe-B, Sm-Co and Sm-Fe-N.

The preforming molding die can be made of a non-magnetic material or a soft-magnetic material or a combination thereof to ensure that a high magnetic
15 field can enter into the mold without any disturbance.

The binding material is chosen amongst a list of materials that suit best the conditions of compression molding that is desired in the method of manufacturing the bonded magnet element.

20 One non-limiting example of manufacture of such an element can comprise the following steps:

The method of manufacturing a bonded magnet element comprises the steps of:

- 25 - mixing the magnet powder material with the thermosetting resin at a temperature that is above a set temperature for the resin to be in a liquid state to form a compound;
- having the preforming molding die filled with the compound and preferably having heating
30 means provided on the die for the compound to be kept above the set temperature and more

- preferably to reach a temperature at which the viscosity of the compound is the lowest;
- having a magnetic field generated by a magnetizing means and preferably pressure applied to the compound in the molding die for the magnet powder material to align along the magnetic field lines created by the magnetizer and;
 - having the molding die removed after the compound is cooled down and compact.

Use of bonded magnets allows for elaborate cross-sectional shapes such as hemi-ellipsoidal and hemi-circular and optimized magnetization of the structure.

The fluid is directly injected in a mold and the product is formed in one piece so that, unlike the multiple sintered magnet element version no assembly is needed after the bonded magnetic element 23 is formed. Moreover, the optimized magnetization lowers the need for cooling in the voice-coil transducer motor structure 20, since for an equivalent energy used to move the diaphragm 13, lower magnitudes of magnetic fields are needed.

The magnetic field created by these structures presents a high gradient around the semi-height of their inner face.

More generally, a high gradient is observed around the point of inversion of the magnetic flux, which can be distinct from the semi-height point when having dissymmetrical cross-sectional shapes or dissymmetrical curvilinear magnetic paths.

This high magnetic field gradient permits the use of ferrofluid seals 25 to guide the moving part 21 and can replace the spider 15 of figure 1. One possible ferrofluid seal is of the type disclosed in the patent
5 document FR2892887 incorporated in its entirety herein by reference.

As shown on figure 3, a ferrofluid seal 25 is placed in between the moving part 21 and the magnet element 23. The ferrofluid seal 25 is placed around the
10 point where the magnetic flux gradient is the largest. In the symmetrical magnetic elements 23 shown in figure 3, the ferrofluid seal 25 takes place around the point of semi-height of the coil-facing face 23F.

Use of ferrofluid seals 25 can help avoid non-
15 linearities in the movements of the moving part 21 in the coil transducer motor structure 20 that can be introduced by the suspension elements 15,16 usually made of elastomer.

Moreover, ferrofluid seals 25 act as thermal
20 bridges, allowing the heat generated by the current circulating in the coil to flow through and be dissipated in the magnetic element 23 and in the receiving part 11, that have better thermal exchanges coefficients than the moving part 21, usually made in a
25 light material such as cardboard.

Figures 4a and 4b show respective cross-sections of a conventional rectangular section three-piece sintered magnet voice coil transducer motor structure 20 and of an elliptical section bonded magnet voice
30 coil transducer motor structure 20 according to the present invention on the basis of which two-dimensional

calculations have been undertaken, which results are discussed herebelow.

A 2D Coulombian approach is used to calculate analytically the magnetic field created by the structures illustrated in Figures 4a and 4b. The basis
5 of the model used for the calculation is disclosed in "Three-dimensional analytical optimization of permanent magnets alterned structure", IEEE Trans. Magn., vol 34, pp.242-247, January 1998 by F. Bancel and G. Lemarquand
10 and disclosed in "Rare-earth Iron Permanent Magnets, ch. Magnetomechanical devices, Oxford Science Publications, 1996 by J.P. Yonnet.

The elliptical section bonded magnet voice coil transducer motor structure 20 is discretized, in seven magnets of equal angular section, in order to enable analytical calculations of the magnetic field to be performed.

A magnetic charges model is used to describe the magnets. The surface charge density σ^* of each
20 triangular magnet is defined with the magnetization $\vec{J}$ and then calculated such as:

$$\sigma^* = \vec{J} \cdot \vec{n}$$

Equation (2)

where $\vec{n}$ is the outwards surface normal vector.

25 The magnetization is considered to be always substantially parallel to the outer edge of the ellipsoid in order to avoid magnetic flux leakages. As a result, the magnetization is uniform for each magnet, which gives:

30

$$\text{div} \vec{J} = \rho^* = 0 \quad \text{Equation (3)}$$

where ρ^* represents the volume charge density. Nevertheless, for the real structure, volume charges
 5 should be taken into account, as in "Using Coulombian approach for modeling scalar potential and magnetic field of a permanent magnet with radial polarization", IEEE Trans. Magn., vol.43, pp1261-1264, April 2007 by H.L Rakotoarison, J.P. Yonnet and B. Delinchant.

10 The magnetic field, $\vec{B}$, created by each magnet surface at any point M(x, z) is given in 2D by:

$$\vec{B} = \frac{\sigma^*}{4\pi} \int_{y_i=-\infty}^{y_i=+\infty} \int_{z_j} \frac{\vec{PM}}{|\vec{PM}|^3} dy_i dz_j \quad \text{Equation (4)}$$

15 where P is a point on the considered surface i.

Overall, the magnetic field created by the fourteen surfaces, two for each magnet, has to be calculated independently then summed to obtain the total magnetic field created by the ellipsoidal
 20 structure, since the superposition theorem applies. The same method is used to calculate the magnetic field created by the three magnets structure. It can be noted that for the rectangular structure, if θ equals 45° (i.e. $a = h$), only the two surfaces facing the voice-
 25 coil have to be taken into account. This is due to the fact that the remaining surface charge density is equal to zero on the two other magnet interfaces.

The calculations have been undertaken on these two structures that have equal dimensions h along the
5 z-component, and different dimensions a and b along the
x-component chosen to provide both structures with the
same cross section area.

The magnetization values for each magnet element
are equal to 1 Tesla, that is in the vicinity of the
10 maximum value of magnetization that can be obtained for
Nd-Fe-B bonded magnet elements.

Figure 5 presents the magnitude isolines of the
x-component of the magnetic field created in front of
the magnet element for both structures. It is clear
15 that the hemi-ellipsoidal magnet elements 23 gives
better results than the rectangular one: the magnetic
field generated is more intense and shows a better
symmetry around the rest position of the voice-coil
(i.e. z equals 0.5 and -0.5 cm).

20 Figure 6 compares the evolution of the magnetic
field in front of the whole height of the magnetic
element structure (i.e. z equals -1 cm to z equals 1
cm) at a distance from the magnet equal to 0.5 mm along
the x-component for both structures.

25 Once again, it clearly shows that the ellipsoidal
structure gives better results (i.e. intensity and
symmetry around the rest position of the coil) than the
rectangular one of equal magnet volume.

The symmetry around the rest position and the
30 uniformity of the induction across the whole voice-coil

trajectory is an important characteristic for an accurate loudspeaker motor.

The length of this trajectory is determined by the intended acoustical pressure at low frequencies, giving the maximal needed acoustic flow, and thus, the maximal required excursion for a given radiating surface.

For example, to obtain a sound pressure level of 95dB at 1 m on axis and at 100 Hz with a loudspeaker having a 5 cm radius membrane, the required excursion is 2 mm. If we consider this oscillation range around the rest position, the difference of magnetic field intensity between the lowest and the highest position of the coil is 1 % for the ellipsoidal structure and 3 % for the rectangular one, which is significant for a loudspeaker. The uniformity of the magnetic field on the voice-coil path has a direct impact on the linearity of the transducer and thus, on its sound reproduction fidelity.

Figure 7 shows the effect of the geometry of the elliptical structure of the magnet element 23 by calculating the generated magnetic field as a function of the ratio between the major axis b and the minor axis h of the ellipsoid, $R = \frac{b}{h}$.

CLAIMS

5 1) Coil transducer motor structure (20) comprising at least one coil (22), at least one magnetic element (23) arranged in use to provide a path for magnetic flux between the ends of said coil (22),
 characterized in that the magnetic element (23)
10 comprises a bonded magnetic structure providing a curvilinear path therethrough for said magnetic flux.

 2) Coil transducer motor structure (20) according to claim 1 **characterized in that** said curvilinear path
15 is hemi-ellipsoidal.

 3) Coil transducer motor structure (20) according to claim 1 or claim 2 **characterized in that** said magnetic element is of hemi-ellipsoidal cross-section.
20

 4) Coil transducer motor structure (20) according to claim 2 or claim 3 **characterized in that** said hemi-ellipsoidal path or structure in cross-section is a ratio R of 2 between the lengths of the major axis and
25 the minor axis.

 5) Coil transducer motor structure (20) according to any of the preceding claims **characterized in that** the magnetic element (23) is magnetized in such a
30 manner that said magnetic path is always substantially tangential to a peripheral edge (23P) of said magnetic element (23), except on the side facing the coil (22),

where it is perpendicular to the edge of the coil-facing face (23F).

6) Coil transducer motor structure (20) according
5 to any of the preceding claims **characterized in that**
the magnetic element (23) consist in only one bonded
magnet.

7) Coil transducer motor structure (20) according
10 to any of the preceding claims **characterized in that**
magnetization of the magnetic element (23) is realized
when the material constituting the bonded magnet is
still liquid.

15 8) Coil transducer motor structure (20) according
to any of the preceding claims **characterized in that** a
preforming molding die, adapted to contain the material
constituting the bonded magnet element (23), is made of
a non-magnetic material or a soft-magnetic material or
20 a combination thereof to ensure that a high magnetic
field can enter into the mold without any disturbance.

9) Coil transducer motor structure (20) according
to any of the preceding claims **characterized in that**
25 the bonded magnet element (23) comprises a rare-earth
material based alloy and is preferably chosen between
Nd-Fe-B, Sm-Co and Sm-Fe-N.

10) Coil transducer motor structure (20)
30 according to any of the preceding claims, further
comprising a moving part (21), such as a piston on

which the coil (22) is mounted **characterized in that** the coil transducer motor structure (20) further comprises at least one ferrofluid seal (25) for guiding the movement of said moving part (21).

5

11) Coil transducer motor structure (20) according to claim 10, **characterized in that** the ferrofluid seal (25) is placed between the moving part (21) and the coil-facing face (23F) of the magnetic
10 element in the region where the magnetic flux gradient is the largest.

12) Coil transducer motor structure (20) according to claim 10 or claim 11 **characterized in that**
15 said ferrofluid seal is arranged in use to act as a thermal bridge allowing the heat created by the coil (22) to flow therethrough and be dissipated to atmosphere.



20 13) Coil transducer motor structure (20) according to any of the preceding claims, further comprising a moving part (21) such as a piston, that is at least partially hollow so as to define a volume therein **characterized in that** the coil transducer motor
25 structure (20) further comprises an external magnetic element (23E) and an internal magnetic element (23I), the latter being placed in the volume defined in the moving part (21).

30 14) Method of manufacturing a magnetic element for use in a coil transducer motor according to any of

the preceding claims, the method including the steps of:

- providing a compound of magnetic powder and a binding material, such as a thermosetting resin, in liquid state in a mould, then;
- magnetizing said compound whilst in liquid state in said mould, such that said compound generates said curvilinear path whilst in said liquid state; then
- setting said compound to form said element.

15) A loud speaker (10) incorporating a coil transducer motor structure (20) according to any one of claims 1 to 13 for inducing vibrations to a diaphragm (13) that is fixed towards an end of the moving part (21) of the coil transducer motor structure (20) thereon.

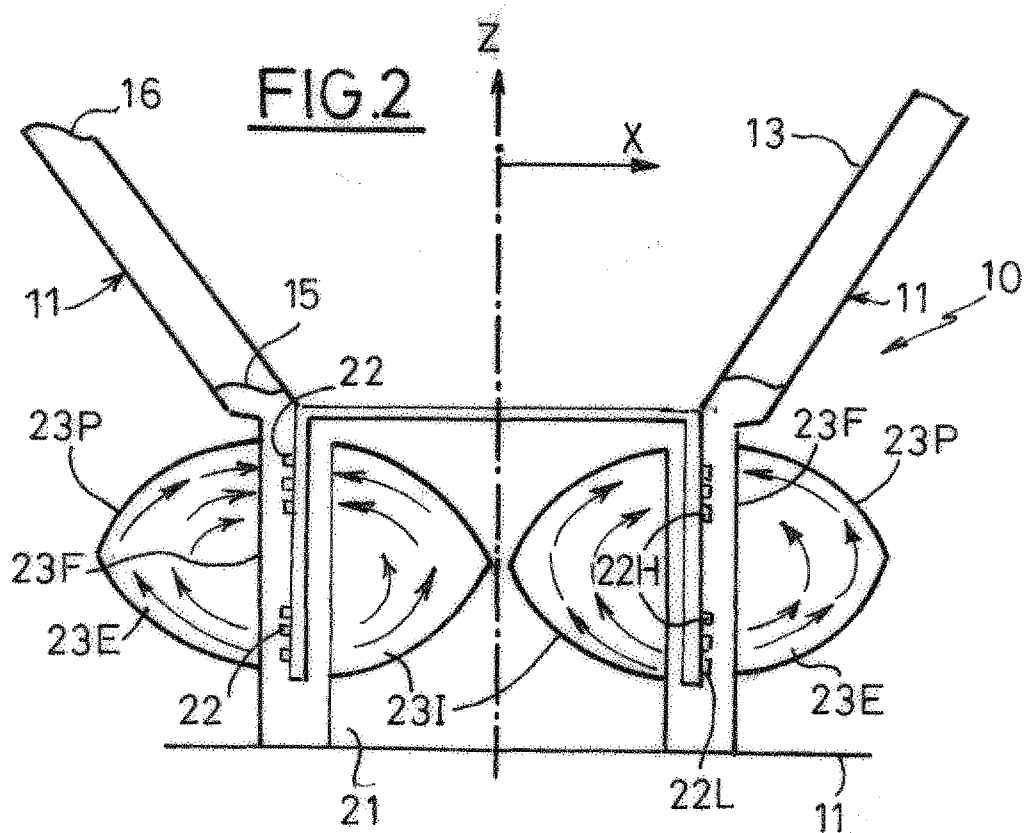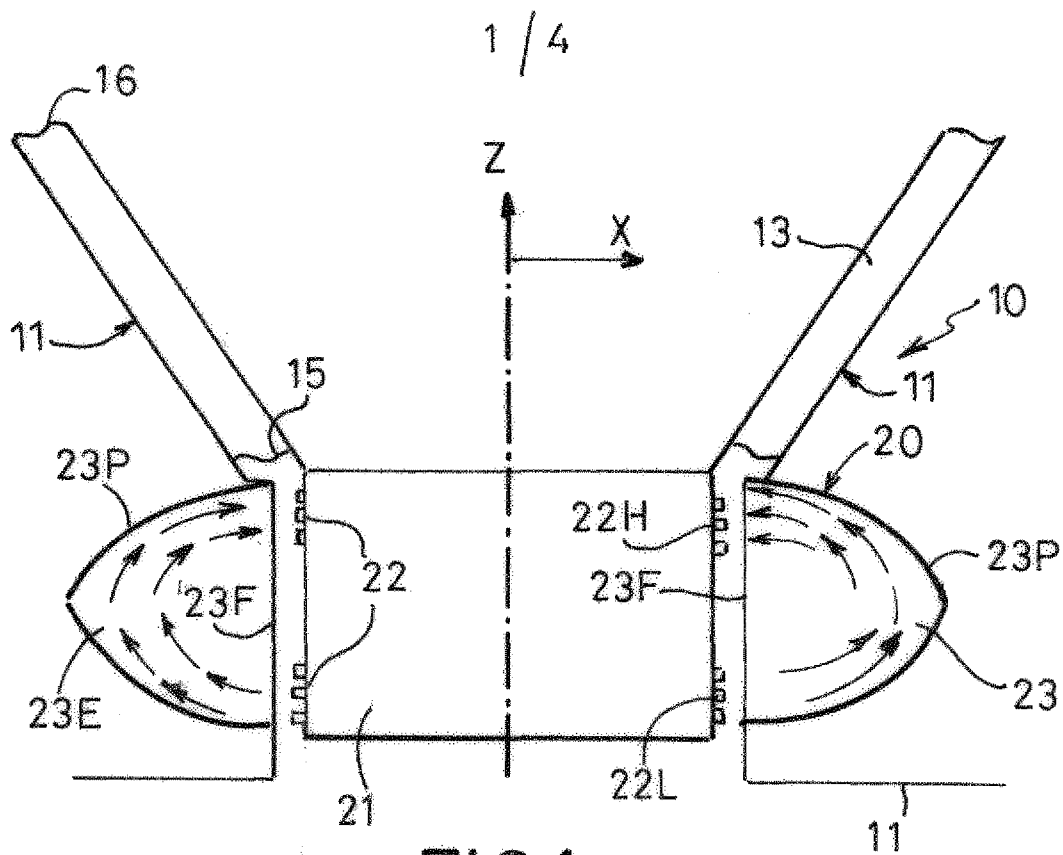

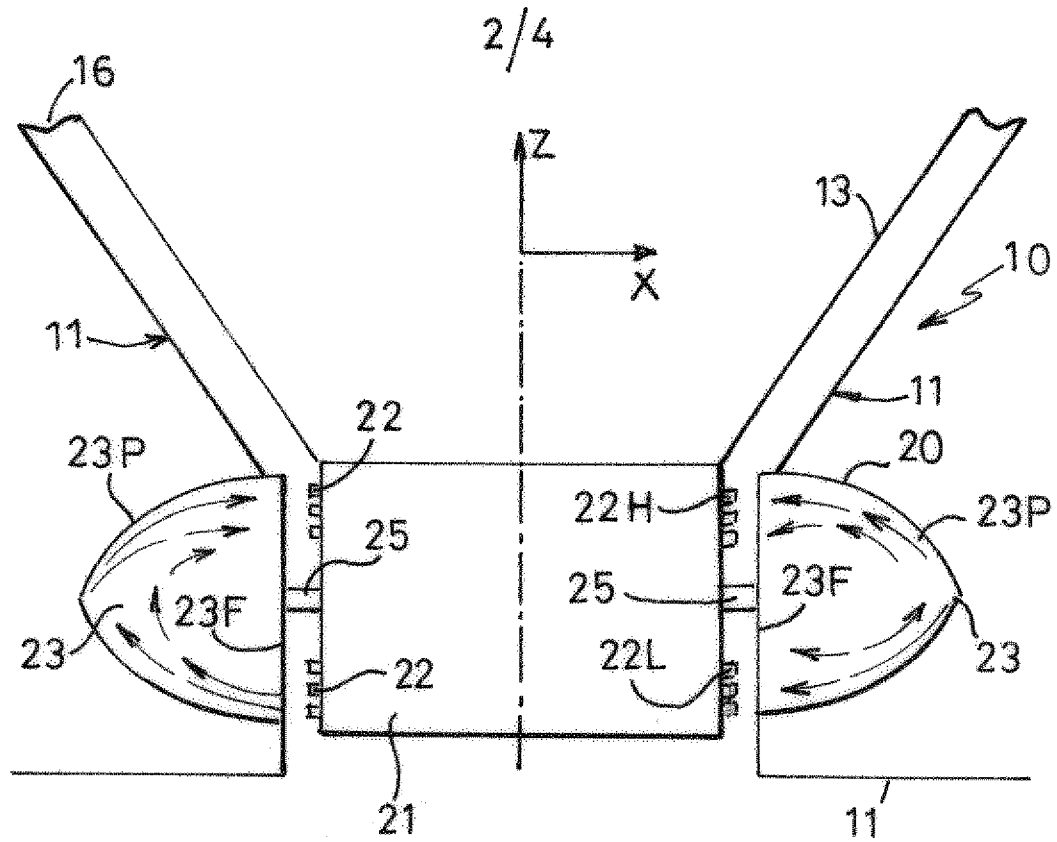


FIG. 3

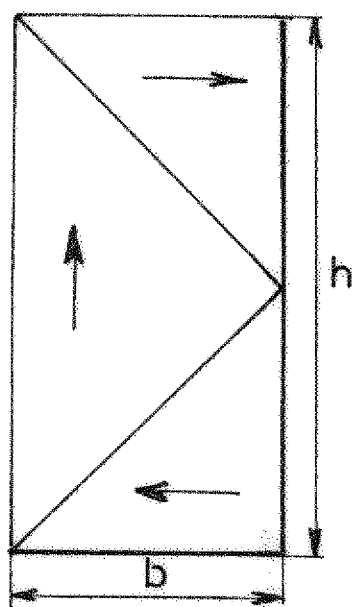


FIG. 4A




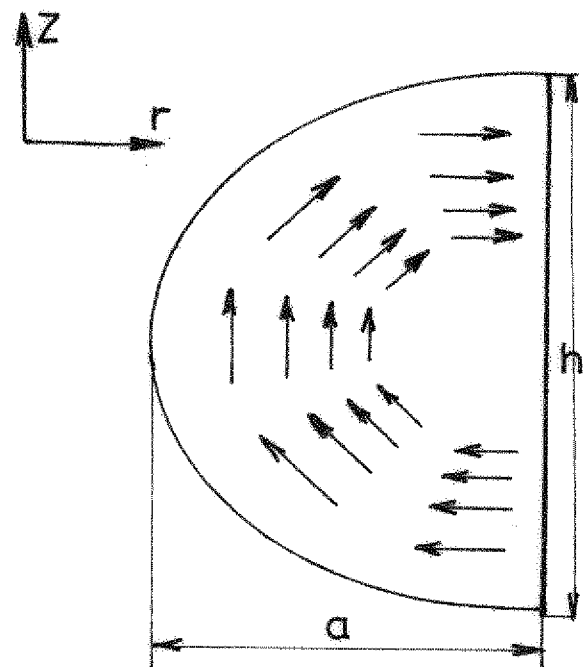


FIG. 4B

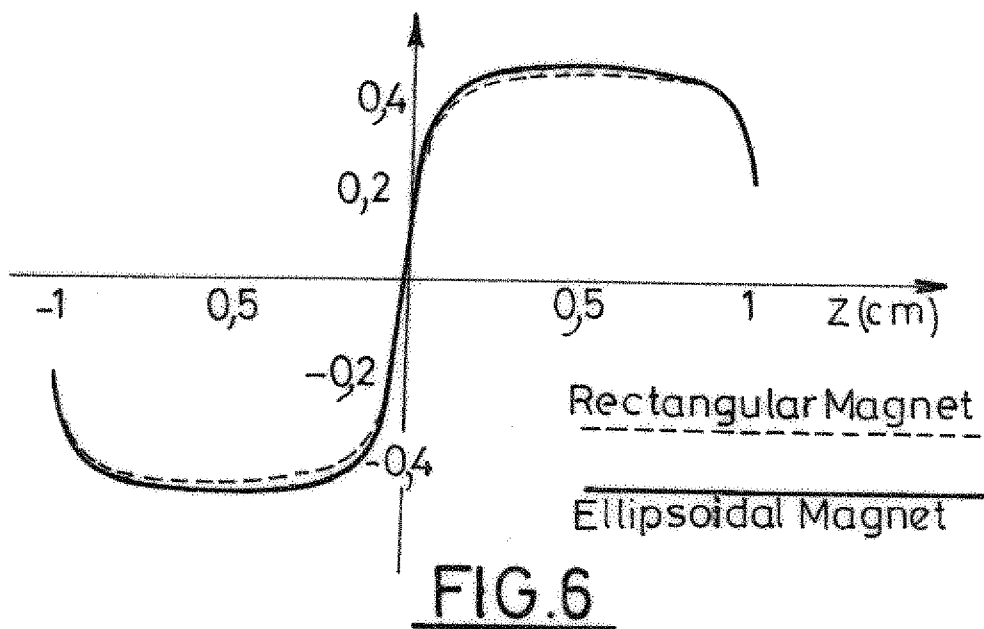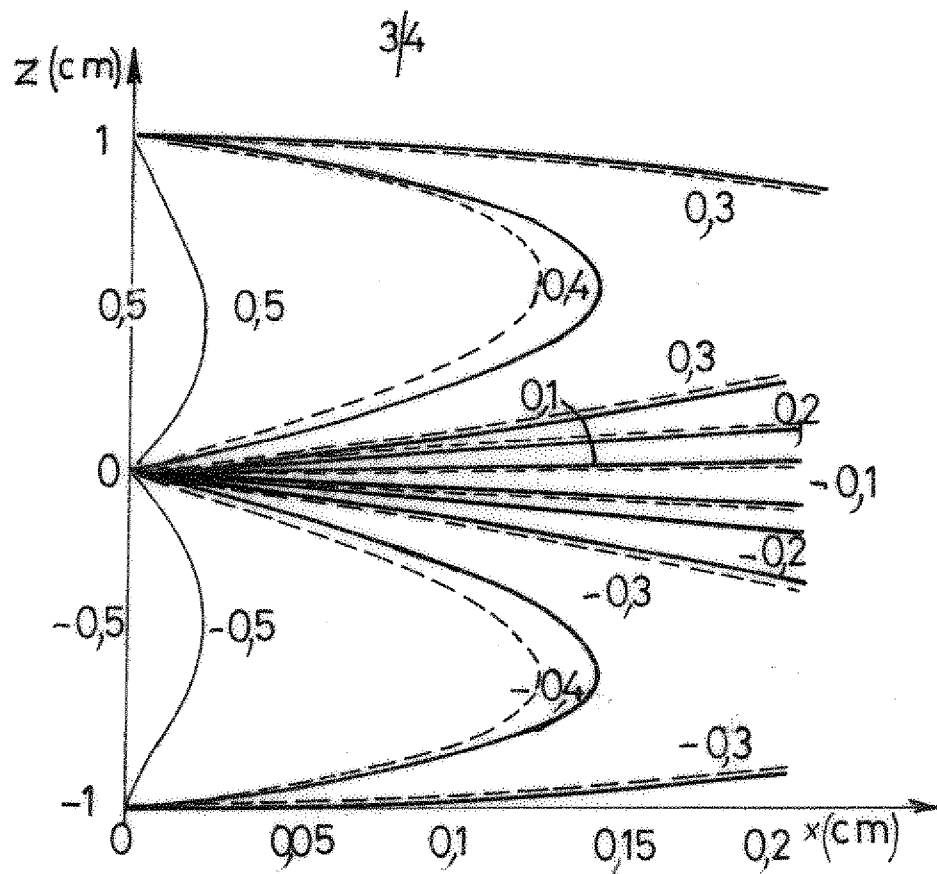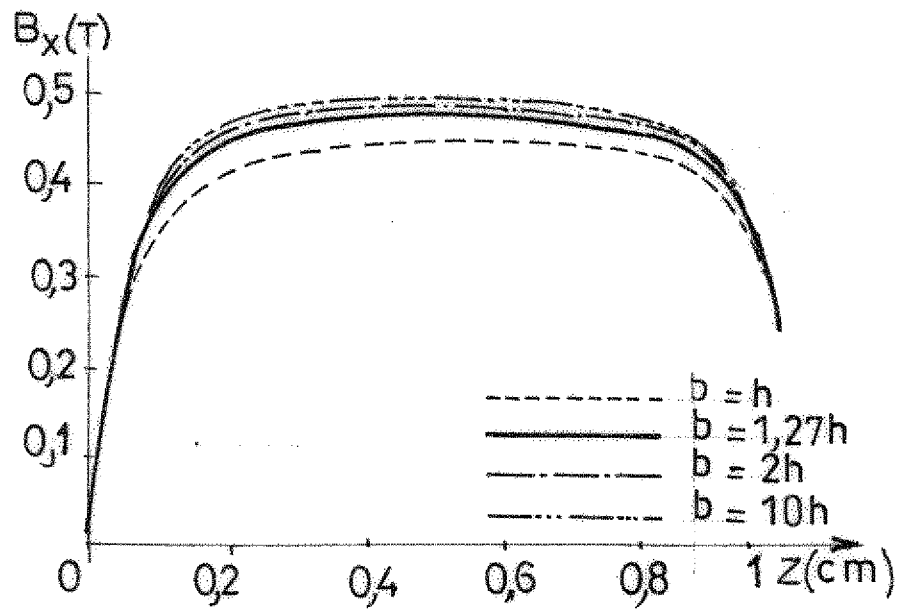

4/4

FIG.7

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2009/055218

A. CLASSIFICATION OF SUBJECT MATTER
INV. H04R9/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H04R H01F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y	US 5 715 324 A (TANABE KEI [JP] ET AL) 3 February 1998 (1998-02-03) the whole document	1,2,5,6, 9,13,15 3,4,7,8, 10-12,14
X A	US 2005/179326 A1 (MORO JERRY [US]) 18 August 2005 (2005-08-18) pages 1-7, paragraphs 3,7,5,48,57,60,72,73,77,85	1,2,5,6, 9,13,15 3,4,7,8, 10-12,14
	----- -/-- -----	

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- * & * document member of the same patent family

Date of the actual completion of the international search

10 June 2009

Date of mailing of the international search report

18/06/2009

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Scappazzoni, E

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2009/055218

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	FR 2 892 886 A (RICHOUX BERNARD [FR]; UNIV MAINE [FR]) 4 May 2007 (2007-05-04) cited in the application figures 1-19 page 1, line 1 - line 3 page 2, line 17 - line 27 page 3, line 26 - line 34 page 16, line 11 - page 20, line 4 page 43, line 7 - page 44, line 23 page 45, line 1 - line 27 page 46, line 12 - line 17 page 51, line 19 - page 54, line 7	3,4, 10-12
Y	GB 2 314 799 A (AICHI STEEL WORKS LTD [JP]) 14 January 1998 (1998-01-14) cited in the application abstract page 1, line 5 - line 6 * paragraph "Means of solving the problem" *	7,8,14
A	US 6 680 663 B1 (LEE SEONG-JAE [US] ET AL) 20 January 2004 (2004-01-20) abstract; claims 1,4,5,8; figures 1,3-5,8,10 column 1, line 18 - line 20 column 1, line 48 - line 61 column 2, line 1 - line 6 column 2, line 30 - line 34 column 2, line 47 - line 63 column 3, line 55 - line 57 column 4, line 61 - line 63 column 5, line 13 - line 25 column 5, line 49 - column 6, line 1 column 6, line 22 - line 25 column 8, line 35 - line 52 column 9, line 34 - line 39	4
A	GUY LEMARQUAND: "New structure of loudspeaker" AES CONVENTION PAPER, [Online] May 2006 (2006-05), pages 1-4, XP002495237 Paris Retrieved from the Internet: URL: http://www.aes.org/e-lib/browse.cfm?elib=13650 [retrieved on 2008-09-08] abstract; figure 1 paragraph [0002]	1,7-10, 14

-/--

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2009/055218

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	BLACHE C ET AL: "Linear displacement sensor with high magnetic field gradient" JOURNAL OF MAGNETISM AND MAGNETIC MATERIALS, ELSEVIER SCIENCE PUBLISHERS, AMSTERDAM, NL, vol. 104-107, 2 February 1992 (1992-02-02), pages 1106-1108, XP024536196 ISSN: 0304-8853 [retrieved on 1992-02-02] the whole document	1-5,13, 15
A	----- US 5 634 263 A (LEUPOLD HERBERT A [US]) 3 June 1997 (1997-06-03) abstract; figures 1-3	1-5
A	----- WO 94/03026 A (LINAEUM CORP [US]) 3 February 1994 (1994-02-03) figures 7,8 page 1, line 3 - line 6 page 1, line 16 - line 20 page 4, line 26 - page 5, line 2 page 7, line 23 - line 28 page 10, line 31 - page 11, line 15	1-3,5, 13,15
A	----- US 5 317 228 A (LEUPOLD HERBERT A [US]) 31 May 1994 (1994-05-31) abstract; figures 1,3,4 column 2, line 20 - line 50 column 3, line 18 - line 26 column 5, line 35 - line 43 column 8, line 3 - line 17	1-3,13
P,X	----- REMY M ET AL: "Ironless and Leakage Free Voice-Coil Motor Made of Bonded Magnets" IEEE TRANSACTIONS ON MAGNETICS, IEEE SERVICE CENTER, NEW YORK, NY, US, vol. 44, no. 11, 1 November 2008 (2008-11-01), pages 4289-4292, XP011240296 ISSN: 0018-9464 the whole document	1-15

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2009/055218

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5715324	A	03-02-1998	NONE	
US 2005179326	A1	18-08-2005	NONE	
FR 2892886	A	04-05-2007	EP 1946607 A2 WO 2007051949 A2 US 2009028375 A1	23-07-2008 10-05-2007 29-01-2009
GB 2314799	A	14-01-1998	CN 1173028 A DE 19728418 A1 JP 2816668 B2 JP 10022153 A US 5886070 A	11-02-1998 08-01-1998 27-10-1998 23-01-1998 23-03-1999
US 6680663	B1	20-01-2004	NONE	
US 5634263	A	03-06-1997	NONE	
WO 9403026	A	03-02-1994	AU 4683493 A US 5604815 A	14-02-1994 18-02-1997
US 5317228	A	31-05-1994	CA 2059085 A1	06-08-1992