




(86) **Date de dépôt PCT/PCT Filing Date:** 2008/05/20
(87) **Date publication PCT/PCT Publication Date:** 2009/03/26
(45) **Date de délivrance/Issue Date:** 2016/07/05
(85) **Entrée phase nationale/National Entry:** 2010/03/17
(86) **N° demande PCT/PCT Application No.:** SE 2008/050591
(87) **N° publication PCT/PCT Publication No.:** 2009/038522
(30) **Priorité/Priority:** 2007/09/17 (US60/972,955)

(51) **Cl.Int./Int.Cl. H04L 9/08** (2006.01),
H04L 29/06 (2006.01), **H04L 9/32** (2006.01)
(72) **Inventeurs/Inventors:**
BLOM, ROLF, SE;
MILDH, GUNNAR, SE;
NORRMAN, KARL, SE
(73) **Propriétaire/Owner:**
TELEFONAKTIEBOLAGET L M ERICSSON (PUBL), SE
(74) **Agent:** ERICSSON CANADA PATENT GROUP

(54) **Titre : METHODE ET DISPOSITION PERMETTANT D'ETABLIR UNE CLE DE SECURITE EN VUE DE PROTEGER LE TRAFIC RRC/UP**

(54) **Title: METHOD AND ARRANGEMENT FOR ESTABLISHING A SECURITY KEY FOR PROTECTING RRC/UP TRAFFIC**

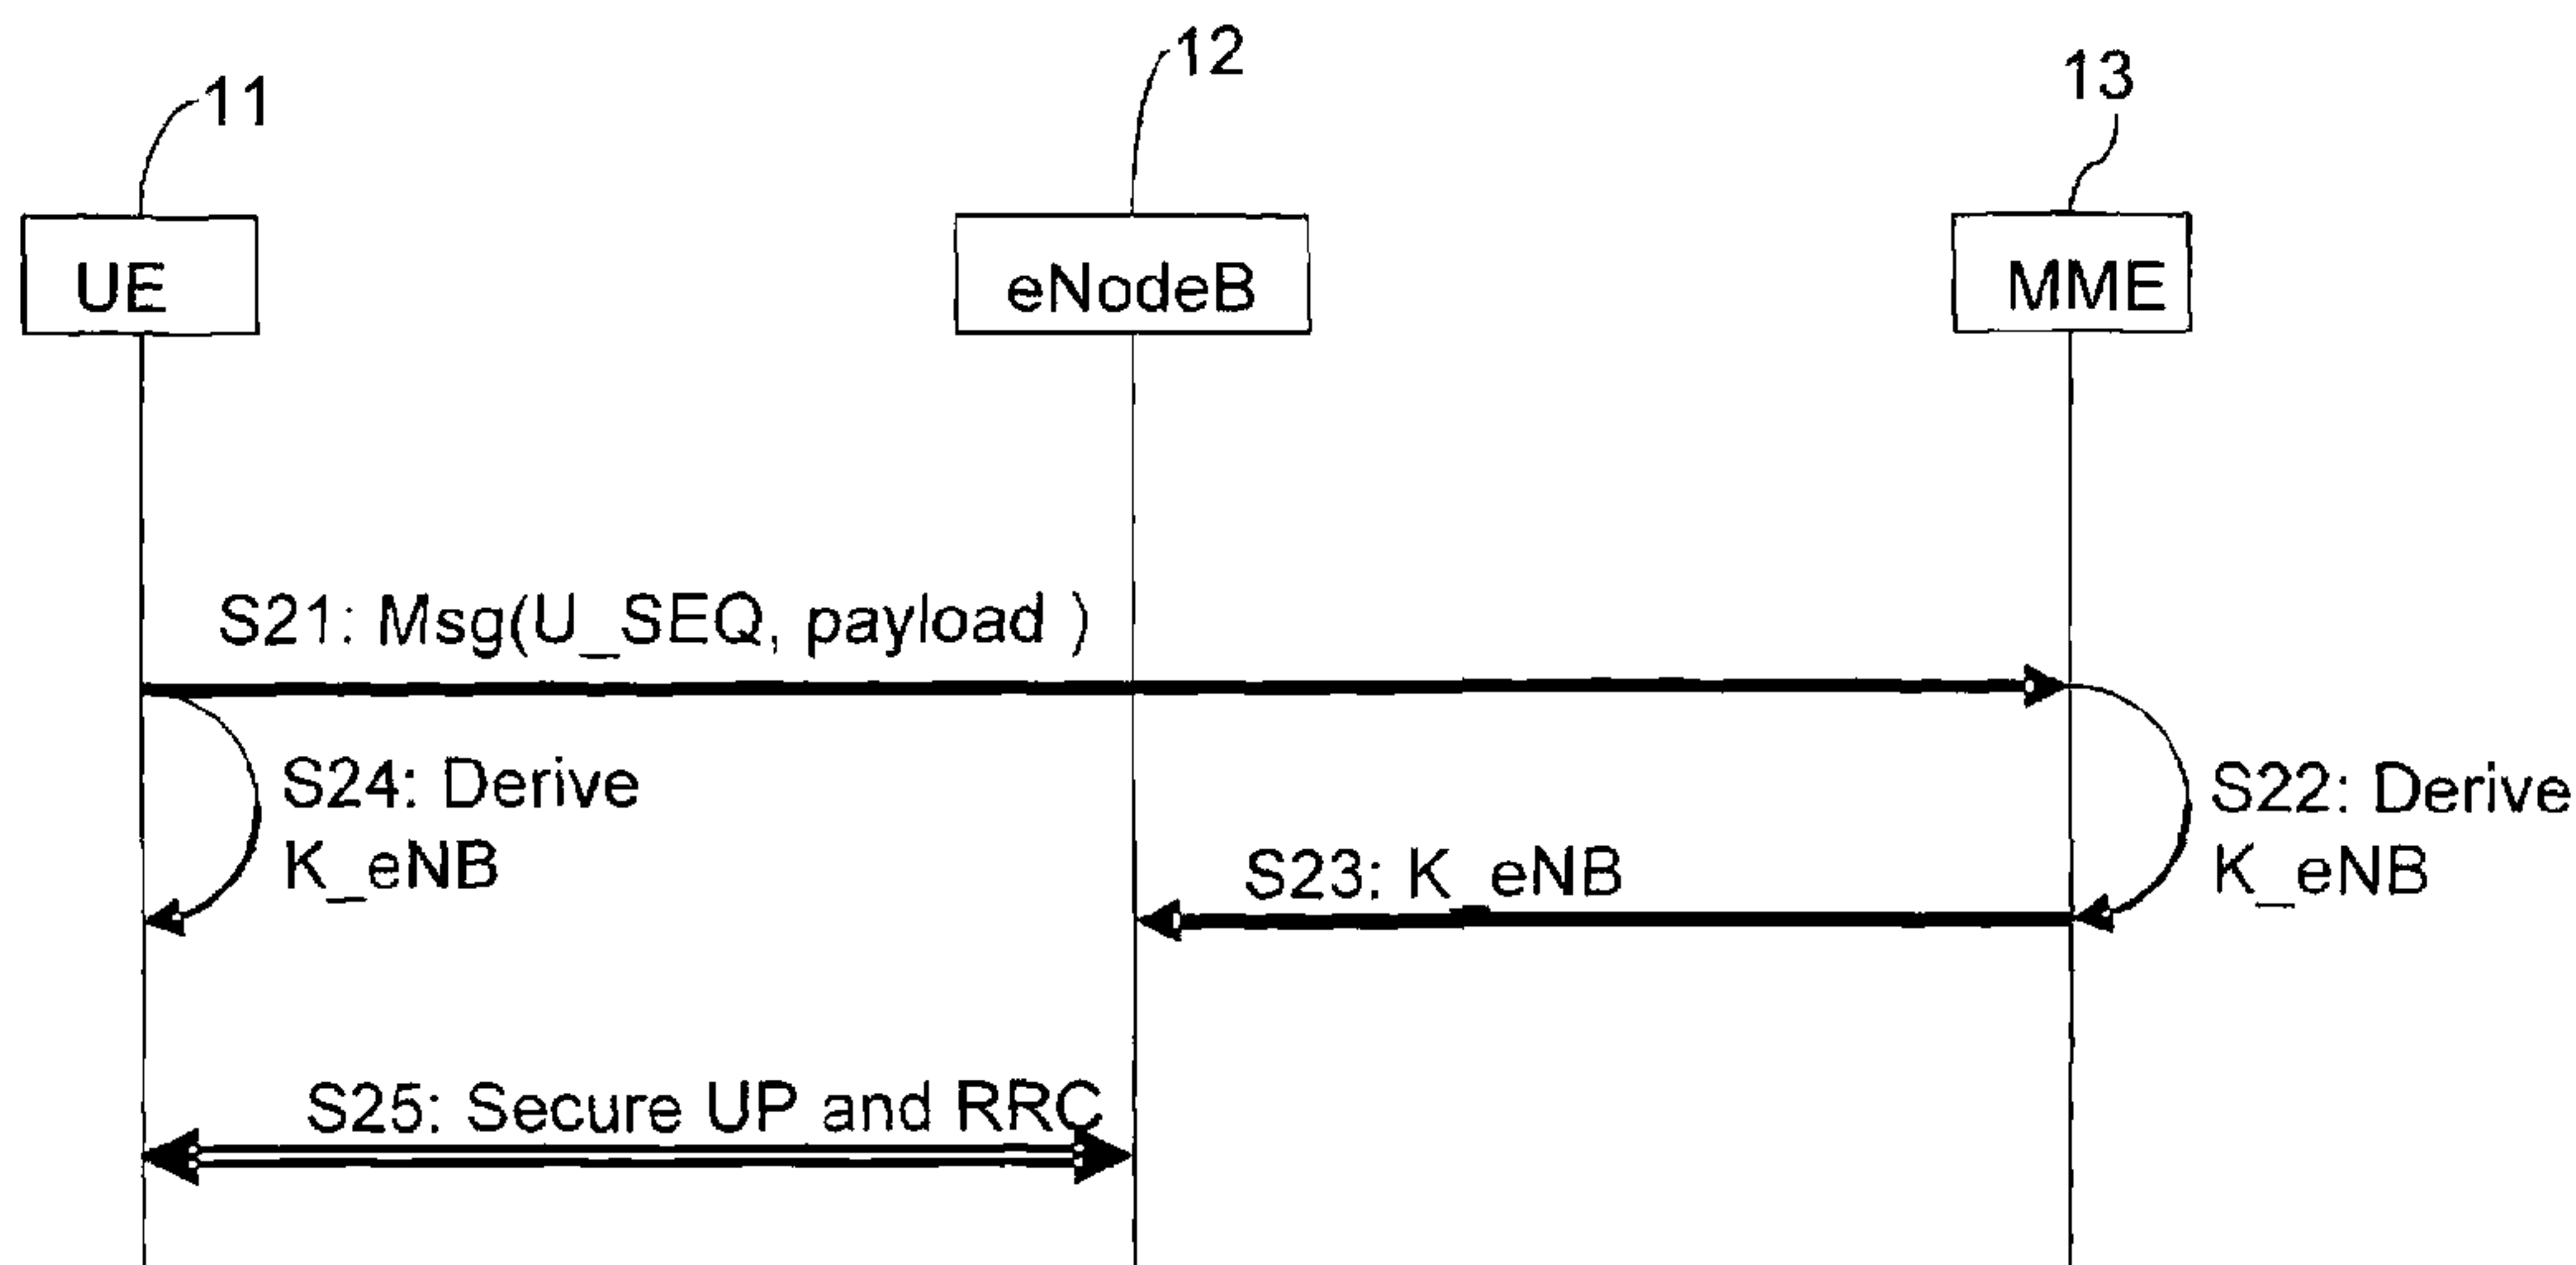

(57) **Abrégé/Abstract:**

A security key, K_{eNB} , for protecting RRC/UP traffic between a User Equipment, UE, (11) and a serving eNodeB (12) is established by a method and an arrangement in a Mobility Management Entity (13), MME, and in said UE (11), of an Evolved Packet System, EPS. The MME and the UE derives the security key, K_{eNB} , from at least an NAS uplink sequence number, NAS_U_SEQ, sent from the UE to the MME, and from an Access Security Management Entity-key, K_{ASME} , shared between the MME and the UE.



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
26 March 2009 (26.03.2009)

PCT

(10) International Publication Number
WO 2009/038522 A1

(51) International Patent Classification:

H04L 9/08 (2006.01) **H04L 9/32** (2006.01)
H04L 29/06 (2006.01)

(21) International Application Number:

PCT/SE2008/050591

(22) International Filing Date: 20 May 2008 (20.05.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

60/972,955 17 September 2007 (17.09.2007) US

(71) Applicant (for all designated States except US): **TELEFONAKTIEBOLAGET L M ERICSSON (PUBL)** [SE/SE]; S-164 83 Stockholm (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BLOM, Rolf** [SE/SE]; Svärdvägen 2, S-175 68 Järfälla (SE). **MILDH, Gunnar** [SE/SE]; Turebergs Allé 7, S-191 62 Sollentuna (SE). **NORRMAN, Karl** [SE/SE]; Stigbergsgatan 32A, S-116 28 Stockholm (SE).

(74) Agent: **HASSELGREN, Joakim**; Ericsson AB, Patent Unit LTE, S-164 80 Stockholm (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

[Continued on next page]

(54) Title: METHOD AND ARRANGEMENT IN A TELECOMMUNICATION SYSTEM

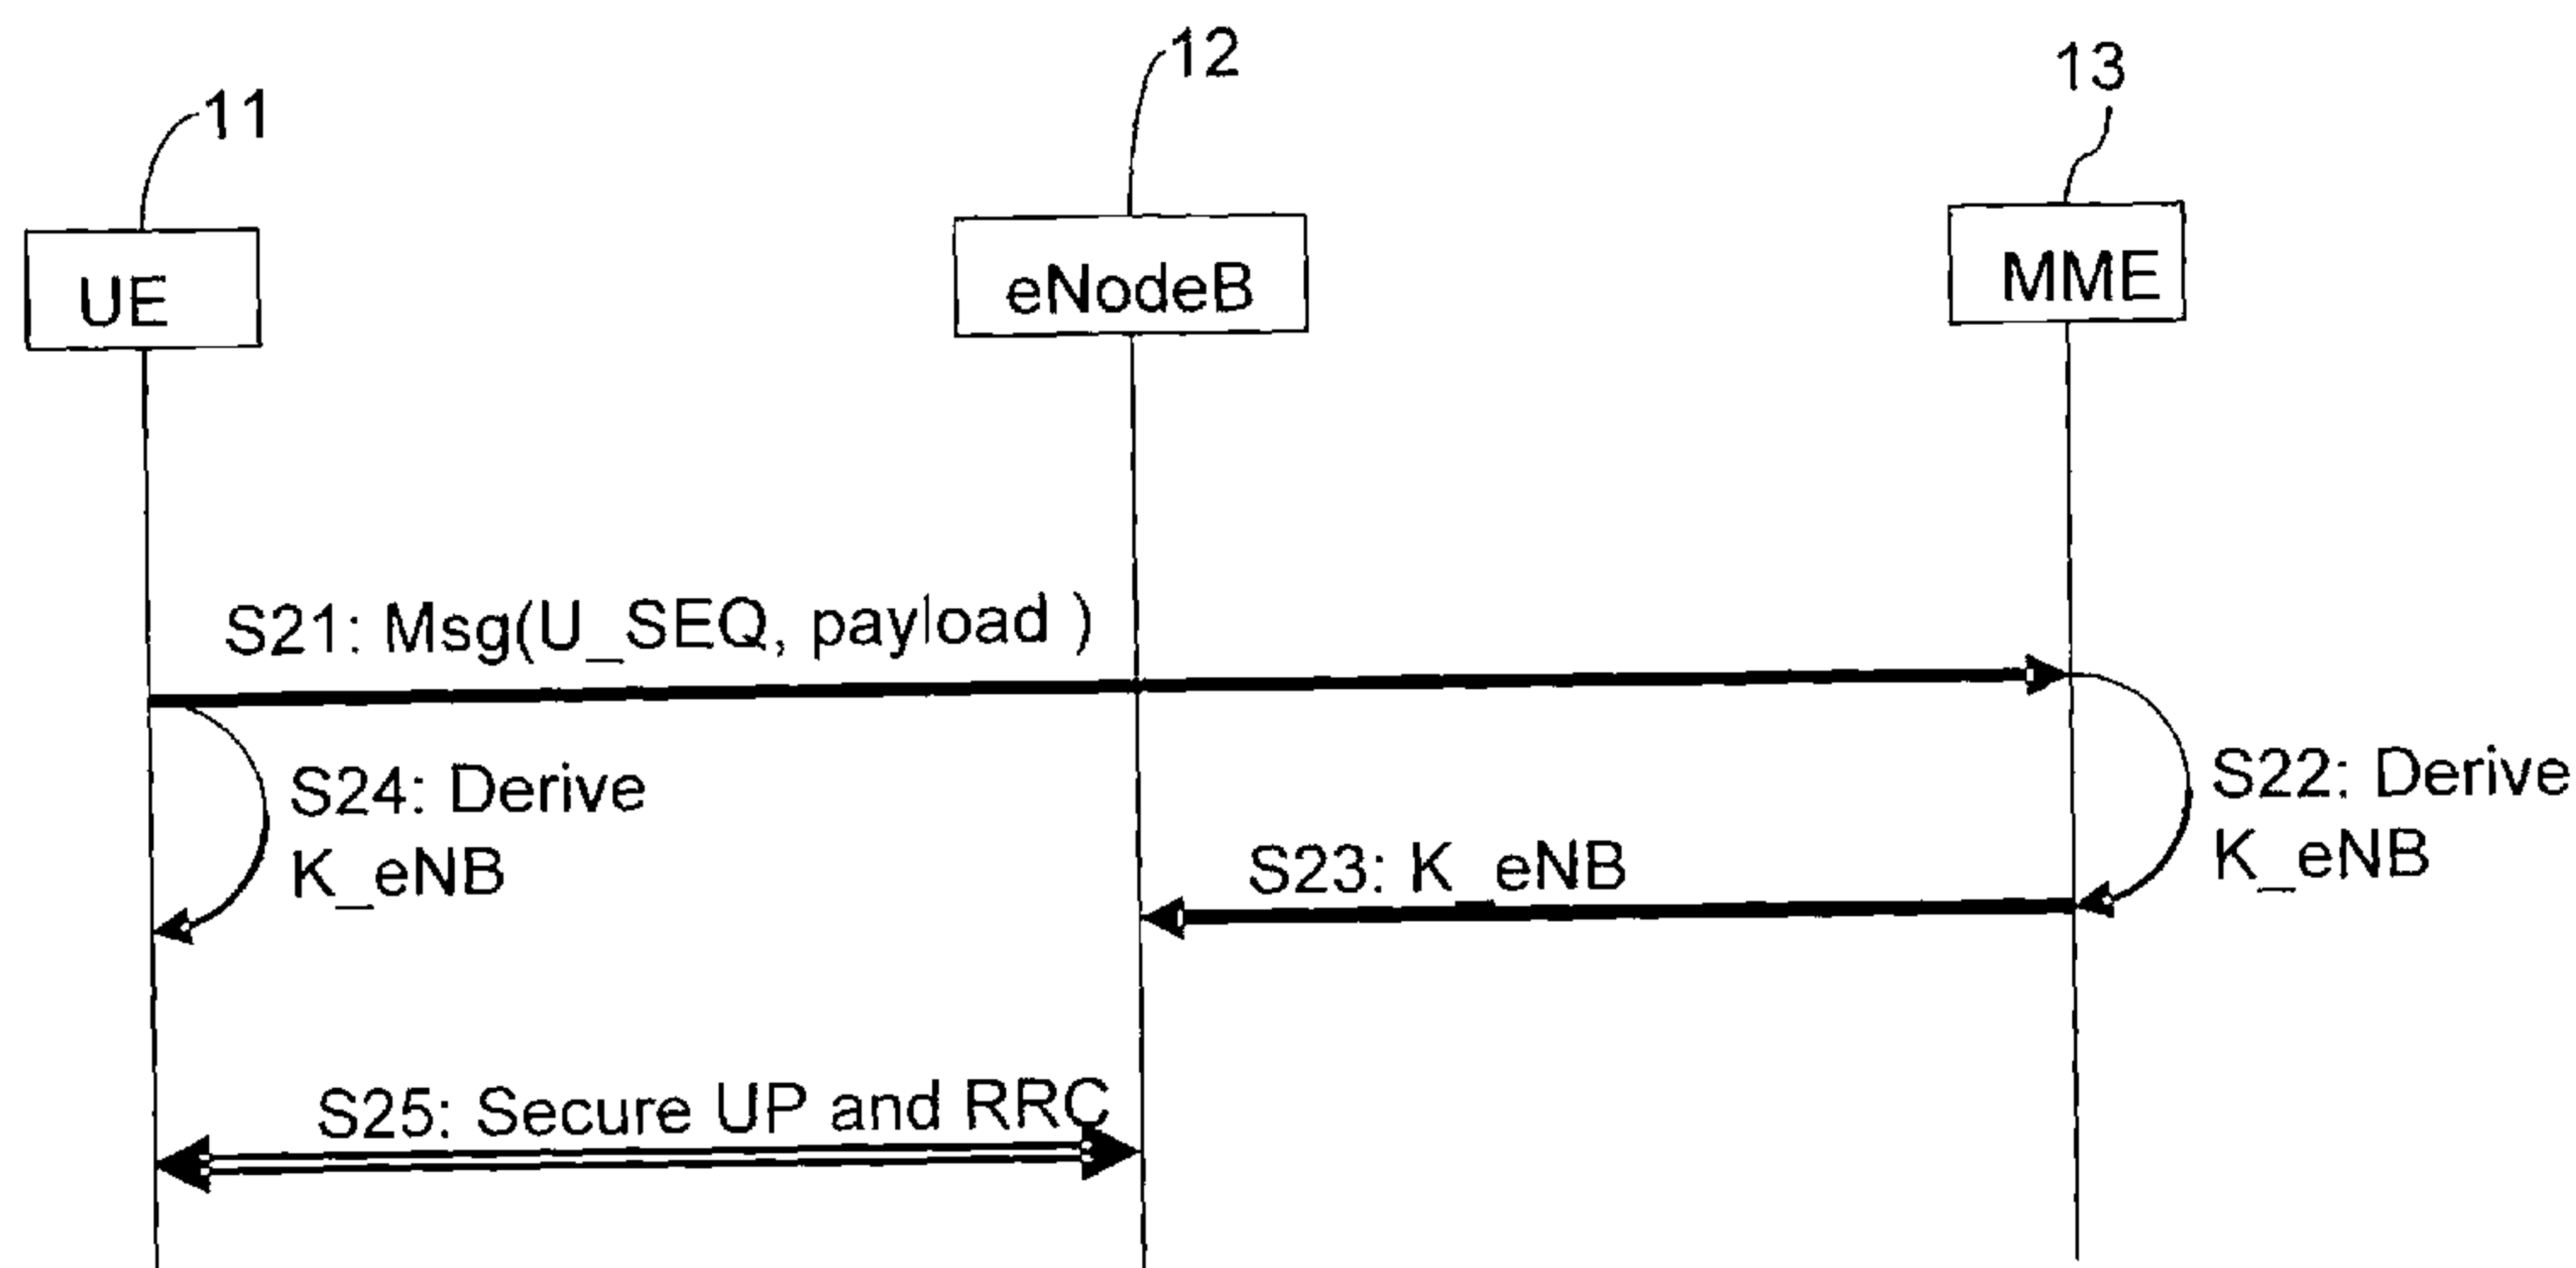


Fig. 2

(57) Abstract: A security key, K_{eNB} , for protecting RRC/UP traffic between a User Equipment, UE, (11) and a serving eNodeB (12) is established by a method and an arrangement in a Mobility Management Entity (13), MME, and in said UE (11), of an Evolved Packet System, EPS. The MME and the UE derives the security key, K_{eNB} , from at least an NAS uplink sequence number, NAS_U_SEQ, sent from the UE to the MME, and from an Access Security Management Entity-key, K_{ASME} , shared between the MME and the UE.

WO 2009/038522 A1

WO 2009/038522 A1



-
- | | |
|---|---|
| <p>— <i>as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))</i></p> <p>— <i>of inventorship (Rule 4.17(iv))</i></p> | <p>Published:</p> <p>— <i>with international search report</i></p> |
|---|---|

METHOD AND ARRANGEMENT FOR ESTABLISHING A SECURITY KEY
FOR PROTECTING RRC/UP TRAFFIC

TECHNICAL FIELD

5 The present invention relates to methods and arrangements in a telecommunication system, and in particular to a security solution in the EPS (Evolved Packet System), i.e. the E-UTRAN (the Evolved UMTS Terrestrial Radio Access Network) and the EPC (Evolved Packet Core network), for UE-triggered service requests. More specifically, the present invention relates a method and an arrangement in an MME
10 (Mobility Management Entity) and in a UE (User Equipment) for an EPS (Evolved Packet System) of establishing a security key for protecting RRC/UP traffic.

BACKGROUND

In the EPS-architecture, the subscriber authentication is performed between a UE and
15 an MME (Mobility Management Entity), and the MME manages e.g. the mobility, the UE-identities and the security parameters. The basis for defining the security procedure in the EPS is a security key, K_ASME, which is shared between the MME and the UE, and established at the authentication of the UE. A functional entity of the EPS-architecture called the ASME (Access Security Management Entity) may e.g. be
20 co-located with the MME, and the ASME receives and stores the security key K_ASME derived from the CK/IK-keys confined in the home network. From the security key, K_ASME, the ASME derives an NAS security context used to protect the NAS signalling, i.e. the Non Access Stratum signalling between the MME of the Evolved Packet Core (EPC) network and a UE. The NAS security context contains
25 parameters for the encryption and integrity protection of the NAS signalling, such as K_NAS_enc, K_NAS_int, as well as uplink and downlink sequence numbers, NAS_U_SEQ and NAS_D_SEQ, and the sequence numbers are used to prevent replay of old messages, as well as for input to the encryption and integrity protection procedures. The ASME provides the MME with the NAS security context, and one
30 NAS security context is kept in the MME, and a corresponding NAS

security context is kept in the UE, and the replay protection, integrity protection and encryption are based on that the sequence numbers of the NAS security contexts of the MME and UE are not reused.

- 5 Preferably, the security context for the protection of the UP/RRC traffic between a UE and the serving eNodeB (i.e. a radio base station in an EPS-architecture) is also based on said security key, K_{ASME} . The procedure to establish the UP/RRC security context involves deriving a key called K_{eNB} , from which the
- 10 encryption key $K_{eNB_UP_enc}$ is derived for protecting the UP (User Plane), i.e. the end user data transferred over EPC and E-UTRAN, as well as the encryption key, $K_{eNB_RRC_enc}$, and the integrity protection key, $K_{eNB_RRC_int}$, for protecting the RRC (Radio Resource Control).
- 15 Figure 1 illustrates a conventional exemplary signalling flow for a UE-initiated IDLE to ACTIVE state transition in an EPS-architecture. An IDLE UE is only known to the EPC (Evolved Packet Core) of the EPS, and no UP/RRC security context exists between the eNodeB and the UE. An UE in the ACTIVE state is known both in
- 20 the EPC and in the EUTRAN, and a UP/RRC security context has been established for protection of the UP/RRC-traffic between the UE and its serving eNodeB.

Figure 1 illustrates a UE 11, an eNodeB 12, an MME 13, a serving GW (Gateway) 14, a PDN Gateway 15, and the HSS (Home Subscriber

25 Server) 16. The Serving Gateway 14 is the node of the EPC that terminates the interface towards EUTRAN, and the PDN Gateway is the node of the EPC that terminates the interface towards a PDN (Packet Data Network). If a UE accesses multiple PDNs, there may be multiple PDN Gateways for that UE. In signal S1 and signal S2,

30 the NAS Service Request is transparently forwarded from the UE to the MME, and the NAS Service Request is integrity protected based on NAS_U_SEQ . In the optional signal S3, the UE is authenticated by the MME and the K_{ASME} is established, using subscriber data stored in the HSS (Home Subscriber Server), and the MME sends the

Initial Context Setup Request to the eNodeB, in S4. In the signals S5 and S6, the eNodeB establishes the radio bearer with the UE and forwards uplink data, and returns an Initial Context Setup Complete-message to the MME in signal S7. In signal S8, the MME
5 sends an update bearer request to the Serving GW, and the serving GW responds in signal S9.

In prior solutions, the derivation of the K_{eNB} by the UE and MME for the RRC/UP security context is based e.g. on a NAS SERVICE ACCEPT message or other explicit information sent from the MME to
10 the UE. However, as illustrated in the exemplary conventional EPS signalling flow in figure 1, the MME will normally not send any NAS SERVICE ACCEPT upon receiving a NAS SERVICE REQUEST from a UE in an EPS. Therefore, it will not be possible to derive the K_{eNB} from the information in a NAS SERVICE ACCEPT message.

15 According to an exemplary known solution, the K_{eNB} is derived by the MME from the K_{ASME} and the NAS_D_SEQ used by the MME in the NAS SERVICE ACCEPT message, and the UE derives the same K_{eNB} by retrieving the sequence number, NAS_D_SEQ , from the NAS SERVICE ACCEPT message and performing the same K_{eNB} derivation as the
20 MME. The MME transfers the K_{eNB} to the eNodeB when it sets up the S1-connection to the eNodeB. However, a drawback with this known solution is that if no explicit NAS SERVICE ACCEPT message is defined from the MME to the UE, as in the exemplary conventional EPS signalling flow in figure 1, it is not possible for the UE to
25 derive the same K_{eNB} as the MME. Even though it is technically possible for the UE to estimate a current NAS downlink sequence number, NAS_D_SEQ , this estimation could be erroneous, since the MME may have sent NAS messages that were lost and never received by the UE. In such a case, the MME would have updated its
30 NAS_D_SEQ , without the UE being aware of the updating, leading to an erroneous NAS_D_SEQ in the UE.

According to another exemplary known solution, the derivation of the K_{eNB} is based on a separate sequence number maintained specifically for the derivation of the K_{eNB} , and this sequence

number is explicitly synchronized during the NAS Service Request procedure either by the UE sending it to the MME, or by the MME sending it to the UE. However, a drawback with this solution is the extra complexity of the separate sequence number, since it has to be maintained both in the UE and in the MME in order to prevent replay attacks.

SUMMARY

The object of the present invention is to address the problem outlined above, and this object and others are achieved by the method and arrangement according to the independent claims, and by the embodiments according to the dependent claims

The basic idea of the present invention is that the K_{eNB} is derived from the K_{ASME} and from the NAS_U_SEQ of the NAS SERVICE REQUEST message from the UE to the MME, thereby triggering the establishment of a UP/RRC security context in the eNodeB.

It is an advantage of the present invention that no explicit downlink NAS SERVICE ACCEPT message or sequence number from the MME to the UE is required, and that the replay protection functionality of the NAS security context is re-used in the RRC and UP security contexts.

According to one aspect, the invention provides a method in a Mobility Management Entity, MME, of an Evolved Packet System, EPS, of establishing a security key, K_{eNB} , for protecting RRC/UP traffic between a User Equipment, UE, and an eNodeB serving the UE. The method comprises the steps of receiving an NAS Service Request from the UE, the request indicating a NAS uplink sequence number, NAS_U_SEQ ; Deriving the security key, K_{eNB} , from at least said received NAS_U_SEQ and from a stored Access Security Management Entity-key, K_{ASME} , shared with said UE; and forwarding said derived K_{eNB} to the eNodeB serving said UE.

According to a second aspect, the invention provides a Mobility Management Entity, MME, for an Evolved Packet System, EPS. The MME is arranged to establish a security key, K_{eNB}, for protection of RRC/UP-traffic between a UE and an eNodeB serving the UE. The MME comprises means for receiving an NAS Service Request from the UE, the request indicating a NAS uplink sequence number, NAS_U_SEQ; Means for deriving a K_{eNB} from at least said received NAS_U_SEQ and from a stored Access Security Management Entity-key, K_{ASME}, shared with said UE, as well as means for sending said derived K_{eNB} to the eNodeB serving said UE.

The first and the second aspect further provides methods, as well as corresponding means, according to which the MME may derive the K_{eNB} from the NAS_U_SEQ and the K_{ASME} using a Pseudo-Random Function, PRF. The MME may further reconstruct the full NAS uplink sequence number NAS_U_SEQ from received low order bits and integrity check the NAS Service Request received from the UE. Additionally, the MME may return an indication of the received NAS_U_SEQ to the UE, and the NAS_U_SEQ may be included in the set-up message forwarding the K_{eNB} to the eNodeB. Thereby, the UE does not have to remember the NAS_U_SEQ sent to the MME.

According to a third aspect, the invention provides a method in a User Equipment, UE, of an Evolved Packet System, EPS, of establishing a security key, K_{eNB}, for protecting RRC/UP traffic exchanged with a serving eNodeB. The method comprises the steps of sending an NAS Service Request to a Mobility Management Entity, MME, the request indicating a NAS uplink sequence number, NAS_U_SEQ; and deriving the K_{eNB} from at least said NAS_U_SEQ and from a stored Access Security Management Entity-key, K_{ASME}, shared with said MME.

According to a fourth aspect, the invention provides a User Equipment, UE, adapted for an Evolved Packet System, EPS. The UE

is arranged to establish a security key, K_{eNB} , for protecting RRC/UP-traffic exchanged with a serving eNodeB. The UE comprises means for sending a NAS Service Request to an MME, the request indicating a NAS uplink sequence number, NAS_U_SEQ , as well as
5 means for deriving a K_{eNB} from at least said NAS_U_SEQ , and from a stored Access Security Management Entity-key, K_{ASME} , shared with said MME.

The third and the fourth aspect further provides methods, as
10 well as corresponding means, according to which the UE may derive the K_{eNB} from the NAS_U_SEQ and the K_{ASME} using a Pseudo-Random Function, PRF, and integrity protect the NAS Service Request sent to the MME. Additionally, the UE may store the NAS_U_SEQ of the NAS Service Request sent to the MME, or,
15 alternatively, receive an indication of the NAS_U_SEQ of the NAS Service Request sent to the MME, back from the MME via the eNodeB. This alternative embodiment has the advantage that the UE does not have to remember the NAS_U_SEQ sent to the MME. The UE may further derive the K_{eNB} from the NAS_U_SEQ and the
20 K_{ASME} after the reception of a security configuration message from the eNodeB.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will now be described in more detail, and
25 with reference to the accompanying drawings, in which:

- Figure 1 is signalling diagram illustrating a conventional UE triggered Service Request in an EPS;
- Figure 2 is a signalling diagram illustrating the first embodiment of this invention, according to which the UE
30 remembers the NAS_U_SEQ sent to the MME in an NAS SERVICE REQUEST-message;
- Figure 3 is a flow diagram illustrating the derivation of the K_{eNB} by the UE and the MME;
- Figure 4 is a signalling diagram illustrating a second
35 embodiment of this invention, in which the MME returns the received NAS_U_SEQ to the UE;

- Figure 5 is a flow diagram illustrating the second embodiment depicted in the figure 4; and
- Figure 6a illustrates schematically an MME (Mobility Management Entity), and the figure 6b illustrates schematically a UE, both provided with means for deriving the security key K_{eNB} .

DETAILED DESCRIPTION

In the following description, specific details are set forth, such as a particular architecture and sequences of steps in order to provide a thorough understanding of the present invention. However, it is apparent to a person skilled in the art that the present invention may be practised in other embodiments that may depart from these specific details.

Moreover, it is apparent that the described functions may be implemented using software functioning in conjunction with a programmed microprocessor or a general purpose computer, and/or using an application-specific integrated circuit. Where the invention is described in the form of a method, the invention may also be embodied in a computer program product, as well as in a system comprising a computer processor and a memory, wherein the memory is encoded with one or more programs that may perform the described functions.

The concept or the invention is that the security key, K_{eNB} , is derived from the Access Security Management Entity-key, K_{ASME} , and from the uplink sequence counter, NAS_U_SEQ , of the NAS SERVICE REQUEST message sent from the UE to the MME, thereby triggering the establishment of the UP/RRC security context in the eNodeB.

When the UE is in IDLE mode, a NAS security context exists and comprises e.g. the above described K_{NAS_enc} , K_{NAS_int} , NAS_U_SEQ and NAS_D_SEQ , and the NAS messages are integrity- and possibly confidentiality protected. The NAS security context thus also

contains the security capabilities of the UE, in particular the encryption and integrity algorithms.

The protection of the NAS messages is based on the NAS security keys, K_{NAS_enc} , K_{NAS_int} , and the uplink and downlink sequence counters, NAS_U_SEQ or NAS_D_SEQ , for the direction of the message. The full sequence counter is normally not transmitted with the NAS message, only some of the low order bits, and the full sequence number will be reconstructed at the receiving end from a local estimate of the high order bits and the received low order bits.

The concept of the invention may be explained in the context of the signalling diagram for UE-triggered service requests, as depicted in the above-described figure 1:

In S1 and S2 of the conventional signalling diagram in figure 1, a NAS SERVICE REQUEST, comprising an uplink sequence counter, NAS_U_SEQ , is forwarded from the UE to the MME, and the NAS SERVICE REQUEST-message is integrity protected based on said NAS_U_SEQ . The MME checks the integrity of the message and accepts it if it is not a replay, and this guarantees that the NAS_U_SEQ is fresh and has not been used before.

Thereafter, according to this invention, the MME derives the K_{eNB} based at least on the received uplink sequence counter NAS_U_SEQ and on the K_{ASME} , using a conventional key derivation function, and this is not included in the conventional signalling diagram illustrated in figure 1. Consequently, the sequence counter may only be reset at the authentication. The MME will send the derived K_{eNB} down to the eNodeB in, or piggybacked to, the message of the signal S4, the Initial Context Setup Request (S1-AP).

In signal S5, the eNodeB sends a Radio Bearer Establishment and a security configuration message (Security Mode Command) to the UE. These messages may be sent as two separate messages or combined in one message, as in figure 1, and the reception of these messages by the UE will implicitly be a confirmation of the UE's NAS SERVICE

REQUEST, in signal S1. The Security Mode Command will determine e.g. when the protection should start and which algorithm to use.

According to this invention, the UE derives the K_{eNB} based at least on the NAS_U_SEQ and the K_{ASME} , using a conventional key derivation function, upon reception of the message in signal S5, if not performed before. Thereafter, the eNodeB and the UE will establish the UP/RRC security contexts, and this is not illustrated in the conventional signalling diagram in figure 1.

According to a first embodiment of this invention, the UE stores the uplink sequence counter, NAS_U_SEQ , included in the initial NAS SERVICE REQUEST in signal S1, and uses the stored NAS_U_SEQ for the derivation of the K_{eNB} .

However, according to a second embodiment, the MME includes the uplink sequence counter, NAS_U_SEQ , or only low order bits indicating the NAS_U_SEQ , in the S1-AP set-up message, in signal S4, sent to the eNodeB, in which case this information is also forwarded to the UE from the eNodeB during the RRC/UP context establishment. In this case, the UE will be able to retrieve the indication of the NAS_U_SEQ from the eNodeB for the derivation of the K_{eNB} , and does not have to keep the NAS_U_SEQ of the NAS SERVICE REQUEST-message sent to the MME in the signals S1 and S2.

Figure 2 illustrates the first embodiment of this invention, in which the UE keeps the NAS_U_SEQ of the initial NAS SERVICE REQUEST-message, in the signal S21, for the derivation of K_{eNB} in the signal S24. The MME will receive the NAS_U_SEQ from the UE in the signal S21, or only low order bits indicating the NAS_U_SEQ , and derive the K_{eNB} based on the NAS_U_SEQ and the K_{ASME} in S22. The MME forwards the derived K_{eNB} to the eNodeB in the signal S23.

Thereafter, not illustrated in figure 2, the eNodeB and the UE will establish the UP/RRC security context using the K_{eNB} , the UP/RRC security contexts comprising the encryption key, $K_{eNB_UP_enc}$ for protecting the UP-traffic, as well as the

encryption key and the integrity protection key, $K_{eNB_RRC_enc}$ and $K_{eNB_RRC_int}$, respectively, for protecting the RRC-traffic, thereby enabling a secure UP/RRC traffic, in signal S25.

The derivation of the K_{eNB} is performed by a conventional key
5 derivation function, e.g. by a Pseudo-Random Function; $K_{eNB} = PRF(K_{ASME}, NAS_U_SEQ, \dots)$.

Further, as illustrated by the dots in the above-described PRF-function, the K_{eNB} -deriving function may have additional conventional input values, such as e.g. the eNodeB-identity.

10 Figure 3 is a flow diagram illustrating the method according to this invention, and in step 31, the UE 11 sends the initial NAS SERVICE REQUEST-message to the MME 13, the message indicating the NAS uplink sequence counter, NAS_U_SEQ , normally only by sending the low order bits of the counter. In step 32, the MME receives
15 the NAS SERVICE REQUEST-message from the UE, obtaining the NAS_U_SEQ , and reconstructing the full sequence from the received low order bits. In step 33, the MME derives the security key, K_{eNB} , from at least the received NAS_U_SEQ and the K_{ASME} from the ASME (Access Security Mobility Entity), using a suitable key
20 derivation function, e.g. a Pseudo-Random Function.

Thereafter, the MME forwards the derived K_{eNB} to the eNodeB 12, in step 34, to be used by the eNodeB to establish the complete UP/RRC security context shared with the UE. In step 35, said UE
25 will derive the same K_{eNB} from at least the stored K_{ASME} and from the NAS_U_SEQ of the initial NAS SERVICE REQUEST-message transmitted from the UE to the MME in step 31, and establish the UP/RRC security context from the derived K_{eNB} .

In the first embodiment of this invention, the UE stores the NAS_U_SEQ transmitted to the MME in the initial NAS NAS SERVICE
30 REQUEST-message, and uses the stored sequence number to derive the K_{eNB} .

Figure 4 is a signalling diagram illustrating a second embodiment of this invention, in which the UE does not have to store the NAS_U_SEQ. Instead, the MME will return an indication of the received NAS_U_SEQ back to the UE, via the eNodeB. In signal S41, corresponding to the signal S21 in figure 2, the UE 11 transmits an initial NAS SERVICE REQUEST to the MME 13, indicating an uplink sequence number, NAS_U_SEQ, and MME will receive the NAS_U_SEQ and derive the K_eNB based on at least the NAS_U_SEQ and the K_ASME, in S42. However, according to this second embodiment, the MME will include an indication of said received NAS_U_SEQ in signal S43 transmitted to the eNodeB 12 together with the derived K_eNB, and the eNodeB will forward the NAS_U_SEQ to the UE, in signal S44. Thereafter, the UE will derive the K_eNB from at least the K_ASME and from the NAS_U_SEQ returned by the MME, in signal S45. From the derived security key, K_eNB, the eNodeB and the UE will establish the UP/RRC security context, thereby enabling secure UP/RRC traffic, in signal S46.

Figure 5 is a flow diagram illustrating the above-described method according to a second embodiment of this invention, in which an indication of the NAS_U_SEQ is returned to the UE by the MME. In step 41, the UE 11 sends the initial NAS SERVICE REQUEST-message to the MME 13, the message indicating the NAS uplink sequence counter, NAS_U_SEQ, normally the low order bits. In step 52, the MME receives the NAS SERVICE REQUEST-message from the UE, thereby obtaining the NAS_U_SEQ, and, if necessary, reconstructing the full NAS_U_SEQ from the received low order bits. In step 53, the MME derives the security key, K_eNB, from at least the received NAS_U_SEQ and the K_ASME, using a suitable key derivation function.

Thereafter, the MME includes an indication of the NAS uplink sequence counter, NAS_U_SEQ, in the message forwarding the derived K_eNB to the eNodeB 12, in step 54, and the eNodeB uses the received security key, K_eNB, for establishing a UP/RRC security context. The received NAS_U_SEQ is forwarded to the UE 11 by the

eNodeB, in step 55, and in step 56, the UE derives the security key, K_{eNB} , from at least the K_{ASME} and from said received NAS_U_SEQ , in order to establish the UP/RRC security context shared with the eNodeB.

5 The derivation of the K_{eNB} by the MME, in the step 53, and by the UE, in the step 56, is performed by a suitable conventional key derivation function, e.g. a Pseudo-Random Function; $K_{eNB} = PRF(K_{ASME}, NAS_U_SEQ, \dots)$. Normally, the key derivation function will have additional conventional input values, e.g. the
10 eNodeB-identity.

Figure 6a illustrates an MME 13 (Mobility Management Entity) for an EPS, according to this invention, further arranged to establish a security key, K_{eNB} , for a security context for the protection of UP/RRC traffic between a UE and a serving eNodeB. The MME is
15 provided with conventional communication means, not illustrated in the figure, for communicating with the nodes in the EPS, e.g. with the eNodeBs via an S1-MME interface. Further, in the MME of figure 1, an ASME (Access Security Management Entity) 61 is illustrated by hatched lines, since this functional entity of an EPS may be
20 co-located with the MME.

The means of the MME 13 illustrated in figure 6a for establishing the security key, K_{eNB} , comprises reception means 62 for receiving an NAS SERVICE REQUEST-message including an NAS_U_SEQ from a UE (via its serving eNodeB; key derivation means 63 for
25 deriving a security key, K_{eNB} based on at least the received NAS_U_SEQ and a stored K_{ASME} , using a conventional key derivation function; and sending means 64 for sending the derived K_{eNB} to the eNodeB serving the UE.

Figure 6b illustrates a UE 11 (User Entity) according to this
30 invention, the UE adapted for an EPS, and further arranged to establish a security key, K_{eNB} , for a security context for the protection of UP/RRC traffic exchanged with its serving eNodeB. The UE is provided with conventional communication means, not

illustrated in the figure, for communicating with the nodes in the EPS via an LTE-Uu interface to its serving eNodeB.

The means of the UE 11 illustrated in the figure 6b for establishing the security key, K_{eNB} , comprises sending means 66
5 for sending an NAS SERVICE REQUEST-message to the MME, via the serving eNodeB, the request indicating an uplink sequence number, NAS_U-SEQ, and the means for establishing a security key, K_{eNB} , comprises key derivation means 67 for deriving a security key, K_{eNB} based on at least the NAS_U-SEQ and a stored K_{ASME} , using a
10 conventional key derivation function.

The above-described means of the MME and the UE, as illustrated in the figures 6a and 6b, implement the described functions using a suitable combination of software and hardware, e.g. a programmed microprocessor or an application-specific integrated circuit, as
15 well as conventional radio transmitters and receivers.

While the invention has been described with reference to specific exemplary embodiments, the description is in general only intended to illustrate the inventive concept and should not be taken as limiting the scope of the invention.

CLAIMS

1. A method in a Mobility Management Entity (MME) of an Evolved Packet System (EPS) of establishing a security key (K_{eNB}) for protecting Radio Resource Control/User Plane (RRC/UP) traffic between a User Equipment (UE) and an eNodeB serving the UE, the method comprising:
 - receiving a Non-Access Stratum (NAS) Service Request from the UE, the request indicating a NAS uplink sequence number (NAS_U_SEQ);
 - deriving the security key (K_{eNB}) from at least said received NAS_U_SEQ and from a stored Access Security Management Entity-key (K_{ASME}) shared with said UE; and
 - forwarding said derived K_{eNB} to the eNodeB serving said UE.
2. A method in an MME according to claim 1, wherein the K_{eNB} is derived from the NAS_U_SEQ and the K_{ASME} using a Pseudo-Random Function (PRF).
3. A method in an MME according to claim 1 or 2, comprising the further step of reconstructing the full NAS_U_SEQ from received low order bits.
4. A method in an MME according to any of claims 1-3, comprising the further step of integrity checking the NAS Service Request received from the UE.
5. A method in an MME according to any of claims 1-4, comprising the further step of returning an indication of the received NAS_U_SEQ to the UE.
6. A method in an MME according to claim 5, wherein the NAS_U_SEQ is included in the set-up message forwarding the K_{eNB} to the eNodeB.
7. A method in a User Equipment (UE) of an Evolved Packet System (EPS) of establishing a security key (K_{eNB}) for protecting Radio Resource Control/User Plane (RRC/UP) traffic exchanged with a serving eNodeB, the method comprising:
 - sending a Non-Access Stratum (NAS) Service Request to a Mobility Management Entity (MME), the request indicating a NAS uplink sequence number (NAS_U_SEQ); and
 - deriving the K_{eNB} from at least said NAS_U-SEQ and from a stored Access Security Management Entity-key (K_{ASME}) shared with said MME.

8. A method in a UE according to claim 7, wherein the K_{eNB} is derived from the NAS_U_SEQ and the K_{ASME} using a Pseudo-Random Function (PRF).
9. A method in a UE according to any of the claims 7 - 8, comprising the further step of integrity protecting the NAS Service Request sent to the MME.
10. A method in a UE according to any of the claims 7 - 9, comprising the step of storing the NAS_U_SEQ of the NAS Service Request sent to the MME.
11. A method in a UE according to any of the claims 7 - 9, comprising the step of receiving an indication of the NAS_U_SEQ of the NAS Service Request sent to the MME, back from the MME via the eNodeB.
12. A method in a UE according to any of the claims 10 or 11, wherein the K_{eNB} is derived from the NAS_U_SEQ and the K_{ASME} after the reception of a security configuration message from the eNodeB.
13. A Mobility Management Entity (MME) adapted for an Evolved Packet System (EPS), the MME arranged to establish a security key (K_{eNB}) for protection of Radio Resource Control/User Plane (RRC/UP) traffic between a User Equipment (UE) and an eNodeB serving the UE, the MME comprising:
 - a receiver for receiving an NAS Service Request from the UE, the request indicating a NAS uplink sequence number (NAS_U_SEQ);
 - a processing device for deriving a K_{eNB} from at least said received NAS_U_SEQ and from a stored Access Security Management Entity-key (K_{ASME}) shared with said UE; and
 - a transmitter for sending said derived K_{eNB} to the eNodeB serving said UE.
14. An MME according to claim 13, arranged to derive the K_{eNB} from the NAS_U_SEQ and the K_{ASME} using a Pseudo-Random Function (PRF).
15. An MME according to claim 13 or 14, arranged to reconstruct the full NAS uplink sequence number NAS_U_SEQ from received low order bits.
16. An MME according to any of claims 13 - 15, arranged to integrity check the NAS Service Request received from the UE.

17. An MME according to any of the claims 13 - 16, arranged to forward an indication of the NAS_U_SEQ to the eNodeB, to be returned to the UE from the eNodeB.
18. A user equipment (UE) adapted for an Evolved Packet System (EPS), the UE arranged to establish a security key (K_eNB) for protecting Radio Resource Control/User Plane (RRC/UP) traffic exchanged with a serving eNodeB, the UE comprising:
- a transmitter for sending a NAS Service Request to a Mobility Management Entity (MME), the request indicating a NAS uplink sequence number (NAS_U_SEQ); and
 - a processing device for deriving a K_eNB from at least said NAS_U_SEQ and from a stored Access Security Management Entity-key (K_ASME) shared with said MME.
19. A UE according to claim 18, arranged to derive the K_eNB from the NAS_U_SEQ and the K_ASME by using a Pseudo-Random Function (PRF).
20. A UE according to any of the claims 18 - 19, arranged to integrity protect the NAS Service Request sent to the MME.
21. A UE according to any of the claims 18 - 20, arranged to store the NAS_U_SEQ of the NAS Service Request sent to the MME.
22. A UE according to any of the claims 18 - 20, arranged to receive an indication of the NAS_U_SEQ of the NAS Service Request sent to the MME, back from the MME via the eNodeB.
23. A UE according to any of the claims 21 or 22, arranged to derive the K_eNB after the reception of a security configuration message from the eNodeB.
24. A method in a User Equipment (UE) of an Evolved Packet System (EPS) of establishing a security key (K_eNB) for protecting Radio Resource Control/User Plane (RRC/UP) traffic exchanged with a serving eNodeB, the method comprising:
- sending a Non-Access Stratum (NAS) Service Request to a Mobility Management Entity (MME), the request indicating a NAS uplink sequence number (NAS_U_SEQ);
 - receiving an indication of the NAS_U_SEQ of the NAS Service Request sent to the MME, back from the MME via the eNodeB; and

deriving the K_{eNB} from at least the received indication of the NAS_U_SEQ and from a stored Access Security Management Entity-key (K_{ASME}) shared with said MME.

25. The method in a UE according to claim 24, wherein the K_{eNB} is derived from the NAS_U_SEQ and the K_{ASME} using a Pseudo-Random Function (PRF).

26. The method in a UE according to claim 24, further comprising integrity protecting the NAS Service Request sent to the MME.

27. The method in a UE according to claim 24, wherein the K_{eNB} is derived from the NAS_U_SEQ and the K_{ASME} after the reception of a security configuration message from the eNodeB.

28. A user equipment (UE) adapted for an Evolved Packet System (EPS), the UE arranged to establish a security key (K_{eNB}) for protecting Radio Resource Control/User Plane (RRC/UP) traffic exchanged with a serving eNodeB, the UE comprising:

- a transmitter configured to send a Non-Access Stratum (NAS) Service Request to a Mobility Management Entity (MME), the request indicating a NAS uplink sequence number (NAS_U_SEQ);

- a receiver configured to receive an indication of the NAS_U_SEQ of the NAS Service Request sent to the MME, back from the MME, via the eNodeB; and

- a processor configured to derive a K_{eNB} from at least the received indication of the NAS_U_SEQ , and from a stored Access Security Management Entity-key (K_{ASME}) shared with said MME.

29. The UE according to claim 28, arranged to derive the K_{eNB} from the NAS_U_SEQ and the K_{ASME} by using a Pseudo-Random Function (PRF).

30. The UE according to claim 28, arranged to integrity protect the NAS Service Request sent to the MME.

31. The UE according to claim 28, arranged to derive the K_{eNB} after the reception of a security configuration message from the eNodeB.

1/6

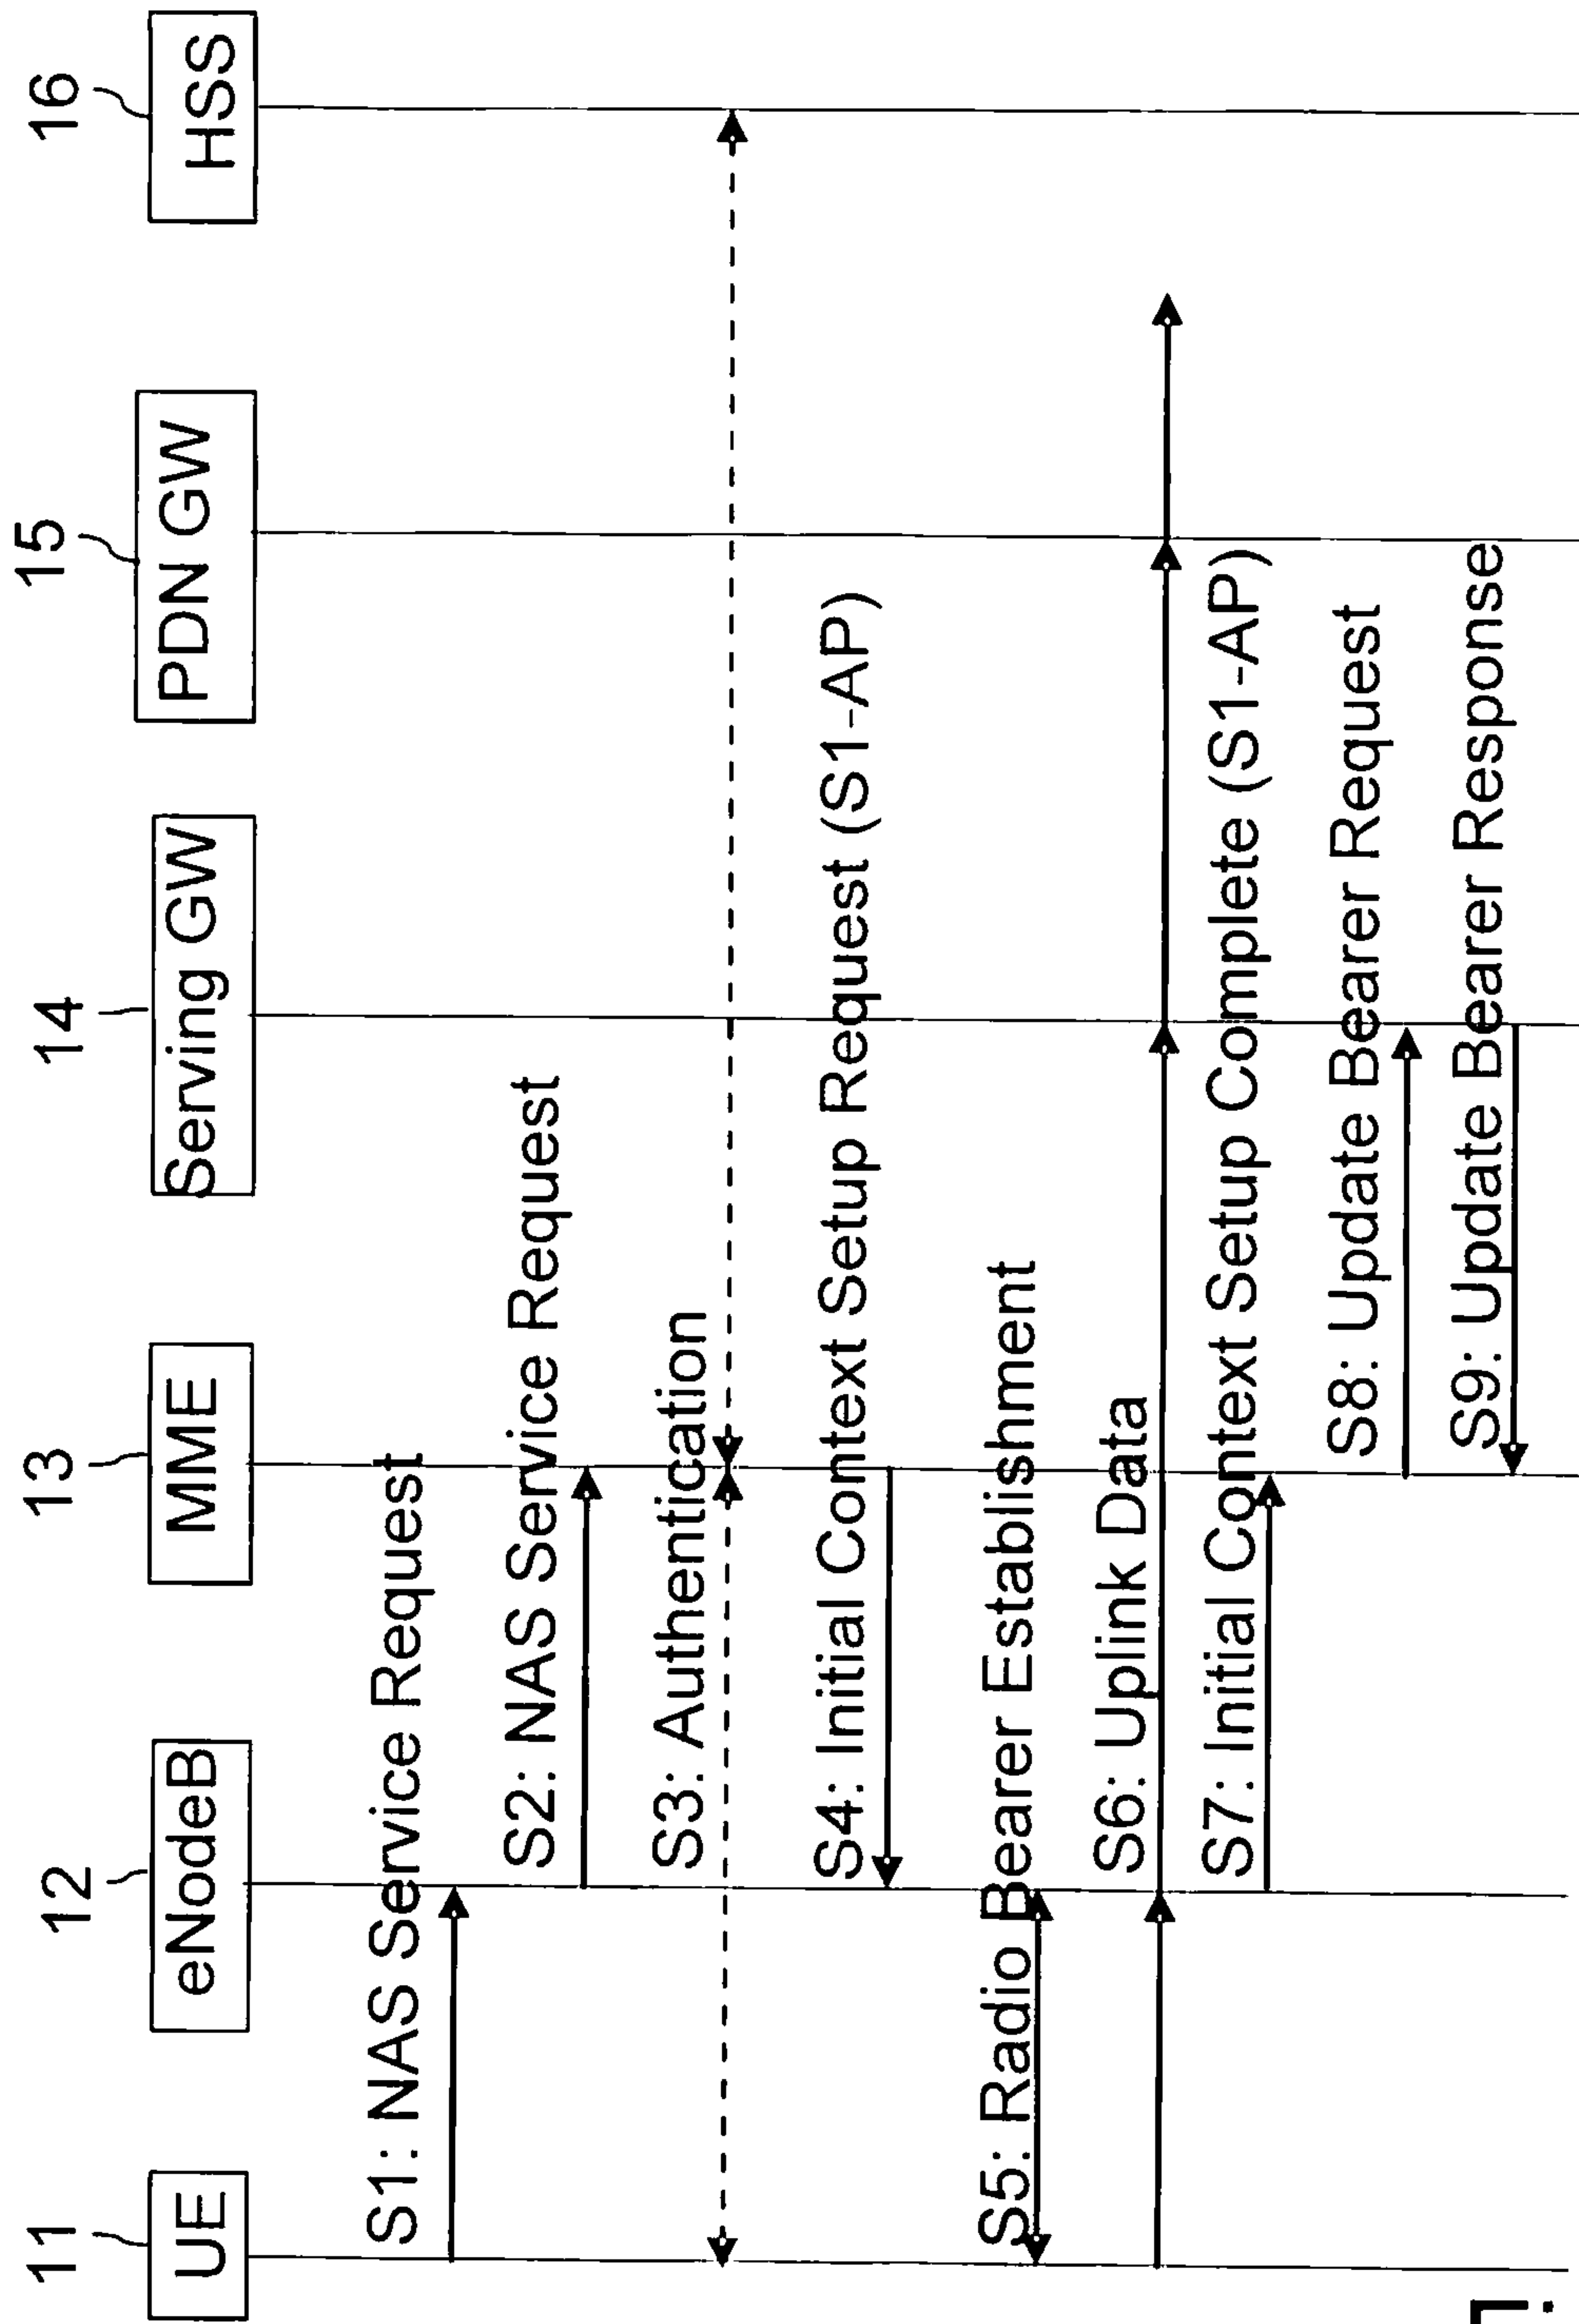


Fig. 1

2/6

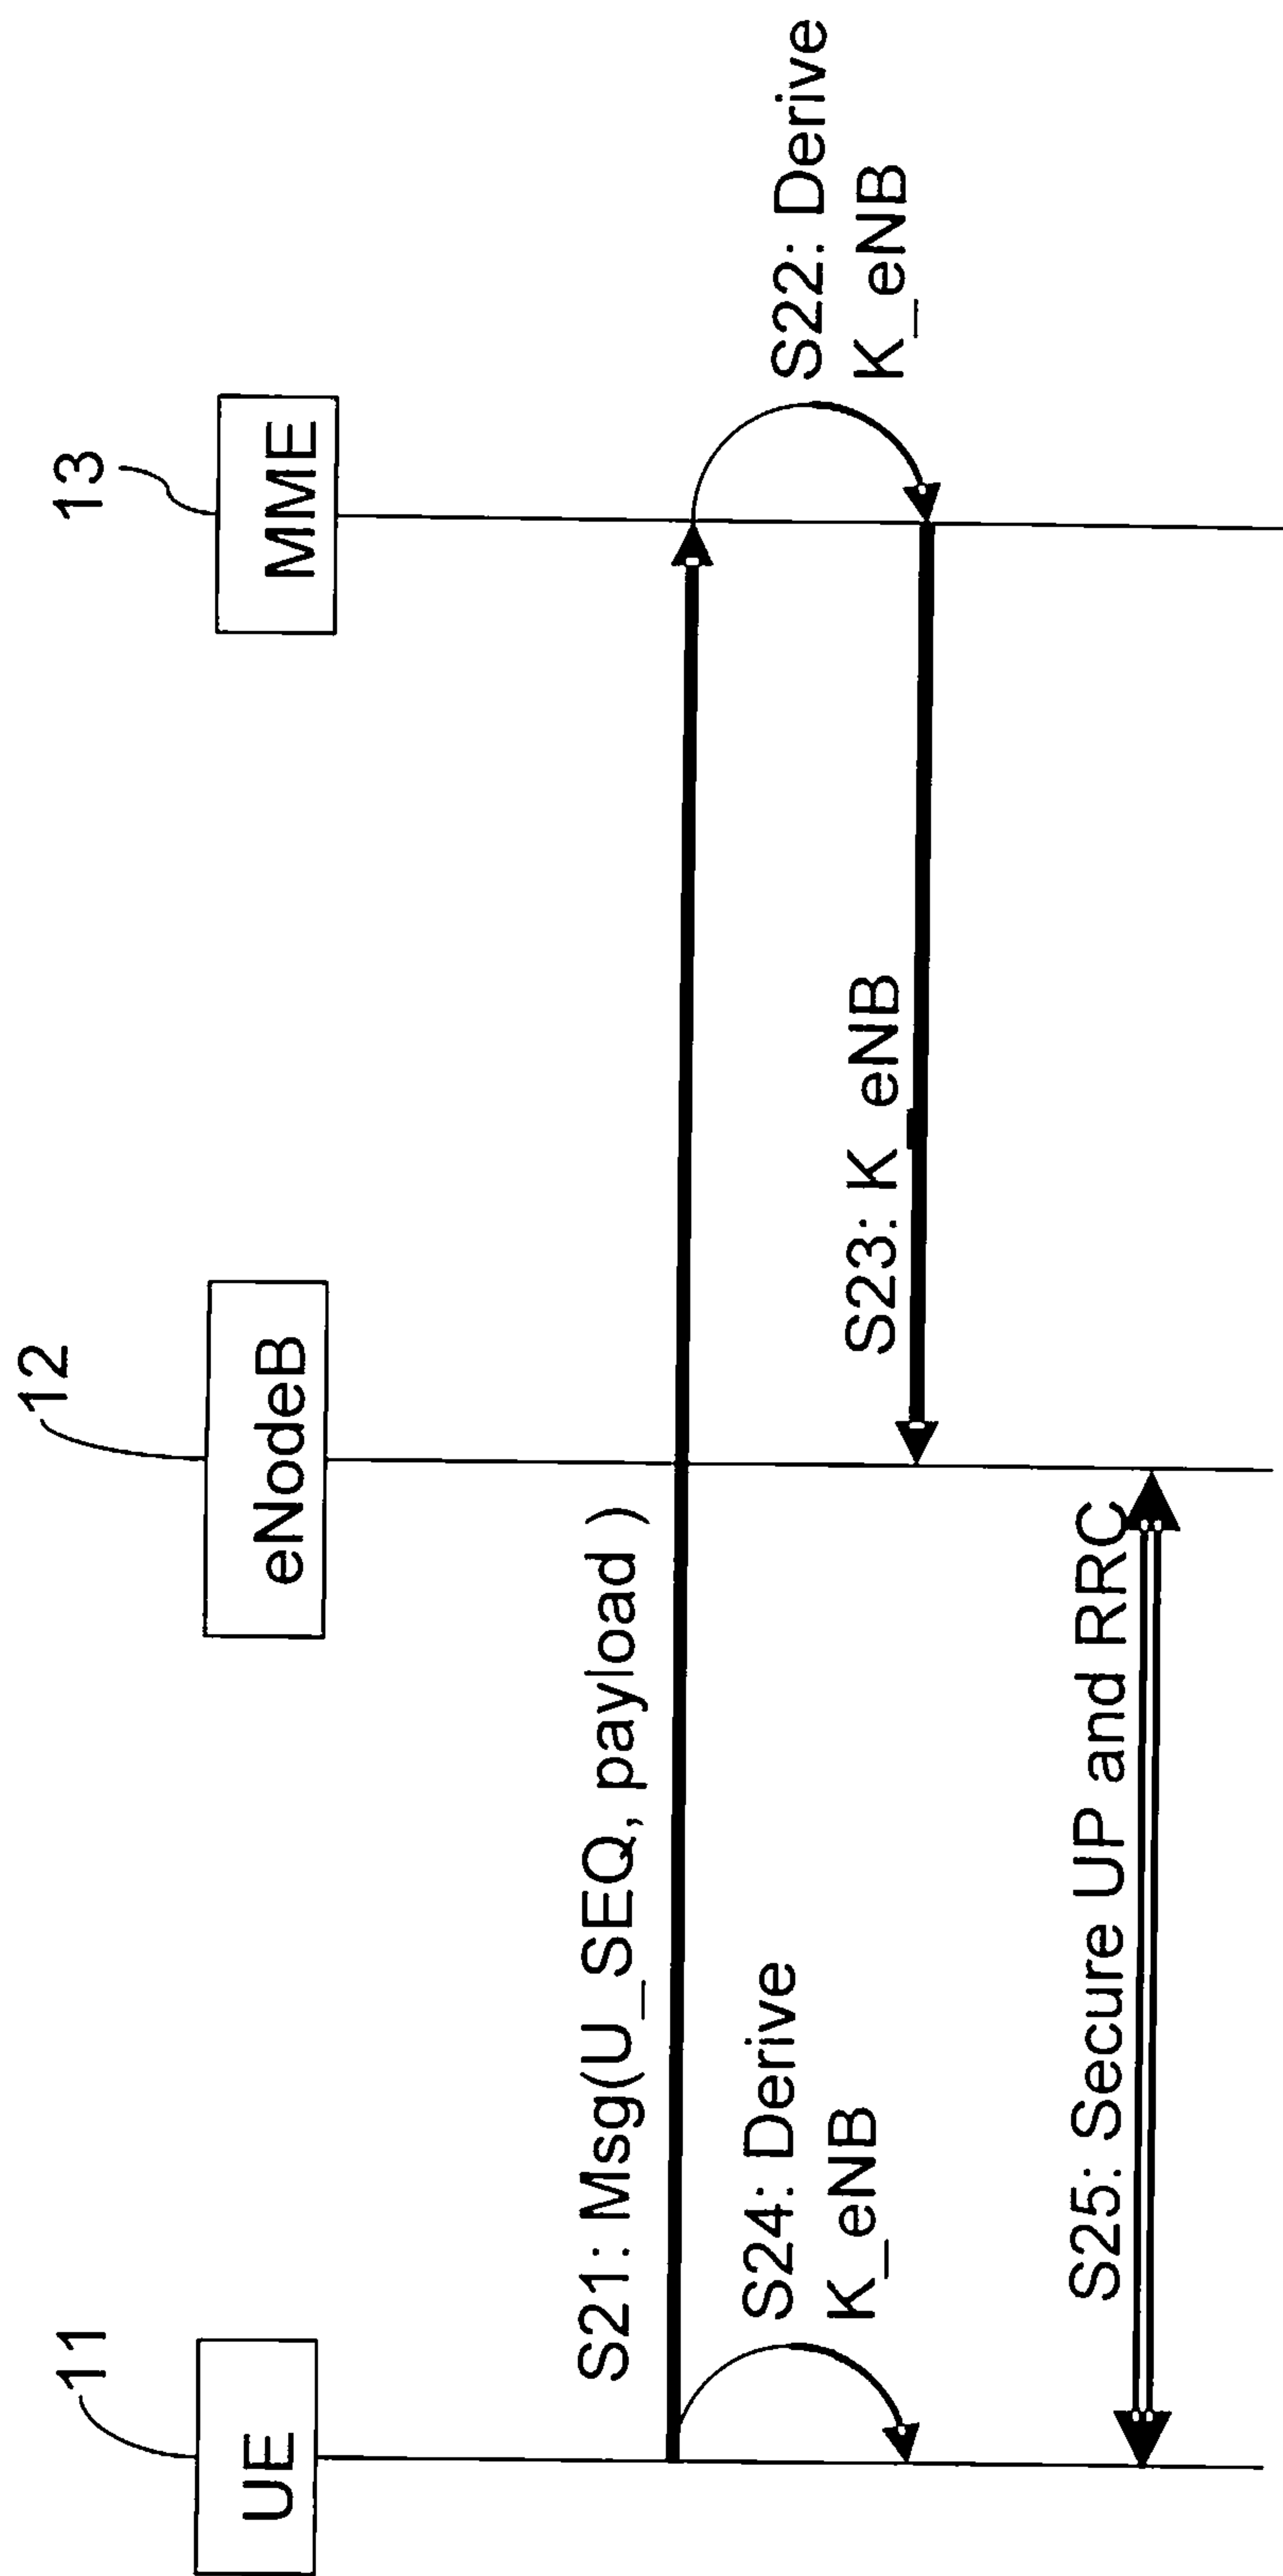


Fig. 2

3/6

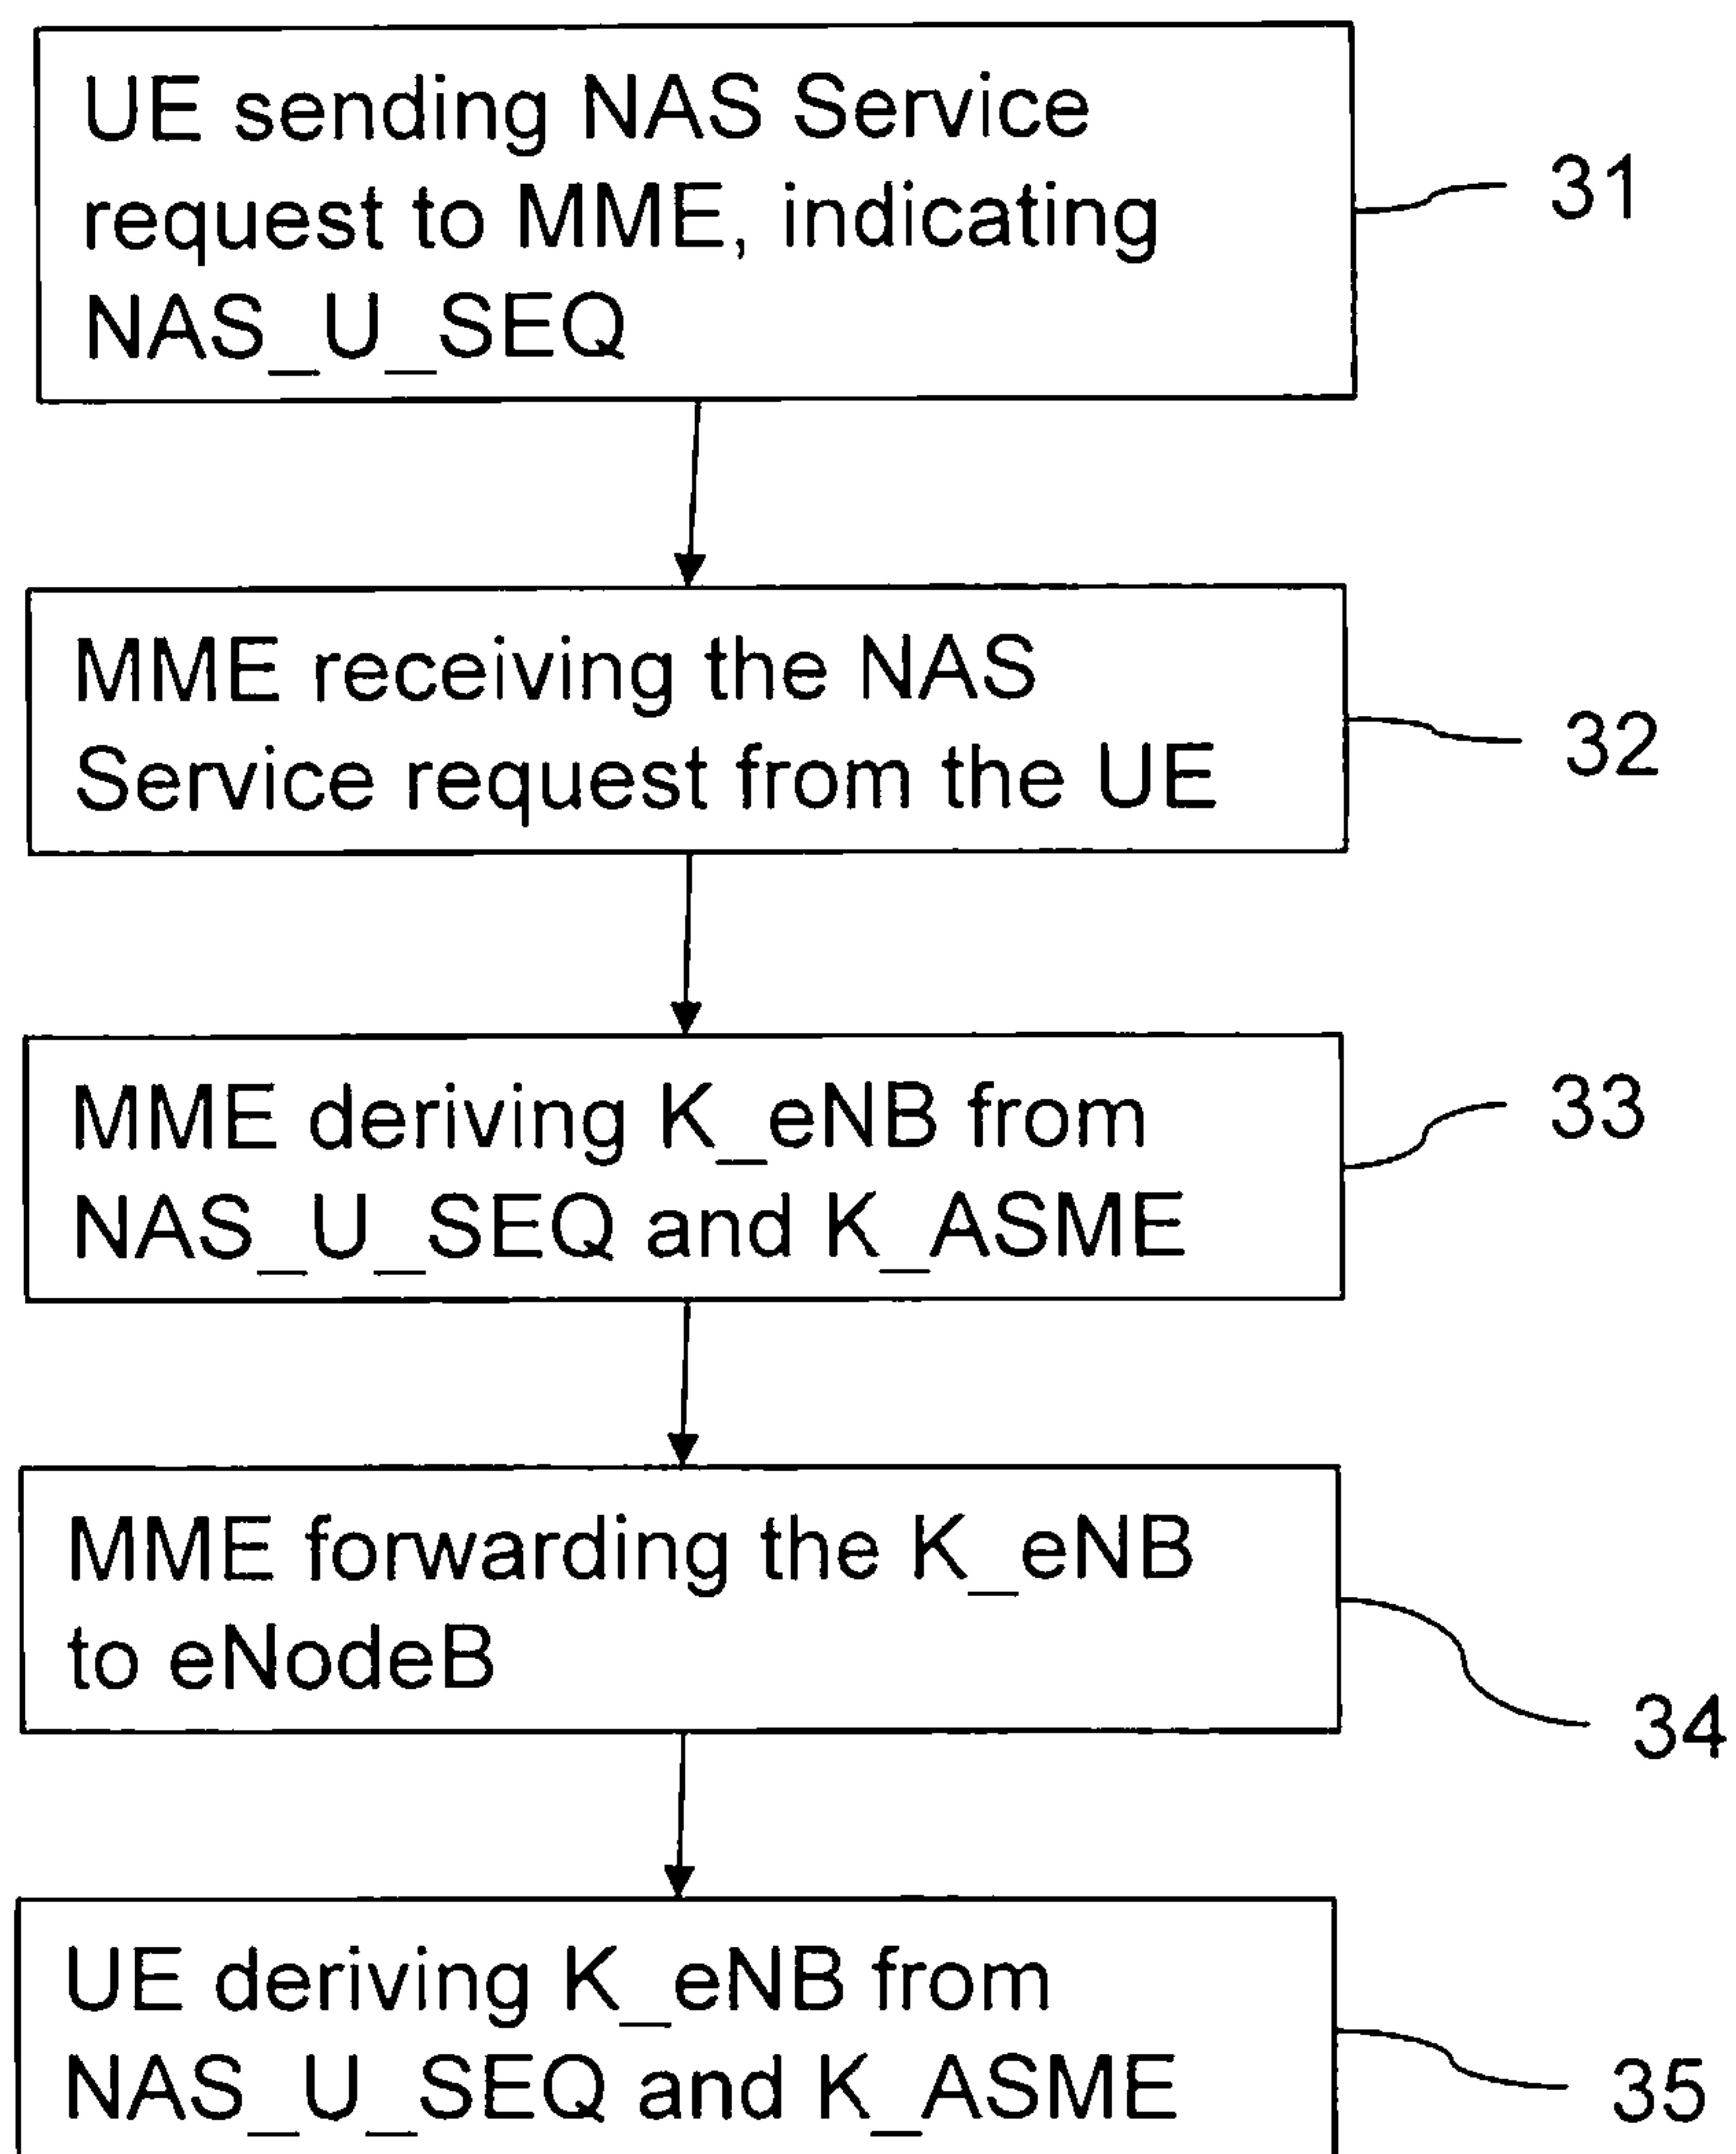


Fig. 3

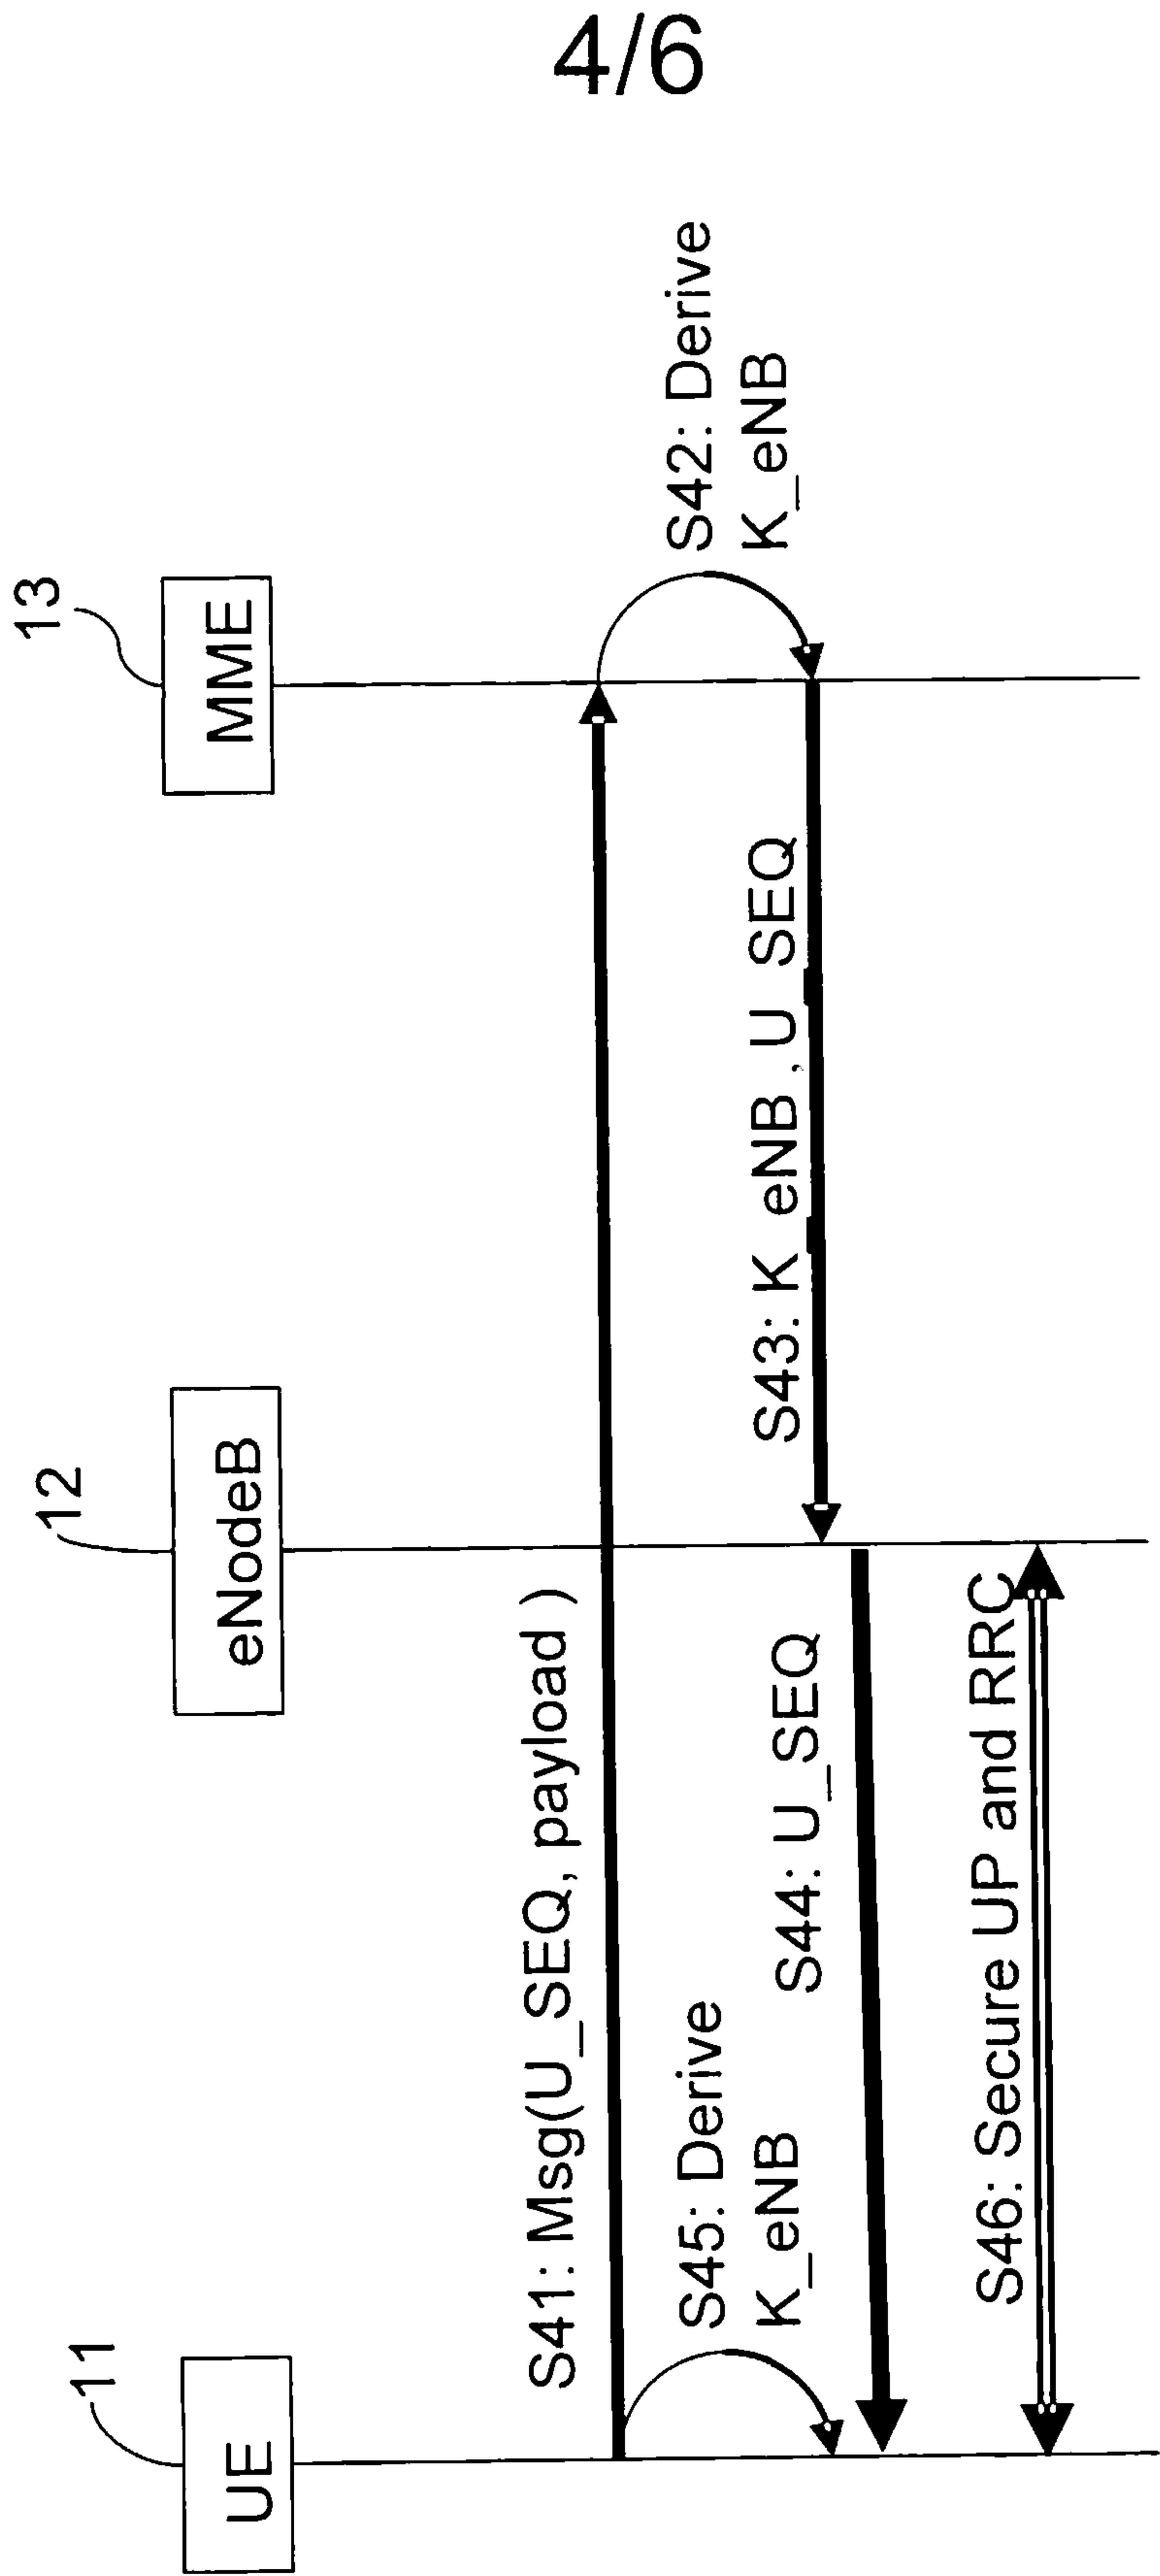


Fig. 4

5/6

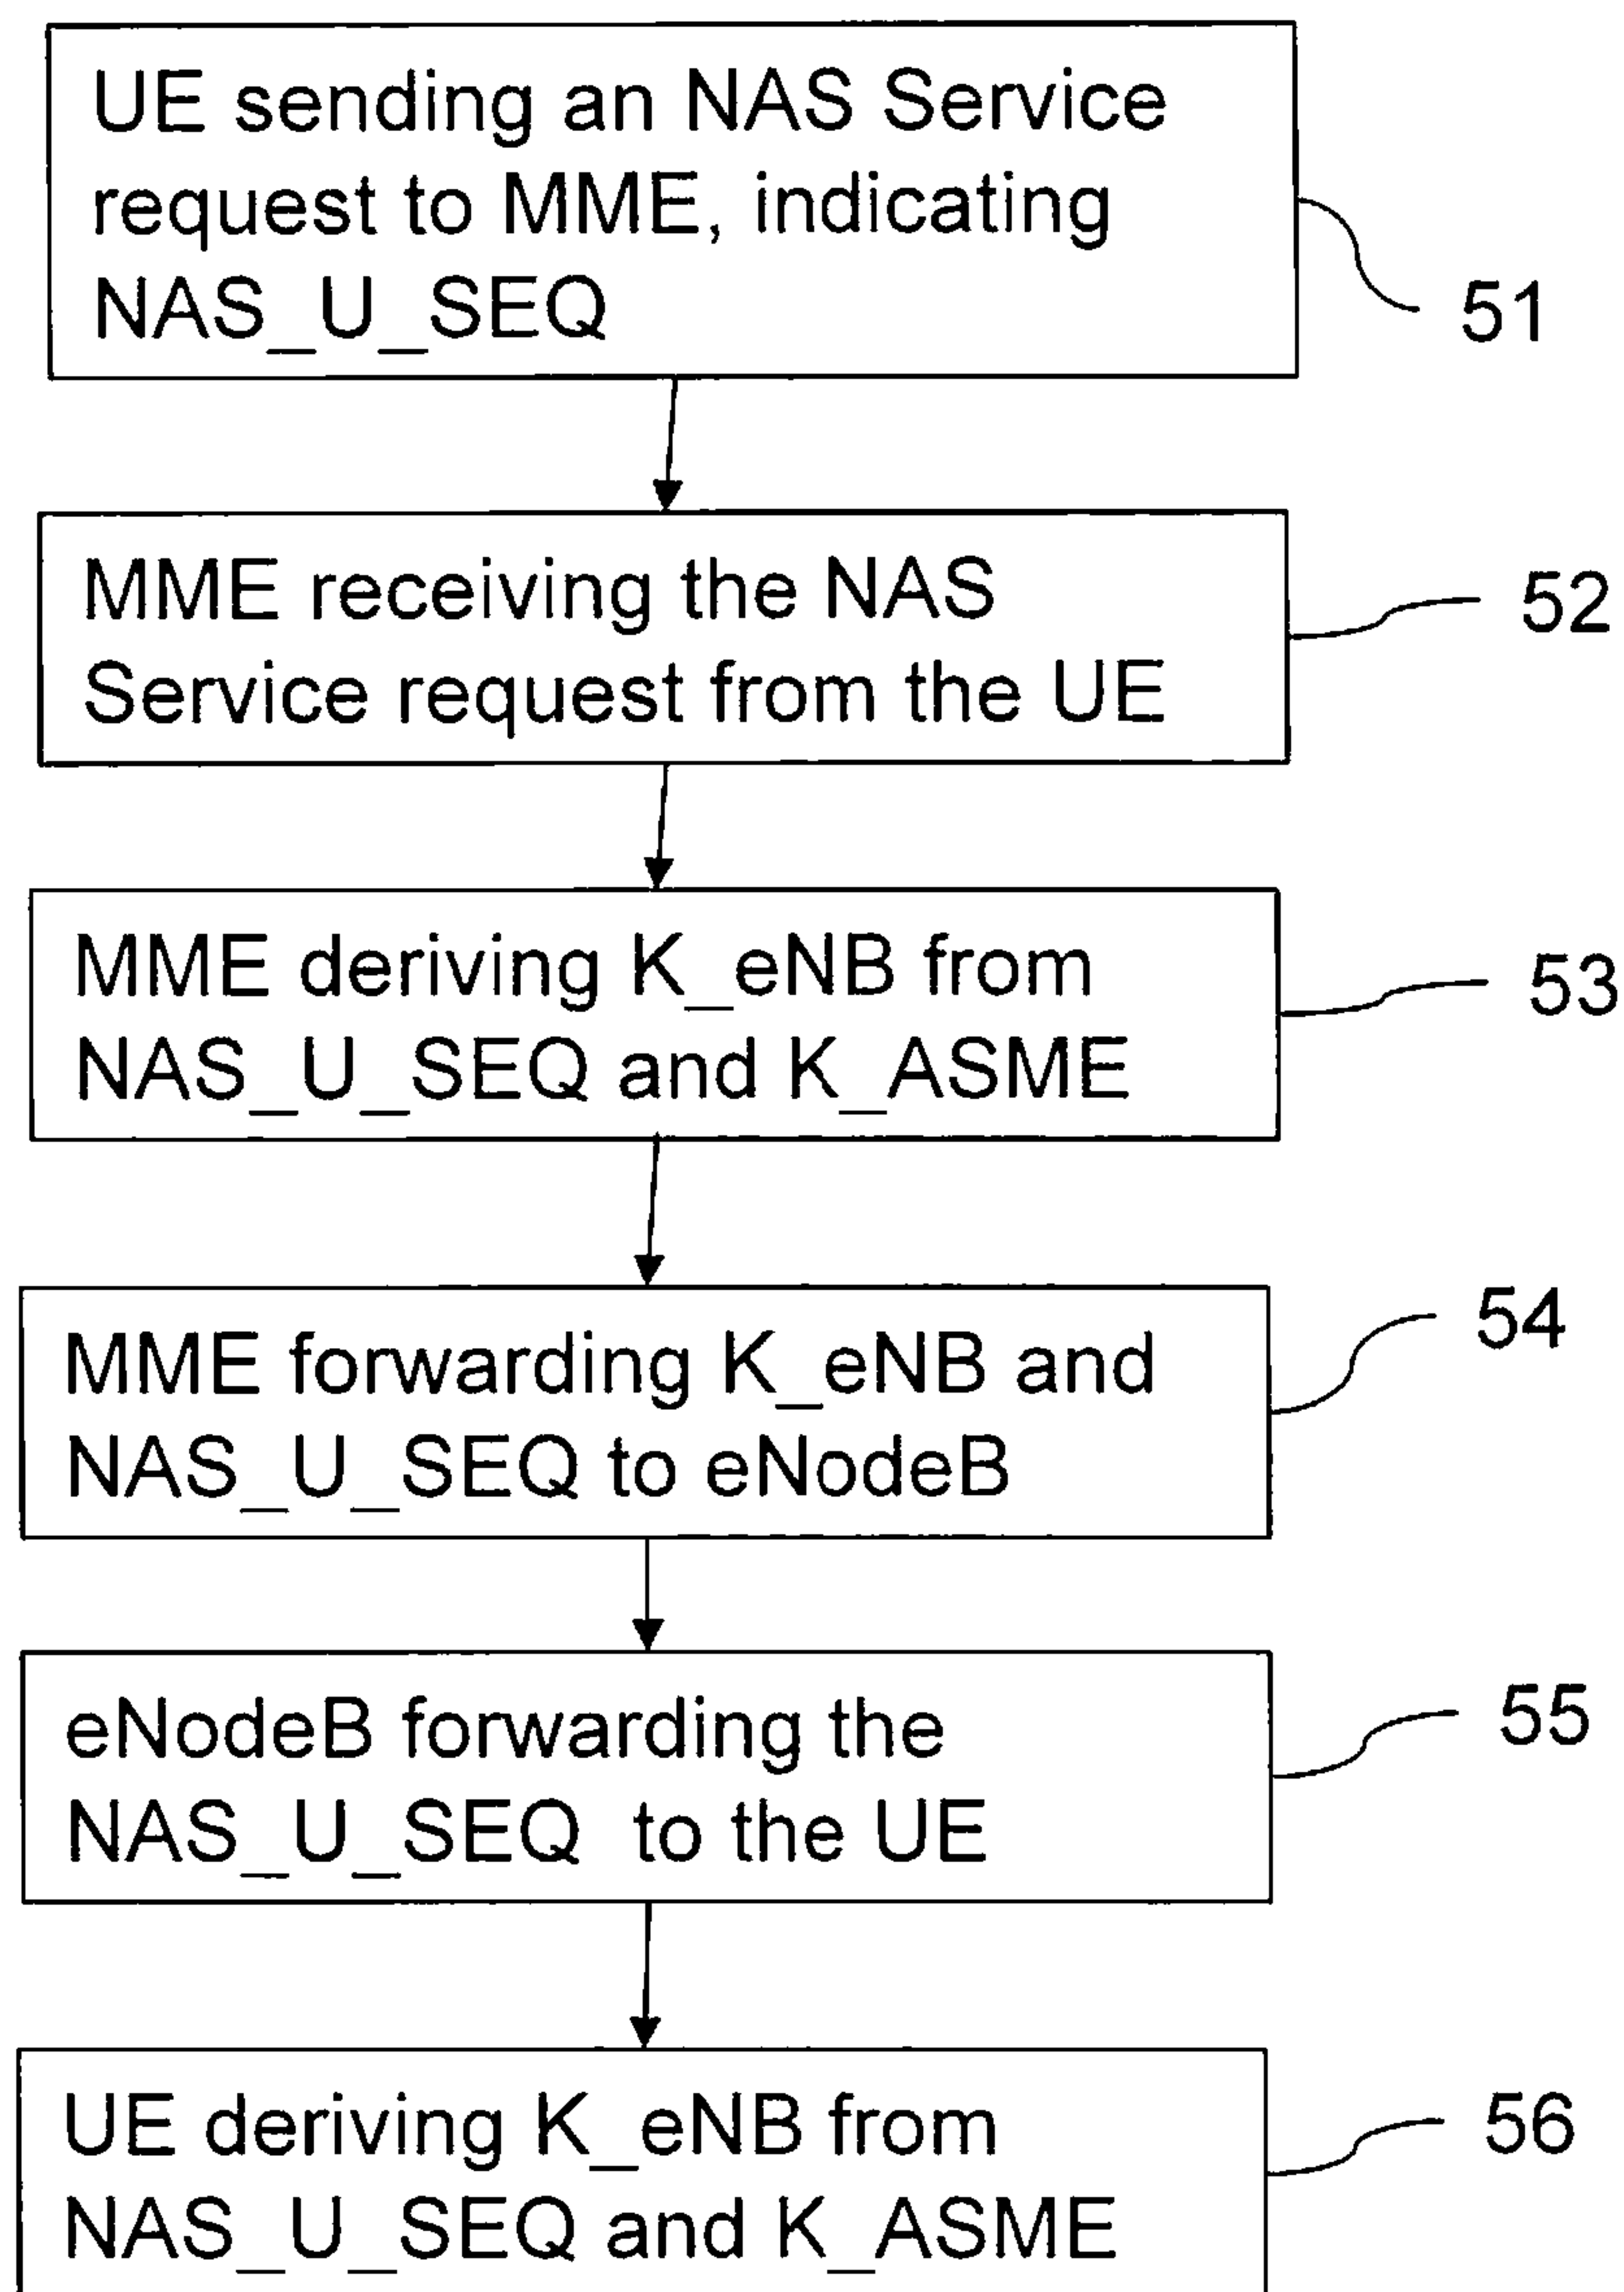


Fig. 5

6/6

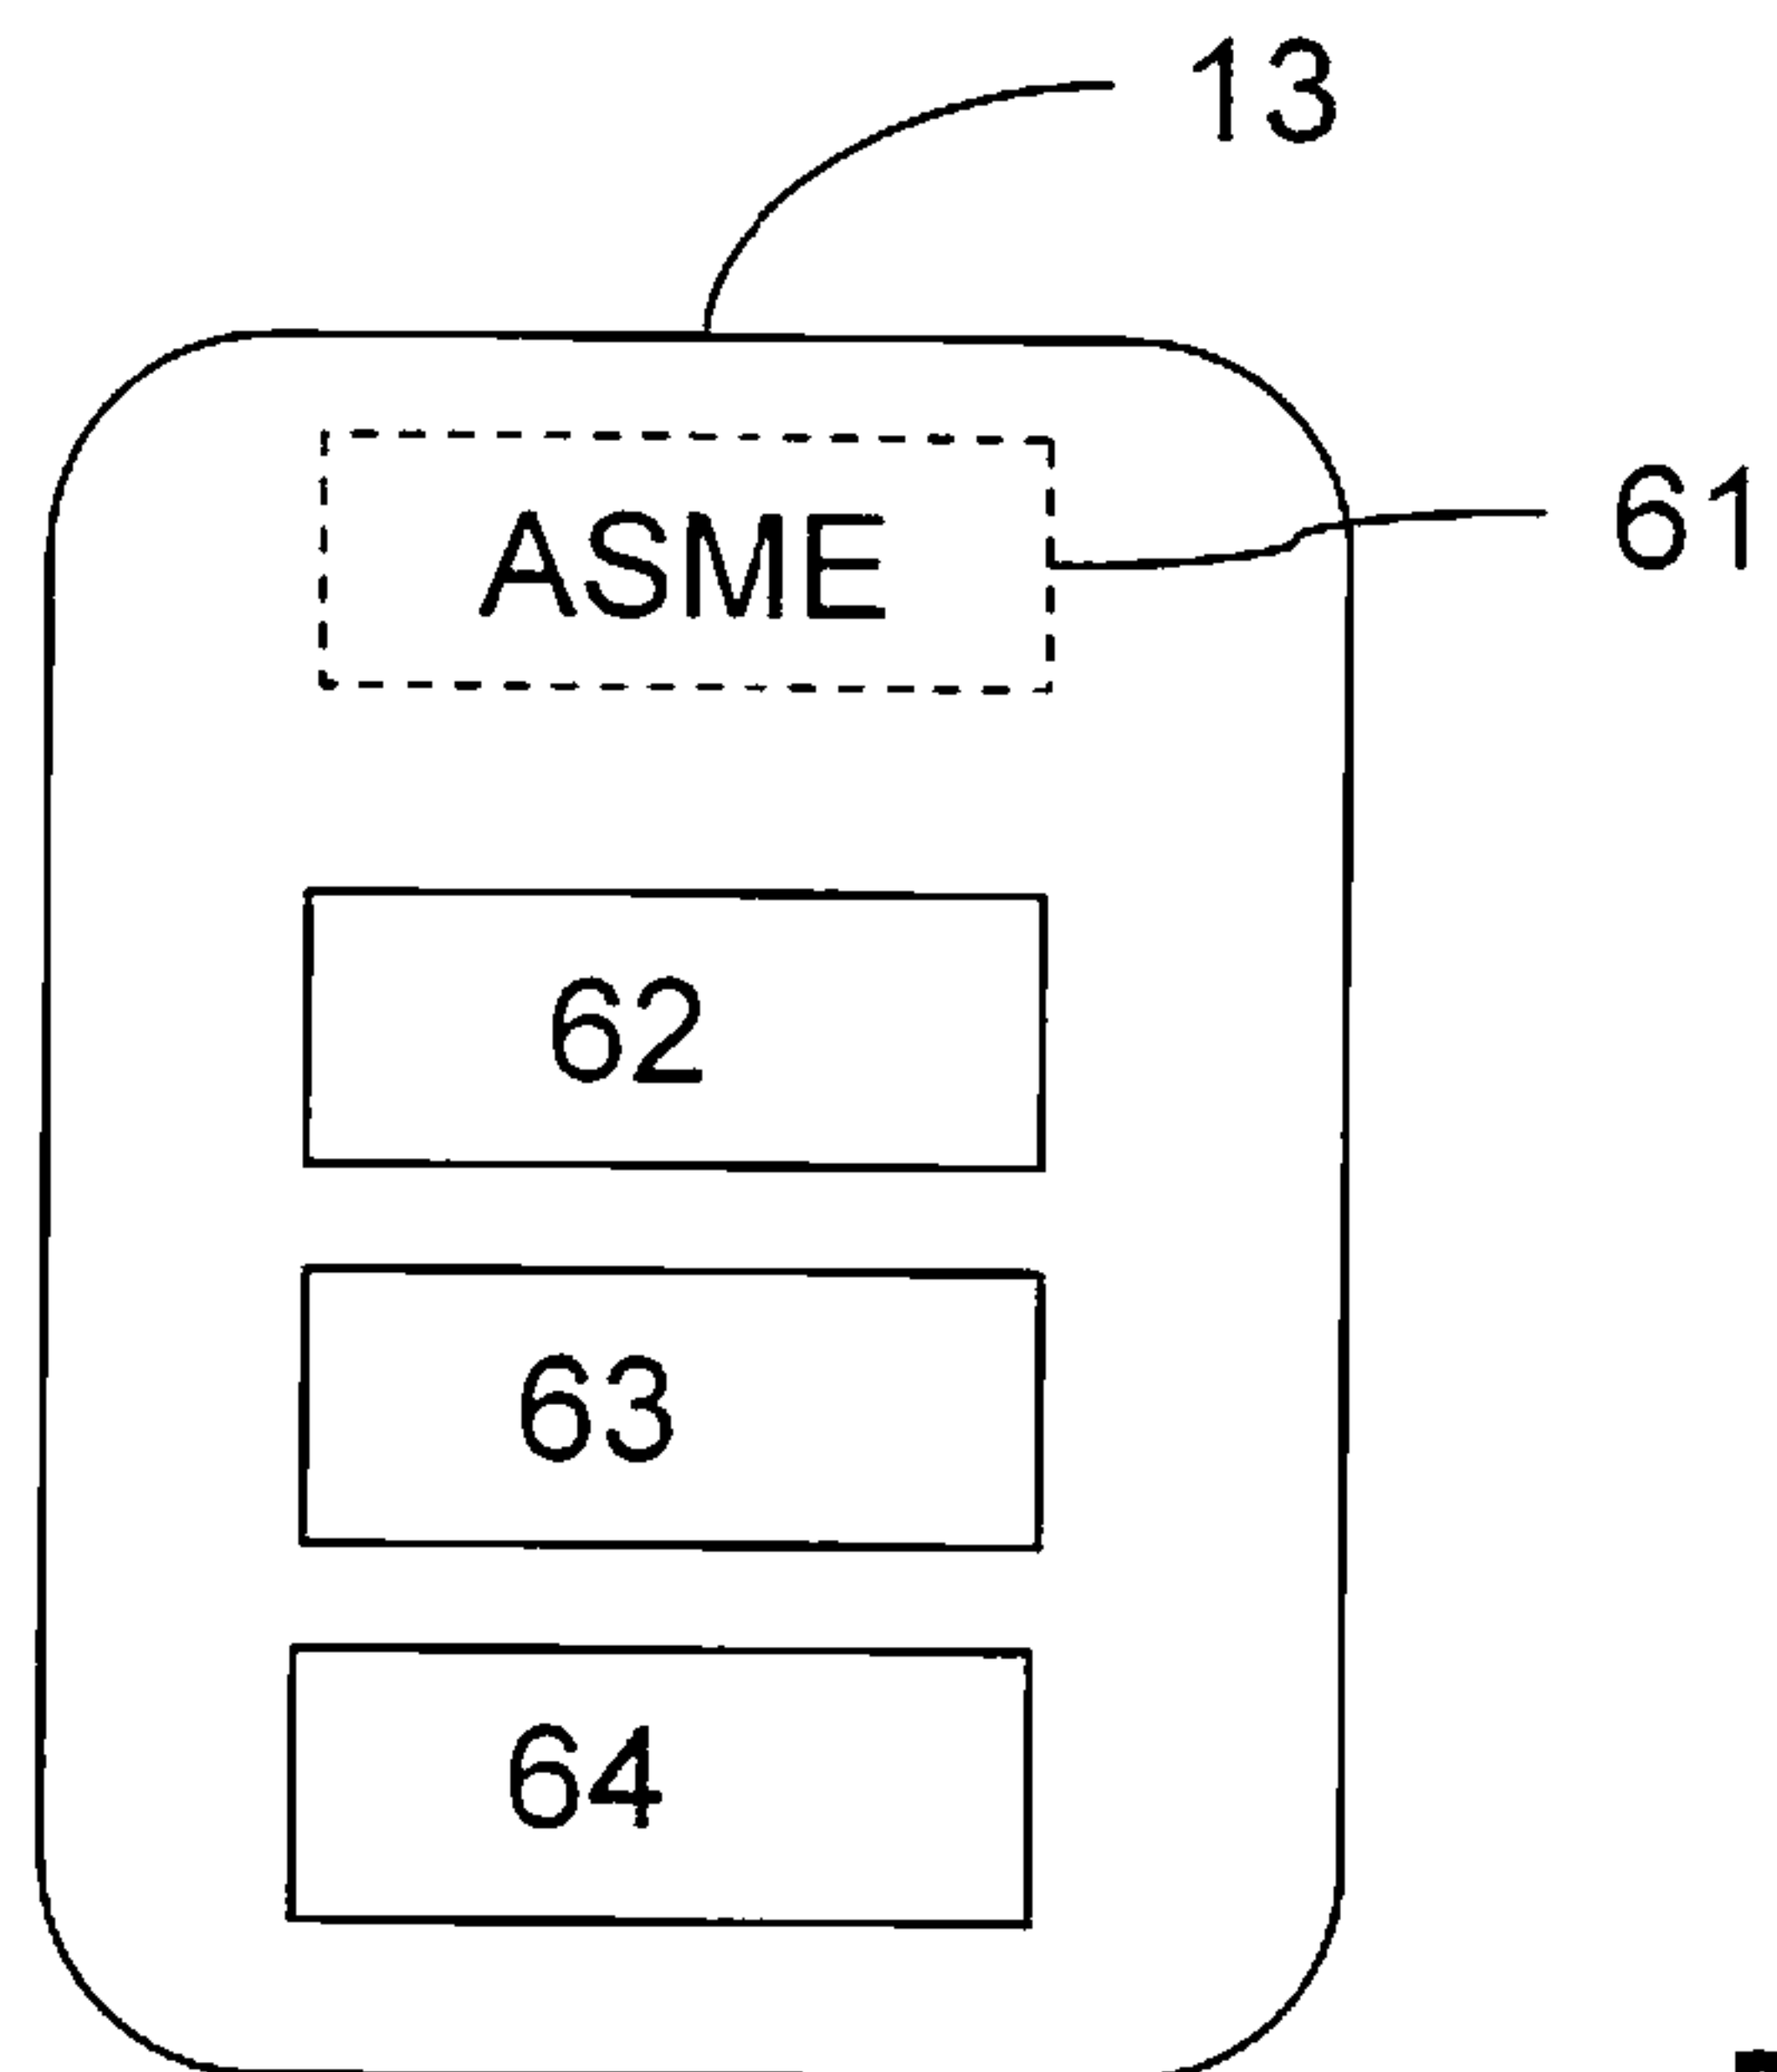


Fig. 6a

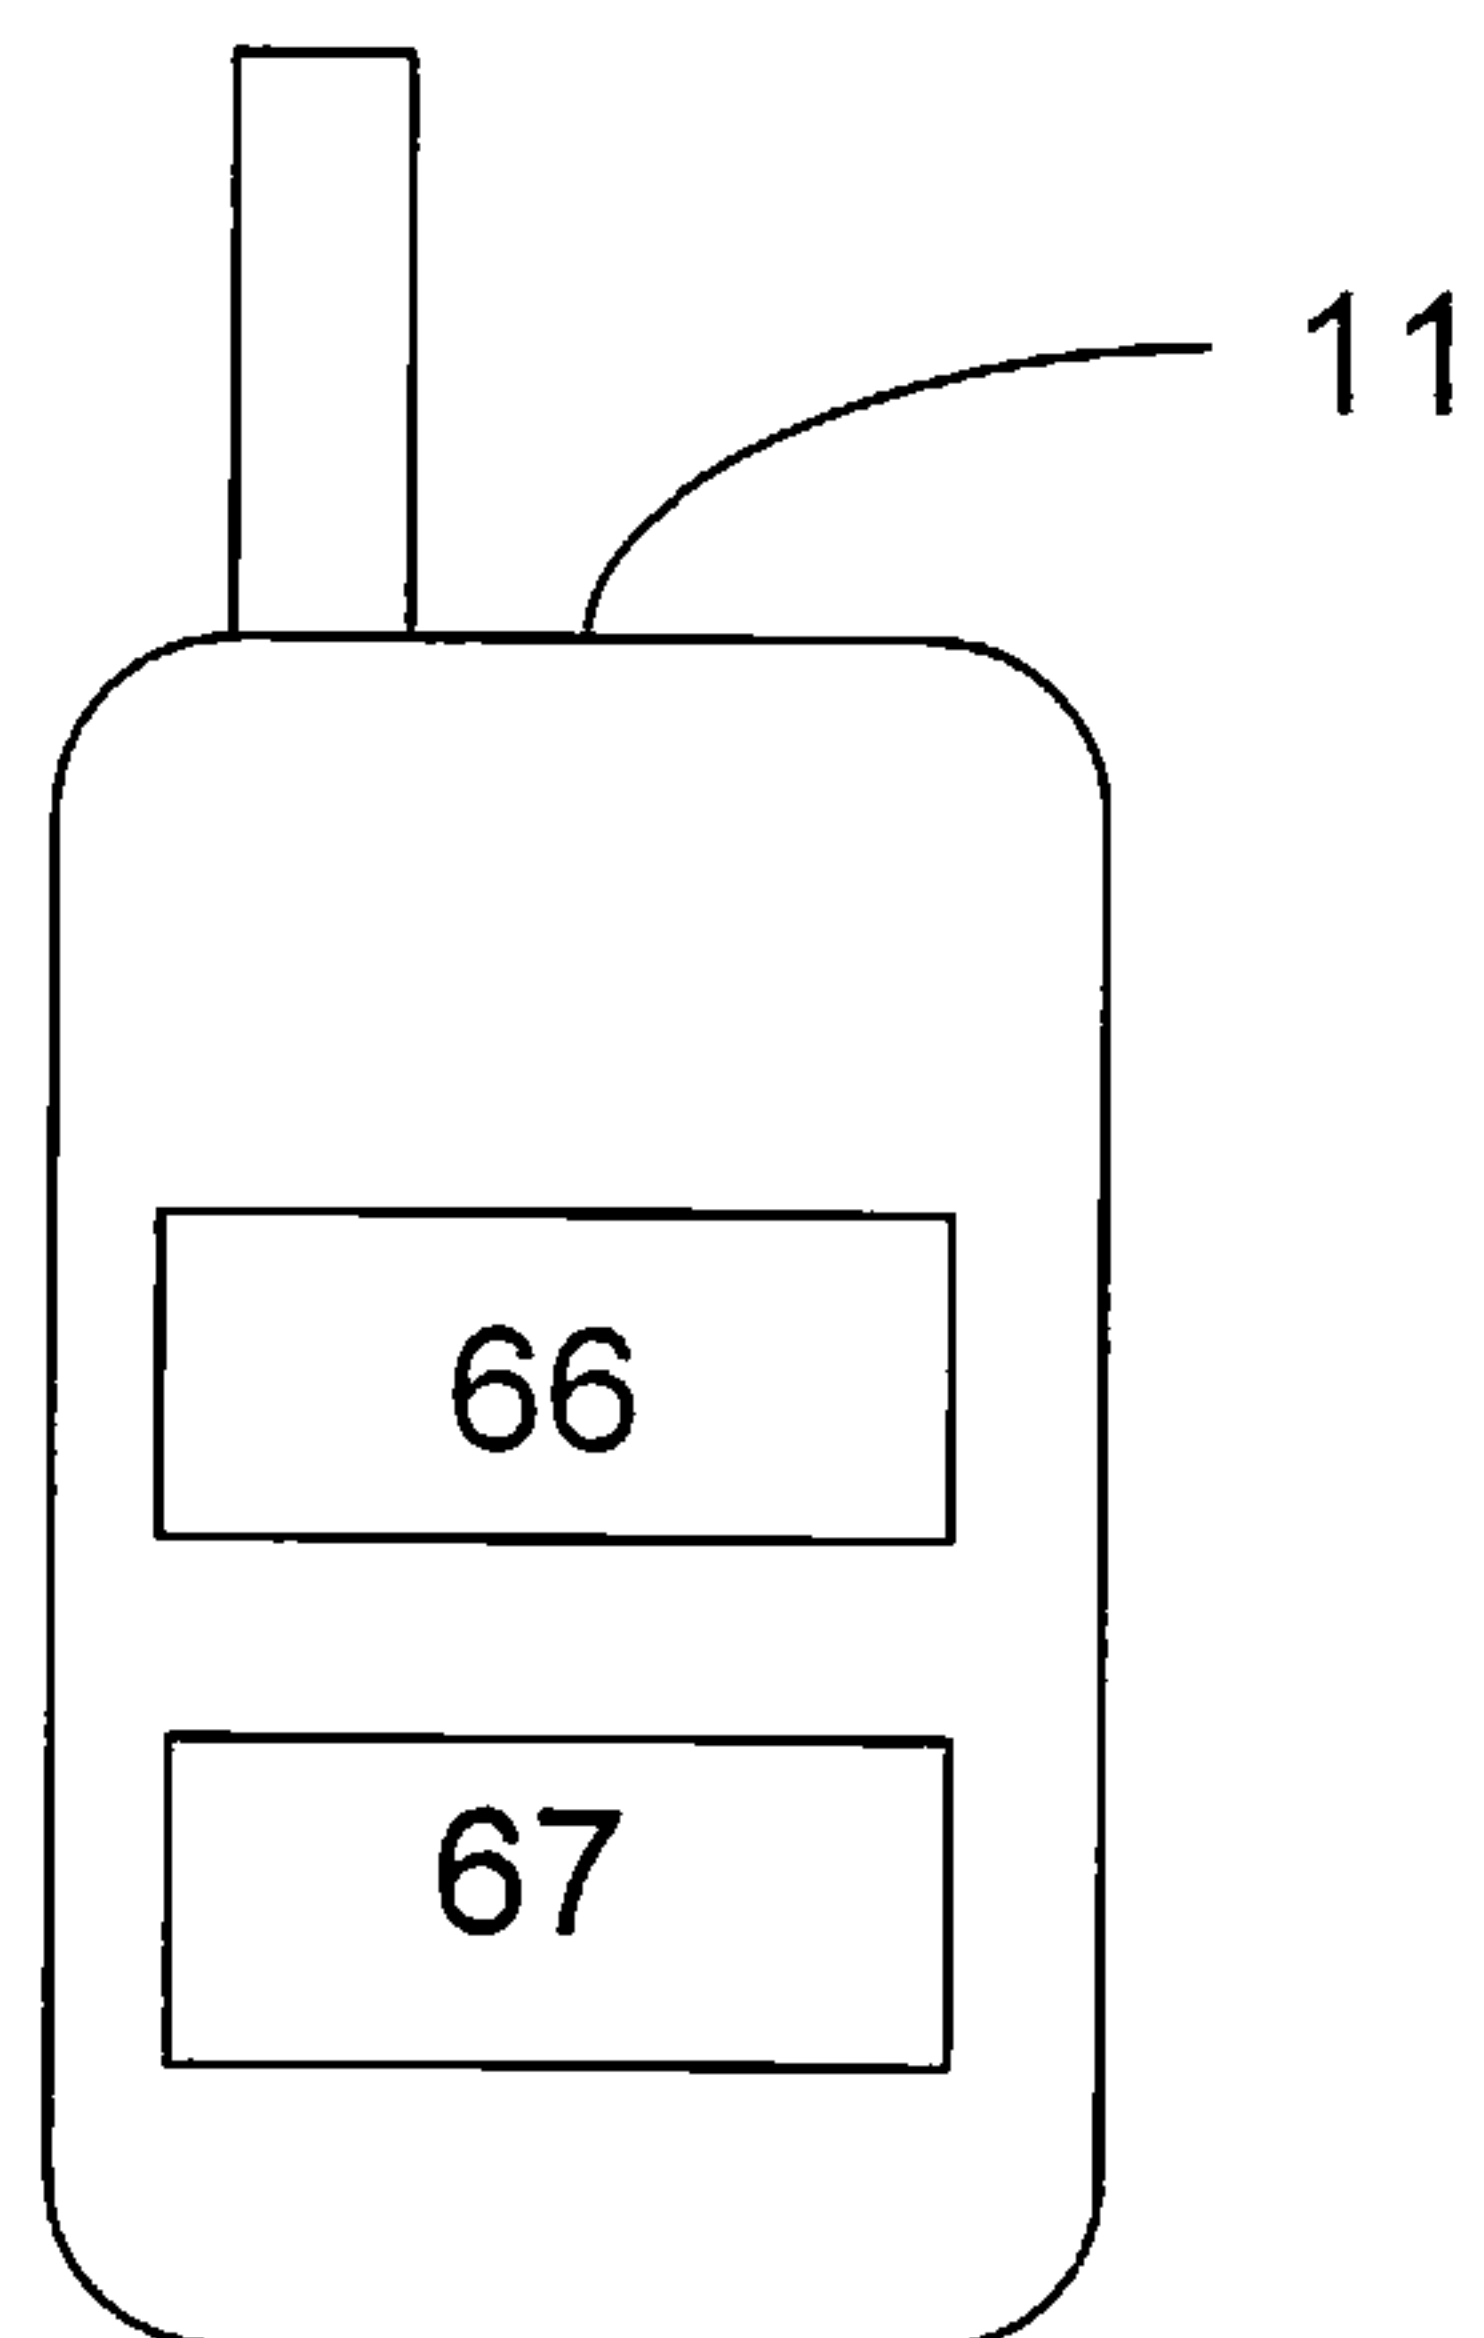


Fig. 6b

