



- (51) **International Patent Classification:**
H04B 1/52 (2006.01) *H04B 1/18* (2006.01)
- (21) **International Application Number:**
PCT/US2013/053706
- (22) **International Filing Date:**
6 August 2013 (06.08.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
13/568,158 7 August 2012 (07.08.2012) US
- (71) **Applicant:** MOTOROLA MOBILITY LLC [US/US];
600 North US Highway 45, Libertyville, Illinois 60048 (US).
- (72) **Inventors:** ALBERTH, William P., Jr.; 2715 Crystal Way, Prairie Grove, IL 60012 (US). BLACK, Gregory R.,; 715 S. Sussex Circle, Vernon Hills, Illinois 60061 (US). KLOMSDORF, Armin W.,; 2800 N. Lake Shore Drive, #2710, Chicago, Illinois 60657 (US).
- (74) **Agents:** ANOLICK, Simon B. et al.; 600 North US Highway 45, Libertyville, Illinois 60048 (US).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** TUNABLE INTER-ANTENNA ISOLATION

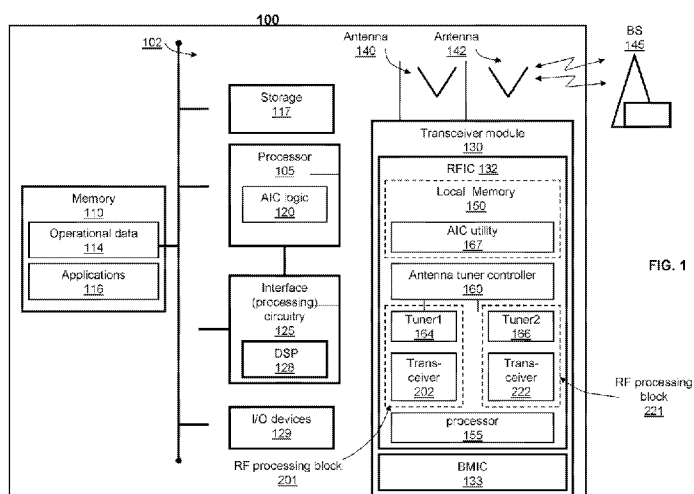


FIG. 1

(57) **Abstract:** A method and system performs antenna tuning to minimize interference affecting signal reception within a wireless communication device. An antenna tuner controller determines whether the wireless communication device concurrently provides (a) simultaneous signal transmission and reception and (b) dual signal propagation. In response to determining that the wireless communication device concurrently provides the simultaneous signal transmission and reception and the dual signal propagation, the antenna tuner controller determines a current mode of operation corresponding to simultaneous signal transmission and reception and the dual signal propagation. Based on the mode of operation determined, the antenna tuner controller identifies a priority for performing antenna isolation to minimize interference affecting signal reception when the wireless communication device actively communicates within the specific mode of operation. In response to the identifying the priority for performing antenna isolation, the antenna tuner controller performs antenna impedance tuning that provides antenna isolation corresponding to the priority.

TUNABLE INTER-ANTENNA ISOLATION**BACKGROUND****1. Technical Field**

[0001] The present disclosure relates in general to wireless communication devices and in particular to antenna isolation in wireless communication devices.

2. Description of the Related Art

[0002] Simultaneous Voice and Long Term Evolution (SVLTE) data transmission comprising Code Division Multiple Access (CDMA) 1X voice and LTE data transmission is a requirement for many CDMA/LTE operators. For SVLTE or simultaneous voice and data (SVDO), blocking signals at a corresponding receiver generated from an intermodulation of a transmitter signal with jamming signals can cause desensitization to one or more receivers. In many cases, the level of desensitization may be too high to be managed effectively using maximum output power reduction.

BRIEF DESCRIPTION OF THE DRAWINGS

[0003] The described embodiments are to be read in conjunction with the accompanying drawings, wherein:

[0004] **FIG. 1** is a block diagram illustrating an example wireless communication device within which the various features of the described embodiments can be advantageously implemented, according to one embodiment;

[0005] **FIG. 2** provides a block diagram representation of a radio frequency integrated circuit (RFIC), according to one embodiment;

[0006] **FIG. 3** is a block diagram illustrating an embodiment of an RFIC comprising an antenna isolation block coupled between a transmit antenna port and a receive antenna port, according to one embodiment;

[0007] **FIG. 4** is a table of pre-defined modes of operation, associated priorities of providing antenna isolation and corresponding tuning vectors, according to one embodiment; and

[0008] **FIG. 5** is a flow chart illustrating one embodiment of a method for providing antenna isolation to minimize interference affecting signal reception within a wireless communication device, according to one embodiment.

DETAILED DESCRIPTION

[0009] The illustrative embodiments provide a method and system for performing antenna tuning to minimize interference affecting signal reception within a wireless communication device. An antenna tuner controller determines whether the wireless communication device concurrently provides (a) simultaneous signal transmission and reception and (b) dual signal propagation. In response to determining that the wireless communication device concurrently provides (a) simultaneous signal transmission and reception and (b) dual signal propagation, the antenna tuner controller determines a mode of operation that concurrently provides the simultaneous signal transmission and reception and the dual signal propagation. Based on the mode of operation determined, the antenna tuner controller identifies a priority for performing antenna isolation to minimize interference affecting signal reception when the wireless communication device communicates within a specific mode of operation. In response to the priority for performing antenna isolation being a first pre-defined or high priority, the antenna tuner controller performs a first antenna impedance tuning that provides a corresponding high degree of antenna isolation. However, if the priority is a second, lower priority, the antenna tuner controller triggers a second antenna impedance tuning that provides a lower degree of antenna isolation.

[0010] In the following detailed description of exemplary embodiments of the disclosure, specific exemplary embodiments in which the various aspects of the disclosure may be practiced are described in sufficient detail to enable those skilled in the art to practice the invention, and it is to be understood that other embodiments may be utilized and that logical, architectural, programmatic, mechanical, electrical and other changes may be made without departing from the spirit or scope of the present disclosure. The following detailed description is, therefore, not to be taken in a limiting sense, and the scope of the present disclosure is defined by the appended claims and equivalents thereof.

[0011] Within the descriptions of the different views of the figures, similar elements are provided similar names and reference numerals as those of the previous figure(s). The specific numerals assigned to the elements are provided solely to aid in the description and are not meant to imply any limitations (structural or functional or otherwise) on the described embodiment.

[0012] It is understood that the use of specific component, device and/or parameter names, such as those of the executing utility, logic, and/or firmware described herein, are for example only and not meant to imply any limitations on the described embodiments. The embodiments may thus be described with different nomenclature and/or terminology utilized to describe the components, devices, parameters, methods and/or functions herein, without limitation. References to any specific protocol or proprietary name in describing one or more elements, features or concepts of the embodiments are provided solely as examples of one implementation, and such references do not limit the extension of the claimed embodiments to embodiments in which different element, feature, protocol, or concept names are utilized. Thus, each term utilized herein is to be given its broadest interpretation given the context in which that terms is utilized.

[0013] As further described below, implementation of the functional features of the disclosure described herein is provided within processing devices and/or structures and can involve use of a combination of hardware, firmware, as well as several software-level constructs (e.g., program code and/or program instructions and/or pseudo-code) that execute to provide a specific utility for the device or a specific functional logic. The presented figures illustrate both hardware components and software and/or logic components.

[0014] Those of ordinary skill in the art will appreciate that the hardware components and basic configurations depicted in the figures may vary. The illustrative components are not intended to be exhaustive, but rather are representative to highlight essential components that are utilized to implement aspects of the described embodiments. For example, other devices/components may be used in addition to or in place of the hardware and/or firmware depicted. The depicted example is not meant to imply architectural or other limitations with respect to the presently described embodiments and/or the general invention.

[0015] The description of the illustrative embodiments can be read in conjunction with the accompanying figures. It will be appreciated that for simplicity and clarity of illustration, elements illustrated in the figures have not necessarily been drawn to scale. For example, the dimensions of some of the elements are exaggerated relative to other elements. Embodiments incorporating teachings of the present disclosure are shown and described with respect to the figures presented herein.

[0016] With specific reference now to **FIG. 1**, there is depicted a block diagram of an example wireless communication device **100**, within which the functional aspects of the described embodiments may be implemented. Wireless communication device **100** represents a device that is adapted to transmit and receive electromagnetic signals over an air interface via uplink and/or downlink channels between the wireless communication device **100** and communication network equipment (e.g., base-station **145**) utilizing a plurality of different communication standards, such as Global System for Mobile Communications (GSM) Code Division Multiple Access (CDMA), Orthogonal Frequency Division Multiple Access (OFDMA), and similar systems. In addition, wireless communication device **100** is able to utilize a number of communication means (e.g., carrier aggregation and simultaneous voice and LTE (SVLTE)) that concurrently enables (a) simultaneous signal transmission and reception and (b) at least one of dual signal transmission and dual signal reception. In one or more embodiments, the wireless communication device can be a mobile cellular device/phone or smartphone, or laptop, netbook or tablet computing device, or other types of communications devices. Wireless communication device **100** comprises processor **105** and interface circuitry **125**, which are connected to memory component **110** via signal bus **102**. Interface circuitry **125** includes digital signal processor (DSP) **128**. Wireless communication device **100** also includes a transceiver module **130** for sending and receiving communication signals. In at least some embodiments, the sending and receiving of communication signals occur wirelessly and are facilitated by one or more antennas **140** and **142** coupled to the transceiver module **130**. The number of antennas can vary from device to device, ranging from two or more antennas, and the presentation within wireless communication device **100** of two antennas **140**, **142** is merely for illustration.

[0017] Wireless communication device **100** is able to wirelessly communicate to base-station **145** via antenna **140** and antenna **142**. Base station **145** can be any one of a number of different types of network stations and/or antennas associated with the infrastructure of the wireless network and configured to support uplink and downlink communication via one or more of the wireless communication protocols, as known by those skilled in the art.

[0018] Transceiver module **130** comprises baseband modem integrated circuit (BMIC) **133** and radio frequency integrated circuit (RFIC) **132**. RFIC **132** comprises a memory or storage system **150**, antenna tuner controller **160** and RF processing blocks **201** and **221**. RF processing block **201** comprises antenna tuner **164**, transceiver **202**, and other processing block components (not

shown). Similarly, RF processing block **221** comprises antenna tuner **166**, transceiver **222**, and other processing block components shown in **FIG. 2**. In one implementation, antenna tuner controller **160** is communicatively coupled to both antenna tuners **164** and **166**. In one embodiment, RFIC **132** also includes local processor **155**, which may be described as a digital signal processor (DSP). According to one aspect of the disclosure, local memory/storage **150** includes therein firmware, such as Antenna Isolation Controller (AIC) utility **167**, which supports the various processing functions of RFIC **132**. The structural makeup of RFIC **132** is described in greater detail in **FIG. 2**.

[0019] In addition to the above described hardware components of wireless communication device **100**, various features of the invention may be completed/supported via software or firmware code and/or logic stored within at least one of memory **110** and local memory **150**, and respectively executed by DSP **128**, Processor **105**, or local processor **155** of RFIC **132**. Thus, for example, illustrated within local memory **150** are a number of software, firmware, logic components, or modules, including applications **116** and AIC utility **167**.

[0020] The various components within wireless communication device **100** can be electrically and/or communicatively coupled together as illustrated in **FIG. 1**. As utilized herein, the term “communicatively coupled” means that information signals are transmissible through various interconnections between the components. The interconnections between the components can be direct interconnections that include conductive transmission media, or may be indirect interconnections that include one or more intermediate electrical components. Although certain direct interconnections are illustrated in **FIG. 1**, it is to be understood that more, fewer or different interconnections may be present in other embodiments.

[0021] **FIG. 2** provides a block diagram representation of a structural configuration of radio RFIC **132**, according to one embodiment. RFIC **132** comprises first radio frequency (RF) processing block **201** and second RF processing block **221** each co-located within relative close proximity of the other RF processing block. First RF processing block **201** comprises first RF transceiver **202**, which includes first RF transmitter (TX) **204** and first RF receiver (RX) **206**. First RF processing block **201** also comprises first power amplifier (PA1) **208**, filters **216**, **218** and antenna tuner **164**. Filter **216** is coupled to an output port of power amplifier **208** and to a port of antenna tuner **164**. Filter **218** is coupled to an output port of first RF receiver **206** and to

a port of antenna tuner **164**. Antenna **140** is connected by antenna tuner **164** to first RF processing block **201**. TX **204** provides signal $f1$ **205**, and RX **206** receives signal $f2$ **207**.

[0022] Second RF processing block **221** comprises second RF transceiver **222** which includes second RF transmitter **224** and second RF receiver **226**. Second RF processing block **221** also comprises second power amplifier (PA2) **228**, filters **236**, **238** and antenna tuner **166**. Filter **236** is coupled to an output port of power amplifier **228** and to a port of antenna tuner **166**. Filter **238** is coupled to an output port of second RF receiver **226** and to a port of antenna tuner **166**. Antenna **142** is connected by antenna tuner **166** to second RF processing block **221**. TX **224** provides signal $f3$ **225**, and RX **226** receives signal $f4$ **227**.

[0023] In RFIC **132**, antenna tuner controller **160** determines whether wireless communication device **100** concurrently provides (a) simultaneous signal transmission and reception and (b) at least one of dual signal transmission and dual signal reception. The term “dual signal propagation,” described in more detail below, is used herein to refer to any one of (a) dual signal transmission, (b) dual signal reception and (c) both dual signal transmission and dual signal reception. In response to antenna tuner controller **160** determining that wireless communication device **100** concurrently provides (a) simultaneous signal transmission and reception and (b) dual signal propagation, antenna tuner controller **160** determines a mode of operation of wireless communication device **100** associated with the simultaneous signal transmission and reception and the dual signal propagation. The mode of operation is frequently associated with concurrent utilization of multiple wireless communication technologies or radio access technologies (RATs). As a result of multiple RATs being concurrently active in wireless communication device **100**, the corresponding mode of operation can cause an associated interference affecting signal reception within wireless communication device **100**.

[0024] Based on determining the mode of operation that is active within wireless communication device **100**, antenna tuner controller **160** identifies a priority for performing antenna isolation to minimize interference that affects signal reception when wireless communication device **100** actively operates in that mode of operation. In response to the priority for performing antenna isolation being a first or high priority, antenna tuner controller **160** performs a first antenna impedance tuning that provides a corresponding higher degree of antenna isolation. However, if the priority is a second, lower priority, antenna tuner controller **160** triggers a second antenna impedance tuning that provides a lower degree of antenna isolation.

[0025] Wireless communication device **100** provides simultaneous signal transmission and reception when at least one transmitter (e.g., TX **204** and/or **224**) and at least one receiver (RX **206** and/or **226**) of wireless communication device **100** are actively operating to enable propagation of corresponding signals.

[0026] Wireless communication device **100** provides dual signal propagation when at least two transmit signals (e.g., signal *f1* **205**, signal *f3* **225**) and/or at least two receive signals (e.g., signal *f2* **207**, signal *f4* **227**) are simultaneously propagated by wireless communication device **100**. In one embodiment, two transceivers, each having a single transmitter and a single receiver, provide dual signal propagation when (a) the first transceiver and the second transceiver collectively transmit two signals and/or (b) the first receiver and the second receiver collectively receives two signals. As described herein, a single transceiver comprises a single transmitter and a single receiver. A dual transceiver or multi-transceiver comprises multiple transmitters and multiple receivers. A single transmitter provides a single transmission source and port. When wireless communication device **100** provides dual signal propagation using transmit signals, each of the first transmitter and the second transmitter simultaneously transmits a corresponding single transmit signal. However, in an alternate embodiment, a single transceiver having a single transmitter and a single receiver can provide dual signal propagation when the single transmitter is able to simultaneously transmit, using a single port, at least two signals and/or the single receiver is able to simultaneously receive, using a single port, at least two signals. In one or more embodiments, a single transmitter “simultaneously” transmits at least two signals when the single transmitter transmits at least two signals in a cyclical time interval or sampling period.

[0027] Antenna tuner controller **160** determines, for the determined mode of operation, the priority for providing at least one of: (a) a first antenna isolation associated with a transmitter and a receiver of a single transceiver; and (b) a second antenna isolation associated with a transmitter of a first transceiver and a receiver of a second transceiver. In response to the priority for providing at least one of the first antenna isolation and the second antenna isolation during the mode of operation being a first priority, antenna tuner controller **160** performs, using a corresponding antenna tuner, antenna impedance tuning that provides a “pre-determined” degree of antenna isolation that corresponds to at least one of the first antenna isolation and the second antenna isolation. In one embodiment, antenna tuner controller **160** performs the “pre-determined” degree of antenna isolation by providing to a corresponding antenna tuner tuning

vectors that are determined using calculations and/or empirical methods. In particular, the tuning vectors are values that have been demonstrated in experiments and/or simulations to provide an acceptable level of performance in minimizing interference affecting signal reception when the wireless communication device communicates within a specific mode of operation. In general, pre-calculated and/or predetermined values can also be described as pre-optimized values. These values are included within firmware or stored within a data structure, such as a table.

[0028] In one embodiment, antenna tuner controller **160** receives operational data **114** that define operating conditions and/or an operating environment of wireless communication device **100** via inputs **221**, and utilizes operational data **114** to determine the appropriate tuning vectors. For example, in one implementation, antenna tuner controller **160** identifies and/or determines operational data that includes at least one of (a) frequency bands of operation, and (b) a user position affecting antenna impedance, and (c) an application being run on the wireless communication device.

[0029] In one embodiment, antenna tuner controller **160** identifies the priority by accessing a stored data structure that identifies pre-defined modes of operation, maps the pre-defined modes of operation to pre-defined operational data, associates the pre-defined modes of operation that are mapped to pre-determined operational data to corresponding priorities of providing antenna isolation. In addition, antenna tuner controller **160** uses the stored data structure (e.g., table **400**) to identify antenna isolation vectors associated with a specific level of antenna isolation for the mode of operation.

[0030] In one embodiment, antenna tuner controller **160** performs a first antenna tuning by determining a match between (a) the current mode of operation and the determined operational data and (b) the pre-defined modes of operation and the pre-defined operational data. Based on determining the match, antenna tuner controller **160** retrieves corresponding antenna isolation vectors and performs antenna isolation utilizing the corresponding antenna isolation vectors retrieved from the stored data structure.

[0031] In response to determining that wireless communication device **100** is not concurrently providing (a) simultaneous signal transmission and reception and (b) dual signal propagation, antenna tuner controller **160** determines, for the mode of operation, the priority of providing antenna isolation associated with one of: (a) a first transmitter and a first receiver of a single transceiver; and (b) a first transmitter of a first transceiver and a second receiver of a second

transceiver. In response to the determined priority of providing antenna isolation being the first priority, antenna tuner controller **160** performs antenna impedance tuning that provides the corresponding higher level of antenna isolation specified for that mode of operation.

[0032] In one embodiment, antenna tuner controller **160** provides the specified antenna isolation by utilizing preset tuning parameters. These preset tuning parameters are associated with parameters for at least one of: (a) antenna efficiency; (b) total radiated power (TRP) at the corresponding transmitter; and (c) total integrated sensitivity (TIS) at the corresponding receiver. As a result, in addition to providing antenna isolation, antenna tuner controller **160** performs a degree of antenna impedance tuning in order to attain at least one of: (a) a first threshold level of antenna efficiency; (b) a second threshold level of total radiated power (TRP) at a corresponding transmitter; and (c) a third threshold level of total integrated sensitivity (TIS) at a corresponding receiver.

[0033] In one embodiment, antenna tuner controller **160** applies a corresponding pre-established weight to a parameter for antenna isolation and respectively applies pre-established weights to parameters for at least one of: (a) antenna efficiency; (b) total radiated power (TRP) at the corresponding transmitter; and (c) total integrated sensitivity (TIS) at the corresponding receiver. As a result, antenna tuner controller **160** performs antenna impedance tuning utilizing the applied pre-established weights. In one embodiment, the pre-established weights are utilized in order to generate the pre-optimized tuning vectors provided by table **400**.

[0034] In one or more embodiments, antenna tuner controller **160** determines the level of antenna isolation required by monitoring desensitization at a receiver. In response to the desensitization reaching at least a threshold level of desensitization, antenna tuner controller **160**, utilizing the stored data structure, selects tuning vectors to perform antenna impedance tuning that (a) provides a specific level of antenna isolation and (b) reduces the monitored desensitization to an acceptable level of desensitization. In response to the desensitization being less than the threshold level of desensitization, antenna tuner controller **160** selects tuning vectors to perform antenna impedance tuning using a weight applied to a parameter for antenna isolation and weights applied to parameters for at least one of: (a) antenna efficiency; (b) total radiated power (TRP) at the corresponding transmitter; and (c) total integrated sensitivity (TIS) at the corresponding receiver.

[0035] Antenna tuner controller **160** provides at least a minimum inter antenna isolation. The tuning vectors provided are pre-optimized to restrict the tunable section to only operate in pre-determined tuning zones that provide good isolation. Tuning vectors can be pre-optimized to provide a specific or minimum level of antenna isolation to reflect an increased sensitivity to a receiver that may be adversely affected by particular levels of antenna isolation. In one embodiment, antenna controller **160** can monitor the inter-modulation (IM) power and perform antenna tuning to keep the IM power within acceptable limits.

[0036] FIG. 3 is a block diagram illustrating an embodiment of RFIC **132** comprising an antenna isolation block coupled between a transmit antenna port and a receive antenna port, according to one embodiment. RFIC **132** comprises RF transmitter **304** and RF receiver **316**. RFIC **132** also comprises power amplifier **308** and antenna tuner **310**. Antenna tuner **310** is coupled between an output port of power amplifier **308** and antenna **140**. RFIC **132** also comprises antenna tuner **318**, which is coupled between an output port of receiver **316** and antenna **142**. In addition, RFIC **132** comprises antenna isolation circuit **312** coupled between a transmit antenna port corresponding to antenna **140** and a receive antenna port corresponding to antenna **142**. RFIC **132** also comprises antenna tuner controller **160**, which is coupled to antenna tuner **310**, antenna tuner **318** and antenna isolation circuit **312**. Antenna tuner controller **160** receives input signals via input ports **315**.

[0037] Antenna tuner controller **160** can select a second set of tuning vectors that provides a controlled coupling in antenna isolation circuit **312** between antennas **140** and **142**. The controlled coupling is out of phase with the radiated coupling between antennas **140** and **142**, such that the total coupling is cancelled or reduced. In one embodiment, transmitter **304** and receiver **316** are components of two different transceivers. However, in another embodiment, transmitter **304** and receiver **316** are components of a same transceiver. Based on a configuration that includes antenna isolation circuit **312**, antenna tuner controller **160** is able to provide antenna isolation by utilizing (a) a first set of tuning vectors applied at antenna tuners **310** and **318**, and (b) a second set of tuning vectors applied at antenna isolation circuit **312**.

[0038] In one embodiment, antenna isolation circuit **312** comprises a tunable reactance connected between antennas **140** and **142**, and antenna tuner controller **160** selects the second set of tuning vectors that provides a reactance equal to an inverse of an imaginary part of a forward complex transmission coefficient " S_{21} " of a two port network corresponding to antennas **140**

and **142**, at a frequency of operation “ f ”. The reactance “ $Z_{\text{TUNABLE ISOLATION}}(f)$ ” is similarly described using the following equation:

$$Z_{\text{TUNABLE ISOLATION}}(f) = -1 * \text{Im}[S_{21}(f)].$$

The reactance is provided to enable parallel resonance to be attained. In another embodiment antenna isolation circuit **312** comprises a switchable reactance. In yet another embodiment antenna isolation circuit **312** comprises a programmable attenuator. In one embodiment, antenna tuner controller **160** accesses a stored data structure (e.g., table **400**) to obtain the appropriate tuning vectors.

[0039] Antenna tuner controller **160** provides, utilizing the selected tuning vectors, higher antenna isolation between a corresponding transmitter and a corresponding receiver. The frequency of operation f associated with providing antenna isolation is at least one of: (a) a transmitter frequency utilized for transmit signal **322**; and (b) a known interfering frequency detectable within receive signal **323** at a corresponding receiver. Antenna tuner controller **160** performs antenna isolation tuned to the transmitter frequency in order to (a) minimize the transmit signal measured at the receiver and (b) reduce blocking signals at the corresponding receiver generated from an intermodulation of a transmitter signal with jamming signals (e.g., jamming signal **325**) from a corresponding antenna.

[0040] **FIG. 4** is a table mapping pre-defined modes of operation with associated priorities of providing antenna isolation, and which provides corresponding tuning vectors, according to one embodiment. In one embodiment, table **400** provides tuning vectors that are determined using calculations and/or empirical methods. In particular, the tuning vectors are values that have been demonstrated in experiments and/or simulations to provide an acceptable level of performance in minimizing interference affecting signal reception when the wireless communication device communicates within a specific mode of operation. Table **400** provides, in a first column, pre-defined modes of operation and, in a second column, operational data that define operating conditions and/or an operating environment of wireless communication device **100**. Table **400** identifies a mode of operation by a number of concurrently utilized radio access technologies (RATs). In the second column, table **400** provides parameters, vectors of parameter values, and a corresponding state associated with the operational data. In addition, table **400** provides, in a third column, an associated priority for performing antenna isolation and, in a fourth column, tuning vectors that provide a corresponding antenna isolation.

[0041] Referring specifically to table 400, first row 402 of table 400 describes a specific mode of operation identified as “Mode 1”. Mode 1 is defined by concurrent utilization of two specific wireless communication technologies or RATs. In particular, “Mode 1” is defined by concurrent utilization of (a) a second generation (2G) RAT such as CDMA and (b) a fourth generation (4G) RAT such as carrier aggregation. A mode of operation may be defined more generally by a level of network assignment of hardware resources and/or of transmit and receive operations. First row 402 also provides operational data that represents a “State 2” operating environment or condition while wireless communication device 100 operates in Mode 1.

[0042] In one embodiment, the operational data is associated with (a) frequency bands of operation, (b) a user position affecting antenna impedance, and (c) an application being run on the wireless communication device. As a result, in one implementation, *parameter_a* provides information that identifies the frequency bands of operation, *parameter_b* provides information about a de-tuning impact corresponding to user position affecting antenna impedance and *parameter_c* provides information about an application being executed on wireless communication device 100. First row 402 also provides a vector of values corresponding to each specific parameter. For example, a pre-defined operating or operational state, “State 2”, is identified in which state *parameter_a* is equal to *vector-a1*. For a particular mode of operation, these vectors of values associated with each respective parameter collectively define a particular state for operating conditions in wireless communication device 100. First row 402 shows that, based on the mode of operation and on the operational data, the priority for performing antenna isolation is high and the appropriate tuning vector is identified as vector *A1*. Second row 404 and third row 406 both describe “Mode 2”. Mode 2 is defined by concurrent utilization of 3G and 4G. However, based on differences in the respective operational data provided by second row 404 and third row 406, the tuning vectors for providing corresponding antenna isolation differ, although the priority for performing antenna isolation is high, in both cases. In particular, second row 404 identifies operational data that places wireless communication device 100 in operational “State 2”. However, third row 406 identifies operational data that places wireless communication device 100 in operational “State 3”. Tuning vector *B1* correspond to second row 404, while tuning vector *B2* correspond to third row 406.

[0043] Fourth row **408** describes “Mode 3”. Mode 3 is associated with a low priority for performing antenna isolation. In one embodiment, antenna tuner controller **160** accesses table **400** if the mode of operation and/or the network assignment of hardware and/or transmit/receive operations exceed a threshold level. In one or more embodiments, the priority of performing antenna isolation may be designated as “high” if the network assignment of hardware and/or transmit/receive operations exceed a threshold level and designated as “low” if the network assignment of hardware and/or transmit/receive operations does not exceed the threshold level.

[0044] In response to determining that wireless communication device **100** concurrently provides (a) simultaneous signal transmission and reception and (b) dual signal propagation, the antenna tuner controller determines a mode of operation, which is associated with concurrent utilization of at least one wireless communications technology. Antenna tuner controller **160** accesses a stored data structure (e.g., table **400**) that identifies pre-defined modes of operation, maps the pre-defined modes of operation to pre-defined operational data and associates the pre-defined modes of operation mapped to pre-determined operational data to corresponding priorities of providing antenna isolation. In addition, antenna tuner controller **160** uses the stored data structure, table **400**, to identify antenna tuning vectors associated with a specific level of antenna isolation for the mode of operation.

[0045] In one embodiment, antenna tuner controller **160** performs a first antenna tuning by searching for a match between (a) the current mode of operation and the determined operational data and (b) the pre-defined modes of operation and the pre-defined operational data within table **400**. Based on identifying the match, antenna tuner controller **160** retrieves corresponding antenna isolation vectors and performs antenna isolation utilizing the corresponding antenna isolation vectors retrieved from table **400**.

[0046] In one or more embodiments, antenna tuner controller **160** determines the level of antenna isolation required by monitoring desensitization at a receiver. In response to the desensitization reaching at least a threshold level of desensitization, antenna tuner controller **160** utilizes a stored data structure table **400** identifying pre-determined desensitization levels mapped to the appropriate tuning vectors, in order to select the appropriate tuning vectors. Antenna tuner controller **160** uses the selected tuning vectors to perform antenna impedance

tuning that (a) provides a specific level of antenna isolation and (b) reduces the monitored desensitization to an acceptable level of desensitization.

[0047] In one embodiment, antenna tuner controller **160** provides, within table **400**, a first set of tuning vectors for a first set of antenna tuners (**310** and **318**), and a second set of tuning vectors for antenna isolation circuits **312** respectively coupled between antenna feeds of corresponding pairs of antennas. In another embodiment, separate tables are utilized for respective tuning vectors. In one embodiment, when RFIC **132** includes the first set of antenna tuners (**310** and **318**) and antenna isolation circuit **312**, each of the first set and second set of tuning vectors is pre-determined based on the selected or selectable vector values corresponding to the other set of tuning vectors. In one embodiment, the first set of tuning vectors comprises a single vector having values that are respectively applied to two antenna tuners (tuners **310** and **318**). In another embodiment, the first set of tuning vectors comprises two vectors that are respectively applied to two antenna tuners (tuners **310** and **318**).

[0048] **FIG. 5** is a flow chart illustrating one embodiment of the method by which the above processes of the illustrative embodiments can be implemented. Specifically, **FIG. 5** illustrates one embodiment of a method for providing antenna isolation to minimize interference affecting signal reception within a wireless communication device, according to one embodiment. Although the method illustrated by **FIG. 5** may be described with reference to components and functionality illustrated by and described in reference to **FIGs. 1-4**, it should be understood that this is merely for convenience and alternative components and/or configurations thereof can be employed when implementing the method. Certain portions of the methods may be completed by AIC utility **167** executing on one or more processors (processor **105** or DSP **128**) within wireless communication device **100** (**FIG. 1**), or a processing unit or antenna tuner controller **160** of RFIC **132** (**FIG. 1** and **2**). The executed processes then control specific operations of or on RFIC **132**. For simplicity in describing the method, all method processes are described from the perspective of RFIC **132** and specifically antenna tuner controller **160**.

[0049] The method of **FIG. 5** begins at initiator block **501** and proceeds to decision block **502** at which antenna tuner controller **160** determines whether wireless communication device **100** concurrently provides (a) simultaneous signal transmission and reception and (b) dual signal propagation. In response to determining that the wireless communication device concurrently

provides (a) simultaneous signal transmission and reception and (b) dual signal propagation, antenna tuner controller **160** determines a current mode of operation corresponding to simultaneous signal transmission and reception and the dual signal propagation (block **504**). Antenna tuner controller **160** identifies and/or determines operational data that includes at least one of (a) frequency bands of operation, and (b) a user position affecting antenna impedance, and (c) an application being run on the wireless communication device (block **506**). The operational data defines the operational environment of wireless communication device **100**. Based on determining the mode of operation, at decision block **508**, antenna tuner controller **160** determines, utilizing a stored data structure (e.g., table **400**), whether there is a high priority for performing antenna isolation to minimize interference affecting signal reception when the mode of operation occurs in wireless communication device **100**. In response to the priority for performing antenna isolation being a first or high priority as determined at decision block **508**, antenna tuner controller **160**, utilizing tuning vectors retrieved from table **400**, performs a first antenna impedance tuning that provides a corresponding high degree of antenna isolation (block **510**). In response to the priority for performing antenna isolation being a second or low priority, antenna tuner controller **160** performs a second antenna impedance tuning that provides a corresponding lower degree of antenna isolation (block **512**). In one embodiment, antenna tuner controller **160** selects tuning vectors according to the mode of operation and the operational data. The process ends at block **514**.

[0050] The flowchart and block diagrams in the various figures presented and described herein illustrate the architecture, functionality, and operation of possible implementations of systems, methods and computer program products according to various embodiments of the present disclosure. In this regard, each block in the flowcharts or block diagrams may represent a module, segment, or portion of code, which comprises one or more executable instructions for implementing the specified logical function(s). It should also be noted that, in some alternative implementations, the functions noted in the block may occur out of the order noted in the figures. For example, two blocks shown in succession may, in fact, be executed substantially concurrently, or the blocks may sometimes be executed in the reverse order, depending upon the functionality involved. Thus, while the method processes are described and illustrated in a particular sequence, use of a specific sequence of processes is not meant to imply any limitations on the disclosure. Changes may be made with regards to the sequence of processes without

departing from the spirit or scope of the present disclosure. Use of a particular sequence is therefore, not to be taken in a limiting sense, and the scope of the present disclosure extends to the appended claims and equivalents thereof.

[0051] In some implementations, certain processes of the methods are combined, performed simultaneously or in a different order, or perhaps omitted, without deviating from the spirit and scope of the disclosure. It will also be noted that each block of the block diagrams and/or flowchart illustration, and combinations of blocks in the block diagrams and/or flowchart illustration, can be implemented by special purpose hardware-based systems that perform the specified functions or acts, or combinations of special purpose hardware and computer instructions.

[0052] While the disclosure has been described with reference to exemplary embodiments, it will be understood by those skilled in the art that various changes may be made and equivalents may be substituted for elements thereof without departing from the scope of the disclosure. In addition, many modifications may be made to adapt a particular system, device or component thereof to the teachings of the disclosure without departing from the essential scope thereof. Therefore, it is intended that the disclosure not be limited to the particular embodiments disclosed for carrying out this disclosure, but that the disclosure will include all embodiments falling within the scope of the appended claims. Moreover, the use of the terms first, second, etc. do not denote any order or importance, but rather the terms first, second, etc. are used to distinguish one element from another.

[0053] The terminology used herein is for the purpose of describing particular embodiments only and is not intended to be limiting of the disclosure. As used herein, the singular forms "a", "an" and "the" are intended to include the plural forms as well, unless the context clearly indicates otherwise. It will be further understood that the terms "comprises" and/or "comprising," when used in this specification, specify the presence of stated features, integers, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, integers, steps, operations, elements, components, and/or groups thereof.

[0054] The corresponding structures, materials, acts, and equivalents of all means or step plus function elements in the claims below are intended to include any structure, material, or act for performing the function in combination with other claimed elements as specifically claimed. The description of the present disclosure has been presented for purposes of illustration and

description, but is not intended to be exhaustive or limited to the disclosure in the form disclosed. Many modifications and variations will be apparent to those of ordinary skill in the art without departing from the scope and spirit of the disclosure. The embodiment was chosen and described in order to best explain the principles of the disclosure and the practical application, and to enable others of ordinary skill in the art to understand the disclosure for various embodiments with various modifications as are suited to the particular use contemplated.

CLAIMS

What is claimed is:

1. A method for providing antenna impedance tuning in a wireless communication device having at least one transceiver, the method comprising:

determining if the wireless communication device concurrently provides (a) simultaneous signal transmission and reception and (b) dual signal propagation;

in response to determining that the wireless communication device concurrently provides (a) simultaneous signal transmission and reception and (b) dual signal propagation:

determining a mode of operation of the wireless communication device associated with said simultaneous signal transmission and reception and said dual signal propagation, wherein the mode of operation provides an associated interference affecting signal reception within the wireless communication device while the wireless communication device communicates in that mode of operation ; and

identifying a priority for performing antenna isolation to minimize interference affecting signal reception when the wireless communication device communicates using the determined mode of operation;

in response to the priority for performing antenna isolation being a first priority, performing a first antenna impedance tuning that provides a corresponding degree of antenna isolation, wherein the first priority is greater than a second priority, which second priority triggers a second antenna impedance tuning that provides a lower degree of antenna isolation than the first antenna impedance.

2. The method of Claim 1, further comprising:

determining, for the mode of operation, the priority for providing at least one of: (a) a first antenna isolation associated with a transmitter and a receiver of a single transceiver; and (b) a second antenna isolation associated with a transmitter of a first transceiver and a receiver of a second transceiver; and

in response to the priority for providing at least one of the first antenna isolation and the second antenna isolation during the mode of operation being the first priority, performing

antenna impedance tuning that provides a pre-determined degree of antenna isolation that corresponds to at least one of the first antenna isolation and the second antenna isolation.

3. The method of Claim 1, wherein:

the determining further comprises determining operational data that includes at least one of (a) frequency bands of operation, and (b) a user position affecting antenna impedance, and (c) an application being run on the wireless communication device, and

identifying a priority comprises accessing a stored data structure that identifies pre-defined modes of operation, maps the pre-defined modes of operation to pre-defined operational data, associates the pre-defined modes of operation that are mapped to pre-determined operational data to corresponding priorities of providing antenna isolation, and identifies antenna isolation vectors associated with a specific level of antenna isolation for the at least one mode of operation; and

performing a first antenna tuning comprises: identifying a match between (a) the mode of operation and the determined operational data and (b) the pre-defined modes of operation and the pre-defined operational data; in response to identifying the match, retrieving corresponding antenna isolation vectors; and performing antenna isolation utilizing the corresponding antenna isolation vectors retrieved from the stored data structure.

4. The method of Claim 1, further comprising:

in response to determining that the wireless communication device is not concurrently providing (a) simultaneous signal transmission and reception and (b) dual signal propagation, determining, for the mode of operation, the priority of providing antenna isolation associated with one of (a) a first transmitter and a first receiver of a single transceiver; and (b) a first transmitter of a first transceiver and a second receiver of a second transceiver; and

in response to determining the priority of providing antenna isolation, performing antenna impedance tuning that provides a corresponding level of antenna isolation specified for the mode of operation.

5. The method of Claim 1, wherein said performing antenna impedance tuning further comprises:

providing a specified antenna isolation; and

performing a degree of antenna impedance tuning in order to attain at least one of: (a) a first threshold level of antenna efficiency; (b) a second threshold level of total radiated power (TRP) at a corresponding transmitter; and (c) a third threshold level of total integrated sensitivity (TIS) at a corresponding receiver.

6. The method of Claim 5, further comprising:

respectively applying pre-established weights to parameters for antenna isolation and at least one of: (a) antenna efficiency; (b) total radiated power (TRP) at the corresponding transmitter; and (c) total integrated sensitivity (TIS) at the corresponding receiver; and

performing antenna impedance tuning utilizing the applied pre-established weights.

7. The method of Claim 6, further comprising:

monitoring desensitization at a receiver;

selecting tuning vectors to perform antenna impedance tuning that (a) provides a specific level of antenna isolation and (b) reduces the monitored desensitization to an acceptable level of desensitization; and

in response to the desensitization being less than a threshold level of desensitization, selecting tuning vectors to perform antenna impedance tuning using a weight applied to a parameter for antenna isolation and weights applied to parameters for at least one of: (a) antenna efficiency; (b) total radiated power (TRP) at the corresponding transmitter; and (c) total integrated sensitivity (TIS) at the corresponding receiver.

8. The method of Claim 1, further comprising:

selecting tuning vectors that provides a corresponding reactance equal to an inverse of an imaginary part of a forward complex transmission coefficient " S_{21} " of a corresponding two port antenna network, at a frequency of operation " f ", wherein said corresponding reactance is provided to enable parallel resonance to be attained;

providing, utilizing the selected tuning vectors, a maximum antenna isolation between a corresponding transmitter and a corresponding receiver;

wherein the frequency of operation f associated with providing antenna isolation is at least one of: (a) a transmitter frequency; and (b) a known interfering frequency detectable at a corresponding receiver; and

wherein said performing antenna isolation occurs at the transmitter frequency in order to (a) minimize the transmit signal measured at the receiver and (b) reduce blocking signals at the corresponding receiver generated from an intermodulation of a transmitter signal with jamming signals from a corresponding antenna.

9. A radio frequency integrated circuit (RFIC) comprising:

at least one transceiver;

an antenna tuner capable of providing a plurality of antenna tuning states and specific degrees of antenna isolation; and

an antenna tuner controller that:

determines if the wireless communication device concurrently provides (a) simultaneous signal transmission and reception and (b) dual signal propagation;

in response to determining that the wireless communication device concurrently provides (a) simultaneous signal transmission and reception and (b) dual signal propagation:

determines a mode of operation of the wireless communication device associated with said simultaneous signal transmission and reception and said dual signal propagation, wherein the mode of operation provides an associated interference affecting signal reception within the wireless communication device while the wireless communication device communicates in that mode; and

identifies a priority for performing antenna isolation to minimize interference affecting signal reception when the wireless communication device communicates using the determined mode of operation;

in response to the priority for performing antenna isolation being a first priority, performs a first antenna impedance tuning that provides a corresponding degree of antenna isolation, wherein the first priority is greater than a second priority, which second

priority triggers a second antenna impedance tuning that provides a lower degree of antenna isolation than the first antenna impedance.

10. The RFIC of Claim 9, wherein the antenna tuner controller:

determines, for the mode of operation, the priority for providing at least one of: (a) a first antenna isolation associated with a transmitter and a receiver of a single transceiver; and (b) a second antenna isolation associated with a transmitter of a first transceiver and a receiver of a second transceiver; and

in response to the priority for providing at least one of the first antenna isolation and the second antenna isolation during the mode of operation being the first priority, performs antenna impedance tuning that provides a pre-determined degree of antenna isolation that corresponds to at least one of the first antenna isolation and the second antenna isolation.

11. The RFIC of Claim 9, wherein the antenna tuner controller:

determines operational data that includes at least one of (a) frequency bands of operation, and (b) a user position affecting antenna impedance, and (c) an application being run on the wireless communication device, and

identifies a priority by accessing a stored data structure that identifies pre-defined modes of operation, mapping the pre-defined modes of operation to pre-defined operational data, associating the pre-defined modes of operation that are mapped to pre-determined operational data to corresponding priorities of providing antenna isolation, and identifying antenna isolation vectors associated with a specific level of antenna isolation for the at least one mode of operation; and

performs a first antenna tuning by: identifying a match between (a) the mode of operation and the determined operational data and (b) the pre-defined modes of operation and the pre-defined operational data; in response to identifying the match, retrieving corresponding antenna isolation vectors; and performing antenna isolation utilizing the corresponding antenna isolation vectors retrieved from the stored data structure.

12. The RFIC of Claim 9, wherein the antenna tuner controller:

in response to determining that the wireless communication device is not concurrently providing (a) simultaneous signal transmission and reception and (b) dual signal propagation, determines, for the mode of operation, the priority of providing antenna isolation associated with one of (a) a first transmitter and a first receiver of a single transceiver; and (b) a first transmitter of a first transceiver and a second receiver of a second transceiver; and

in response to determining the priority of providing antenna isolation, performs antenna impedance tuning that provides a corresponding level of antenna isolation specified for the mode of operation.

13. The RFIC of Claim 9, wherein the antenna tuner controller:

monitors desensitization at a receiver;

selects tuning vectors to perform antenna impedance tuning that (a) provides a specific level of antenna isolation and (b) reduces the monitored desensitization to an acceptable level of desensitization; and

in response to the desensitization being less than a threshold level of desensitization, selects tuning vectors to perform antenna impedance tuning using a weight applied to a parameter for antenna isolation and weights applied to parameters for at least one of: (a) antenna efficiency; (b) total radiated power (TRP) at the corresponding transmitter; and (c) total integrated sensitivity (TIS) at the corresponding receiver;

provides, utilizing preset tuning parameters, a specified antenna isolation; and

performs a degree of antenna impedance tuning in order to attain at least one of: (a) a first threshold level of antenna efficiency; (b) a second threshold level of total radiated power (TRP) at a corresponding transmitter; and (c) a third threshold level of total integrated sensitivity (TIS) at a corresponding receiver;

wherein the antenna tuner controller performs the degree of antenna impedance tuning by: respectively applying pre-established weights to parameters for antenna isolation and at least one of: (a) antenna efficiency; (b) total radiated power (TRP) at the corresponding transmitter; and (c) total integrated sensitivity (TIS) at the corresponding receiver; and performing antenna impedance tuning utilizing the applied pre-established weights.

14. The RFIC of Claim 9, wherein the antenna tuner controller:

selects tuning vectors that provides a corresponding reactance equal to an inverse of an imaginary part of a forward complex transmission coefficient " S_{21} " of a corresponding two port antenna network, at a frequency of operation " f ", wherein said corresponding reactance is provided to enable parallel resonance to be attained;

provides, utilizing the selected tuning vectors, a maximum antenna isolation between a corresponding transmitter and a corresponding receiver;

wherein the frequency of operation f associated with providing antenna isolation is at least one of: (a) a transmitter frequency; and (b) a known interfering frequency detectable at a corresponding receiver; and

wherein said performing antenna isolation occurs at the transmitter frequency in order to (a) minimize the transmit signal measured at the receiver and (b) reduce blocking signals at the corresponding receiver generated from an intermodulation of a transmitter signal with jamming signals from a corresponding antenna.

15. A wireless communication device having a radio frequency integrated circuit (RFIC) coupled to at least two antennas and which includes:

at least one processor;

at least one transceiver;

an antenna tuner capable of providing a plurality of antenna tuning states and specific degrees of antenna isolation; and

an antenna tuner controller that:

determines if the wireless communication device concurrently provides (a) simultaneous signal transmission and reception and (b) dual signal propagation;

in response to determining that the wireless communication device concurrently provides (a) simultaneous signal transmission and reception and (b) dual signal propagation:

determines a mode of operation of the wireless communication device associated with said simultaneous signal transmission and reception and said dual signal propagation, wherein the mode of operation provides an associated interference affecting signal reception within the wireless communication device while the wireless communication device communicates in that mode; and

identifies a priority for performing antenna isolation to minimize interference affecting signal reception when the wireless communication device communicates using the determined mode of operation;

in response to the priority for performing antenna isolation being a first priority, performs a first antenna impedance tuning that provides a corresponding degree of antenna isolation, wherein the first priority is greater than a second priority, which second priority triggers a second antenna impedance tuning that provides a lower degree of antenna isolation than the first antenna impedance.

16. The wireless communication device of Claim 15, wherein the antenna tuner controller:

determines, for the mode of operation, the priority for providing at least one of: (a) a first antenna isolation associated with a transmitter and a receiver of a single transceiver; and (b) a second antenna isolation associated with a transmitter of a first transceiver and a receiver of a second transceiver; and

in response to the priority for providing at least one of the first antenna isolation and the second antenna isolation during the mode of operation being the first priority, performs antenna impedance tuning that provides a pre-determined degree of antenna isolation that corresponds to at least one of the first antenna isolation and the second antenna isolation.

17. The wireless communication device of Claim 15, wherein the antenna tuner controller:

determines operational data that includes at least one of (a) frequency bands of operation, and (b) a user position affecting antenna impedance, and (c) an application being run on the wireless communication device, and

identifies a priority by accessing a stored data structure that identifies pre-defined modes of operation, mapping the pre-defined modes of operation to pre-defined operational data, associating the pre-defined modes of operation that are mapped to pre-determined operational data to corresponding priorities of providing antenna isolation, and identifying antenna isolation vectors associated with a specific level of antenna isolation for the at least one mode of operation; and

performs a first antenna tuning by: identifying a match between (a) the mode of operation and the determined operational data and (b) the pre-defined modes of operation and the pre-

defined operational data; in response to identifying the match, retrieving corresponding antenna isolation vectors; and performing antenna isolation utilizing the corresponding antenna isolation vectors retrieved from the stored data structure.

18. The wireless communication device of Claim 15, wherein the antenna tuner controller:

in response to determining that the wireless communication device is not concurrently providing (a) simultaneous signal transmission and reception and (b) dual signal propagation, determines, for the mode of operation, the priority of providing antenna isolation associated with one of (a) a first transmitter and a first receiver of a single transceiver; and (b) a first transmitter of a first transceiver and a second receiver of a second transceiver; and

in response to determining the priority of providing antenna isolation, performs antenna impedance tuning that provides a corresponding level of antenna isolation specified for the mode of operation.

19. The wireless communication device of Claim 15, wherein the antenna tuner controller:

monitors desensitization at a receiver;

selects tuning vectors to perform antenna impedance tuning that (a) provides a specific level of antenna isolation and (b) reduces the monitored desensitization to an acceptable level of desensitization; and

in response to the desensitization being less than a threshold level of desensitization, selects tuning vectors to perform antenna impedance tuning using a weight applied to a parameter for antenna isolation and weights applied to parameters for at least one of: (a) antenna efficiency; (b) total radiated power (TRP) at the corresponding transmitter; and (c) total integrated sensitivity (TIS) at the corresponding receiver;

provides, utilizing preset tuning parameters, a specified antenna isolation; and

performs a degree of antenna impedance tuning in order to attain at least one of: (a) a first threshold level of antenna efficiency; (b) a second threshold level of total radiated power (TRP) at a corresponding transmitter; and (c) a third threshold level of total integrated sensitivity (TIS) at a corresponding receiver;

wherein the antenna tuner controller performs the degree of antenna impedance tuning by: respectively applying pre-established weights to parameters for antenna isolation and at least

one of: (a) antenna efficiency; (b) total radiated power (TRP) at the corresponding transmitter; and (c) total integrated sensitivity (TIS) at the corresponding receiver; and performing antenna impedance tuning utilizing the applied pre-established weights.

20. The wireless communication device of Claim 15, wherein the antenna tuner controller:

selects tuning vectors that provides a corresponding reactance equal to an inverse of an imaginary part of a forward complex transmission coefficient " S_{21} " of a corresponding two port antenna network, at a frequency of operation " f ", wherein said corresponding reactance is provided to enable parallel resonance to be attained;

provides, utilizing the selected tuning vectors, a maximum antenna isolation between a corresponding transmitter and a corresponding receiver;

wherein the frequency of operation f associated with providing antenna isolation is at least one of: (a) a transmitter frequency; and (b) a known interfering frequency detectable at a corresponding receiver; and

wherein said performing antenna isolation occurs at the transmitter frequency in order to (a) minimize the transmit signal measured at the receiver and (b) reduce blocking signals at the corresponding receiver generated from an intermodulation of a transmitter signal with jamming signals from a corresponding antenna.

FIG. 1

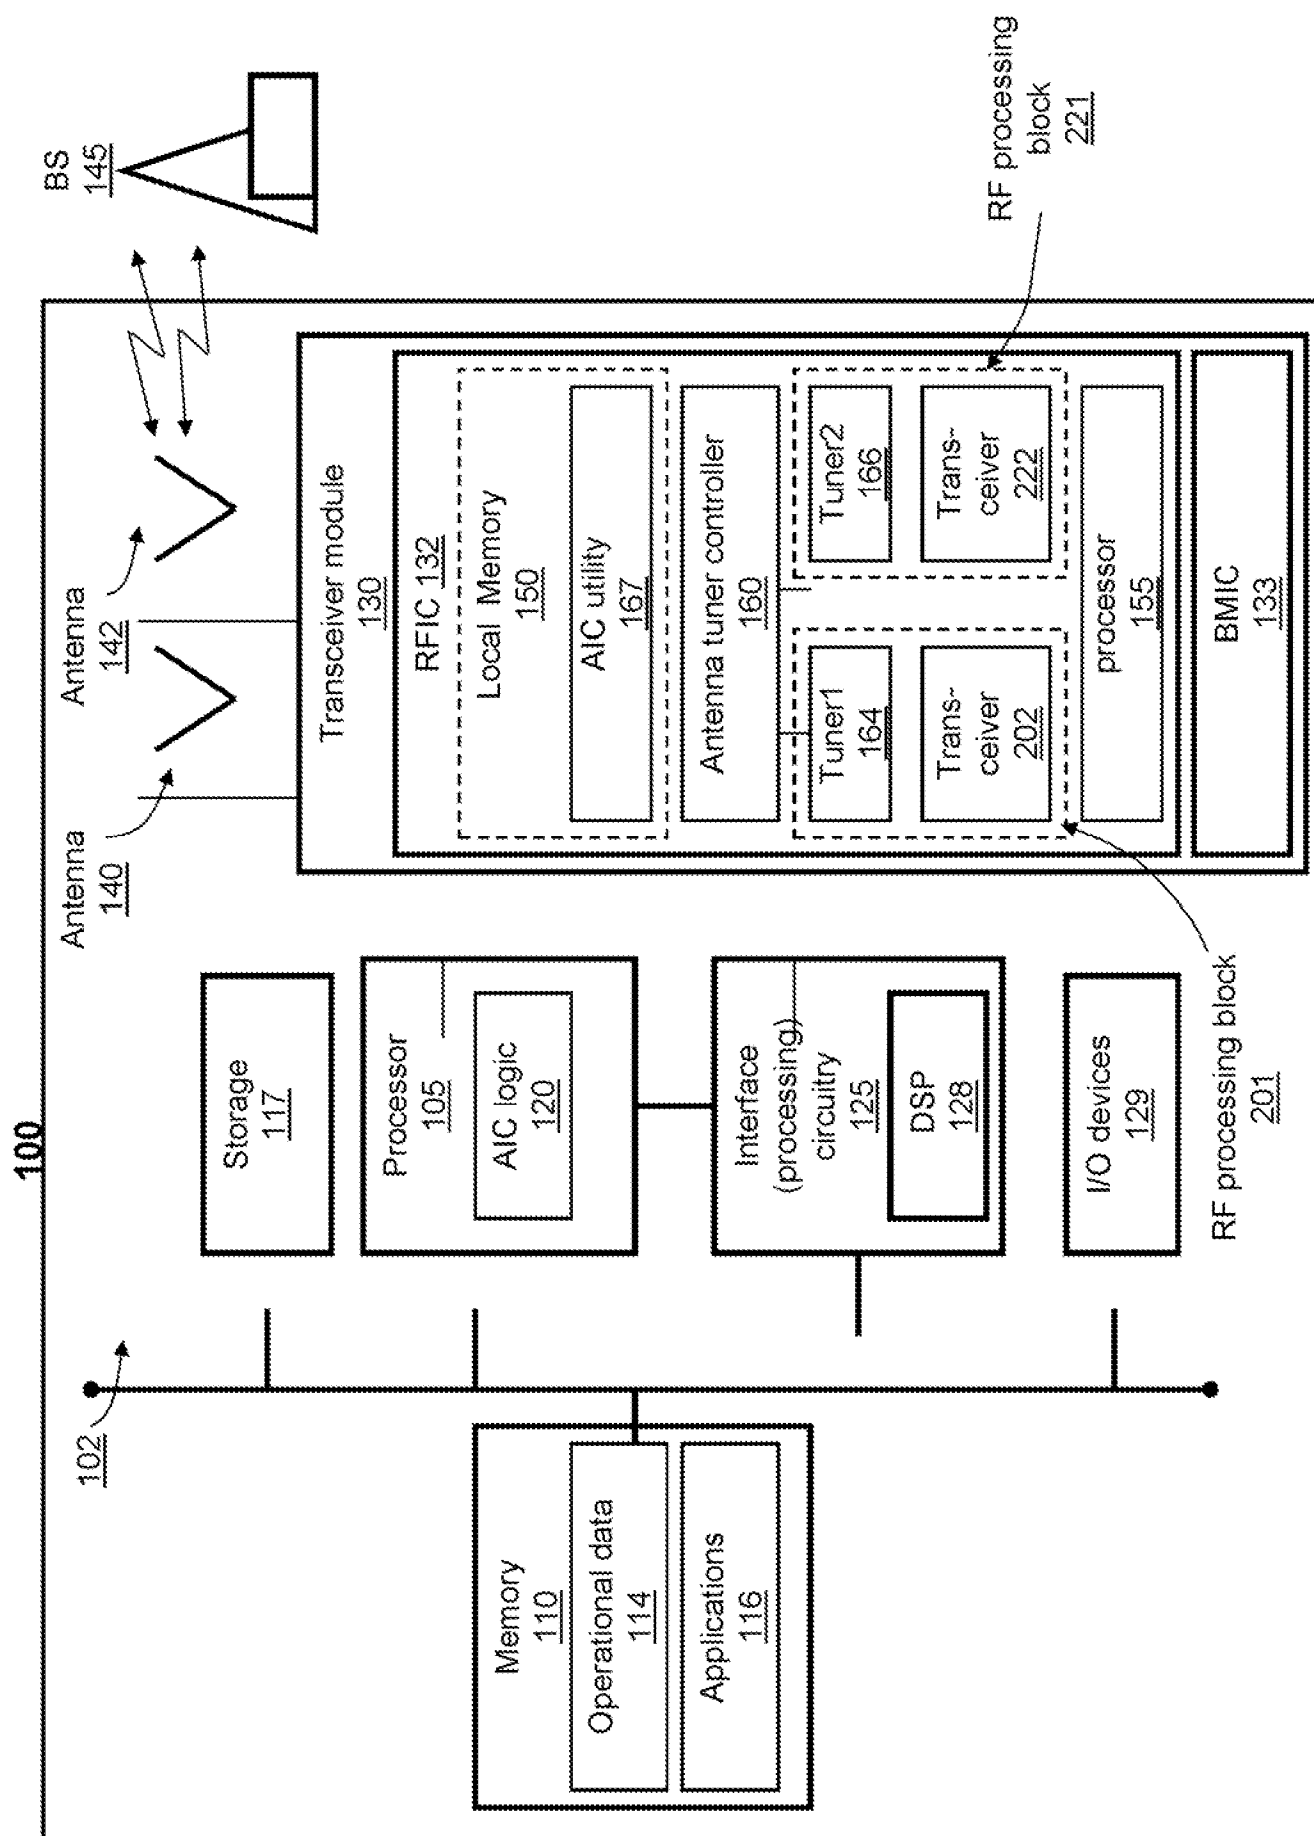


FIG. 2

132

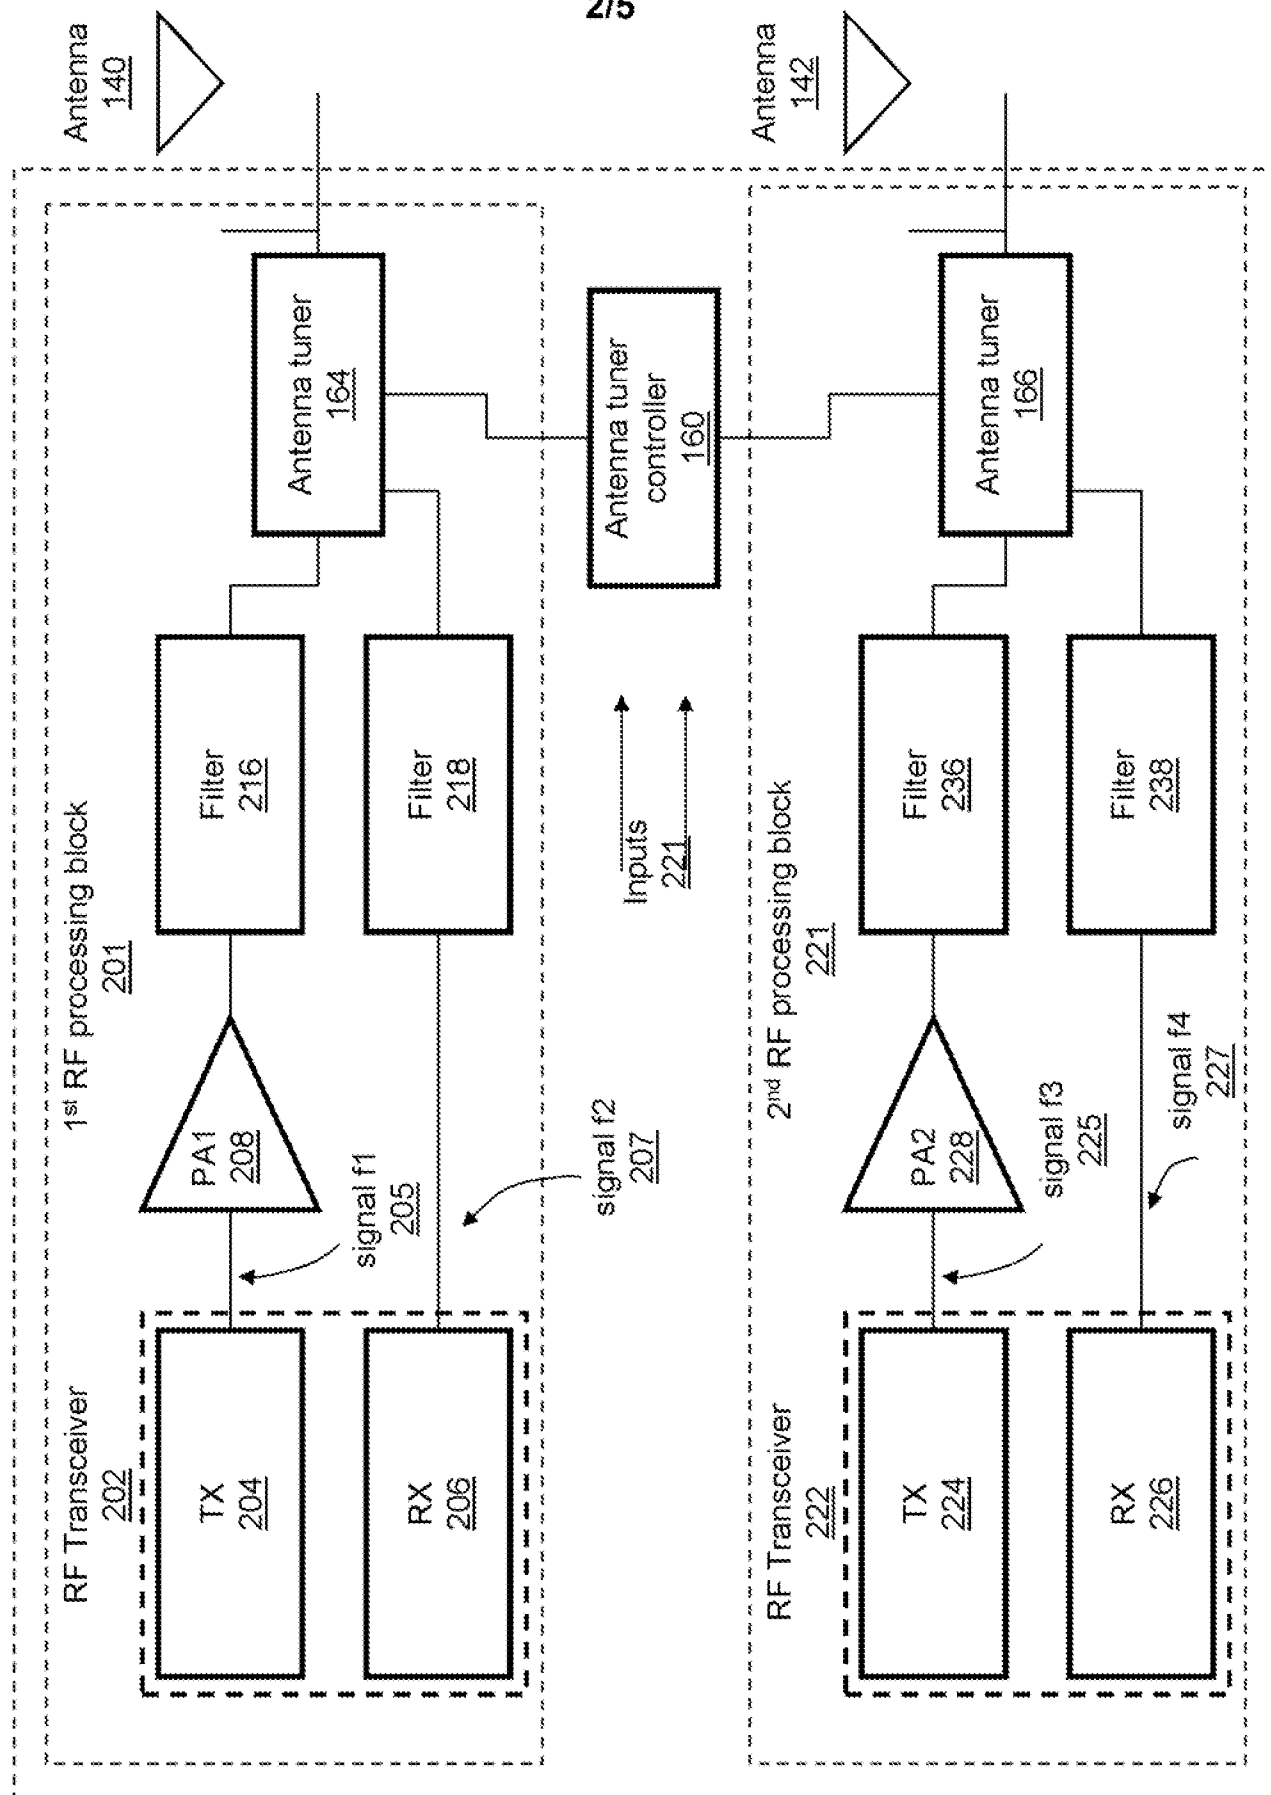


FIG. 3

132


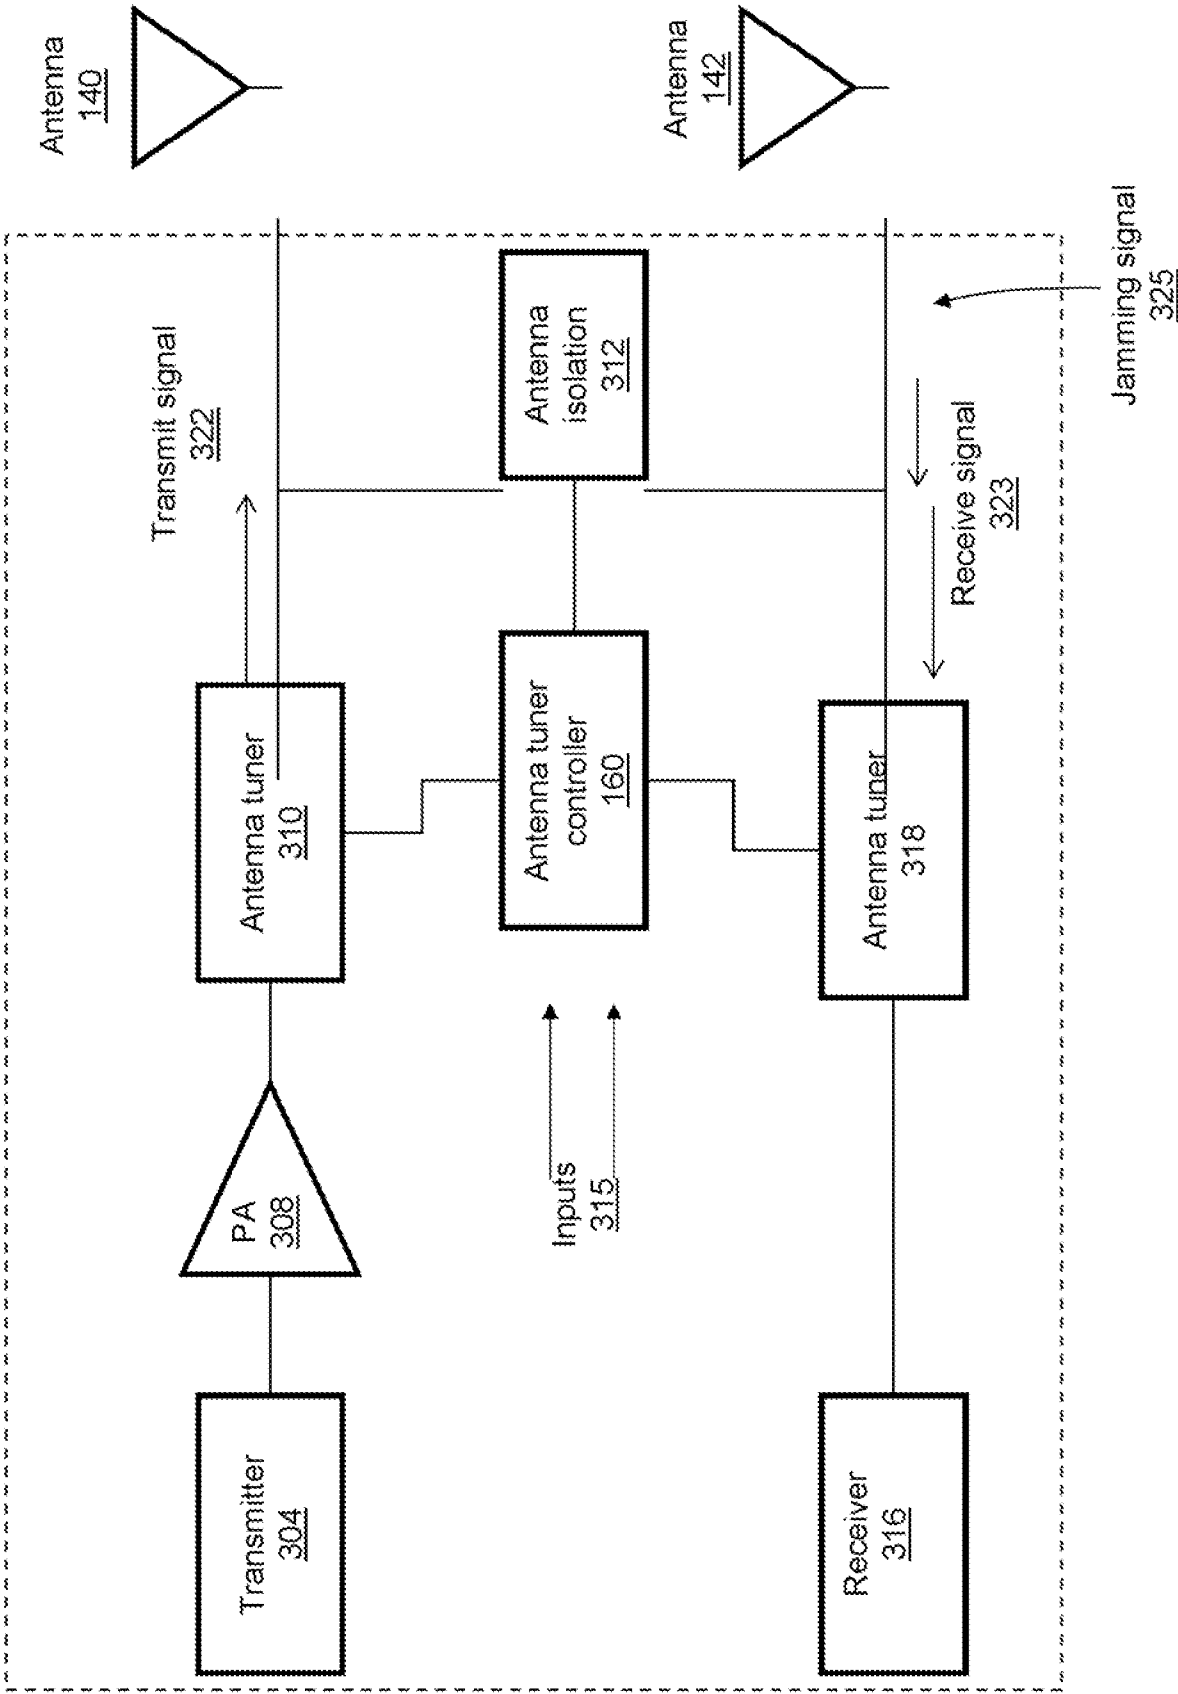


FIG. 4

400

Mode of Operation: [Active wireless Comm. Tech]	Operational data	Priority of performing isolation	Tuning and isolation vectors [first set, second set]
<u>Mode 1</u> 2G+ 4G carrier aggregation	<u>State 2</u> parameter_a = vector a1 parameter_b = vector b2 parameter_c = vector c2	high	vector A1, vector alpha1
<u>Mode 2</u> 3G + 4G	<u>State 2</u> parameter_a = vector a1 parameter_b = vector b2 parameter_c = vector c2	high	vector B1, vector beta1
<u>Mode 2</u> 3G + 4G	<u>State 3</u> parameter_a=vector a2 parameter_b=vector b3 parameter_c=vector c2	high	vector B2, vector beta2
<u>Mode 3</u> 2G, 3G, 4G LTE	<u>State 1</u> parameter_a = vector a1 parameter_b = vector b2 parameter_c = vector c2	low	vector E3, vector epsilon 3
<u>Mode 4</u> 4G carrier aggregation	<u>State 2</u> parameter_a = vector a1 parameter_b = vector b2 parameter_c = vector c2	high	vector C3, vector gamma 3
.....			

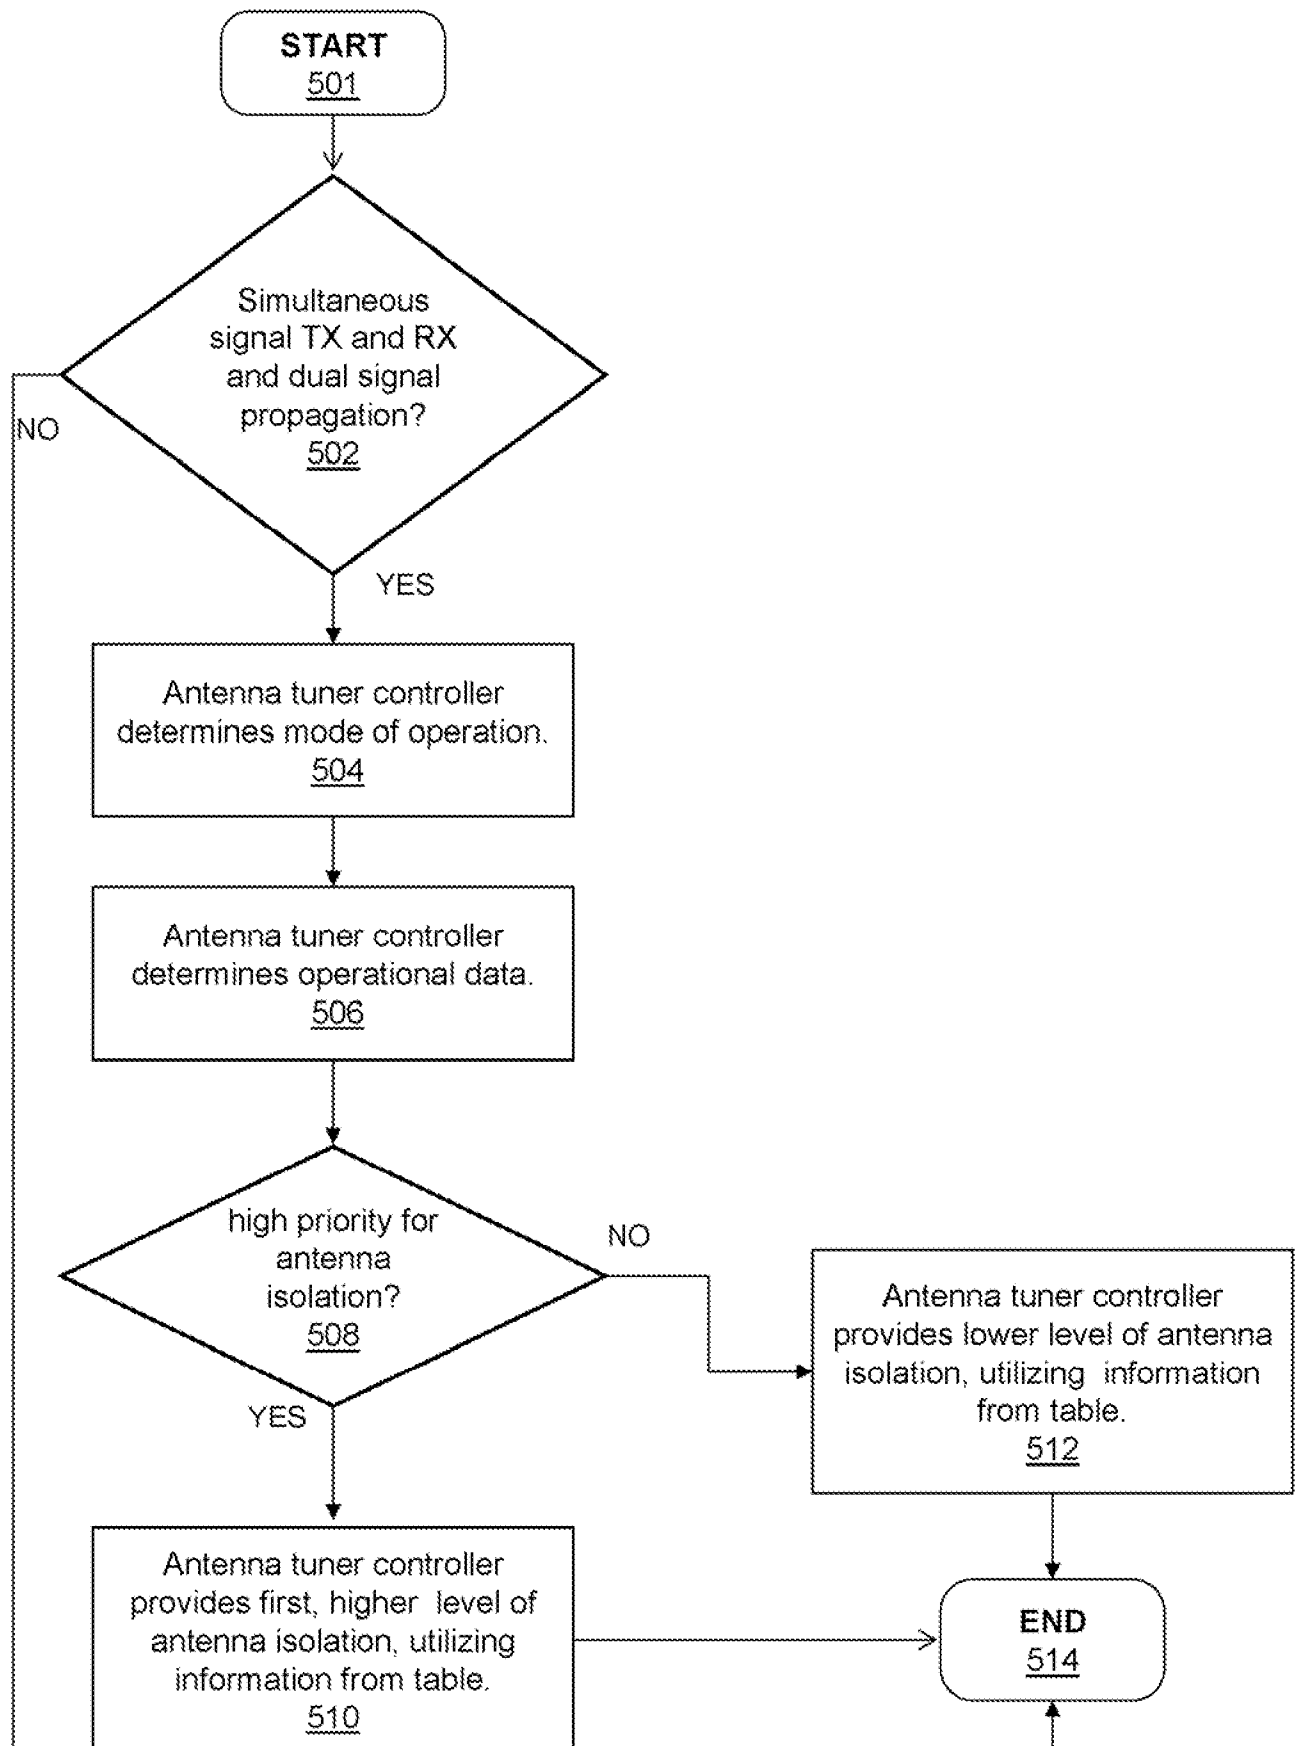

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2013/053706

A. CLASSIFICATION OF SUBJECT MATTER
INV. H04B1/52 H04B1/18
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2012/188917 A1 (KNOX MICHAEL E [US]) 26 July 2012 (2012-07-26) abstract paragraph [0082] - paragraph [0087]; figures 2a, 2b paragraph [0100] paragraph [0164] - paragraph [0188] paragraph [0019] paragraph [0038] - paragraph [0043] ----- -/-	1-20



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

28 October 2013

Date of mailing of the international search report

04/11/2013

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Ayala Perriello, M

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2013/053706

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	ALCATEL-LUCENT: "Harmonics and Intermodulation Products caused by LTE Advanced Carrier Aggregation of Band 2, 4 or 5 plus additional new 716-728 downlink", 3GPP DRAFT; R4-113984, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS CEDEX ; FRANCE, vol. RAN WG4, no. Athens, Greece; 20110822, 17 August 2011 (2011-08-17), XP050543186, [retrieved on 2011-08-17] paragraph [02.3] -----	1-20
A	WO 01/71846 A1 (ERICSSON INC [US]; WILCOX BRUCE EMERSON [US]; DOUGLAS MARK GORDON [US]) 27 September 2001 (2001-09-27) abstract page 5, line 9 - page 8, line 25; figures 2,3 line 17 - page 10, line 22 -----	1-20
A	US 2010/302123 A1 (KNUDSEN MIKAEL BERGHOLZ [DK] ET AL) 2 December 2010 (2010-12-02) abstract paragraph [0019] - paragraph [0043]; figures 1-3 -----	1-20
A	US 2011/116404 A1 (SHIMIZU MASAHIKO [JP]) 19 May 2011 (2011-05-19) abstract; figure 1 -----	1-20

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2013/053706

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2012188917	A1	26-07-2012	NONE

WO 0171846	A1	27-09-2001	AU 4754701 A 03-10-2001
			EP 1269566 A1 02-01-2003
			KR 20030009394 A 29-01-2003
			US 6920315 B1 19-07-2005
			WO 0171846 A1 27-09-2001

US 2010302123	A1	02-12-2010	DE 102010029265 A1 09-12-2010
			US 2010302123 A1 02-12-2010

US 2011116404	A1	19-05-2011	EP 2326018 A1 25-05-2011
			JP 2011109440 A 02-06-2011
			US 2011116404 A1 19-05-2011
