



(51) International Patent Classification:

F25B 31/00 (2006.01) F25B 43/02 (2006.01)

(21) International Application Number:

PCT/US2020/032598

(22) International Filing Date:

13 May 2020 (13.05.2020)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

201910411632.X 17 May 2019 (17.05.2019) CN

(71) Applicant: **CARRIER CORPORATION** [US/US];
13995 Pasteur Blvd, Palm Beach Gardens, Florida 33418
(US).(72) Inventors: **ZHANG, Xiangyuan**; No. 3239 Shenjiang
Road, Pudong District, Shanghai, 201206 (CN). **DING,
Haiping**; No. 3239 Shenjiang Road, Pudong District,
Shanghai, 201206 (CN). **ZHANG, Haitao**; No. 3239 Shen-
jiang Road, Pudong District, Shanghai, 201206 (CN).
STARK, Michael A.; 9701 Old Stateville Road, Charlotte,
North Carolina 28269 (US).(74) Agent: **FOX, David A.**; 20 Church Street, Hartford, Con-
necticut 06103 (US).(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

(54) Title: HEAT EXCHANGE SYSTEM AND METHOD FOR RECLAIMING CORROSION INHIBITOR IN HEAT EXCHANGE SYSTEM

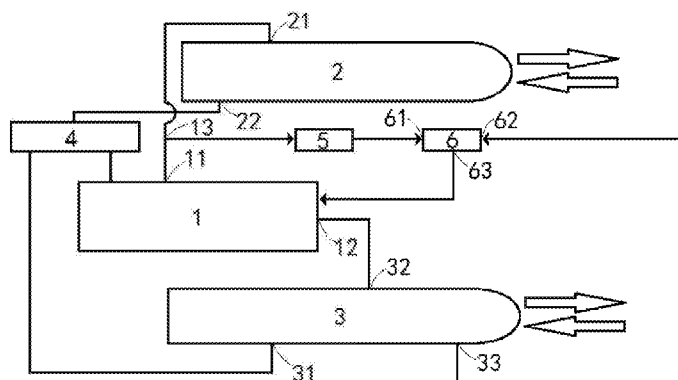


Fig.1

(57) Abstract: A heat exchange system and a method for reclaiming corrosion inhibitor in a heat exchange system are provided by the present disclosure. The heat exchange system includes a compressor (1), a condenser (2) and an evaporator (3) connected in sequence, and the heat exchange system further includes a system for reclaiming corrosion inhibitor which includes an ejector (6) including a high-pressure fluid inlet (61) connected to an outlet (11) of the compressor, a suction fluid inlet (62) connected to the heat exchange system to extract a liquid-state refrigerant in the heat exchange system, and a fluid outlet (63) leading to bearings of the compressor, wherein a pressurizing device (5) is provided between the outlet of the compressor and the high-pressure fluid inlet of the ejector. The heat exchange system according to the embodiments of the present disclosure can provide sufficient corrosion inhibitor to the bearings of the compressor under various working conditions.



Published:

— *with international search report (Art. 21(3))*

HEAT EXCHANGE SYSTEM AND METHOD FOR RECLAIMING CORROSION INHIBITOR IN HEAT EXCHANGE SYSTEM

FIELD OF THE INVENTION

[001] The present disclosure relates to a heat exchange system, and more particularly to a device and a method for reclaiming corrosion inhibitor in a heat exchange system.

BACKGROUND OF THE INVENTION

[002] In heat exchange systems, such as refrigeration systems, since a bearing chamber of compressor is unsealed, the corrosion inhibitor such as oil therein will gradually flow out and mix with refrigerant, enter a refrigeration cycle with the refrigerant, and may accumulate in a liquid-phase refrigerant, such as in an evaporator. Therefore, a system for reclaiming corrosion inhibitor is required in the heat exchange system to return the corrosion inhibitor back to the bearing chamber of the compressor. A pump may be used in existing systems to extract a liquid-state refrigerant mixed with corrosion inhibitor, but cavitation will occur when the pump is exposed to the refrigerant in a gas-liquid phase.

SUMMARY OF THE INVENTION

[003] The object of the present disclosure is to solve or at least alleviate the problems existing in the related art.

[004] In one aspect, a heat exchange system is provided, which includes: a compressor, a condenser and an evaporator connected in sequence, wherein the heat exchange system further includes a system for reclaiming corrosion inhibitor, the system for reclaiming corrosion inhibitor including:

an ejector including a high-pressure fluid inlet connected to an outlet of the compressor, a suction fluid inlet connected to the heat exchange system to extract a liquid-state refrigerant in the heat exchange system, and a fluid outlet leading to bearings of the compressor, wherein a pressurizing device is provided between the outlet of the compressor and the high-pressure fluid inlet of the ejector.

[005] Optionally, in an embodiment of the heat exchange system, the pressurizing device is a pump or an additional compressor.

[006] Optionally, in an embodiment of the heat exchange system, the suction fluid inlet is connected to a bottom of the evaporator to extract a liquid-state refrigerant with corrosion inhibitor.

[007] Optionally, in an embodiment of the heat exchange system, the heat exchange system further includes an economizer connected between the condenser and the evaporator, and the suction fluid inlet is connected to a bottom of the economizer to extract a liquid-state refrigerant with corrosion inhibitor.

[008] Optionally, in an embodiment of the heat exchange system, the compressor is a centrifugal compressor, and the corrosion inhibitor is oil.

[009] In another aspect, a method for reclaiming corrosion inhibitor in a heat exchange system is provided, the heat exchange system including a compressor, a condenser and an evaporator connected in sequence, and the method including:

providing an ejector in the heat exchange system, connecting a high-pressure fluid inlet of the ejector to an outlet of the compressor, connecting a suction fluid inlet of the ejector to the heat exchange system to extract a liquid-state refrigerant in the heat exchange system, and leading a fluid outlet of the ejector to bearings of the compressor, wherein the method further includes: providing a pressurizing device between the outlet of the compressor and the high-pressure fluid inlet of the ejector.

[010] Optionally, the pressurizing device is a pump or an additional compressor.

[011] Optionally, the method includes connecting the suction fluid inlet to a bottom of the evaporator to extract a liquid-state refrigerant with corrosion inhibitor.

[012] Optionally, the method includes connecting the suction fluid inlet to a bottom of an economizer between the condenser and the evaporator to extract a liquid-state refrigerant with corrosion inhibitor.

[013] Optionally, the compressor is a centrifugal compressor, and the corrosion inhibitor is oil.

[014] The heat exchange system according to the embodiments of the present disclosure can provide sufficient corrosion inhibitor to the bearings of the compressor under various working conditions.

BRIEF DESCRIPTION OF THE DRAWINGS

[015] The contents of the present disclosure will become easier to understand with reference to the accompanying drawings. It can be easily understood by those skilled in the art that the drawings are merely used for illustration, and are not intended to limit the scope

of protection of the present disclosure. In addition, like parts are denoted by like numerals in the drawings, wherein:

FIG. 1 shows a schematic structural view of a heat exchange system according to an embodiment of the present disclosure.

DETAILED DESCRIPTION OF THE EMBODIMENT(S) OF THE INVENTION

[016] It will be readily understood that, based on the technical solutions of the present disclosure, those skilled in the art can propose various alternative structural forms and implementations without departing from the true spirit of the present disclosure. Therefore, the following specific embodiments and the accompanying drawings are merely exemplary description of the technical solutions of the present disclosure, which shall not be deemed as the entirety of the present disclosure or as limiting or restricting the technical solutions of the present disclosure.

[017] Such orientational terms as “upper”, “lower”, “left”, “right”, “front”, “rear”, “front side”, “back side”, “top”, “bottom” or the like that are mentioned or may be mentioned in this description are defined with respect to the configurations shown in the individual drawings. They are relative concepts and thus possibly vary according to their different locations or different states of use. Therefore, these or other orientational terms shall not be interpreted as limiting terms.

[018] A heat exchange system according to an embodiment of the present disclosure will be described in detail with reference to FIG. 1. The heat exchange system according to the embodiment of the present disclosure may include a compressor 1, a condenser 2 and an evaporator 3 connected in sequence, and an optional economizer 4 between the condenser 2 and the evaporator 3. More specifically, the compressor 1 includes an outlet 11 of the compressor and an inlet 12 of the compressor, the outlet 11 of the compressor is connected to an inlet 21 of the condenser 2 through a pipeline, and an outlet 22 of the condenser 2 is connected to the economizer 4 through a pipeline, and then connected to an inlet 31 of the evaporator; and an outlet 32 of the evaporator is connected to the inlet 12 of the compressor through a pipeline. The condenser 2 and the evaporator 3 exchange heat with the environment or a coolant respectively, in order to adjust the temperature. It should be understood that the heat exchange system shown in the figure is only exemplary, and more components and devices such as pipelines may be included in practical applications.

[019] The heat exchange system also includes a system for reclaiming corrosion inhibitor which includes an ejector 6 including a high-pressure fluid inlet 61 connected to the

outlet 11 of the compressor 1, a suction fluid inlet 62 connected to the heat exchange system to extract a liquid-state refrigerant in the heat exchange system, and a fluid outlet 63 leading to bearings of the compressor 1. In the system for reclaiming corrosion inhibitor, a pressurizing device 5 is provided between the outlet 11 of the compressor and the high-pressure fluid inlet 61 of the ejector 6. In the embodiment shown in the figure, the outlet 11 of the compressor is connected to the pressurizing device 5, and the pressurizing device 5 is connected to the high-pressure fluid inlet 61 of the ejector 6. Specifically, the pressurizing device 5 is connected to a certain position 13 on a pipeline between the outlet 11 of the compressor and the inlet 21 of the condenser 2. The suction fluid inlet 62 of the ejector 6 may be connected to any suitable position in the heat exchange system to extract a liquid-state refrigerant. As a non-limiting example, the suction fluid inlet 62 of the ejector 6 is connected to a bottom of the evaporator 3 to extract a liquid-state refrigerant mixed with corrosion inhibitor in the evaporator. It should be understood that during the use of the heat exchange system, the corrosion inhibitor in a bearing chamber of the compressor will be gradually mixed into the refrigerant to participate in the refrigeration cycle. Most of the corrosion inhibitor will accumulate in the liquid-state refrigerant such as in the evaporator. Therefore, the ejector 6 can draw the corrosion inhibitor back to the bearing chamber of compressor. The fluid outlet 63 of the ejector 6 leads to the bearings of the compressor 1 through a pipeline, such as to a bearing chamber, i.e., the outlet of the pipeline may, for example, be aligned with the bearing chamber of the compressor 1 so that the corrosion inhibitor can be applied to the bearings. A filter may be arranged on a pipeline connecting the fluid outlet 63 of the ejector 6 and the bearing chamber of the compressor to prevent foreign matters from entering the bearing chamber of the compressor. In addition, it should be noted that the pipelines of the system for reclaiming corrosion inhibitor may be copper pipes.

[020] During operation, a part of the high-pressure fluid discharged from the compressor 1 enters the high-pressure fluid inlet 61 of the ejector 6 through the pressurizing device 5 to produce a pressure difference between the ejector 6 and the evaporator 3, so that a liquid-state refrigerant mixed with corrosion inhibitor is extracted from the evaporator 3. The high-pressure fluid from the compressor 1 and the liquid-state refrigerant from the evaporator 3 are mixed in the ejector 6 and led to the bearings of the compressor 1 through the fluid outlet 63 of the ejector 6 to reclaim part of the corrosion inhibitor to the bearings of the compressor. The above-mentioned corrosion inhibitor reclaim circuit keeps running during the working process of the thermal cycle system so as to keep sufficient corrosion inhibitor at the bearings of the compressor 1 and avoid corrosion of the compressor bearings and

compressor failures caused thereby. In the embodiment of the present disclosure, a combination of the ejector and the pressurizing device is used to reclaim the corrosion inhibitor to the bearing chamber of the compressor. By contrast, in a traditional solution of directly using a pump to extract a refrigerant mixed with corrosion inhibitor, the pump is prone to cavitation since the extracted refrigerant is in a gas-liquid mixed state. In addition, the pressurizing device 5 ensures that the high-pressure fluid inlet 61 of the ejector 6 is always under high pressure, so that a continuous corrosion inhibitor can be passed to the bearing chamber of the compressor even when the pressure at the outlet 11 of the compressor 1 is low.

[021] In some embodiments, the pressurizing device 5 may be a pump, such as a small pump. In some embodiments, the pressurizing device 5 may also be an additional compressor, which has a significantly lower power than the compressor 1. In an alternative embodiment, the pressurizing device 5 can be any existing suitable pressurizing device. In some embodiments, the suction fluid inlet 62 may also be connected to a bottom of the economizer 4 (if any) to extract a liquid-state refrigerant with corrosion inhibitor from the economizer 4. In some other embodiments, the suction fluid inlet 62 may also be connected to other components in the heat exchange system, as long as the liquid-state refrigerant mixed with the corrosion inhibitor is accumulated in the component. Preferably, the suction fluid inlet 62 is connected to the bottom of the evaporator, since the pressure there is relatively low. In some embodiments, the compressor 1 may be a centrifugal compressor and the corrosion inhibitor may be oil.

[022] In another aspect, the present disclosure also provides a method for reclaiming corrosion inhibitor in a heat exchange system, the method including: providing an ejector in the heat exchange system, connecting a high-pressure fluid inlet of the ejector to an outlet of the compressor, connecting a suction fluid inlet of the ejector to the heat exchange system to extract a liquid-state refrigerant in the heat exchange system, and leading a fluid outlet of the ejector to bearings of the compressor, wherein the method further includes: providing a pressurizing device between the high-pressure fluid inlet of the ejector and the outlet of the compressor. In some embodiments, the pressurizing device may be a pump or an additional compressor. In some embodiments, the method may include connecting the suction fluid inlet to a bottom of the evaporator to extract a liquid-state refrigerant with corrosion inhibitor. In some embodiments, the method may include connecting the suction fluid inlet to a bottom of an economizer between the condenser and the evaporator to extract the liquid-state refrigerant

with corrosion inhibitor. In some embodiments, the compressor may be a centrifugal compressor and the corrosion inhibitor may be oil.

[023] The specific embodiments described above are merely for describing the principle of the present disclosure more clearly, and various components are clearly illustrated or depicted to make it easier to understand the principle of the present disclosure. Those skilled in the art can readily make various modifications or changes to the present disclosure without departing from the scope of the present disclosure. Therefore, it should be understood that these modifications or changes should be included within the scope of protection of the present disclosure.

What is claimed is:

1. A heat exchange system, comprising: a compressor, a condenser and an evaporator connected in sequence, wherein the heat exchange system further comprises a system for reclaiming corrosion inhibitor, the system for reclaiming corrosion inhibitor comprising:

an ejector comprising a high-pressure fluid inlet connected to an outlet of the compressor, a suction fluid inlet connected to the heat exchange system to extract a liquid-state refrigerant in the heat exchange system, and a fluid outlet leading to bearings of the compressor, wherein a pressurizing device is provided between the outlet of the compressor and the high-pressure fluid inlet of the ejector.

2. The heat exchange system according to claim 1, wherein the pressurizing device is a pump or an additional compressor.

3. The heat exchange system according to claim 1, wherein the suction fluid inlet is connected to a bottom of the evaporator to extract a liquid-state refrigerant with corrosion inhibitor.

4. The heat exchange system according to claim 1, wherein the heat exchange system further comprises an economizer connected between the condenser and the evaporator, and the suction fluid inlet is connected to a bottom of the economizer to extract a liquid-state refrigerant with corrosion inhibitor.

5. The heat exchange system according to claim 1, wherein the compressor is a centrifugal compressor, and the corrosion inhibitor is oil.

6. A method for reclaiming corrosion inhibitor in a heat exchange system, the heat exchange system comprising a compressor, a condenser and an evaporator connected in sequence, and the method comprising:

providing an ejector in the heat exchange system, connecting a high-pressure fluid inlet of the ejector to an outlet of the compressor, connecting a suction fluid inlet of the ejector to the heat exchange system to extract a liquid-state refrigerant in the heat exchange system, and leading a fluid outlet of the ejector to bearings of the compressor, wherein the method further comprises: providing a pressurizing device between the outlet of the compressor and the high-pressure fluid inlet of the ejector.

7. The method according to claim 6, wherein the pressurizing device is a pump or an additional compressor.

8. The method according to claim 6, wherein the method comprises connecting the suction fluid inlet to a bottom of the evaporator to extract a liquid-state refrigerant with corrosion inhibitor.

9. The method according to claim 6, wherein the method comprises connecting the suction fluid inlet to a bottom of an economizer between the condenser and the evaporator to extract a liquid-state refrigerant with corrosion inhibitor.

10. The method according to claim 6, wherein the compressor is a centrifugal compressor, and the corrosion inhibitor is oil.

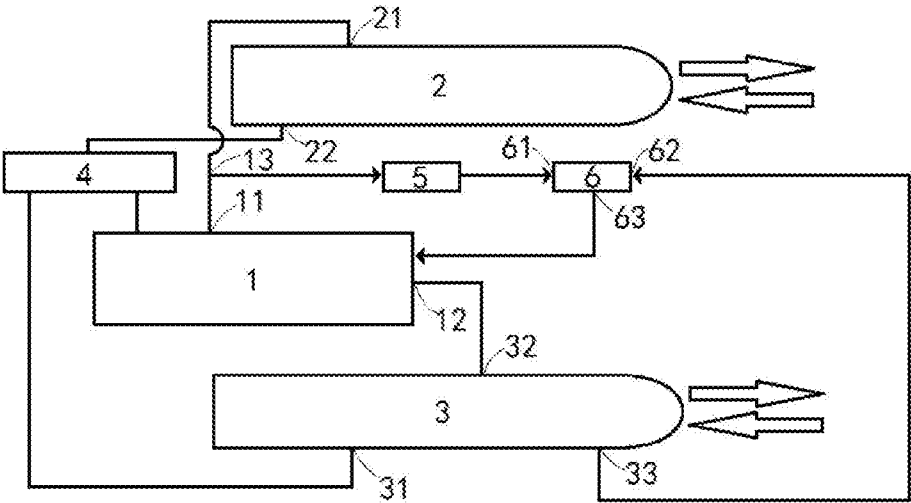


Fig.1

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2020/032598

A. CLASSIFICATION OF SUBJECT MATTER
 INV. F25B31/00 F25B43/02
 ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 F25B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 1 119 732 A1 (AMERICAN STANDARD INC [US]) 1 August 2001 (2001-08-01) paragraphs [0001], [0006] - [0010] paragraphs [0029] - [0050]; figures 1-4 -----	1-10
Y	DD 133 063 A1 (FRANKE ACHIM; JUNG PETER; RASCH HELMUT) 29 November 1978 (1978-11-29) pages 5-6 pages 9-10; figure 1 -----	1-3,5-8, 10
Y	US 2 841 962 A (RICHARDS WILLIAM V ET AL) 8 July 1958 (1958-07-08) column 4, lines 33-70; figure 1 ----- -/--	1-10



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

22 July 2020

Date of mailing of the international search report

03/08/2020

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040,
 Fax: (+31-70) 340-3016

Authorized officer

Weisser, Meinrad

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2020/032598

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 4 558 573 A (LA MONICA GASPARE [IT]) 17 December 1985 (1985-12-17) column 2, line 8 - column 3, line 9; figure 1 -----	4,9
A	US 4 938 664 A (ZINSMEYER THOMAS M [US]) 3 July 1990 (1990-07-03) column 2, line 41 - column 4, line 8; figure 1 -----	4,9

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2020/032598

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 1119732	A1	01-08-2001	AU 6247999 A 01-05-2000
		CA 2342908 A1 20-04-2000	
		CN 1322290 A 14-11-2001	
		EP 1119732 A1 01-08-2001	
		JP 4393711 B2 06-01-2010	
		JP 2002527710 A 27-08-2002	
		US 6065297 A 23-05-2000	
		WO 0022358 A1 20-04-2000	
DD 133063	A1	29-11-1978	NONE
US 2841962	A	08-07-1958	NONE
US 4558573	A	17-12-1985	AU 3370384 A 18-04-1985
		BE 900715 A 16-01-1985	
		BR 8404881 A 13-08-1985	
		CA 1231844 A 26-01-1988	
		CH 660773 A5 15-06-1987	
		DE 3435761 A1 18-04-1985	
		DK 465684 A 31-03-1985	
		ES 8507662 A1 16-09-1985	
		FR 2552826 A1 05-04-1985	
		GB 2148473 A 30-05-1985	
		IT 1171707 B 10-06-1987	
		JP S60105873 A 11-06-1985	
		LU 85553 A1 02-04-1985	
		NL 8402977 A 16-04-1985	
		PT 79276 A 01-10-1984	
		US 4558573 A 17-12-1985	
		ZA 847577 B 29-05-1985	
US 4938664	A	03-07-1990	BR 9005723 A 17-09-1991
		CA 2025060 A1 14-05-1991	
		CN 1051963 A 05-06-1991	
		DE 69006453 T2 16-06-1994	
		EP 0428473 A1 22-05-1991	
		JP H03172599 A 25-07-1991	
		JP H06103040 B2 14-12-1994	
		KR 910010069 A 28-06-1991	
		MX 164450 B 14-08-1992	
		US 4938664 A 03-07-1990	