



US00RE46335E

(19) **United States**
(12) **Reissued Patent**
Lu et al.

(10) **Patent Number:** **US RE46,335 E**
(45) **Date of Reissued Patent:** **Mar. 7, 2017**

- (54) **SWITCHING DEVICE HAVING A NON-LINEAR ELEMENT**
- (71) Applicant: **Crossbar, Inc.**, Santa Clara, CA (US)
- (72) Inventors: **Wei Lu**, Ann Arbor, MI (US); **Sung Hyun Jo**, Sunnyvale, CA (US); **Hagop Nazarian**, San Jose, CA (US)
- (73) Assignee: **Crossbar, Inc.**, Santa Clara, CA (US)
- (21) Appl. No.: **14/612,025**
- (22) Filed: **Feb. 2, 2015**

Related U.S. Patent Documents

Reissue of:

- (64) Patent No.: **8,767,441**
- Issued: **Jul. 1, 2014**
- Appl. No.: **13/921,157**
- Filed: **Jun. 18, 2013**

U.S. Applications:

- (63) Continuation-in-part of application No. 13/149,757, filed on May 31, 2011, now Pat. No. 8,502,185, and (Continued)

- (51) **Int. Cl.**
G11C 11/00 (2006.01)
H01L 45/00 (2006.01)
(Continued)

- (52) **U.S. Cl.**
CPC **G11C 13/004** (2013.01); **G11C 13/0004** (2013.01); **G11C 13/0007** (2013.01);
(Continued)

- (58) **Field of Classification Search**
CPC G11C 13/004; G11C 13/0004; G11C 13/0007; H01L 45/085; H01L 27/2409; H01L 27/2463
(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

- 680,652 A 8/1901 Leonard
- 4,433,468 A 2/1984 Kawamata
- (Continued)

FOREIGN PATENT DOCUMENTS

- CN 101131872 A 2/2008
- CN 101170132 A 4/2008
- (Continued)

OTHER PUBLICATIONS


International Search Report and Written Opinion for Application No. PCT/US2012/044077, mailed on Jan. 25, 2013, 3 pages.
(Continued)

Primary Examiner — James Menefee
(74) *Attorney, Agent, or Firm* — Amin, Turocy & Watson, LLP

(57) **ABSTRACT**

Method for a memory including a first, second, third and fourth cells include applying a read, program, or erase voltage, the first and second cells coupled to a first top interconnect, the third and fourth cells coupled to a second top interconnect, the first and third cells coupled to a first bottom interconnect, the second and fourth cells are to a second bottom interconnect, each cell includes a switching material overlying a non-linear element (NLE), the resistive switching material is associated with a first conductive threshold voltage, the NLE is associated with a lower, second conductive threshold voltage, comprising applying the read voltage between the first top and the first bottom electrode to switch the NLE of the first cell to conductive, while the NLEs of the second, third, and the fourth cells remain non-conductive, and detecting a read current across the first cell in response to the read voltage.

32 Claims, 9 Drawing Sheets

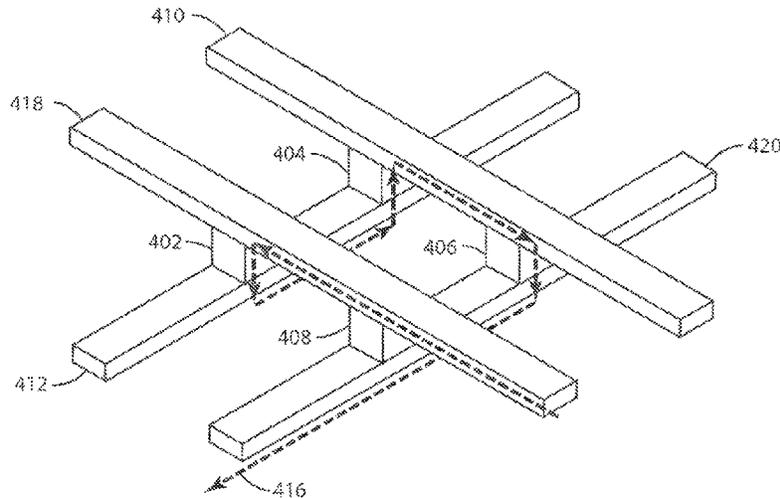

Related U.S. Application Data

- a continuation-in-part of application No. 13/290,024, filed on Nov. 4, 2011, now Pat. No. 8,467,227.
- (60) Provisional application No. 61/410,035, filed on Nov. 4, 2010, provisional application No. 61/712,171, filed on Oct. 10, 2012, provisional application No. 61/786,100, filed on Mar. 14, 2013.
- (51) **Int. Cl.**
GIIC 13/00 (2006.01)
H01L 27/24 (2006.01)
- (52) **U.S. Cl.**
 CPC *H01L 27/2409* (2013.01); *H01L 27/2463* (2013.01); *H01L 45/085* (2013.01)
- (58) **Field of Classification Search**
 USPC 365/148, 163, 175; 257/2, 5
 See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,684,972	A	8/1987	Owen et al.
4,741,601	A	5/1988	Saito
4,994,866	A	2/1991	Awano
5,139,911	A	8/1992	Yagi et al.
5,242,855	A	9/1993	Oguro
5,278,085	A	1/1994	Maddox, III et al.
5,315,131	A	5/1994	Kishimoto et al.
5,335,219	A	8/1994	Ovshinsky et al.
5,360,981	A	11/1994	Owen et al.
5,457,649	A	10/1995	Eichman et al.
5,499,208	A	3/1996	Shoji
5,538,564	A	7/1996	Kaschmitter
5,541,869	A	7/1996	Rose et al.
5,594,363	A	1/1997	Freeman et al.
5,596,214	A	1/1997	Endo
5,614,756	A	3/1997	Forouhi et al.
5,627,451	A	5/1997	Takeda
5,645,628	A	7/1997	Endo et al.
5,673,223	A	9/1997	Park
5,707,487	A	1/1998	Hori et al.
5,714,416	A	2/1998	Eichman et al.
5,751,012	A	5/1998	Wolstenholme et al.
5,763,898	A	6/1998	Forouhi et al.
5,840,608	A	11/1998	Chang
5,923,587	A	7/1999	Choi
5,970,332	A	10/1999	Prujimbboom et al.
5,973,335	A	10/1999	Shannon
5,998,244	A	12/1999	Wolstenholme et al.
6,002,268	A	12/1999	Sasaki et al.
6,037,204	A	3/2000	Chang et al.
6,122,318	A	9/2000	Yamaguchi et al.
6,128,214	A	10/2000	Kuekes et al.
6,143,642	A	11/2000	Sur, Jr. et al.
6,180,998	B1	1/2001	Crafts
6,181,587	B1	1/2001	Kuramoto et al.
6,181,597	B1	1/2001	Nachumovsky
6,259,116	B1	7/2001	Shannon
6,288,435	B1	9/2001	Mei et al.
6,291,836	B1	9/2001	Kramer et al.
6,436,765	B1	8/2002	Liou et al.
6,436,818	B1	8/2002	Hu et al.
6,492,694	B2	12/2002	Noble et al.
6,552,932	B1	4/2003	Cernea
6,627,530	B2	9/2003	Li et al.
6,724,186	B2	4/2004	Jordil
6,731,535	B1	5/2004	Ooishi et al.
6,740,921	B2	5/2004	Matsuoka et al.
6,762,474	B1	7/2004	Mills, Jr.
6,768,157	B2	7/2004	Krieger et al.
6,815,286	B2	11/2004	Krieger et al.
6,816,405	B1	11/2004	Lu et al.
6,821,879	B2	11/2004	Wong

6,838,720	B2	1/2005	Krieger et al.
6,848,012	B2	1/2005	LeBlanc et al.
6,849,891	B1	2/2005	Hsu et al. 257/296
6,858,481	B2	2/2005	Krieger et al.
6,858,482	B2	2/2005	Gilton
6,864,127	B2	3/2005	Yamazaki et al.
6,864,522	B2	3/2005	Krieger et al.
6,867,618	B2	3/2005	Li
6,881,994	B2	4/2005	Lee et al.
6,897,519	B1	5/2005	Dosluoglu
6,927,430	B2	8/2005	Hsu
6,939,787	B2	9/2005	Ohtake et al.
6,946,719	B2	9/2005	Petti et al.
7,020,006	B2	3/2006	Chevallier et al.
7,023,093	B2	4/2006	Canaperi et al.
7,026,702	B2	4/2006	Krieger et al.
7,087,454	B2	8/2006	Campbell et al.
7,102,150	B2	9/2006	Harshfield et al.
7,122,853	B1	10/2006	Gaun et al.
7,167,387	B2	1/2007	Sugita et al.
7,187,577	B1	3/2007	Wang et al.
7,221,599	B1	5/2007	Gaun et al.
7,238,607	B2	7/2007	Dunton et al.
7,238,994	B2	7/2007	Chen et al.
7,251,152	B2	7/2007	Roehr
7,254,053	B2	8/2007	Krieger et al.
7,274,587	B2	9/2007	Yasuda
7,289,353	B2	10/2007	Spitzer et al.
7,324,363	B2	1/2008	Kerns et al.
7,345,907	B2	3/2008	Scheuerlein
7,365,411	B2	4/2008	Campbell
7,405,418	B2	7/2008	Happ et al.
7,426,128	B2	9/2008	Scheuerlein
7,433,253	B2	10/2008	Gogl et al.
7,474,000	B2	1/2009	Scheuerlein et al.
7,479,650	B2	1/2009	Gilton
7,499,355	B2	3/2009	Scheuerlein et al.
7,515,454	B2	4/2009	Symanczyk
7,521,705	B2	4/2009	Liu
7,534,625	B2	5/2009	Karpov et al.
7,541,252	B2	6/2009	Eun et al.
7,550,380	B2	6/2009	Elkins et al.
7,561,461	B2	7/2009	Nagai et al.
7,566,643	B2	7/2009	Czubaty et al.
7,606,059	B2	10/2009	Toda
7,615,439	B1	11/2009	Schricker et al.
7,629,198	B2	12/2009	Kumar et al.
7,667,442	B2	2/2010	Itoh
7,692,959	B2	4/2010	Krusin-Elbaum et al.
7,704,788	B2	4/2010	Youn et al.
7,719,001	B2	5/2010	Nomura et al.
7,728,318	B2	6/2010	Raghuram et al.
7,729,158	B2	6/2010	Toda et al.
7,746,601	B2	6/2010	Sugiyama et al.
7,746,696	B1	6/2010	Paak
7,749,805	B2	7/2010	Pinnow et al.
7,764,536	B2	7/2010	Luo et al.
7,772,581	B2	8/2010	Lung
7,776,682	B1	8/2010	Nickel et al.
7,778,063	B2	8/2010	Brubaker et al.
7,786,464	B2	8/2010	Nirschl et al.
7,786,589	B2	8/2010	Matsunaga et al.
7,791,060	B2	9/2010	Aochi et al.
7,824,956	B2	11/2010	Schricker et al.
7,829,875	B2	11/2010	Scheuerlein
7,830,698	B2	11/2010	Chen et al. 365/148
7,835,170	B2	11/2010	Bertin et al.
7,858,468	B2	12/2010	Liu et al.
7,859,884	B2	12/2010	Scheuerlein
7,869,253	B2	1/2011	Liaw et al.
7,875,871	B2	1/2011	Kumar et al.
7,881,097	B2	2/2011	Hosomi et al.
7,883,964	B2	2/2011	Goda et al.
7,897,953	B2	3/2011	Liu
7,898,838	B2	3/2011	Chen et al.
7,920,412	B2	4/2011	Hosotani et al.
7,924,138	B2	4/2011	Kinoshita et al.
7,927,472	B2	4/2011	Takahashi et al.
7,968,419	B2	6/2011	Li et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

7,972,897 B2	7/2011	Kumar et al.	2004/0170040 A1	9/2004	Rinerson et al.	365/26
7,984,776 B2	7/2011	Sastry et al.	2004/0192006 A1	9/2004	Campbell et al.	
8,004,882 B2	8/2011	Katti et al.	2004/0194340 A1	10/2004	Kobayashi	
8,018,760 B2	9/2011	Muraoka et al.	2004/0202041 A1	10/2004	Hidenori	
8,021,897 B2	9/2011	Sills et al.	2005/0019699 A1	1/2005	Moore	
8,045,364 B2	10/2011	Schloss et al.	2005/0020510 A1	1/2005	Benedict	
8,054,674 B2	11/2011	Tamai et al.	2005/0029587 A1	2/2005	Harshfield	
8,054,679 B2	11/2011	Nakai et al.	2005/0041498 A1	2/2005	Resta et al.	
8,067,815 B2	11/2011	Chien et al.	2005/0052915 A1	3/2005	Herner et al.	
8,071,972 B2	12/2011	Lu et al.	2005/0062045 A1	3/2005	Bhattacharyya	
8,084,830 B2	12/2011	Kanno et al.	2005/0073881 A1	4/2005	Tran et al.	
8,088,688 B1	1/2012	Herner	2005/0101081 A1	5/2005	Goda et al.	
8,097,874 B2	1/2012	Venkatasamy et al.	2005/0175099 A1	8/2005	Sarkijarvi et al.	
8,102,018 B2	1/2012	Bertin et al.	2006/0017488 A1	1/2006	Hsu et al.	
8,102,698 B2	1/2012	Scheuerlein	2006/0054950 A1	3/2006	Baek et al.	
8,143,092 B2	3/2012	Kumar et al.	2006/0134837 A1	6/2006	Subramanian et al.	
8,144,498 B2	3/2012	Kumar et al.	2006/0154417 A1	7/2006	Shinmura et al.	
8,164,948 B2	4/2012	Katti et al.	2006/0215445 A1	9/2006	Baek et al.	
8,168,506 B2	5/2012	Herner	2006/0231910 A1	10/2006	Hsieh et al.	257/413
8,183,553 B2	5/2012	Phatak et al.	2006/0246606 A1	11/2006	Hsu et al.	
8,187,945 B2	5/2012	Herner	2006/0279979 A1	12/2006	Lowrey et al.	
8,198,144 B2	6/2012	Herner	2006/0281244 A1	12/2006	Ichige et al.	
8,207,064 B2	6/2012	Bandyopadhyay et al.	2006/0286762 A1	12/2006	Tseng et al.	
8,227,787 B2	7/2012	Kumar et al.	2007/0008773 A1	1/2007	Scheuerlein	
8,231,998 B2	7/2012	Sastry et al.	2007/0015348 A1	1/2007	Hsu et al.	
8,233,308 B2	7/2012	Schricker et al.	2007/0025144 A1	2/2007	Hsu et al.	
8,237,146 B2	8/2012	Kreupl et al.	2007/0035990 A1	2/2007	Hush	
8,243,542 B2	8/2012	Bae et al.	2007/0042612 A1	2/2007	Nishino et al.	
8,258,020 B2	9/2012	Herner	2007/0045615 A1	3/2007	Cho et al.	
8,265,136 B2	9/2012	Hong et al.	2007/0069119 A1	3/2007	Appleyard et al.	
8,274,130 B2	9/2012	Mihnea et al.	2007/0087508 A1	4/2007	Herner et al.	
8,274,812 B2	9/2012	Nazarian et al.	2007/0090425 A1	4/2007	Kumar et al.	
8,305,793 B2	11/2012	Majewski et al.	2007/0091685 A1	4/2007	Guterman et al.	
8,315,079 B2	11/2012	Kuo et al.	2007/0105284 A1	5/2007	Herner et al.	
8,320,160 B2	11/2012	Nazarian	2007/0105390 A1	5/2007	Oh	
8,351,241 B2	1/2013	Lu et al.	2007/0133250 A1	6/2007	Kim	
8,369,129 B2	2/2013	Fujita et al.	2007/0133270 A1	6/2007	Jeong et al.	
8,369,139 B2*	2/2013	Liu et al.	2007/0159869 A1	7/2007	Baek et al.	
8,374,018 B2	2/2013	Lu	2007/0159876 A1	7/2007	Sugibayashi et al.	
8,385,100 B2	2/2013	Kau et al.	2007/0171698 A1	7/2007	Hoening Schmid et al.	
8,389,971 B2	3/2013	Chen et al.	2007/0205510 A1	9/2007	Lavoie et al.	
8,394,670 B2	3/2013	Herner	2007/0228414 A1	10/2007	Kumar et al.	
8,399,307 B2	3/2013	Herner	2007/0284575 A1	12/2007	Li et al.	
8,441,835 B2	5/2013	Jo et al.	2007/0290186 A1	12/2007	Bourim et al.	
8,456,892 B2	6/2013	Yasuda	2007/0291527 A1	12/2007	Tsushima et al.	
8,466,005 B2	6/2013	Pramanik et al.	2007/0295950 A1	12/2007	Cho et al.	
8,467,226 B2	6/2013	Bedeschi et al.	2007/0297501 A1	12/2007	Hussain et al.	
8,467,227 B1	6/2013	Jo	2008/0002481 A1	1/2008	Gogl et al.	
8,502,185 B2	8/2013	Lu et al.	2008/0006907 A1	1/2008	Lee et al.	
8,569,104 B2	10/2013	Pham et al.	2008/0007987 A1	1/2008	Takashima	
8,587,989 B2	11/2013	Manning et al.	2008/0019163 A1	1/2008	Hoening Schmid et al.	
8,619,459 B1	12/2013	Nguyen et al.	2008/0043521 A1	2/2008	Liaw et al.	
8,658,476 B1	2/2014	Sun et al.	2008/0048164 A1	2/2008	Odagawa	
8,659,003 B2	2/2014	Herner et al.	2008/0083918 A1	4/2008	Aratani et al.	
8,675,384 B2	3/2014	Kuo et al.	2008/0089110 A1	4/2008	Robinett et al.	
8,693,241 B2	4/2014	Kim et al.	2008/0090337 A1	4/2008	Williams	
8,853,759 B2	10/2014	Lee et al.	2008/0106925 A1	5/2008	Paz de Araujo et al.	
8,934,294 B2	1/2015	Kim et al.	2008/0106926 A1	5/2008	Brubaker et al.	
8,946,667 B1	2/2015	Clark et al.	2008/0165571 A1	7/2008	Lung	
8,946,673 B1	2/2015	Kumar	2008/0185567 A1	8/2008	Kumar et al.	
8,947,908 B2	2/2015	Jo	2008/0192531 A1	8/2008	Tamura et al.	365/148
8,999,811 B2	4/2015	Endo et al.	2008/0198934 A1	8/2008	Hong et al.	
9,093,635 B2	7/2015	Kim et al.	2008/0205179 A1	8/2008	Markert et al.	
9,166,163 B2	10/2015	Gee et al.	2008/0206931 A1	8/2008	Breuil et al.	
2002/0048940 A1	4/2002	Derderian et al.	2008/0220601 A1	9/2008	Kumar et al.	
2003/0006440 A1	1/2003	Uchiyama	2008/0232160 A1	9/2008	Gopalakrishnan	
2003/0036238 A1	2/2003	Toet et al.	2008/0278988 A1	11/2008	Ufert	
2003/0052330 A1	3/2003	Klein	2008/0278990 A1	11/2008	Kumar et al.	
2003/0141565 A1	7/2003	Hirose et al.	2008/0301497 A1	12/2008	Chung et al.	
2003/0174574 A1	9/2003	Perner et al.	2008/0304312 A1	12/2008	Ho et al.	
2003/0194865 A1	10/2003	Gilton	2008/0311722 A1	12/2008	Petti et al.	
2003/0206659 A1	11/2003	Hamanaka	2009/0001343 A1	1/2009	Schricker et al.	
2004/0026682 A1	2/2004	Jiang	2009/0001345 A1	1/2009	Schricker et al.	
2004/0036124 A1	2/2004	Vyvoda et al.	2009/0003717 A1	1/2009	Sekiguchi et al.	
2004/0159835 A1	8/2004	Krieger et al.	2009/0014703 A1	1/2009	Inaba	
			2009/0014707 A1	1/2009	Lu et al.	
			2009/0052226 A1	2/2009	Lee et al.	
			2009/0091981 A1	4/2009	Park et al.	
			2009/0095951 A1	4/2009	Kostylev et al.	

(56)

References Cited

U.S. PATENT DOCUMENTS

2009/0109728	A1	4/2009	Maejima et al.	2011/0151277	A1	6/2011	Nishihara et al.
2009/0122591	A1	5/2009	Ryu	2011/0155991	A1	6/2011	Chen
2009/0134432	A1	5/2009	Tabata et al.	2011/0183525	A1	7/2011	Purusothaman et al.
2009/0141567	A1	6/2009	Lee et al.	2011/0193051	A1	8/2011	Nam et al.
2009/0152737	A1	6/2009	Harshfield	2011/0194329	A1	8/2011	Ohba et al.
2009/0168486	A1	7/2009	Kumar	2011/0198557	A1	8/2011	Rajendran et al.
2009/0227067	A1	9/2009	Kumar et al.	2011/0204312	A1	8/2011	Phatak
2009/0231905	A1	9/2009	Sato	2011/0204314	A1	8/2011	Baek et al.
2009/0231910	A1*	9/2009	Liu et al. 365/163	2011/0205780	A1	8/2011	Yasuda et al.
2009/0250787	A1	10/2009	Kutsunai	2011/0205782	A1	8/2011	Costa et al.
2009/0251941	A1	10/2009	Saito	2011/0212616	A1	9/2011	Seidel et al.
2009/0256130	A1	10/2009	Schricker	2011/0227028	A1	9/2011	Sekar et al.
2009/0257265	A1	10/2009	Chen et al.	2011/0284814	A1	11/2011	Zhang
2009/0267047	A1	10/2009	Sasago et al.	2011/0299324	A1	12/2011	Li et al.
2009/0268513	A1	10/2009	De Ambroggi et al.	2011/0305064	A1	12/2011	Jo et al.
2009/0272962	A1	11/2009	Kumar et al.	2011/0310656	A1	12/2011	Kreupl et al.
2009/0283737	A1	11/2009	Kiyotoshi	2011/0312151	A1	12/2011	Herner
2009/0298224	A1	12/2009	Lowrey	2011/0317470	A1*	12/2011	Lu et al. 365/148
2009/0321706	A1	12/2009	Happ et al.	2012/0001145	A1	1/2012	Magistretti et al.
2009/0321789	A1	12/2009	Wang et al.	2012/0001146	A1	1/2012	Lu et al.
2010/0007937	A1	1/2010	Widjaja et al.	2012/0007035	A1	1/2012	Jo et al.
2010/0012914	A1	1/2010	Xu et al.	2012/0008366	A1	1/2012	Lu
2010/0019221	A1	1/2010	Lung et al.	2012/0012806	A1	1/2012	Herner
2010/0019310	A1	1/2010	Sakamoto	2012/0012808	A1	1/2012	Herner
2010/0025675	A1	2/2010	Yamazaki et al.	2012/0015506	A1	1/2012	Jo et al.
2010/0032637	A1	2/2010	Kinoshita et al.	2012/0025161	A1	2/2012	Rathor et al.
2010/0032638	A1	2/2010	Xu	2012/0033479	A1	2/2012	Delucca et al.
2010/0032640	A1	2/2010	Xu	2012/0043519	A1	2/2012	Jo et al.
2010/0034518	A1	2/2010	Iwamoto et al.	2012/0043520	A1	2/2012	Herner et al.
2010/0038791	A1	2/2010	Lee et al.	2012/0043621	A1	2/2012	Herner
2010/0039136	A1	2/2010	Chua-Eoan et al.	2012/0043654	A1	2/2012	Lu et al.
2010/0044708	A1	2/2010	Lin et al.	2012/0044751	A1	2/2012	Wang et al. 365/148
2010/0044798	A1	2/2010	Hooker et al.	2012/0074374	A1	3/2012	Jo
2010/0046622	A1	2/2010	Doser et al.	2012/0074507	A1	3/2012	Jo et al.
2010/0067279	A1	3/2010	Choi	2012/0076203	A1	3/2012	Sugimoto et al.
2010/0067282	A1	3/2010	Liu et al.	2012/0080798	A1	4/2012	Harshfield
2010/0084625	A1	4/2010	Wicker et al.	2012/0087169	A1	4/2012	Kuo et al.
2010/0085798	A1	4/2010	Lu et al.	2012/0087172	A1	4/2012	Aoki
2010/0085822	A1	4/2010	Yan et al.	2012/0091420	A1	4/2012	Kusai et al.
2010/0090192	A1	4/2010	Goux et al.	2012/0104351	A1	5/2012	Wei et al.
2010/0101290	A1	4/2010	Bertolotto	2012/0108030	A1	5/2012	Herner
2010/0102290	A1	4/2010	Lu et al.	2012/0120712	A1	5/2012	Kawai et al.
2010/0110767	A1	5/2010	Katoh et al.	2012/0122290	A1	5/2012	Nagashima 438/382
2010/0118587	A1	5/2010	Chen et al.	2012/0140816	A1	6/2012	Franche et al.
2010/0140614	A1	6/2010	Uchiyama et al.	2012/0142163	A1	6/2012	Herner
2010/0157651	A1	6/2010	Kumar et al.	2012/0145984	A1	6/2012	Rabkin et al.
2010/0157656	A1	6/2010	Tsuchida 365/148	2012/0147657	A1	6/2012	Sekar et al.
2010/0157659	A1	6/2010	Norman	2012/0155146	A1	6/2012	Ueda et al.
2010/0157710	A1	6/2010	Lambertson et al.	2012/0176831	A1	7/2012	Xiao et al. 365/148
2010/0163828	A1	7/2010	Tu	2012/0205606	A1	8/2012	Lee et al.
2010/0171086	A1	7/2010	Lung et al.	2012/0205793	A1	8/2012	Schieffer et al.
2010/0176367	A1	7/2010	Liu	2012/0218807	A1	8/2012	Johnson
2010/0176368	A1	7/2010	Ko et al.	2012/0220100	A1	8/2012	Herner
2010/0182821	A1	7/2010	Muraoka et al.	2012/0224413	A1	9/2012	Zhang et al.
2010/0203731	A1	8/2010	Kong et al.	2012/0235112	A1	9/2012	Huo et al.
2010/0219510	A1	9/2010	Scheuerlein et al.	2012/0236625	A1	9/2012	Ohba et al.
2010/0221868	A1	9/2010	Sandoval	2012/0241710	A1	9/2012	Liu et al.
2010/0237314	A1	9/2010	Tsukamoto et al.	2012/0243292	A1	9/2012	Takashima et al.
2010/0243983	A1	9/2010	Chiang et al. 257/4	2012/0250183	A1	10/2012	Tamaoka et al.
2010/0258781	A1	10/2010	Phatak et al.	2012/0252183	A1	10/2012	Herner
2010/0271885	A1	10/2010	Scheuerlein et al.	2012/0269275	A1	10/2012	Hannuksela
2010/0277969	A1	11/2010	Li et al.	2012/0305874	A1	12/2012	Herner
2010/0321095	A1	12/2010	Mikawa et al.	2012/0305879	A1	12/2012	Lu et al.
2011/0006275	A1	1/2011	Roelofs et al.	2012/0320660	A1	12/2012	Nazarian et al.
2011/0007551	A1	1/2011	Tian et al.	2012/0326265	A1	12/2012	Lai et al.
2011/0033967	A1	2/2011	Lutz et al. 438/51	2012/0327701	A1	12/2012	Nazarian
2011/0063888	A1	3/2011	Chi et al.	2013/0020548	A1	1/2013	Clark et al.
2011/0066878	A1	3/2011	Hosono et al.	2013/0023085	A1	1/2013	Pramanik et al.
2011/0068373	A1	3/2011	Minemura et al.	2013/0026440	A1	1/2013	Yang et al.
2011/0069533	A1	3/2011	Kurosawa et al.	2013/0065066	A1	3/2013	Sambasivan et al.
2011/0089391	A1	4/2011	Mihnea et al. 257/2	2013/0075685	A1	3/2013	Li et al.
2011/0122679	A1	5/2011	Chen et al.	2013/0075688	A1	3/2013	Xu et al.
2011/0128779	A1	6/2011	Redaelli et al.	2013/0119341	A1	5/2013	Liu et al.
2011/0133149	A1	6/2011	Sonehara	2013/0134379	A1	5/2013	Lu
2011/0136327	A1	6/2011	Han et al.	2013/0166825	A1	6/2013	Kim et al.
				2013/0207065	A1	8/2013	Chiang
				2013/0214234	A1	8/2013	Gopalan et al.
				2013/0235648	A1	9/2013	Kim et al.
				2013/0264535	A1	10/2013	Sonehara

(56)

References Cited

U.S. PATENT DOCUMENTS

2013/0279240	A1	10/2013	Jo
2013/0308369	A1	11/2013	Lu et al.
2014/0015018	A1	1/2014	Kim
2014/0029327	A1	1/2014	Strachan et al.
2014/0070160	A1	3/2014	Ishikawa et al.
2014/0103284	A1	4/2014	Hsueh et al.
2014/0145135	A1	5/2014	Gee et al.
2014/0166961	A1	6/2014	Liao et al.
2014/0175360	A1	6/2014	Tendulkar et al.
2014/0177315	A1	6/2014	Pramanik et al.
2014/0192589	A1	7/2014	Maxwell et al.
2014/0197369	A1	7/2014	Sheng et al.
2014/0233294	A1	8/2014	Ting et al.
2014/0264236	A1	9/2014	Kim et al.
2014/0264250	A1	9/2014	Maxwell et al.
2014/0268997	A1	9/2014	Nazarian et al.
2014/0268998	A1	9/2014	Jo
2014/0269002	A1	9/2014	Jo
2014/0312296	A1	10/2014	Jo et al.
2014/0335675	A1	11/2014	Narayanan
2015/0070961	A1	3/2015	Katayama et al.
2015/0228334	A1	8/2015	Nazarian et al.
2016/0111640	A1	4/2016	Chang et al.

FOREIGN PATENT DOCUMENTS

CN	101501850	A	8/2009	
CN	101636792	A	1/2010	
CN	102024494	A	4/2011	
CN	102077296	A	5/2011	
EP	1096465	A2	5/2001	
EP	2405441	A1	1/2012	
EP	2408035	A2	1/2012	
JP	2005506703	A	3/2005	
JP	2006032951	A	2/2006	
JP	2007067408	A	3/2007	
JP	2007281208	A	10/2007	
JP	2007328857	A	12/2007	
JP	2008503085	A	1/2008	
JP	2008147343	A	6/2008	
JP	2009043873	A	2/2009	
JP	2011-23645	A	* 2/2011 H01L 49/00
JP	2011065737	A	3/2011	
JP	2012504840	A	2/2012	
JP	2012505551	A	3/2012	
JP	2012089567	A	5/2012	
JP	2012533195	A	12/2012	
KR	20090051206	A	5/2009	
KR	20110014248	A	2/2011	
WO	03034498	A1	4/2003	
WO	2005124787	A2	12/2005	
WO	2009005699	A1	1/2009	
WO	2010026654	A1	3/2010	
WO	2010042354	A1	4/2010	
WO	2010042732	A2	4/2010	
WO	2011008654	A1	1/2011	
WO	WO 2011/005266	A1	1/2011 H01L 29/40
WO	2011133138	A1	10/2011	

OTHER PUBLICATIONS

International Search Report and Written Opinion for Application No. PCT/US2012/045312, mailed on Mar. 29, 2013, 11 pages.

International Search Report and Written Opinion for Application No. PCT/US2013/042746, mailed on Sep. 6, 2013, 7 pages.

Notice of Allowance dated Dec. 16, 2014 for U.S. Appl. No. 12/835,704, 47 pages.

International Search Report and Written Opinion for Application No. PCT/US2013/061244, mailed on Jan. 28, 2014, 3 pages.

International Search Report and Written Opinion for Application No. PCT/US2013/077628, mailed on Apr. 29, 2014, 12 pages.

International Search Report for Application no. PCT/US2009/060023, mailed on May 18, 2010, 3 pages.

International Search Report for Application No. PCT/US2009/061249, mailed on May 19, 2010, 3 pages.

International Search Report for Application No. PCT/US2011/040090, mailed on Feb. 17, 2012, 5 pages.

International Search Report for Application No. PCT/US2011/045124, mailed on May 29, 2012, 3 pages.

International Search Report for Application No. PCT/US2011/046036, mailed on Feb. 23, 2012, 3 pages.

Jafar M., et al., "Switching in Amorphous-silicon Devices," Physical Review, 1994, vol. 49 (19), pp. 611-615.

Japanese Office Action and English Translation for Japanese Patent Application No. 2011-153349 mailed Feb. 24, 2015, 9 pages.

Japanese Office Action and English Translation for Japanese Patent Application No. 2011-153349 mailed Mar. 24, 2015, 9 pages.

Japanese Office Action (English Translation) for Japanese Application No. 2011-153349 mailed Feb. 24, 2015, 3 pages.

Japanese Office Action (English Translation) for Japanese Application No. 2013-525926 mailed Mar. 3, 2015, 4 pages.

Japanese Office Action (English Translation) for Japanese Application No. 2014-513700 mailed Jan. 12, 2016, 4 pages.

Japanese Search Report (English Translation) for Japanese Application No. 2013-525926 dated Feb. 9, 2015, 15 pages.

Japanese Search Report (English Translation) for Japanese Application No. 2011-153349 dated Feb. 9, 2015, 11 pages.

Japanese Search Report (English Translation) for Japanese Application No. 2014-513700 dated Jan. 14, 2016, 25 pages.

Jian Fill, et al., "Area-Dependent Switching in Thin Film-Silicon Devices," Materials Research Society Symposium Proceedings, 2003, vol. 762, pp. A 18.3.1-A 18.3.6.

Jian Fill, et al., "Switching and Filament Formation in hot-wire CVD p-type a-Si:H devices," Thin Solid Films, Science Direct, 2003, vol. 430, pp. 249-252.

Jo S.H., et al., "A Silicon-Based Crossbar Ultra-High-Density Non-Volatile Memory", SSEL Annual Report, 2007.

Jo S.H., et al., "Ag/a-Si:1-1/c-Si Resistive Switching Nonvolatile Memory Devices," Nanotechnology Materials and Devices Conference, 2006, vol. 1, pp. 116-117.

Jo S.H., et al., "CMOS Compatible Nanoscale Nonvolatile Resistance Switching Memory," Nano Letters, 2008, vol. 8 (2), pp. 392-397.

Jo S.H., et al., "Experimental, Modeling and Simulation Studies of Nanoscale Resistance Switching Devices", 9th International Conference on Nanotechnology, IEEE, 2009, pp. 493-495.

Jo S.H., et al., "High-Density Crossbar Arrays Based on a Si Memristive System," Nano Letters, 2009, vol. 9 (2), pp. 870-874.

Jo S.H. et al., "High-Density Crossbar Arrays Based on a Si Memristive System", Supporting Information, 2009, pp. 1-4.

Jo S.H., et al., "Si Memristive Devices Applied to Memory and Neuromorphic Circuits", Proceedings of 2010 IEEE International Symposium on Circuits and Systems, 2010, pp. 13-16.

Jo S.H., et al., "Si-Based Two-Terminal Resistive Switching Non-volatile Memory", IEEE, 2008.

Jo S.H., et al., "Nanoscale Memristive Devices for Memory and Logic Applications", Ph. D Dissertation, University of Michigan, 2010.

Jo S.H., et al., "Nanoscale Memristor Device as Synapse in Neuromorphic Systems," Nano Letters, 2010, vol. 10, pp. 1297-1301.

Jo S.H., et al., "Nonvolatile Resistive Switching Devices Based on Nanoscale Metal/Amorphous Silicon/Crystalline Silicon Junctions," Materials Research Society Symposium Proceedings, 2007, vol. 997.

Jo S.H., et al., "Programmable Resistance Switching in Nanoscale Two-Terminal Devices," Nano Letters, 2009, vol. 9 (1), pp. 496-500.

Jo S.H., et al., "Programmable Resistance Switching in Nanoscale Two-Terminal Devices," Supporting Information, 2009, pp. 1-4.

Kuk-H Wan Kim et al., "Nanoscale Resistive Memory with Intrinsic Diode Characteristics and Long Endurance," Applied Physics Letters, 2010, vol. 96, pp. 053106-1-053106-3.

Kund M., et al., "Conductive Bridging Ram (cbram): An Emerging Non-volatile Memory Technology Scalable to Sub 20nm", IEEE, 2005.

(56)

References Cited

OTHER PUBLICATIONS

- Le Comber P.G., et al., "The Switching Mechanism in Amorphous Silicon Junctions," *Journal of Non-Crystalline Solids*, 1985, vol. 77 & 78, pp. 1373-1382.
- Le Comber P.G., "Present and Future Applications of Amorphous Silicon and Its Alloys," *Journal of Non-Crystalline Solids*, 1989, vol. 115, pp. 1-13.
- Lee S.H., et al., "Full Integration and Cell Characteristics for 64Mb Nonvolatile PRAM", 2004 Symposium on VLSI Technology Digest of Technical Papers, IEEE, 2004, pp. 20-21.
- Liu M., et al., "rFGA: CMOS-Nano Hybrid FPGA Using RRAM Components", IEEE CB3 N17 International Symposium on Nanoscale Architectures, Anaheim, USA, Jun. 12-13, 2008, pp. 93-98.
- Lu W., et al., "Nanoelectronics from the Bottom Up," *Nature Materials*, 2007, vol. 6, pp. 841-850.
- Lu W., et al., "Supporting Information", 2008.
- Marand, "Materials Engineering Science," MESC. 5025 Lecture Notes: Chapter 7. Diffusion, University of Vermont. Retrieved from the Internet on Aug. 8, 2016.
- Moopenn A. et al., "Programmable Synaptic Devices for Electronic Neural Nets," *Control and Computers*, 1990, vol. 18 (2), pp. 37-41.
- Muller D.A., et al., "The Electronic Structure at the Atomic Scale of Ultrathin Gate Oxides," *Nature*, 1999, vol. 399, pp. 758-761.
- Muller G., et al., "Status and Outlook of Emerging Nonvolatile Memory Technologies", IEEE, 2004, pp. 567-570.
- Newman R.C., "Defects in Silicon," *Reports on Progress in Physics*, 1982, vol. 45, pp. 1163-1210.
- Notice of Allowance dated Nov. 26, 2013 for U.S. Appl. No. 13/481,696, 15 pages.
- Office Action for U.S. Appl. No. 141613,301 dated Mar. 31, 2015, 58 pages.
- Notice of Allowance mailed Apr. 2, 2013 for U.S. Appl. No. 13/149,757, filed May 31, 2011.
- Notice of Allowance mailed Feb. 20, 2014 for U.S. Appl. No. 13/468,201, filed May 10, 2012.
- Notice of Allowance mailed Mar. 20, 2014 for U.S. Appl. No. 13/598,550, filed Aug. 29, 2012.
- Notice of Allowance mailed Mar. 20, 2014 for U.S. Appl. No. 13/461,725, filed May 1, 2012.
- Notice of Allowance mailed Oct. 21, 2011 for U.S. Appl. No. 12/582,086, filed Oct. 20, 2009.
- Notice of Allowance mailed Oct. 21, 2014 for U.S. Appl. No. 13/426,869, filed Mar. 22, 2012.
- Notice of Allowance mailed Feb. 10, 2015 for U.S. Appl. No. 13/525,096, filed Jun. 15, 2012.
- Notice of Allowance mailed May 22, 2012 for U.S. Appl. No. 12/815,369, filed Jun. 14, 2010.
- Notice of Allowance mailed Dec. 23, 2015 for U.S. Appl. No. 14/573,770.
- Notice of Allowance mailed Oct. 23, 2013 for U.S. Appl. No. 13/417,135 filed Mar. 9, 2012.
- Notice of Allowance mailed Jan. 24, 2013 for U.S. Appl. No. 13/314,513, filed Dec. 8, 2011.
- Notice of Allowance mailed Jul. 24, 2012 for U.S. Appl. No. 12/939,824 filed Nov. 4, 2010.
- Notice of Allowance mailed Oct. 25, 2012 for U.S. Appl. No. 12/894,087, filed Sep. 29, 2010.
- Notice of Allowance mailed Sep. 25, 2014 for U.S. Appl. No. 13/447,036, filed Apr. 13, 2012.
- Notice of Allowance mailed Sep. 26, 2014 for U.S. Appl. No. 13/594,665, filed Aug. 24, 2012.
- Notice of Allowance mailed Aug. 27, 2014 for U.S. Appl. No. 13/077,941, filed Mar. 31, 2011.
- Notice of Allowance mailed Nov. 28, 2012 for U.S. Appl. No. 13/290,024, filed Nov. 4, 2011.
- Notice of Allowance mailed Oct. 28, 2013 for U.S. Appl. No. 13/194,500, filed Jul. 29, 2011.
- Notice of Allowance mailed Oct. 28, 2013 for U.S. Appl. No. 13/651,169, filed Oct. 12, 2012.
- Notice of Allowance mailed Nov. 29, 2012 for U.S. Appl. No. 12/815,318, filed Jun. 14, 2010.
- Notice of Allowance mailed Oct. 29, 2012 for U.S. Appl. No. 13/149,807, filed May 31, 2011.
- Notice of Allowance mailed May 30, 2012 for U.S. Appl. No. 12/833,898, filed Jul. 9, 2010.
- Notice of Allowance mailed Sep. 30, 2013 for U.S. Appl. No. 13/481,696, filed May 25, 2012.
- Notice of Allowance mailed Aug. 31, 2012 for U.S. Appl. No. 13/051,296 filed Mar. 18, 2011.
- Notice of Allowance mailed Apr. 20, 2016 for U.S. Appl. No. 14/573,817.
- Notice of Allowance mailed Oct. 8, 2014 for U.S. Appl. No. 13/077,941, filed Mar. 31, 2011.
- Notice of Allowance mailed Aug. 26, 2015 for U.S. Appl. No. 14/034,390.
- Notice of Allowance mailed Sep. 8, 2015 for U.S. Appl. No. 14/613,299.
- Office Action dated Dec. 31, 2015 for U.S. Appl. No. 14/692,677, 27 pages.
- Office Action dated Feb. 5, 2015 for U.S. Appl. No. 14/027,045, 6 pages.
- Office Action dated Apr. 11, 2014 for U.S. Appl. No. 13/594,665, 44 pages.
- Office Action dated Apr. 6, 2015 for U.S. Appl. No. 13/912,136, 23 pages.
- Office Action for European Application No. 11005649.6 dated Dec. 1, 2014, 2 pages.
- Office Action for European Application No. 11005649.6 dated Nov. 17, 2015, 5 pages.
- Office Action for European Application No. EP11005207.3 dated Aug. 8, 2012, 4 pages.
- Office Action for U.S. Appl. No. 13/463,714 dated Dec. 7, 2012.
- Office Action for U.S. Appl. No. 14/611,022 dated May 7, 2015, 13 pages.
- Office Action for U.S. Appl. No. 14/613,301 dated Jul. 31, 2015, 26 pages.
- Office Action for U.S. Appl. No. 13/952,467 dated Jan. 15, 2016, 22 pages.
- Office Action for U.S. Appl. No. 14/194,499 dated May 18, 2016, 10 pages.
- Office Action for U.S. Appl. No. 14/207,430 dated Oct. 15, 2015, 57 pages.
- Office Action for U.S. Appl. No. 14/207,430 dated Mar. 10, 2016, 78 pages.
- Office Action for U.S. Appl. No. 14/207,430 dated Jul. 25, 2016, 79 pages.
- Office Action for U.S. Appl. No. 14/213,953 dated Nov. 9, 2015, 20 pages.
- Office Action for U.S. Appl. No. 14/383,079 dated May 10, 2016, 7 pages.
- Office Action for U.S. Appl. No. 14/383,079 dated Aug. 4, 2015, 11 pages.
- Office Action for U.S. Appl. No. 14/613,301 dated Feb. 4, 2016, 42 pages.
- Office Action for U.S. Appl. No. 14/887,050 dated Mar. 11, 2016, 12 pages.
- Office Action for U.S. Appl. No. 15/046,172 dated Apr. 20, 2016, 8 pages.
- Office Action mailed Apr. 1, 2013 for U.S. Appl. No. 13/174,077, filed Jun. 30, 2011.
- Office Action mailed Aug. 1, 2012 for U.S. Appl. No. 12/894,098, filed Sep. 29, 2010.
- Office Action mailed Mar. 1, 2012 for U.S. Appl. No. 12/835,704, filed Jul. 13, 2010.
- Office Action mailed Aug. 2, 2013 for U.S. Appl. No. 13/594,665, filed Aug. 24, 2012.
- Office Action mailed Sep. 2, 2014 for U.S. Appl. No. 13/705,082, 41 pages.
- Office Action mailed Apr. 3, 2014 for U.S. Appl. No. 13/870,919, filed Apr. 25, 2013.
- Office Action mailed Oct. 3, 2013 for U.S. Appl. No. 13/921,157, filed Jun. 18, 2013.

(56)

References Cited

OTHER PUBLICATIONS

Office Action mailed Apr. 5, 2012 for U.S. Appl. No. 12/833,898, filed Jul. 9, 2010.
Office Action mailed Oct. 5, 2011 for U.S. Appl. No. 11/875,541, filed Oct. 19, 2007.
Office Action mailed Apr. 6, 2015 for U.S. Appl. No. 14/034,390, filed Sep. 23, 2013.
Office Action mailed Dec. 6, 2013 for U.S. Appl. No. 13/564,639, filed Aug. 1, 2012.
Office Action mailed Jun. 17, 2014 for U.S. Appl. No. 14/072,657, filed Nov. 5, 2013.
Office Action mailed Feb. 6, 2014 for U.S. Appl. No. 13/434,567, filed Mar. 29, 2012.
Office Action mailed Mar. 6, 2013 for U.S. Appl. No. 13/174,264, filed Jun. 30, 2011.
Office Action mailed Mar. 6, 2013 for U.S. Appl. No. 13/679,976, filed Nov. 16, 2012.
Office Action mailed Sep. 6, 2011 for U.S. Appl. No. 12/582,086, filed Oct. 20, 2009.
Office Action mailed Dec. 7, 2012 for U.S. Appl. No. 13/436,714, filed Mar. 30, 2012.
Office Action mailed Mar. 7, 2013 for U.S. Appl. No. 13/651,169, filed Oct. 12, 2012.
Office Action mailed Mar. 17, 2015 for U.S. Appl. No. 14/573,770.
Office Action mailed Aug. 8, 2012 for EP Application No. EP11005207 filed Jun. 27, 2011.
Office Action mailed Jan. 8, 2014 for U.S. Appl. No. 12/861,432, filed Aug. 23, 2010.
Office Action mailed Jun. 8, 2012 for U.S. Appl. No. 11/875,541, filed Oct. 19, 2007.
Office Action mailed Aug. 9, 2013 for U.S. Appl. No. 13/764,710, filed Feb. 11, 2013.
Office Action mailed Jul. 9, 2013 for U.S. Appl. No. 13/447,036, filed Apr. 13, 2012.
Office Action mailed Jul. 9, 2014 for U.S. Appl. No. 14/166,691, filed Jan. 28, 2014.
Office Action mailed Oct. 9, 2012 for U.S. Appl. No. 13/417,135, filed Mar. 9, 2012.
Office Action mailed Jan. 10, 2014 for U.S. Appl. No. 13/920,021, filed Jun. 17, 2013.
Office Action mailed Apr. 11, 2014 for U.S. Appl. No. 13/143,047, filed Jun. 30, 2011.
Office Action mailed Feb. 11, 2014 for U.S. Appl. No. 13/620,012, filed Sep. 14, 2012.
Office Action mailed Jul. 11, 2013 for U.S. Appl. No. 13/764,698, filed Feb. 11, 2013.
Office Action mailed Sep. 11, 2014 for U.S. Appl. No. 13/739,283, filed Jan. 11, 2013.
Office Action mailed Aug. 12, 2013 for U.S. Appl. No. 13/077,941, filed Mar. 31, 2011.
Office Action mailed Mar. 12, 2014 for U.S. Appl. No. 13/167,920, filed Jun. 24, 2011.
Office Action mailed Sep. 12, 2014 for U.S. Appl. No. 13/426,869, filed Mar. 22, 2012.
Office Action mailed Sep. 12, 2014 for U.S. Appl. No. 13/756,498.
Office Action mailed Dec. 3, 2015 for U.S. Appl. No. 14/253,796.
Office Action mailed Feb. 13, 2014 for U.S. Appl. No. 13/174,077, filed Jun. 30, 2011.
Office Action mailed Mar. 14, 2012 for U.S. Appl. No. 12/815,369, filed Jun. 14, 2010.
Office Action mailed Mar. 14, 2014 for U.S. Appl. No. 12/835,704, filed Jul. 13, 2010.
Office Action mailed Apr. 15, 2016 for U.S. Appl. No. 14/597,151.
Office Action mailed Apr. 16, 2012 for U.S. Appl. No. 12/834,610, filed Jul. 12, 2010.
Office Action mailed Jan. 16, 2014 for U.S. Appl. No. 13/739,283, filed Jan. 11, 2013.
Office Action mailed May 16, 2012 for U.S. Appl. No. 12/1815,318, filed Jun. 14, 2010.

Office Action mailed Oct. 16, 2012 for U.S. Appl. No. 12/861,650, filed Aug. 23, 2010.
Office Action mailed Apr. 17, 2012 for U.S. Appl. No. 12/814,410, filed Jun. 11, 2010.
Office Action mailed Feb. 17, 2011 for U.S. Appl. No. 12/913,719, filed Oct. 27, 2010.
Office Action mailed Apr. 18, 2016 for U.S. Appl. No. 14/573,770.
Office Action mailed Apr. 19, 2011 for U.S. Appl. No. 12/582,086, filed Oct. 20, 2009.
Office Action mailed Aug. 19, 2013 for U.S. Appl. No. 13/585,759, filed Aug. 14, 2012.
Office Action mailed Jun. 19, 2012 for U.S. Appl. No. 13/149,757, filed May 31, 2011.
Office Action mailed Mar. 19, 2013 for U.S. Appl. No. 13/465,188, filed May 7, 2012.
Office Action mailed Mar. 19, 2013 for U.S. Appl. No. 13/564,639, filed Aug. 1, 2012.
Office Action mailed May 20, 2013 for U.S. Appl. No. 13/725,331, filed Dec. 21, 2012.
Office Action mailed Nov. 20, 2012 for U.S. Appl. No. 13/149,653, filed May 31, 2011.
Office Action mailed Sep. 20, 2013 for U.S. Appl. No. 13/481,600, filed May 25, 2012.
Office Action mailed Mar. 21, 2014 for U.S. Appl. No. 13/447,036, filed Apr. 13, 2012.
Office Action mailed May 21, 2014 for U.S. Appl. No. 13/764,698, filed Feb. 11, 2013.
Office Action mailed Sep. 21, 2011 for U.S. Appl. No. 12/835,704, filed Jul. 13, 2010.
Office Action mailed Jul. 22, 2010 for U.S. Appl. No. 11/875,541, filed Oct. 19, 2007.
Office Action mailed Jul. 22, 2011 for U.S. Appl. No. 12/913,719, filed Oct. 27, 2010.
Office Action mailed Sep. 22, 2013 for U.S. Appl. No. 13/189,401, filed Jul. 22, 2011.
Terabe K., et al., "Quantized Conductance Atomic Switch," Nature, 2005, vol. 433, pp. 47-50.
Office Action mailed Aug. 24, 2011 for U.S. Appl. No. 12/835,699, filed Jul. 13, 2010.
Office Action mailed Apr. 25, 2012 for U.S. Appl. No. 13/149,653, filed May 31, 2011.
Office Action mailed Apr. 25, 2014 for U.S. Appl. No. 13/761,132, filed Feb. 6, 2013.
Office Action mailed Jan. 25, 2012 for U.S. Appl. No. 12/861,650, filed Aug. 23, 2010.
Office Action mailed Oct. 25, 2012 for U.S. Appl. No. 13/461,725, filed May 1, 2012.
Office Action mailed Sep. 25, 2013 for U.S. Appl. No. 13/194,479, filed Jul. 29, 2011.
Office Action mailed Nov. 26, 2012 for U.S. Appl. No. 13/156,232.
Office Action mailed Aug. 27, 2013 for U.S. Appl. No. 13/436,714, filed Mar. 30, 2012.
Office Action mailed Dec. 27, 2013 for U.S. Appl. No. 13/525,096, filed Jun. 15, 2012.
Office Action mailed Mar. 27, 2012 for U.S. Appl. No. 13/314,513, filed Dec. 8, 2011.
Office Action mailed Feb. 28, 2014 for U.S. Appl. No. 12/625,817, filed Nov. 25, 2009.
Office Action mailed Jan. 29, 2014 for U.S. Appl. No. 13/586,815, filed Aug. 15, 2012.
Office Action mailed Jul. 29, 2013 for U.S. Appl. No. 13/466,008, filed May 7, 2012.
Office Action mailed Mar. 29, 2013 for U.S. Appl. No. 12/861,432, filed Aug. 23, 2010.
Office Action mailed Jul. 30, 2012 for U.S. Appl. No. 12/900,232, filed Oct. 7, 2010.
Office Action mailed Jun. 30, 2014 for U.S. Appl. No. 13/531,449, filed Jun. 22, 2012.
Office Action mailed Mar. 30, 2011 for U.S. Appl. No. 11/875,541, filed Oct. 19, 2007.
Office Action mailed Sep. 30, 2013 for U.S. Appl. No. 13/189,401, filed Jul. 22, 2011.

(56) **References Cited**

OTHER PUBLICATIONS

- Office Action mailed Sep. 30, 2013 for U.S. Appl. No. 13/462,653, filed May 2, 2012.
- Office Action mailed Apr. 6, 2015 for U.S. Appl. No. 14/034,390.
- Office Action mailed May 20, 2016 for U.S. Appl. No. 14/613,299.
- Office Action mailed Jul. 9, 2015 for U.S. Appl. No. 14/573,817.
- Owen A.E., et al., "Electronic Switching in Amorphous Silicon Devices: Properties of the Conducting Filament", Proceedings of 5th International Conference on Solid-State and Integrated Circuit Technology, IEEE, 1998, pp. 830-833.
- Owen A.E., et al., "Memory Switching in Amorphous Silicon Devices," Journal of Non-Crystalline Solids, 1983, vol. 50-60 (Pt.2), pp. 1273-1280.
- Owen A.E., et al., "New Amorphous-Silicon Electrically Programmable Nonvolatile Switching Device," Solid-State and Electron Devices, IEEE Proceedings, 1982, vol. 129 (Pt. 1), pp. 51-54.
- Owen A.E., et al., "Switching in Amorphous Devices," International Journal of Electronics, 1992, vol. 73 (5), pp. 897-906.
- Rose M.J., et al., "Amorphous Silicon Analogue Memory Devices," Journal of Non-Crystalline Solids, 1989, vol. 115, pp. 168-170.
- Russo U., et al., "Self-Accelerated Thermal Dissolution Model for Reset Programming in Unipolar Resistive-Switching Memory (RRAM) Devices," IEEE Transactions on Electron Devices, 2009, vol. 56 (2), pp. 193-200.
- Scott J.C., "Is There an Immortal Memory?," American Association for the Advancement of Science, 2004, vol. 304 (5667), pp. 62-63.
- Shin W., et al., "Effect of Native Oxide on Polycrystalline Silicon CMP," Journal of the Korean Physical Society, 2009, vol. 54 (3), pp. 1077-1081.
- Stikeman A., Polymer Memory—The Plastic Path to Better Data Storage, Technology Review, Sep. 2002, pp. 31. Retrieved from the Internet.
- Suehle J.S., et al., "Temperature Dependence of Soft Breakdown and Wear-out in Sub-3 Nm SiO₂ Films", 38th Annual International Reliability Physics Symposium, San Jose, California, 2000, pp. 33-39.
- Sune J., et al., "Nondestructive Multiple Breakdown Events in Very Thin SiO₂ Films," Applied Physics Letters, 1989, vol. 55, pp. 128-130.
- Waser R., et al., "Nanoionics-based Resistive Switching Memories," Nature Materials, 2007, vol. 6, pp. 833-835.
- Written Opinion for Application No. PCT/US2009/060023, mailed on May 18, 2010, 3 pages.
- Written Opinion for Application No. PCT/US2009/061249, mailed on May 19, 2010, 3 pages.
- Written Opinion for Application No. PCT/US2011/040090, mailed on Feb. 17, 2012, 6 pages.
- Written Opinion for Application No. PCT/US2011/045124, mailed on May 29, 2012, 5 pages.
- Written Opinion for Application No. PCT/US2011/046036, mailed on Feb. 23, 2012, 4 pages.
- Yin S., "Solution Processed Silver Sulfide Thin Films for Filament Memory Applications", Technical Report No. UCB/EECS-2010-166, Dec. 17, 2010, Electrical Engineering and Computer Sciences, University of California at Berkeley. Retrieved from the Internet.
- Yuan H.C., et al., "Silicon Solar Cells with Front Hetero-Contact and Aluminum Alloy Back Junction", NREL Conference Paper CP-520-42566, 33rd IEEE Photovoltaic Specialists Conference, May 11-16, 2008, National Renewable Energy Laboratory, San Diego, California.
- Zankovych S., et al., "Nanoimprint Lithography: Challenges and Prospects," Nanotechnology, 2001, vol. 12, pp. 91-95.
- Notice of Allowance for U.S. Appl. No. 14/588,202 dated Jan. 20, 2016, 15 pages.
- Office Action for U.S. Appl. No. 14/588,202 dated Sep. 11, 2015, 9 pages.
- Office Action for U.S. Appl. No. 14/588,202 dated May 10, 2016, 8 pages.
- Advisory Action mailed Jun. 8, 2012 for U.S. Appl. No. 12/835,704, filed Jul. 13, 2010.
- Avila A., et al., "Switching in Coplanar Amorphous Hydrogenated Silicon Devices," Solid-State Electronics, 2000, vol. 44 (1), pp. 17-27.
- Cagli C., et al., "Evidence for Threshold Switching in the Set Process of Nio-based Rram and Physical Modeling for Set, Reset, Retention and Disturb Prediction", 2008 IEEE International Electron Devices Meeting (IEDM), Dec. 15-17, 2008, pp. 1-4, San Francisco, CA, USA.
- Chang P.H., et al., "Aluminum Spiking at Contact Windows in Al/Ti-W/Si," Applied Physics Letters, 1988, vol. 52 (4), pp. 272-274.
- Chen Y., et al., "Nanoscale Molecular-switch Crossbar Circuits," Nanotechnology, 2003, vol. 14, pp. 462-468.
- Chinese Office Action (English Translation) for Chinese Application No. 201180050941.0 dated Apr. 3, 2015, 8 pages.
- Chinese Office Action (English Translation) for Chinese Application No. 201280027066.9 dated Nov. 23, 2015, 6 pages.
- Chinese Office Action (English Translation) for Chinese Application No. 201110195933.7 dated Jul. 31, 2014, 4 pages.
- Chinese Office Action (English Translation) for Chinese Application No. 201110195933.7 dated May 18, 2015, 4 pages.
- Chinese Office Action (English Translation) for Chinese Application No. 201180050941.0 dated Dec. 9, 2015, 5 pages.
- Chinese Office Action (with English Translation) for Chinese Application No. 201280027066.9 mailed on Jul. 4, 2016, 5 pages.
- Chinese Office Action (with English Translation) for Chinese Application No. 201290000773.4 dated Jun. 9, 2014, 3 pages.
- Chinese Search Report (English Translation) for Chinese Application No. 201180050941.0 dated Mar. 25, 2015, 1 page.
- Chinese Search Report (English Translation) for Chinese Application No. 201280027066.9 dated Nov. 13, 2015, 2 pages.
- Choi J.W., "Bistable [2]Rotaxane Based Molecular Electronics: Fundamentals and Applications", Dissertation, Chapter 3, California Institute of Technology, Pasadena, 2007, pp. 79-120. Retrieved from the Internet.
- Chou S.Y., et al., "Imprint Lithography With 25-Nanometer Resolution," Science, 1996, vol. 272, pp. 85-87.
- Collier C.P., et al., "Electronically Configurable Molecular-based Logic Gates," Science, 1999, vol. 285 (5426), pp. 391-395.
- Corrected Notice of Allowability dated Nov. 20, 2014 for U.S. Appl. No. 13/594,665, 5 pages.
- Corrected Notice of Allowability dated Jun. 15, 2016 for U.S. Appl. No. 13/952,467, 10 pages.
- Corrected Notice of Allowability mailed Oct. 1, 2013 for U.S. Appl. No. 13/733,828, filed Jan. 3, 2013.
- Corrected Notice of Allowance mailed Jan. 11, 2013 for U.S. Appl. No. 12/861,666 dated Aug. 23, 2010.
- Dehon A., "Array-Based Architecture for FET-Based, Nanoscale Electronics," IEEE Transactions on Nanotechnology, 2003, vol. 2 (1), pp. 23-32.
- Del Alamo J., et al., "Operating limits of Al-alloyed High-low Junction for BSF Solar Cells," Solid-State Electronics, 1981, vol. 24, pp. 415-420.
- Den Boer W., "Threshold Switching in Hydrogenated Amorphous Silicon," Applied Physics Letters, 1982, vol. 40, pp. 812-813.
- Dey S.K., "Electrothermal Model of Switching in Amorphous Silicon Films," Journal of Vacuum Science & Technology, 1980, vol. 17 (1), pp. 445-448.
- Dong Y., et al., "Si/a-Si Core/Shell Nanowires as Nonvolatile Crossbar Switches," Nano Letters, 2008, vol. 8 (2), pp. 386-391.
- European Search Report for Application No. EP09819890.6 mailed on Mar. 27, 2012.
- European Search Report for Application No. EP11005207.3 mailed on Oct. 12, 2011.
- European Search Report for Application No. EP14000949, mailed on Jun. 4, 2014, 7 pages.
- European Search Report for European Application No. EP11005649 mailed Oct. 15, 2014, 2 pages.
- Ex parte Quayle Action mailed May 8, 2012 for U.S. Appl. No. 12/826,653, filed Jun. 29, 2010.
- Final Office Action dated Jun. 29, 2016 for U.S. Appl. No. 14/692,677, 21 pages.

(56)

References Cited

OTHER PUBLICATIONS

International Search Report and Written Opinion for Application No. PCT/US2012/040242, mailed on Jan. 31, 2013, 9 pages.

Final Office Action mailed Feb. 1, 2016 for U.S. Appl. No. 14/573,817.

Final Office Action mailed May 20, 2016 for U.S. Appl. No. 14/253,796.

Final Office Action mailed Aug. 13, 2014 for U.S. Appl. No. 13/525,096, filed Jun. 15, 2012.

Gangopadhyay S., et al., "Memory Switching in Sputtered Hydrogenated Amorphous Silicon (a-Si:H)," Japanese Journal of Applied Physics, 1985, vol. 24 (10), pp. 1363-1364.

Goronkin H., et al., High-Performance Emerging Solid-State Memory Technologies, MRS Bulletin, Nov. 2004, pp. 805-813. Retrieved from the Internet.

Hajto J., et al., "Amorphous & Microcrystalline Semiconductor Devices: Materials and Device Physics", Artech House Publishers, Mar. 1, 2004, vol. 2, pp. 640-700.

Hajto J., et al., "Analogue Memory and Ballistic Electron Effects in Metal-amorphous Silicon Structures," Philosophical Magazine, 1991, vol. 63 (1), pp. 349-369.

Hajto J., et al., "Electronic Switching in Amorphous-Semiconductor Thin Films", Chapter 14, 1992, pp. 640-701.

Hajto J., et al., "The Programmability of Amorphous Silicon Analogue Memory Elements," Materials Research Society Symposium Proceedings, 1990, vol. 192, pp. 405-410.

Holmes A.J., et al., "Design of Analogue Synapse Circuits using Non-Volatile a-Si:H Memory Devices", Proceedings of IEEE International Symposium on Circuits and System, 1994, pp. 351-354, vol. 6.

Hu J., et al., "AC Characteristics of Cr/p. sup.+a-Si:H/V Analog Switching Devices," IEEE Transactions on Electron Devices, 2000, vol. 47 (9), pp. 1751-1757.

Hu X.Y., et al., "Write Amplification Analysis in Flash-based Solid State Drives", Systor'09; 20090504-20090406, May 4, 2009, pp. 1-9.

Hudgens S., et al., "Overview of Phase-Change Chalcogenide Nonvolatile Memory Technology", MRS Bulletin, Nov. 2004, pp. 829-832. Retrieved from the Internet.

International Search Report and Written Opinion for Application No. PCT/US2011/040362, mailed on Jan. 19, 2012, 7 pages.

International Search Report and Written Opinion for Application No. PCT/US2011/046035, mailed on Mar. 27, 2012, 6 pages.

Notice of Allowance dated Dec. 19, 2014 for U.S. Appl. No. 13/529,985, 9 pgs.

Notice of Allowance dated Jul. 1, 2016 for U.S. Appl. No. 14/213,953, 96 pages.

Notice of Allowance dated Jul. 17, 2014 for U.S. Appl. No. 12/861,432, 25 pages.

Notice of Allowance for U.S. Appl. No. 14/213,953 dated Feb. 16, 2016, 21 pages.

Notice of Allowance for U.S. Appl. No. 14/611,022 dated Feb. 12, 2016, 13 pages.

Notice of Allowance for U.S. Appl. No. 14/611,022 dated Jun. 8, 2016, 57 pages.

Notice of Allowance for U.S. Appl. No. 14/611,022 dated Sep. 10, 2015, 13 pages.

Notice of Allowance mailed Jun. 19, 2012 for U.S. Appl. No. 12/861,650, filed Aug. 23, 2010.

Notice of Allowance for U.S. Appl. No. 14/509,967 dated Feb. 17, 2016, 18 pages.

Notice of Allowance for U.S. Appl. No. 14/509,967 dated Jun. 16, 2016, 96 pages.

Notice of Allowance for U.S. Appl. No. 13/912,136 dated Aug. 3, 2015, 15 pages.

Notice of Allowance for U.S. Appl. No. 13/1952,467 dated May 20, 2016, 19 pages.

Notice of Allowance for U.S. Appl. No. 14/027,045 dated Jun. 9, 2015, 14 pages.

Notice of Allowance for U.S. Appl. No. 14/383,079 dated Jan. 4, 2016, 27 pages.

Notice of Allowance for U.S. Appl. No. 14/887,050 dated Jun. 22, 2016, 13 pages.

Notice of Allowance for U.S. Appl. No. 14/946,367 dated Jul. 13, 2016, 23 pages.

Notice of Allowance mailed Sep. 4, 2014 for U.S. Appl. No. 13/761,132, filed Feb. 6, 2013.

Notice of Allowance mailed Oct. 5, 2011 for U.S. Appl. No. 12/940,920, filed Nov. 5, 2010.

Notice of Allowance mailed Feb. 6, 2012 for U.S. Appl. No. 12/835,699, filed Jul. 13, 2010.

Notice of Allowance mailed Feb. 6, 2013 for U.S. Appl. No. 13/118,258, filed May 27, 2011.

Notice of Allowance mailed Aug. 8, 2013 for U.S. Appl. No. 13/733,828 filed Jan. 3, 2013.

Notice of Allowance mailed Jan. 8, 2013 for U.S. Appl. No. 12/814,410, filed Jun. 11, 2010.

Notice of Allowance mailed Oct. 8, 2013 for U.S. Appl. No. 13/769,152, filed Feb. 15, 2013.

Notice of Allowance mailed Oct. 8, 2013 for U.S. Appl. No. 13/905,074, filed May 29, 2013.

Notice of Allowance mailed Apr. 9, 2013 for U.S. Appl. No. 13/748,490, filed Jan. 23, 2013.

Notice of Allowance mailed Sep. 9, 2014 for U.S. Appl. No. 13/620,012, filed Sep. 14, 2012.

Notice of Allowance mailed Sep. 9, 2014 for U.S. Appl. No. 13/870,919, filed Apr. 25, 2013.

Notice of Allowance mailed Oct. 10, 2013 for U.S. Appl. No. 13/452,657, filed Apr. 20, 2012.

Notice of Allowance mailed Jan. 11, 2013 for U.S. Appl. No. 12/894,087, filed Sep. 29, 2010.

Notice of Allowance mailed May 11, 2012 for U.S. Appl. No. 12/939,824, filed Nov. 4, 2010.

Notice of Allowance mailed Jan. 11, 2016 for U.S. Appl. No. 14/613,299.

Notice of Allowance mailed Mar. 12, 2012 for U.S. Appl. No. 12/913,719, filed Oct. 27, 2010.

Notice of Allowance mailed Jan. 20, 2016 for U.S. Appl. No. 14/034,390.

Notice of Allowance mailed Nov. 13, 2013 for U.S. Appl. No. 13/461,725, filed May 1, 2012.

Notice of Allowance mailed Nov. 14, 2012 for U.S. Appl. No. 12/861,666, filed Aug. 23, 2010.

Notice of Allowance mailed Nov. 14, 2012 for U.S. Appl. No. 13/532,019, filed Jun. 25, 2012.

Notice of Allowance mailed Mar. 15, 2013 for U.S. Appl. No. 12/894,098, filed Sep. 29, 2010.

Notice of Allowance mailed Jan. 16, 2014 for U.S. Appl. No. 13/921,157, filed Jun. 18, 2013.

Notice of Allowance mailed Oct. 16, 2013 for U.S. Appl. No. 13/174,264, filed Jun. 30, 2011.

Notice of Allowance mailed Apr. 17, 2012 for U.S. Appl. No. 13/158,231, filed Jun. 10, 2011.

Notice of Allowance mailed Jan. 17, 2014 for U.S. Appl. No. 13/725,331, filed Dec. 21, 2012.

Notice of Allowance mailed Mar. 17, 2014 for U.S. Appl. No. 13/592,224, filed Aug. 22, 2012.

Notice of Allowance mailed May 17, 2013 for U.S. Appl. No. 13/290,024.

Notice of Allowance mailed Sep. 17, 2013 for U.S. Appl. No. 13/679,976, filed Nov. 16, 2012.

Notice of Allowance mailed Sep. 17, 2014 for U.S. Appl. No. 13/960,735, filed Aug. 6, 2013.

Notice of Allowance mailed Sep. 17, 2014 for U.S. Appl. No. 13/462,653, filed May 2, 2012.

Notice of Allowance mailed Sep. 18, 2012 for U.S. Appl. No. 12/900,232, filed Oct. 7, 2010.

Notice of Allowance mailed Sep. 18, 2014 for U.S. Appl. No. 13/920,021, filed Jun. 17, 2013.

Notice of Allowance mailed Sep. 18, 2014 for U.S. Appl. No. 13/586,815, filed Aug. 15, 2012.

(56)

References Cited

OTHER PUBLICATIONS

Japanese Office Action mailed on Aug. 9, 2016 for Japanese Application No. 2014-513700, 8 pages (including translation).
Chinese Office Action mailed on Sep. 1, 2016 for Chinese Application No. 201380027469.8, 8 pages (including translation).
Office Action dated Aug. 12, 2016 for U.S. Appl. No. 14/667,346, 27 pages.
Office Action dated Aug. 12, 2016 for U.S. Appl. No. 14/613,301, 43 pages.
Office Action dated Aug. 23, 2016 for U.S. Appl. No. 14/613,585, 9 pages.
Notice of Allowance dated Sep. 14, 2016 for U.S. Appl. No. 14/588,202, 119 pages.
Notice of Allowance dated Oct. 5, 2016 for U.S. Appl. No. 14/887,050, 113 pages.
Notice of Allowance dated Oct. 7, 2016 for U.S. Appl. No. 14/213,953, 43 pages.
Notice of Allowance for U.S. Appl. No. 14/509,967 dated Oct. 24, 2016, 42 pages.
Notice of Allowance for U.S. Appl. No. 14/383,079 dated Aug. 17, 2016, 71 pages.
Notice of Allowance for U.S. Appl. No. 14/611,022 dated Oct. 26, 2016, 41 pages.

Notice of Allowance for U.S. Appl. No. 13/952,467 dated Sep. 28, 2016, 128 pages.
Notice of Allowance for U.S. Appl. No. 15/046,172 dated Oct. 4, 2016, 116 pages.
Office Action for U.S. Appl. No. 14/597,151 dated Oct. 20, 2016, 52 pages.
Office Action for U.S. Appl. No. 14/588,136 dated Nov. 2, 2016, 132 pages.
Notice of Allowance for U.S. Appl. No. 14/692,677 dated Nov. 21, 2016, 97 pages.
Corrected Notice of Allowability dated Dec. 6, 2016 for U.S. Appl. No. 14/383,079, 33 pages.
Notice of Allowance for U.S. Appl. No. 14/194,499 dated Dec. 12, 2016, 125 pages.
International Search Report and Written Opinion for PCT Patent Application No. PCT/US2012/040232 filed on May 31, 2012.
Office Action for U.S. Appl. No. 13/585,759 dated May 7, 2013.
Office Action for U.S. Appl. No. 13/592,224 dated May 23, 2013.
Notice of Allowance for U.S. Appl. No. 13/585,759 dated Sep. 19, 2013.
Office Action for U.S. Appl. No. 13/960,735 dated Dec. 6, 2013.
International Search Report and Written Opinion for PCT Patent Application No. PCT/US2013/054976, filed on Aug. 14, 2013.

* cited by examiner

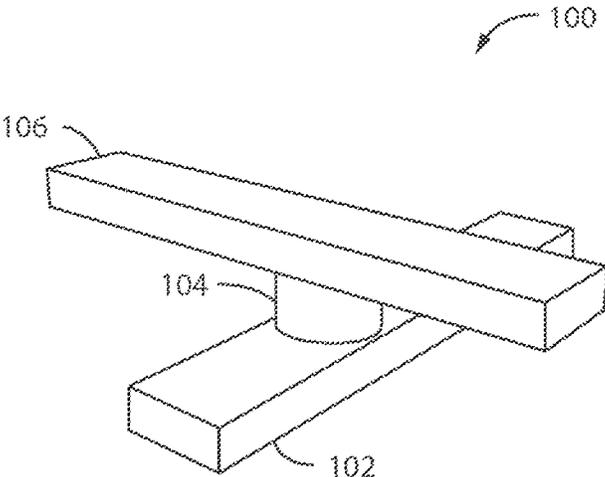


FIG. 1

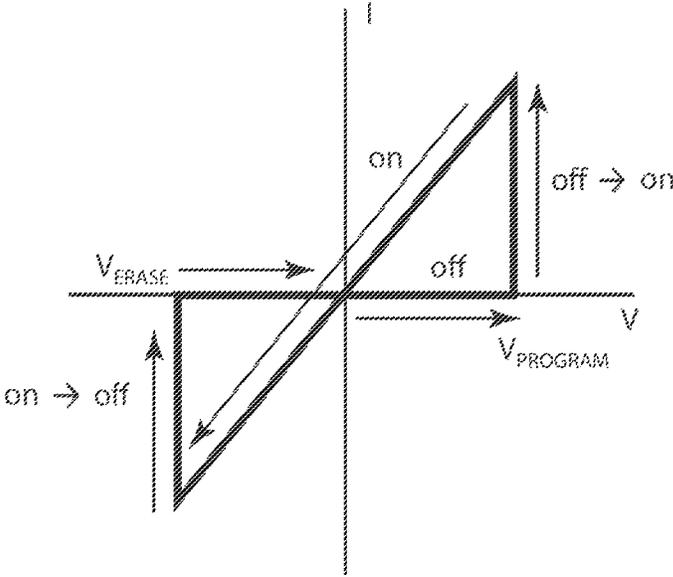


FIG. 2

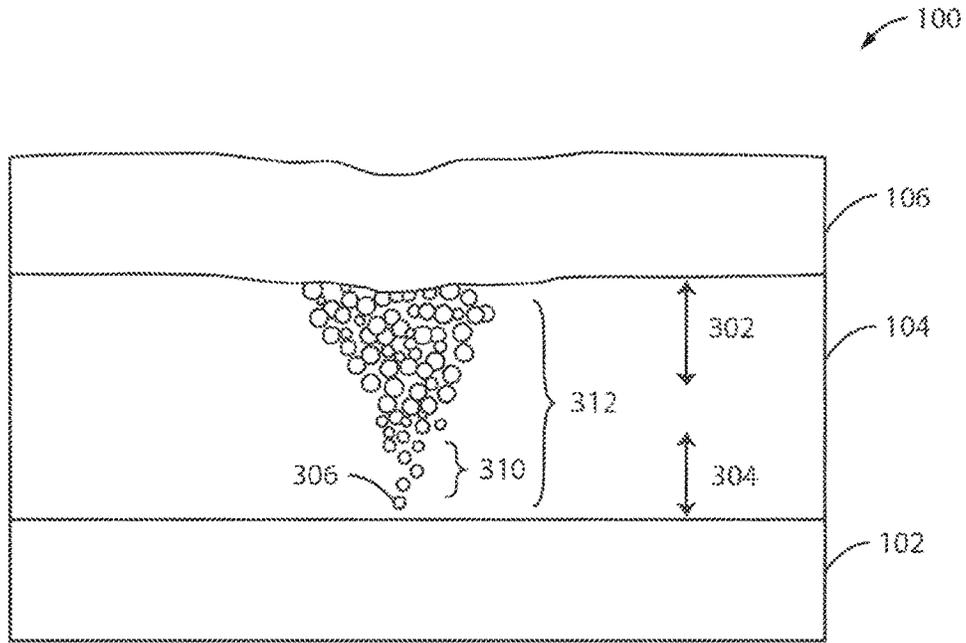


FIG. 3A

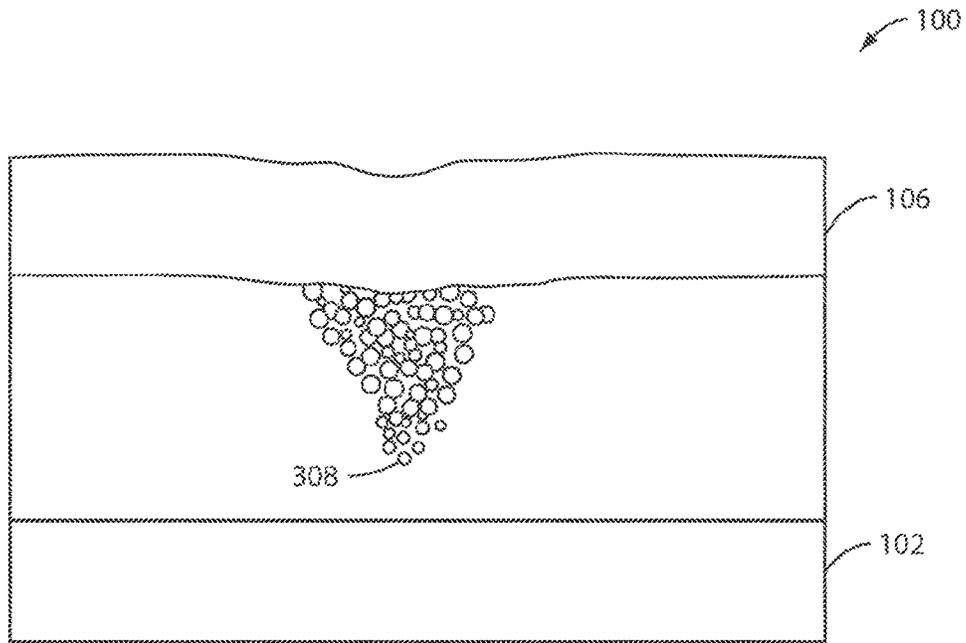


FIG. 3B

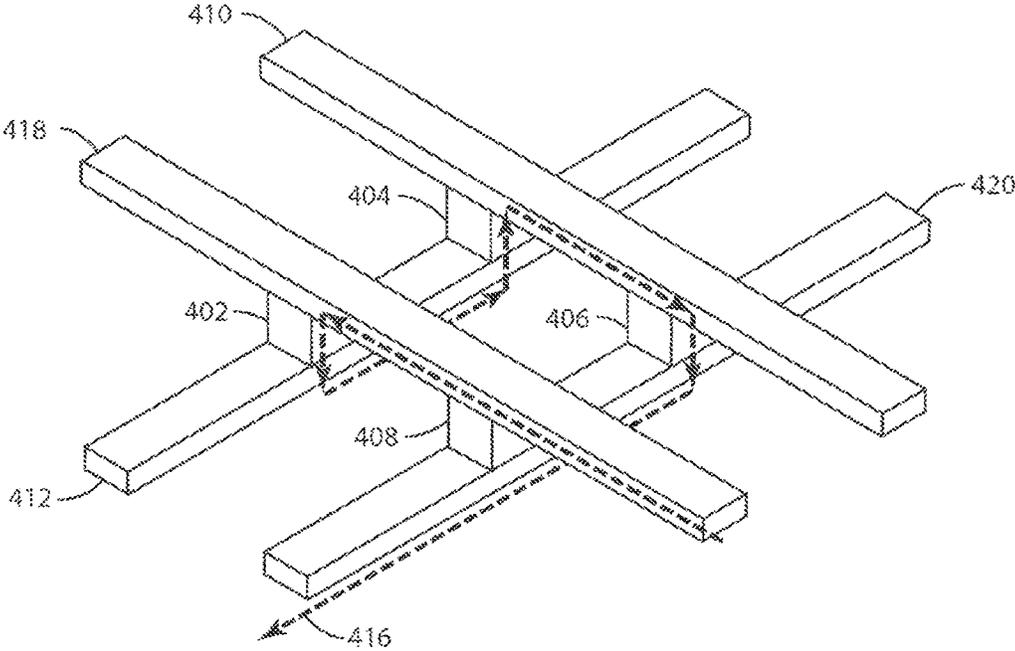


FIG. 4

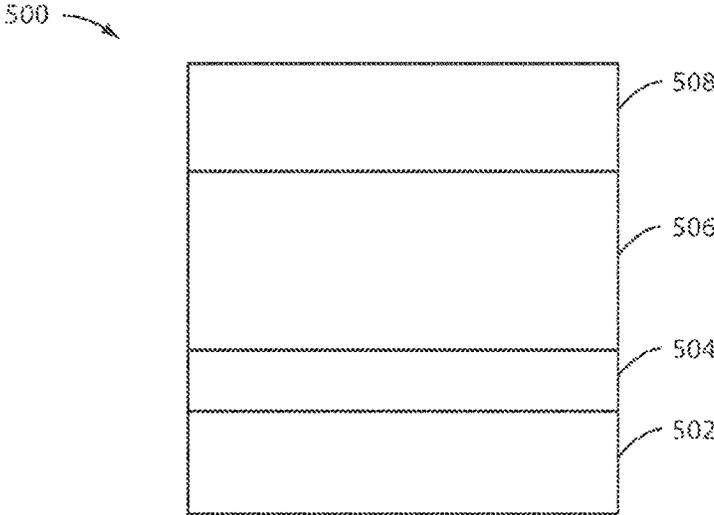


FIG. 5

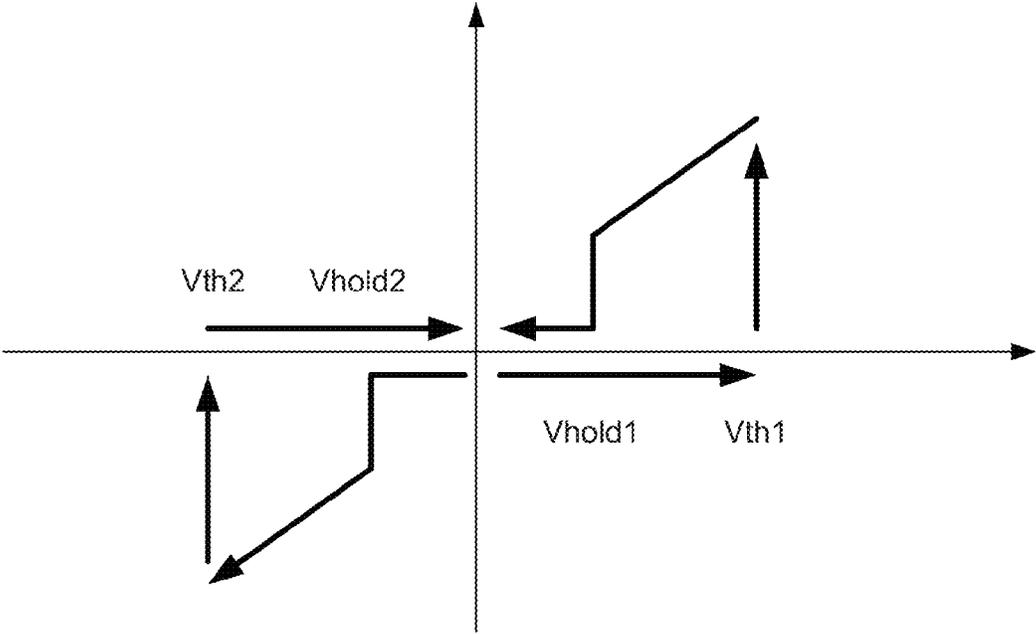


FIG. 6A

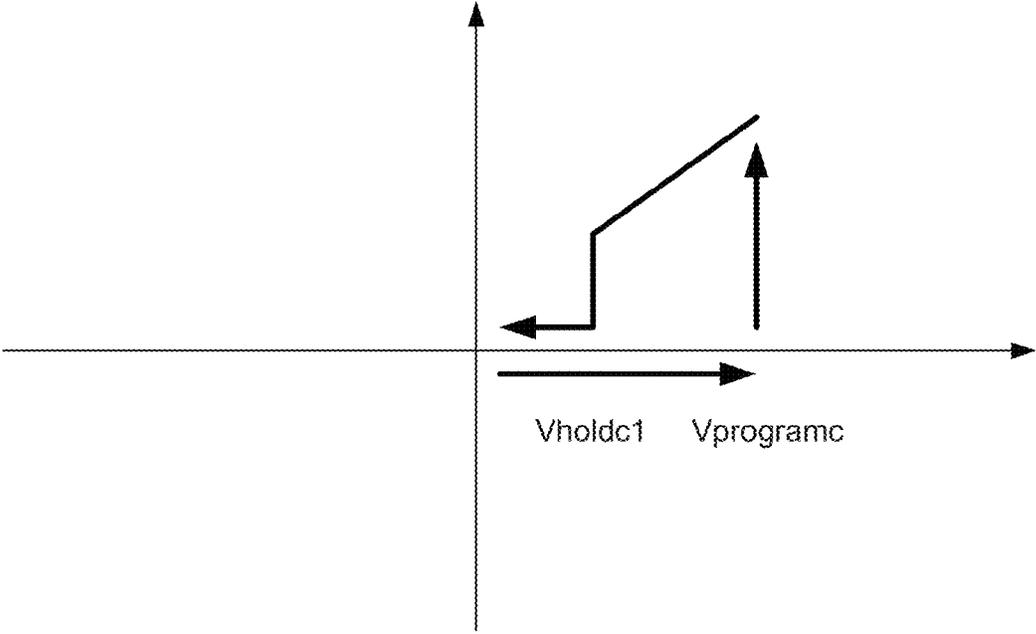


FIG. 6B

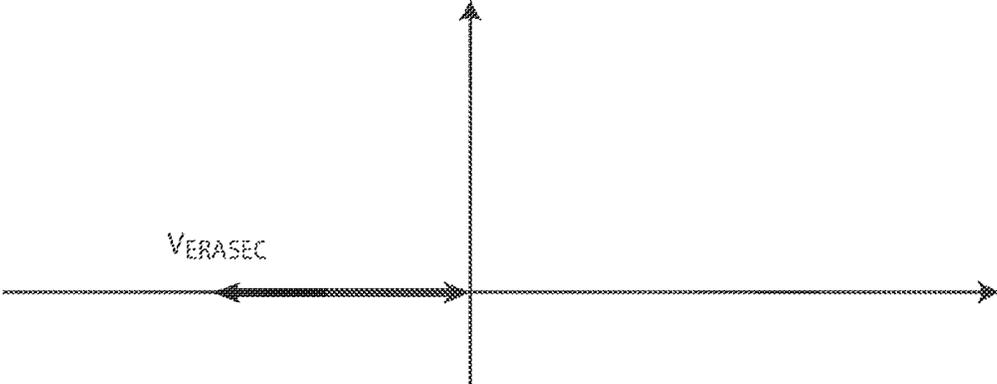


FIG. 6C

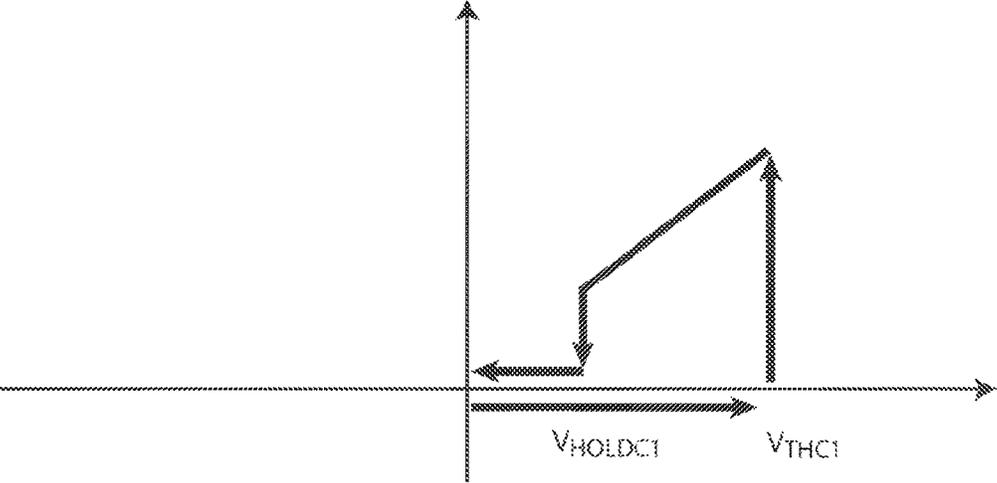


FIG. 6D

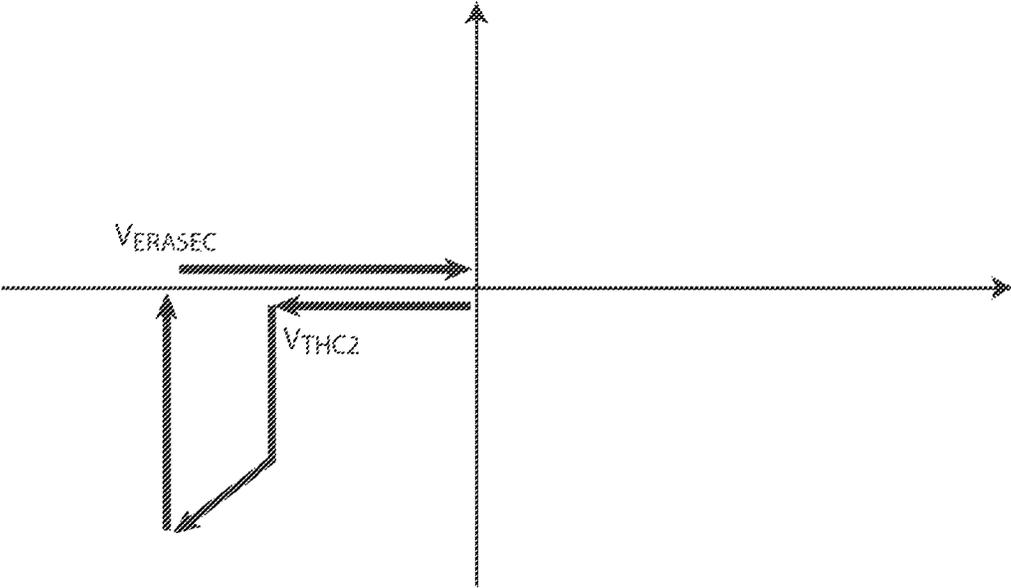


FIG. 6E

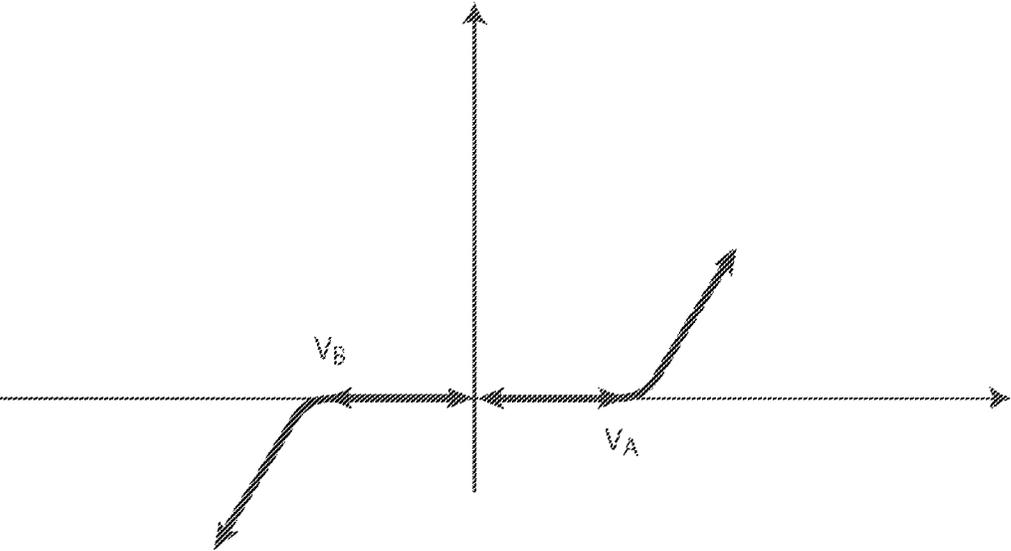


FIG. 7A

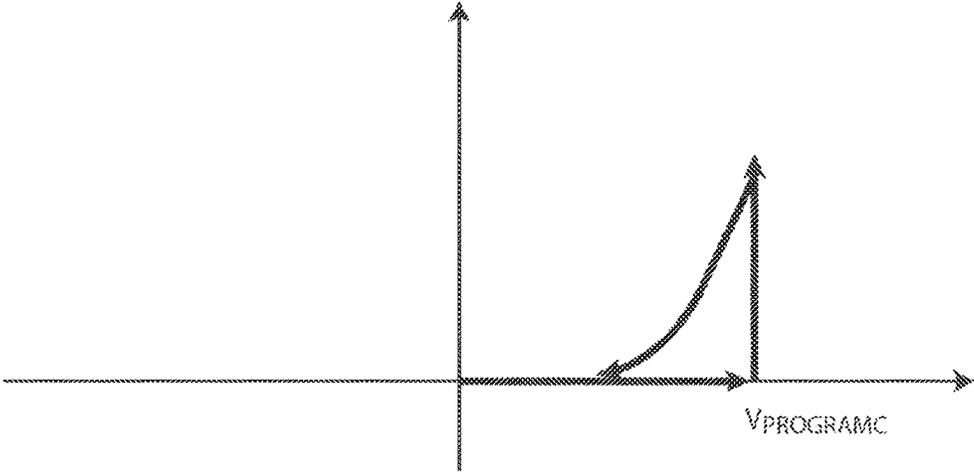


FIG. 7B

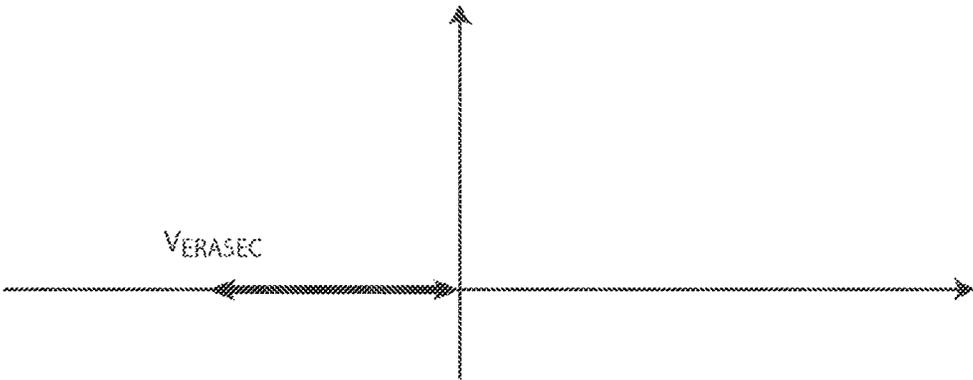


FIG. 7C

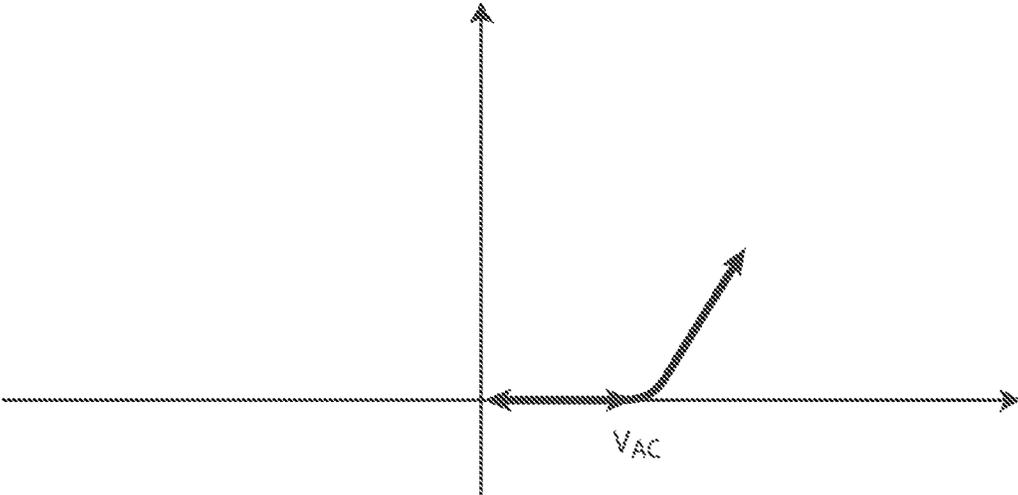


FIG. 7D

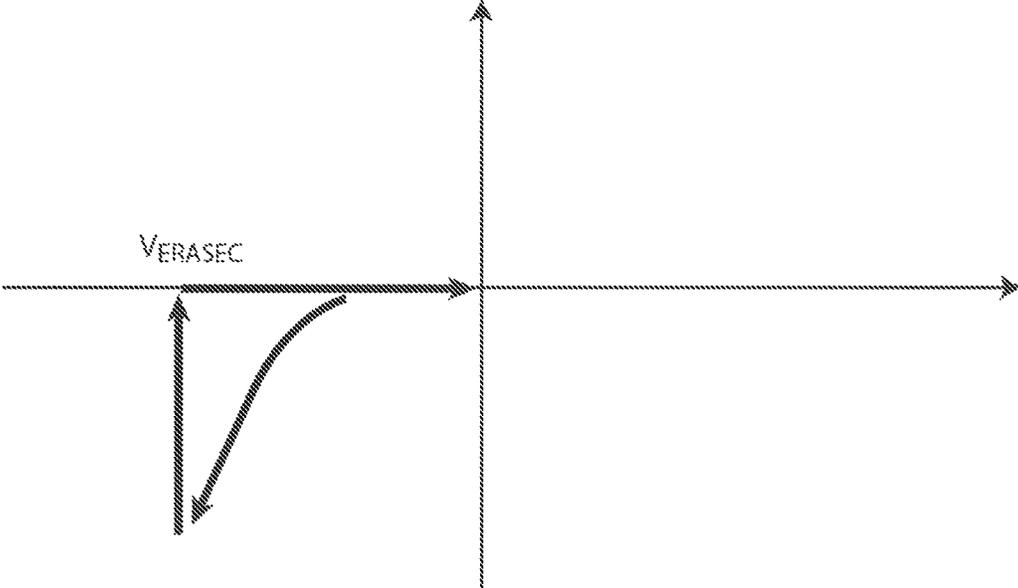


FIG. 7E

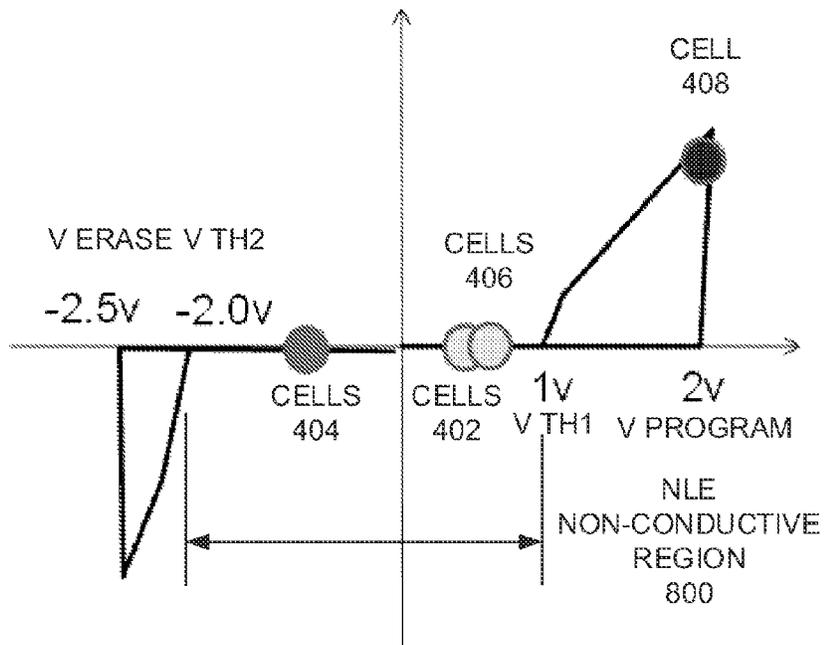


FIG. 8A

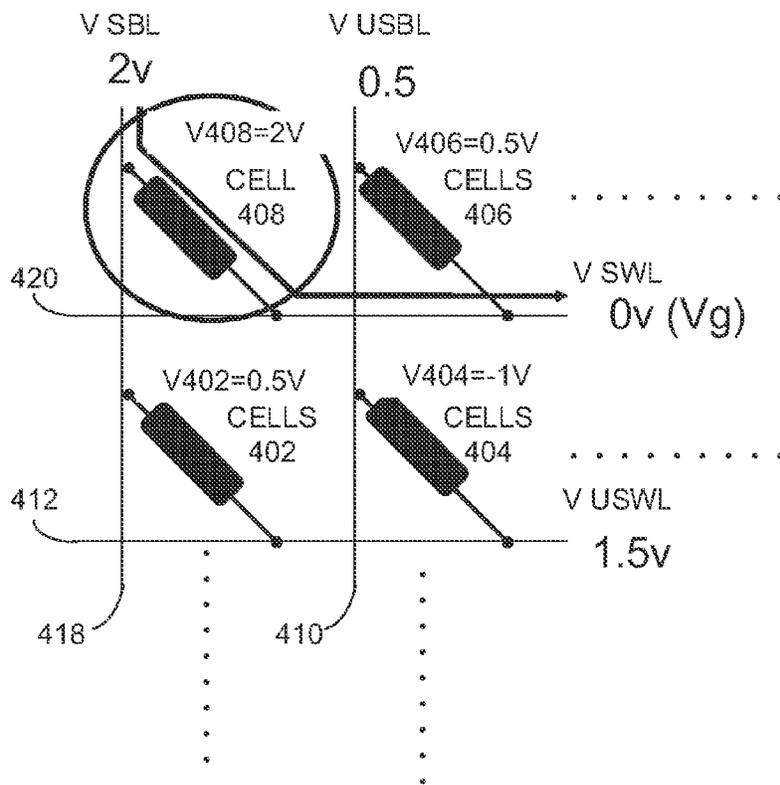


FIG. 8B

SWITCHING DEVICE HAVING A NON-LINEAR ELEMENT

Matter enclosed in heavy brackets [] appears in the original patent but forms no part of this reissue specification; matter printed in italics indicates the additions made by reissue; a claim printed with strikethrough indicates that the claim was canceled, disclaimed, or held invalid by a prior post-patent action or proceeding.

CROSS REFERENCE TO RELATED APPLICATIONS

This application is a Reissue of U.S. Pat. No. 8,767,441 B2 issued Jul. 1, 2014 that claims priority to and is a continuation-in-part of U.S. application Ser. No. 13/149,757, filed May 31, [2012. This application also] 2011, now issued as U.S. Pat. No. 8,502,185 on Aug. 6, 2013, and that claims priority to U.S. application Ser. No. 13/290,024, filed Nov. 4, 2011, now issued as U.S. Pat. No. 8,467,227 on Jun. 18, 2013, which is a non-provisional of U.S. Application No. 61/410,035, filed Nov. 4, 2010, U.S. Application No. 61/712,171, filed Oct. 10, 2012, and U.S. application No. 61/786,100, filed Mar. 15, 2013. These cited documents are incorporated by reference herein, for all purposes.

JOINT RESEARCH AGREEMENT

The presently claimed invention was made by or on behalf of the below listed parties to a joint university-corporation research agreement. The joint research agreement was in effect on or before the date the claimed invention was made and the claimed invention was made as a result of activities undertaken within the scope of the joint research agreement. The parties to the joint research agreement are The University of Michigan and Crossbar, Incorporated.

BACKGROUND

The present invention is related to switching devices. More particularly, the present invention provides a structure and a method for forming non-volatile resistive switching memory devices characterized by a suppression of current at low bias and a high measured ON/OFF resistance ratio.

The success of semiconductor devices has been mainly driven by an intensive transistor down-scaling process. However, as field effect transistors (FET) approach sizes less than 100 nm, problems such as short channel effect start to prevent proper device operation. Moreover, such sub 100 nm device size can lead to sub-threshold slope non-scaling and increased power dissipation. It is generally believed that transistor based memories such as those commonly known as Flash memory may approach an end to scaling within a decade. Flash memory is one type of non-volatile memory device.

Other non-volatile random access memory (RAM) devices such as ferroelectric RAM (Fe RAM), magnetoresistive RAM (MRAM), organic RAM (ORAM), and phase change RAM (PCRAM), among others, have been explored as next generation memory devices. These devices often require new materials and device structures to couple with silicon based devices to form a memory cell, which lack one or more key attributes. For example, Fe-RAM and MRAM devices have fast switching characteristics and good programming endurance, but their fabrication is not CMOS

compatible and size is usually large. Switching for a PCRAM device uses Joules heating, which inherently has high power consumption. Organic RAM or ORAM is incompatible with large volume silicon based fabrication and device reliability is usually poor.

As integration of memory devices increases, the size of elements is reduced while the density of elements in a given area is increased. As a result, dark current or leakage current becomes more of a problem, where leakage current can return a false result for a read operation or cause an unintentional state change in a cell. The problem of leakage current is particularly acute in two-terminal devices, in which multiple memory cells can form leakage paths through interconnecting top and bottom electrodes.

Conventional approaches to suppressing leakage current in switching devices include coupling a vertical diode to a memory element. However, the external diode approach has several disadvantages. In general, the diode fabrication process is a high temperature process, typically conducted above 500 degrees Celsius. Because most diodes rely on a P/N junction, it is difficult to scale the diode height to achieve a memory and diode structure with a desirable aspect ratio. And finally, a conventional diode is only compatible with a unipolar switching device, and not a two-way bipolar device. It is therefore desirable to have a robust and scalable method and structure for a highly integrated memory that is not adversely affected by leak currents.

BRIEF SUMMARY OF THE INVENTION

The present invention is generally related to switching devices. More particularly, the present invention provides a structure and a method for forming a non-volatile memory cell using resistive switching. It should be recognized that embodiments according the present invention have a much broader range of applicability.

In a specific embodiment, a switching device includes a substrate; a first electrode formed over the substrate; a second electrode formed over the first electrode; a switching medium disposed between the first and second electrode; and a nonlinear element disposed between the first and second electrodes and electrically coupled in series to the first electrode and the switching medium. The nonlinear element is configured to change from a first resistance state to a second resistance state on application of a voltage greater than a threshold.

The switching device includes a RRAM in an embodiment.

The switching device include a PCRAM in an embodiment.

The present invention has a number of advantages over conventional techniques. For example, embodiments of the present invention allow for a high density non-volatile memory characterized by high switching speed, low leakage current characteristic, and high device yield. Depending on the embodiment, one or more of these may be achieved. These and other advantages will be described below in more detail in the present specification.

BRIEF DESCRIPTION OF THE DRAWINGS

Exemplary embodiments will hereinafter be described in conjunction with the appended drawings, wherein like designations denote like elements, and wherein:

FIG. 1 illustrates a non-volatile memory device including a memory cell that has a bottom electrode, a switching medium, and a top electrode according to an embodiment of the present invention;

FIG. 2 illustrates I-V resistance switching characteristics of a resistive memory cell;

FIG. 3A illustrates a two-terminal memory cell that is placed in an ON state by applying a program voltage $V_{PROGRAM}$ to the top electrode;

FIG. 3B illustrates a two-terminal memory cell that is placed in an OFF state by applying an erase voltage V_{ERASE} to the top electrode;

FIG. 4 illustrates a memory array including a leakage current;

FIG. 5 illustrates a non-volatile memory cell including a nonlinear element according to an embodiment of the present invention;

FIG. 6A illustrates I-V characteristics of a digital nonlinear element subjected to a voltage sweep;

FIG. 6B illustrates I-V characteristics of a switch combined with a digital nonlinear element in an initially OFF state subjected to a positive voltage sweep;

FIG. 6C illustrates I-V characteristics of a switch combined with a digital nonlinear element in an initially OFF state subjected to a negative voltage sweep;

FIG. 6D illustrates I-V characteristics of a switch combined with a digital nonlinear element in an initially ON state subjected to a positive voltage sweep;

FIG. 6E illustrates I-V characteristics of a switch combined with a digital nonlinear element in an initially ON state subjected to a negative voltage sweep;

FIG. 7A illustrates I-V characteristics of an analog nonlinear element subjected to a positive voltage sweep;

FIG. 7B illustrates I-V characteristics of a switch combined with an analog nonlinear element in an initially OFF state subjected to a positive voltage sweep;

FIG. 7C illustrates I-V characteristics of a switch combined with an analog nonlinear element in an initially OFF state subjected to a negative voltage sweep;

FIG. 7D illustrates I-V characteristics of a switch combined with an analog nonlinear element in an initially ON state subjected to a positive voltage sweep;

FIG. 7E illustrates I-V characteristics of a switch combined with an analog nonlinear element in an initially ON state subjected to a negative voltage sweep; and

FIG. 8A illustrates I-V characteristics of a non-volatile memory cell including a nonlinear element according to an embodiment of the present invention; and

FIG. 8B illustrates a memory array including leakage currents.

DETAILED DESCRIPTION OF THE PRESENT INVENTION

The present invention is generally directed to a memory device. More particularly, the present invention provides a structure and a method for a resistive switching cell having a nonlinear element. The switching cell may be used in a Resistive Random Access Memory (RRAM) or any highly integrated device. It should be recognized that embodiments of the present invention can have a broader range of applicability. Although the present invention is described with respect to specific embodiments, the embodiments are only used for illustrative purposes and should not be considered limiting.

RRAM is typically a two terminal device in which a switching element is sandwiched between a top electrode

and a bottom electrode. The resistance of the switching element is varied by applying a voltage to the electrodes or a current through the switching element. Resistive switching can be bipolar or unipolar. In bipolar switching, the change in resistance of the switching element depends on polarity and a magnitude of a current or voltage based applied electrical signal. In the case of unipolar switching, the change in resistance of the switching element depends only on the magnitude of the applied voltage or current and typically is a result of Joule heating within the switching element. Embodiments of the present invention are explained with respect to a two-terminal RRAM device using bipolar switching, but are not limited thereto. As used herein, the terms "RRAM" or "resistive memory cell" refer to a memory cell or memory device that uses a switching medium whose resistance can be controlled by applying an electrical signal without ferroelectricity, magnetization, and phase change of the switching medium. The present invention is not limited to implementation in RRAM, e.g., the invention may be implemented using the phase change RAM.

FIG. 1 illustrates a resistive memory cell **100** in a non-volatile memory device, e.g., a semiconductor memory chip. The memory cell includes a bottom electrode **102**, a switching medium **104**, and a top electrode **106** according to an embodiment of the present invention. The switching medium **104** exhibits a resistance that can be selectively set to various values and reset using appropriate control circuitry. The memory cell **100** is a two-terminal resistive memory device, e.g., RRAM, in the present embodiment. Terms such as "top" or "bottom" are used for illustrative purpose only and should not construe to be limiting.

In the present embodiment, the memory cell **100** is an amorphous-silicon-based resistive memory cell and uses amorphous silicon (a-Si) as the switching medium **104**. The resistance of the switching medium **104** changes according to formation or retrieval of a conductive filament inside the switching medium **104** according to a voltage applied to the electrodes. In an embodiment, the switching medium **104** is substantially free of dopants. In another embodiment, the switching medium **104** is a-Si doped with boron. In some embodiments, the resistive switching layer includes a silicon oxide, e.g. a silicon sub oxide, (e.g SixOy , where $x > 0 < y \leq 1$, $0 < x < 2$), or sub-oxide material such as Ge, SixGe_y, and SixGe_yOz. It should be understood that any such sub-oxide refers to a non-stoichiometric oxide. An example of this is silicon oxide: stoichiometric silicon oxide is SiO_2 , and non-stoichiometric oxide may be SiO_x where $0 < x < 2$. In various embodiments, other forms of non-stoichiometric oxide may be formed or grown using various fabrication techniques.

The top electrode **106** is a conductive layer containing silver (Ag) and acts as the source of filament-forming ions in the a-Si structure. Although silver is used in the present embodiment, it will be understood that the top electrode **106** can be formed from various other suitable metals, such as gold (Au), nickel (Ni), aluminum (Al), chromium (Cr), iron (Fe), manganese (Mn), tungsten (W), vanadium (V), and cobalt (Co). In certain embodiments, the bottom electrode **102** is pure metal, a boron-doped electrode, or other p-type polysilicon or silicon-germanium, which is in contact with a lower-end face of the a-Si structure. In an embodiment, the memory cell **100** is configured to store more than a single bit of information, e.g., by adjusting the external circuit resistance, as explained in application Ser. No. 12/575,921, filed on Oct. 9, 2009, which is entitled "Silicon-Based Nanoscale

5

Resistive Device with Adjustable Resistance” and is incorporated by reference in its entirety.

FIG. 2 illustrates resistance switching characteristics of the memory cell 100 according to an embodiment of the present invention. The switching medium 104 displays a bipolar switching effect. The resistance of the switching medium 104 changes depending on the polarity and magnitude of the voltage signal applied to the switching medium 104 via the top electrode 106 and the bottom electrodes 102. The memory cell 100 is changed into an ON state (low resistance state) when a positive voltage equal to or greater than a threshold program voltage (also referred to as a “program voltage”) $V_{PROGRAM}$ is applied. In an embodiment, the program voltage ranges between 1 volt to 5 volts depending on the materials used for the switching medium 104 and the top electrode 106. In another embodiment, the program voltage ranges between 1 volt and 3 volts. The memory cell 100 is switched back to an OFF state (high resistance state) when a negative voltage equal to or greater than a threshold erase voltage (also referred to as “erase voltage”) V_{ERASE} is applied. In an embodiment, the erase voltage ranges from -2 volts to -5 volts. The cell state is not affected if the voltage applied is between two threshold voltages $V_{PROGRAM}$ and V_{ERASE} , which enables a low-voltage read process. Once the memory cell 100 is set to a specific resistance state, the memory cell 100 retains the information for a certain period (or retention time) without electrical power.

FIG. 2 illustrates a current-voltage (I-V) relationship through a switching operation of a non-rectifying memory cell 100. Electrical current flows from the top electrode 106 to the bottom electrode 102 when the potential applied to the top electrode 106 is positive potential with respect to the bottom electrode 102. On the other hand, current flows in the reverse direction if the potential applied to the top electrode 106 is negative with respect to the bottom electrode 102.

FIGS. 3A and 39 illustrate a switching mechanism of the memory cell 100 during the ON and OFF states according to an embodiment of the present invention. The switching in the switching medium 104 is based on formation and retrieval of a conductive filament, or a plurality of filaments, in a filament region in the switching medium 104 according to the program and the erase voltages applied to the bottom electrode 102 and the top electrode 106 of the memory cell 100.

FIG. 3A illustrates the memory cell 100 that is placed in an ON state by applying the program voltage $V_{PROGRAM}$ to the top electrode 106. The switching medium 104, made of a-Si, is provided between the bottom electrode 102 and the top electrode 106. An upper portion of the switching medium 104 includes a metallic region (or conductive path) 302 that extends from the top electrode 106 to approximately 10 nm above the bottom electrode 102. The metallic region 302 is formed during an electroforming process when a slightly larger voltage than a subsequent switching voltage, e.g., 3-5 V, is applied to the top electrode 106. This large voltage causes the electric field-induced diffusion of the metal ions from the top electrode 106 toward the bottom electrode 102, thereby forming a continuous conductive path 312. A lower portion of the switching medium 104 defines a filament region 304, wherein the filament 310 is formed when the program voltage $V_{PROGRAM}$ is applied after the electroforming process. The continuous conductive path 312 and the filament 310 can also be formed together during the electroforming process. The filament 310 comprises a series of metal particles, which are trapped in defect sites in a lower portion of the switching medium 104 when the

6

program voltage $V_{PROGRAM}$ applied provides sufficient activation energy to push a number of metal ions from the metallic region 302 toward the bottom electrode 102.

The filament 310 is believed to be comprised of a collection of metal particles that are separated from each other by the non-conducting switching medium 104 and that do not define a continuous conductive path, unlike the continuous conductive path 312 in the metallic region 302. The filament 310 extends about 2 to 10 nm depending on implementation. The conduction mechanism in an ON state is electrons tunneling through the metal particles in the filament 310. The cell resistance is dominated by the tunneling resistance between the metal particle 306 and the bottom electrode 102. The metal particle 306 is a metal particle in the filament region 304 that is closest to the bottom electrode 102 and that is the last metal particle in the filament region 304 in an ON state.

FIG. 3B illustrates the memory cell 100 that is placed in an OFF state by applying an erase voltage V_{ERASE} to the top electrode 106. The erase voltage exerts sufficient electromagnetic force to dislodge the metal particles trapped in the defects sites of the a-Si and retrieves at least part of the filament 310 from the filament region 304. The metal particle 308 that is closest to the bottom electrode 102 in an OFF state is separated from the bottom electrode 102 by a distance greater than the metal particle 306 during an ON state. This increased distance between the metal particle 308 and the bottom electrode 102 places the memory cell 100 in a high resistance state compared to an ON state. In an embodiment, the resistance ratio between ON/OFF states ranges from $10E3$ to $10E7$. Memory cell 100 behaves like a resistor in an ON state and a capacitor in an OFF state (i.e., the switching medium 104 does not conduct a current in any meaningful amount and behaves as a dielectric in an OFF state). In an implementation, the resistance is $10E5$ Ohm in an ON state and $10E10$ Ohm in an OFF state. In another implementation, the resistance is $10E4$ Ohm in an ON state and $10E9$ Ohm in an OFF state. In yet another implementation, the resistance is at least $10E7$ Ohm in an OFF state.

FIG. 4 illustrates a portion of an array 400 that is in a crossbar configuration in which the (common) top electrodes and the (common) bottom electrodes are arranged in an orthogonal manner according to an embodiment of the present invention. An array of such crossbar structures includes a plurality of parallel (common) top electrodes and a plurality of parallel (common) bottom electrodes with switching elements disposed between the intersection regions of the (common) top electrodes and the (common) bottom electrodes. Certain limitations may exist in such a configuration, as described below.

Four memory cells 402, 404, 406, and 408 are shown. Memory cells 404 and 406 share a common first top electrode 410, while cells 402 and 408 share a common second top electrode 418. The first top electrode 410 and the second top electrode 418 are arranged parallel to each other. Memory cells 402 and 404 share a common first bottom electrode 412 and cells 406 and 408 share a common second bottom electrode 420. The first bottom electrode 412 and the second bottom electrode 420 are spatially arranged parallel to each other. In addition, each of the top electrodes is configured to be non-parallel to each of the bottom electrodes.

To determine a state of a target cell which has a high resistance state, a voltage is applied and a current flowing through the target cell is measured. If some cells in the crossbar array are in low resistance states, the voltage applied to the target cell can cause a leakage current to flow

through the untargeted cells instead. In this case the cells causing the leakage, including the target cell, are interconnected through shared electrodes. The leakage current can form a current path, commonly known as a sneak current or a sneak current path, through these untargeted cells. Such a sneak current can cause undesirable behavior in a switching array.

For example, in an exemplary array, cells **402**, **404**, and **406** are at a low resistance ON state, and cell **408** is at a high resistance OFF state. Because the ON state is characterized by a low resistance, a sneak path **416** may be formed allowing current to flow through cells **402**, **404**, and **406**. Thus, when a read voltage is applied to target cell **408**, leakage current flowing along sneak path **416** may cause an erroneous reading of an ON state result.

In some embodiments, a sneak path can be very short, existing in as few as two forward biased cells and one reverse biased cell. In addition, once started, a sneak path can propagate throughout the array through cells in the ON state. The most common conductive path in a switching array is the shared top and bottom electrodes. Sneak path **416** is only one example of a sneak path passing leakage current through an array.

To mitigate problems caused by leakage current in a switching array, a nonlinear element (NLE) may be included in a resistive switching device. NLEs can be generally divided into two categories: an NLE that exhibits digital-like behavior, or "digital NLE," and an NLE that exhibits analog-like behavior, or an "analog NLE," both of which are described in detail separately below. The categories of digital and analog behavior are not strictly defined, so it is possible for a particular NLE to have properties that are characteristic of both digital and analog behavior, or somewhere in between. In its most basic form, an NLE is an element that has a nonlinear response with respect to voltage, for instance, with a nonlinear I-V relationship. In most embodiments, the relationship is characterized by a high resistance state at low amplitude voltages and a lower resistance state at higher amplitude voltages, with a nonlinear transition from the high resistance state to the low resistance state. Unlike a switching medium, an NLE does not have a memory characteristic; an NLE returns to an original state when a voltage is no longer applied. An NLE that is suitable for suppressing leak currents is characterized by a high resistance state at a low bias, a lower resistance state at a higher bias, and a threshold between the states.

In an embodiment, an NLE is a two terminal device which shows an apparent threshold effect such that the resistance measured below a first voltage is significantly higher than the resistance measured above a second voltage. In a typical embodiment, the resistance below the first voltage is more than 100 times greater than the resistance above the second voltage. In other embodiments, the ratio may be in the range of about 100 to about 500 times, in the range of about 500 times to about 1000 times, in the range of about 1000 times to about 10,000 times, or the like, depending upon specific engineering requirements of the NLE material. In some embodiments, the first and second voltages are different, and are typically referred to as a hold voltage V_{HOLD} and threshold voltage V_{TH} , respectively. In other embodiments, the first voltage and second voltage may be the same. In various embodiments, these relationships may exist in both polarities of voltage, or only in one polarity, and the NLE can be a single material or multiple layers of different materials.

As shown in FIG. 5, to mitigate the effects of leakage current in a memory cell **500**, an NLE **504** is electrically

coupled in series to the top electrode **508**, bottom electrode **502**, and switching medium **506**. An NLE **504** may be disposed between the bottom electrode **502** and switching medium **506**. In other embodiments, the NLE is disposed between the top electrode **508** and the switching medium **506**. Higher temperatures may be experienced by the lower portions of a semiconductor device during various semiconductor processes, so an NLE that is located lower in a stack structure may be designed to withstand higher temperatures than an NLE located further from the substrate.

The behavior of a digital NLE is characterized by abrupt changes in current at certain voltages, which may be referred to as threshold voltages. Such behavior is illustrated in FIG. 6A, which shows the results of a voltage sweep in an embodiment with respect to current on an NLE that is not coupled to a resistive switching device. As positive bias voltage is applied to the NLE, the NLE is in a resistive state characterized by high resistance until it reaches the threshold voltage V_{TH1} . After this threshold has been reached, the NLE will retain its conductive state until the applied voltage drops below a hold voltage V_{HOLD1} . Thus a NLE that is in a conductive state by having a voltage applied above V_{TH1} will continue to have a low resistance so long as a voltage above V_{HOLD1} is supplied to the NLE, after which it reverts to the original high-resistance state. An NLE does not have a memory characteristic, so the same I-V relationship is experienced every time a voltage is applied from an original state.

Referring back to FIG. 6A, when a negative bias voltage is applied that is more negative than a threshold voltage V_{TH2} , an abrupt transition is experienced, and the resistance in the NLE is significantly reduced. The NLE retains its low resistance state until the voltage becomes less negative than a value V_{HOLD2} , at which point the NLE reverts to an original high resistance state. Although FIG. 6A shows an embodiment with symmetrical I-V behavior between positive and negative bias performance, in other embodiments the relationship is not symmetrical.

FIGS. 6B to 6E show I-V relationships of an embodiment where an NLE is coupled to a memory cell ("combined device"), in this case a digital NLE. Memory cell **500** is an example of such a combined device. If the memory cell depicted in those figures was not coupled to the NLE, it would have an I-V response according to FIG. 2. Turning to FIG. 6B, an I-V curve showing a program operation switching a cell from an initially OFF state to an ON state is shown. To establish a conductive ON state in a cell, a voltage above $V_{PROGRAMC}$ is applied. $V_{PROGRAMC}$ is the program voltage for the combined device, which switches the combined device from an OFF state to an ON state. V_{HOLD1C} is the hold voltage of a combined device, which performs in essentially the same way as V_{HOLD1C} described above. In a preferred embodiment, V_{HOLD1C} is less than V_{TH1} , which is less than $V_{PROGRAMC}$.

The relationships between I-V performance in a memory cell, an NLE, and a combined device can also be explained through equations. The equations assume that both the NLE and the switching medium switch instantly (e.g., a few ns or a few hundreds of ns) when experiencing a threshold voltage. In addition to the definitions given above, the following variables are designated:

R_{MOFF} =The OFF state resistance of a memory element

R_{MON} =The ON state resistance of a memory element

R_{NOFF} =The OFF state resistance of an NLE

R_{NON} =The ON state resistance of an NLE

Using these variables, the relationship between the hold voltage of a combined device and the hold voltage of an NLE can be expressed as:

$$V_{HOLD1} = ((R_{MON} + R_{NON}) / R_{NON}) V_{HOLD1}$$

The value for the program voltage of the combined device can be expressed as:

$$V_{PROGRAMC} = \text{small} \{ \text{large}((R_{MOFF} + R_{NOFF}) / R_{NOFF}) V_{TH1}, V_{PROGRAM}, \text{large}(V_{TH1}, ((R_{MOFF} + R_{NOFF}) / R_{MOFF}) V_{PROGRAM}) \}$$

Where “small” indicates the smaller of two values in a set, and “large” indicates the larger of two values in a set. In most embodiments, the $V_{PROGRAM}$ is significantly higher than V_{TH1} , and $V_{PROGRAMC}$ is thus similar to $V_{PROGRAM}$.

FIG. 6C shows the result of a negative voltage sweep of the same switch in an OFF state. Because it is already in the OFF state, a negative voltage does not cause an erase operation, and the cell remains in a high resistance OFF state.

FIGS. 6D and 6E show I-V relationships of a combined device (e.g. memory cell 500) where the memory cell is initially in a low-resistance ON state. FIG. 6D shows a read operation, where the read voltage must be greater than threshold voltage V_{THC1} to return an accurate read value. As the read voltage drops below the hold voltage V_{HOLD1} , the resistance in the cell increases substantially. The threshold voltage of the combined device is related to the threshold voltage of the NLE through the following equation:

$$V_{THC1} = ((R_{MON} + R_{NOFF}) / R_{NOFF}) V_{TH1} = V_{TH1}$$

Thus, the read threshold voltage of the combined device is approximately the same as the threshold voltage of the NLE, or $V_{THC1} \approx V_{TH1}$.

Similarly, as seen in FIG. 6E, an erase operation must overcome a second threshold value V_{THC2} to allow current to start flowing through the cell, and the switch is changed to a high-resistance OFF state at voltage V_{ERASEC} . Like the positive threshold voltage, the negative threshold voltage of the combined device is about the same as the negative threshold voltage of the NLE. The value of the erase voltage V_{ERASEC} in a combined device can be expressed as:

$$V_{ERASEC} = \text{large}((R_{MON} + R_{NON}) / R_{MON}) V_{ERASE}, V_{TH2}$$

The relationship between the negative threshold voltages of a discrete and combined device can be expressed as:

$$V_{THC2} = ((R_{MON} + R_{NOFF}) / R_{NOFF}) V_{TH2} = V_{TH2}$$

So that in most embodiments, $V_{THC2} \approx V_{TH2}$.

Various embodiments of a digital NLE can be made of many different materials. For example, a digital NLE can be a threshold device such as a film that experiences a field-driven metal-insulating (Mott) transition. Such materials are known in the art, and include VO_2 and doped semiconductors. Other threshold devices include material that experiences resistance switching due to electronic mechanisms observed in metal oxides and other amorphous films, or other volatile resistive switching devices such as devices based on anion or cation motion in oxides, oxide heterostructures, or amorphous films. A digital NLE can also be in the form of a breakdown element exhibiting soft breakdown behavior such as SiO_2 , HfO_2 , and other dielectrics. Examples of such breakdown elements are described in further detail by application Ser. No. 12/826,653, filed on Jun. 29, 2010, which is entitled “Rectification Element for Resistive Switching for Non-volatile Memory Device and Method,” and is incorporated by reference in its entirety. In

other embodiments, the NLE may be a solid electrolyte material. The solid electrolyte material can include be chalcogenide based such as $GexSy$, $GexSey$, $SbxTey$, $AgxSey$, and $CuxSy$, or can be metal oxide based such as WOx , $TiOx$, $AlOx$, $HfOx$, $CuOx$, and $TaOx$, where $0 < x < \text{appropriate stoichiometric value}$ (e.g. 2, 3, etc.) (e.g. GeS , $GeSe$, WO_3 , or $SbTe$, and the like).

As is known in the art, the precise values of threshold, hold, program and erase can be adjusted for different embodiments by changing the form of and materials used for the NLE and the memory cell. In various embodiments the threshold voltage for the NLE can be about the same as the hold voltage, the program voltage, or both. In other embodiments the threshold voltage for the NLE can exceed the program and erase voltages of a resistive switching device.

An analog NLE differs from a digital NLE in that its I-V relationship is characterized by a more gradual transition when current starts to flow through the element. As shown in FIG. 7A, which illustrates the response of an analog NLE to a voltage sweep, the current transition follows an exponential-like curve. The transition or threshold is therefore less abrupt than a digital NLE. Threshold voltage values where substantial current starts to flow through an analog NLE are designated as V_A and V_B for positive and negative bias values, respectively. Another significant difference between an analog and digital NLE is that an analog NLE does not experience the hysteretic hold voltage characteristic of a digital NLE.

FIGS. 7B to 7E show I-V characteristics of a combined device with an analog NLE. As shown in FIG. 7B, when a program voltage $V_{PROGRAMC}$ is applied to a combined device where the switch is initially in an OFF state, the switch changes to a low resistance ON state. The $V_{PROGRAMC}$ is approximately the sum of the V_A of the NLE and the $V_{PROGRAM}$ of the switch as shown in FIG. 2, or $V_{PROGRAMC} \approx V_A + V_{PROGRAM}$. As a result, the programming voltage of a combined device with an analog NLE is typically higher than the programming voltage of a switching element alone.

Turning now to FIG. 7C, a negative voltage sweep of a combined device in an OFF state is shown. Because the switch is already in an OFF state, the negative voltage does not induce a state change, and the switch remains in a high resistance state.

FIG. 7D shows the result of a read operation in a combined switch that is in an ON state. In the present embodiment, $V_{AC} < V_{READ} < V_{PROGRAMC}$. Because the switch is already in a low-resistance ON state, current flow above the threshold voltage V_{AC} is characterized by low resistance. Circuitry can detect the current flow, resulting in a positive read result. The value V_A is not affected by the switching apparatus in most embodiments, so typically $V_{AC} \approx V_A$.

FIG. 7E shows an I-V curve for an erase operation in a combined device. To change the switch from the ON state to the OFF state, a voltage of V_{ERASEC} is applied to the combined device, thereby increasing the resistance of the switch. The voltage required to complete an erase operation in a combined device is normally the sum of the erase value of the discrete switch and the threshold value of the analog NLE, or $V_{ERASEC} \approx V_{ERASE} + V_B$.

An analog NLE can be any element that exhibits the above described behavior. Examples of suitable materials include a punch-through diode, a Zener diode, an impact ionization (or avalanche) element, and a tunneling element such as a tunneling barrier layer. Such elements can be fabricated using standard fabrication techniques.

In most embodiments, $|V_A, V_B| < |V_{PROGRAM}, V_{ERASE}|$. As is known in the art, the precise threshold values of V_A, V_B , program, and erase can be adjusted for different embodiments by changing the form of and materials used for the NLE and the memory cell. In various embodiments the threshold voltage for the NLE can be about the same as the program voltage. In other embodiments the threshold voltage can exceed the program and erase voltages.

In other embodiments, a resistive switching cell may be configured to retain multiple resistive states. That is, rather than being configured to have binary states of ON and OFF, a cell can retain a plurality of resistance states. An array of such switches has the same limitations regarding leakage current, and would similarly benefit from the inclusion of an NLE.

FIGS. 8A-B illustrate examples according to various embodiments of the present invention. In various embodiments of the present invention, as discussed in FIG. 4, when a program (or read or erase) voltage is applied to a target cell 408, e.g. across second top electrode 418 and second bottom electrode 420, a sneak path 416 may allow a sneak path current to flow through cells 402, 404 and 406. To reduce this, a non-linear element, described above (e.g. NLE 504 in FIG. 5), was incorporated in each memory cell. The characteristics of an example NLE was illustrated in FIG. 6A. More particularly, when a voltage across the NLE exceeded V_{TH1} the resistance for the NLE switched from a relatively non-conductive state to a relatively conductive state. Accordingly, in an example, to program target cell 408, a program voltage would be applied to target cell 408 that would exceed V_{TH1} and exceed the programming voltage of target cell 408 ($V_{Program}$, FIG. 8A). In another example, to read target cell 408, a read (or program) voltage would be applied to target cell 408 that would exceed V_{TH1} , but would be less than the programming voltage of target cell 408 ($V_{Program}$, FIG. 8A).

In an example described in co-pending application Ser. No. 13/290,024, filed Nov. 4, 2011, incorporated by reference above, the read voltage to the target cell was limited to be no greater than three times the threshold voltage of the nonlinear element. This three times number assumed that unselected top electrodes and unselected bottom electrodes in the memory array were allowed to float. By way of explanation, using the numbering of FIG. 4 above, in FIG. 8B, the read voltage would not only be applied across target cell 408, but also across sneak path 416 through cells 402, 404 and 406. In such a configuration, if the read (or program) voltage exceeded three times the voltage threshold (e.g. $3 \times V_{TH1}$) of the non-linear element, the voltage across non-linear element of 402, for example, would also exceed V_{TH1} . Accordingly, the NLE of 402 would switch to a relatively-conductive state, and significant current could flow through the sneak path 416. It was recognized in the above incorporated patent application, that to reduce sneak path current, unselected cells, e.g. 402, 404 and 406 had to have voltages applied that were lower than the threshold voltage (e.g. V_{TH1}) of the non-linear elements. For example, when the read (or program) voltage (V_{408}) is applied across target cell 408, the resultant relationships should be met: voltage across cell(s) $V_{402} < V_{TH1}$, voltage across cell(s) $V_{404} < V_{TH1}$, and voltage across cell(s) $V_{406} < V_{TH1}$. Additionally, the voltages across these unselected cells should be greater than V_{TH2} (FIG. 8A). By observing such conditions, it is understood that NLEs of unselected cells (along sneak paths) should have voltages across them such that they remained non-conductive, see suppressed region 800 in FIG. 8A.

In various embodiments of the present invention, in the example of FIG. 4, during a read operation (for example), when the read voltage V_{read} is applied to target cell 408, the voltage V_{read} (e.g. $V_{TH1} < V_{read} (V_{408}) < V_{program}$, e.g. $V_{read} = 2$ volts) is applied to second top electrode 418 and ground (e.g. V_g , e.g. $V_g = 0$ volts) is applied to the second bottom electrode 420. In the case of a program operation $V_{408} > V_{program}$. To reduce power consumption/requirements of the memory, the inventors have recognized that it is advantageous to set unselected bit lines (e.g. top electrodes/conductors) and unselected word lines (e.g. bottom conductors/electrodes) to voltages other than floating during a read operation. The specific voltages may vary, and are generally guided by the following concepts.

For a read (or program or erase) operation, for memory cells, e.g. memory cells 402, that share second top electrode 418 (e.g. selected bit line), the difference (V_{402}) between the voltage across second top electrode 418 (VSBL) and unselected word lines, (e.g. first bottom electrode 412) (VUSWL) should be less than the voltage threshold of the NLE of memory cells such as memory cell 402. In variable format: $VSBL - VUSWL < V_{TH1}$ or $V_{402} < V_{TH1}$ (FIG. 8A). This condition would inhibit the NLE memory cells such as memory cell 402 from entering into relatively non-conductive states. It should be noted that, depending upon the polarity of V_{402} , to inhibit the NLE of memory cells, such as memory cell 402 from become relatively non-conductive in a reverse-bias condition, the relationship maybe $V_{TH2} < V_{402} < V_{TH1}$. This was graphically illustrated by the flat region in FIG. 6D (0 to V_{THC1}), and the flat region in FIG. 6E (V_{THC2} to 0), illustrated together in region 800 in FIG. 8A. These restrictions are desirable also in program or erase operations upon memory cell 408. In other memory configurations, these specific relationships and polarities may be changed.

For a read (or program or erase) operation, for memory cells, e.g. memory cells 406, that share second bottom electrode 420 (e.g. selected word line), the difference V_{406} between the voltage across unselected bit lines (e.g. first top electrode 410) (VUSBL) and second bottom electrode 420 (e.g. selected word line) (VSWL) should be less than the voltage threshold of the NLE of memory cells such as memory cell 406. In variable format: $VUSBL - VSWL < V_{TH1}$ or $V_{406} < V_{TH1}$. This condition would inhibit the NLE of memory cells such as memory cell 406 from entering into relatively non-conductive states. It should be noted that, depending upon the polarity of V_{406} , to inhibit the NLE of memory cells, such as memory cell 406 from become relatively non-conductive in a reverse-bias, the relationship maybe $V_{TH2} < V_{406} < V_{TH1}$. This was graphically illustrated by the flat region in FIG. 6D (0 to V_{THC1}), and the flat region in FIG. 6E (V_{THC2} to 0), illustrated together in region 800 in FIG. 8A. These restrictions are desirable also in program or erase operations upon memory cells 404. In various embodiments, V_{TH1} and $|V_{TH2}|$ may be different, or similar. In other memory configurations, these specific relationships and polarities may be changed.

For a read (or program or erase) operation, for memory cells, e.g. memory cells 404, that share unselected word lines (e.g. first bottom electrode 412), the difference (V_{404}) between the voltage across unselected bit lines (e.g. first top electrode 410) (VUSBL) and unselected word lines (e.g. first bottom electrode 412) (VUSWL) should be less than the voltage threshold of the NLE of memory cells such as memory cells 404. In variable format: $VUSBL - VUSWL < V_{TH1}$ or $V_{404} < V_{TH1}$. This condition would inhibit the NLE of memory cell 404 from entering into a

relatively non-conductive state. It should be noted that depending upon the polarity of **V404**, to inhibit the NLE of memory cells, such as memory cell **404** from become relatively non-conductive in a reverse-bias, the relationship maybe $V_{TH2} < V_{404} < V_{TH1}$. This was graphically illustrated by the flat region in FIG. 6D (0 to V_{THC1}), and the flat region in FIG. 6E (V_{THC2} to 0), illustrated together in region **800** in FIG. 8A. These restrictions are desirable also in program or erase operations upon memory cells **404**. In other memory configurations, these specific relationships and polarities may be changed.

FIGS. 8A-B illustrate an example according to various embodiments of the present invention. In one example of the above, the programming voltage $V_{program} = 2$ volts, the positive threshold voltage (V_{TH1}) of the NLE = 1 volt, and the negative threshold voltage (V_{TH2}) of the NLE = -2 volts. In such a configuration, to perform a program operation, the selected word line (e.g. second bottom electrode **420**) is grounded ($V_{SWL} = 0$ volts), and selected bit line (e.g. second top electrode **418**) (V_{SBL}) is greater than the positive threshold voltage (e.g. V_{TH1} (1 volt) $< V_{SBL}$, $V_{program}$ (2 volts)). Thus, $V_{program} = V_{408}$. Additionally, the unselected word lines (e.g. first bottom electrode **412**) are set to about 1.5 volts ($V_{USWL} = 1.5$ volts), accordingly, the voltage across memory cells such as memory cells **402** are less than the NLE switching voltage (e.g. V_{TH2} (-2 volts) $< V_{402}$ (2 volts - 1.5 volts = 0.5 volts) $< V_{TH1}$ (1 volts). Further, the unselected bit lines (e.g. first top electrode **410**) (V_{USBL}) are set to about 0.5 volts, accordingly, the voltage across memory cells such as memory cells **406** are thus less than the NLE switching voltage (e.g. V_{TH2} (-2 volts) $< V_{406}$ (0.5 volts - 0 volts = 0.5 volts) $< V_{TH1}$ (1 volts). Still further, from above the unselected bit lines (e.g. first top electrode **410**) are set to about 0.5 volts ($V_{USBL} = 0.5$ volts), and the unselected word lines (e.g. first bottom electrode **412**) (V_{USWL}) are set to about 1.5 volts ($V_{USWL} = 1.5$ volts). In such a configuration, because the bottom electrodes (e.g. **412**) have a higher voltage than the top electrodes (e.g. **410**), memory cells, such as memory cells **404** are in a reverse bias voltage region. Accordingly, the voltage across memory cells such as memory cell **404** are less than the NLE switching voltage V_{TH1} , but also need to be greater than V_{TH2} : (e.g. V_{TH2} (-2 volts) $< V_{404}$ (0.5 volts - 1.5 volts = -1.0 volts) $< V_{TH1}$ (1 volts). As mentioned above, these restrictions are also desirable in write and erase operations. For example in a read case $V_{TH1} < V_{read}$ (V_{408}) $< V_{program}$; and in an erase case V_{erase} (V_{408}) $< V_{TH2}$.

In various embodiments, based upon the voltages **V408**, **V402**, **V406**, **V404**, and the like, the current requirements of memory cells may be computed during read, program, or erase operations. For example, power consumption for memory cells such as memory cells **402** (along the selected bit line second top electrode **418**) is the number of cells times the current across memory cells (V_{402} (e.g. 0.5 volts)/resistance of NLE in relatively non-conductive state); plus power consumption for memory cells such as memory cells **406** (along unselected bit lines, first top electrode **410**) is the number of cells times the current across memory cells (V_{406} (e.g. 0.5 volts)/resistance of NLE in relatively non-conductive state); plus power consumption for memory cells such as memory cells **404** (along unselected bit lines, first top electrode **410**, and along unselected word lines, first bottom electrode **412**) is the number of cells times the current across the memory cells (V_{404} (e.g. -1 volt)/resistance of NLE in relatively non-conductive state). In some embodiments, setting of the bias voltages of un-

lected bit lines **410** (V_{USBL}) and unselected word lines may **412** (V_{USWL}) be made considering the power consumption described above.

In one example, using a large array (e.g. 100x100) of memory cells, if the voltage of the unselected bit lines (e.g. first top electrode **410**) (V_{USBL}) and the unselected word lines (e.g. first bottom electrode **412**) (V_{USWL}) are substantially the same the voltages, **V404** is small (e.g. about 0). Accordingly, the power consumption of these memory cells (99 cells x 99 cells = 9801 cells) is small (e.g. about 0), and power consumed/required is computed, consumed, mainly from the memory cells along the selected bit line **418** (99 cells along the second top electrode **418**) and from the memory cells along the selected word line **420** (99 cells along the second bottom electrode **420**). In one example of this $V_{SBL} = 4V$, $V_{SWL} = 0V$, $V_{USBL} = 2V$, $V_{USWL} = 2V$.

Although certain of the above passages have been described with respect to a read operation, it should be understood that the above also apply to other operations, such as programming operations and erase operations. In each of these situations, embodiments of the present invention incorporating NLE elements within a memory cell help to reduce sneak paths/currents through unselected memory cells. More particularly, for memory cells **402**, **404** and **406** along sneak path **416**, the voltages across these cells should be within a NLE non-conductive (suppressed) region **800**, illustrated in FIG. 8A, to reduce sneak path current. This is in comparison with the graph illustrated in FIG. 2, for embodiments without NLE-type elements.

In other embodiments, NLEs with different threshold voltages may be used, resistive switching material having different program and erase voltages may be used, different voltages may be applied to bias unselected word lines and/or unselected bit lines, different polarity materials may be used, and the like. Still other embodiments may be applied to unipolar-type memory cells.

In light of the present patent disclosure, one of ordinary skill in the art will recognize that in other embodiments, the voltages for selected bit lines, unselected bit lines, selected word lines, unselected word lines, NLE threshold voltages, read voltages, and the like may vary from those illustrated above, depending upon specific engineering requirements, e.g. power consumption, performance, and the like

The examples and embodiments described herein are for illustrative purposes only and are not intended to be limiting. Various modifications or alternatives in light thereof will be suggested to persons skilled in the art and are to be included within the spirit and purview of this application and scope of the appended claims.

We claim:

1. Method for operating a memory comprising:
 - applying a read voltage to the memory, wherein the memory comprising a plurality of cells including at least a first cell, a second cell, a third cell, and a fourth cell,
 - wherein the first cell and the second cell are coupled to a first top electrode,
 - wherein the third cell and the fourth cell are coupled to a second top electrode,
 - wherein the first cell and the third cell are coupled to a first bottom electrode,
 - wherein the second cell and the fourth cell are coupled to a second bottom electrode,
 - wherein each cell of the plurality of cells comprises a resistive switching material stack comprising a resistive switching material overlying a non-linear switching element material,

15

wherein the resistive switching material is characterized by a first voltage associated with switching from a non-conductive state to a conductive state,

wherein the non-linear switching element material is characterized by a second voltage associated with switching from a non-conductive state to a conductive state,

wherein the second voltage is less than the first voltage, wherein the read voltage is between the first voltage and the second voltage, and

wherein applying the read voltage to the memory comprises applying the read voltage to the first top electrode while grounding the first bottom electrode to thereby cause non-linear switching element material of the first cell to be in the conductive state, while maintaining non-linear switching element material of the second cell, the third cell, and the fourth cell to remain in the non-conductive state; [and]

detecting a read current across the first cell in response to the read voltage[.];

wherein the resistive switching material is characterized by a third voltage associated with switching from the conductive state to the non-conductive state;

wherein the non-linear switching element material is characterized by a fourth voltage associated with switching from the non-conductive state to the conductive state; and

wherein the third voltage is less than the fourth voltage.

2. The method of claim 1 wherein a resistance of the non-conductive state is related to a resistance of the conductive state in a range of ratios selected from a group consisting of: about 100 to about 500 times greater, about 500 to about 1000 times greater, about 1000 times to about 10,000 times greater.

3. The method of claim 1 wherein while applying the read voltage to the first top electrode while grounding the first bottom electrode, a voltage across the second cell is maintained at less than the second voltage.

[4. The method of claim 1

wherein the resistive switching material is characterized by a third voltage associated with switching from the conductive state to the non-conductive state;

wherein the non-linear switching element material is characterized by a fourth voltage associated with switching from the non-conductive state to the conductive state; and

wherein the third voltage is less than the fourth voltage.]

5. The method of claim [4] 1 wherein while applying the read voltage to the first top electrode while grounding the first bottom electrode, a voltage across the fourth cell is maintained at greater than the fourth voltage to thereby maintain the non-linear switching element material of the third cell in the non-conductive state.

6. The method of claim [4] 1 wherein while applying the read voltage to the first top electrode while grounding the first bottom electrode, the method further comprises applying a fifth voltage between ground and the read voltage to the second bottom electrode.

7. The method of claim 6 wherein while applying the read voltage to the first top electrode while grounding the first bottom electrode, the method further comprises applying a sixth voltage between ground and the read voltage to the second top electrode.

8. The method of claim 7 wherein a difference between the sixth voltage and the fifth voltage is greater than the fourth voltage.

16

9. The method of claim 1 further comprising:

applying a write voltage to the memory, wherein the write voltage exceeds the first voltage, wherein applying the write voltage to the memory comprises applying the write voltage to the first top electrode while grounding the first bottom electrode to thereby cause the resistive switching material of the first cell to be in the conductive state.

10. The method of claim 9 wherein applying the write voltage to the first top electrode comprises applying the write voltage to the first top electrode while grounding the first bottom electrode to thereby cause the non-linear switching element material of the first cell to switch from the non-conductive state to the conductive state.

11. A memory operated according to the method described in claim 1.

12. A memory comprising:

a plurality of cells including at least a first cell, a second cell, a third cell, and a fourth cell, wherein each cell of the plurality of cells comprises a resistive switching material stack comprising a resistive switching material overlying a non-linear switching element material, wherein the resistive switching material is characterized by a first voltage associated with switching from a non-conductive state to a conductive state, wherein the non-linear switching element material is characterized by a second voltage associated with switching from a non-conductive state to a conductive state, wherein a second voltage is less than the first voltage;

a plurality of top electrodes including a first top electrode and a second top electrode, wherein the first cell and the second cell are coupled to the first top electrode, and wherein the third cell and the fourth cell are coupled to the second top electrode;

a plurality of bottom electrodes including a first bottom electrode and a second bottom electrode, wherein the first cell and the third cell are coupled to the first bottom electrode, and wherein the second cell and the fourth cell are coupled to the second bottom electrode, wherein a read current path is associated with the first cell, wherein non-read current paths are associated with the second cell, the third cell, and the fourth cell, wherein the non-linear switching element material of the first cell is configured to reduce resistance of the read current path, and wherein the non-linear switching element material of the second cell, the third cell, and the fourth cell are configured to increase resistance of the non-read current; [and]

a voltage source coupled to the plurality of top electrodes and to the plurality of bottom electrodes, wherein the voltage source is configured to provide a plurality of voltages to the plurality of top electrodes and to the plurality of bottom electrodes[.];

wherein the resistive switching material is characterized by a third voltage associated with switching from the conductive state to the non-conductive state;

wherein the non-linear switching element material is characterized by a fourth voltage associated with switching from the non-conductive state to the conductive state; and

wherein the third voltage is less than the fourth voltage.

13. The memory of claim 12

wherein the non-linear switching element material of the first cell is configured to be in the conductive state dependent upon a read voltage that is greater than the

17

second voltage but less than the first voltage, that is applied to the first top electrode while grounding the first bottom electrode; and

wherein the voltage source is configured to provide the read voltage.

14. The memory of claim 12

wherein the non-linear switching element material of the second cell is configured to be in the non-conductive state dependent upon a read voltage that is greater than the second voltage but less than the first voltage, is applied to the first top electrode while grounding the first bottom electrode; and

wherein the voltage source is configured to provide the read voltage.

15. The memory of claim 14 wherein when the read voltage is applied to the first top electrode while grounding the first bottom electrode, a voltage greater than ground is applied to the second bottom electrode such that a voltage across the second cell is less than the second voltage.

16. The memory of claim 12 wherein the resistive switching material is selected from a group consisting of: an amorphous silicon material, a silicon sub-oxide, a silicon germanium sub-oxide.

17. The memory of claim 12 wherein each of the plurality of bottom electrodes comprises a metal or a conductive silicon material selected from a group consisting of: a doped polysilicon[,] and a doped silicon germanium material.

[18. The memory of claim 12

wherein the resistive switching material is characterized by a third voltage associated with switching from the conductive state to the non-conductive state;

wherein the non-linear switching element material is characterized by a fourth voltage associated with switching from the non-conductive state to the conductive state; and

wherein the third voltage is less than the fourth voltage.]

19. The memory of claim 12

wherein the non-linear switching element material of the fourth cell is configured to be in the non-conductive state dependent upon a read voltage that is greater than the second voltage but less than the first voltage, that is applied to the first top electrode while grounding the first bottom electrode; and

wherein a voltage difference greater than the fourth voltage is applied to the fourth cell.

20. The memory of claim 12

wherein the voltage source is configured to provide a read voltage to the first top electrode, wherein the voltage source is configured to provide a fifth voltage to the second bottom electrode and a sixth voltage to the second top electrode, wherein a voltage difference between the second top electrode and the second bottom electrode is greater than the fourth voltage.

21. The memory of claim 12 wherein a ratio between the resistance of the first cell compared to a resistance of the second cell is greater than 1:1000.

22. The memory cell of claim 12 wherein the non-linear switching material is selected from a group consisting of: a solid electrolyte material and a metal sub-oxide.

23. The memory cell of claim 12 wherein the non-linear switching material is bi-polar.

24. The memory cell of claim 12 wherein the non-linear switching material consists of multiple layers of materials.

18

25. A method for operating a memory comprising: applying a program voltage to the memory, wherein the memory comprising a plurality of cells including at least a first cell, a second cell, a third cell, and a fourth cell,

wherein the first cell and the second cell are coupled to a first top electrode,

wherein the third cell and the fourth cell are coupled to a second top electrode,

wherein the first cell and the third cell are coupled to a first bottom electrode,

wherein the second cell and the fourth cell are coupled to a second bottom electrode,

wherein each cell of the plurality of cells comprises a resistive switching material stack comprising a resistive switching material having crystal defect regions and a non-linear switching element material,

wherein each cell is characterized by a first first-polarity voltage associated with the resistive switching material switching from a non-conductive state to a conductive state and a first second-polarity voltage associated with the resistive switching material switching from the conductive state to the non-conductive state,

wherein each cell is characterized by a second first-polarity voltage and a second second-polarity voltage associated with the non-linear switching element material switching from a second non-conductive state to a second conductive state,

wherein the second first-polarity voltage is less than the first first-polarity voltage,

wherein the first second-polarity voltage is less than the second second-polarity voltage,

wherein the program voltage is greater than or equal to the first first-polarity voltage, and

wherein applying the program voltage to the memory comprises applying the program voltage to the second top electrode;

grounding the second bottom electrode;

applying a first bias to the first top electrode and applying a second bias to the first bottom electrode;

causing a non-linear switching element material of the fourth cell to enter the conductive state and causing a resistive switching material of the fourth cell to enter the conductive state,

maintaining non-linear switching element materials of the first cell, the second cell, and the third cell in the non-conductive state in response to the applying the program voltage, grounding the second bottom electrode, the applying the first bias and the applying the second bias; and

removing the program voltage from the second top electrode, whereby the non-linear switching element material of the fourth cell returns to the non-conductive state, and wherein the resistive switching material of the fourth cell remains in the conductive state.

26. The method of claim 25

wherein applying the program voltage to the second top electrode while grounding the second bottom electrode causes metal particles from the second top electrode to diffuse into crystal defect regions of the resistive switching material of the fourth cell; and

wherein after removing the program voltage from the second top electrode, the metal particles from the second top electrode remain trapped in the crystal defect regions of the resistive switching material of the fourth cell.

19

27. The method of claim 25 wherein while applying the program voltage to the second top electrode while grounding the second bottom electrode, a voltage across the second cell is maintained at less than the second first-polarity voltage.

28. The method of claim 25 wherein the first and second first-polarity voltages are positive; and wherein the first and second second-polarity voltage are negative.

29. The method of claim 28 wherein applying the first bias to the first top electrode comprises applying a first bias voltage less than the second first-polarity voltage to the first top electrode; and wherein a voltage across the second cell in response to the applying the first bias voltage is less than the second first-polarity voltage.

30. The method of claim 29 wherein applying the second bias to the first bottom electrode comprises applying a second bias voltage to the first bottom electrode; wherein a voltage difference between the program voltage and the second bias voltage is less than the second first-polarity voltage; and wherein a voltage across the third cell is less than the second first-polarity voltage.

31. The method of claim 30 wherein a voltage across the first cell comprises a third second-polarity voltage; and wherein the second second-polarity voltage is less than the third second-polarity voltage.

20

32. The method of claim 25 wherein a resistance ratio between the second conductive state to the second non-conductive state of the non-linear switching element material is within a range of about 1,000 to about 10,000.

33. The method of claim 25 further comprising:
 5 applying an erase voltage to the second top electrode;
 further grounding the second bottom electrode;
 further biasing the first top electrode;
 10 further biasing the first bottom electrode to thereby cause the non-linear switching element material of the fourth cell to enter the conductive state and cause the resistive switching material of the fourth cell to enter the non-conductive state, while maintaining non-linear switching element materials of the first cell, the second cell, and the third cell in the non-conductive state; and
 removing the erase voltage from the second top electrode, whereby the non-linear switching element material of the fourth cell returns to the non-conductive state, and wherein the resistive switching material of the fourth cell remains in the non-conductive state.

34. The method of claim 33, wherein:
 the further biasing the first top electrode comprises applying a first bias voltage less than the second first-polarity voltage to the first top electrode; and
 a voltage across the second cell in response to the applying the first bias voltage is greater than the second second-polarity voltage and less than the second first-polarity voltage.

* * * * *