

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
4 March 2004 (04.03.2004)

PCT

(10) International Publication Number
WO 2004/019201 A1

(51) International Patent Classification⁷: **G06F 3/16**,
G10L 21/02, 11/02

(21) International Application Number:
PCT/SE2003/001305

(22) International Filing Date: 22 August 2003 (22.08.2003)

(25) Filing Language: Swedish

(26) Publication Language: English

(30) Priority Data:
0202447-9 23 August 2002 (23.08.2002) SE

(71) Applicants and

(72) Inventors: **BERG, Rickard** [SE/SE]; Erik Dahlbergs Allé
9B, S-115 20 Stockholm (SE). **AHRNE, Tomas** [SE/SE];
Kistvägen 7, S-122 45 Enskede (SE). **BERG, Jakob**
[SE/SE]; Valhallavägen 49, 2 tr., S-114 22 Stockholm
(SE).

(74) Agents: **FÄLLMAN, Micael** et al.; Uppsala Patentbyrå
AB, Box 9013, S-750 09 Uppsala (SE).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHODS FOR REMOVING UNWANTED SIGNALS FROM MEDIA SIGNAL

Chose the Song

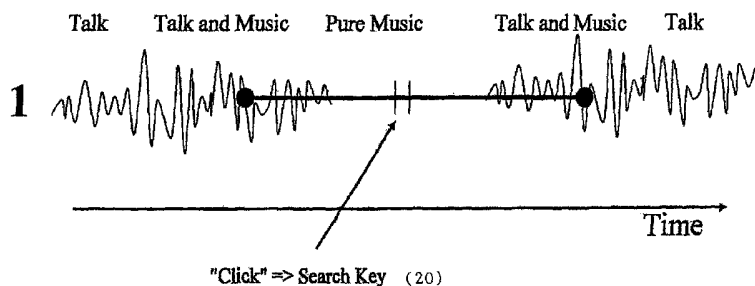

(57) Abstract: The invention relates to an improved method to achieve signals which are essentially devoid of unwanted signal components by using a search and comparison process. The present invention provides a method to receive media signals through receiving means, said media signals containing unwanted signal components, to chose a representation for said media signals and process these media signals in such a way that said unwanted signal components are essentially removed and the remaining signal components are saved, said method comprising the steps of: from the media signals chose a search key representation; in a search track conduct a first search after a signal representation that contains a section which is essentially identical with said search key; to compare a first segment, which lies before and after said search key, with a second segment which lies before and after said section, which is essentially identical with the first search key; from said first segment and said second segment find a first common segment; said method being characterized in that said common segment is stored in said memory domain as a signal representation without unwanted signal components.

WO 2004/019201 A1

METHODS FOR REMOVING UNWANTED SIGNALS FROM MEDIA SIGNAL

The present invention relates to an improvement of a method and a system used to receive and process a media signal in such a way that unwanted signals are removed while the wanted signals are saved.

5

Related art and related applications

As was mentioned above the present invention relates to an improvement of a method and a system used to receive and process media signals, signals such as radio signals or TV-signals, in such a manner that only the wanted signals are saved while the unwanted signals are removed. As unwanted signals are intended, for example, commercials, jingles, speech from a discjockey, during a radio broadcast or such signals as commercials, logotypes and alike during TV-broadcasted movies. The method and the system are in broad terms intended to provide a way to record, or remove, material from a broadcasted signal and display these signals to a user in a format where all the unwanted signals have been removed.

15 The system and the method used to remove unwanted signals or get hold of wanted signals use an algorithm that is given below in a schematic form;

1. receive the media signals through receiver means,
2. save the received signals in therefore intended memories,
3. choose a first search key through manual or automatic activation
- 20 4. search among media signals for a second key which is essentially the same as the first key, the search is conducted in future broadcasted media signals or in media signal broadcasts that has already been recorded and saved,
5. compare first segments, wherein said segments are located before and after the first search key, with second segments which are located before and after said second key,
- 25 6. identify a first common segment between the first and second segment, which segments are considered to be source material such as a track on a CD.

If this algorithm is iterated, that is, if further searches and comparison processes are conducted among media signals which all contain search keys that are essentially the same as the first defined search key, and these signals are saved and compared, with regard to segments, among earlier source material, it is possible to achieve longer and longer common segments and thereby determine which

the wanted signals are, and also which the unwanted signals are. The system and the method may benefit from the ability to both delete and save source material, or representations thereof, alternatively to only log representations of the source material or segments therebetween.

5 A more detailed description of the system and the method, and also of prior art can be found in PCT/US02/05537, which has the same applicant as the present invention.

Background of the invention

10 Before a short description of the present invention is given the definitions of the terminology used in the application is presented.

If nothing else is stated "media signals" and "source material" are defined as representation of the broadcasted signals, on analog or digital form, but the expressions could also defined as any representation at all that make a comparison process possible.

15 "Search key" is defined as a section of the above given representation, a section that could be very short, of the order of magnitude fractions of seconds, or very long. The actual application of the system and the method determine the length of the search key. In the case the user intends to record music from a radio broadcast the search key could for example be as long as a few music tracks to
20 thereby reproduce a song that does not contain commercials and other unwanted material in the music. The search key can be obtained by manual activation of a key choosing process. a user could for example, In the example relating to radio broadcasted music, a user could for example, activate this process if he or she hears a song on the radio and wants to record it, The user himself will then manually
25 activate the search key process by, for example, pressing a button, and the system will react and pick out a segment of the signal representation as a key and use this segment as a search key in a later comparison process. The key setting process could also be activated automatically, an alternative that will be described in more detail below.

30 The term "search key" could also be intended as a representation of the above given representation, e.g., a small part that is saved with low band width and than saved, for example, according to a sound compression method.

In the remaining parts of this description the term "search key" will be used interchangeably with the term "search key representation". The difference between

these terms should be clear, since it only relates to what type of representation is given to the original search key.

"An iterative process" is intended as an algorithm that compares segments of signal representations, signal representations that contains an essentially common search key, to obtain longer and longer common segments by using this algorithm. This process can proceed until the system, according to some predetermined growth conditions, terminates the process, for example when the iterations do not give an increased time length for the common signal sequences. If an exact match is obtained between different segments, it is very likely that the representation is a version that does not contain any unwanted signals.

In this application "search track" is defined as the material that is saved and used in the comparison process that saves or deletes the final version of the signal representation, or that logs where this is located in the memory domain.

With this comparison process the search track can be shortened/reduced dramatically by, for example, letting the system remove representations of the source material and only perform searches in the sections of the search track that are relevant for finding new source material.

The search track could, for example, be saved in the frequency domain, as a whole or as a much more compressed search track in order to reduce the required amount of memory or the required amount of processing power.

Other terms used in this application will be defined as it is introduced.

One problem with the procedure according to steps i) – vi) given above is the necessity to save large amounts of source material. The present invention relates to methods for improving this aspect of the system and method according to PCT/US02/05537. Further improvements relate to certain choices of the search key and to the activation of the process/method in the system, and also to different approaches for processing the search track, i.e., the section of the saved signal representation that is searched in order to find essentially identical key representations and which is also used as material for the comparison process in the application PCT/US02/05537. Improvements over the above given system and method are briefly summarised below. They will be described in more detail in a later part of this application.

It is very advantageous if the search tracks, i.e., the material that is searched and exposed to the comparison process, is normalized when the signals are received. Normalization means that the signal representations are given a common

amplitude/sound level the moment they are received. In this manner the number of required computations in a comparison process will be vastly reduced. The reduction of the number of computations follows from the fact that it will not be necessary to normalize the search track for every comparison process.

5 It is possible to remove masking effects that have been added to the signals. It is thereby possible to save only those parts of the signal representations that can be perceived by the user. This procedure makes it easier for the system to find representations of the search key and makes it possible to reduce the size of the search track.

10 It is possible to make the the search track and the search key smaller by compressing all signal representations, either by a destructive compression or a non-destructive compression.

 Saving compressed representations requires less memory capacity.

15 A high pass filter could be used to remove DC-currents from the signal representation. This filter could be used for both the search track and the search key. By using a high-pass filter it is possible to give all signal amplitudes a common zero point in the used representation.

20 It is also very advantageous to give the search track a smaller band width. If the search track/signal representation is saved with smaller band-width the demands on the system's memory capacity can be reduced and the method becomes faster.

25 The search track, i.e., the source material that contains the signal representations, is preferably processed in such a way as to make it smaller by removing all known unwanted signals. Various methods that make this possible will be described in a later part of this application.

30 It is very advantageous if only certain selected parts of the representation are saved. In this way the required processing power, the required memory and the number of computations that the system needs to perform are reduced. If the search track is saved for every N:th sample (where N is larger than 1) the memory demands on the system is vastly reduced. This search track can then be compared to a search key that is saved in another format, for example with another value of N. This adds up to a drastically reduced memory demand and/or a faster method, something that in the end makes it possible to produce the product at a lower cost for the customer.

35 A method according to the present invention aimed to make use of only

certain sections of a signal representation yields a more capacity saving system than the system that is used in the comparison process defined above. It is for example possible to use, In case the signal representation is taken from av television broadcast, it is for example possible to use only sound, percentages of pixels of a certain colour, etc.

It should be noted that a system that is constructed to run the method, for example for recording music from a radio broadcast, can reduce the memory capacity and the required processing power by deleting music from the search track (or log where the found music is located). If, by using the method given above, the system already have identified essentially identical search track segments the latter found segments, which were found in the search track by the present method, can be deleted. It is also possible to delete the segments that lie between these segments, if that is desired. The opposite applies to movies, where the interest lies in removing the commercial while leaving the movie unaltered.

Media signals can be saved or deleted during the actual recording procedure, but it is possible to perform this step when the media signals are moved to other memory domains or at the actual display of the signals, the system for example displays a movie without commercials, the commercial is actually there but it will not be broadcasted during the movie broadcast.

Further improvements over the system disclosed in PCT/US02/05537 relate to preloaded lists and afterloaded lists. These will be defined and described in more details below.

Brief description of the drawings

Fig. 1 shows, schematically, how a signal representation of a radio broadcast is separated into different parts, such as talk, music + talk and pure music.

Fig. 2 shows, schematically, how a search key representation is chosen from a wanted music track.

Fig. 3 shows, in a simplified way, how a search procedure for a wanted music track is performed by using the method according to the present invention.

Fig. 4 shows, schematically, the method used for finding an exact copy of the search key representation.

Fig. 5 shows the expansion of the signal representation in common segments.

Fig. 6 shows, schematically, how the iteration process to get longer common segments works.

Fig. 7 illustrates how it is possible to search through the search track backwards in time by using a buffer memory.

Fig. 8 shows, schematically, how a separate search track could be used with the present invention.

5 Fig. 9 illustrates, in graphic form, how to use a compressed search track when applying the method according to the present invention.

Fig. 10 illustrates, in graphic form, how the search track that is used in the present invention can be categorised into interesting and non-interesting parts.

10 Fig. 11 shows a flow diagram that illustrates a possible approach for applying the method according to the present invention, in the drawings the term "pop-catched" signals means signals that have been processed according to said method.

Detailed description of the invention

In the following the invention will be described in greater detail, partly by using direct examples, partly by using preferred embodiments. These examples and
15 embodiments should in no way be construed as limitations of the invention, they are only disclosed to make it easier to understand the invention. For example, in several places it is stated that the method is used in a process for recording music from a radio broadcast, to record movies, etc.. These uses are only specific examples and the system could be used on all media signals and every source material that
20 can be given a representation that makes the comparison process with search keys and iterations possible.

The method could, for example, be "done backwards" by saving only the material located between two known source materials that have been identified using the present method.

Preloaded lists and afterloaded lists

25 The system and the method according to the patent application PCT/US02/05537, hereafter referred to as (S), are preferably equipped with preloaded lists and/or afterloaded lists. A preloaded list means a list with certain signal representations that are stored in a search memory, preferably only as
30 undisplayable source material and search tracks (30), which representations are used as search material for the search key, and/or as material to perform the expansion comparisons. It could for example be a representation of a certain song, a certain jingle, a certain commercial etc.. "Displayed" is intended to mean that the

specific entity, for example the music track, is given a representation that makes it possible to use the entity in the comparison process, as this process is defined in either (S) or in this application. The selection of the signal representations (10) that are contained in the preloaded list could be chosen on statistical grounds, they could for example be particularly popular music tracks or often broadcasted commercials.

A preloaded list could be equivalently defined as a memory domain (100) wherein signal representations are stored after they have been defined.

The preloaded list, which contains the essentially exact signal representations, is stored in a memory. When the comparison process according to (S) is activated, that is, when the search key (20) is set, the system according to the present invention could as a first measure search through the preloaded list and try to find an essentially identical copy of the search key representation (20). If a direct match of the search key representation (20) is found in the preloaded list, this representation, containing the essentially identical copy of the search key representation (20), could be compared to the search track (30) that contain the search key. In this way one knows what the correct representation of the music track looks like without unwanted contributions to the signals, and as a consequence the system does not have to iterate to get the final signal representation (10), instead the system could just wait until it finds a complete match between the search track representation and the representation in the preloaded list. Thereby, if an essentially identical copy of the search key (20) is found in a search track (30), the full search track representation of this search track is compared to the exact representation that is found in the preloaded list, and if an exact match is found the system knows that the whole original has been displayed and then records it with a sufficiently high quality, and distributes it to the user who desired to record the track. If there are differences between the search track (30) and the representation given in the preloaded list, the system realizes that there are unwanted signals present in the full media signal (1) and the system waits until the next match with the search key takes place. Again a comparison process is conducted to ensure either similarities or differences between the search track (30) and the exact signal representation. This process step can then be conducted until a full match has been found, and after that, the system records the broadcasted media signal, as this signal is perceived by the user, for example as a music track or a movie.

An afterloaded list, which will be described below, could equivalently be

construed as a memory domain (100), in which domain the signal representation is stored after the representations have been defined.

An afterloaded list fulfills mainly the same purpose as a preloaded list, but an afterloaded list contains signal representations (10) that have been chosen by the system when it found a final version through iteration. In this way one gets a system which, so to speak, builds up its own base of signal representations (10), that is, the system creates its own preloaded list. An example could be used to illustrate the use of the afterloaded list. Assume that a user activates the comparison process according to the system (S), this is done when the user manually activates a search key choice by pushing a button when she hears a song on the radio. The system now preferably searches through the preloaded list. Assume further that the system did not find an exact match with the signal representations (10) stored in the preloaded list. The system will then continue to use the method according to (S) until it finds a good enough version. This version is now distributed to both the user who wanted the track in its original representation, i.e. as music in this case, and to a memory domain (100) in which the song is stored as a chosen signal representation. In the memory domain (100), this signal representation is considered to be an exact signal representation of the wanted music track. The content in the afterloaded list could now be used in an analogous way to the way the preloaded list is used.

The preloaded list could of course consist of any media signals (1). The specific signal (1) could be a representation of commercials, music tracks, moviea, jingles, the number of red pixels in a TV broaddcast, the sound from a TV broadcast, etc. The specifically wanted product determines the content. In the same fashion it is possible to load the representations of the unwanted signals into the afterloaded list. If, for example, a new commercial is used this commercial could quickly be given a representation that is loaded into the afterloaded list. Specific ranges of applications for this procedure will be described in what follows.

Choices of search key and activation of search key settings

How the search keys (30) are chosen and how this choice is activated are another area that this invention covers. As has already been mentioned, the search key choice could be activated manually by the user for example on hearing a song on the radio.. But an activation of the search key (20) could also be done automatically, through the system activating itself. An example is a system that activates

itself every N:th second.

An example of an embodiment of the invention has a search key activation that is based on the flow of media signals (1). If, for example, a very weak signal is broadcasted, which is an indication of for example silence before a music track, darkness before a movie or a commercial or darkness before a TV-station logotype is displayed, etc., the search key (20) could be activated. After the search key (20) has been activated a search and comparison algorithm could be activated, either immediately after or after a certain predetermined time step following the activation of the search key. The predetermined time step could, in the case music is being recorded from a radio broadcast last a few minutes. In this manner, one avoids the possible scenario that the algorithm starts after the music track has ended, since the major part of a music track is at least a couple of minutes long, and one also avoids the scenario that the algorithm begins too early, for example, when a disc-jockey is talking.

Yet another possibility is to rank the search keys (20). One might, as an example, use more processing power on a manually activated search key in comparison with one that is automatically activated, and thereby give an automatically activated search key a lower rank and therefore devote less processing power to this key and give this key less time before it is considered as a failed search key. In case of a manually activated search key it is, for example, possible to have a longer search backwards in time and also to have a longer search forward in time to try to find a match to the search key. A further possibility is to influence the system so that it only searches for a search key match in the preloaded list. In this way, the search track could be categorized as to make future search procedures faster, something that makes less demands on the memory capacity.

Improvements of the signal representations of the search tracks

As has already been mentioned, storing large amounts of signal representations in a memory is very demanding. The present invention solves this problem in a number of ways. These improvements, together with the above given improvements over (S) yields a system and a method designed to display recorded signals in a format where unwanted signals have been removed, either by, as an example, saving what one wants to hear/see and removing what one does not want to hear/see. But it is of course possible to save the signal representations with a log

file that is later used to display the signal in order to decide what should be displayed and what should not.

A system and a method according to the present invention, that processes recorded media signals and display them without unwanted signal components
5 take into consideration the fact that the search track, as this has been defined earlier, yields a signal representation that is much smaller than the original signal representation if some, or all, of the modifications that are given below are made. This will give a much cheaper system for the customer since the hardware, mainly the processor and the memory, are less costly.

10 It is possible to remove already known unwanted signals, such as commercials, etc., from the search tracks. This will leave more room in the memory that could be used for clean search tracks.

It is possible to remove signals that have been broadcasted during a time step that is shorter than a predetermined threshold value from the search track.
15 The threshold value could for example, in the case of music being recorded from a radio broadcast, last one minute. Media signal representations (73) that lie between two signal representations (71, 73) contained in the memory domain and which are only broadcast during a time interval that is shorter than a minute are probably unwanted signals, for example commercials or jingles, and probably not
20 music since a music track in most cases is at least a couple of minutes long, so these representations are not required in the search track. This will quickly lead to a size reduction of the search track. It is, in the same way, possible to save this media signal representation (73) if, for example, the activation of the search key took place during the broadcast of such a media signal.

CLAIMS

1. A method to receive media signals (1) through receiving means, said media signals (1) containing unwanted signal components, to chose a representation for said media signals and process these media signals (1) in such a way that said
5 unwanted signal components are essentially removed and the remaining signal components are saved, said method comprising the steps of:
- from the media signals (1) chose a search key representation (20);
in a search track (30) conduct a first search after a signal representation (10) that contains a section (11) which is essentially identical with said search key (20);
10 to compare a first segment (40), which lies before and after said search key (20), with a second segment (41) which lies before and after said section (11) which is essentially identical with the first search key (20);
from said first segment (40) and said second segment (41) find a first common segment (44); said method being **characterized in that** said common
15 segment (44) is loaded into a therefore intended memory domain (100) and that said segment is stored in said memory domain (100) as a signal representation (70) without unwanted signal components.
2. Method according to claim 1, **characterized in that** said first search (20) is conducted among media signal representations (70) stored in the memory domain
20 (100).
3. Method according to claim 1 or 2, **characterized in that** the method, in the case no essentially identical copy of the search key representation was found, comprises the step of conducting further searches in the search track after essentially identical copies of said search key representations and when such a copy
25 is found conduct a comparison process to find common segments, this process is conducted until a final common segment is achieved or until the process is terminated, whereupon said common segment is loaded into the memory domain (100) as a signal representation.
4. Method according to any of the claims 1, 2 or 3, **characterized by** the step
30 of removing all redundant signal representations from the search track in the case the search track contains a multiple of essentially identical signal representations, to thereby achieve a better use of the memory capacity.

5. Method according to any of the claims 1, 2 or 3, wherein a signal representation (73) that lies between two signal representations (71, 73) contained in the memory domain is removed if said signal representation (73) has a time duration that is shorter than a predetermined threshold value.
- 5 6. Method according to any of the claims 1, 2 or 3, wherein the section of a signal representation (73) that lies between two signal representations contained in the memory domain is saved if the setting of the search key was activated during this section.
7. Method according to any of the above given claims, **characterized in that**
10 said search track consist of every N:th sample of a signal representation (10).
8. Method according to any of the above given claims, wherein the search tracks, when recorded, are normalized to have a common amplitude and sound level.
9. Method according to claim 1 or 2, wherein the signal representations (70) are
15 representations of music, talk, noise, jingles or logotypes.
10. Method according to claim 1 or 2, wherein the signal representations are representations of music and/or movies.
11. A method to receive media signals (1) through receiving means, said media signals (1) containing unwanted signal components, to chose a representation for
20 said media signals and process these media signals (1) in such a way that said unwanted signal components are essentially removed and the remaining signal components are saved, said method comprising the steps of:
- from the media signals (1) chose a search key representation (20);
in a search track (30) conduct a first search after a signal representation (10)
25 that contains a section (11) which is essentially identical with said search key (20);
to compare a first segment (40), which lies before and after said search key (20), with a second segment (41) which lies before and after said section (11), which is essentially identical with the first search key (20);
from said first segment (40) and said second segment (41) find a first

common segment (44); said method being **characterized in that** said final common segment (44) is removed from the search track when it appears in the search track.

12. Method according to claim 10, **characterized in that** said first search (20)
5 is conducted among media signal representations stored in the memory domain (70).
13. Method according to any of the above given claims, **characterized in that** said search track consist of every N:th sample of a signal representation (10).
14. Method according to claim 1 or 2, wherein the signal representations (70)
10 are representations of music, talk, noise, jingles or logotypes.
15. Method according to claim 1 or 2, wherein the signal representations are representations of music and/or movies.

Display of a Radiobroadcast

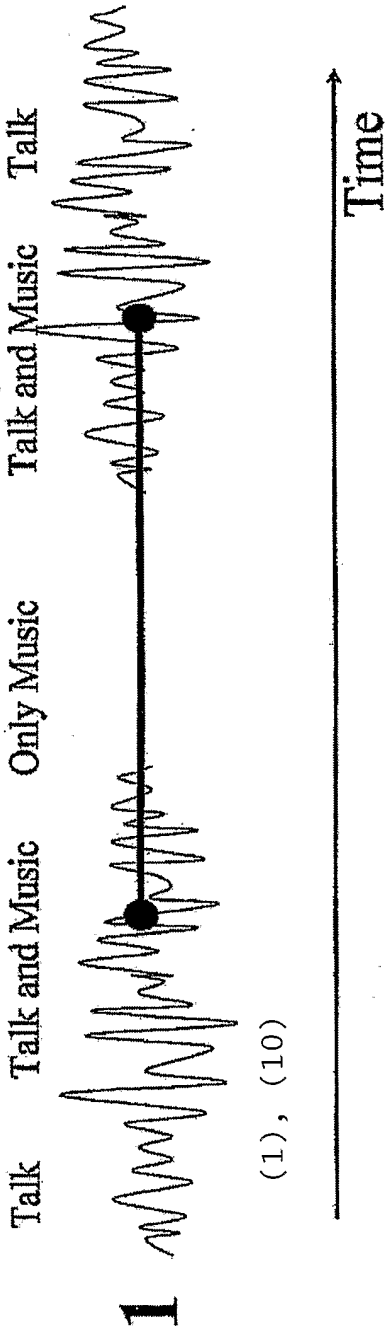


Fig. 1

PopCatcher continuously records the broadcast.

2/11

Chose the Song

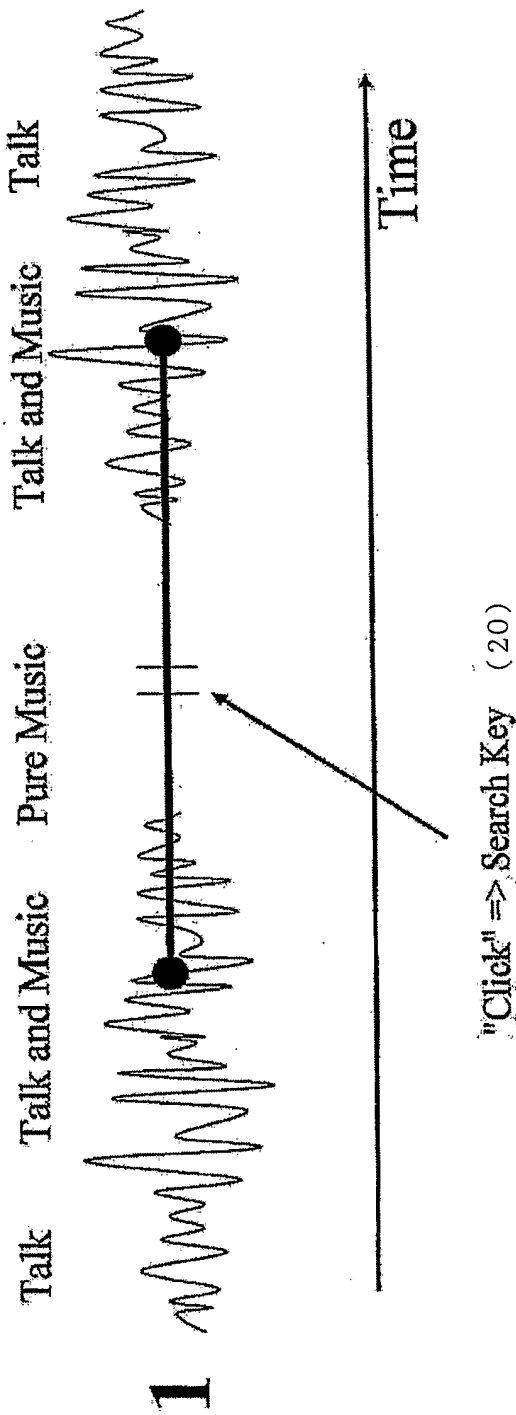


Fig. 2

Searching for the Song

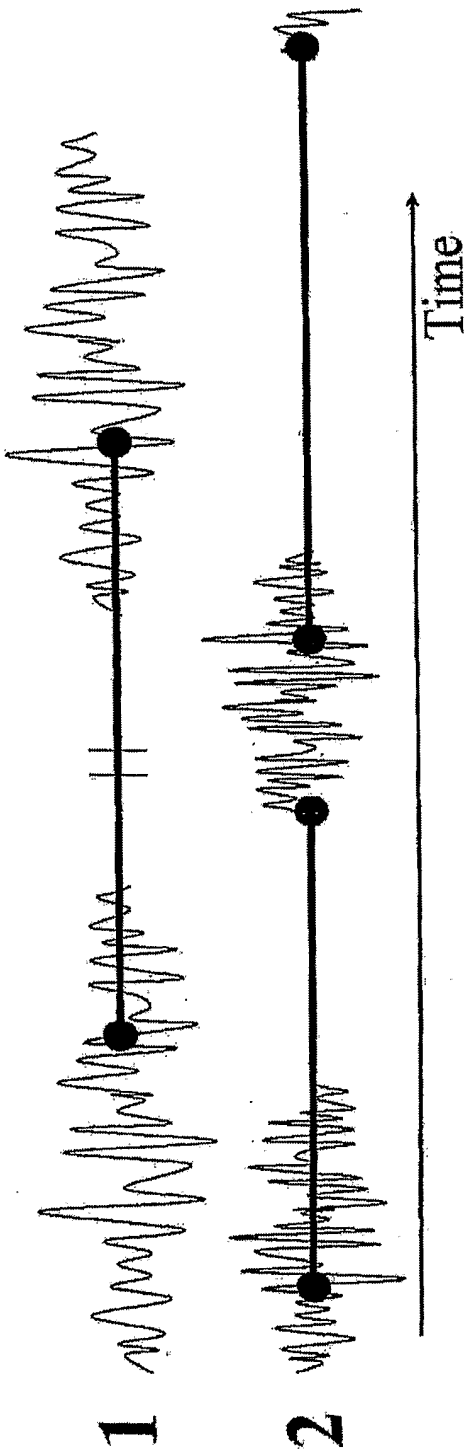


Fig. 3

Recognition of the Song

Match – Both files are saved

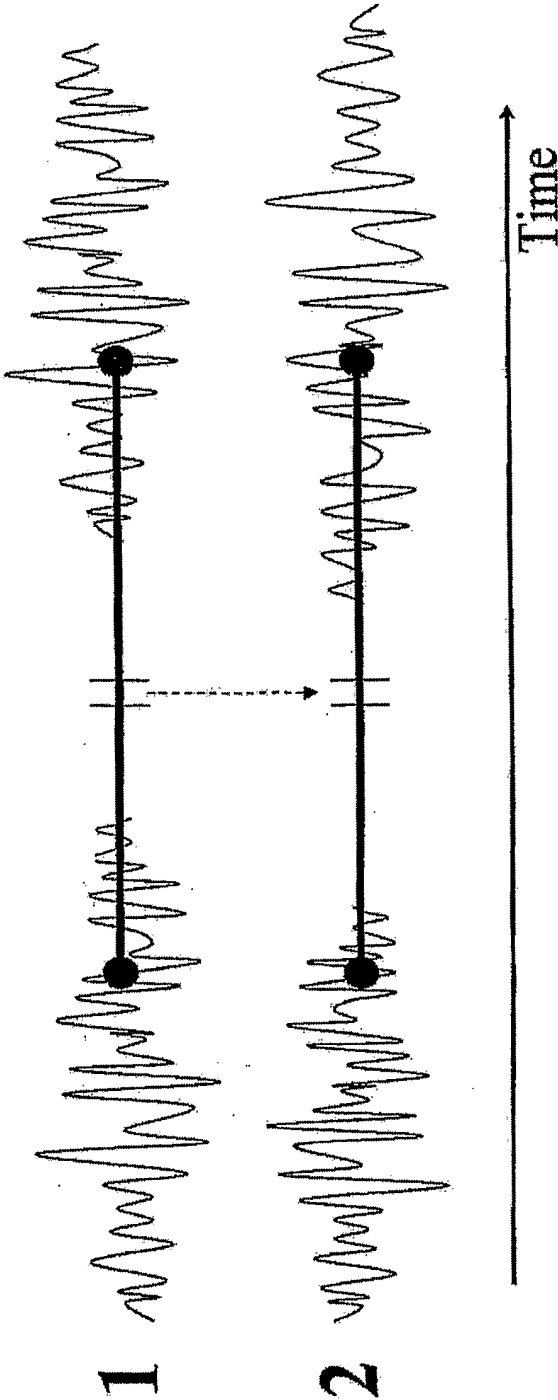


Fig. 4

5/11

Expansion

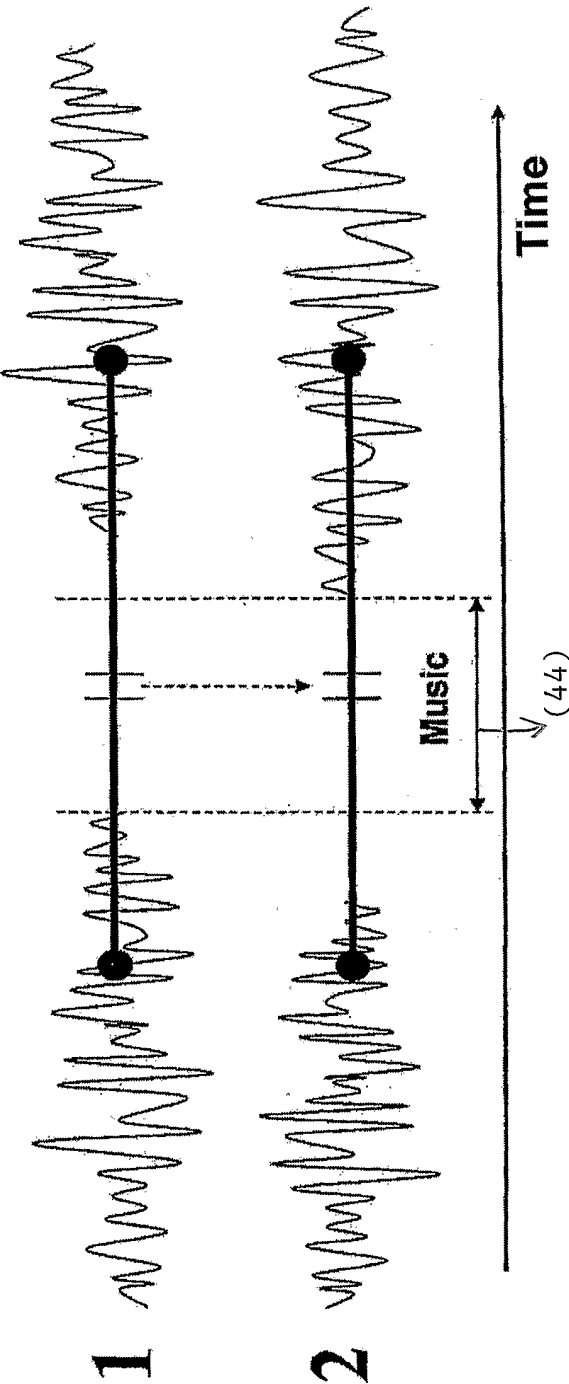


Fig. 5

Iteration of the Process

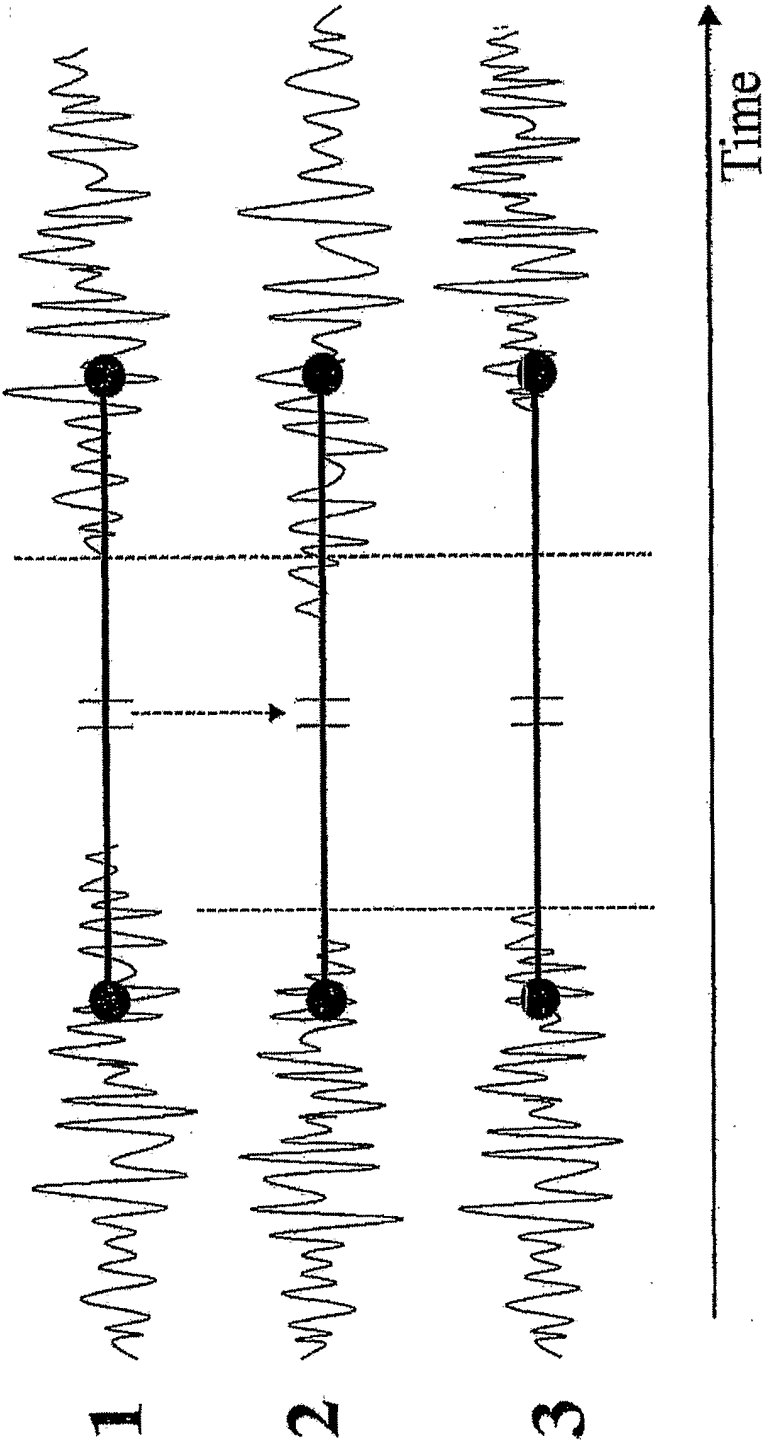


Fig. 6

7/11

Looking Backwards in Time

■ Using a buffer memory, the user will not have to wait for the song to be retransmitted

■ Prototype buffer memory: 24 hours.

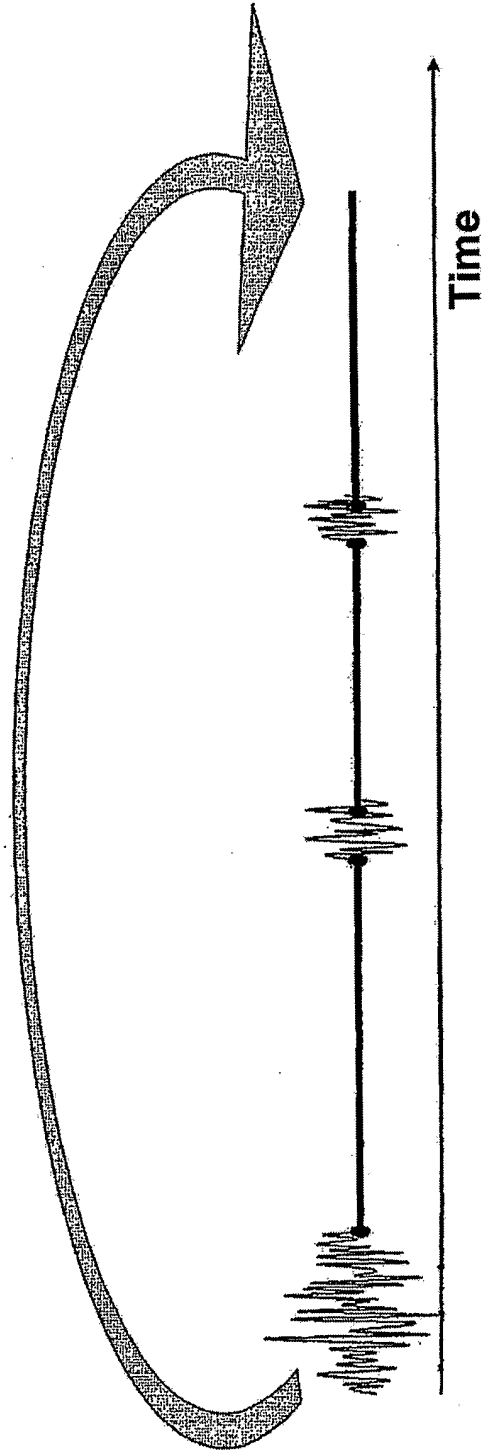


Fig. 7

8/11

Separate Search Track

- Search track
- 32 kHz music track: 1 MB/min

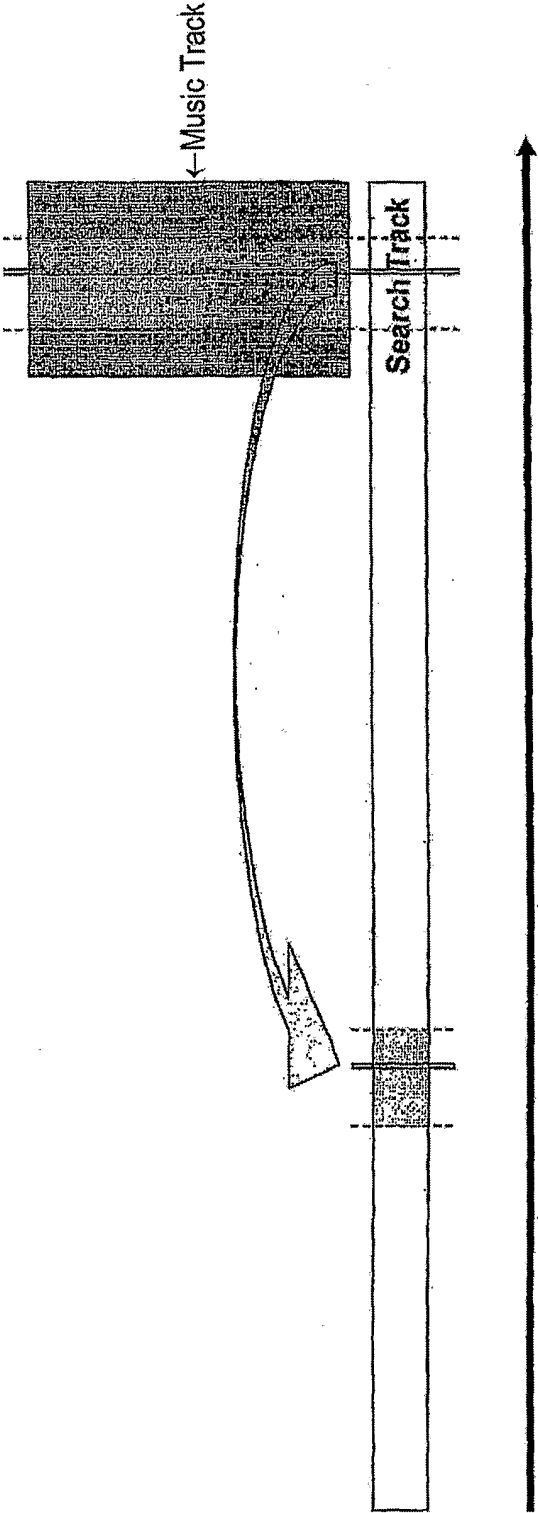


Fig. 8

Compressing Search Track

■ Search track – 4 MB/day

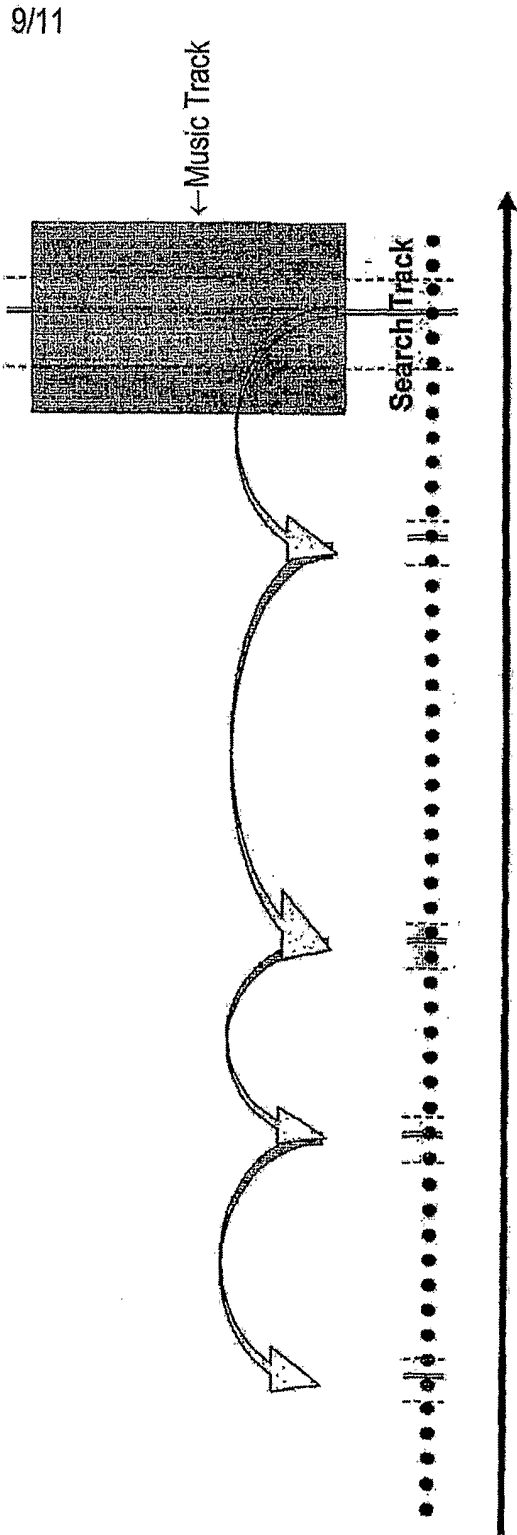


Fig. 9

Categorizing Search Track

- Storing interesting parts of search track
- Removing non-interesting parts of search track
- Result:
25-98% smaller search track

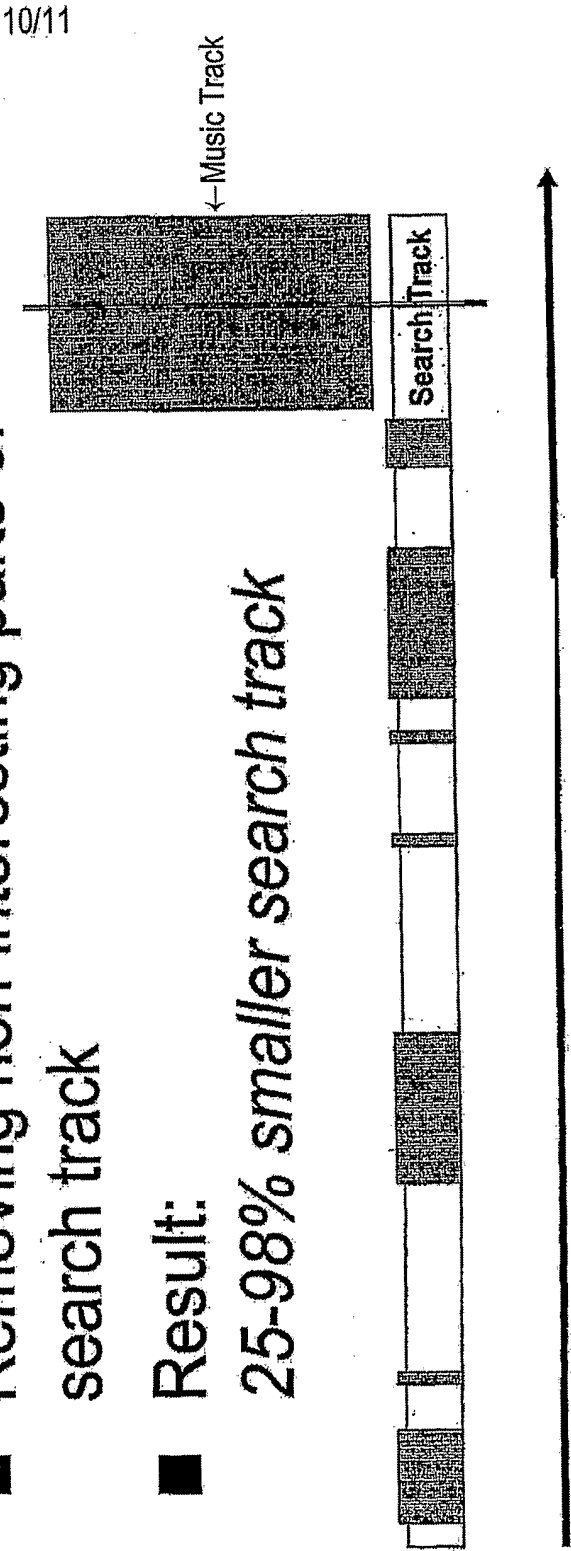


Fig. 10

11/11

Flowchart lists

What are the lists that are searched

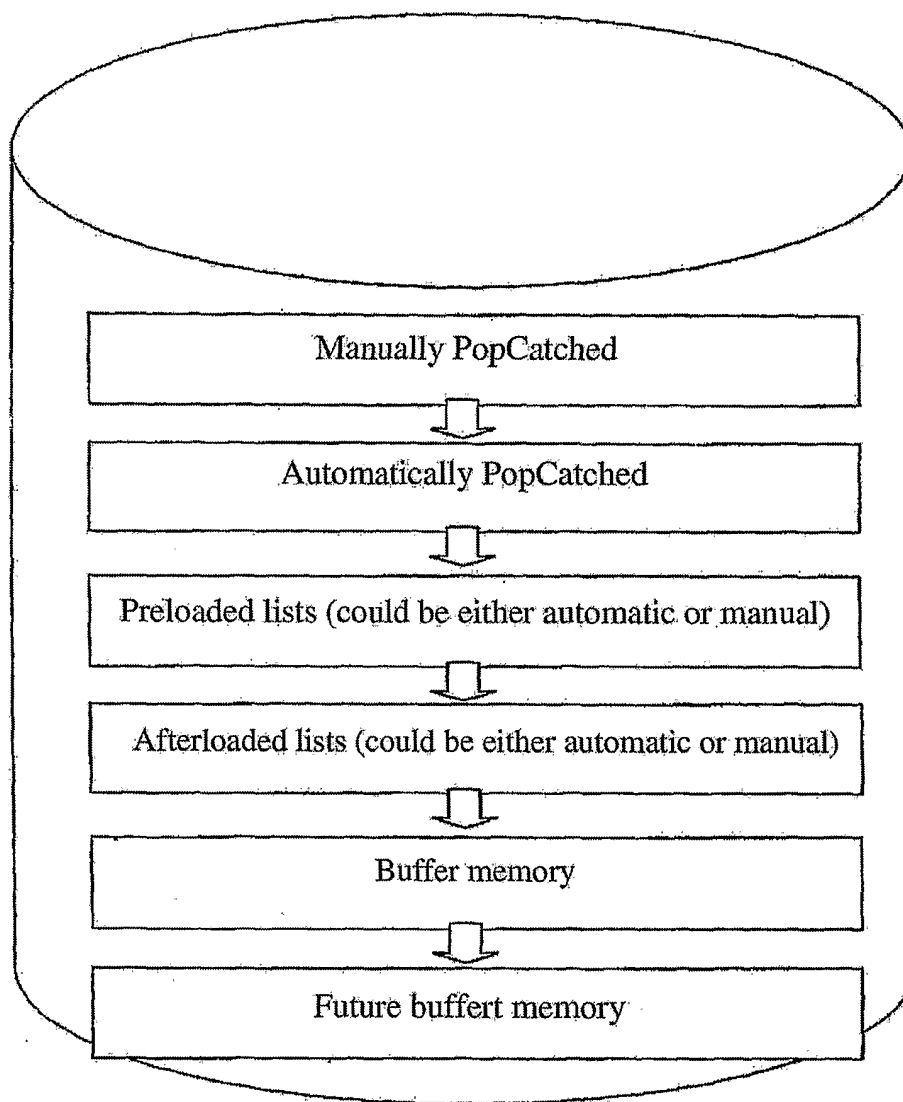


Fig. 11

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 03/01305

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: G06F 3/16, G10L 21/02, G10L 11/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: G10L, G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6438513 B1 (PASTOR, D. ET AL), 20 August 2002 (20.08.02), column 1, line 24 - column 2, line 51, figures 1,2, abstract --	1-15
Y	US 5870583 A (MAEDA, Y.), 9 February 1999 (09.02.99), figures 8-11, abstract --	1-15
Y	US 5739451 A (WINKSY, G.J.ET AL), 14 April 1998 (14.04.98), column 1, line 64 - column 2, line 67, abstract --	1-15

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

28 October 2003

Date of mailing of the international search report

30-10-2003

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Jesper Bergstrand /LR

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 03/01305

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 6185527 B1 (PETKOVIC, D. ET AL), 6 February 2001 (06.02.01), column 3, line 8 - column 4, line 61, figures 2-12, abstract --	1-15
P,X	US 2002120456 A1 (BERG, J. ET AL), 29 August 2002 (29.08.02), whole document --	1-15
A	WO 9627840 A1 (TELEVITESSE SYSTEMS INC), 12 Sept 1996 (12.09.96) --	1-15
A	US 5621454 A (ELLIS, M.D. ET AL), 15 April 1997 (15.04.97) --	1-15
A	KHALED EL-MALEH et al.: Speech/music discrimination for multimedia applications. Conf 2000 IEEE Int. Conf. on Acoustics, Speech, and Signal Processing, Istanbul, Turkey, 5-9 June 2000. Publ.-2000, Piscataway, NJ, USA, IEEE, USA, pages 2445-2448 vol.4 --	1-15
A	MORENO, P.J. et al.: Using the Fisher kernel method for web audio classification. Conf.-2000 IEEE Int. Conf. on Acoustics, Speech, and Signal Processing; Istanbul, Turkey Jun 5-Jun 9, 2000, Proc., Publ 2000 -IEEE, Piscataway, NJ, USA, ISSN 0736-7791, vol.4, pages 2417-2420 -- -----	1-15

INTERNATIONAL SEARCH REPORT

Information on patent family members

06/09/03

International application No.

PCT/SE 03/01305

Patent document cited in search report			Publication date	Patent family member(s)	Publication date
US	6438513	B1	20/08/02	DE 69806006 D,T	19/12/02
				EP 0993671 A,B	19/04/00
				FR 2765715 A,B	08/01/99
				JP 2002513479 T	08/05/02
				WO 9901862 A	14/01/99
US	5870583	A	09/02/99	DE 69414633 D,T	06/05/99
				EP 0621599 A,B	26/10/94
				EP 0833339 A	01/04/98
				JP 3353381 B	03/12/02
				JP 6309120 A	04/11/94
				US 5829050 A	27/10/98
				US 5915263 A	22/06/99
US	5739451	A	14/04/98	NONE	
US	6185527	B1	06/02/01	CN 1261181 A	26/07/00
				JP 2000259168 A	22/09/00
				TW 469422 B	00/00/00
US	2002120456	A1	29/08/02	WO 02069148 A	06/09/02
				AU 3966101 A	08/10/01
				SE 0100642 D	00/00/00
WO	9627840	A1	12/09/96	AT 240558 T	15/05/03
				AU 4780996 A	23/09/96
				CA 2214605 A	12/09/96
				DE 69628150 D	00/00/00
				EP 0813716 A,B	29/12/97
				GB 9504376 D	00/00/00
				JP 11505682 T	21/05/99
US	5621454	A	15/04/97	AT 232036 T	15/02/03
				AU 678163 B	22/05/97
				AU 718227 B	13/04/00
				AU 3427297 A	06/11/97
				AU 4226093 A	29/11/93
				CA 2134748 A	11/11/93
				DE 69332671 D	00/00/00
				EP 0748563 A,B	18/12/96
				EP 1261155 A	27/11/02
				JP 8500471 T	16/01/96
				US 5436653 A	25/07/95
				US 5504518 A	02/04/96
				US 5572246 A	05/11/96
				US 5612729 A	18/03/97
				WO 9322875 A	11/11/93