

(43) International Publication Date
27 September 2012 (27.09.2012)

- (51) International Patent Classification:
A61N 1/36 (2006.01) *A61B 5/12* (2006.01)
- (21) International Application Number:
PCT/US2012/030246
- (22) International Filing Date:
23 March 2012 (23.03.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/465,728 23 March 2011 (23.03.2011) US
- (71) Applicant (for all designated States except US): **MED-EL ELEKTROMEDIZINISCHE GERAETE GMBH** [AT/US]; Fuerstenweg 77, A-6020 Innsbruck (AT).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **SPITZER, Philipp** [AT/AT]; Eckenried 6, A-6020 Innsbruck (AT). **STRAHL, Stefan** [DE/AT]; Unterbergerstrasse 18, A-6020 Innsbruck (AT). **SCHULZE, Tanja** [—/AT]; c/o Med-el Elektromedizinische Geraete Gmbh, Fuerstenweg 77, A-6020 Innsbruck (AT). **POLAK, Marek** [SK/AT]; Technik-erstrasse 82, A-6020 Innsbruck (AT). **ZIMMERLING, Martin** [AT/AT]; Fernblick 6, A-6082 Patsch (AT).

(74) Agents: **SUNSTEIN, Bruce, D.** et al.; Sunstein Kann Murpy & Timbers LLP, 125 Summer Street, Boston, MA 02110 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

[Continued on next page]

(54) Title: POST-AURICULAR MUSCLE RESPONSE BASED HEARING PROSTHESIS FITTING

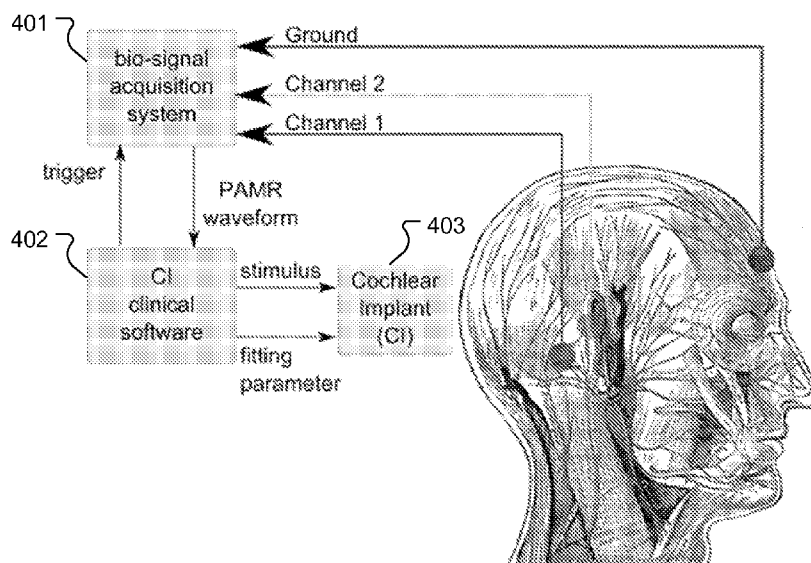**Fig. 4**

(57) Abstract: An arrangement is described for fitting a hearing prosthesis system to a prosthesis patient. The PAMR measurement determines a post-auricular muscle reflex (PAMR) response of the patient to an auditory stimulus signal. For example, the PAMR response may include a PAMR amplitude growth function or a PAMR threshold stimulus level at which a PAMR is measured in the patient. Then a patient fitting module sets an operating characteristic of the hearing prosthesis system based on the PAMR response.



-
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

TITLE

Post-Auricular Muscle Response Based Hearing Prosthesis Fitting

[0001] This application claims priority from U.S. Provisional Application 61/465,728, filed March 23, 2011, which is incorporated herein by reference.

TECHNICAL FIELD

[0002] The present invention relates to hearing prosthesis systems such as cochlear implant systems, and more specifically to fit customization in such systems.

BACKGROUND ART

[0003] Most sounds are transmitted in a normal ear as shown in Figure 1 through the outer ear **101** to the tympanic membrane (eardrum) **102**, which moves the bones of the middle ear **103** (malleus, incus, and stapes) that vibrate the oval window and round window openings of the cochlea **104**. The cochlea **104** is a long narrow duct wound spirally about its axis for approximately two and a half turns. It includes an upper channel known as the scala vestibuli and a lower channel known as the scala tympani, which are connected by the cochlear duct. The cochlea **104** forms an upright spiraling cone with a center called the modiolar where the spiral ganglion cells of the acoustic nerve **113** reside. In response to received sounds transmitted by the middle ear **103**, the fluid-filled cochlea **104** functions as a transducer to generate electric pulses which are transmitted to the cochlear nerve **113**, and ultimately to the brain.

[0004] Hearing is impaired when there are problems in the ability to transduce external sounds into meaningful action potentials along the neural substrate of the cochlea **104**. To improve impaired hearing, auditory prostheses have been developed. For example, when the impairment is associated with the cochlea **104**, a cochlear implant with an implanted stimulation electrode can electrically stimulate auditory nerve tissue with small currents delivered by multiple electrode contacts distributed along the electrode.

[0005] Figure 1 also shows some components of a typical cochlear implant system which includes an external microphone that provides an audio signal input to an external

signal processor **111** where various signal processing schemes can be implemented. The processed signal is then converted into a digital data format, such as a sequence of data frames, for transmission into the implant **108**. Besides receiving the processed audio information, the implant **108** also performs additional signal processing such as error correction, pulse formation, etc., and produces a stimulation pattern (based on the extracted audio information) that is sent through an electrode lead **109** to an implanted electrode array **110**. Typically, this electrode array **110** includes multiple electrodes on its surface that provide selective stimulation of the cochlea **104**.

[0006] Cochlear implant systems employ stimulation strategies that provide high-rate pulsatile stimuli in multi-channel electrode arrays. One specific example is the "Continuous Interleaved Sampling (CIS)"- strategy , as described by Wilson et al., *Better Speech Recognition With Cochlear Implants*, Nature, vol. 352:236-238 (1991), which is incorporated herein by reference. For CIS, symmetrical biphasic current pulses are used, which are strictly non-overlapping in time. The rate per channel typically is higher than 800 pulses/sec. Other stimulation strategies may be based on simultaneous activation of electrode currents. These approaches have proven to be successful in giving high levels of speech recognition.

[0007] Following surgical implantation, the cochlear implant (CI) must be custom fit to optimize its operation with the specific patient user. For the fitting process, it is important to know if an audible percept is elicited and how loud the percept is. Normally this information is gained using behavioral measures. For example, for each electrode contact the CI user is asked at what stimulation level the first audible percept is perceived (hearing threshold (THR)) and at what stimulation level the percept is too loud (maximum comfort level (MCL)). For CI users with limited auditory experiences or insufficient communication abilities (e.g., small children), these fitting parameters can be determined using objective measures.

[0008] One commonly used objective measure is the electrically evoked compound action potential (eCAP) which can be easily measured, but shows weak correlations with the MCL ($r=0.57$) and THR ($r=0.55$). See, for example, Miller et al., *The Clinical*

Application Of Potentials Evoked From The Peripheral Auditory System, Hearing Research, 242(1-2), 184-197 (2008); incorporated herein by reference.

[0009] The electrically evoked stapedius reflex (eSRT) shows high correlations with the MCL. *See, for example*, Stephan, K. & Welzl-Müller, K., *Post-Operative Stapedius Reflex Tests With Simultaneous Loudness Scaling In Patients Supplied With Cochlear Implants*, Audiology, 39, 13-18 (2000) ($r=0.92$); and Polak, M.; Hodges, A. & Balkany, T *ECAP, ESR and Subjective Levels For Two Different Nucleus 24 Electrode Arrays*, Otology & Neurotology, 2005, 26, 639-645, ($r= 0.93 - 0.95$); both incorporated herein by reference. But the eSRT is difficult to measure reliably, for example, movement artifacts of the impedance probe can introduce measurement artifacts.

[0010] The electrically evoked auditory brainstem response (eABR) can be measured with a slight expenditure of time, but shows only weak correlations with the MCL ($r=0.54$) and THR ($r=0.69$). *See, for example*, Brown et al., *Relationship Between EABR Thresholds And Levels Used To Program The Clarion Speech Processor*, Ann Otol Rhinol Laryngol, 108, 50-57 (1999); incorporated herein by reference.

[0011] The electrically evoked middle latency response (eMLR) also can be measured with a slight expenditure of time. But the eMLR can only be detected in 35% of awake children at initial device stimulation and 100% detectability is achieved after at least one year. *See, for example*, Gordon et al., *Effects Of Cochlear Implant Use On The Electrically Evoked Middle Latency Response In Children*, Hearing Research, 204(1-2), 78-89 (2005); incorporated herein by reference.

[0012] It is summarized in Miller et al. (2008) that “clinically useful correlations have not been observed in larger populations of CI users for either eCAP or eABR measures.” An eSRT based fitting is rarely done as it involves increased costs, for example often a second person is present to guarantee a sufficient sealed microphone probe in the CI user, especially for children. The eMLR can be measured only in a third of CI users at the initial device stimulation. U.S. Patent 6,415,185 describes using a myogenic-based response for fitting CI users.

SUMMARY

[0013] Embodiments of the present invention are directed to a method and arrangement for fitting a hearing prosthesis system to a prosthesis patient that determines a post-auricular muscle reflex (PAMR) response of the patient to an auditory stimulus signal. For example, the PAMR response may include a PAMR amplitude growth function (input-output function) or a PAMR threshold stimulus level at which a PAMR is measured in the patient. Then an operating characteristic of the hearing prosthesis system is set based on the PAMR response. For example, the operating characteristic may include the definition of the output compression functions (“maplaws”) based on the PAMR amplitude growth function. Or the operating characteristic may include the definition of the minimal and maximal stimulation amplitude based on a PAMR threshold stimulus level at which a PAMR is measured in the patient. As used herein, the term “auditory stimulus” generally refers to any type of signal stimulus to the auditory system of the brain including without limitation acoustic, electric, vibrational and optical stimuli.

[0014] Determining a PAMR response may be based on an iterative stimulus process, an external bio-signal acquisition system, on an internal fit module in an implanted stimulation processor, and/or an artifact reduction algorithm. Determining a PAMR response may include using a permuted stimulus level to account for bias related to slowly varying muscle tonicity, applying an electrical stimulus signal to the post-auricular muscle before the PAMR is measured to increase the post-auricular muscle tonicity, and/or applying an electrical stimulus signal to an afferent neural structure of the post-auricular muscle before the PAMR is measured to increase the post-auricular muscle tonicity.

[0015] The PAMR response may be determined on one side, either ipsilateral or contralateral, of the patient, or on both sides of the patient. To increase the post-auricular muscle tonicity the PAMR response may be determined during a controlled post-auricular muscle contraction of the patient user such as the prosthesis patient performs a controlled jaw movement; sucking action; turning the head to the side; opening mouth; positioning head so that the chin of the prosthesis patient is positioned against their chest.

[0016] The hearing prosthesis system may include a cochlear implant (CI) system, in which case the operating characteristic may be associated with an electrode contact in an implanted electrode array and the PAMR response may be determined from multiple electrode contacts in the array. The hearing prosthesis system may include an auditory brainstem implant (ABI) system, an Electric Acoustic Stimulation (EAS) system, a middle ear implant (MEI) system, a bone-conductive device system, a conventional hearing aid (HA) system, or an optical hearing prosthesis system.

[0017] In specific embodiments, the fitting of the hearing implant system could combine PAMR recording results from different electrodes, combinations of PAMR results with other objective or subjective results, and/or by including already recorded data. The specific form of the auditory stimulus signal includes single pulses on single electrodes, single pulses on multiple electrodes, signal bursts on single or multiple electrodes, combined electric and acoustic stimulus signals, and stimulus signals using a speech coding strategy, speech signals, speech-like signals, and/or music signals.

[0018] Embodiments of the present invention also include an implant fitting arrangement for fitting a hearing prosthesis system to a prosthesis patient using a method according to any of the foregoing.

[0019] Embodiments of the present invention also include a computer program product implemented in a tangible computer readable storage medium for fitting a hearing prosthesis system to a prosthesis patient. The product includes program code for fitting the system using a method according to any of the foregoing.

[0020] These objects of the invention are solved by the subject matter as claimed by independent claim 1. Various embodiments of the invention are the subject of the dependent claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0021] Fig. 1 shows anatomical structures of a human ear having a cochlear implant

system.

[0022] Fig. 2 shows various logical steps in a PAMR-based patient fit process according to one embodiment of the present invention.

[0023] Fig. 3 shows various logical steps in a PAMR-based patient fit process according to another embodiment of the present invention.

[0024] Fig. 4 shows various devices in a system for performing a PAMR-based patient fit using an external bio-signal acquisition system.

[0025] Fig. 5 shows a system for performing a PAMR-based patient fitting with a fit module internal to the hearing prosthesis.

[0026] Fig. 6 shows an example of implantable components of a cochlear implant system adapted for performing a PAMR-based patient fitting process.

[0027] Fig. 7 illustrates various different possible measurement electrode positions.

[0028] Fig. 8 shows a graph of data from a PAMR amplitude growth sequence according to one set of experiments.

[0029] Fig. 9 shows a graph of data from PAMR responses from one set of experiments for different measurement electrode positions of the same subject.

[0030] Fig. 10 shows a graph of data showing PAMR responses from one set of experiments for different repetition rates.

[0031] Fig. 11 shows an example of an ePAMR amplitude growth function measured with a specific user.

DETAILED DESCRIPTION

[0032] The post-auricular muscle reflex (PAMR) is a large myogenic response that occurs between about 10 and 25 ms after an acoustic stimulus. It has been reported that the PAMR threshold shows a high correlation with pure-tone average thresholds in normal hearing subjects and in subjects with sensorineural hearing loss using an acoustic stimulation. ($r=0.82$ at 2 kHz) Purdy et al., *The Post-Auricular Muscle Response: An Objective Electrophysiological Method For Evaluating Hearing Sensitivity*, Int J Audiol, National Acoustic Laboratories, Sydney, NSW, Australia., 2005, 44, 625-630; incorporated herein by reference. Purdy reported that PAMR can be reliably measured (>90%) when the eyes are turned towards the recording site. This reflects an increased PAM tonicity which can be explained by the Wilson's oculoauricular phenomenon which associates ear movements with lateral eye movements.

[0033] It is believed that the afferent pathway responsible for the PAMR includes the ventral cochlear nucleus, superior olivary nucleus and the lateral lemniscus nucleus and either the inferior colliculus or the reticular formation. The efferent pathway is along the facial nerve to the PAM. See, for example, Patuzzi, R. B. & O'Beirne, G. A., *A Correlation Method For Detecting The Sound-Evoked Post-Auricular Muscle Response (PAMR)*, Hear Res, 138, 147-162 (1999); Patuzzi, R. B. & O'Beirne, G. A. *Effects Of Eye Rotation On The Sound-Evoked Post-Auricular Muscle Response (PAMR)*, Hear Res, 138, 133-146 (1999); both incorporated herein by reference.

[0034] It has been shown that the PAMR can be recorded at threshold levels in normal-hearing and hearing-impaired listeners with a mean difference of 9 dB between the PAMR threshold and the 2 kHz audiometric threshold. It has further been shown that using optimal recording and stimulus settings the PAMR can be reliably recorded in most adults. However, no one has ever proposed a PAMR-based patient fitting algorithm for a hearing prosthesis system such as a cochlear implant (CI).

[0035] Various embodiments of the present invention are directed to patient fitting of a hearing prosthesis based on generating and measuring the post-auricular muscle response (PAMR). In addition to patient fitting, such an arrangement may also be useful for testing

the functionality of the hearing prosthesis system, and to acquire an intra-operative and/or post-operative confirmation of a correct electrode placement.

[0036] As the origin of the post-auricular muscle reflex is similar to the stapedius muscle reflex, it is expected to show higher correlations with the desired fitting parameters than eCAP or eABR recordings. Furthermore, the eSRT measurement normally results in a single threshold value – the highest stimulation level at which no muscle contraction response is obtained. This is due the fact that the stimulation threshold for the eSRT response is near the MCL so that eSRT responses can only be measured over a small stimulation range. In contrast, PAMR measurements normally result in an input-output function with increasing PAMR responses for increasing stimulation amplitudes (e.g. Fig. 8). In other words, as the PAMR is already elicited at low stimulation levels, this measurement has the potential to cover a large dynamic range for each electrode. Thereby PAMR responses can quantitatively be evaluated similar to eCAP or eABR measurements, for example the slope of the I/O function or the latencies of the PAMR waveform at different stimulation amplitudes can be analyzed.

[0037] Thus embodiments of the present invention are directed to arrangements for fitting a hearing prosthesis system to a prosthesis patient based on determining a post-auricular muscle reflex (PAMR) response of the patient to an auditory stimulus signal. For example, the PAMR response may include a PAMR amplitude growth function (input-output function) or a PAMR threshold stimulus level at which a PAMR is measured in the patient. Then an operating characteristic of the hearing prosthesis system is set based on the PAMR response. For example, the operating characteristic may include the definition of the output compression functions (“maplaws”) based on the PAMR amplitude growth function. Or the operating characteristic may include the definition of the minimal and maximal stimulation amplitude based on a PAMR threshold stimulus level at which a PAMR is measured in the patient.

[0038] In specific embodiments, a PAMR measurement module could combine PAMR recording results from different electrodes. For example, a shift, scale and tilt of the profile could be performed as discussed Botros, A. & Psarros, C., *Neural Response Telemetry*

Reconsidered: I. The Relevance of ECAP Threshold Profiles and Scaled Profiles to Cochlear Implant Fitting, Ear and Hearing, 31, 367-379 (2010); incorporated herein by reference. Similarly, a patient fitting module of the hearing implant system could make use of combinations of PAMR results with other objective or subjective results such as is described in U.S. Patent Application 12/890,188, filed September 24, 2010, incorporated herein by reference. And the recording of PAMR responses could be accelerated by including already recorded data (e.g. thresholds from adjacent electrodes).

[0039] The specific form of the auditory stimulus signal includes single pulses on single electrodes, single pulses on multiple electrodes (parallel stimulation), signal bursts on single or multiple electrodes, combined electric and acoustic stimulus signals, and stimulus signals using a speech coding strategy (for example, a speech coding strategy that will be used later in normal system operation), and more generally speech signals, speech-like signals, and/or music signals.

[0040] Figure 2 shows an example of a PAMR-based amplitude growth-based fitting procedure. The goal is to determine the lowest stimulation level that elicits an audible percept (THR) and the highest still comfortable stimulation level (MCL). First, the PAMR measurement module selects an initial electrode channel to be fit, step **201**. In an iterative process, the PAMR measurement module then stimulates the current electrode channel at the chosen stimulus level and the myogenic potential is measured and recorded post-stimulus, step **202**. The initial stimulation level should be sub-threshold (e.g. 0 μ A) and if no PAMR response is measured and the stimulus level is still below the user's MCL, step **203**, the PAMR measurement module increases the stimulus level, step **204** and repeats the measurement, step **202**, until either the PAMR response is saturated or the stimulus level reaches the user's MCL, step **203**.

[0041] Using the stimulation level at which the first PAMR response was observable (PAMR-THR), the slope of the amplitude growth function (PAMR-SLOPE), the maximal PAMR response (PAMR-MAX) together with PAMR waveform features for the N applied stimulation levels $L_1, \dots, L_N$ like the latency of the peaks (PAMR-P1(L_1), PAMR-N1(L_1),...) the fitting functions $THR = f_t(\text{PAMR-THR}, \text{PAMR-SLOPE}, \text{PAMR-MAX},$

PAMR-P1(L₁), ..., PAMR-P1(L_N), PAMR-N1(L₁),...) and $MCL = f_{\mu}(\text{PAMR-THR}, \text{PAMR-SLOPE}, \text{PAMR-MAX}, \text{PAMR-P1}(L_1), \dots, \text{PAMR-P1}(L_N), \text{PAMR-N1}(L_1), \dots)$ can be approximated by the PAMR measurement module, step **205**. This may involve using, for example, a spline interpolation technique (see, for example Bojanov et al., *Spline Functions and Multivariate Interpolations*, Kluwer Academic Publishers, Dordrecht/Boston/London, 1993; incorporated herein by reference). Or the PAMR measurement module may make a determination of the THR as PAMR-THR times some fit factor x and MCL as PAMR-THR times some fit factor y may be sufficient for some embodiments. An alternative approach would be to estimate the THR and MCL using a single PAMR waveform feature, for example $THR = k_{\tau} * \text{PAMR-SLOPE}$ and $MCL = k_{\mu} * \text{PAMR-THR}$ where k_{τ} , k_{μ} are correction factors. Such a PAMR fitting algorithm can be extended to include the PAMR measurements from all other electrodes. To determine the desired initial fitting parameters—the fitting function f_{τ} for the THR and f_{μ} for the MCL—a priori data from a large pool of patients can be used where behavioural determined fittings done by an expert are available together with the PAMR measurement. The PAMR measurement module then repeats the measurement process for each remaining electrode channel, step **206**.

[0042] Figure 3 shows an example of another PAMR threshold-based fitting procedure using the PAMR characteristics (such as threshold, peak-to peak amplitude, latencies) for each hearing prosthesis channel to determine the operating values (e.g., THR and/or MCL) of the respective electrode channel. The PAMR measurement module selects an initial electrode channel to be fit, step **301**.

[0043] In an iterative process, the PAMR measurement module then stimulates the current electrode channel at the chosen stimulus level and the myogenic potential is measured and recorded post-stimulus, step **302**. The initial stimulation level should be sub-threshold (e.g. 0 cu) and if no PAMR response is measured (**303**) and the stimulus level is still below the user's MCL, step **304**, the stimulus level is increased, step **305** and the measurement repeated, step **302**, until a PAMR response is obtained, step **303**.

[0044] Using the stimulation level at which the first PAMR response was observable (PAMR-THR) together with PAMR waveform features like the latency of the peaks (PAMR-P1, PAMR-N1, ...), fitting functions $THR = f_{\tau}(PAMR-THR, PAMR-P1, PAMR-N1, \dots)$ and $MCL = f_{\mu}(PAMR-THR, PAMR-P1, PAMR-N1, \dots)$ can be approximated, step **306**. For example, this may be based on a spline interpolation technique (see, for example Bojanov et al., *Spline Functions and Multivariate Interpolations*, Kluwer Academic Publishers, Dordrecht/Boston/London, 1993; incorporated herein by reference). Another approach may make a determination of the THR as PAMR-THR times some fit factor x and MCL as PAMR-THR times some fit factor y may be sufficient for some embodiments. An alternative embodiment may be able to estimate the THR and MCL using a single PAMR waveform feature, for example $THR = k_{\tau} * PAMR-THR$ and $MCL = k_{\mu} * PAMR-THR$ where k_{τ} , k_{μ} are correction factors. Such a PAMR fitting algorithm can be extended to include the PAMR measurements from all other electrodes. To determine these desired initial fitting parameters—i.e. the fitting function f_{τ} for the THR and f_{μ} for the MCL—a priori data from a large pool of patients can be used where behaviourally determined fittings done by an expert are available together with the PAMR measurement. The process is then repeated for each remaining electrode channel, step **307**.

[0045] Fig. 4 shows various devices in a PAMR measurement module for performing a PAMR-based fit using an external bio-signal acquisition system. CI clinical patient fitting module software **402** controls the fit process sending electrical stimulus signals to each electrode channel in the cochlear implant **403** during the fit process, as well as the THR and MCL fitting parameters as determined by the PAMR measurements of the external bio-signal acquisition system **401** such as an Electroencephalography (EEG) or Electromyography (EMG) recording system. The patient fitting module software **402** triggers the CI stimulus and PAMR measurement, imports the PAMR waveform, and derives the new fitting parameters, THR and MCL. Fig. 5 shows an example of another system for performing a PAMR-based fitting with a PAMR fit module **502** that is internal to the hearing prosthesis **501**. In another embodiment, a PAMR fit module may be implemented in the external audio processor (e.g., BTE processor).

[0046] Fig. 6 shows an example of a cochlear implant **600** adapted for electing and/or recording PAMR. Readily apparent are the usual components of a cochlear implant **600** including an implant processor **601** coupled to a receiver coil **602** that communicates data and power signals with external components. The implant processor responds to incoming communications signals by delivering electrode stimulation signals via an electrode lead **603** to the electrode contacts **605** within the cochlea. The outer surface of the implant processor **601** includes a reference contact **608** for the electrode stimulation signals. A separate PAMR lead **604** terminates in a PAMR recording electrode **606** that ends at the post auricular muscle. Fig. 7 shows various possible implanted positions for the PAMR recording electrode **606** (based on Fig. 3A from O'Beirne & Patuzzi (1999)). In some embodiments, the PAMR recording electrode **606** may be implemented as an array of electrode contacts. A separate PAMR reference electrode **607** also is present on the outer surface of the implant processor **601**. The PAMR reference electrode **607** may also be remotely placed.

[0047] Fig. 8 shows a graph of data from a PAMR amplitude growth sequence according to one set of experiments using an active chin-on-chest posture of the patient. The left plot shows the single PAMR waveforms for different stimulation amplitudes for an ipsilateral and a contralateral recording. The right plot shows the amplitude growth function of the PAMR amplitude for the two recording sides. The dotted lines represent the slope of a linear fit of the respective data. Measurements were based on 100 μ s clicks measuring 20-80 dB nHL in steps of 5 dB. An interleaved sequence was used of 4 iterations with each signal repeated 30 times per iteration, and ipsilateral left ear stimulus, left PAM, and contralateral right ear stimulus, left PAM. A PAMR amplitude growth sequence was measured in a normal hearing subject using an eyes front and sucking condition for several stimulation levels. A clear increase in PAMR amplitude with increasing stimuli level is observable.

[0048] Fig. 9 shows a graph of data from a set of experiments in the same patient measuring PAMR responses for different measurement electrode positions (such as in Fig. 7). The graphed data shows that the PAMR threshold is independent of the electrode position. The left plot shows the single PAMR waveforms for the different electrode

positions. The right plot shows different amplitude growth function of the PAMR amplitude. The dotted lines represent the slope of a linear fit of the respective data.

[0049] Fig. 10 shows a graph of data from a set of experiments in one patient measuring PAMR responses at 60 dB nHL for different repetition rates. The right plot shows the PAMR amplitude over stimulation rate. The left plot shows the single PAMR waveforms for the different stimulation rates. The PAMR response may be determined for different stimulation rates and the obtained information about the auditory system can be used to derive $THR = f_t()$ and $MCL = f_m()$ for different coding strategies and their parameters such as pulse-rate. One determination of THR and MCL at different stimulation rates may be based on the measured integration effect of the PAMR response as shown in Fig. 10. The stimulation rate may preferably be higher than 20 Hz or 25 Hz or 30 Hz, and the preferred time-lag between stimulation pulse and measurement may be 10-25 ms for acoustically-evoked PAMR and 5-20 ms for electrically-evoked PAMR.

[0050] As the efferent pathway of the post-auricular muscle reflex (PAMR) is similar to the stapedius muscle reflex (SRT), a similar high correlation with the MCL fittings parameter of the hearing prosthesis and a similar high percentage of hearing prosthesis users where the PAMR is recordable is expected. Moreover, while the eSRT measurement (for example) only gives information about the MCL fitting value, the amplitude growth sequence of the PAMR response also should correlate with the THR fitting value. By analyzing the differences of the eCAP amplitude growth sequence with the ePAMR amplitude growth sequence further insight into the auditory system between the auditory nerve and the higher auditory pathway is expected due to its different sites of generation.

[0051] Due to the relatively large myogenic response, a reduced number of measurement repetitions will be needed to obtain a reliable recording of the PAMR response. This results in a short measurement time—about 30 measurements per second are possible and with an assumed minimum of $N=10$ repetitions per CI channel and stimulation level, for example for a 12 channel CI an amplitude growth sequence with 5 stimulation levels has a total measurement time of minimal 20 seconds. To account for such things as adaptation effects, a reduced number of measurements per second might be needed and also a

permutation of the stimulation levels and electrodes is favorable.

[0052] Measuring the PAMR is relatively easy using three recording electrodes and any existing EEG recording system that is available in most clinics. The patient can be awake, and for children where objective measures are most needed, simple suckling / eating movement can be used instead of an exhausting eye movement as proposed by Purdy et al. (2005). Moreover, the PAMR is not affected by the development of the postauricular muscle, i.e. microtia (Takagi et al. 1984). And in contrast to mid- and long-latency event-related brain potentials, the PAMR is not affected by the attention of the subject (Hackley et al. 1987). It is possible that anesthesia during surgery might reduce or stop the PAMR, but further research is needed as it might also be possible that due to its size a PAMR can be obtained during surgery. Fig. 11 shows an example of an ePAMR amplitude growth function measured with a MED-EL PULSAR ci100 user. The ePAMR threshold was at 400 current units (cu) and the behavioral threshold was at 365 cu.

[0053] So adding a new objective measure for fitting a hearing prosthesis system based on PAMR is expected to increase the quality of the fitting and overcome many of the limitations of the existing objective fit methods. This especially reflects that the PAMR as a top-down event which implicates a major portion of the auditory pathway. That is, higher auditory processes like loudness summation are included, in contrast to, for example, eCAP measurements where only the peripheral part of the auditory system is observed.

[0054] Embodiments of the invention may be implemented in whole or in part in any conventional computer programming language. For example, preferred embodiments may be implemented in a procedural programming language (*e.g.*, “C”) or an object oriented programming language (*e.g.*, “C++”, Python). Alternative embodiments of the invention may be implemented as pre-programmed hardware elements, other related components, or as a combination of hardware and software components.

[0055] For example, a pseudo code representation of a generic embodiment might be set forth as follows:

Process PatientFitting**determine** PAMR response to auditory stimulus**set** operating parameter (maplaws/THR/MCL) based on PAMR response

[0056] Embodiments can be implemented in whole or in part as a computer program product for use with a computer system. Such implementation may include a series of computer instructions fixed either on a tangible medium, such as a computer readable medium (*e.g.*, a diskette, CD-ROM, ROM, or fixed disk) or transmittable to a computer system, via a modem or other interface device, such as a communications adapter connected to a network over a medium. The medium may be either a tangible medium (*e.g.*, optical or analog communications lines) or a medium implemented with wireless techniques (*e.g.*, microwave, infrared or other transmission techniques). The series of computer instructions embodies all or part of the functionality previously described herein with respect to the system. Those skilled in the art should appreciate that such computer instructions can be written in a number of programming languages for use with many computer architectures or operating systems. Furthermore, such instructions may be stored in any memory device, such as semiconductor, magnetic, optical or other memory devices, and may be transmitted using any communications technology, such as optical, infrared, microwave, or other transmission technologies. It is expected that such a computer program product may be distributed as a removable medium with accompanying printed or electronic documentation (*e.g.*, shrink wrapped software), preloaded with a computer system (*e.g.*, on system ROM or fixed disk), or distributed from a server or electronic bulletin board over the network (*e.g.*, the Internet or World Wide Web). Of course, some embodiments of the invention may be implemented as a combination of both software (*e.g.*, a computer program product) and hardware. Still other embodiments of the invention are implemented as entirely hardware, or entirely software (*e.g.*, a computer program product).

[0057] Although various exemplary embodiments of the invention have been disclosed, it should be apparent to those skilled in the art that various changes and modifications can be made which will achieve some of the advantages of the invention without departing from the true scope of the invention.

CLAIMS

What is claimed is:

1. An implant fitting arrangement for fitting a hearing prosthesis system to a prosthesis patient, the arrangement comprising:
 - a PAMR measurement module for determining a post-auricular muscle reflex (PAMR) response of the patient to an auditory stimulus signal; and
 - a patient fitting module for determining an operating characteristic of the hearing prosthesis system based on the PAMR response.
2. An implant fitting arrangement according to claim 1, wherein the operating characteristic includes an output compression function based on a PAMR amplitude growth function.
3. An implant fitting arrangement according to claim 1, wherein the patient fitting module sets an operating characteristic that includes at least one of a lowest stimulation level (THR) that elicits an audible percept in the patient and a maximum comfort level (MCL) beyond which the audible precept in the patient is uncomfortably loud.
4. An implant fitting arrangement according to claim 1, wherein the PAMR measurement module determines a PAMR response based on an iterative stimulus process.
5. An implant fitting arrangement according to claim 1, wherein the PAMR measurement module determines a PAMR response based on an external bio-signal acquisition system.
6. An implant fitting arrangement according to claim 1, wherein the PAMR measurement module determines a PAMR response based on an internal fit module in an implanted stimulation processor.
7. An implant fitting arrangement according to claim 1, wherein the PAMR measurement module determines a PAMR response based on an artifact reduction algorithm.
8. An implant fitting arrangement according to claim 1, wherein the PAMR measurement

module determines a PAMR response using a permuted stimulus level to account for bias related to slowly varying muscle tonicity.

9. An implant fitting arrangement according to claim 1, wherein the PAMR measurement module determines a PAMR response by applying an electrical stimulus signal to the post-auricular muscle before the PAMR response is determined.

10. An implant fitting arrangement according to claim 1, wherein the PAMR measurement module determines a PAMR response by applying an electrical stimulus signal to an afferent neural structure of the post-auricular muscle before the PAMR response is determined.

11. An implant fitting arrangement according to claim 1, wherein the PAMR measurement module determines a PAMR response on one side, either ipsilateral or contra-lateral, of the patient.

12. An implant fitting arrangement according to claim 1, the PAMR measurement module determines a PAMR response on both sides of the patient.

13. An implant fitting arrangement according to claim 1, wherein the PAMR measurement module determines a PAMR response during a controlled post-auricular muscle contraction of the patient or during a controlled jaw movement of the patient.

14. An implant fitting arrangement according to claim 1, wherein the PAMR measurement module determines a PAMR response while the patient performs a sucking action or while the chin of the patient is positioned against their chest.

15. An implant fitting arrangement according to claim 1, wherein the hearing prosthesis system includes a cochlear implant system.

16. An implant fitting arrangement according to claim 15, wherein the auditory stimulus signal includes at least one of a single electrode burst signal and a multi-electrode burst signal.

17. An implant fitting arrangement according to claim 1, wherein the auditory stimulus signal includes combined electric and acoustic stimulus signals.

18. A method of fitting a hearing prosthesis system to a prosthesis patient, the method comprising:

- determining a post-auricular muscle reflex (PAMR) response of the patient to an auditory stimulus signal; and
- setting an operating characteristic of the hearing prosthesis system based on the PAMR response.

19. A computer program product encoded in a non-transitory computer-readable medium for fitting a hearing prosthesis system to a prosthesis patient, the product comprising:

- program code for determining a post-auricular muscle reflex (PAMR) response of the patient to an auditory stimulus signal; and
- program code for setting an operating characteristic of the hearing prosthesis system based on the PAMR response.

1/10

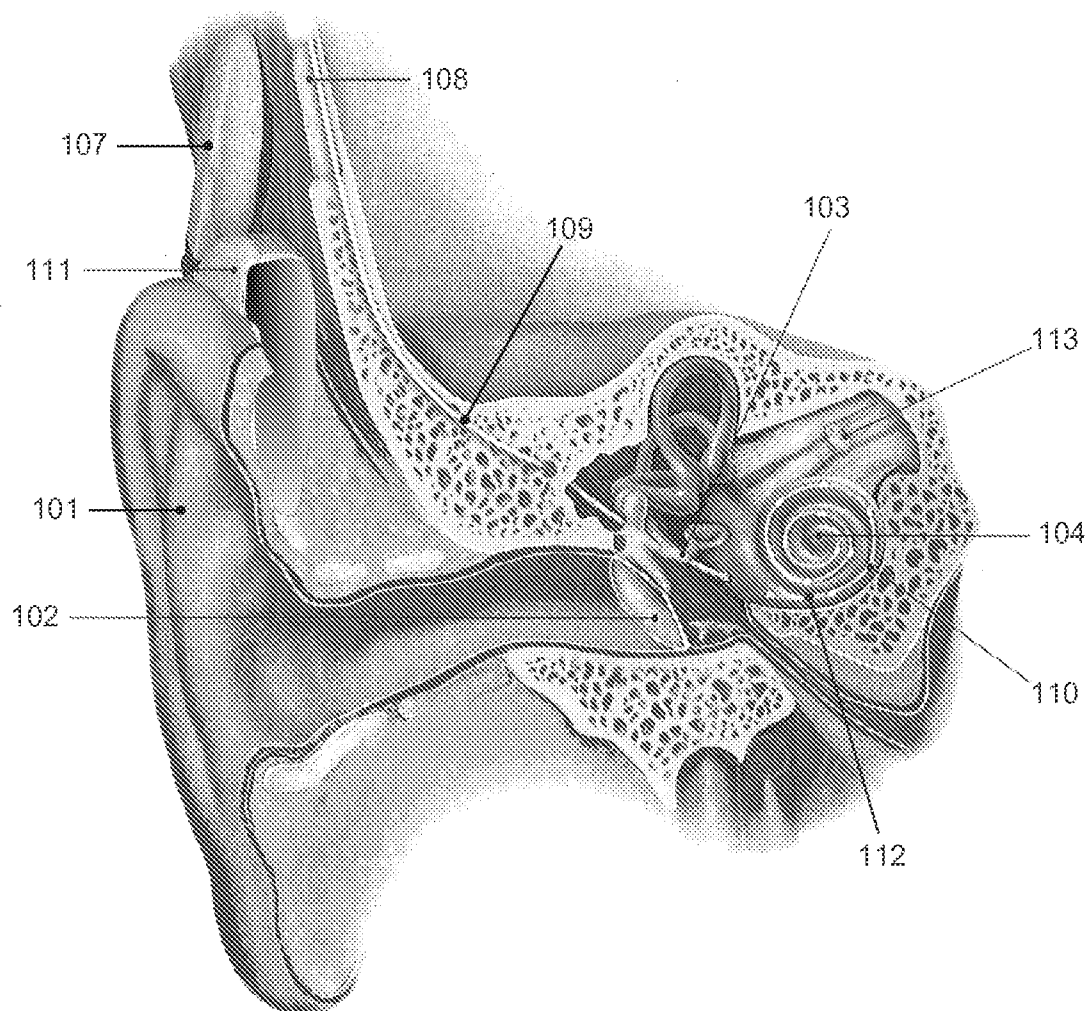
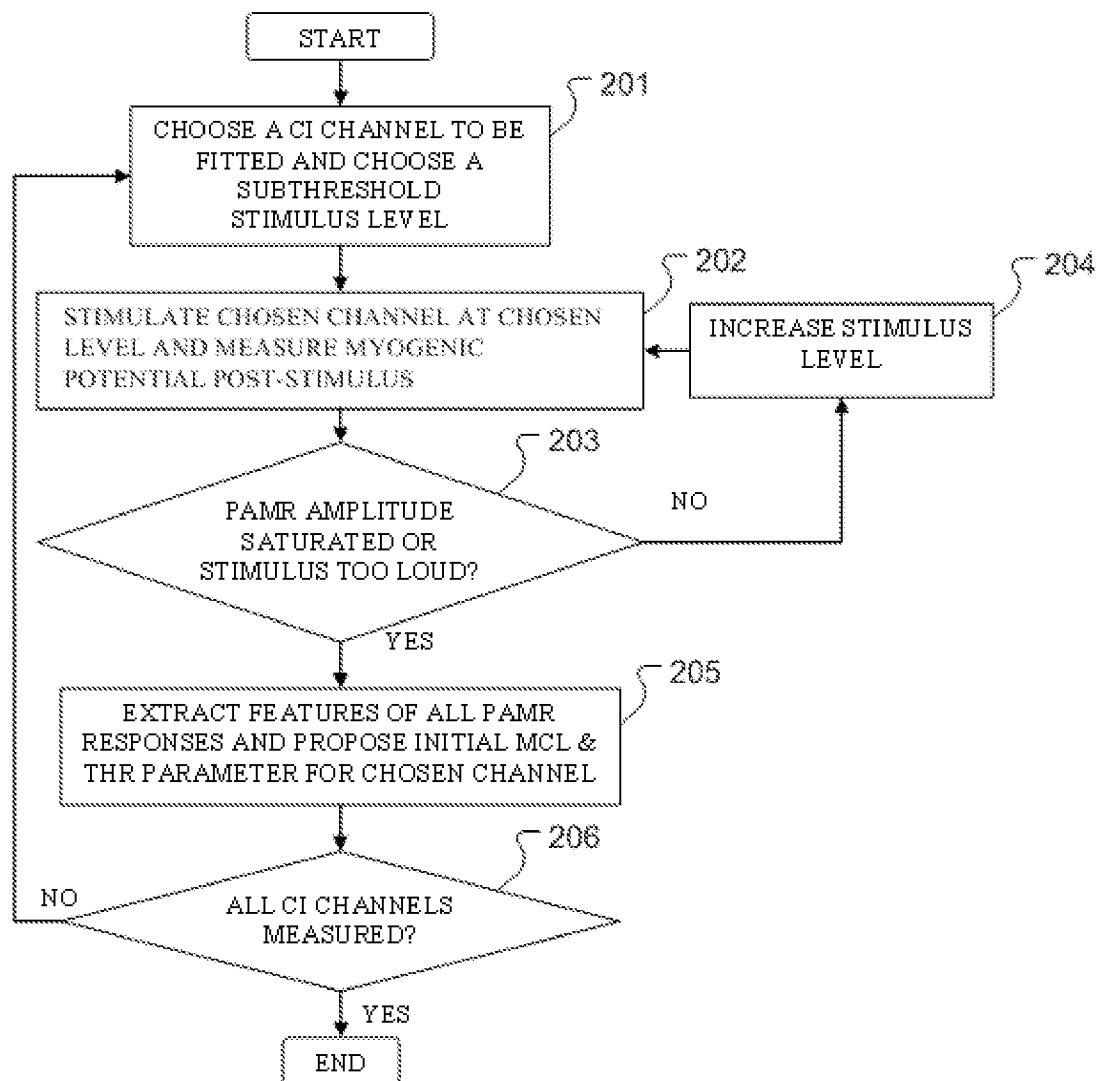
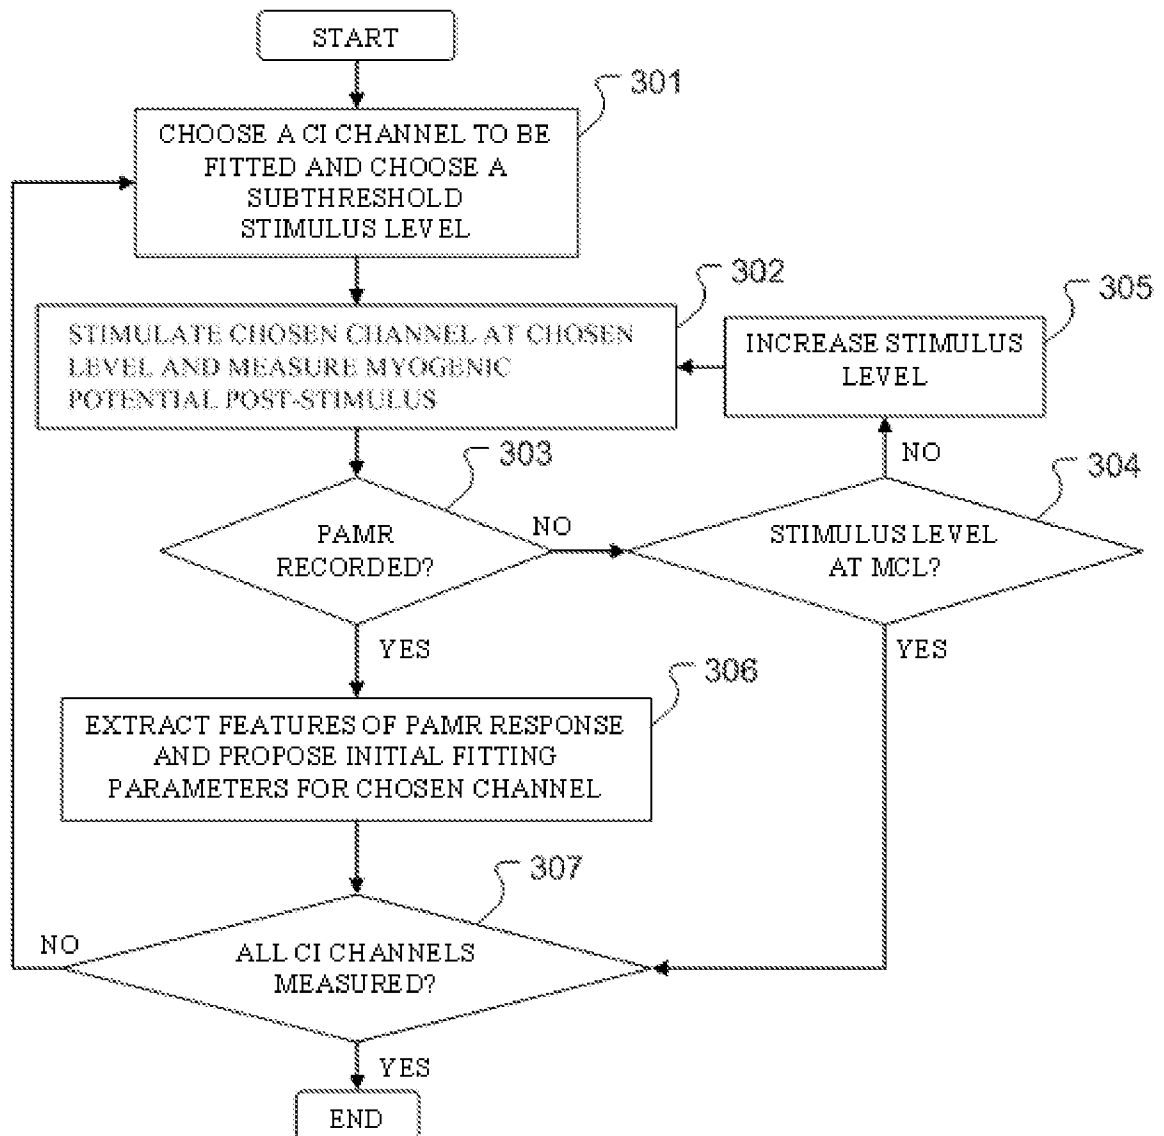


Fig. 1

2/10

**Fig. 2**

3/10

**Fig. 3**

4/10

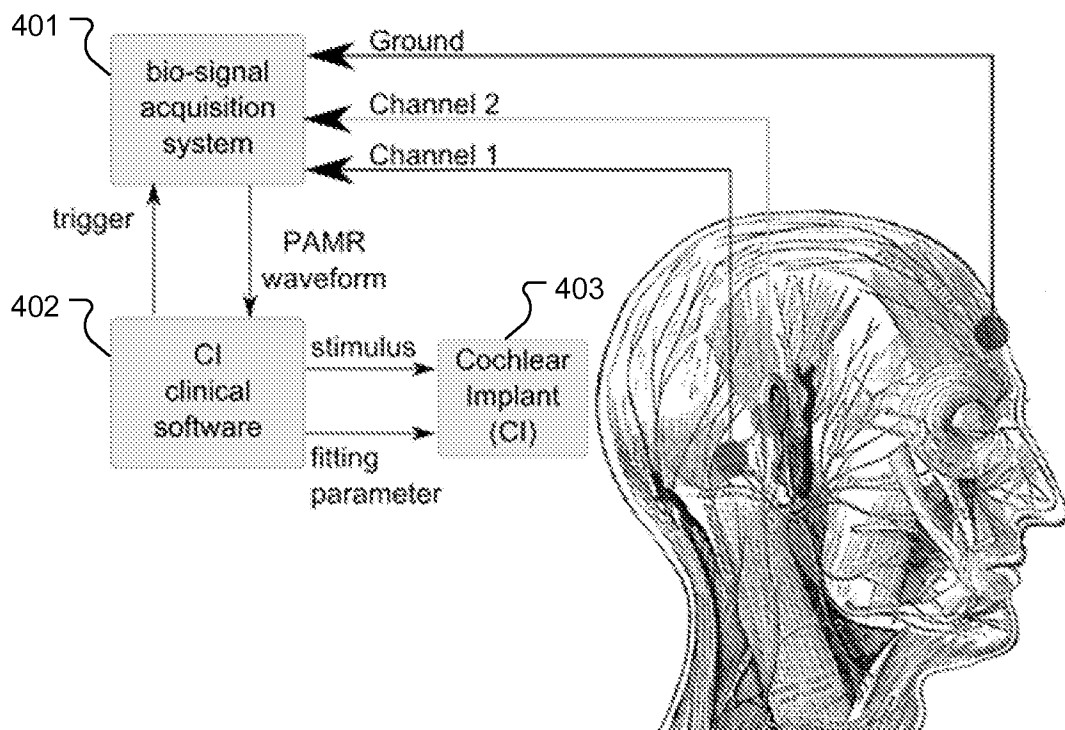


Fig. 4

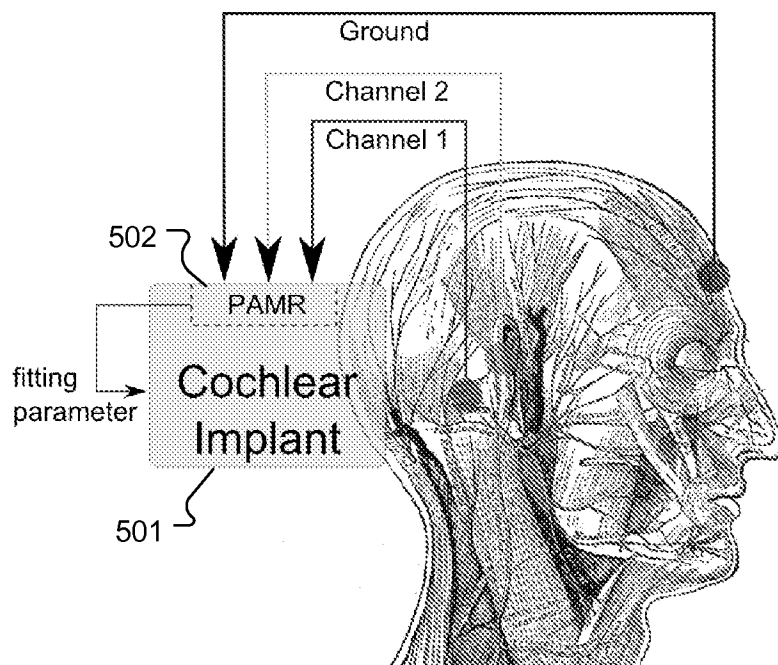
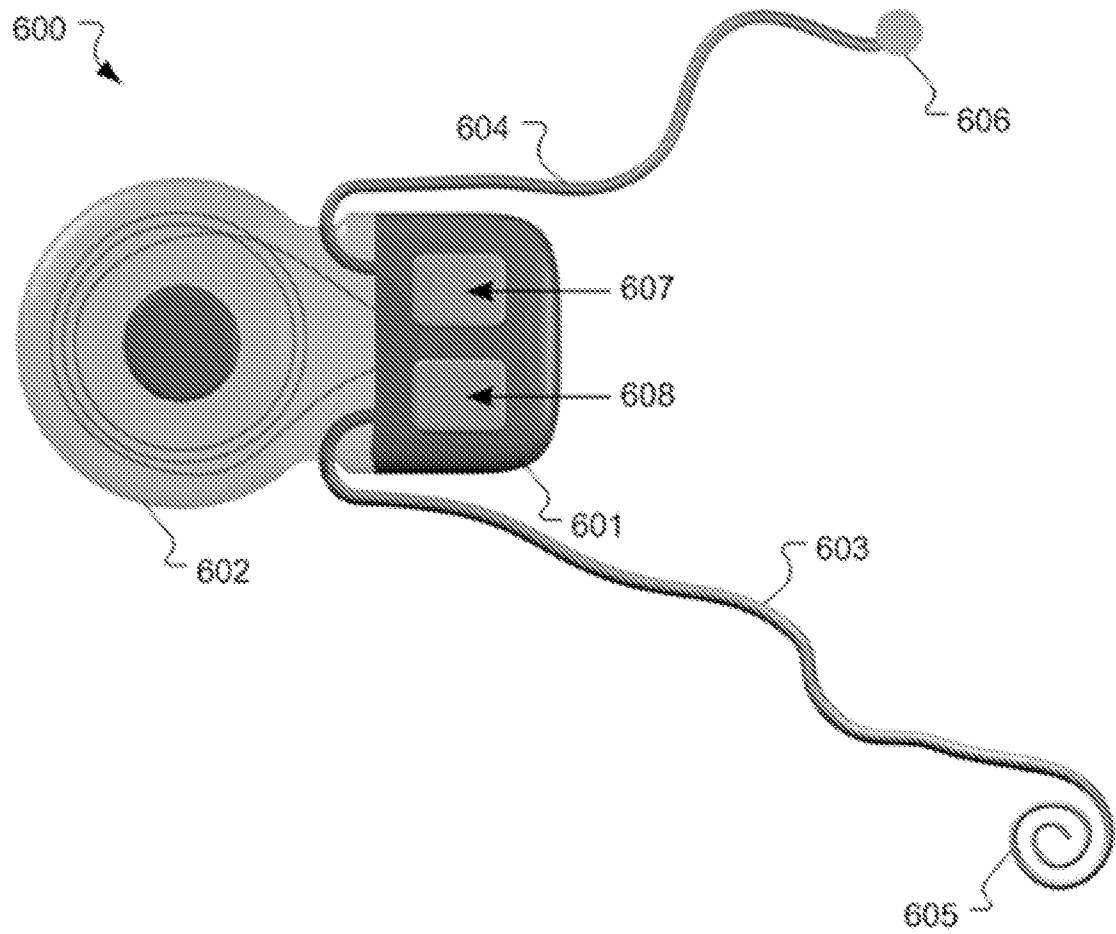


Fig. 5

5/10

**Fig. 6**

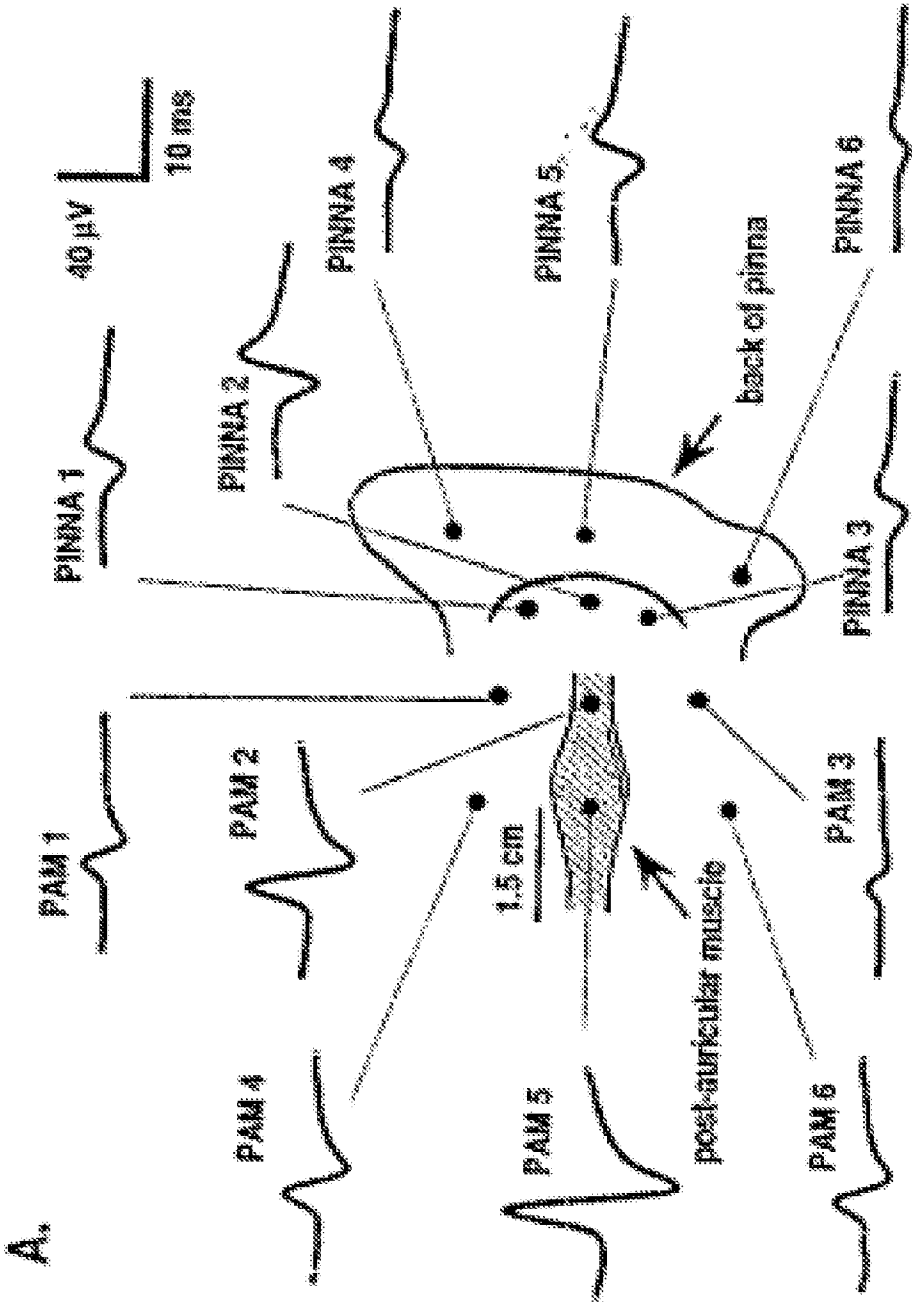


Fig. 7

7/10

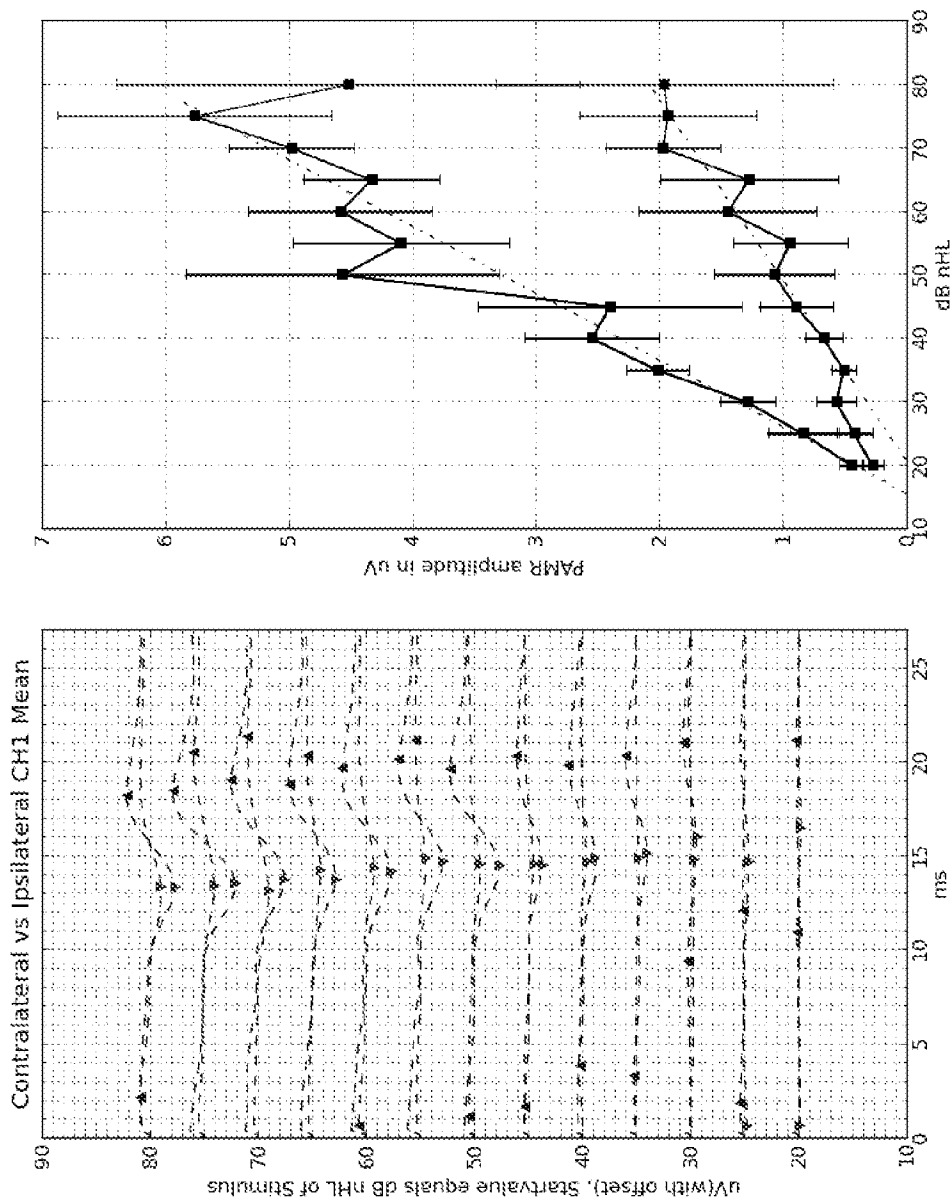


Fig. 8

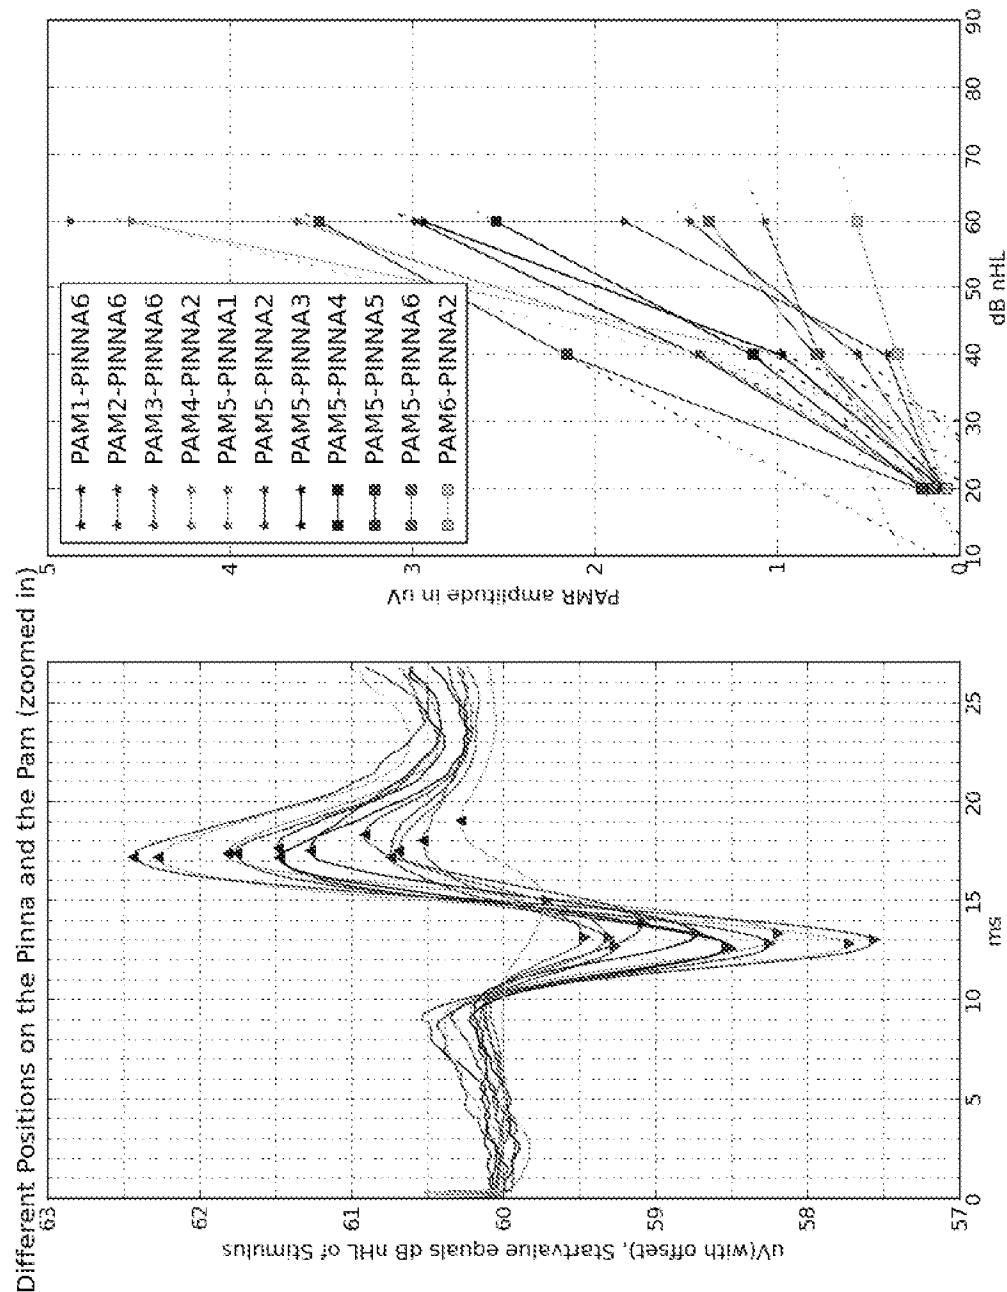


Fig. 9

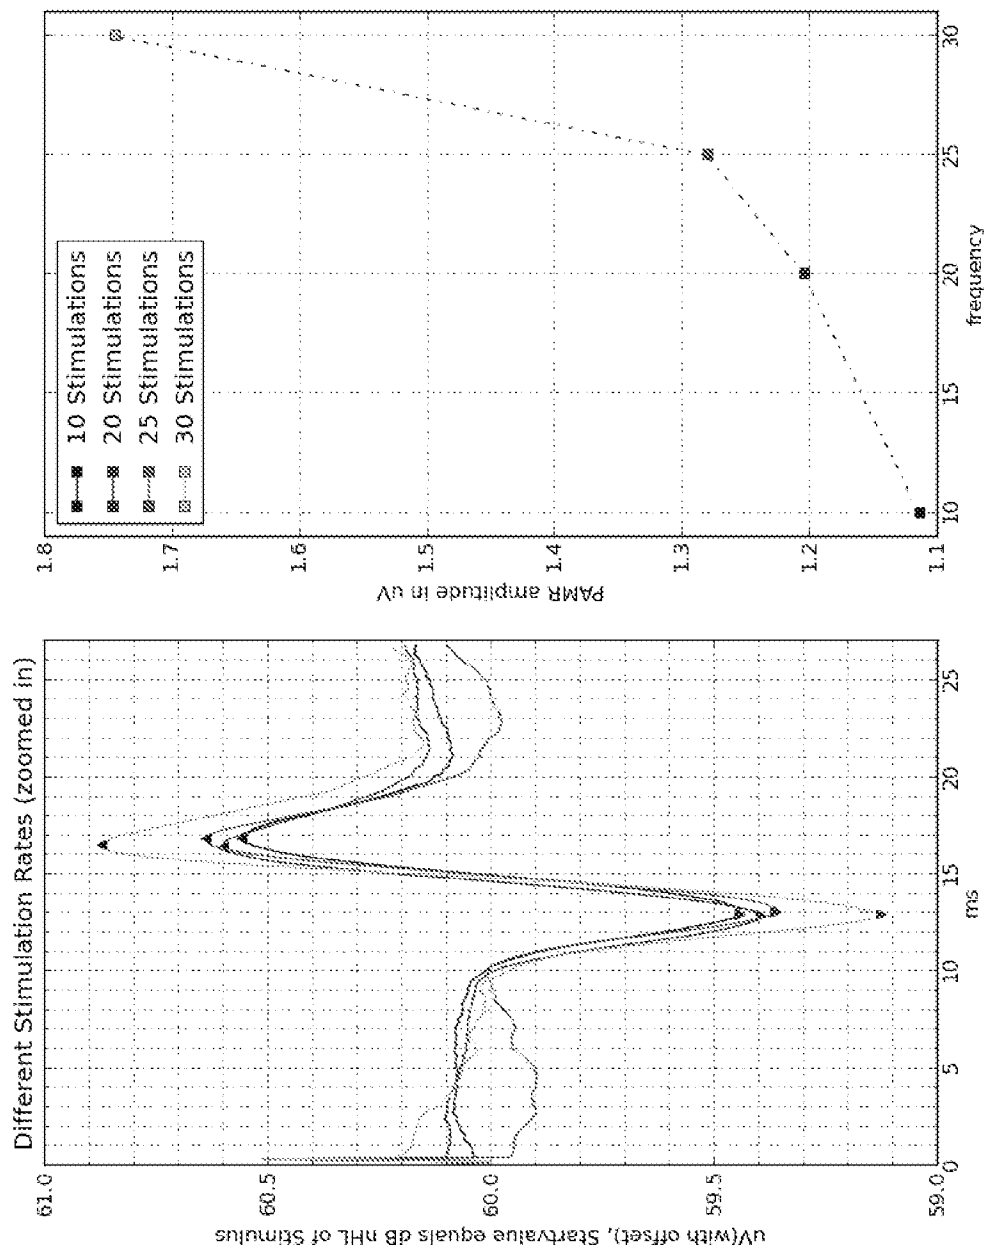


Fig. 10

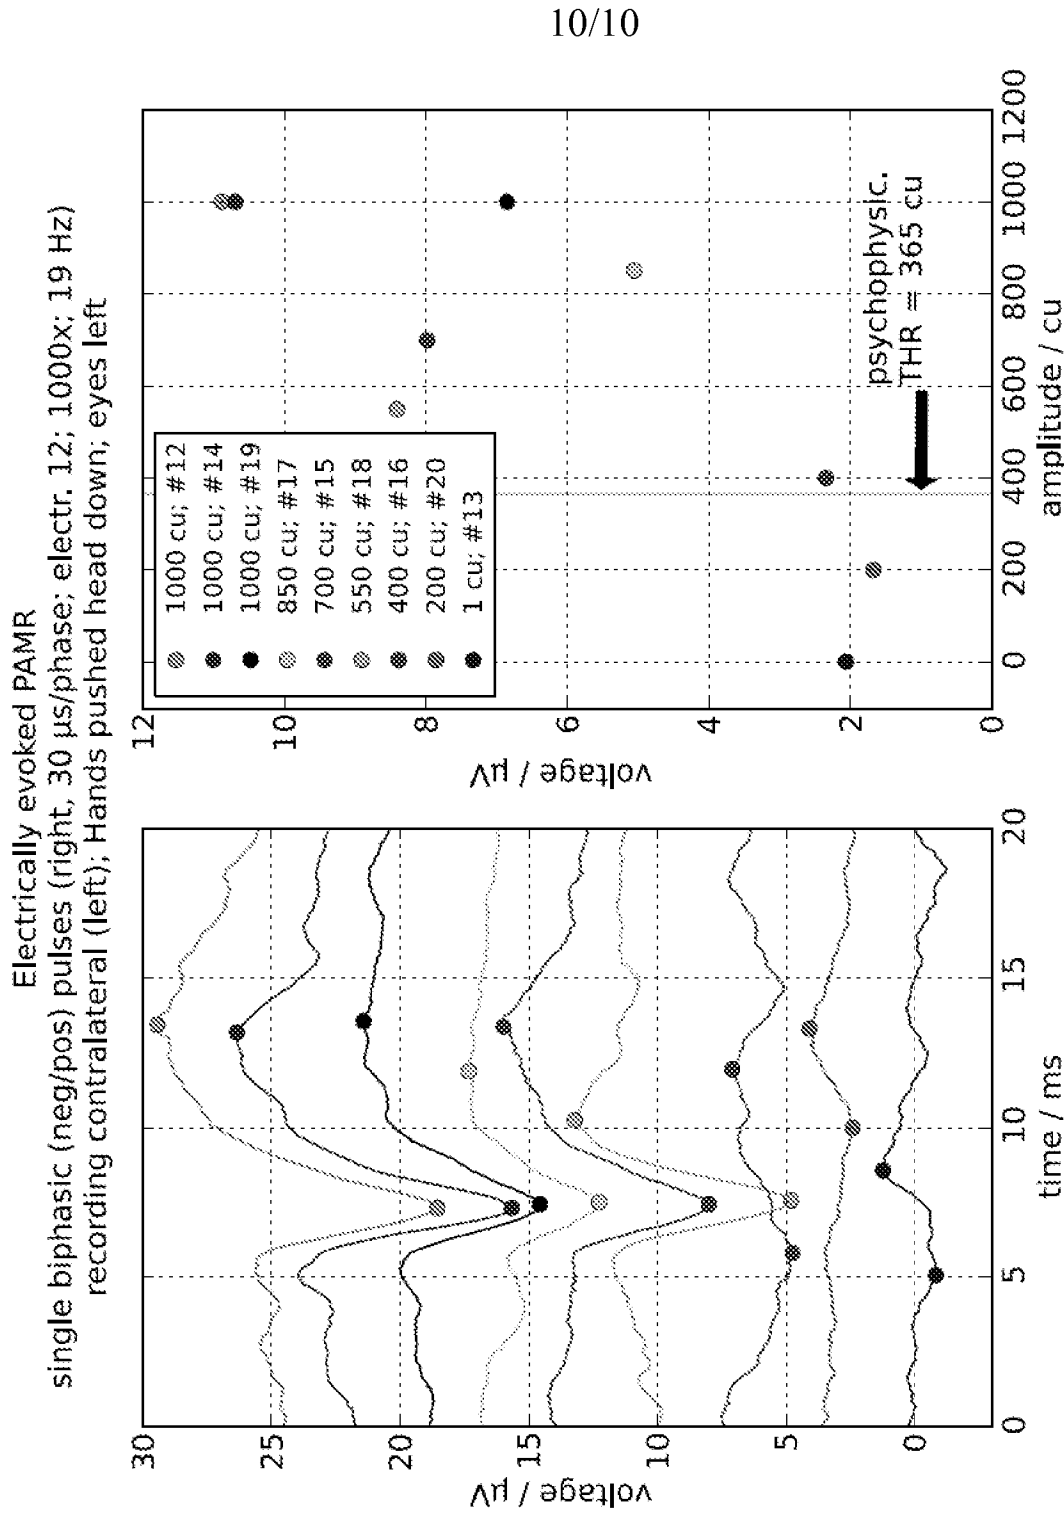


Fig. 11

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2012/030246

A. CLASSIFICATION OF SUBJECT MATTER INV. A61N1/36 ADD. A61B5/12		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) A61N A61B		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal, WPI Data		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 157 861 A (FALTYS MICHAEL A [US] ET AL) 5 December 2000 (2000-12-05)	1-8,11, 13-16, 18,19
Y	abstract; figure 2 column 4, lines 40-58; figures 1,2 column 4, lines 22-30; figures 3A,5 column 7, lines 1-47 column 12, lines 43-16 column 3, lines 38-45 ----- -/--	9,10,12, 17
☒ Further documents are listed in the continuation of Box C. ☒ See patent family annex.		
* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search	Date of mailing of the international search report	
19 July 2012	03/08/2012	
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Monogyiou, Efstratia	

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2012/030246

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	MATAS CARLA GENTILE ET AL: "Post-auricular muscle reflex in the Middle Latency Evoked Auditory Response.", BRAZILIAN JOURNAL OF OTORHINOLARYNGOLOGY 2009 JUL-AUG LNKD- PUBMED:19784429, vol. 75, no. 4, July 2009 (2009-07), pages 579-585, XP002680366, ISSN: 1808-8686 page 579 - page 580 -----	9,10,12
Y	O'BEIRNE G A ET AL: "Basic properties of the sound-evoked post-auricular muscle response (PAMR).", HEARING RESEARCH DEC 1999 LNKD- PUBMED:10575120, vol. 138, no. 1-2, December 1999 (1999-12) , pages 115-132, XP002680367, ISSN: 0378-5955 figure 2 -----	9,10
Y	US 6 415 185 B1 (MALTAN ALBERT A [US]) 2 July 2002 (2002-07-02) cited in the application column 6, lines 9-15 -----	17
A	US 6 496 734 B1 (MONEY DAVID K [AU]) 17 December 2002 (2002-12-17) the whole document -----	1-19
A	US 2009/018616 A1 (QUICK ANDREW P [US] ET AL) 15 January 2009 (2009-01-15) the whole document -----	1-19

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2012/030246

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6157861	A	05-12-2000	CA 2258008 A1 24-12-1997
			DE 69728173 D1 22-04-2004
			DE 69728173 T2 03-02-2005
			EP 0959943 A1 01-12-1999
			ES 2214627 T3 16-09-2004
			US 6157861 A 05-12-2000
			WO 9748447 A1 24-12-1997

US 6415185	B1	02-07-2002	NONE

US 6496734	B1	17-12-2002	NONE

US 2009018616	A1	15-01-2009	NONE
