

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
23 December 2004 (23.12.2004)

PCT

(10) International Publication Number
WO 2004/111142 A1

(51) International Patent Classification⁷: **C09D 167/00**

(74) Agent: **M.M.H.J. SCHMEETZ**; DSM Intellectual Property, P.O. Box 9, NL-6160 MA Geleen (NL).

(21) International Application Number:

PCT/NL2004/000411

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 10 June 2004 (10.06.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

03076908.7

18 June 2003 (18.06.2003) EP

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): **DSM IP ASSETS, B.V.** [NL/NL]; Het Overloon 1, NL-6411 TE Heerlen (NL).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **BELDER, Eimbert, Gerrit** [NL/NL]; Ankerweg 20, NL-8042 EX Zwolle (NL). **URMANOVA, Antonia** [BG/NL]; Tichelmeesterlaan 22, NL-8014 LB Zwolle (NL). **BOLKS, Jurjen** [NL/NL]; Philidorstraat 14, NL-8031 VW Zwolle (NL). **GEHRELS, Coenraad, Maarten** [NL/NL]; Alm 14, NL-8032 BL Zwolle (NL).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A POWDER PAINT COMPOSITION

(57) Abstract: The present invention relates to a powder paint composition comprising at least (a) a thermosetting polymer having functional groups capable of reacting with β -hydroxyalkylamide units (b) a compound comprising β -hydroxyalkylamide units and (c) a deceleration agent, capable of reversibly blocking the functional groups of polymer (a). The deceleration agent is present in an amount sufficient to block at least 9 % of the total amount of functional groups of polymer (a). The present invention relates also to the use of a specific amine compound as a deceleration agent in a powder paint composition.



WO 2004/111142 A1

A POWDER PAINT COMPOSITION

5 The present invention relates to a powder paint composition comprising a polymer comprising functional groups capable of reacting with β -hydroxyalkylamide units and a β -hydroxyalkylamide compound.

 A powder paint composition comprising a β -hydroxyalkylamide compound and a polymer comprising functional groups capable of reacting with β -hydroxyalkylamide units is disclosed in US 4,801,680. A powder paint composition
10 comprising a β -hydroxyalkylamide compound results in a high reactivity of the powder paint composition causing for example a low blister limit, especially when relatively thick coating layers are applied. The blister limit or degassing limit is the coat thickness at which gas bubbles remain in the coating after curing.

15 It is another disadvantage of this powder paint composition that the flow of the composition once applied to the substrate and heated to spread over the surface is not sufficient for some specific powder coating applications because of the formation of the "orange peel" effect.

 WO 01/02505A discloses a method to overcome these disadvantages
20 by adapting the polymers used in the powder paint composition. However, although a higher blister limit may be reached, the modification of the polymer also results in the modification of the chemical and mechanical properties of the resulting coating, such as for example an undesired decrease in flexibility and an undesired decrease of solvent resistance.

25 Another undesirable effect is due to a decrease of the glass transition temperature (T_g) of the polymer, which may result in a decreased powder stability upon further processing the composition in an extruder or upon storage of the powder paint composition.

 It is the object of the present invention to provide a powder paint
30 composition comprising

 (a) a polymer comprising functional groups capable of reacting with β -hydroxyalkylamide units and

 (b) a β -hydroxyalkylamide compound

 resulting in a coating with a high blister limit and having also the desired mechanical
35 properties.

The powder paint composition according to the present invention comprises at least:

- (a) a thermosetting polymer comprising functional groups capable of reacting with β -hydroxyalkylamide units,
- 5 (b) a compound comprising β -hydroxyalkylamide units and
- (c) a deceleration agent, capable of reversibly blocking the functional groups of polymer (a)

wherein the deceleration agent is present in an amount sufficient to block at least 9% of the total amount of functional groups of the polymer (a).

- 10 The deceleration agent (c) is a compound that is capable of slowing down the curing reaction. In the composition according to the invention it is essential that the deceleration agent is capable of reversibly blocking the functional groups of polymer (a).

- 15 The deceleration agent reversibly blocks the functional groups of polymer (a) and consequently the powder paint composition according to the present invention results in a coating having an improved blister limit and in a coating showing desired mechanical properties.

- 20 Further advantages are for example a longer gel time, an improved flow, an improved boiling water/humidity resistance, an improved pigment dispersion and good mechanical properties, for example flexibility. The resulting coating also has antibacterial and/or antifouling properties.

- Preferably, the thermosetting polymer (a) comprising functional groups capable of reacting with β -hydroxyalkylamide units is a polymer containing functional carboxylic acid groups or a polymer containing functional anhydride groups.

- 25 Suitable polymers include for example a polyester, a polyacrylate, a polyether (for example a polyether based on bisphenol or a phenol-aldehyde novolak), a polyurethane, a polycarbonate, a trifluoroethylene copolymer or a pentafluoropropylene copolymer, a polybutadiene, a polystyrene and/or a styrene maleic anhydride copolymer.

- 30 Preferably the polymer (a) is a polyester.

More preferably the polyester is a carboxylic acid group-containing polyester.

- 35 Suitable polyesters may be based for example on a condensation reaction between a linear aliphatic, branched aliphatic and/or cyclo-aliphatic polyol and an aliphatic, cyclo-aliphatic and/or aromatic poly carboxylic acid or its anhydride. The ratio of polyol and acids or anhydrides is selected such that there is an excess of acid or anhydride over alcohol (so as) to form a polyester which has free carboxylic groups

or anhydride groups.

The polyester may comprise units of for example isophthalic acid, terephthalic acid, 2,6-naphthalene dicarboxylic acid, 4,4'-oxybisbenzoic acid, 3,6-dichloro phthalic acid, tetrachloro phthalic acid, tetrahydro phthalic acid, trimellitic acid, pyromellitic acid, hexahydro terephthalic acid (cyclohexane dicarboxylic acid), hexachloro endomethylene tetrahydro phthalic acid, phthalic acid, azelaic acid, sebacic acid, decane dicarboxylic acid, adipic acid, succinic acid, maleic acid and/or fumaric acid. These acids may be used as such, or, in so far as available as their anhydrides, acid chlorides or lower alkyl esters.

10 Preferably, the polyester comprises at least isophthalic acid units and/or terephthalic acid units.

The polyester may also comprise other carboxylic acid units in amounts of up to for example 25 mol % of the total amount of carboxylic acids. Also trifunctional or higher functional acid units may be present, such as for example trimellitic acid or pyromellitic acid. These tri or higher functional acids may be used to obtain branched polyesters or used as end groups of the polyester.

Hydroxy carboxylic acids and/or optionally lactones may also be used, for example, 12-hydroxy stearic acid, hydroxy pivalic acid and/or ϵ -caprolactone.

Also monocarboxylic acids such as for example benzoic acid, tert.-butyl benzoic acid, hexahydro benzoic acid and/or saturated aliphatic monocarboxylic acids may be applied.

Useful polyalcohols, in particular diols, reactable with the carboxylic acids to obtain the polyester include aliphatic diols. Suitable examples include ethylene glycol, propane-1,2-diol, propane-1,3-diol, butane-1,2-diol, butane-1,4-diol, butane-1,3-diol, 2,2-dimethylpropanediol-1,3 (= neopentyl glycol), hexane-2,5-diol, hexane-1,6-diol, 2,2-bis-(4hydroxy-cyclohexyl)-propane (hydrogenated bisphenol-A), 1,4-dimethylolcyclohexane, diethylene glycol, dipropylene glycol, 2,2-bis[4-(2-hydroxy ethoxy)-phenyl] propane, the hydroxy pivalic ester of neopentyl glycol, 2-ethyl, 2-butyl propanediol-1,3 (=butylethylpropane diol) , 2-ethyl, 2-methyl propanediol-1,3 (= ethylmethylpropane diol) and/or 2-methylpropanediol-1,3 (MP-Diol).

Tri- or higher functional alcohols may be used in small amounts in order to obtain branched polyesters. Examples of suitable polyols include glycerol, hexanetriol, trimethylol ethane, trimethylol propane tris-(2-hydroxyethyl)- isocyanurate, pentaerythritol and/or sorbitol.

35 The polyester may be prepared according to conventional procedures by esterification or transesterification, optionally in the presence of customary esterification catalysts for example dibutyltin oxide or tetrabutyl titanate.

The preparation conditions and the COOH/OH ratio may be selected so as to obtain end products that have an acid number and/or a hydroxyl number within the targeted range of values.

Generally, the polymer (a) has an acid value between 15 and 120 mg
5 KOH/gram resin and more preferably the polymer (a) has an acid value between 15 and 80 mg KOH/gram resin.

The number average molecular weight (M_n) of the polymer (a) may be for example between about 1,000 and about 8,000. Preferably the number average molecular weight (M_n) of the polymer (a) ranges between about 1,400 and 7,500.

10 The polymer (a) may be a crystalline, semi-crystalline or amorphous solid at room temperature. In case the polymer is crystalline, it has a melting temperature T_m , in case it is semi-crystalline it has a melting temperature T_m and a glass transition temperature T_g , in case it is amorphous, it has a glass transition temperature T_g . These temperatures are determined by use of a differential scanning
15 calorimeter (DSC) using standard DSC-techniques, for example a DSC 821-E from Mettler Toledo. The DSC-measurement is performed with a heating and cooling rate of 5°C/min.

Preferably, the polymer (a) is an amorphous solid at room temperature. The glass transition temperature of the polymer may range between 20°C
20 and 100 °C, preferably between 35 °C and 85 °C and more preferably between 40 °C and 75 °C.

The polymer (a) may have a viscosity lower than 200 Pa.s (measured at 160°C, Rheometrics CP 5) and preferably the polymer (a) has a viscosity lower than 150 Pa.s.

25 The compound comprising β -hydroxyalkylamide units (b) may be a curing agent for polymer (a).

Generally, the hydroxyl functionality of the β -hydroxyalkylamide compound is on an average basis at least 2 and preferably greater than 2.


Preferably, the hydroxyl functionality of the β -hydroxyalkylamide is
30 lower than 10. More preferably the hydroxyl functionality of the β -hydroxyalkylamide compound is lower than 6 and most preferably the hydroxyl functionality of the β -hydroxyalkylamide compound is equal to or lower than 4.

According to a preferred embodiment of the invention the hydroxyl functionality of the β -hydroxyalkylamide ranges from greater than 2 up to and
35 including 4.

Examples of suitable β -hydroxyalkylamide compounds (b) are

disclosed in US 4,801,680, which content is hereby incorporated by reference.

Preferably the β -hydroxyalkylamide compound is a compound according to formula (I):

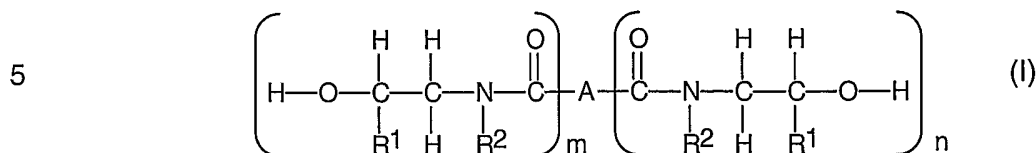


wherein

R_1 is H or C_1 - C_5 alkyl;

R_2 is H, C_1 - C_5 alkyl or

10



wherein R_1 is as described above;

A is a bond, monovalent or polyvalent organic radical derived from a saturated, unsaturated or aromatic hydrocarbon including substituted hydrocarbon radicals

15 containing from 2 to 20 carbon atoms;

m is equal to 1 to 2;

n is equal to 0 or 2;

and $m+n$ is at least 2.

Preferably, A is an alkylene radical $-(\text{CH}_2)_x-$ where x ranges from 2 to

20 12. Preferably, x ranges from 4 to 10.

Preferably $m+n$ is greater than 2, more preferably within the range of from 2 up to and including 4.

The β -hydroxyalkylamide compound can be prepared by reacting a lower alkyl ester or a mixture of esters of carboxylic acids with a β -hydroxyalkylamine at a temperature ranging from ambient temperature up to about 200°C , depending on the choice of reactants and on the presence or absence of a catalyst. Suitable catalysts, include base catalysts such as sodium methoxide, potassium methoxide, sodium butoxide, potassium butoxide, sodium hydroxide, potassium hydroxide and the like, present in amounts of about 0.1 to about 1 percent by weight based on the weight of the alkyl ester.

30 Suitable examples of β -hydroxylamides are described in for example US-A-4727111, US-A-4788255, US-A-4076917, EP-A-322834 and EP-A-473380.


Suitable examples of commercially available β -hydroxyalkylamide compounds are for example N,N,N',N'-tetrakis-(2-hydroxyethyl)-adipamide (Primid XL-552) and N,N,N',N'-tetrakis-(2-hydroxypropyl)-adipamide (Primid QM 1260).

Also larger β -hydroxyalkylamide compounds are suitable to be


applied in the composition according to the present invention. Examples of such β -hydroxyalkylamide compounds are the polyesteramides as described in WO99/16810, which content is incorporated herein by reference.

WO99/16810 describes linear or branched condensation polymers containing ester groups and at least one amide group in the backbone, having at least one hydroxyalkylamide end group and having a weight average molecular mass of > 800 g/mol.

Another example of a suitable β -hydroxyalkylamide compound (b) is a branched polyesteramide comprising at least two groups according to formula (II):

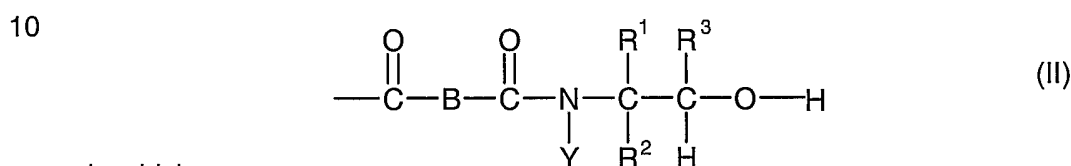

in which

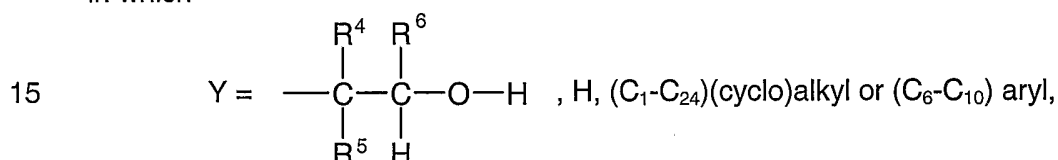

B = (C₂-C₂₄), optionally substituted, aryl or (cyclo)alkyl aliphatic diradical, and R¹, R², R³, R⁴, R⁵ and R⁶ may, independently of one another, be the same or different, H, (C₆-C₁₀) aryl or (C₁-C₈)(cyclo)alkyl radical.

20 More preferably, the commercially available β -hydroxyalkylamides N,N,N',N'-tetrakis-(2-hydroxyethyl)-adipamide and N,N,N',N'-tetrakis-(2-hydroxypropyl)-adipamide are used.

Preferably, the equivalent ratio of β -hydroxyalkylamide (hydroxy equivalents) to carboxy-containing polyester (carboxylic acid equivalents) ranges preferably between about 0.6 : 1 and 1.6:1, more preferably between 0.8 : 1 and 1.3:1 and most preferably between 0.9 : 1 and 1.15:1. This ratio results in the desired effective cure of the powder paint composition. A ratio outside the range between 0.6: 1 and 1.6:1 will give a poor cure of the composition.

30 The present invention is characterised in that the powder paint composition comprises a deceleration agent (c) and the deceleration agent (c) should be present in an amount sufficient to block at least 9% of the total amount of functional groups of polymer (a) capable of reacting with β -hydroxyalkylamides. At most 100 % of the total amount of functional groups of polymer (a) capable of reacting with β -hydroxyalkylamides may be blocked.

35 Preferably the deceleration agent is present in an amount sufficient to block 10% - 50 % of the total amount of functional groups of the polymer (a) and more

preferably between 15 to 30 % of functional groups. The amount of deceleration agent (c) depends on the desired amount of reversibly blocked functional groups in polymer (a) and on the amount of functional groups in polymer (a).

The reversible blocking of a functional group may be established in many ways, for example by forming a bond that is only stable within a certain temperature range. The reversible block may be for example in form of a hydrogen bridge, an ionic bond or a salt complex.

Preferably a salt complex is formed


Preferably the blocking is reversed within the temperature range of the cure of the powder paint to obtain a coating having the desired properties.

The deceleration agent (c) may be an amine, such as for example an aliphatic amine. Preferred aliphatic amines are tertiary amines such as for example an aliphatic tertiary amine.

According to a preferred embodiment of the invention the deceleration agent (c) is a compound according to formula (III) and/or (IV):



or



wherein:

Y is N or P,

R^1 , R^2 , R^3 or R^4 are independently of each other, substituted or unsubstituted carbon chains with 1-50 carbon atoms in the main chain and

X^- is halide.

According to a preferred embodiment of the invention the deceleration agent (c) is a compound according to formula (III).

According to a further preferred embodiment of the invention Y is nitrogen.

According to another preferred embodiment of the invention R^1 , R^2 , R^3 and R^4 are unsubstituted carbon chains because substituted chains may cause sterical hindrance, resulting in the incapability of the compound to reversibly block the functional groups of polymer (a).

Preferably at least two of R^1 , R^2 , R^3 and R^4 have 1-8 carbon atoms.

More preferably at least two of R^1 , R^2 , R^3 and R^4 have 1-4 carbon atoms.

Examples of suitable compounds according to formula (III), with Y being nitrogen are octyldimethylamine, decyldimethylamine, dodecyldimethylamine, tetradecyldimethylamine, hexadecyldimethylamine, octadecyldimethylamine,

didodecylmonomethylamine, ditetradecylmonomethylamine, dihexadecylmonomethylamine, di-tallow alkylmonomethylamine, (hydrogenated tallow alkyl)-dimethylamine, trioctylamine, tridecylamine, and/or tridodecylamine.

Preferred compounds according formula (III) are octyldimethylamine, 5 decyldimethylamine, dodecyldimethylamine, tetradecyldimethylamine, hexadecyldimethylamine, octadecyldimethylamine, (hydrogenated tallow alkyl)-dimethylamine and/or hexadecyldimethylamine (palmityldimethylamine).

Suitable examples of formula (III) with Y being phosphorus are dodecyldiphenylphosphine, decyldiphenylphosphine , octyldiphenylphosphine and/or 10 trioctylphospine.

Suitable examples of compounds according to formula (IV) with Y being nitrogen are octyltrimethyl ammonium halides, decyltrimethyl ammonium halides, dodecyltrimethyl ammonium halides, tetradecyltrimethyl ammonium halides, hexadecyltrimethyl ammonium halides, octadecyltrimethyl ammonium halides, 15 didodecyltrimethyl ammonium halides, ditetradecylmonomethyl ammonium halides, dihexadecylmonomethyl ammonium halides, di tallow alkylmonomethyl ammonium halides, trioctyl ammonium halides, tridecyl ammonium halides and/or tridodecyl ammonium halides.

Suitable examples of compounds according to formula (IV) with Y 20 being phosphorus are octyltrimethyl phosphonium halides, decyltrimethyl phosphonium halides, dodecyltrimethyl phosphonium halides, tetradecyltrimethyl phosphonium halides, hexadecyltrimethyl phosphonium halides, octadecyltrimethyl phosphonium halides, didodecyltrimethyl phosphonium halides, ditetradecylmonomethyl phosphonium halides, dihexadecylmonomethyl phosphonium 25 halides, ditallowalkylmonomethyl phosphonium halides, trioctyl phosphonium halides, tridecyl phosphonium halides and/or tridodecyl phosphonium halides.

The present invention also relates to a novel use for the compounds according to formula (III) and/or formula (IV) in polyester powder paints because surprisingly it has been found that these compounds are suitable to be added as a 30 deceleration agent in a powder paint composition comprising a β -hydroxyalkylamide compound.

The amine compounds according to formula (III) and/or formula (IV) are known to be applied as a cure catalyst in an epoxy comprising powder paint system, such as for example disclosed in WO01/68781. It is quite surprising that these 35 compounds have a decelerating effect in the powder paint composition according to the invention resulting in for example a lower blister limit. Other advantages may for example be better pigment dispersion, improved processability of the powder paint

composition, better flow during heating of the powder paint composition after application of the powder on the substrate.

The powder paint composition according to the invention can optionally contain pigments, fillers and/or the usual additives, for example degassing
5 agents, flow agents and (light) stabilizers.

The pigments may be inorganic or organic. Suitable inorganic pigments are for example, titanium dioxide, zinc sulphide, iron oxide and /or chromium oxide. Suitable organic pigments are for example azo compounds.

Suitable fillers are for example metal oxides, silicates, carbonates and
10 sulphates.

Suitable stabilizers are for example primary and/or secondary antioxidants and UV stabilizers for example quinones, (sterically hindered) phenolic compounds, phosphonites, phosphites, thioethers and HALS (hindered amine light
stabilizers).

15 Examples of suitable degassing agents include cyclohexane dimethanol bisbenzoate, benzoin and benzoin derivatives such as for example described in WO02/50194.

Other suitable additives are for example additives for improving tribo-chargeability such as for example sterically hindered amines. These amines are not
20 suitable to be applied as a deceleration agent in the composition according to the present invention because due to the sterical hindrance they are not capable to reversibly block the functional groups of polymer (a) and they are not able to form a salt complex.

According to a preferred embodiment of the invention the powder
25 paint composition is prepared by a process comprising at least the steps of:

- a) producing a polymer (a) having functional groups capable of reacting with β -hydroxyalkylamide units at the processing temperature T_p ;
- b) adding a deceleration agent (c) to the polymer (a) at temperature T_a , wherein T_a is equal to or lower than T_p but higher than the T_g or T_m of the polymer, in an
30 amount sufficient to block at least 9 % of the functional groups of polymer (a) capable of reacting with β -hydroxyalkylamide units.

Preferably, the deceleration agent (c) is added before the polymer (a) is cooled down to below its T_g or T_m , for example at the end of production of the polymer.

35 It is also possible to add the deceleration agent (c) to the polymer (a) and optionally the compound comprising β -hydroxyalkylamide units (b) during production of the powder paint composition

The preparation of a powder paint composition in general is described by Misev in Powder paints, Chemistry and Technology (1991, John Wiley) on pp. 224-227. Generally, the components of the composition are premixed, for example by dry blending or drum mixed. The resulting premix is then homogenised at temperatures
5 between about 70 °C – 150 °C in an extruder. The extrudate is then cooled down and grinded to a powder with a 10 µm -150 µm particle size, resulting in a powder paint composition.

The powder paint composition can be deposited on the substrate by use of a powder gun such as an electrostatic corona gun or a tribo gun. Also well-
10 known methods of powder deposition such as for example the fluidised bed technique can be used.

The powder paint composition according to the invention can be cured to a powder coating by the generally known curing techniques, for example thermal curing or curing with infrared radiation. Thermal curing can for example take
15 place in a gas oven or in an electrical oven. The temperature during curing can be tailored to one's needs, depending on the coating composition to be cured and/ or on the substrate. A suitable temperature range may be between 140 °C and 200 °C. The time necessary to obtain a coating with acceptable coating properties can be chosen between wide ranges, for example between 4 minutes to 30 minutes and preferably
20 between 6 minutes and 10 minutes.

The invention also relates to an entirely or a partly coated substrate wherein the coating is obtained from curing the paint composition according to the invention.

The present invention is illustrated with reference to the following,
25 non-limiting examples.

Examples

Experiment I-III

30

Preparation of the polymer I-III.

For the preparation of the polymers I-III URALAC P 865 (a carboxylic functional polyester, available from DSM Coating Resins, with acid value range AV= 33-37 mgKOH/g and Tg= 56 °C) had been used as the base resin.

35 URALAC P865 was synthesised by direct esterification at a temperature range of between 220 °C and 270 °C.

After synthesis, the obtained polyester was split in three parts having the same characteristics which were processed further into polymers I, II and III respectively.

Experiment I

- 5 Polymer I was obtained by cooling down to 25 °C the first part of the lab batch.

Experiment II

- Polymer II was obtained by adding 2% by weight of hexadecyldimethylamine (HDMA) to the second part at 195 °C. The mixture was stirred for 30 min at 195°C. Then the
10 resin was cooled down to 20 °C.

Experiment III

- Polymer III was obtained by adding 3.25% by weight of hexadecyldimethylamine (HDMA) to the third part at 195 °C. The mix was stirred for 30 min at 195°C. Then the
15 resin was cooled down to 20 °C.

Examples I, II, III and Comparative Experiment A.

Preparation of the powder paint compositions

- Four powder paint compositions containing the ingredients as described in Table 1 (in
20 parts by weight) were prepared.

Table 1

	Powder Paint Composition A	Powder Paint Composition I	Powder Paint Composition II	Powder Paint Composition III
Polymer I	190	190	*	*
Polymer II	*	*	190	*
Polymer III	*	*	*	190
HDMA	*	3.87	*	*
Primid XL-552 ¹	10	10	10	10
Kronos 2160 ²	100	100	100	100
Benzoin	3	3	3	3
Resiflow PV 5 ³	8.333	8.333	8.333	8.333

- 25 1) Primid (EMS)
2) Kronos 2160 (Kronos Titan GmbH)
3) Resiflow PV5 (Worlée-Chemie GmbH)

The ingredients were mixed in a premixer, homogenised and extruded in a double screw extruder Prism. The extrudate was milled and sieved to a powder with particle size less than 90μ .

- The powders were sprayed electrostatically on an aluminium substrate (AL-46). The coated substrates were cured for 10 minutes at 180°C .
 5 Table 2 shows the properties of the resulting coated substrates

Table 2.

	Comparative Experiment A	Example I	Example II	Example III
Gel time at 180°C , sec ¹	220	248	259	308
Flow ²	6	6+	7	8
Degassing limit (μm) ³	120	129	140	154
Impact ⁴				
- 60ip/75 μ initial	Pass	Pass	Pass	Pass
- 60ip/75 μ after 1 day	Pass	Pass	Pass	Pass
Heat Stability (b*) ⁵				
b* initial	0.6	0.5	0.7	1.0
b* 60' 220°C	5.7	5.6	3.6	4.1
db* 60' 220°C	5.1	5.1	2.9	3.0
b* 10' 240°C	2.4	2.5	2.4	2.6
db* 10' 240°C	1.7	2.0	1.7	1.6
QUV-B resistance ⁶ , hrs	450	462	504	509

- 10 ¹ DIN 55990

² Flow is determined visually on is 1-10 with 10= best according to the internal DSM method PCAII-002

³ The blister limit is determined according to the internal DSM method PCAII-018

⁴ ASTM D2794

- 15 ⁵ The colour properties of the powder paint are expressed in a b*-value, measured with a Dr Lange Micro Colour Meter measured at a layer thickness of $60\mu\text{m}$ according to ISO 7724.

⁶ 4 hrs UV-B 50°C / 4 hrs cond. 40°C is determined according to the internal DSM method PCAII-004

- 20 The presence of the deceleration agent leads to an improvement of the degassing properties, the heat stability and the QUV resistance.

CLAIMS

1. A powder paint composition comprising at least
 - (a) a thermosetting polymer having functional groups capable of reacting with

5 β -hydroxyalkylamide units
 - (b) a compound comprising β -hydroxyalkylamide units and
 - (c) a deceleration agent, capable of reversibly blocking the functional groups of polymer (a),

wherein the deceleration agent is present in an amount sufficient to block at

10 least 9 % of the total amount of functional groups of polymer (a).
2. A powder paint composition according to Claim 1 characterised in that the polymer (a) is a carboxylic acid functional polymer or an anhydride functional polymer.
3. A powder paint composition according to any one of Claims 1-2, characterised

15 in that the deceleration agent (c) is a compound according to formula (III) and/or (IV):

$$\text{YR}^1\text{R}^2\text{R}^3 \quad ((\text{III}))$$

or

$$(\text{YR}^1\text{R}^2\text{R}^3\text{R}^4)^+\text{X}^- \quad (\text{IV})$$

20 wherein:

Y is N or P,

R^1 , R^2 , R^3 or R^4 are independently of each other, substituted or unsubstituted carbon chains with 1-50 carbon atoms in the main chain and

X^- is halide.
- 25 4. A powder paint composition according to Claim 3 characterised in that the deceleration agent (c) is a compound according to formula (III).
5. A powder paint composition according to any one of Claims 3-4 characterised in that Y is N.
6. A powder paint composition according to any one of Claims 3-5 characterised

30 in that R^1 , R^2 , R^3 and R^4 are unsubstituted carbon chains.
7. A powder paint composition according to any one of Claims 1-6 characterised in that the deceleration agent is octyldimethylamine, decyldimethylamine, dodecyldimethylamine, tetradecyldimethylamine, hexadecyldimethylamine, octadecyldimethylamine, hydrogenated tallow alkyl)-dimethylamine and/or

35 hexadecyldimethylamine.
8. A process for the preparation of a powder paint composition according to any one of Claims 1-7 comprising at least the steps of:

- a) producing a polymer (a) having functional groups capable of reacting with β -hydroxyalkylamide units at the processing temperature T_p ;
- b) adding a deceleration agent (c) to the polymer at temperature T_a , wherein T_a is equal to or lower than T_p but higher than the T_g or T_m of the polymer, in an amount sufficient to block at least 9% of the functional groups of the polymer (a) capable of reacting with β -hydroxyalkylamide units.
9. A process according to Claim 8, wherein the deceleration agent is added before the polymer is cooled down to below its T_g or T_m .
10. The use of a tertiary compound according to formula (III) and/or (IV):
- $$YR^1R^2R^3 \quad ((III))$$
- or
- $$(YR^1R^2R^3R^4)^+X^- \quad (IV)$$
- wherein:
- Y is N or P
- R^1 , R^2 , R^3 or R^4 are independently of each other, substituted or unsubstituted carbon chains with 1-50 carbon atoms in the main chain and
- X^- is halide
- as a deceleration agent in a powder paint composition comprising a β -hydroxyalkylamide compound.
11. A process for curing a powder paint composition according to any one of Claims 1-7 or a powder paint composition obtained by the process according to any one of Claims 8-9 whereby the powder paint composition is first applied to a substrate and then cured.

INTERNATIONAL SEARCH REPORT

International Application No
PCT/NL2004/000411

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 C09D167/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C09D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EP0-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 081 176 A (DSM NV) 7 March 2001 (2001-03-07) page 2, line 11 - page 3, line 47 abstract; claims 1-11; examples 1,2 -----	1-11
X	EP 0 582 363 A (ROHM & HAAS) 9 February 1994 (1994-02-09) page 2, line 28 - page 6, line 16 abstract; claims 1-5; examples 1-5 -----	1-11
X	EP 0 419 003 A (PPG INDUSTRIES INC) 27 March 1991 (1991-03-27) page 2, line 24 - page 3, line 41 abstract; claims 1-21; examples 1-6 ----- -/-	1-11



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

° Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- * & * document member of the same patent family

Date of the actual completion of the international search

17 August 2004

Date of mailing of the international search report

25/08/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Glomm, B

INTERNATIONAL SEARCH REPORT

International Application No
PCT/NL2004/000411

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 322 827 A (PPG INDUSTRIES INC) 5 July 1989 (1989-07-05) page 2, line 26 - page 3, line 56 abstract; claims 1-15; examples 1-9 -----	1-11
X	EP 0 322 807 A (PPG INDUSTRIES INC) 5 July 1989 (1989-07-05) page 2, line 26 - page 3, line 40 abstract; claims 1-12; examples 1,2 -----	1-11
X	US 2002/091203 A1 (LOONTJENS JACOBUS A ET AL) 11 July 2002 (2002-07-11) paragraph '0006! - paragraph '0055! abstract; claims 1-14; examples 1,2 -----	1-11

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/NL2004/000411

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1081176	A	07-03-2001	EP 1081176 A1	07-03-2001
			AU 6599600 A	26-03-2001
			EP 1208134 A1	29-05-2002
			WO 0116213 A1	08-03-2001
EP 0582363	A	09-02-1994	US 5216090 A	01-06-1993
			AT 154065 T	15-06-1997
			AU 3309693 A	03-02-1994
			BR 9300648 A	01-02-1994
			CA 2089126 A1	28-01-1994
			CN 1081699 A ,B	09-02-1994
			CZ 9300211 A3	16-02-1994
			DE 69311222 D1	10-07-1997
			DE 69311222 T2	11-12-1997
			DK 582363 T3	22-12-1997
			EP 0582363 A1	09-02-1994
			ES 2105100 T3	16-10-1997
			FI 930754 A	28-01-1994
			HR 930203 A1	30-06-1996
			HU 66442 A2	28-11-1994
			IL 104776 A	30-09-1997
			JP 3140598 B2	05-03-2001
			JP 6107969 A	19-04-1994
			KR 225267 B1	15-10-1999
			LV 10467 A ,B	20-02-1995
			MX 9300866 A1	31-01-1994
			NO 930536 A	28-01-1994
			NZ 245913 A	26-07-1995
			PH 30216 A	05-02-1997
			PL 297824 A1	07-02-1994
			PL 173104 B1	30-01-1998
			RO 112289 B1	30-07-1997
			RU 2131900 C1	20-06-1999
			SI 9300088 A ,B	31-03-1994
			SK 12893 A3	02-02-1994
			TR 26491 A	15-03-1995
			US 5346960 A	13-09-1994
			ZA 9301179 A	27-01-1994
EP 0419003	A	27-03-1991	US 4988767 A	29-01-1991
			AT 129274 T	15-11-1995
			CA 2018423 A1	18-03-1991
			CA 2154372 A1	19-03-1991
			DE 69023088 D1	23-11-1995
			DE 69023088 T2	30-05-1996
			DK 419003 T3	26-02-1996
			EP 0419003 A2	27-03-1991
			ES 2080801 T3	16-02-1996
			JP 1987659 C	08-11-1995
			JP 3111456 A	13-05-1991
			JP 7017865 B	01-03-1995
			US 5098955 A	24-03-1992
			US 5202382 A	13-04-1993
EP 0322827	A	05-07-1989	CA 1336112 C	27-06-1995
			DE 3871754 D1	09-07-1992
			DE 3871754 T2	21-01-1993
			EP 0322827 A1	05-07-1989

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/NL2004/000411

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0322827 A		ES 2032526 T3 JP 2003456 A JP 2115115 C JP 8030155 B KR 9306083 B1 MX 166276 B US 4937288 A US 5182337 A US 5214101 A	16-02-1993 09-01-1990 06-12-1996 27-03-1996 07-07-1993 28-12-1992 26-06-1990 26-01-1993 25-05-1993
EP 0322807 A	05-07-1989	US 4889890 A CA 1334699 C DE 3876965 D1 DE 3876965 T2 EP 0322807 A2 ES 2042705 T3 JP 2003457 A JP 2594345 B2 KR 9306084 B1 MX 164870 B US 5013791 A	26-12-1989 07-03-1995 04-02-1993 17-06-1993 05-07-1989 16-12-1993 09-01-1990 26-03-1997 07-07-1993 29-09-1992 07-05-1991
US 2002091203 A1	11-07-2002	NL 1012572 C2 AU 5855700 A BR 0012388 A CA 2379042 A1 CN 1360584 T EP 1194420 A1 JP 2003504361 T WO 0104104 A1 TR 200200029 T2 US 2003232997 A1	15-01-2001 30-01-2001 19-03-2002 18-01-2001 24-07-2002 10-04-2002 04-02-2003 18-01-2001 22-07-2002 18-12-2003