



(51) International Patent Classification:
H04N 19/82 (2014.01)

(21) International Application Number:
PCT/CN2023/129103

(22) International Filing Date:
01 November 2023 (01.11.2023)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PCT/CN2022/128884
01 November 2022 (01.11.2022) CN

(71) Applicants: **DOUYIN VISION CO., LTD.** [CN/CN]; Room B-0035, 2/F, No. 3 Building, No. 30, Shixing Road, Shijingshan District, Beijing 100041 (CN). **BYTEDANCE INC.** [US/US]; 12655 West Jefferson Boulevard, Sixth Floor, Suite No. 137, Los Angeles, California 90066 (US).

(72) Inventors: **YIN, Wenbin**; Jinritoutiao Post Office, China Satellite Communications Tower, No. 63, Zhichun Road, Haidian District, Beijing 100080 (CN). **ZHANG, Kai**; 12655 West Jefferson Boulevard, Sixth Floor, Suite No. 137, Los Angeles, California 90066 (US). **LI, Yue**; 12655 West Jefferson Boulevard, Sixth Floor, Suite No. 137, Los Angeles, California 90066 (US). **ZHANG, Li**; 12655 West Jefferson Boulevard, Sixth Floor, Suite No. 137, Los Angeles, California 90066 (US).

(74) Agent: **LIU, SHEN & ASSOCIATES**; 10th Floor, Building 1, 10 Caihefang Road, Haidian District, Beijing 100080 (CN).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, CV, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report (Art. 21(3))*

(54) Title: USING SIDE INFORMATION FOR ADAPTIVE LOOP FILTER IN VIDEO CODING

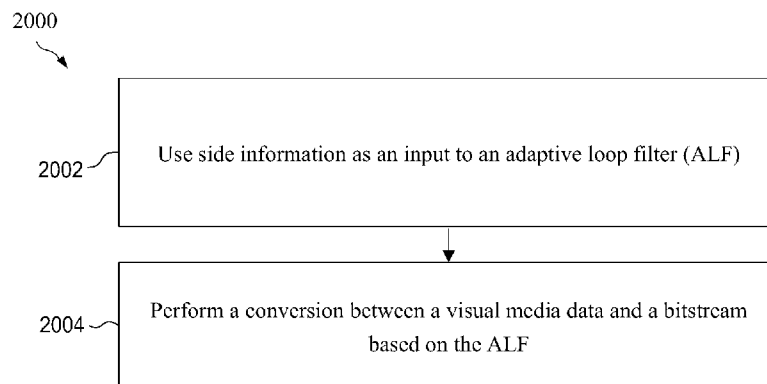


FIG. 20

(57) Abstract: A mechanism for processing video data is disclosed. The mechanism includes determining to employ side information as input to an adaptive loop filter (ALF). A conversion is performed between a visual media data and a bitstream based on the ALF.



Using Side Information For Adaptive Loop Filter in Video Coding

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the priority to and benefits of International Patent Application No. PCT/CN2022/128884, filed on November 1, 2022, which is hereby incorporated by reference in its entirety.

TECHNICAL FIELD

[0002] The present disclosure relates to generation, storage, and consumption of digital audio video media information in a file format.

BACKGROUND

[0003] Digital video accounts for the largest bandwidth used on the Internet and other digital communication networks. As the number of connected user devices capable of receiving and displaying video increases, the bandwidth demand for digital video usage is likely to continue to grow.

SUMMARY

[0004] A first aspect relates to a method for processing video data comprising using side information as an input to an adaptive loop filter (ALF); and performing a conversion between a visual media data and a bitstream based on the ALF.

[0005] Optionally, in any of the preceding aspects, another implementation of the aspect provides the side information comprises a reconstruction sample obtained before a deblocking filter (DBF), a sample adaptive offset (SAO) filter, or a bilateral filter (BF).

[0006] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the reconstruction sample comprises a luma reconstruction sample used as an input source for at least one extended tap of luma and chroma online-trained filters.

[0007] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the reconstruction sample comprises a luma reconstruction sample used as an input source for at least one spatial tap of luma and chroma online-trained filters.

[0008] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the reconstruction sample comprises a luma reconstruction sample used as an input source for luma offline-trained filters.

[0009] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the reconstruction sample comprises a luma reconstruction sample used as an input source for classification.

[0010] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the classification comprises classification of luma online-trained filters.

[0011] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the classification comprises classification of luma offline-trained filters.

[0012] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the reconstruction sample comprises a chroma reconstruction sample used as an input source for at least one extended tap of luma and chroma online-trained filters.

[0013] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the reconstruction sample comprises a chroma reconstruction sample used as an input source for at least one spatial tap of luma and chroma online-trained filters.

[0014] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the reconstruction sample comprises a chroma reconstruction sample used as an input source for classification.

[0015] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the classification comprises classification of luma online-trained filters.

[0016] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the classification comprises classification of luma offline-trained filters.

[0017] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the side information comprises prediction samples.

[0018] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the prediction samples comprise luma prediction samples used as an input source for at least one extended tap of luma and chroma online-trained filters.

[0019] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the prediction samples comprise luma prediction samples used as an input source for at least one spatial tap of luma and chroma online-trained filters.

[0020] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the prediction samples comprise luma prediction samples used as an input source for luma offline-trained filters.

[0021] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the prediction samples comprise luma prediction samples used as an input source for classification.

[0022] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the classification comprises classification of luma online-trained filters.

[0023] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the classification comprises classification of luma offline-trained filters.

[0024] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the reconstruction sample comprises a chroma reconstruction sample used as an input source for at least one extended tap of luma and chroma online-trained filters.

[0025] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the reconstruction sample comprises a chroma reconstruction sample used as an input source for at least one spatial tap of luma and chroma online-trained filters.

[0026] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the reconstruction sample comprises a chroma reconstruction sample used as an input source for classification.

[0027] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the classification comprises classification of luma online-trained filters.

[0028] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the classification comprises classification of luma offline-trained filters.

[0029] Optionally, in any of the preceding aspects, another implementation of the aspect provides subjecting the prediction samples to modification before the prediction samples are used as the input for the ALF.

[0030] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the modification comprises filtering.

[0031] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the modification comprises down-sampling or up-sampling.

[0032] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the modification comprises clipping or shifting.

[0033] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the side information comprises residual values.

[0034] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the residual values comprise luma residual values used as an input source for at least one extended tap of luma and chroma online-trained filters.

[0035] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the residual values comprise luma residual values used as an input source for at least one spatial tap of luma and chroma online-trained filters.

[0036] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the residual values comprise luma residual values used as an input source for luma offline-trained filters.

[0037] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the residual values comprise luma residual values used as an input source for classification.

[0038] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the classification comprises classification of luma online-trained filters.

[0039] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the classification comprises classification of luma offline-trained filters.

[0040] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the residual values comprises chroma residual values used as an input source for at least one extended tap of luma and chroma online-trained filters.

[0041] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the residual values comprises chroma residual values used as an input source for at least one spatial tap of luma and chroma online-trained filters.

[0042] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the residual values comprises chroma residual values used as an input source for classification.

[0043] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the classification comprises classification of luma online-trained filters.

[0044] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the classification comprises classification of luma offline-trained filters.

[0045] Optionally, in any of the preceding aspects, another implementation of the aspect provides subjecting the residual values to modification before the residual values are used as the input for the ALF.

[0046] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the modification comprises filtering.

[0047] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the modification comprises down-sampling or up-sampling.

[0048] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the modification comprises clipping or shifting.

[0049] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the side information comprises partitioning information.

[0050] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the partitioning information comprises one or more of block size, block shape, and block location.

[0051] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the partitioning information comprises luma partitioning information used for classification.

[0052] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the classification comprises classification of luma online-trained filters.

[0053] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the classification comprises classification of luma offline-trained filters.

[0054] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the partitioning information comprises chroma partitioning information used for classification.

[0055] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the classification comprises classification of luma online-trained filters.

[0056] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the classification comprises classification of luma offline-trained filters.

[0057] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the partitioning information comprises luma partitioning information used for filter training.

- [0058] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the filter training comprises filter training of luma online-trained filters.
- [0059] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the filter training comprises filter training of chroma online-trained filters.
- [0060] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the partitioning information comprises chroma partitioning information used for filter training.
- [0061] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the filter training comprises filter training of luma online-trained filters.
- [0062] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the filter training comprises filter training of chroma online-trained filters.
- [0063] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the partitioning information comprises luma partitioning information used for filter training and chroma partitioning information used for the filter training.
- [0064] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the side information comprises quantization parameter (QP) information.
- [0065] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the QP information comprises one or more of picture QP information, slice QP information, and block level QP information.
- [0066] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the QP information comprises luma QP information used for classification.
- [0067] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the classification comprises classification of luma online-trained filters.
- [0068] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the classification comprises classification of luma offline-trained filters.
- [0069] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the QP information comprises chroma QP information used for classification.
- [0070] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the classification comprises classification of luma online-trained filters.
- [0071] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the classification comprises classification of luma offline-trained filters.

[0072] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the QP information comprises luma QP information used for filter training.

[0073] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the filter training comprises filter training of luma online-trained filters.

[0074] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the filter training comprises filter training of chroma online-trained filters.

[0075] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the QP information comprises chroma QP information used for filter training.

[0076] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the filter training comprises filter training of luma online-trained filters.

[0077] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the filter training comprises filter training of chroma online-trained filters.

[0078] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the QP information comprises luma QP information used for filter training and chroma QP information used for the filter training.

[0079] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the side information comprises boundary strength information.

[0080] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the boundary strength information is generated by a deblocking filter.

[0081] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the boundary strength information comprises is luma boundary strength information used for classification.

[0082] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the classification comprises classification of luma online-trained filters.

[0083] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the classification comprises classification of luma offline-trained filters.

[0084] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the boundary strength information comprises chroma boundary strength used for classification.

[0085] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the classification comprises classification of luma online-trained filters.

[0086] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the classification comprises classification of luma offline-trained filters.

[0087] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the boundary strength information comprises luma boundary strength information used for filter training.

[0088] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the filter training comprises filter training of luma online-trained filters.

[0089] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the filter training comprises filter training of chroma online-trained filters.

[0090] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the boundary strength information comprises chroma boundary strength information used for filter training.

[0091] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the filter training comprises filter training of luma online-trained filters.

[0092] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the filter training comprises filter training of chroma online-trained filters.

[0093] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the boundary strength information comprises luma boundary strength information used for filter training and chroma boundary strength information used for the filter training.

[0094] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the ALF comprises a cross component ALF (CCALF).

[0095] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the side information comprises a reconstruction sample obtained before a deblocking filter (DBF), a sample adaptive offset (SAO) filter, or a bilateral filter (BF).

[0096] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the reconstruction sample comprises a luma reconstruction sample used as an input source for at least one extended tap for the CCALF.

[0097] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the reconstruction sample comprises a luma reconstruction sample used as an input source for at least one spatial tap for the CCALF.

[0098] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the reconstruction sample comprises a chroma reconstruction sample used as an input source for at least one extended tap for the CCALF.

[0099] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the reconstruction sample comprises a chroma reconstruction sample used as an input source for at least one spatial tap for the CCALF.

[0100] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the side information comprises prediction samples.

[0101] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the prediction samples comprise luma prediction samples used as an input source for at least one extended tap for the CCALF.

[0102] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the prediction samples comprise luma prediction samples used as an input source for at least one spatial tap for the CCALF.

[0103] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the prediction samples comprise chroma prediction samples used as an input source for at least one extended tap for the CCALF.

[0104] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the prediction samples comprise chroma prediction samples used as an input source for at least one spatial tap for the CCALF.

[0105] Optionally, in any of the preceding aspects, another implementation of the aspect provides subjecting the prediction samples to modification before the prediction samples are used as the input for the CCALF.

[0106] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the modification comprises filtering.

[0107] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the modification comprises down-sampling or up-sampling.

[0108] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the modification comprises clipping or shifting.

[0109] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the side information comprises residual values.

[0110] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the residual values comprise luma residual values used as an input source for at least one extended tap for the CCALF.

[0111] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the residual values comprise luma residual values used as an input source for at least one spatial tap for the CCALF.

[0112] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the residual values comprise chroma residual values used as an input source for at least one extended tap for the CCALF.

[0113] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the residual values comprise chroma residual values used as an input source for at least one spatial tap for the CCALF.

[0114] Optionally, in any of the preceding aspects, another implementation of the aspect provides subjecting the residual values to modification before the residual values are used as the input for the CCALF.

[0115] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the modification comprises filtering.

[0116] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the modification comprises down-sampling or up-sampling.

[0117] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the modification comprises clipping or shifting.

[0118] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the side information comprises partitioning information.

[0119] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the partitioning information comprises one or more of block size, block shape, and block location.

[0120] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the partitioning information comprises luma partitioning information used for training online-trained filters of the CCALF.

[0121] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the partitioning information comprises chroma partitioning information used for training online-trained filters of the CCALF.

[0122] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the partitioning information comprises luma partitioning information used for filter training for the CCALF and chroma partitioning information used for filter training the CCALF.

[0123] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the side information comprises quantization parameter (QP) information.

[0124] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the QP information comprises one or more of block size, block shape, and block location.

[0125] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the QP information comprises luma QP information used for training online-trained filters of the CCALF.

[0126] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the QP information comprises chroma QP information used for training online-trained filters of the CCALF.

[0127] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the QP information comprises luma QP information used for filter training for the CCALF and chroma QP information used for filter training the CCALF.

[0128] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the side information comprises boundary strength information.

[0129] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the boundary strength information is generated by a deblocking filter.

[0130] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the boundary strength information comprises luma boundary strength information used for training online-trained filters of the CCALF.

[0131] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the boundary strength information comprises chroma boundary strength information used for training online-trained filters of the CCALF.

[0132] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the boundary strength information comprises luma boundary strength information used for filter training for the CCALF and chroma boundary strength information used for filter training the CCALF.

[0133] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the method is implemented in post-processing or in pre-processing.

[0134] Optionally, in any of the preceding aspects, another implementation of the aspect provides that one or more of the methods are used jointly.

[0135] Optionally, in any of the preceding aspects, another implementation of the aspect provides that one or more of the methods are used individually.

[0136] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the method is applied to any in-loop filtering tools, a pre-processing filtering method, or post-processing filtering method in video coding including but not limited to ALF/CCALF or any other filtering method.

[0137] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the method is applied to an in-loop filtering method.

[0138] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the method is applied to ALF, CCAPF, a sample adaptive offset (SAO) filter, or another in-loop filtering method.

[0139] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the method is applied to a cross component SAO (CCSAO).

[0140] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the method is applied to a bilateral filter (BF).

[0141] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the method is applied to a Hadamard transform domain filter (HTDF).

[0142] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the method is applied to an in-loop filtering method.

[0143] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the method is applied to a pre-processing filtering method.

[0144] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the method is applied to a post-processing filtering method.

[0145] Optionally, in any of the preceding aspects, another implementation of the aspect provides that a video unit subjected to the ALF or the CCALF comprises one of a sequence, a picture, a sub-picture, a slice, a tile, a coding tree unit (CTU), a CTU row, groups of CTUs, a coding unit (CU), a prediction unit (PU), a transform unit (TU), a coding tree block (CTB), a coding block (CB), a prediction block (PB), a transform block (TB), and any other region that contains more than one luma or chroma sample or pixel.

[0146] Optionally, in any of the preceding aspects, another implementation of the aspect provides that an indication of whether and/or how to apply the method is included in the bitstream.

[0147] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the indication is included in the bitstream at a sequence level, at a group of pictures level, at a picture level, at a slice level, at a tile group level, in a sequence header, in a picture header, in a sequence parameter set (SPS), in a video parameter set (VPS), in a dependency parameter set (DPS), in a decoding capability information (DCI), in a picture parameter set (PPS), in an adaptation parameter set (APS), in a slice header, or in a tile group header.

[0148] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the indication is included in the bitstream in a prediction block (PB), a transform block (TB), a coding block (CB), a prediction unit (PU), a transform unit (TU), a coding unit (CU), a virtual pipeline data unit (VPDU), a coding tree unit (CTU), a CTU row, a slice, a tile, a sub-picture, or any other region that contains more than one sample or pixel.

[0149] Optionally, in any of the preceding aspects, another implementation of the aspect provides that whether and/or how to apply any of the methods is dependent on coded information, and wherein the coded information comprises block size, color format, a single or dual tree partitioning, a color component, a slice type, or a picture type.

[0150] Optionally, in any of the preceding aspects, another implementation of the aspect provides that the conversion includes encoding the visual media data into the bitstream.

[0151] Optionally, in any of the preceding aspects, another implementation of the aspect provides that wherein the conversion includes decoding the visual media data from the bitstream.

[0152] A second aspect relates to an apparatus for processing media data comprising: one or more processors; and a non-transitory memory with instructions thereon, wherein the instructions upon execution by the processor cause the apparatus to perform the method of any of the disclosed embodiments.

[0153] A third aspect relates to a non-transitory computer readable medium, comprising a computer program product for use by a video coding device, the computer program product comprising computer executable instructions stored on the non-transitory computer readable medium such that when executed by a processor cause the video coding device to perform the method of any of the disclosed embodiments.

[0154] A fourth aspect relates to a non-transitory computer-readable recording medium storing a bitstream of a video which is generated by a method performed by a video processing apparatus, wherein the method comprises the method of any of the disclosed embodiments.

[0155] A fifth aspect relates to a method for storing a bitstream of a video comprising the method of any of the disclosed embodiments.

[0156] A sixth aspect relates to a method, apparatus, or system described in the present disclosure.

[0157] For the purpose of clarity, any one of the foregoing embodiments may be combined with any one or more of the other foregoing embodiments to create a new embodiment within the scope of the present disclosure.

[0158] These and other features will be more clearly understood from the following detailed description taken in conjunction with the accompanying drawings and claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0159] For a more complete understanding of this disclosure, reference is now made to the following brief description, taken in connection with the accompanying drawings and detailed description, wherein like reference numerals represent like parts.

[0160] FIG. 1 illustrates an example of nominal vertical and horizontal locations of 4:2:2 luma and chroma samples in a picture.

[0161] FIG. 2 illustrates an example encoder block diagram.

[0162] FIG. 3 illustrates an example picture partitioned into raster scan slices.

[0163] FIG. 4 illustrates an example picture partitioned into rectangular scan slices.

[0164] FIG. 5 illustrates an example picture partitioned into bricks.

[0165] FIGS. 6A-6C illustrate examples of coding tree blocks (CTBs) crossing picture borders.

[0166] FIG. 7 illustrates an example of intra prediction modes.

[0167] FIG. 8 illustrates an example of block boundaries in a picture.

[0168] FIG. 9 illustrates an example of pixels involved in filter usage.

- [0169] FIG. 10 illustrates an example of filter shapes for adaptive loop filter (ALF).
- [0170] FIG. 11 illustrates an example of transformed coefficients for 5×5 diamond filter support.
- [0171] FIG. 12 illustrates an example of relative coordinates for 5×5 diamond filter support.
- [0172] FIG. 13 is a block diagram showing an example video processing system.
- [0173] FIG. 14 is a block diagram of an example video processing apparatus.
- [0174] FIG. 15 is a flowchart for an example method of video processing.
- [0175] FIG. 16 is a block diagram that illustrates an example video coding system.
- [0176] FIG. 17 is a block diagram that illustrates an example encoder.
- [0177] FIG. 18 is a block diagram that illustrates an example decoder.
- [0178] FIG. 19 is a schematic diagram of an example encoder.
- [0179] FIG. 20 is a method for processing video data in accordance with an embodiment of the disclosure.

DETAILED DESCRIPTION

[0180] It should be understood at the outset that although an illustrative implementation of one or more embodiments are provided below, the disclosed systems and/or methods may be implemented using any number of techniques, whether currently known or yet to be developed. The disclosure should in no way be limited to the illustrative implementations, drawings, and techniques illustrated below, including the exemplary designs and implementations illustrated and described herein, but may be modified within the scope of the appended claims along with their full scope of equivalents.

[0181] Section headings are used in the present disclosure for ease of understanding and do not limit the applicability of techniques and embodiments disclosed in each section only to that section. Furthermore, the techniques described herein are applicable to other video codec protocols and designs.

1. Initial discussion

[0182] This disclosure is related to video coding technologies. Specifically, it is related to in-loop filter and other coding tools in image/video coding. The ideas may be applied individually or in various combinations to video codecs, such as High Efficiency Video Coding (HEVC), Versatile Video Coding (VVC), or other video coding technologies.

2. Abbreviations

[0183] The present disclosure includes the following abbreviations. Advanced video coding (Rec. International Telecommunication Union (ITU) telecommunication standardization sector (ITU-T) H.264 | International Organization for Standardization (ISO)/International Electrotechnical Commission (IEC) 14496-10) (AVC), coded picture buffer (CPB), clean random access (CRA), coding tree unit (CTU), coded video sequence (CVS), decoded picture buffer (DPB), decoding parameter set (DPS), general constraints information (GCI), high efficiency video coding, also known as Rec. ITU-T H.265 | ISO/IEC 23008-2, (HEVC), Joint exploration model (JEM), motion constrained tile set (MCTS), network abstraction layer (NAL), output layer set (OLS), picture header (PH), picture parameter set (PPS), profile, tier, and level (PTL), picture unit (PU), reference picture resampling (RPR), raw byte sequence payload (RBSP), supplemental enhancement information (SEI), slice header (SH), sequence parameter set (SPS), video coding layer (VCL), video parameter set (VPS), versatile video coding, also known as Rec. ITU-T H.266 | ISO/IEC 23090-3, (VVC), VVC test model (VTM), video usability information (VUI), transform unit (TU), coding unit (CU), deblocking filter (DF), sample adaptive offset (SAO), adaptive loop filter (ALF), coding block flag (CBF), quantization parameter (QP), rate distortion optimization (RDO), and bilateral filter (BF).

3. Video coding standards

[0184] Video coding standards have evolved primarily through the development of the ITU-T and ISO/IEC standards. The ITU-T produced H.261 and H.263, ISO/IEC produced Moving Picture Experts Group (MPEG)-1 and MPEG-4 Visual, and the two organizations jointly produced the H.262/MPEG-2 Video and H.264/MPEG-4 Advanced Video Coding (AVC) and H.265/HEVC [1] standards. Since H.262, the video coding standards are based on the hybrid video coding structure wherein temporal prediction plus transform coding are utilized. To explore the future video coding technologies beyond HEVC, the Joint Video Exploration Team (JVET) was founded by Video Coding Experts Group (VCEG) and MPEG jointly. Many methods have been adopted by JVET and put into the reference software named Joint Exploration Model (JEM) [2]. The JVET was renamed to be the Joint Video Experts Team (JVET) when the Versatile Video Coding (VVC) project officially started. VVC is a coding standard, targeting at 50% bitrate reduction as compared to HEVC. The VVC working draft and VVC test model (VTM) are continuously updated.

[0185] An example version of the VVC draft, i.e., Versatile Video Coding (Draft 10) may be found at: https://jvet-experts.org/doc_end_user/documents/19_Teleconference/wg11/JVET-S2001-

v17.zip. An example version of the reference software of VVC, named as VTM, could be found at: https://vcgit.lhi.fraunhofer.de/jvet-u-ee2/VVCSoftware_VTM/-/tree/VTM-11.2.

[0186] International Telecommunication Union Telecommunication Standardization Sector (ITU-T) video coding experts group (VCEG) and International Organization for Standardization and the International Electrotechnical Commission (ISO/IEC) Moving Picture Experts Group (MPEG) joint technical committee (JTC) 1/ subcommittee (SC) 29/ working group (WG) 11 are studying the potential need for standardization of future video coding technology with a compression capability that significantly exceeds that of the current VVC standard. Such future standardization action could either take the form of extended extension(s) of VVC or an entirely new standard. The groups are working together on this exploration activity in a joint-collaboration effort known as the Joint Video Exploration Team (JVET) to evaluate compression technology designs proposed by their experts in this area. The first Exploration Experiments (EE) are established by JVET and reference software named Enhanced Compression Model (ECM) is in use. The test model ECM is updated continuously.

3.1 Color space and chroma subsampling

[0187] Color space, also known as the color model (or color system), is a mathematical model which describes the range of colors as tuples of numbers, for example as 3 or 4 values or color components (e.g., RGB). Generally speaking, a color space is an elaboration of the coordinate system and sub-space. For video compression, the most frequently used color spaces are luma, blue difference chroma, and red difference chroma (YCbCr) and red, green, blue (RGB).

[0188] YCbCr, Y'CbCr, or Y Pb/Cb Pr/Cr, also written as YCBCR or Y'CBCR, is a family of color spaces used as a part of the color image pipeline in video and digital photography systems. Y' is the luma component and CB and CR are the blue-difference and red-difference chroma components. Y' (with prime) is distinguished from Y, which is luminance, meaning that light intensity is nonlinearly encoded based on gamma corrected RGB primaries.

[0189] Chroma subsampling is the practice of encoding images by implementing less resolution for chroma information than for luma information, taking advantage of the human visual system's lower acuity for color differences than for luminance.

3.1.1 4:4:4

[0190] In 4:4:4, each of the three Y'CbCr components have the same sample rate. Thus there is no chroma subsampling. This scheme is sometimes used in high-end film scanners and cinematic postproduction.

3.1.2 4:2:2

[0191] In 4:3:2, the two chroma components are sampled at half the sample rate of luma. The horizontal chroma resolution is halved while the vertical chroma resolution is unchanged. This reduces the bandwidth of an uncompressed video signal by one-third with little to no visual difference. An example of nominal vertical and horizontal locations of 4:2:2 color format is depicted in FIG. 1.

3.1.3 4:2:0

[0192] In 4:2:0, the horizontal sampling is doubled compared to 4:1:1, but as the Cb and Cr channels are only sampled on each alternate line in this scheme, the vertical resolution is halved. The data rate is thus the same. Cb and Cr are each subsampled at a factor of 2 both horizontally and vertically. There are three variants of 4:2:0 schemes, having different horizontal and vertical siting. In MPEG-2, Cb and Cr are cosited horizontally. Cb and Cr are sited between pixels in the vertical direction (sited interstitially). In Joint Photographic Experts Group (JPEG)/JPEG File Interchange Format (JFIF), H.261, and MPEG-1, Cb and Cr are sited interstitially, halfway between alternate luma samples. In 4:2:0 DV, Cb and Cr are co-sited in the horizontal direction. In the vertical direction, they are co-sited on alternating lines.

chroma_format_idc	separate_colour_plane_flag	Chroma format	SubWidthC	SubHeightC
0	0	Monochrome	1	1
1	0	4:2:0	2	2
2	0	4:2:2	2	1
3	0	4:4:4	1	1
3	1	4:4:4	1	1

Table. 1 SubWidthC and SubHeightC values derived from chroma_format_idc and separate_colour_plane_flag

3.2 Example Coding Flow of a Video Codec

[0193] FIG. 2 shows an example of encoder block diagram of VVC, which contains three in-loop filtering blocks: deblocking filter (DF), sample adaptive offset (SAO) and ALF. Unlike DF, which uses predefined filters, SAO and ALF utilize the original samples of the current picture to reduce the mean square errors between the original samples and the reconstructed samples by adding an offset and by applying a finite impulse response (FIR) filter, respectively, with coded side information signaling the offsets and filter coefficients. ALF is located at the last processing stage of each picture and can be regarded as a tool trying to catch and fix artifacts created by the previous stages.

3.3 Definitions of Video/Coding Units

[0194] A picture is divided into one or more tile rows and one or more tile columns. A tile is a sequence of CTUs that covers a rectangular region of a picture. A tile may be divided into one or more bricks, each of which includes a number of CTU rows within the tile. A tile that is not partitioned into multiple bricks may also be referred to as a brick. However, a brick that is a true subset of a tile may not be referred to as a tile. A slice either contains several tiles of a picture or several bricks of a tile.

[0195] Two modes of slices are supported, namely the raster-scan slice mode and the rectangular slice mode. In the raster-scan slice mode, a slice contains a sequence of tiles in a tile raster scan of a picture. In the rectangular slice mode, a slice contains a number of bricks of a picture that collectively form a rectangular region of the picture. The bricks within a rectangular slice are in the order of brick raster scan of the slice. FIG. 3 shows an example of raster-scan slice partitioning of a picture, where the picture is divided into 12 tiles and 3 raster-scan slices.

[0196] FIG. 4 shows an example of rectangular slice partitioning of a picture, where the picture is divided into 24 tiles (6 tile columns and 4 tile rows) and 9 rectangular slices.

[0197] FIG. 5 shows an example of a picture partitioned into tiles, bricks, and rectangular slices, where the picture is divided into 4 tiles (2 tile columns and 2 tile rows), 11 bricks (the top-left tile contains 1 brick, the top-right tile contains 5 bricks, the bottom-left tile contains 2 bricks, and the bottom-right tile contain 3 bricks), and 4 rectangular slices.

3.3.1 CTU/CTB Sizes

[0198] In VVC, the CTU size, signaled in a sequence parameter set (SPS) by the syntax element `log2_ctu_size_minus2`, could be as small as 4x4.

7.3.2.3 Sequence parameter set RBSP syntax

seq_parameter_set_rbsp() {	Descriptor
sps_decoding_parameter_set_id	u(4)
sps_video_parameter_set_id	u(4)
sps_max_sub_layers_minus1	u(3)
sps_reserved_zero_5bits	u(5)
profile_tier_level(sps_max_sub_layers_minus1)	
gra_enabled_flag	u(1)
sps_seq_parameter_set_id	ue(v)
chroma_format_idc	ue(v)
if(chroma_format_idc == 3)	
separate_colour_plane_flag	u(1)
pic_width_in_luma_samples	ue(v)
pic_height_in_luma_samples	ue(v)
conformance_window_flag	u(1)
if(conformance_window_flag) {	
conf_win_left_offset	ue(v)
conf_win_right_offset	ue(v)
conf_win_top_offset	ue(v)
conf_win_bottom_offset	ue(v)
}	
bit_depth_luma_minus8	ue(v)
bit_depth_chroma_minus8	ue(v)
log2_max_pic_order_cnt_lsb_minus4	ue(v)
sps_sub_layer_ordering_info_present_flag	u(1)

for(i = (sps_sub_layer_ordering_info_present_flag ? 0 : sps_max_sub_layers_minus1); i <= sps_max_sub_layers_minus1; i++) {	
sps_max_dec_pic_buffering_minus1[i]	ue(v)
sps_max_num_reorder_pics[i]	ue(v)
sps_max_latency_increase_plus1[i]	ue(v)
}	
long_term_ref_pics_flag	u(1)
sps_idr_rpl_present_flag	u(1)
rpl1_same_as_rpl0_flag	u(1)
for(i = 0; i < !rpl1_same_as_rpl0_flag ? 2 : 1; i++) {	
num_ref_pic_lists_in_sps[i]	ue(v)
for(j = 0; j < num_ref_pic_lists_in_sps[i]; j++)	
ref_pic_list_struct(i, j)	
}	
qtbtt_dual_tree_intra_flag	u(1)
log2_ctu_size_minus2	ue(v)
log2_min_luma_coding_block_size_minus2	ue(v)
partition_constraints_override_enabled_flag	u(1)
sps_log2_diff_min_qt_min_cb_intra_slice_luma	ue(v)
sps_log2_diff_min_qt_min_cb_inter_slice	ue(v)
sps_max_mtt_hierarchy_depth_inter_slice	ue(v)
sps_max_mtt_hierarchy_depth_intra_slice_luma	ue(v)
if(sps_max_mtt_hierarchy_depth_intra_slice_luma != 0) {	
sps_log2_diff_max_bt_min_qt_intra_slice_luma	ue(v)
sps_log2_diff_max_tt_min_qt_intra_slice_luma	ue(v)
}	

if(sps_max_mtt_hierarchy_depth_inter_slices != 0) {	
sps_log2_diff_max_bt_min_qt_inter_slice	ue(v)
sps_log2_diff_max_tt_min_qt_inter_slice	ue(v)
}	
if(qtbtt_dual_tree_intra_flag) {	
sps_log2_diff_min_qt_min_cb_intra_slice_chroma	ue(v)
sps_max_mtt_hierarchy_depth_intra_slice_chroma	ue(v)
if (sps_max_mtt_hierarchy_depth_intra_slice_chroma != 0) {	
sps_log2_diff_max_bt_min_qt_intra_slice_chroma	ue(v)
sps_log2_diff_max_tt_min_qt_intra_slice_chroma	ue(v)
}	
}	
...	
rbsp_trailing_bits()	
}	

[0199] $\log_2_ctu_size_minus2$ plus 2 specifies the luma coding tree block size of each CTU. $\log_2_min_luma_coding_block_size_minus2$ plus 2 specifies the minimum luma coding block size. The variables $CtbLog2SizeY$, $CtbSizeY$, $MinCbLog2SizeY$, $MinCbSizeY$, $MinTbLog2SizeY$, $MaxTbLog2SizeY$, $MinTbSizeY$, $MaxTbSizeY$, $PicWidthInCtbsY$, $PicHeightInCtbsY$, $PicSizeInCtbsY$, $PicWidthInMinCbsY$, $PicHeightInMinCbsY$, $PicSizeInMinCbsY$, $PicSizeInSamplesY$, $PicWidthInSamplesC$ and $PicHeightInSamplesC$ are derived as follows:

$$CtbLog2SizeY = \log_2_ctu_size_minus2 + 2 \quad (7-9)$$

$$CtbSizeY = 1 \ll CtbLog2SizeY \quad (7-10)$$

$$MinCbLog2SizeY = \log_2_min_luma_coding_block_size_minus2 + 2 \quad (7-11)$$

$$MinCbSizeY = 1 \ll MinCbLog2SizeY \quad (7-12)$$

$$\text{MinTbLog2SizeY} = 2 \quad (7-13)$$

$$\text{MaxTbLog2SizeY} = 6 \quad (7-14)$$

$$\text{MinTbSizeY} = 1 \ll \text{MinTbLog2SizeY} \quad (7-15)$$

$$\text{MaxTbSizeY} = 1 \ll \text{MaxTbLog2SizeY} \quad (7-16)$$

$$\text{PicWidthInCtbsY} = \text{Ceil}(\text{pic_width_in_luma_samples} \div \text{CtbSizeY}) \quad (7-17)$$

$$\text{PicHeightInCtbsY} = \text{Ceil}(\text{pic_height_in_luma_samples} \div \text{CtbSizeY}) \quad (7-18)$$

$$\text{PicSizeInCtbsY} = \text{PicWidthInCtbsY} * \text{PicHeightInCtbsY} \quad (7-19)$$

$$\text{PicWidthInMinCbsY} = \text{pic_width_in_luma_samples} / \text{MinCbSizeY} \quad (7-20)$$

$$\text{PicHeightInMinCbsY} = \text{pic_height_in_luma_samples} / \text{MinCbSizeY} \quad (7-21)$$

$$\text{PicSizeInMinCbsY} = \text{PicWidthInMinCbsY} * \text{PicHeightInMinCbsY} \quad (7-22)$$

$$\text{PicSizeInSamplesY} = \text{pic_width_in_luma_samples} * \text{pic_height_in_luma_samples} \quad (7-23)$$

$$\text{PicWidthInSamplesC} = \text{pic_width_in_luma_samples} / \text{SubWidthC} \quad (7-24)$$

$$\text{PicHeightInSamplesC} = \text{pic_height_in_luma_samples} / \text{SubHeightC} \quad (7-25)$$

3.3.2 CTUs in One Picture

[0200] Suppose the CTB/largest coding unit (LCU) size indicated by $M \times N$ (typically M is equal to N), and for a CTB located at picture border (or tile or slice or other types of borders, picture border is taken as an example) border, $K \times L$ samples are within picture border wherein either $K < M$ or $L < N$. FIGS. 6A-6C illustrate examples of CTBs crossing picture borders. For those CTBs as depicted in FIG. 6, the CTB size is still equal to $M \times N$, however, the bottom boundary/right boundary of the CTB is outside the picture.

3.4 Intra Prediction

[0201] To capture the arbitrary edge directions presented in natural video, the number of directional intra modes is extended from 33, as used in HEVC, to 65. FIG. 7 illustrates an example of 67 intra prediction modes. The extended directional modes are depicted in FIG. 7, and the planar and DC modes remain the same. These denser directional intra prediction modes apply for all block sizes and for both luma and chroma intra predictions.

[0202] Angular intra prediction directions may be defined from 45 degrees to -135 degrees in clockwise direction as shown in FIG. 7. In VTM, several angular intra prediction modes are adaptively replaced with wide-angle intra prediction modes for the non-square blocks. The replaced modes are signaled and remapped to the indexes of wide angular modes after parsing. The total number of intra prediction modes is unchanged, e.g., 67, and the intra mode coding is unchanged.

[0203] In the HEVC, every intra-coded block has a square shape and the length of each of the block's sides is a power of 2. Thus, no division operations are required to generate an intra-predictor using DC mode. In VVC, blocks can have a rectangular shape that necessitates the use of a division operation per block in the general case. To avoid division operations for DC prediction, only the longer side is used to compute the average for non-square blocks.

3.5 Inter prediction

[0204] For each inter-predicted CU, motion parameters include motion vectors, reference picture indices, reference picture list usage index, and extended information used for the new coding feature of VVC to be used for inter-predicted sample generation. The motion parameters can be signaled in an explicit or implicit manner. When a CU is coded with skip mode, the CU is associated with one PU and has no significant residual coefficients, no coded motion vector delta, and/or reference picture index. A merge mode is specified whereby the motion parameters for the current CU are obtained from neighboring CUs, including spatial and temporal candidates, and extended schedules introduced in VVC. The merge mode can be applied to any inter-predicted CU, not only for skip mode. The alternative to merge mode is the explicit transmission of motion parameters, where motion vector, corresponding reference picture index for each reference picture list, reference picture list usage flag, and other useful information are signaled explicitly per each CU.

3.6 Deblocking Filter

[0205] Deblocking filtering is an example in-loop filter in video codec. In VVC, the deblocking filtering process is applied on CU boundaries, transform subblock boundaries, and prediction subblock boundaries. The prediction subblock boundaries include the prediction unit boundaries introduced by the Subblock based Temporal Motion Vector prediction (SbTMVP) and affine modes. The transform subblock boundaries include the transform unit boundaries introduced by Subblock transform (SBT) and Intra Sub-Partitions (ISP) modes and transforms due to implicit split of large CUs. The processing order of the deblocking filter is defined as horizontal filtering for vertical edges for the entire picture first, followed by vertical filtering for horizontal edges. This specific order

enables either multiple horizontal filtering or vertical filtering processes to be applied in parallel threads. Filtering processes can also be implemented on a CTB-by-CTB basis with only a small processing latency.

[0206] The vertical edges in a picture are filtered first. Then the horizontal edges in a picture are filtered with samples modified by the vertical edge filtering process as input. The vertical and horizontal edges in the CTBs of each CTU are processed separately on a coding unit basis. The vertical edges of the coding blocks in a coding unit are filtered starting with the edge on the left-hand side of the coding blocks proceeding through the edges towards the right-hand side of the coding blocks in their geometrical order. The horizontal edges of the coding blocks in a coding unit are filtered starting with the edge on the top of the coding blocks proceeding through the edges towards the bottom of the coding blocks in their geometrical order. FIG. 8 picture samples and horizontal and vertical block boundaries on the 8×8 grid, and the nonoverlapping blocks of the 8×8 samples, which can be deblocked in parallel.

3.6.1 Boundary Decision

[0207] Filtering is applied to 8x8 block boundaries. In addition, such boundaries must be a transform block boundary or a coding subblock boundary, for example due to usage of Affine motion prediction (ATMVP). For other boundaries, deblocking filtering is disabled.

3.6.2 Boundary Strength Calculation

[0208] For a transform block boundary/coding subblock boundary, if the boundary is located in the 8x8 grid, the boundary may be filtered and the setting of $bs[xDi][yDj]$ (wherein $[xDi][yDj]$ denotes the coordinate) for this edge as defined in Table 2 and Table 3, respectively.

Priority	Conditions	Y	U	V
5	At least one of the adjacent blocks is intra	2	2	2
4	TU boundary and at least one of the adjacent blocks has non-zero transform coefficients	1	1	1
3	Reference pictures or number of MVs (1 for uni-prediction, 2 for bi-prediction) of the adjacent blocks are different	1	N/A	N/A

2	Absolute difference between the motion vectors of same reference picture that belong to the adjacent blocks is greater than or equal to one integer luma sample	1	N/A	N/A
1	Otherwise	0	0	0

Table. 2 Boundary strength (when SPS IBC is disabled)

Priority	Conditions	Y	U	V
8	At least one of the adjacent blocks is intra	2	2	2
7	TU boundary and at least one of the adjacent blocks has non-zero transform coefficients	1	1	1
6	Prediction mode of adjacent blocks is different (e.g., one is IBC, one is inter)	1		
5	Both IBC and absolute difference between the motion vectors that belong to the adjacent blocks is greater than or equal to one integer luma sample	1	N/A	N/A
4	Reference pictures or number of MVs (1 for uni-prediction, 2 for bi-prediction) of the adjacent blocks are different	1	N/A	N/A
3	Absolute difference between the motion vectors of same reference picture that belong to the adjacent blocks is greater than or equal to one integer luma sample	1	N/A	N/A
1	Otherwise	0	0	0

Table. 3 Boundary strength (when SPS IBC is enabled)

3.6.3 Deblocking Decision for Luma Component

[0209] FIG. 9 illustrates pixels involved in filter on/off decision and strong/weak filter selection. Wider-stronger luma filter is filters are used only if all the Condition1, Condition2 and Condition 3

are TRUE. The condition 1 is the “large block condition”. This condition detects whether the samples at P-side and Q-side belong to large blocks, which are represented by the variable `bSidePisLargeBlk` and `bSideQisLargeBlk` respectively. The `bSidePisLargeBlk` and `bSideQisLargeBlk` are defined as follows.

`bSidePisLargeBlk = ((edge type is vertical and  $p_0$  belongs to CU with width  $\geq 32$ ) || (edge type is horizontal and  $p_0$  belongs to CU with height  $\geq 32$ ))? TRUE: FALSE`

`bSideQisLargeBlk = ((edge type is vertical and  $q_0$  belongs to CU with width  $\geq 32$ ) || (edge type is horizontal and  $q_0$  belongs to CU with height  $\geq 32$ ))? TRUE: FALSE`

[0210] Based on `bSidePisLargeBlk` and `bSideQisLargeBlk`, the condition 1 is defined as follows:

`Condition1 = (bSidePisLargeBlk || bSideQisLargeBlk) ? TRUE: FALSE`

[0211] Next, if Condition 1 is true, the condition 2 will be further checked. First, the following variables are derived:

`dp0, dp3, dq0, dq3` are first derived as in HEVC

if (p side is greater than or equal to 32)

`dp0 = ( dp0 + Abs(  $p_{50} - 2 * p_{40} + p_{30}$  ) + 1 ) >> 1`

`dp3 = ( dp3 + Abs(  $p_{53} - 2 * p_{43} + p_{33}$  ) + 1 ) >> 1`

if (q side is greater than or equal to 32)

`dq0 = ( dq0 + Abs(  $q_{50} - 2 * q_{40} + q_{30}$  ) + 1 ) >> 1`

`dq3 = ( dq3 + Abs(  $q_{53} - 2 * q_{43} + q_{33}$  ) + 1 ) >> 1`

`Condition2 = (d <  $\beta$ ) ? TRUE: FALSE`

where $d = dp0 + dq0 + dp3 + dq3$.

[0212] If Condition1 and Condition2 are valid, whether any of the blocks uses sub-blocks is further checked:

If (`bSidePisLargeBlk`)

{

If (mode block P == SUBBLOCKMODE)

`Sp = 5`

else

`Sp = 7`

}

else

Sp = 3

If (bSideQisLargeBlk)

{

If (mode block Q == SUBBLOCKMODE)

Sq = 5

else

Sq = 7

}

else

Sq = 3

[0213] Finally, if both the Condition 1 and Condition 2 are valid, the deblocking method will check the condition 3 (the large block strong filter condition), which is defined as follows. In the Condition3 StrongFilterCondition, the following variables are derived:

dpq is derived as in HEVC.

sp3 = Abs(p3 - p0), derived as in HEVC

if (p side is greater than or equal to 32)

if(Sp==5)

sp3 = (sp3 + Abs(p5 - p3) + 1) >> 1

else

sp3 = (sp3 + Abs(p7 - p3) + 1) >> 1

sq3 = Abs(q0 - q3), derived as in HEVC

if (q side is greater than or equal to 32)

If(Sq==5)

sq3 = (sq3 + Abs(q5 - q3) + 1) >> 1

else

sq3 = (sq3 + Abs(q7 - q3) + 1) >> 1

[0214] As in HEVC, StrongFilterCondition = (dpq is less than ($\beta \gg 2$), sp3 + sq3 is less than ($3 * \beta \gg 5$), and Abs(p0 - q0) is less than ($5 * tC + 1$) >> 1) ? TRUE : FALSE.

3.6.4 Stronger Deblocking Filter for Luma

[0215] Bilinear filter is used when samples at either one side of a boundary belong to a large block. A sample belonging to a large block is defined as when the width ≥ 32 for a vertical edge, and when height ≥ 32 for a horizontal edge. The bilinear filter is listed below. Block boundary samples p_i for $i=0$ to S_p-1 and q_j for $j=0$ to S_q-1 (p_i and q_j are the i -th sample within a row for filtering vertical edge, or the i -th sample within a column for filtering horizontal edge) in HEVC deblocking described above) are then replaced by linear interpolation as follows:

$$p_i' = (f_i * Middle_{s,t} + (64 - f_i) * P_s + 32) \gg 6, \text{clipped to } p_i \pm tcPD_i$$

$$q_j' = (g_j * Middle_{s,t} + (64 - g_j) * Q_s + 32) \gg 6, \text{clipped to } q_j \pm tcPD_j$$

where $tcPD_i$ and $tcPD_j$ term is a position dependent clipping described above and $g_j, f_i, Middle_{s,t}, P_s$ and Q_s are given below:

3.6.5 Deblocking Decision for Chroma

[0216] The chroma strong filters are used on both sides of the block boundary. Here, the chroma filter is selected when both sides of the chroma edge are greater than or equal to 8 (chroma position), and the following decision with three conditions are satisfied: the first one is for decision of boundary strength as well as large block. The filter can be applied when the block width or height which orthogonally crosses the block edge is equal to or larger than 8 in chroma sample domain. The second and third one is basically the same as for HEVC luma deblocking decision, which are on/off decision and strong filter decision, respectively.

[0217] In the first decision, boundary strength (bS) is modified for chroma filtering and the conditions are checked sequentially. If a condition is satisfied, then the remaining conditions with lower priorities are skipped. Chroma deblocking is performed when bS is equal to 2, or bS is equal to 1 when a large block boundary is detected. The second and third condition is basically the same as HEVC luma strong filter decision as follows.

[0218] In the second condition d is then derived as in HEVC luma deblocking. The second condition will be TRUE when d is less than β . In the third condition StrongFilterCondition is derived as follows:

dpq is derived as in HEVC.

$sp_3 = \text{Abs}(p_3 - p_0)$, derived as in HEVC

$sq_3 = \text{Abs}(q_0 - q_3)$, derived as in HEVC

[0219] As in HEVC design, StrongFilterCondition = (dpq is less than ($\beta \gg 2$), $sp3 + sq3$ is less than ($\beta \gg 3$), and $Abs(p0 - q0)$ is less than ($5 * tc + 1$) $\gg 1$)

3.6.6 Strong Deblocking Filter for Chroma

[0220] The following strong deblocking filter for chroma is defined:

$$p2' = (3 * p3 + 2 * p2 + p1 + p0 + q0 + 4) \gg 3$$

$$p1' = (2 * p3 + p2 + 2 * p1 + p0 + q0 + q1 + 4) \gg 3$$

$$p0' = (p3 + p2 + p1 + 2 * p0 + q0 + q1 + q2 + 4) \gg 3$$

[0221] An example chroma filter performs deblocking on a 4x4 chroma sample grid.

3.6.7 Position Dependent Clipping

[0222] The position dependent clipping tcPD is applied to the output samples of the luma filtering process involving strong and long filters that are modifying 7, 5 and 3 samples at the boundary. Assuming quantization error distribution, a clipping value may be increased for samples which are expected to have higher quantization noise, thus expected to have higher deviation of the reconstructed sample value from the true sample value.

[0223] For each P or Q boundary filtered with asymmetrical filter, depending on the result of decision-making process, position dependent threshold table is selected from two tables (e.g., Tc7 and Tc3 tabulated below) that are provided to decoder as a side information:

$$Tc7 = \{ 6, 5, 4, 3, 2, 1, 1 \}; \quad Tc3 = \{ 6, 4, 2 \};$$

$$tcPD = (Sp == 3) ? Tc3 : Tc7;$$

$$tcQD = (Sq == 3) ? Tc3 : Tc7;$$

[0224] For the P or Q boundaries being filtered with a short symmetrical filter, position dependent threshold of lower magnitude is applied:

$$Tc3 = \{ 3, 2, 1 \};$$

[0225] Following defining the threshold, filtered $p'i$ and $q'i$ sample values are clipped according to tcP and tcQ clipping values:

$$p''i = Clip3(p'i + tcPi, p'i - tcPi, p'i);$$

$$q''j = Clip3(q'j + tcQj, q'j - tcQj, q'j);$$

where $p'i$ and $q'i$ are filtered sample values, $p''i$ and $q''j$ are output sample value after the clipping and $tcPi$ $tcPi$ are clipping thresholds that are derived from the VVC tc parameter and tcPD and tcQD. The function Clip3 is a clipping function as it is specified in VVC.

3.6.8 Sub-block Deblocking Adjustment

[0226] To enable parallel friendly deblocking using both long filters and sub-block deblocking the long filters is restricted to modify at most 5 samples on a side that uses sub-block deblocking (AFFINE or ATMVP or decoder-side motion vector refinement (DMVR)) as shown in the luma control for long filters. Extendedly, the sub-block deblocking is adjusted such that that sub-block boundaries on an 8x8 grid that are close to a CU or an implicit TU boundary is restricted to modify at most two samples on each side.

[0227] The following applies to sub-block boundaries that not are aligned with the CU boundary.

```

If (mode block Q == SUBBLOCKMODE && edge !=0) {
  if (!(implicitTU && (edge == (64 / 4))))
    if (edge == 2 || edge == (orthogonalLength - 2) || edge == (56 / 4) || edge == (72 / 4))
      Sp = Sq = 2;
    else
      Sp = Sq = 3;
  else
    Sp = Sq = bSideQisLargeBlk ? 5:3
}

```

where edge equal to 0 corresponds to CU boundary, edge equal to 2 or equal to orthogonalLength-2 corresponds to sub-block boundary 8 samples from a CU boundary, etc. Where implicit TU is true if implicit split of TU is used.

3.7 Sample Adaptive Offset

[0228] Sample adaptive offset (SAO) is applied to the reconstructed signal after the deblocking filter by using offsets specified for each CTB by the encoder. The video encoder first makes the decision on whether or not the SAO process is to be applied for current slice. If SAO is applied for the slice, each CTB is classified as one of five SAO types as shown in Table 4. The concept of SAO is to classify pixels into categories and reduces the distortion by adding an offset to pixels of each category. SAO operation includes edge offset (EO) which uses edge properties for pixel classification in SAO type 1 to 4 and band offset (BO) which uses pixel intensity for pixel classification in SAO type 5. Each applicable CTB has SAO parameters including sao_merge_left_flag, sao_merge_up_flag, SAO type and four offsets. If sao_merge_left_flag is equal to 1, the current CTB will reuse the SAO type and offsets of the CTB to the left. If sao_merge_up_flag is equal to 1, the current CTB will reuse SAO type and offsets of the CTB above.

SAO type	sample adaptive offset type to be used	Number of categories
0	None	0
1	1-D 0-degree pattern edge offset	4
2	1-D 90-degree pattern edge offset	4
3	1-D 135-degree pattern edge offset	4
4	1-D 45-degree pattern edge offset	4
5	band offset	4

Table. 4 Specification of SAO type

3.8 Adaptive Loop Filter

[0229] Adaptive loop filtering for video coding is to minimize the mean square error between original samples and decoded samples by using Wiener-based adaptive filter. The ALF is located at the last processing stage for each picture and can be regarded as a tool to catch and fix artifacts from previous stages. The suitable filter coefficients are determined by the encoder and explicitly signaled to the decoder. To achieve better coding efficiency, especially for high resolution videos, local adaptation is used for luma signals by applying different filters to different regions or blocks in a picture. In addition to filter adaptation, filter on/off control at coding tree unit (CTU) level is also helpful for improving coding efficiency. Syntax-wise, filter coefficients are sent in a picture level header called adaptation parameter set, and filter on/off flags of CTUs are interleaved at CTU level in the slice data. This syntax design not only supports picture level optimization but also achieves a low encoding latency.

3.8.1 Signaling of Parameters

[0230] According to ALF design in VTM, filter coefficients and clipping indices are carried in ALF APSs. An ALF APS can include up to 8 chroma filters and one luma filter set with up to 25 filters. An index is also included for each of the 25 luma classes. Classes having the same index share the same filter. By merging different classes, the num of bits required to represent the filter coefficients is reduced. The absolute value of a filter coefficient is represented using a 0th order Exp-Golomb code followed by a sign bit for a non-zero coefficient. When clipping is enabled, a clipping

index is also signaled for each filter coefficient using a two-bit fixed-length code. Up to 8 ALF APSs can be used by the decoder at the same time.

[0231] Filter control syntax elements of ALF in VTM include two types of information. First, ALF on/off flags are signaled at sequence, picture, slice and CTB levels. Chroma ALF can be enabled at picture and slice level only if luma ALF is enabled at the corresponding level. Second, filter usage information is signaled at picture, slice and CTB level, if ALF is enabled at that level. Referenced ALF APSs IDs are coded at a slice level or at a picture level if all the slices within the picture use the same APSs. Luma component can reference up to 7 ALF APSs and chroma components can reference 1 ALF APS. For a luma CTB, an index is signalled indicating which ALF APS or offline trained luma filter set is used. For a chroma CTB, the index indicates which filter in the referenced APS is used.

[0232] The data syntax elements of ALF associated to LUMA component in VTM are listed as follows:

alf_data() {	Descriptor
alf_luma_filter_signal_flag	u(1)
if(alf_luma_filter_signal_flag) {	
alf_luma_clip_flag	u(1)
alf_luma_num_filters_signalled_minus1	ue(v)
if(alf_luma_num_filters_signalled_minus1 > 0)	
for(filtIdx = 0; filtIdx < NumAlfFilters; filtIdx++)	
alf_luma_coeff_delta_idx[filtIdx]	u(v)
for(sflIdx = 0; sflIdx <= alf_luma_num_filters_signalled_minus1; sflIdx++)	
for(j = 0; j < 12; j++) {	
alf_luma_coeff_abs[sflIdx][j]	ue(v)
if(alf_luma_coeff_abs[sflIdx][j])	
alf_luma_coeff_sign[sflIdx][j]	u(1)
}	

if(alf_luma_clip_flag)	
for(sIdx = 0; sIdx <= alf_luma_num_filters_signalled_minus1; sIdx++)	
for(j = 0; j < 12; j++)	
alf_luma_clip_idx[sIdx][j]	u(2)
}	

[0233] alf_luma_filter_signal_flag equal to 1 specifies that a luma filter set is signalled. alf_luma_filter_signal_flag equal to 0 specifies that a luma filter set is not signalled. alf_luma_clip_flag equal to 0 specifies that linear adaptive loop filtering is applied to the luma component. alf_luma_clip_flag equal to 1 specifies that non-linear adaptive loop filtering could be applied to the luma component. alf_luma_num_filters_signalled_minus1 plus 1 specifies the number of adaptive loop filter classes for which luma coefficients can be signalled. The value of alf_luma_num_filters_signalled_minus1 shall be in the range of 0 to NumAlfFilters – 1, inclusive. alf_luma_coeff_delta_idx[filtIdx] specifies the indices of the signalled adaptive loop filter luma coefficient deltas for the filter class indicated by filtIdx ranging from 0 to NumAlfFilters – 1. When alf_luma_coeff_delta_idx[filtIdx] is not present, it is inferred to be equal to 0. The length of alf_luma_coeff_delta_idx[filtIdx] is $\text{Ceil}(\text{Log2}(\text{alf_luma_num_filters_signalled_minus1} + 1))$ bits. The value of alf_luma_coeff_delta_idx[filtIdx] shall be in the range of 0 to alf_luma_num_filters_signalled_minus1, inclusive.

[0234] alf_luma_coeff_abs[sIdx][j] specifies the absolute value of the j-th coefficient of the signalled luma filter indicated by sIdx. When alf_luma_coeff_abs[sIdx][j] is not present, it is inferred to be equal 0. The value of alf_luma_coeff_abs[sIdx][j] shall be in the range of 0 to 128, inclusive. alf_luma_coeff_sign[sIdx][j] specifies the sign of the j-th luma coefficient of the filter indicated by sIdx as follows:

If alf_luma_coeff_sign[sIdx][j] is equal to 0, the corresponding luma filter coefficient has a positive value.

Otherwise (alf_luma_coeff_sign[sIdx][j] is equal to 1), the corresponding luma filter coefficient has a negative value.

When alf_luma_coeff_sign[sIdx][j] is not present, it is inferred to be equal to 0.

[0235] `alf_luma_clip_idx[ sfIdx ][ j ]` specifies the clipping index of the clipping value to use before multiplying by the j -th coefficient of the signalled luma filter indicated by `sfIdx`. When `alf_luma_clip_idx[ sfIdx ][ j ]` is not present, it is inferred to be equal to 0. The coding tree unit syntax elements of ALF associated to LUMA component in VTM are listed as follows:

<code>coding_tree_unit() {</code>	Descriptor
<code> xCtb = CtbAddrX << CtbLog2SizeY</code>	
<code> yCtb = CtbAddrY << CtbLog2SizeY</code>	
<code> if(sh_alf_enabled_flag){</code>	
<code> alf_ctb_flag[0][CtbAddrX][CtbAddrY]</code>	<code>ae(v)</code>
<code> if(alf_ctb_flag[0][CtbAddrX][CtbAddrY]) {</code>	
<code> if(sh_num_alf_aps_ids_luma > 0)</code>	
<code> alf_use_aps_flag</code>	<code>ae(v)</code>
<code> if(alf_use_aps_flag) {</code>	
<code> if(sh_num_alf_aps_ids_luma > 1)</code>	
<code> alf_luma_prev_filter_idx</code>	<code>ae(v)</code>
<code> } else</code>	
<code> alf_luma_fixed_filter_idx</code>	<code>ae(v)</code>
<code> }</code>	
<code> }</code>	
<code>}</code>	

[0236] `alf_ctb_flag[ cIdx ][ xCtb >> CtbLog2SizeY ][ yCtb >> CtbLog2SizeY ]` equal to 1 specifies that the adaptive loop filter is applied to the coding tree block of the colour component indicated by `cIdx` of the coding tree unit at luma location (`xCtb`, `yCtb`). `alf_ctb_flag[ cIdx ][ xCtb >> CtbLog2SizeY ][ yCtb >> CtbLog2SizeY ]` equal to 0 specifies that the adaptive loop filter is not applied to the coding tree block of the colour component indicated by `cIdx` of the coding tree unit at luma location (`xCtb`, `yCtb`).

[0237] When `alf_ctb_flag[ cIdx ][ xCtb >> CtbLog2SizeY ][ yCtb >> CtbLog2SizeY ]` is not present, it is inferred to be equal to 0. `alf_use_aps_flag` equal to 0 specifies that one of the fixed filter sets is applied to the luma CTB. `alf_use_aps_flag` equal to 1 specifies that a filter set from an

APS is applied to the luma CTB. When `alf_use_aps_flag` is not present, it is inferred to be equal to 0. `alf_luma_prev_filter_idx` specifies the previous filter that is applied to the luma CTB. The value of `alf_luma_prev_filter_idx` shall be in a range of 0 to `sh_num_alf_aps_ids_luma - 1`, inclusive. When `alf_luma_prev_filter_idx` is not present, it is inferred to be equal to 0.

[0238] The variable `AlfCtbFiltSetIdxY[ xCtb >> CtbLog2SizeY ][ yCtb >> CtbLog2SizeY ]` specifying the filter set index for the luma CTB at location (`xCtb, yCtb`) is derived as follows:

If `alf_use_aps_flag` is equal to 0, `AlfCtbFiltSetIdxY[ xCtb >> CtbLog2SizeY ][ yCtb >> CtbLog2SizeY ]` is set equal to `alf_luma_fixed_filter_idx`.

Otherwise, `AlfCtbFiltSetIdxY[ xCtb >> CtbLog2SizeY ][ yCtb >> CtbLog2SizeY ]` is set equal to `16 + alf_luma_prev_filter_idx`.

[0239] `alf_luma_fixed_filter_idx` specifies the fixed filter that is applied to the luma CTB. The value of `alf_luma_fixed_filter_idx` shall be in a range of 0 to 15, inclusive.

[0240] Based on the ALF design of VTM, the ALF design of ECM further introduces the concept of alternative filter sets into luma filters. The luma filters are be trained multiple alternatives/rounds based on the updated luma CTU ALF on/off decisions of each alternative/rounds. In such way, there will be multiple filter sets that associated to each training alternative and the class merging results of each filter set may be different. Each CTU could select the best filter set by RDO and the related alternative information will be signaled. The data syntax elements of ALF associated to LUMA component in ECM are listed as follows:

<code>alf_data() {</code>	Descriptor
<code>alf_luma_filter_signal_flag</code>	<code>u(1)</code>
<code>if(alf_luma_filter_signal_flag) {</code>	
<code>alf_luma_num_alts_minus1</code>	<code>ue(v)</code>
<code>for(altIdx = 0; altIdx < alf_luma_num_alts_minus1 + 1; altIdx++){</code>	
<code>alf_luma_clip_flag[altIdx]</code>	<code>u(1)</code>
<code>alf_luma_num_filters_signalled_minus1[altIdx]</code>	<code>ue(v)</code>
<code>if(alf_luma_num_filters_signalled_minus1[altIdx] > 0){</code>	
<code>for(filtIdx = 0; filtIdx < NumAlfFilters; filtIdx++)</code>	

alf_luma_coeff_delta_idx[altIdx][filtIdx]	u(v)
}	
for(sIdx = 0; sIdx <=	
alf_luma_num_filters_signalled_minus1[altIdx]; sIdx++){	
for(j = 0; j < 19; j++){	
alf_luma_coeff_abs[altIdx][sIdx][j]	ue(v)
if(alf_luma_coeff_abs[altIdx][sIdx][j])	
alf_luma_coeff_sign[altIdx][sIdx][j]	u(1)
}	
}	
if(alf_luma_clip_flag [altIdx])	
for(sIdx = 0; sIdx <=	
alf_luma_num_filters_signalled_minus1[altIdx]; sIdx++)	
for(j = 0; j <19; j++)	
alf_luma_clip_idx[altIdx][sIdx][j]	u(2)
}	
}	

[0241] alf_luma_num_alts_minus1 plus 1 specifies the number of alternative filter sets for luma component. The value of alf_luma_num_alts_minus1 shall be in the range of 0 to 3, inclusive. alf_luma_clip_flag[altIdx] equal to 0 specifies that linear adaptive loop filtering is applied to the alternative luma filter set with index altIdx luma component. alf_luma_clip_flag[altIdx] equal to 1 specifies that non-linear adaptive loop filtering could be applied to the alternative luma filter set with index altIdx luma component. alf_luma_num_filters_signalled_minus1[altIdx] plus 1 specifies the number of adaptive loop filter classes for which luma coefficients can be signalled of the alternative luma filter set with index altIdx. The value of alf_luma_num_filters_signalled_minus1[altIdx] shall be in the range of 0 to NumAlfFilters – 1, inclusive.

[0242] alf_luma_coeff_delta_idx[altIdx][filtIdx] specifies the indices of the signalled adaptive loop filter luma coefficient deltas for the filter class indicated by filtIdx ranging from 0 to

NumAlfFilters – 1 for the alternative luma filter set with index altIdx. When `alf_luma_coeff_delta_idx[ filtIdx ][ altIdx ]` is not present, it is inferred to be equal to 0. The length of `alf_luma_coeff_delta_idx[ altIdx ][ filtIdx ]` is $\text{Ceil}(\text{Log2}(\text{alf_luma_num_filters_signalled_minus1}[\text{altIdx}] + 1))$ bits. The value of `alf_luma_coeff_delta_idx[ altIdx ][ filtIdx ]` shall be in the range of 0 to `alf_luma_num_filters_signalled_minus1[ altIdx ]`, inclusive. `alf_luma_coeff_abs[ altIdx ][ sfIdx ][ j ]` specifies the absolute value of the j-th coefficient of the signalled luma filter indicated by `sfIdx` of the alternative luma filter set with index altIdx. When `alf_luma_coeff_abs[ altIdx ][ sfIdx ][ j ]` is not present, it is inferred to be equal 0. The value of `alf_luma_coeff_abs[ altIdx ][ sfIdx ][ j ]` shall be in the range of 0 to 128, inclusive.

[0243] `alf_luma_coeff_sign[ altIdx ][ sfIdx ][ j ]` specifies the sign of the j-th luma coefficient of the filter indicated by `sfIdx` of the alternative luma filter set with index altIdx as follows:

If `alf_luma_coeff_sign[ altIdx ][ sfIdx ][ j ]` is equal to 0, the corresponding luma filter coefficient has a positive value.

Otherwise (`alf_luma_coeff_sign[ altIdx ][ sfIdx ][ j ]` is equal to 1), the corresponding luma filter coefficient has a negative value.

When `alf_luma_coeff_sign[ altIdx ][ sfIdx ][ j ]` is not present, it is inferred to be equal to 0.

[0244] `alf_luma_clip_idx[ altIdx ][ sfIdx ][ j ]` specifies the clipping index of the clipping value to use before multiplying by the j-th coefficient of the signalled luma filter indicated by `sfIdx` of the alternative luma filter set with index altIdx. When `alf_luma_clip_idx[ altIdx ][ sfIdx ][ j ]` is not present, it is inferred to be equal to 0. The coding tree unit syntax elements of ALF associated to LUMA component in ECM are listed as follows:

<code>coding_tree_unit() {</code>	Descriptor
<code> xCtb = CtbAddrX << CtbLog2SizeY</code>	
<code> yCtb = CtbAddrY << CtbLog2SizeY</code>	
<code> if(sh_alf_enabled_flag){</code>	
<code> alf_ctb_flag[0][CtbAddrX][CtbAddrY]</code>	<code>ae(v)</code>
<code> if(alf_ctb_flag[0][CtbAddrX][CtbAddrY]) {</code>	
<code> if(sh_num_alf_aps_ids_luma > 0)</code>	
<code> alf_use_aps_flag</code>	<code>ae(v)</code>

if(alf_use_aps_flag) {	
if(sh_num_alf_aps_ids_luma > 1)	
alt_ctb_luma_filter_alt_idx[CtbAddrX][CtbAddrY]	ae(v)
alf_luma_prev_filter_idx	ae(v)
} else	
alf_luma_fixed_filter_idx	ae(v)
}	
}	

[0245] $\text{alf_ctb_luma_filter_alt_idx}[x\text{Ctb} \gg \text{CtbLog2SizeY}][y\text{Ctb} \gg \text{CtbLog2SizeY}]$ specifies the index of the alternative luma filters applied to the coding tree block of the luma component, of the coding tree unit at luma location $(x\text{Ctb}, y\text{Ctb})$. When $\text{alf_ctb_luma_filter_alt_idx}[x\text{Ctb} \gg \text{CtbLog2SizeY}][y\text{Ctb} \gg \text{CtbLog2SizeY}]$ is not present, it is inferred to be equal to zero.

3.8.2 Filter shapes

[0246] FIG. 10 illustrates an example of filter shapes for ALF. In the JEM, up to three diamond filter shapes (as shown in FIG. 10) can be selected for the luma component. An index is signalled at the picture level to indicate the filter shape used for the luma component. Each square represents a sample, and C_i (i being 0~6 (left), 0~12 (middle), 0~20 (right)) denotes the coefficient to be applied to the sample. For chroma components in a picture, the 5×5 diamond shape is always used. In VVC, the 7×7 diamond shape is always used for Luma while the 5×5 diamond shape is always used for Chroma.

3.8.3 Classification for ALF

[0247] Each 2×2 (or 4×4) block is categorized into one out of 25 classes. The classification index C is derived based on its directionality D and a quantized value of activity $\hat{A}$, as follows:

$$C = 5D + \hat{A}.$$

[0248] To calculate D and $\hat{A}$, gradients of the horizontal, vertical and two diagonal direction are first calculated using 1-D Laplacian:

$$\begin{aligned}
g_v &= \sum_{k=i-2}^{i+3} \sum_{l=j-2}^{j+3} V_{k,l}, \quad V_{k,l} = |2R(k,l) - R(k,l-1) - R(k,l+1)|, \\
g_h &= \sum_{k=i-2}^{i+3} \sum_{l=j-2}^{j+3} H_{k,l}, \quad H_{k,l} = |2R(k,l) - R(k-1,l) - R(k+1,l)|, \\
g_{d1} &= \sum_{k=i-2}^{i+3} \sum_{l=j-3}^{j+3} D1_{k,l}, \quad D1_{k,l} \\
&= |2R(k,l) - R(k-1,l-1) - R(k+1,l+1)| \\
g_{d2} &= \sum_{k=i-2}^{i+3} \sum_{l=j-2}^{j+3} D2_{k,l}, \quad D2_{k,l} \\
&= |2R(k,l) - R(k-1,l+1) - R(k+1,l-1)|
\end{aligned}$$

[0249] Indices i and j refer to the coordinates of the upper left sample in the 2×2 block and $R(i,j)$ indicates a reconstructed sample at coordinate (i,j) . Then D maximum and minimum values of the gradients of horizontal and vertical directions are set as:

$$g_{h,v}^{max} = \max(g_h, g_v), \quad g_{h,v}^{min} = \min(g_h, g_v),$$

and the maximum and minimum values of the gradient of two diagonal directions are set as:

$$g_{d0,d1}^{max} = \max(g_{d0}, g_{d1}), \quad g_{d0,d1}^{min} = \min(g_{d0}, g_{d1}),$$

[0250] To derive the value of the directionality D , these values are compared against each other and with two thresholds t_1 and t_2 :

Step 1. If both $g_{h,v}^{max} \leq t_1 \cdot g_{h,v}^{min}$ and $g_{d0,d1}^{max} \leq t_1 \cdot g_{d0,d1}^{min}$ are true, D is set to 0.

Step 2. If $g_{h,v}^{max}/g_{h,v}^{min} > g_{d0,d1}^{max}/g_{d0,d1}^{min}$, continue from Step 3; otherwise continue from Step 4.

Step 3. If $g_{h,v}^{max} > t_2 \cdot g_{h,v}^{min}$, D is set to 2; otherwise D is set to 1.

Step 4. If $g_{d0,d1}^{max} > t_2 \cdot g_{d0,d1}^{min}$, D is set to 4; otherwise D is set to 3.

[0251] The activity value A is calculated as:

$$A = \sum_{k=i-2}^{i+3} \sum_{l=j-2}^{j+3} (V_{k,l} + H_{k,l}).$$

[0252] A is further quantized to the range of 0 to 4, inclusively, and the quantized value is denoted as $\hat{A}$. For both chroma components in a picture, no classification method is applied, i.e. a single set of ALF coefficients is applied for each chroma component.

3.8.4 Geometric Transformations of Filter Coefficients

[0253] FIG. 11 illustrates an example of a relative coordinator for the 5x5 diamond filter support. Before filtering each 2x2 block, geometric transformations such as rotation or diagonal and vertical flipping are applied to the filter coefficients $f(k, l)$, which is associated with the coordinate (k, l) , depending on gradient values calculated for that block. This is equivalent to applying these transformations to the samples in the filter support region. The idea is to make different blocks to which ALF is applied more similar by aligning their directionality.

[0254] Three geometric transformations, including diagonal, vertical flip and rotation are introduced:

$$\text{Diagonal: } f_D(k, l) = f(l, k),$$

$$\text{Vertical flip: } f_V(k, l) = f(k, K - l - 1),$$

$$\text{Rotation: } f_R(k, l) = f(K - l - 1, k).$$

where K is the size of the filter and $0 \leq k, l \leq K - 1$ are coefficients coordinates, such that location $(0,0)$ is at the upper left corner and location $(K - 1, K - 1)$ is at the lower right corner. The transformations are applied to the filter coefficients $f(k, l)$ depending on gradient values calculated for that block. The relationship between the transformation and the four gradients of the four directions are summarized in Table 5. FIG. 11 shows the transformed coefficients for each position based on the 5x5 diamond.

Gradient values	Transformation
$g_{d2} < g_{d1}$ and $g_h < g_v$	No transformation
$g_{d2} < g_{d1}$ and $g_v < g_h$	Diagonal
$g_{d1} < g_{d2}$ and $g_h < g_v$	Vertical flip

$g_{d1} < g_{d2}$ and $g_v < g_h$	Rotation
-----------------------------------	----------

Table. 5 Mapping of the gradient calculated for one block and the transformations.

3.8.5 Filtering Process

[0255] At decoder side, when ALF is enabled for a block, each sample $R(i, j)$ within the block is filtered, resulting in sample value $R'(i, j)$ as shown below, where L denotes filter length, $f_{m,n}$ represents filter coefficient, and $f(k, l)$ denotes the decoded filter coefficients.

$$R'(i, j) = \sum_{k=-L/2}^{L/2} \sum_{l=-L/2}^{L/2} f(k, l) \times R(i + k, j + l)$$

[0256] FIG. 12 shows an example of relative coordinates used for 5x5 diamond filter support supposing the current sample's coordinate (i, j) to be $(0, 0)$. Samples in different coordinates filled with the same color are multiplied with the same filter coefficients.

3.8.6 Non-Linear Filtering Reformulation

[0257] Linear filtering can be reformulated, without coding efficiency impact, in the following expression:

$$O(x, y) = I(x, y) + \sum_{(i,j) \neq (0,0)} w(i, j) \cdot (I(x + i, y + j) - I(x, y))$$

where $w(i, j)$ are the same filter coefficients.

[0258] VVC introduces the non-linearity to make ALF more efficient by using a simple clipping function to reduce the impact of neighbor sample values $(I(x + i, y + j))$ when they are too different with the current sample value $(I(x, y))$ being filtered. More specifically, the ALF filter is modified as follows:

$$O'(x, y) = I(x, y) + \sum_{(i,j) \neq (0,0)} w(i, j) \cdot K(I(x + i, y + j) - I(x, y), k(i, j))$$

where $K(d, b) = \min(b, \max(-b, d))$ is the clipping function, and $k(i, j)$ are clipping parameters, which depends on the (i, j) filter coefficient. The encoder performs the optimization to find the best $k(i, j)$.

[0259] The clipping parameters $k(i, j)$ are specified for each ALF filter, one clipping value is signaled per filter coefficient. It means that up to 12 clipping values can be signaled in the bitstream

per Luma filter and up to 6 clipping values for the Chroma filter. In order to limit the signaling cost and the encoder complexity, only 4 fixed values which are the same for INTER and INTRA slices are used.

[0260] Because the variance of the local differences is often higher for Luma than for Chroma, two different sets for the Luma and Chroma filters are applied. The maximum sample value (here 1024 for 10 bits bit-depth) in each set is also introduced, so that clipping can be disabled if it is not necessary. The 4 values have been selected by roughly equally splitting, in the logarithmic domain, the full range of the sample values (coded on 10 bits) for Luma, and the range from 4 to 1024 for Chroma. More precisely, the Luma table of clipping values have been obtained by the following formula:

$$\text{AlfClip}_L = \left\{ \text{round} \left(\left((M)^{\frac{1}{N}} \right)^{N-n+1} \right) \text{ for } n \in 1..N \right\}, \text{ with } M=2^{10} \text{ and } N=4$$

[0261] Similarly, the Chroma tables of clipping values is obtained according to the following formula:

$$\text{AlfClip}_C = \left\{ \text{round} \left(A \cdot \left(\left(\frac{M}{A} \right)^{\frac{1}{N-1}} \right)^{N-n} \right) \text{ for } n \in 1..N \right\}, \text{ with } M=2^{10}, N=4 \text{ and } A=4$$

3.9 Bilateral In-loop Filter

3.9.1 Bilateral Image Filter

[0262] Bilateral image filter is a nonlinear filter that smooths the noise while preserving edge structures. The bilateral filtering is a technique to make the filter weights decrease not only with the distance between the samples but also with increasing difference in intensity. This way, over-smoothing of edges can be ameliorated. A weight is defined as

$$w(\Delta x, \Delta y, \Delta I) = e^{-\frac{\Delta x^2 + \Delta y^2}{2\sigma_d^2} - \frac{\Delta I^2}{2\sigma_r^2}}$$

where Δx and Δy is the distance in the vertical and horizontal and ΔI is the difference in intensity between the samples.

[0263] The edge-preserving de-noising bilateral filter adopts a low-pass Gaussian filter for both the domain filter and the range filter. The domain low-pass Gaussian filter gives higher weight to pixels that are spatially close to the center pixel. The range low-pass Gaussian filter gives higher weight to pixels that are similar to the center pixel. Combining the range filter and the domain filter, a bilateral filter at an edge pixel becomes an elongated Gaussian filter that is oriented along the edge

and is greatly reduced in gradient direction. This is the reason why the bilateral filter can smooth the noise while preserving edge structures.

3.9.2 Bilateral Filter in Video Coding

[0264] The bilateral filter in video coding is a coding tool for the VVC [2]. The filter acts as a loop filter in parallel with the sample adaptive offset (SAO) filter. Both the bilateral filter and SAO act on the same input samples, each filter produces an offset, and these offsets are then added to the input sample to produce an output sample that, after clipping, goes to the next stage. The spatial filtering strength σ_d is determined by the block size, with smaller blocks filtered more strongly, and the intensity filtering strength σ_r is determined by the quantization parameter, with stronger filtering being used for higher QPs. Only the four closest samples are used, so the filtered sample intensity I_F can be calculated as

$$I_F = I_C + \frac{w_A \Delta I_A + w_B \Delta I_B + w_L \Delta I_L + w_R \Delta I_R}{w_C + w_A + w_B + w_L + w_R}$$

where I_C denotes the intensity of the center sample, $\Delta I_A = I_A - I_C$ the intensity difference between the center sample and the sample above. ΔI_B , ΔI_L and ΔI_R denote the intensity difference between the center sample and that of the sample below, to the left and to the right respectively.

4. Technical problems solved by disclosed technical solutions

[0265] Example designs for adaptive loop filters (ALF) in video coding have the following problems.

[0266] In an example ALF design, only the reconstruction before a current stage is used. However, there is other valuable side information that can be potentially utilized, such as samples before a deblocking filter (DBF), a sample adaptive offset filter (SAO), and/or a bilateral filter (BF), prediction samples, residual information, partitioning information, QP information, and so on.

5. A listing of solutions and embodiments

[0267] To solve the above-described problems, methods as summarized below are disclosed. The embodiments should be considered as examples to explain the general concepts and should not be interpreted in a narrow way. Furthermore, these embodiments can be applied individually or combined in any manner.

[0268] It should be noted that the disclosed methods may be used as in-loop filters or post-processing.

[0269] In this disclosure, a video unit may refer to a sequence, a picture, a sub-picture, a slice, a CTU, a block, and/or a region. The video unit may comprise one color component or multiple color components.

[0270] In this disclosure, a processing unit may refer to a sequence, a picture, a sub-picture, a slice, a CTU, a block, a region, or a sample. The processing unit may comprise one color component or multiple color components.

[0271] In this disclosure, side information may refer to any coding information that is not input into SAO/ALF/CCALF in VVC.

Example 1

[0272] In one example, side information can be used for ALF.

Example 2

[0273] In an example, reconstruction before DBF/SAO/BF can be used as side information for ALF. In one example, the LUMA reconstruction before DBF/SAO/BF may be used as input source for at least one extended tap of the LUMA/CHROMA online-trained filters. In one example, the LUMA reconstruction before DBF/SAO/BF may be used as input source for at least one spatial tap of the LUMA/CHROMA online-trained filters. In one example, the LUMA reconstruction before DBF/SAO/BF may be used as input source for the LUMA offline-trained filters.

[0274] In one example, the LUMA reconstruction before DBF/SAO/BF may be used as input source for classification. In one example, the LUMA reconstruction before DBF/SAO/BF may be used as input source for classification of the LUMA online-trained filters. In one example, the LUMA reconstruction before DBF/SAO/BF may be used as input source for classification of the LUMA offline-trained filters.

[0275] In one example, the CHROMA reconstruction before DBF/SAO/BF may be used as input source for at least one extended tap of the LUMA/CHROMA online-trained filters. In one example, the CHROMA reconstruction before DBF/SAO/BF may be used as input source for at least one spatial tap of the LUMA/CHROMA online-trained filters.

[0276] In one example, the CHROMA reconstruction before DBF/SAO/BF may be used as input source for classification. In one example, the CHROMA reconstruction before DBF/SAO/BF may be used as input source for classification of the LUMA online-trained filters. In one example, the CHROMA reconstruction before DBF/SAO/BF may be used as input source for classification of the LUMA offline-trained filters.

Example 3

[0277] In one example, prediction samples can be used as side information for ALF.

[0278] In one example, the LUMA prediction samples may be used as input source for at least one extended tap of the LUMA/CHROMA online-trained filters. In one example, the LUMA prediction samples may be used as input source for at least one spatial tap of the LUMA/CHROMA online-trained filters. In one example, the LUMA prediction samples may be used as input source for the LUMA offline-trained filters.

[0279] In one example, the LUMA prediction samples may be used as input source for classification. In one example, the LUMA prediction samples may be used as input source for classification of the LUMA online-trained filters. In one example, the LUMA prediction samples may be used as input source for classification of the LUMA offline-trained filters.

[0280] In one example, the CHROMA prediction samples may be used as input source for at least one extended tap of the LUMA/CHROMA online-trained filters. In one example, the CHROMA prediction samples may be used as input source for at least one spatial tap of the LUMA/CHROMA online-trained filters.

[0281] In one example, the CHROMA prediction samples may be used as input source for classification. In one example, the CHROMA prediction samples may be used as input source for classification of the LUMA online-trained filters. In one example, the CHROMA prediction samples may be used as input source for classification of the LUMA offline-trained filters.

[0282] The prediction samples may be modified before being put into ALF. The modification may be filtering. The modification may be down-sampling/up-sampling. The modification may be clipping/shifting.

Example 4

[0283] It is proposed to use residual values as side information for ALF.

[0284] In one example, the LUMA residual values may be used as input source for at least one extended tap of the LUMA/CHROMA online-trained filters. In one example, the LUMA residual values may be used as input source for at least one spatial tap of the LUMA/CHROMA online-trained filters. In one example, the LUMA residual values may be used as input source for the LUMA offline-trained filters.

[0285] In one example, the LUMA residual values may be used as input source for classification. In one example, the LUMA residual values may be used as input source for classification of the

LUMA online-trained filters. In one example, the LUMA p residual values may be used as input source for classification of the LUMA offline-trained filters.

[0286] In one example, the CHROMA residual values may be used as input source for at least one extended tap of the LUMA/CHROMA online-trained filters. In one example, the CHROMA residual values may be used as input source for at least one spatial tap of the LUMA/CHROMA online-trained filters.

[0287] In one example, the CHROMA residual values may be used as input source for classification. In one example, the CHROMA residual values may be used as input source for classification of the LUMA online-trained filters. In one example, the CHROMA residual values may be used as input source for classification of the LUMA offline-trained filters.

[0288] The residual values may be modified before being put into ALF. The modification may be filtering. The modification may be down-sampling/up-sampling. The modification may be clipping/shifting.

Example 5

[0289] In one example, partitioning information can be used as side information for ALF.

[0290] In one example, the partitioning information may stand for block size/shape/location or other information.

[0291] In one example, the LUMA partitioning information may be used for classification. In one example, the LUMA partitioning information may be used for classification of the LUMA online-trained filters. In one example, the LUMA partitioning information may be used for classification of the LUMA offline-trained filters.

[0292] In one example, the CHROMA partitioning information may be used for classification. In one example, the CHROMA partitioning information may be used for classification of the LUMA online-trained filters. In one example, the CHROMA partitioning information may be used for classification of the LUMA offline-trained filters.

[0293] In one example, the LUMA partitioning information may be used filter training. In one example, the LUMA partitioning information may be used for training LUMA online-trained filters. In one example, the LUMA partitioning information may be used for training CHROMA online-trained filters.

[0294] In one example, the CHROMA partitioning information may be used filter training. In one example, the CHROMA partitioning information may be used for training LUMA online-trained

filters. In one example, the CHROMA partitioning information may be used for training CHROMA online-trained filters.

[0295] In one example, the LUMA/CHROMA partitioning information may be involved in filtering process.

Example 6

[0296] In one example, QP information can be used as side information for ALF.

[0297] In one example, QP information may stand for picture/slice/block level QP information.

[0298] In one example, the LUMA QP information may be used for classification. In one example, the LUMA QP information may be used for classification of the LUMA online-trained filters. In one example, the LUMA QP information may be used for classification of the LUMA offline-trained filters.

[0299] In one example, the CHROMA QP information may be used for classification. In one example, the CHROMA QP information may be used for classification of the LUMA online-trained filters. In one example, the CHROMA QP information may be used for classification of the LUMA offline-trained filters.

[0300] In one example, the LUMA QP information may be used filter training. In one example, the LUMA QP information may be used for training LUMA online-trained filters. In one example, the LUMA QP information may be used for training CHROMA online-trained filters.

[0301] In one example, the CHROMA QP information may be used filter training. In one example, the CHROMA QP information may be used for training LUMA online-trained filters. In one example, the CHROMA QP information may be used for training CHROMA online-trained filters.

[0302] In one example, the LUMA/CHROMA QP information may be involved in filtering process.

Example 7

[0303] In an example, boundary strength information can be used as side information for ALF.

[0304] In one example, the boundary strength information may be generated by DBF or other methods.

[0305] In one example, the LUMA boundary strength information may be used for classification. In one example, the LUMA boundary strength information may be used for

classification of the LUMA online-trained filters. In one example, the LUMA boundary strength information may be used for classification of the LUMA offline-trained filters.

[0306] In one example, the CHROMA boundary strength information may be used for classification. In one example, the CHROMA boundary strength information may be used for classification of the LUMA online-trained filters. In one example, the CHROMA boundary strength information may be used for classification of the LUMA offline-trained filters.

[0307] In one example, the LUMA boundary strength information may be used filter training. In one example, the LUMA boundary strength information may be used for training LUMA online-trained filters. In one example, the LUMA boundary strength information may be used for training CHROMA online-trained filters.

[0308] In one example, the CHROMA boundary strength information may be used filter training. In one example, the CHROMA boundary strength information may be used for training LUMA online-trained filters. In one example, the CHROMA boundary strength information may be used for training CHROMA online-trained filters.

[0309] In one example, the LUMA/CHROMA boundary strength information may be involved in filtering process of LUMA/CHROMA online-trained filters of ALF.

Example 8

[0310] In one example, side information for CCALF can be used.

Example 9

[0311] In one example, the reconstruction before DBF/SAO/BF can be used as side information for CCALF. In one example, the LUMA reconstruction before DBF/SAO/BF may be used as input source for at least one extended tap for CCALF. In one example, the LUMA reconstruction before DBF/SAO/BF may be used as input source for at least one spatial tap for CCALF. In one example, the CHROMA reconstruction before DBF/SAO/BF may be used as input source for at least one extended tap for CCALF. In one example, the CHROMA reconstruction before DBF/SAO/BF may be used as input source for at least one spatial tap for CCALF.

Example 10

[0312] In an example, prediction samples can be used as side information for CCALF.

[0313] In one example, the LUMA prediction samples may be used as input source for at least one extended tap for CCALF. In one example, the LUMA prediction samples may be used as input source for at least one spatial tap for CCALF. In one example, the CHROMA prediction samples

may be used as input source for at least one extended tap for CCALF. In one example, the CHROMA prediction samples may be used as input source for at least one spatial tap for CCALF.

[0314] The prediction samples may be modified before being put into CCALF. The modification may be filtering. The modification may be down-sampling/up-sampling. The modification may be clipping/shifting.

Example 11

[0315] In one example, residual values can be used as side information for CCALF.

[0316] In one example, the LUMA residual values may be used as input source for at least one extended tap for CCALF. In one example, the LUMA residual values may be used as input source for at least one spatial tap for CCALF. In one example, the CHROMA residual values may be used as input source for at least one extended tap for CCALF. In one example, the CHROMA residual values may be used as input source for at least one spatial tap for CCALF.

[0317] The residual values may be modified before being put into CCALF. The modification may be filtering. The modification may be down-sampling/up-sampling. The modification may be clipping/shifting.

Example 12

[0318] In one example, partitioning information can be used as side information for CCALF. In one example, the partitioning information may stand for block size/shape/location or other information. In one example, the LUMA partitioning information may be used for training online-trained filters of CCALF. In one example, the CHROMA partitioning information may be used for training online-trained filters of CCALF. In one example, the LUMA/CHROMA partitioning information may be involved into filtering process of CCALF.

Example 13

[0319] In one example, QP information can be used as side information for CCALF. In one example, the QP information may stand for picture/slice/block level QP information. In one example, the LUMA QP information may be used for training online-trained filters of CCALF. In one example, the CHROMA QP information may be used for training online-trained filters of CCALF. In one example, the LUMA/CHROMA QP information may be involved into filtering process of CCALF.

Example 14

[0320] In one example, boundary strength information can be used as side information for CCALF. In one example, the boundary strength information may be generated by DBF or other methods. In one example, the LUMA boundary strength information may be used for training online-trained filters of CCALF. In one example, the CHROMA boundary strength information may be used for training online-trained filters of CCALF. In one example, the LUMA/CHROMA boundary strength information may be involved into filtering process of CCALF.

Example 15

[0321] In one example, the disclosed methods may be used in post-processing and/or pre-processing.

Example 16

[0322] In one example, the above-mentioned methods may be used jointly.

Example 17

[0323] In one example, the above-mentioned methods may be used individually.

Example 18

[0324] In one example, the described side information utilization method may be applied to any in-loop filtering tools, pre-processing, or post-processing filtering method in video coding (including but not limited to ALF/CCALF or any other filtering method).

Example 19

[0325] In one example, the proposed side information utilization method may be applied to an in-loop filtering method. In one example, the proposed side information utilization method may be applied to ALF. In one example, the proposed side information utilization method may be applied to CCALF. In one example, the proposed side information utilization method may be applied to SAO. In one example, the proposed side information utilization method may be applied to CCSAO. In one example, the proposed side information utilization method may be applied to Bilateral Filter (BF). In one example, the proposed side information utilization method may be applied to Hadamard Transform Domain Filter (HTDF). Alternatively, the proposed side information utilization method may be applied to other in-loop filtering methods.

Example 20

[0326] In one example, the side information utilization method may be applied to a pre-processing filtering method. In one example, the side information utilization method may be applied to a post-processing filtering method.

Example 21

[0327] In above examples, the video unit may refer to sequence/picture/sub-picture/slice/tile/coding tree unit (CTU)/CTU row/groups of CTU/coding unit (CU)/prediction unit (PU)/transform unit (TU)/ coding tree block (CTB)/ coding block (CB)/prediction block (PB)/transform block (TB)/any other region that contains more than one luma or chroma sample/pixel.

Example 22

[0328] Whether to and/or how to apply the disclosed methods above may be signaled in a bitstream.

[0329] In one example, they may be signaled at sequence level/group of pictures level/picture level/slice level/tile group level, such as in a sequence header, picture header, SPS, VPS, DPS, DCI, PPS, APS, slice header, and tile group header.

[0330] In one example, they may be signaled at PB, TB, CB, PU, TU, CU, VPDU, CTU, CTU row, slice, tile, sub-picture, other kinds of region contain more than one sample or pixel.

Example 23

[0331] Whether to and/or how to apply the disclosed methods above may be dependent on coded information, such as block size, color format, single/dual tree partitioning, color component, slice/picture type.

6. References

[1] J. Strom, P. Wennersten, J. Enhorn, D. Liu, K. Andersson and R. Sjoberg, "Bilateral Loop Filter in Combination with SAO," in proceeding of IEEE Picture Coding Symposium (PCS), Nov. 2019.

[0332] FIG. 13 is a block diagram showing an example video processing system 4000 in which various techniques disclosed herein may be implemented. Various implementations may include some or all of the components of the system 4000. The system 4000 may include input 4002 for receiving video content. The video content may be received in a raw or uncompressed format, e.g., 8 or 10 bit multi-component pixel values, or may be in a compressed or encoded format. The input 4002 may represent a network interface, a peripheral bus interface, or a storage interface. Examples

of network interface include wired interfaces such as Ethernet, passive optical network (PON), etc. and wireless interfaces such as wireless fidelity (Wi-Fi) or cellular interfaces.

[0333] The system 4000 may include a coding component 4004 that may implement the various coding or encoding methods described in the present disclosure. The coding component 4004 may reduce the average bitrate of video from the input 4002 to the output of the coding component 4004 to produce a coded representation of the video. The coding techniques are therefore sometimes called video compression or video transcoding techniques. The output of the coding component 4004 may be either stored, or transmitted via a communication connected, as represented by the component 4006. The stored or communicated bitstream (or coded) representation of the video received at the input 4002 may be used by a component 4008 for generating pixel values or displayable video that is sent to a display interface 4010. The process of generating user-viewable video from the bitstream representation is sometimes called video decompression. Furthermore, while certain video processing operations are referred to as “coding” operations or tools, it will be appreciated that the coding tools or operations are used at an encoder and corresponding decoding tools or operations that reverse the results of the coding will be performed by a decoder.

[0334] Examples of a peripheral bus interface or a display interface may include universal serial bus (USB) or high definition multimedia interface (HDMI) or Displayport, and so on. Examples of storage interfaces include serial advanced technology attachment (SATA), peripheral component interconnect (PCI), integrated drive electronics (IDE) interface, and the like. The techniques described in the present disclosure may be embodied in various electronic devices such as mobile phones, laptops, smartphones or other devices that are capable of performing digital data processing and/or video display.

[0335] FIG. 14 is a block diagram of an example video processing apparatus 4100. The apparatus 4100 may be used to implement one or more of the methods described herein. The apparatus 4100 may be embodied in a smartphone, tablet, computer, Internet of Things (IoT) receiver, and so on. The apparatus 4100 may include one or more processors 4102, one or more memories 4104 and video processing circuitry 4106. The processor(s) 4102 may be configured to implement one or more methods described in the present disclosure. The memory (memories) 4104 may be used for storing data and code used for implementing the methods and techniques described herein. The video processing circuitry 4106 may be used to implement, in hardware circuitry, some

techniques described in the present disclosure. In some embodiments, the video processing circuitry 4106 may be at least partly included in the processor 4102, e.g., a graphics co-processor.

[0336] FIG. 15 is a flowchart for an example method 4200 of video processing. The method 4200 includes determining to employ side information as input to an ALF at step 4202. A conversion is performed between a visual media data and a bitstream based on the ALF at step 4204. The conversion of step 4204 may include encoding at an encoder or decoding at a decoder, depending on the example.

[0337] It should be noted that the method 4200 can be implemented in an apparatus for processing video data comprising a processor and a non-transitory memory with instructions thereon, such as video encoder 4400, video decoder 4500, and/or encoder 4600. In such a case, the instructions upon execution by the processor, cause the processor to perform the method 4200. Further, the method 4200 can be performed by a non-transitory computer readable medium comprising a computer program product for use by a video coding device. The computer program product comprises computer executable instructions stored on the non-transitory computer readable medium such that when executed by a processor cause the video coding device to perform the method 4200.

[0338] FIG. 16 is a block diagram that illustrates an example video coding system 4300 that may utilize the techniques of this disclosure. The video coding system 4300 may include a source device 4310 and a destination device 4320. Source device 4310 generates encoded video data which may be referred to as a video encoding device. Destination device 4320 may decode the encoded video data generated by source device 4310 which may be referred to as a video decoding device.

[0339] Source device 4310 may include a video source 4312, a video encoder 4314, and an input/output (I/O) interface 4316. Video source 4312 may include a source such as a video capture device, an interface to receive video data from a video content provider, and/or a computer graphics system for generating video data, or a combination of such sources. The video data may comprise one or more pictures. Video encoder 4314 encodes the video data from video source 4312 to generate a bitstream. The bitstream may include a sequence of bits that form a coded representation of the video data. The bitstream may include coded pictures and associated data. The coded picture is a coded representation of a picture. The associated data may include sequence parameter sets, picture parameter sets, and other syntax structures. I/O interface 4316 may include a modulator/demodulator (modem) and/or a transmitter. The encoded video data may be transmitted directly to destination

device 4320 via I/O interface 4316 through network 4330. The encoded video data may also be stored onto a storage medium/server 4340 for access by destination device 4320.

[0340] Destination device 4320 may include an I/O interface 4326, a video decoder 4324, and a display device 4322. I/O interface 4326 may include a receiver and/or a modem. I/O interface 4326 may acquire encoded video data from the source device 4310 or the storage medium/ server 4340. Video decoder 4324 may decode the encoded video data. Display device 4322 may display the decoded video data to a user. Display device 4322 may be integrated with the destination device 4320, or may be external to destination device 4320, which can be configured to interface with an external display device.

[0341] Video encoder 4314 and video decoder 4324 may operate according to a video compression standard, such as the High Efficiency Video Coding (HEVC) standard, Versatile Video Coding (VVM) standard and other current and/or further standards.

[0342] FIG. 17 is a block diagram illustrating an example of video encoder 4400, which may be video encoder 4314 in the system 4300 illustrated in FIG. 16. Video encoder 4400 may be configured to perform any or all of the techniques of this disclosure. The video encoder 4400 includes a plurality of functional components. The techniques described in this disclosure may be shared among the various components of video encoder 4400. In some examples, a processor may be configured to perform any or all of the techniques described in this disclosure.

[0343] The functional components of video encoder 4400 may include a partition unit 4401, a prediction unit 4402 which may include a mode select unit 4403, a motion estimation unit 4404, a motion compensation unit 4405, an intra prediction unit 4406, a residual generation unit 4407, a transform processing unit 4408, a quantization unit 4409, an inverse quantization unit 4410, an inverse transform unit 4411, a reconstruction unit 4412, a buffer 4413, and an entropy encoding unit 4414.

[0344] In other examples, video encoder 4400 may include more, fewer, or different functional components. In an example, prediction unit 4402 may include an intra block copy (IBC) unit. The IBC unit may perform prediction in an IBC mode in which at least one reference picture is a picture where the current video block is located.

[0345] Furthermore, some components, such as motion estimation unit 4404 and motion compensation unit 4405 may be highly integrated, but are represented in the example of video encoder 4400 separately for purposes of explanation.

[0346] Partition unit 4401 may partition a picture into one or more video blocks. Video encoder 4400 and video decoder 4500 may support various video block sizes.

[0347] Mode select unit 4403 may select one of the coding modes, intra or inter, e.g., based on error results, and provide the resulting intra or inter coded block to a residual generation unit 4407 to generate residual block data and to a reconstruction unit 4412 to reconstruct the encoded block for use as a reference picture. In some examples, mode select unit 4403 may select a combination of intra and inter prediction (CIIP) mode in which the prediction is based on an inter prediction signal and an intra prediction signal. Mode select unit 4403 may also select a resolution for a motion vector (e.g., a sub-pixel or integer pixel precision) for the block in the case of inter prediction.

[0348] To perform inter prediction on a current video block, motion estimation unit 4404 may generate motion information for the current video block by comparing one or more reference frames from buffer 4413 to the current video block. Motion compensation unit 4405 may determine a predicted video block for the current video block based on the motion information and decoded samples of pictures from buffer 4413 other than the picture associated with the current video block.

[0349] Motion estimation unit 4404 and motion compensation unit 4405 may perform different operations for a current video block, for example, depending on whether the current video block is in an I slice, a P slice, or a B slice.

[0350] In some examples, motion estimation unit 4404 may perform uni-directional prediction for the current video block, and motion estimation unit 4404 may search reference pictures of list 0 or list 1 for a reference video block for the current video block. Motion estimation unit 4404 may then generate a reference index that indicates the reference picture in list 0 or list 1 that contains the reference video block and a motion vector that indicates a spatial displacement between the current video block and the reference video block. Motion estimation unit 4404 may output the reference index, a prediction direction indicator, and the motion vector as the motion information of the current video block. Motion compensation unit 4405 may generate the predicted video block of the current block based on the reference video block indicated by the motion information of the current video block.

[0351] In other examples, motion estimation unit 4404 may perform bi-directional prediction for the current video block, motion estimation unit 4404 may search the reference pictures in list 0 for a reference video block for the current video block and may also search the reference pictures in list 1 for another reference video block for the current video block. Motion estimation unit 4404 may

then generate reference indexes that indicate the reference pictures in list 0 and list 1 containing the reference video blocks and motion vectors that indicate spatial displacements between the reference video blocks and the current video block. Motion estimation unit 4404 may output the reference indexes and the motion vectors of the current video block as the motion information of the current video block. Motion compensation unit 4405 may generate the predicted video block of the current video block based on the reference video blocks indicated by the motion information of the current video block.

[0352] In some examples, motion estimation unit 4404 may output a full set of motion information for decoding processing of a decoder. In some examples, motion estimation unit 4404 may not output a full set of motion information for the current video. Rather, motion estimation unit 4404 may signal the motion information of the current video block with reference to the motion information of another video block. For example, motion estimation unit 4404 may determine that the motion information of the current video block is sufficiently similar to the motion information of a neighboring video block.

[0353] In one example, motion estimation unit 4404 may indicate, in a syntax structure associated with the current video block, a value that indicates to the video decoder 4500 that the current video block has the same motion information as another video block.

[0354] In another example, motion estimation unit 4404 may identify, in a syntax structure associated with the current video block, another video block and a motion vector difference (MVD). The motion vector difference indicates a difference between the motion vector of the current video block and the motion vector of the indicated video block. The video decoder 4500 may use the motion vector of the indicated video block and the motion vector difference to determine the motion vector of the current video block.

[0355] As discussed above, video encoder 4400 may predictively signal the motion vector. Two examples of predictive signaling techniques that may be implemented by video encoder 4400 include advanced motion vector prediction (AMVP) and merge mode signaling.

[0356] Intra prediction unit 4406 may perform intra prediction on the current video block. When intra prediction unit 4406 performs intra prediction on the current video block, intra prediction unit 4406 may generate prediction data for the current video block based on decoded samples of other video blocks in the same picture. The prediction data for the current video block may include a predicted video block and various syntax elements.

[0357] Residual generation unit 4407 may generate residual data for the current video block by subtracting the predicted video block(s) of the current video block from the current video block. The residual data of the current video block may include residual video blocks that correspond to different sample components of the samples in the current video block.

[0358] In other examples, there may be no residual data for the current video block for the current video block, for example in a skip mode, and residual generation unit 4407 may not perform the subtracting operation.

[0359] Transform processing unit 4408 may generate one or more transform coefficient video blocks for the current video block by applying one or more transforms to a residual video block associated with the current video block.

[0360] After transform processing unit 4408 generates a transform coefficient video block associated with the current video block, quantization unit 4409 may quantize the transform coefficient video block associated with the current video block based on one or more quantization parameter (QP) values associated with the current video block.

[0361] Inverse quantization unit 4410 and inverse transform unit 4411 may apply inverse quantization and inverse transforms to the transform coefficient video block, respectively, to reconstruct a residual video block from the transform coefficient video block. Reconstruction unit 4412 may add the reconstructed residual video block to corresponding samples from one or more predicted video blocks generated by the prediction unit 4402 to produce a reconstructed video block associated with the current block for storage in the buffer 4413.

[0362] After reconstruction unit 4412 reconstructs the video block, the loop filtering operation may be performed to reduce video blocking artifacts in the video block.

[0363] Entropy encoding unit 4414 may receive data from other functional components of the video encoder 4400. When entropy encoding unit 4414 receives the data, entropy encoding unit 4414 may perform one or more entropy encoding operations to generate entropy encoded data and output a bitstream that includes the entropy encoded data.

[0364] FIG. 18 is a block diagram illustrating an example of video decoder 4500 which may be video decoder 4324 in the system 4300 illustrated in FIG. 16. The video decoder 4500 may be configured to perform any or all of the techniques of this disclosure. In the example shown, the video decoder 4500 includes a plurality of functional components. The techniques described in this disclosure may be shared among the various components of the video decoder 4500. In some

examples, a processor may be configured to perform any or all of the techniques described in this disclosure.

[0365] In the example shown, video decoder 4500 includes an entropy decoding unit 4501, a motion compensation unit 4502, an intra prediction unit 4503, an inverse quantization unit 4504, an inverse transformation unit 4505, a reconstruction unit 4506, and a buffer 4507. Video decoder 4500 may, in some examples, perform a decoding pass generally reciprocal to the encoding pass described with respect to video encoder 4400.

[0366] Entropy decoding unit 4501 may retrieve an encoded bitstream. The encoded bitstream may include entropy coded video data (e.g., encoded blocks of video data). Entropy decoding unit 4501 may decode the entropy coded video data, and from the entropy decoded video data, motion compensation unit 4502 may determine motion information including motion vectors, motion vector precision, reference picture list indexes, and other motion information. Motion compensation unit 4502 may, for example, determine such information by performing the AMVP and merge mode.

[0367] Motion compensation unit 4502 may produce motion compensated blocks, possibly performing interpolation based on interpolation filters. Identifiers for interpolation filters to be used with sub-pixel precision may be included in the syntax elements.

[0368] Motion compensation unit 4502 may use interpolation filters as used by video encoder 4400 during encoding of the video block to calculate interpolated values for sub-integer pixels of a reference block. Motion compensation unit 4502 may determine the interpolation filters used by video encoder 4400 according to received syntax information and use the interpolation filters to produce predictive blocks.

[0369] Motion compensation unit 4502 may use some of the syntax information to determine sizes of blocks used to encode frame(s) and/or slice(s) of the encoded video sequence, partition information that describes how each macroblock of a picture of the encoded video sequence is partitioned, modes indicating how each partition is encoded, one or more reference frames (and reference frame lists) for each inter coded block, and other information to decode the encoded video sequence.

[0370] Intra prediction unit 4503 may use intra prediction modes for example received in the bitstream to form a prediction block from spatially adjacent blocks. Inverse quantization unit 4504 inverse quantizes, i.e., de-quantizes, the quantized video block coefficients provided in the bitstream

and decoded by entropy decoding unit 4501. Inverse transform unit 4505 applies an inverse transform.

[0371] Reconstruction unit 4506 may sum the residual blocks with the corresponding prediction blocks generated by motion compensation unit 4502 or intra prediction unit 4503 to form decoded blocks. If desired, a deblocking filter may also be applied to filter the decoded blocks in order to remove blockiness artifacts. The decoded video blocks are then stored in buffer 4507, which provides reference blocks for subsequent motion compensation/intra prediction and also produces decoded video for presentation on a display device.

[0372] FIG. 19 is a schematic diagram of an example encoder 4600. The encoder 4600 is suitable for implementing the techniques of VVC. The encoder 4600 includes three in-loop filters, namely a deblocking filter (DF) 4602, a sample adaptive offset (SAO) 4604, and an adaptive loop filter (ALF) 4606. Unlike the DF 4602, which uses predefined filters, the SAO 4604 and the ALF 4606 utilize the original samples of the current picture to reduce the mean square errors between the original samples and the reconstructed samples by adding an offset and by applying a finite impulse response (FIR) filter, respectively, with coded side information signaling the offsets and filter coefficients. The ALF 4606 is located at the last processing stage of each picture and can be regarded as a tool trying to catch and fix artifacts created by the previous stages.

[0373] The encoder 4600 further includes an intra prediction component 4608 and a motion estimation/compensation (ME/MC) component 4610 configured to receive input video. The intra prediction component 4608 is configured to perform intra prediction, while the ME/MC component 4610 is configured to utilize reference pictures obtained from a reference picture buffer 4612 to perform inter prediction. Residual blocks from inter prediction or intra prediction are fed into a transform (T) component 4614 and a quantization (Q) component 4616 to generate quantized residual transform coefficients, which are fed into an entropy coding component 4618. The entropy coding component 4618 entropy codes the prediction results and the quantized transform coefficients and transmits the same toward a video decoder (not shown). Quantization components output from the quantization component 4616 may be fed into an inverse quantization (IQ) components 4620, an inverse transform component 4622, and a reconstruction (REC) component 4624. The REC component 4624 is able to output images to the DF 4602, the SAO 4604, and the ALF 4606 for filtering prior to those images being stored in the reference picture buffer 4612.

[0374] FIG. 20 is a method for processing video data in accordance with an embodiment of the disclosure. In block 2002, the method includes using side information as an input to an adaptive loop filter (ALF). In block 2004, the method includes performing a conversion between a visual media data and a bitstream based on the ALF.

[0375]

[0376] A listing of solutions preferred by some examples is provided next.

[0377] The following solutions show examples of techniques discussed herein.

[0378] 1. A method for processing video data comprising: determining to employ side information as input to an adaptive loop filter (ALF); and performing a conversion between a visual media data and a bitstream based on the ALF.

[0379] 2. The method of solution 1, wherein the side information includes a luma reconstruction sample obtained prior to application of a deblocking filter (DBF), a sample adaptive offset (SAO) filter, or a bilateral filter (BF).

[0380] 3. The method of any of solutions 1-2, wherein the side information includes a chroma reconstruction sample obtained prior to application of a DBF, a SAO, or a BF.

[0381] 4. The method of any of solutions 1-3, wherein the side information is used as an input source for an extended tap or a spatial tap of an online-trained filter.

[0382] 5. The method of any of solutions 1-4, wherein the side information is used as an input source for offline-trained filter.

[0383] 6. The method of any of solutions 1-5 wherein the side information is used as an input source for classification.

[0384] 7. The method of any of solutions 1-6, wherein the side information is used as an input source for classification at a luma online-trained filter or a luma offline-trained filter.

[0385] 8. The method of any of solutions 1-7, wherein the side information includes a prediction sample, and wherein the prediction sample is a luma prediction sample or a chroma prediction sample.

[0386] 9. The method of any of solutions 1-8, wherein the prediction sample is modified, prior to use as side information, by filtering, down-sampling, up-sampling, clipping, shifting, or combinations thereof.

[0387] 10. The method of any of solutions 1-9, wherein the side information includes a residual value, and wherein the residual value is a luma residual value or a chroma residual value.

- [0388] 11. The method of any of solutions 1-10, wherein the residual value is modified, prior to use as side information, by filtering, down-sampling, up-sampling, clipping, shifting, or combinations thereof.
- [0389] 12. The method of any of solutions 1-11, wherein the side information includes partitioning information, and wherein the partitioning information is luma partitioning information or chroma partitioning information.
- [0390] 13. The method of any of solutions 1-12, wherein the partitioning information includes block size, block shape, block location, or combinations thereof.
- [0391] 14. The method of any of solutions 1-13, wherein the side information is used for training luma online-trained filters or chroma online-trained filters.
- [0392] 15. The method of any of solutions 1-14, wherein the side information is used as part of a filtering process in the ALF.
- [0393] 16. The method of any of solutions 1-15, wherein the side information includes quantization parameter (QP) information, and wherein the QP information include luma QP information or chroma QP information.
- [0394] 17. The method of any of solutions 1-16, wherein the QP information includes picture QP information, slice QP information, block QP information, or combinations thereof.
- [0395] 18. The method of any of solutions 1-17, wherein the side information includes boundary strength information, and wherein the boundary strength information includes luma boundary strength information or chroma boundary strength information.
- [0396] 19. The method of any of solutions 1-18, wherein the boundary strength information is generated by a DBF.
- [0397] 20. The method of any of solutions 1-19, wherein the ALF is a cross-component ALF (CCALF).
- [0398] 21. The method of any of solutions 1-20, wherein the method is used in pre-processing or post-processing of a video.
- [0399] 22. The method of any of solutions 1-21, wherein the method is applied as part of an in-loop filter, and wherein the method is applied to an ALF, a CCALF, a sample adaptive offset (SAO) filter, a cross-component SAO (CCSAO), bilateral filter (BF), Hadamard transform domain filter (HTDF), or combinations thereof.

[0400] 23. The method of any of solutions 1-22, wherein the ALF is applied to a video unit, and wherein the video unit is a sequence, picture, sub-picture, slice, tile, coding tree unit (CTU), CTU row, group of CTUs, coding unit (CU), prediction unit (PU), transform unit (TU), coding tree block (CTB), coding block (CB), prediction block (PB), transform block (TB), or any other region that contains more than one luma or chroma sample or pixel.

[0401] 24. The method of any of solutions 1-23, wherein application of the method is signaled in the bitstream.

[0402] 25. The method of any of solutions 1-24, wherein application of the method is dependent on coded information.

[0403] 26. An apparatus for processing video data comprising: a processor; and a non-transitory memory with instructions thereon, wherein the instructions upon execution by the processor, cause the processor to perform the method of any of solutions 1-25.

[0404] 27. A non-transitory computer readable medium comprising a computer program product for use by a video coding device, the computer program product comprising computer executable instructions stored on the non-transitory computer readable medium such that when executed by a processor cause the video coding device to perform the method of any of solutions 1-25.

[0405] 28. A non-transitory computer-readable recording medium storing a bitstream of a video which is generated by a method performed by a video processing apparatus, wherein the method comprises: determining to employ side information as input to an adaptive loop filter (ALF); and generating the bitstream based on the determining.

[0406] 29. A method for storing bitstream of a video comprising: determining to employ side information as input to an adaptive loop filter (ALF); generating the bitstream based on the determining; and storing the bitstream in a non-transitory computer-readable recording medium.

[0407] 30. A method, apparatus, or system described in the present disclosure.

[0408] In the solutions described herein, an encoder may conform to the format rule by producing a coded representation according to the format rule. In the solutions described herein, a decoder may use the format rule to parse syntax elements in the coded representation with the knowledge of presence and absence of syntax elements according to the format rule to produce decoded video.

[0409] In the present disclosure, the term “video processing” may refer to video encoding, video decoding, video compression or video decompression. For example, video compression algorithms may be applied during conversion from pixel representation of a video to a corresponding bitstream representation or vice versa. The bitstream representation of a current video block may, for example, correspond to bits that are either co-located or spread in different places within the bitstream, as is defined by the syntax. For example, a macroblock may be encoded in terms of transformed and coded error residual values and also using bits in headers and other fields in the bitstream. Furthermore, during conversion, a decoder may parse a bitstream with the knowledge that some fields may be present, or absent, based on the determination, as is described in the above solutions. Similarly, an encoder may determine that certain syntax fields are or are not to be included and generate the coded representation accordingly by including or excluding the syntax fields from the coded representation.

[0410] The disclosed and other solutions, examples, embodiments, modules and the functional operations described in this disclosure can be implemented in digital electronic circuitry, or in computer software, firmware, or hardware, including the structures disclosed in this disclosure and their structural equivalents, or in combinations of one or more of them. The disclosed and other embodiments can be implemented as one or more computer program products, i.e., one or more modules of computer program instructions encoded on a computer readable medium for execution by, or to control the operation of, data processing apparatus. The computer readable medium can be a machine-readable storage device, a machine-readable storage substrate, a memory device, a composition of matter effecting a machine-readable propagated signal, or a combination of one or more them. The term “data processing apparatus” encompasses all apparatus, devices, and machines for processing data, including by way of example a programmable processor, a computer, or multiple processors or computers. The apparatus can include, in addition to hardware, code that creates an execution environment for the computer program in question, e.g., code that constitutes processor firmware, a protocol stack, a database management system, an operating system, or a combination of one or more of them. A propagated signal is an artificially generated signal, e.g., a machine-generated electrical, optical, or electromagnetic signal, that is generated to encode information for transmission to suitable receiver apparatus.

[0411] A computer program (also known as a program, software, software application, script, or code) can be written in any form of programming language, including compiled or interpreted

languages, and it can be deployed in any form, including as a stand-alone program or as a module, component, subroutine, or other unit suitable for use in a computing environment. A computer program does not necessarily correspond to a file in a file system. A program can be stored in a portion of a file that holds other programs or data (e.g., one or more scripts stored in a markup language document), in a single file dedicated to the program in question, or in multiple coordinated files (e.g., files that store one or more modules, sub programs, or portions of code). A computer program can be deployed to be executed on one computer or on multiple computers that are located at one site or distributed across multiple sites and interconnected by a communication network.

[0412] The processes and logic flows described in this disclosure can be performed by one or more programmable processors executing one or more computer programs to perform functions by operating on input data and generating output. The processes and logic flows can also be performed by, and apparatus can also be implemented as, special purpose logic circuitry, e.g., a field programmable gate array (FPGA) or an application specific integrated circuit (ASIC).

[0413] Processors suitable for the execution of a computer program include, by way of example, both general and special purpose microprocessors, and any one or more processors of any kind of digital computer. Generally, a processor will receive instructions and data from a read only memory or a random-access memory or both. The essential elements of a computer are a processor for performing instructions and one or more memory devices for storing instructions and data. Generally, a computer will also include, or be operatively coupled to receive data from or transfer data to, or both, one or more mass storage devices for storing data, e.g., magnetic, magneto optical disks, or optical disks. However, a computer need not have such devices. Computer readable media suitable for storing computer program instructions and data include all forms of non-volatile memory, media and memory devices, including by way of example semiconductor memory devices, e.g., erasable programmable read-only memory (EPROM), electrically erasable programmable read-only memory (EEPROM), and flash memory devices; magnetic disks, e.g., internal hard disks or removable disks; magneto optical disks; and compact disc read-only memory (CD ROM) and Digital versatile disc-read only memory (DVD-ROM) disks. The processor and the memory can be supplemented by, or incorporated in, special purpose logic circuitry.

[0414] While the present disclosure contains many specifics, these should not be construed as limitations on the scope of any subject matter or of what may be claimed, but rather as descriptions of features that may be specific to particular embodiments of particular techniques. Certain features

that are described in the present disclosure in the context of separate embodiments can also be implemented in combination in a single embodiment. Conversely, various features that are described in the context of a single embodiment can also be implemented in multiple embodiments separately or in any suitable subcombination. Moreover, although features may be described above as acting in certain combinations and even initially claimed as such, one or more features from a claimed combination can in some cases be excised from the combination, and the claimed combination may be directed to a subcombination or variation of a subcombination.

[0415] Similarly, while operations are depicted in the drawings in a particular order, this should not be understood as requiring that such operations be performed in the particular order shown or in sequential order, or that all illustrated operations be performed, to achieve desirable results. Moreover, the separation of various system components in the embodiments described in the present disclosure should not be understood as requiring such separation in all embodiments.

[0416] Only a few implementations and examples are described and other implementations, enhancements and variations can be made based on what is described and illustrated in the present disclosure.

[0417] A first component is directly coupled to a second component when there are no intervening components, except for a line, a trace, or another medium between the first component and the second component. The first component is indirectly coupled to the second component when there are intervening components other than a line, a trace, or another medium between the first component and the second component. The term “coupled” and its variants include both directly coupled and indirectly coupled. The use of the term “about” means a range including $\pm 10\%$ of the subsequent number unless otherwise stated.

[0418] While several embodiments have been provided in the present disclosure, it should be understood that the disclosed systems and methods might be embodied in many other specific forms without departing from the spirit or scope of the present disclosure. The present examples are to be considered as illustrative and not restrictive, and the intention is not to be limited to the details given herein. For example, the various elements or components may be combined or integrated in another system or certain features may be omitted, or not implemented.

[0419] In addition, techniques, systems, subsystems, and methods described and illustrated in the various embodiments as discrete or separate may be combined or integrated with other systems, modules, techniques, or methods without departing from the scope of the present disclosure. Other

items shown or discussed as coupled may be directly connected or may be indirectly coupled or communicating through some interface, device, or intermediate component whether electrically, mechanically, or otherwise. Other examples of changes, substitutions, and alterations are ascertainable by one skilled in the art and could be made without departing from the spirit and scope disclosed herein.

CLAIMS

What is claimed is:

1. A method for processing video data, comprising:
using side information as an input to an adaptive loop filter (ALF); and
performing a conversion between a visual media data and a bitstream based on the ALF.
2. The method of claim 1, wherein the side information comprises a reconstruction sample obtained before a deblocking filter (DBF), a sample adaptive offset (SAO) filter, or a bilateral filter (BF).
3. The method of claim 2, wherein the reconstruction sample comprises a luma reconstruction sample used as an input source for at least one extended tap of luma or chroma online-trained filters.
4. The method of claim 2, wherein the reconstruction sample comprises a luma reconstruction sample used as an input source for at least one spatial tap of luma or chroma online-trained filters.
5. The method of claim 2, wherein the reconstruction sample comprises a luma reconstruction sample used as an input source for luma offline-trained filters.
6. The method of claim 2, wherein the reconstruction sample comprises a luma reconstruction sample used as an input source for classification.
7. The method of claim 6, wherein the classification comprises classification of luma online-trained filters.
8. The method of claim 6, wherein the classification comprises classification of luma offline-trained filters.

9. The method of claim 2, wherein the reconstruction sample comprises a chroma reconstruction sample used as an input source for at least one extended tap of luma or chroma online-trained filters.
10. The method of claim 2, wherein the reconstruction sample comprises a chroma reconstruction sample used as an input source for at least one spatial tap of luma or chroma online-trained filters.
11. The method of claim 2, wherein the reconstruction sample comprises a chroma reconstruction sample used as an input source for classification.
12. The method of claim 11, wherein the classification comprises classification of luma online-trained filters.
13. The method of claim 11, wherein the classification comprises classification of luma offline-trained filters.
14. The method of claim 1, wherein the side information comprises prediction samples.
15. The method of claim 14, wherein the prediction samples comprise luma prediction samples used as an input source for at least one extended tap of luma or chroma online-trained filters.
16. The method of claim 14, wherein the prediction samples comprise luma prediction samples used as an input source for at least one spatial tap of luma or chroma online-trained filters.
17. The method of claim 14, wherein the prediction samples comprise luma prediction samples used as an input source for luma offline-trained filters.
18. The method of claim 14, wherein the prediction samples comprise luma prediction samples used as an input source for classification.

19. The method of claim 18, wherein the classification comprises classification of luma online-trained filters.
20. The method of claim 18, wherein the classification comprises classification of luma offline-trained filters.
21. The method of claim 14, wherein the reconstruction sample comprises a chroma reconstruction sample used as an input source for at least one extended tap of luma or chroma online-trained filters.
22. The method of claim 14, wherein the reconstruction sample comprises a chroma reconstruction sample used as an input source for at least one spatial tap of luma or chroma online-trained filters.
23. The method of claim 14, wherein the reconstruction sample comprises a chroma reconstruction sample used as an input source for classification.
24. The method of claim 23, wherein the classification comprises classification of luma online-trained filters.
25. The method of claim 23, wherein the classification comprises classification of luma offline-trained filters.
26. The method of claim 14, further comprising subjecting the prediction samples to modification before the prediction samples are used as the input for the ALF.
27. The method of claim 26, wherein the modification comprises filtering.
28. The method of claim 26, wherein the modification comprises down-sampling or up-sampling.

29. The method of claim 26, wherein the modification comprises clipping or shifting.
30. The method of claim 1, wherein the side information comprises residual values.
31. The method of claim 30, wherein the residual values comprise luma residual values used as an input source for at least one extended tap of luma or chroma online-trained filters.
32. The method of claim 30, wherein the residual values comprise luma residual values used as an input source for at least one spatial tap of luma or chroma online-trained filters.
33. The method of claim 30, wherein the residual values comprise luma residual values used as an input source for luma offline-trained filters.
34. The method of claim 30, wherein the residual values comprise luma residual values used as an input source for classification.
35. The method of claim 34, wherein the classification comprises classification of luma online-trained filters.
36. The method of claim 34, wherein the classification comprises classification of luma offline-trained filters.
37. The method of claim 30, wherein the residual values comprises chroma residual values used as an input source for at least one extended tap of luma or chroma online-trained filters.
38. The method of claim 30, wherein the residual values comprises chroma residual values used as an input source for at least one spatial tap of luma or chroma online-trained filters.
39. The method of claim 30, wherein the residual values comprises chroma residual values used as an input source for classification.

40. The method of claim 39, wherein the classification comprises classification of luma online-trained filters.
41. The method of claim 39, wherein the classification comprises classification of luma offline-trained filters.
42. The method of claim 14, further comprising subjecting the residual values to modification before the residual values are used as the input for the ALF.
43. The method of claim 42, wherein the modification comprises filtering.
44. The method of claim 42, wherein the modification comprises down-sampling or up-sampling.
45. The method of claim 42, wherein the modification comprises clipping or shifting.
46. The method of claim 1, wherein the side information comprises partitioning information.
47. The method of claim 46, wherein the partitioning information comprises one or more of block size, block shape, and block location.
48. The method of claim 46, wherein the partitioning information comprises luma partitioning information used for classification.
49. The method of claim 48, wherein the classification comprises classification of luma online-trained filters.
50. The method of claim 48, wherein the classification comprises classification of luma offline-trained filters.

51. The method of claim 46, wherein the partitioning information comprises chroma partitioning information used for classification.
52. The method of claim 48, wherein the classification comprises classification of luma online-trained filters.
53. The method of claim 48, wherein the classification comprises classification of luma offline-trained filters.
54. The method of claim 46, wherein the partitioning information comprises luma partitioning information used for filter training.
55. The method of claim 54, wherein the filter training comprises filter training of luma online-trained filters.
56. The method of claim 54, wherein the filter training comprises filter training of chroma online-trained filters.
57. The method of claim 46, wherein the partitioning information comprises chroma partitioning information used for filter training.
58. The method of claim 54, wherein the filter training comprises filter training of luma online-trained filters.
59. The method of claim 54, wherein the filter training comprises filter training of chroma online-trained filters.
60. The method of claim 46, wherein the partitioning information comprises luma partitioning information used for filter training and chroma partitioning information used for the filter training.

61. The method of claim 1, wherein the side information comprises quantization parameter (QP) information.
62. The method of claim 61, wherein the QP information comprises one or more of picture QP information, slice QP information, and block level QP information.
63. The method of claim 61, wherein the QP information comprises luma QP information used for classification.
64. The method of claim 63, wherein the classification comprises classification of luma online-trained filters.
65. The method of claim 63, wherein the classification comprises classification of luma offline-trained filters.
66. The method of claim 61, wherein the QP information comprises chroma QP information used for classification.
67. The method of claim 66, wherein the classification comprises classification of luma online-trained filters.
68. The method of claim 66, wherein the classification comprises classification of luma offline-trained filters.
69. The method of claim 61, wherein the QP information comprises luma QP information used for filter training.
70. The method of claim 69, wherein the filter training comprises filter training of luma online-trained filters.

71. The method of claim 69, wherein the filter training comprises filter training of chroma online-trained filters.
72. The method of claim 61, wherein the QP information comprises chroma QP information used for filter training.
73. The method of claim 71, wherein the filter training comprises filter training of luma online-trained filters.
74. The method of claim 71, wherein the filter training comprises filter training of chroma online-trained filters.
75. The method of claim 61, wherein the QP information comprises luma QP information used for filter training and chroma QP information used for the filter training.
76. The method of claim 1, wherein the side information comprises boundary strength information.
77. The method of claim 76, wherein the boundary strength information is generated by a deblocking filter.
78. The method of claim 76, wherein the boundary strength information comprises is luma boundary strength information used for classification.
79. The method of claim 78, wherein the classification comprises classification of luma online-trained filters.
80. The method of claim 78, wherein the classification comprises classification of luma offline-trained filters.

81. The method of claim 76, wherein the boundary strength information comprises chroma boundary strength used for classification.
82. The method of claim 81, wherein the classification comprises classification of luma online-trained filters.
83. The method of claim 81, wherein the classification comprises classification of luma offline-trained filters.
84. The method of claim 76, wherein the boundary strength information comprises luma boundary strength information used for filter training.
85. The method of claim 84, wherein the filter training comprises filter training of luma online-trained filters.
86. The method of claim 84, wherein the filter training comprises filter training of chroma online-trained filters.
87. The method of claim 76, wherein the boundary strength information comprises chroma boundary strength information used for filter training.
88. The method of claim 87, wherein the filter training comprises filter training of luma online-trained filters.
89. The method of claim 87, wherein the filter training comprises filter training of chroma online-trained filters.
90. The method of claim 76, wherein the boundary strength information comprises luma boundary strength information used for filter training and chroma boundary strength information used for the filter training.

91. The method of claim 1, wherein the ALF comprises a cross component ALF (CCALF).
92. The method of claim 91, wherein the side information comprises a reconstruction sample obtained before a deblocking filter (DBF), a sample adaptive offset (SAO) filter, or a bilateral filter (BF).
93. The method of claim 91, wherein the reconstruction sample comprises a luma reconstruction sample used as an input source for at least one extended tap for the CCALF.
94. The method of claim 91, wherein the reconstruction sample comprises a luma reconstruction sample used as an input source for at least one spatial tap for the CCALF.
95. The method of claim 91, wherein the reconstruction sample comprises a chroma reconstruction sample used as an input source for at least one extended tap for the CCALF.
96. The method of claim 91, wherein the reconstruction sample comprises a chroma reconstruction sample used as an input source for at least one spatial tap for the CCALF.
97. The method of claim 91, wherein the side information comprises prediction samples.
98. The method of claim 97, wherein the prediction samples comprise luma prediction samples used as an input source for at least one extended tap for the CCALF.
99. The method of claim 97, wherein the prediction samples comprise luma prediction samples used as an input source for at least one spatial tap for the CCALF.
100. The method of claim 97, wherein the prediction samples comprise chroma prediction samples used as an input source for at least one extended tap for the CCALF.
101. The method of claim 97, wherein the prediction samples comprise chroma prediction samples used as an input source for at least one spatial tap for the CCALF.

102. The method of claim 97, further comprising subjecting the prediction samples to modification before the prediction samples are used as the input for the CCALF.
103. The method of claim 102, wherein the modification comprises filtering.
104. The method of claim 102, wherein the modification comprises down-sampling or up-sampling.
105. The method of claim 102, wherein the modification comprises clipping or shifting.
106. The method of claim 97, wherein the side information comprises residual values.
107. The method of claim 106, wherein the residual values comprise luma residual values used as an input source for at least one extended tap for the CCALF.
108. The method of claim 106, wherein the residual values comprise luma residual values used as an input source for at least one spatial tap for the CCALF.
109. The method of claim 106, wherein the residual values comprise chroma residual values used as an input source for at least one extended tap for the CCALF.
110. The method of claim 106, wherein the residual values comprise chroma residual values used as an input source for at least one spatial tap for the CCALF.
111. The method of claim 106, further comprising subjecting the residual values to modification before the residual values are used as the input for the CCALF.
112. The method of claim 111, wherein the modification comprises filtering.

113. The method of claim 111, wherein the modification comprises down-sampling or up-sampling.
114. The method of claim 111, wherein the modification comprises clipping or shifting.
115. The method of claim 91, wherein the side information comprises partitioning information.
116. The method of claim 115, wherein the partitioning information comprises one or more of block size, block shape, and block location.
117. The method of claim 115, wherein the partitioning information comprises luma partitioning information used for training online-trained filters of the CCALF.
118. The method of claim 115, wherein the partitioning information comprises chroma partitioning information used for training online-trained filters of the CCALF.
119. The method of claim 115, wherein the partitioning information comprises luma partitioning information used for filter training for the CCALF and chroma partitioning information used for filter training the CCALF.
120. The method of claim 91, wherein the side information comprises quantization parameter (QP) information.
121. The method of claim 120, wherein the QP information comprises one or more of block size, block shape, and block location.
122. The method of claim 120, wherein the QP information comprises luma QP information used for training online-trained filters of the CCALF.
123. The method of claim 120, wherein the QP information comprises chroma QP information used for training online-trained filters of the CCALF.

124. The method of claim 120, wherein the QP information comprises luma QP information used for filter training for the CCALF and chroma QP information used for filter training the CCALF.
125. The method of claim 91, wherein the side information comprises boundary strength information.
126. The method of claim 120, wherein the boundary strength information is generated by a deblocking filter.
127. The method of claim 120, wherein the boundary strength information comprises luma boundary strength information used for training online-trained filters of the CCALF.
128. The method of claim 120, wherein the boundary strength information comprises chroma boundary strength information used for training online-trained filters of the CCALF.
129. The method of claim 120, wherein the boundary strength information comprises luma boundary strength information used for filter training for the CCALF and chroma boundary strength information used for filter training the CCALF.
130. The method of any of claims 1-129, wherein the method is implemented in post-processing or in pre-processing.
131. The method of any of claims 1-129, wherein one or more of the methods are used jointly.
132. The method of any of claims 1-129, wherein one or more of the methods are used individually.

133. The method of any of claims 1-132, wherein the method is applied to any in-loop filtering tools, a pre-processing filtering method, or post-processing filtering method in video coding including but not limited to ALF/CCALF or any other filtering method.
134. The method of claim 133, wherein the method is applied to an in-loop filtering method.
135. The method of claim 134, wherein the method is applied to ALF, CCAPF, a sample adaptive offset (SAO) filter, or another in-loop filtering method.
136. The method of claim 134, wherein the method is applied to a cross component SAO (CCSAO).
137. The method of claim 134, wherein the method is applied to a bilateral filter (BF).
138. The method of claim 134, wherein the method is applied to a Hadamard transform domain filter (HTDF).
139. The method of claim 134, wherein the method is applied to an in-loop filtering method.
140. The method of claim 134, wherein the method is applied to a pre-processing filtering method.
141. The method of claim 134, wherein the method is applied to a post-processing filtering method.
142. The method of any of claims 1-141, wherein a video unit subjected to the ALF or the CCALF comprises one of a sequence, a picture, a sub-picture, a slice, a tile, a coding tree unit (CTU), a CTU row, groups of CTUs, a coding unit (CU), a prediction unit (PU), a transform unit (TU), a coding tree block (CTB), a coding block (CB), a prediction block (PB), a transform block (TB), and any other region that contains more than one luma or chroma sample or pixel.

143. The method of any of claims 1-142, wherein an indication of whether and/or how to apply the method is included in the bitstream.

144. The method of claim 143, wherein the indication is included in the bitstream at a sequence level, at a group of pictures level, at a picture level, at a slice level, at a tile group level, in a sequence header, in a picture header, in a sequence parameter set (SPS), in a video parameter set (VPS), in a dependency parameter set (DPS), in a decoding capability information (DCI), in a picture parameter set (PPS), in an adaptation parameter set (APS), in a slice header, or in a tile group header.

145. The method of claim 143, wherein the indication is included in the bitstream in a prediction block (PB), a transform block (TB), a coding block (CB), a prediction unit (PU), a transform unit (TU), a coding unit (CU), a virtual pipeline data unit (VPDU), a coding tree unit (CTU), a CTU row, a slice, a tile, a sub-picture, or any other region that contains more than one sample or pixel.

146. The method of any of claims 1-145, wherein whether and/or how to apply any of the methods is dependent on coded information, and wherein the coded information comprises block size, color format, a single or dual tree partitioning, a color component, a slice type, or a picture type.

147. The method of any of claims 1-121, wherein the conversion includes encoding the visual media data into the bitstream.

148. The method of any of claims 1-121, wherein the conversion includes decoding the visual media data from the bitstream.

149. An apparatus for processing media data comprising:
one or more processors; and
a non-transitory memory with instructions thereon, wherein the instructions upon execution by the processor cause the apparatus to perform the method of any of claims 1-148.

150. A non-transitory computer readable medium, comprising a computer program product for use by a video coding device, the computer program product comprising computer executable

instructions stored on the non-transitory computer readable medium such that when executed by a processor cause the video coding device to perform the method of any of claims 1-148.

151. A non-transitory computer-readable recording medium storing a bitstream of a video which is generated by a method performed by a video processing apparatus, wherein the method comprises the method of any of claims 1-148.

152. A method for storing a bitstream of a video comprising the method of any of claims 1-148.

153. A method, apparatus, or system described in the present disclosure.

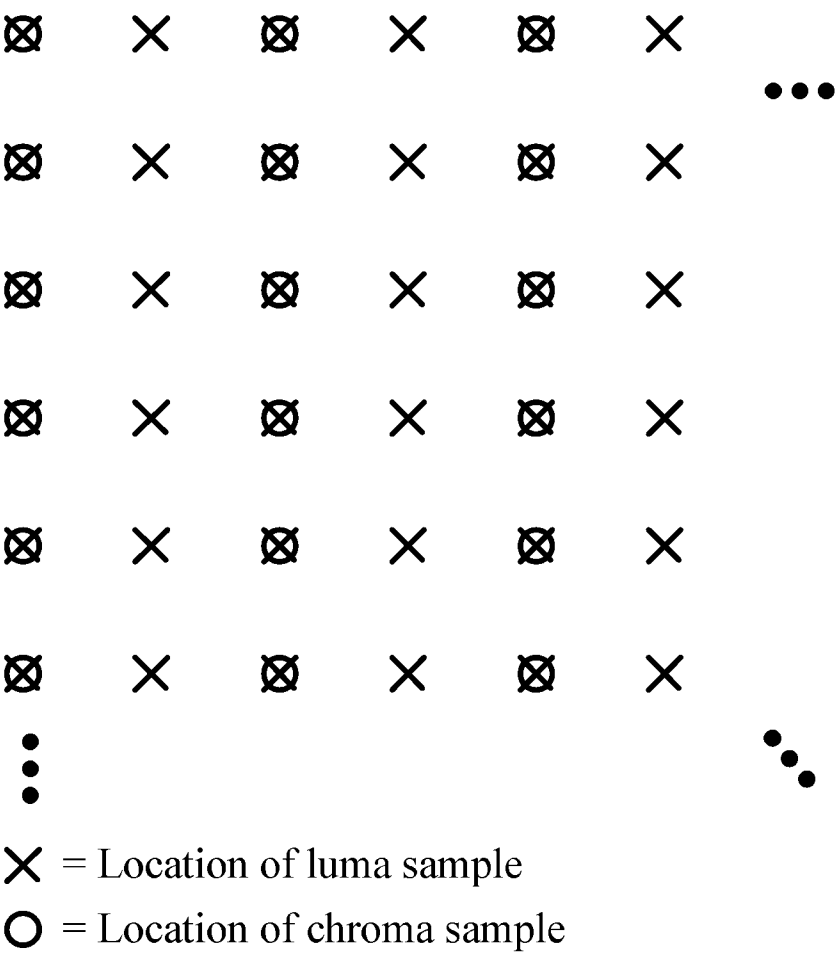


FIG. 1

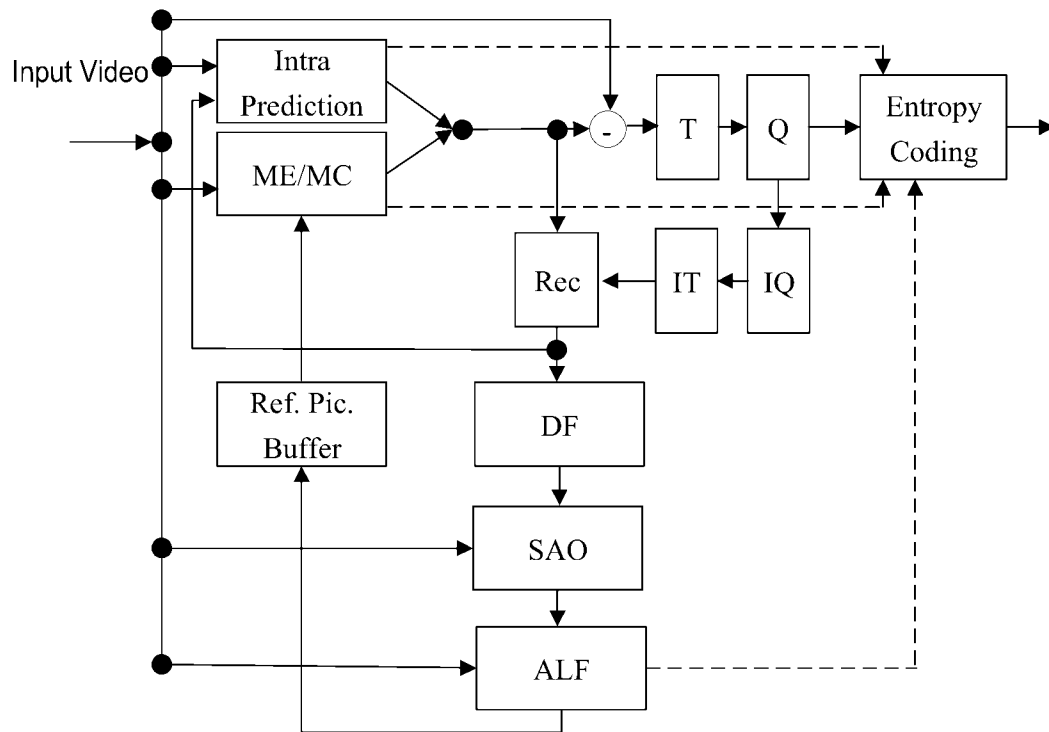


FIG. 2

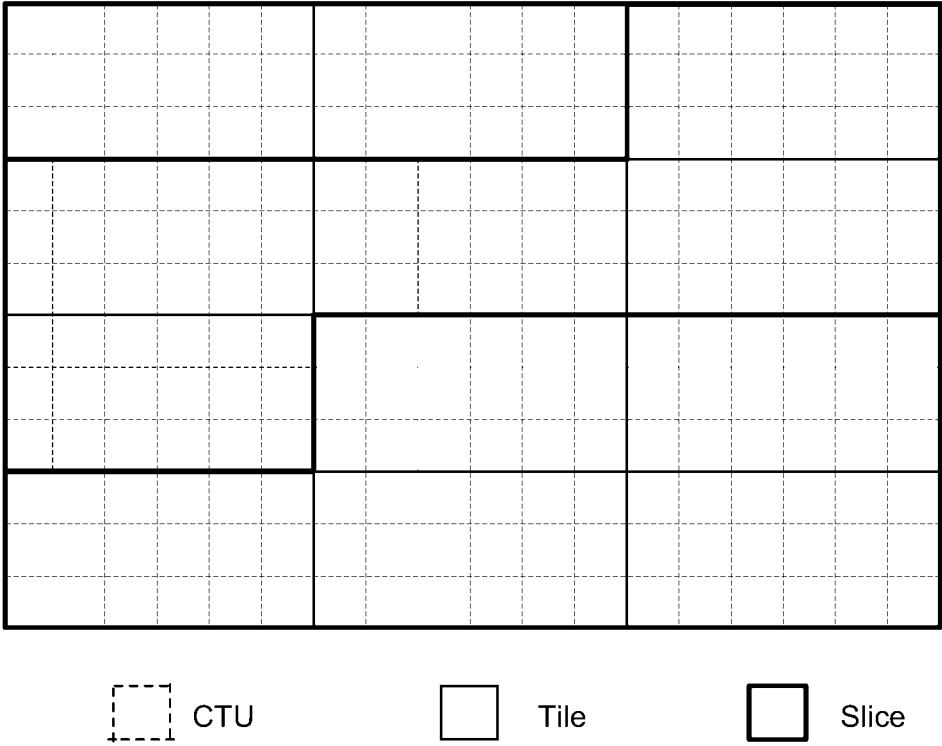


FIG. 3

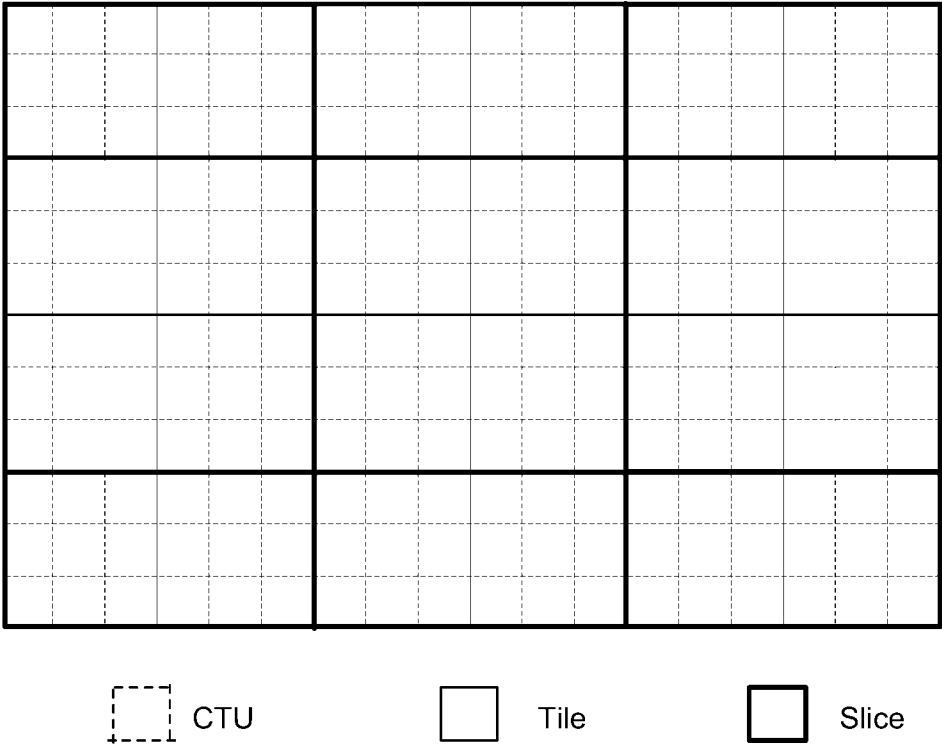


FIG. 4

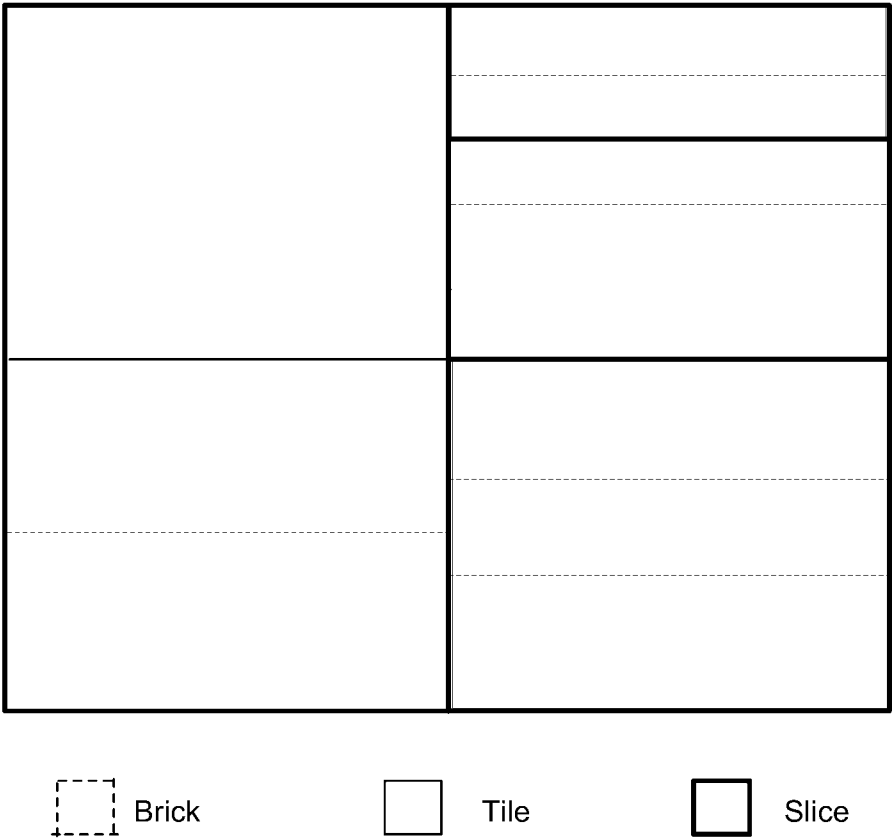


FIG. 5

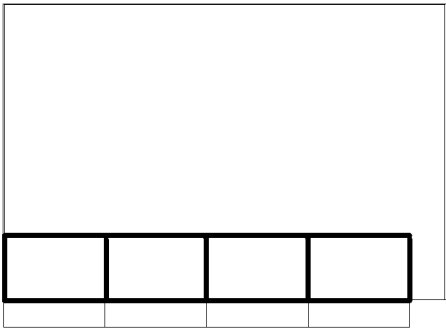


FIG. 6A

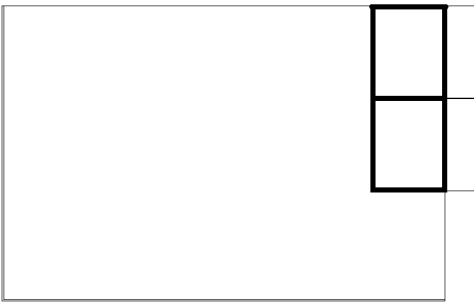


FIG. 6B




FIG. 6C

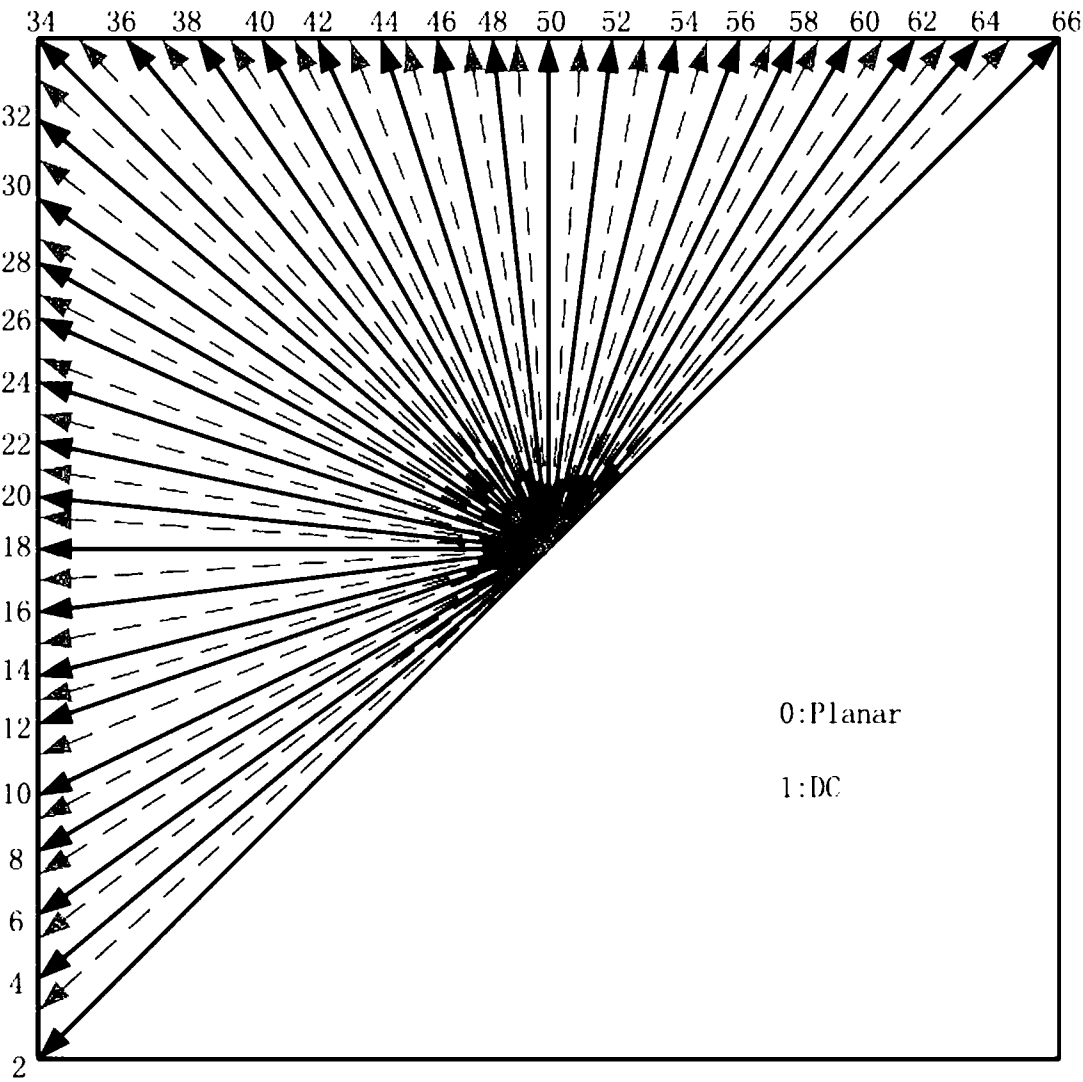


FIG. 7

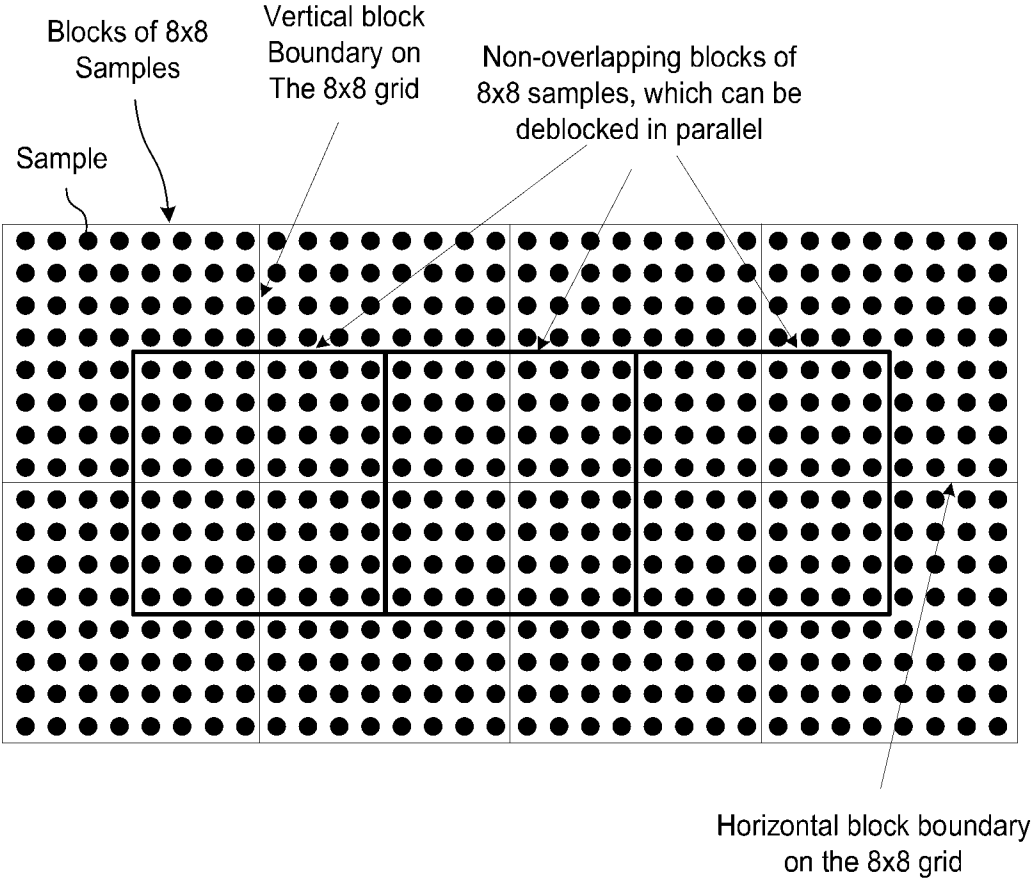


FIG. 8

p3 ₀	p2 ₀	p1 ₀	p0 ₀	q0 ₀	q1 ₀	q2 ₀	q3 ₀	first 4 lines
p3 ₁	p2 ₁	p1 ₁	p0 ₁	q0 ₁	q1 ₁	q2 ₁	q3 ₁	
p3 ₂	p2 ₂	p1 ₂	p0 ₂	q0 ₂	q1 ₂	q2 ₂	q3 ₂	
p3 ₃	p2 ₃	p1 ₃	p0 ₃	q0 ₃	q1 ₃	q2 ₃	q3 ₃	
p3 ₄	p2 ₄	p1 ₄	p0 ₄	q0 ₄	q1 ₄	q2 ₄	q3 ₄	second 4 lines
p3 ₅	p2 ₅	p1 ₅	p0 ₅	q0 ₅	q1 ₅	q2 ₅	q3 ₅	
p3 ₆	p2 ₆	p1 ₆	p0 ₆	q0 ₆	q1 ₆	q2 ₆	q3 ₆	
p3 ₇	p2 ₇	p1 ₇	p0 ₇	q0 ₇	q1 ₇	q2 ₇	q3 ₇	

FIG. 9

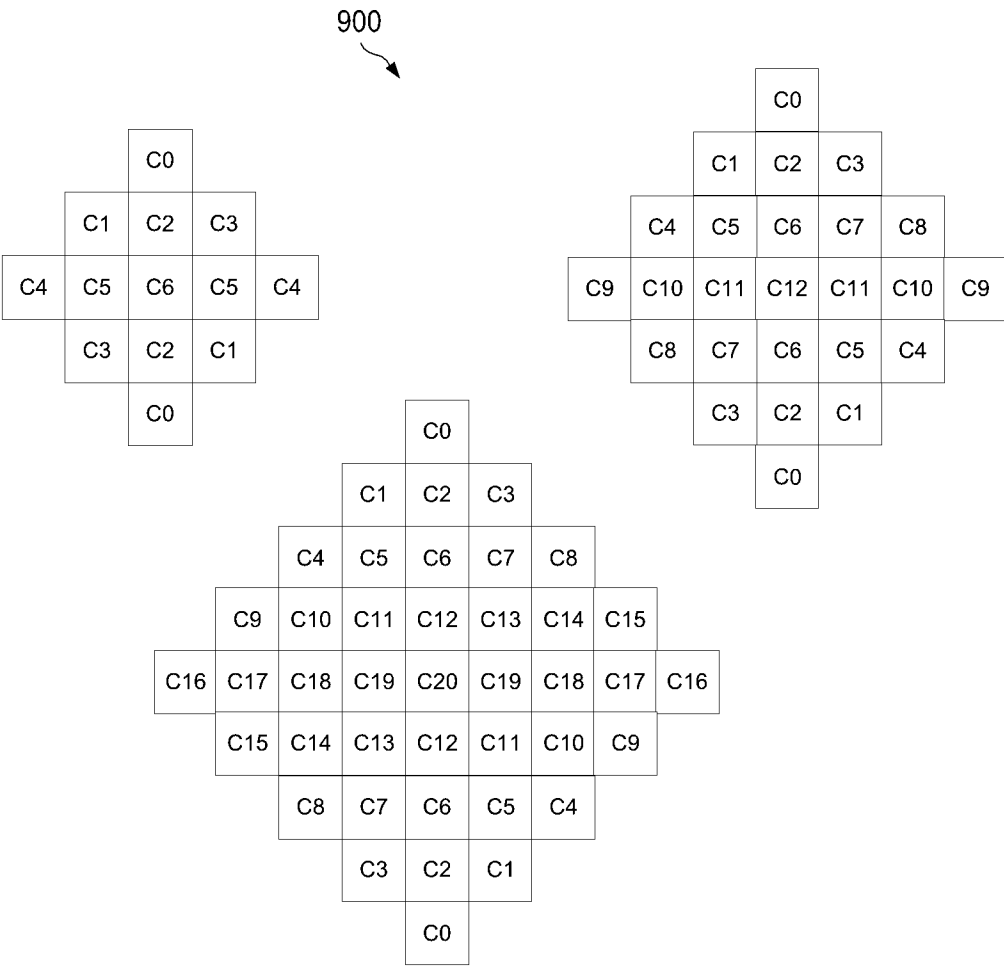


FIG. 10

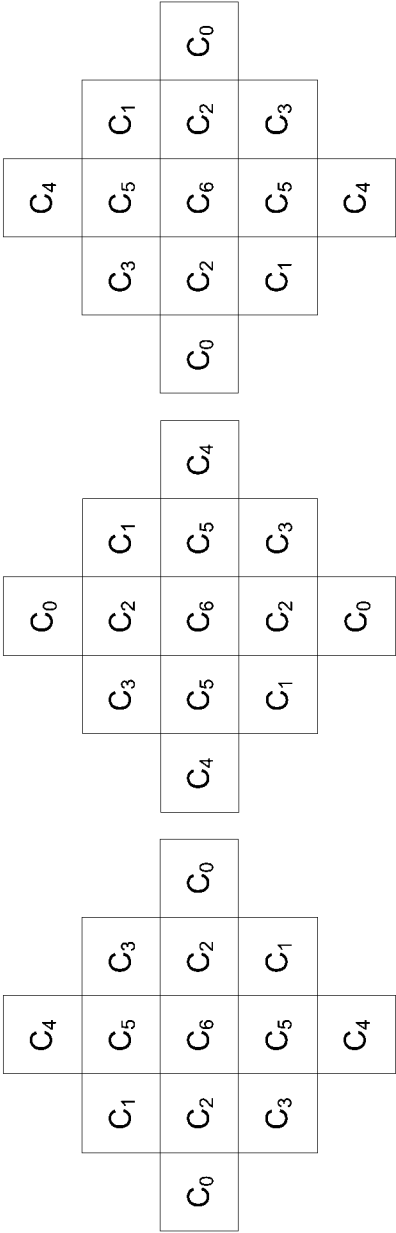


FIG. 11

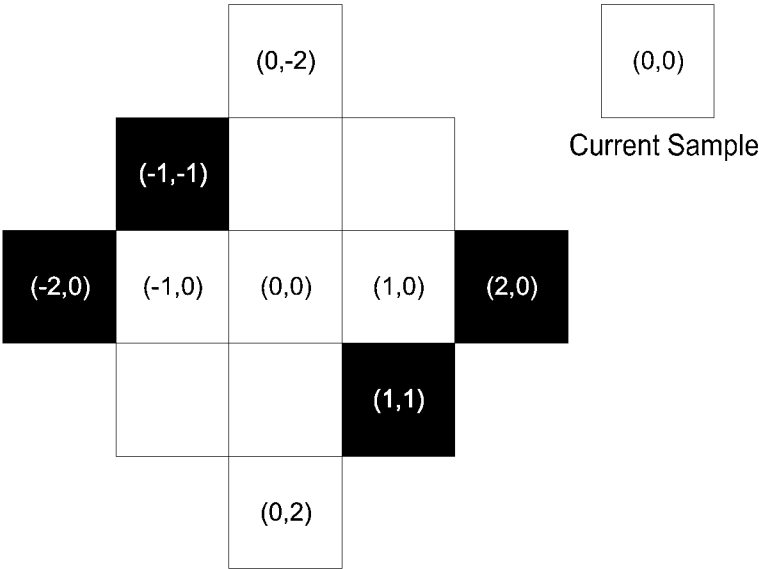


FIG. 12

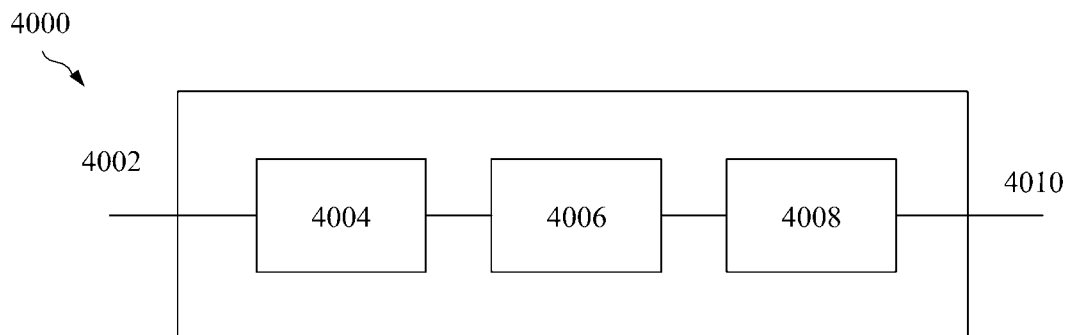


FIG. 13

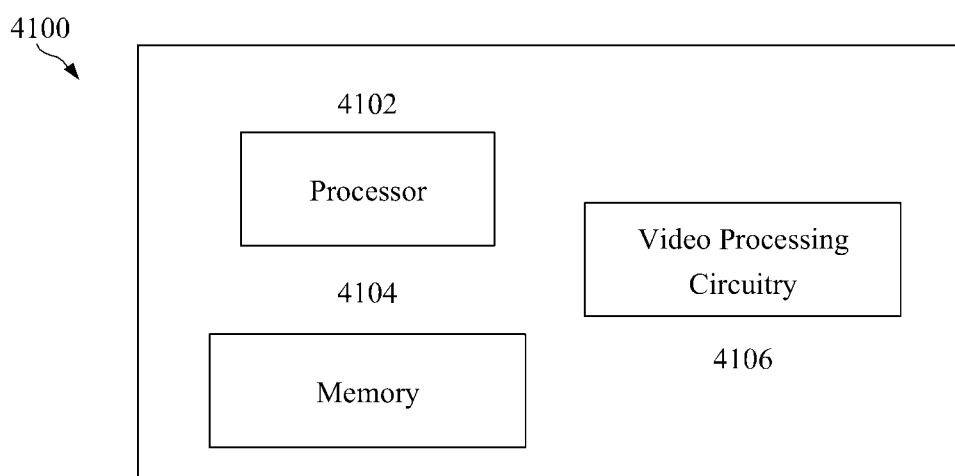


FIG. 14

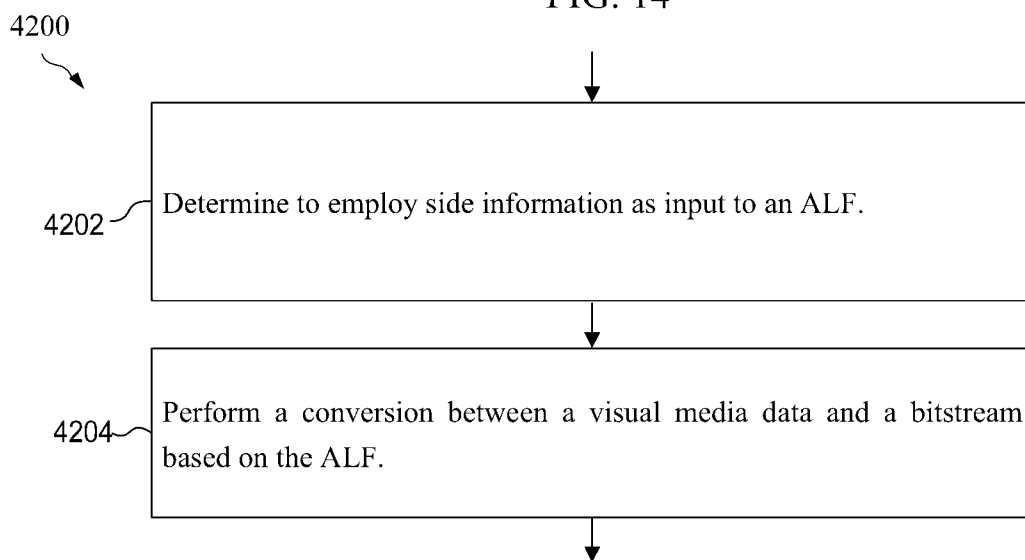


FIG. 15

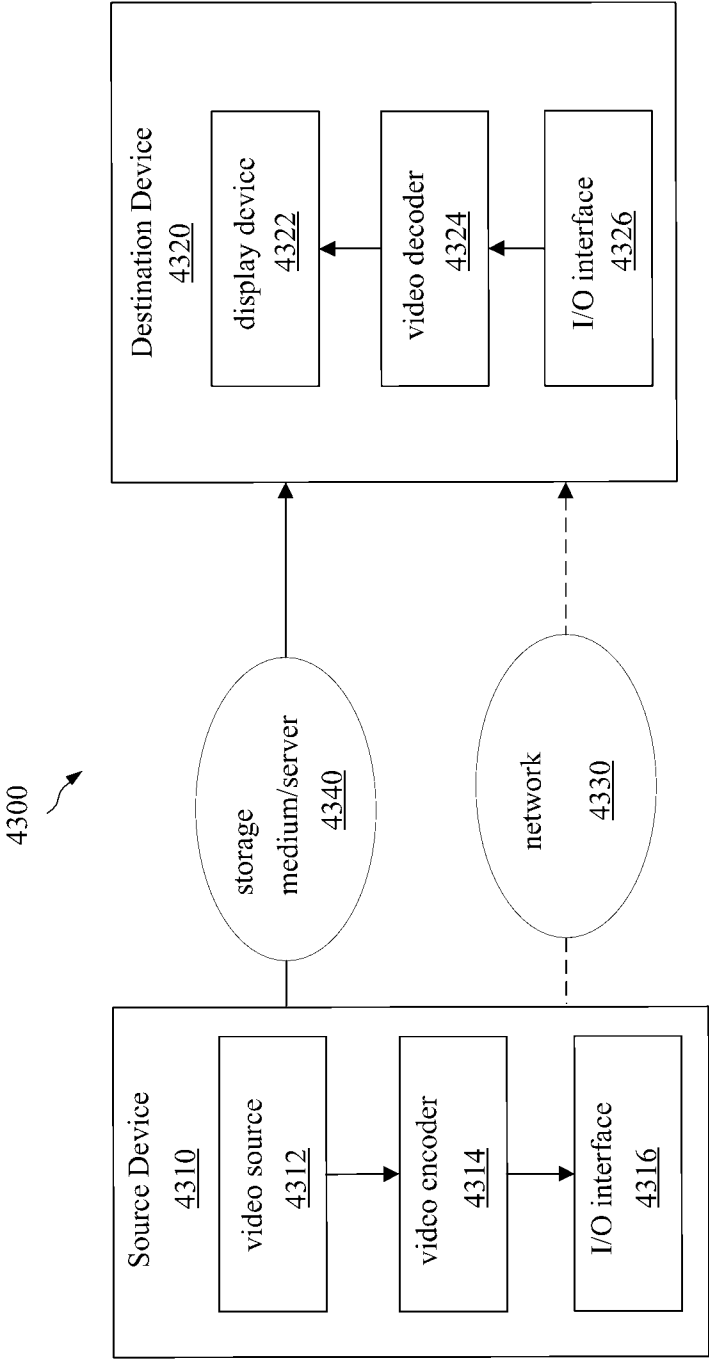


FIG. 16

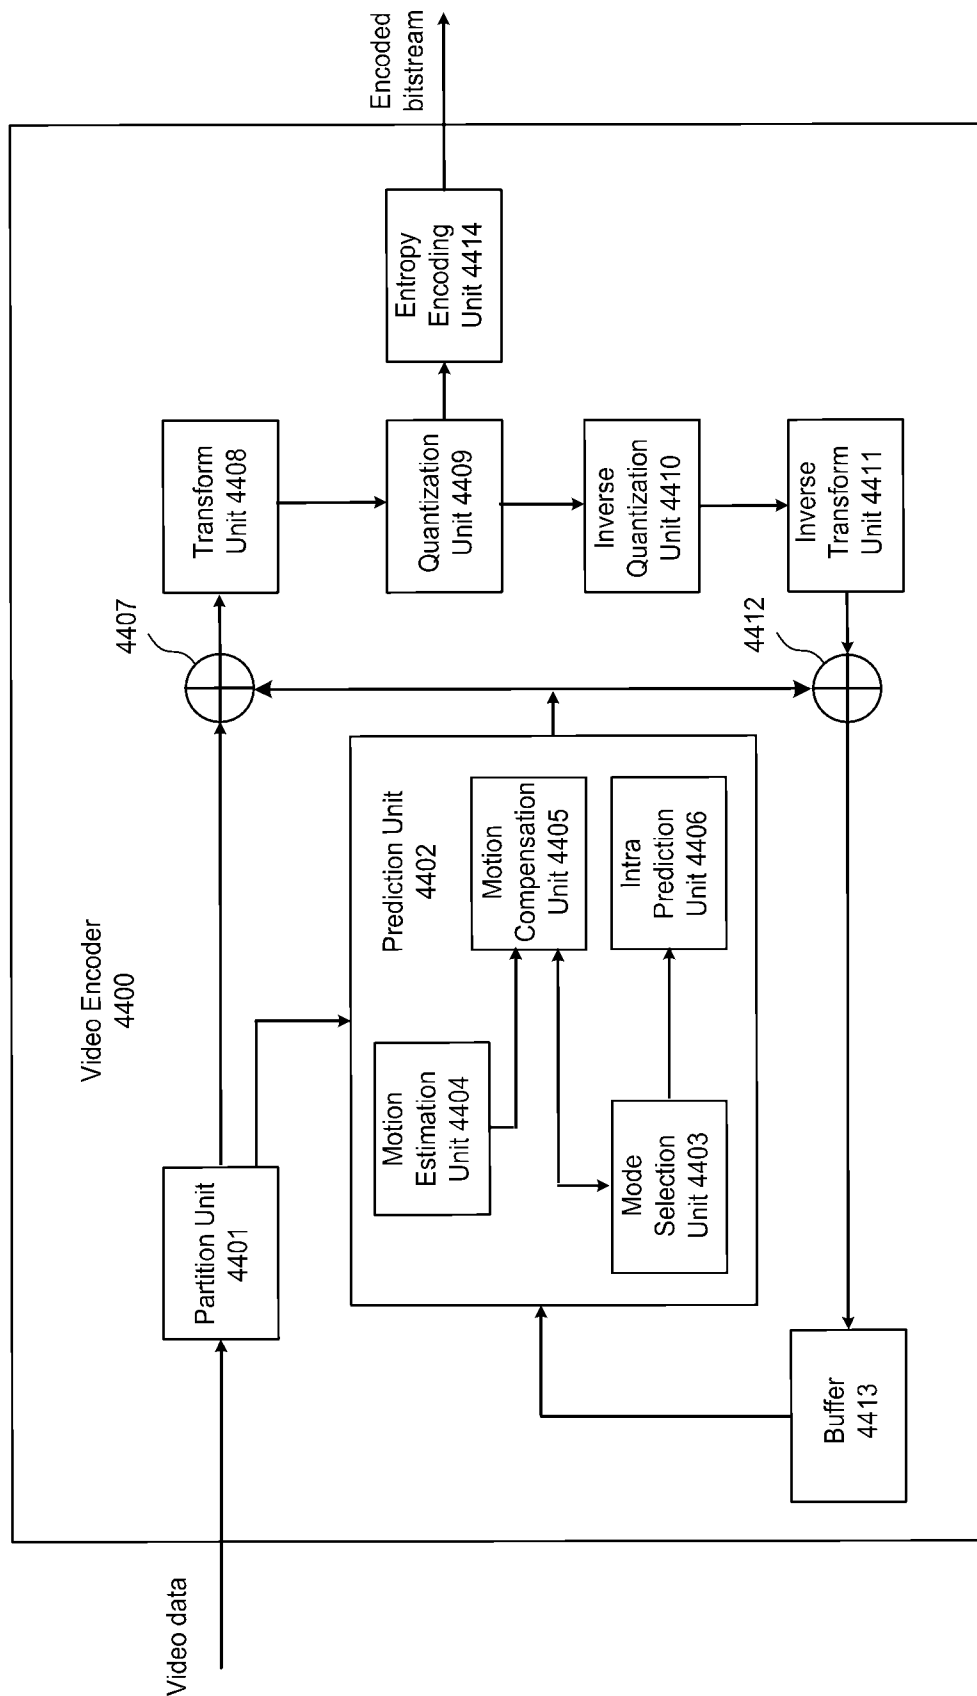


FIG. 17

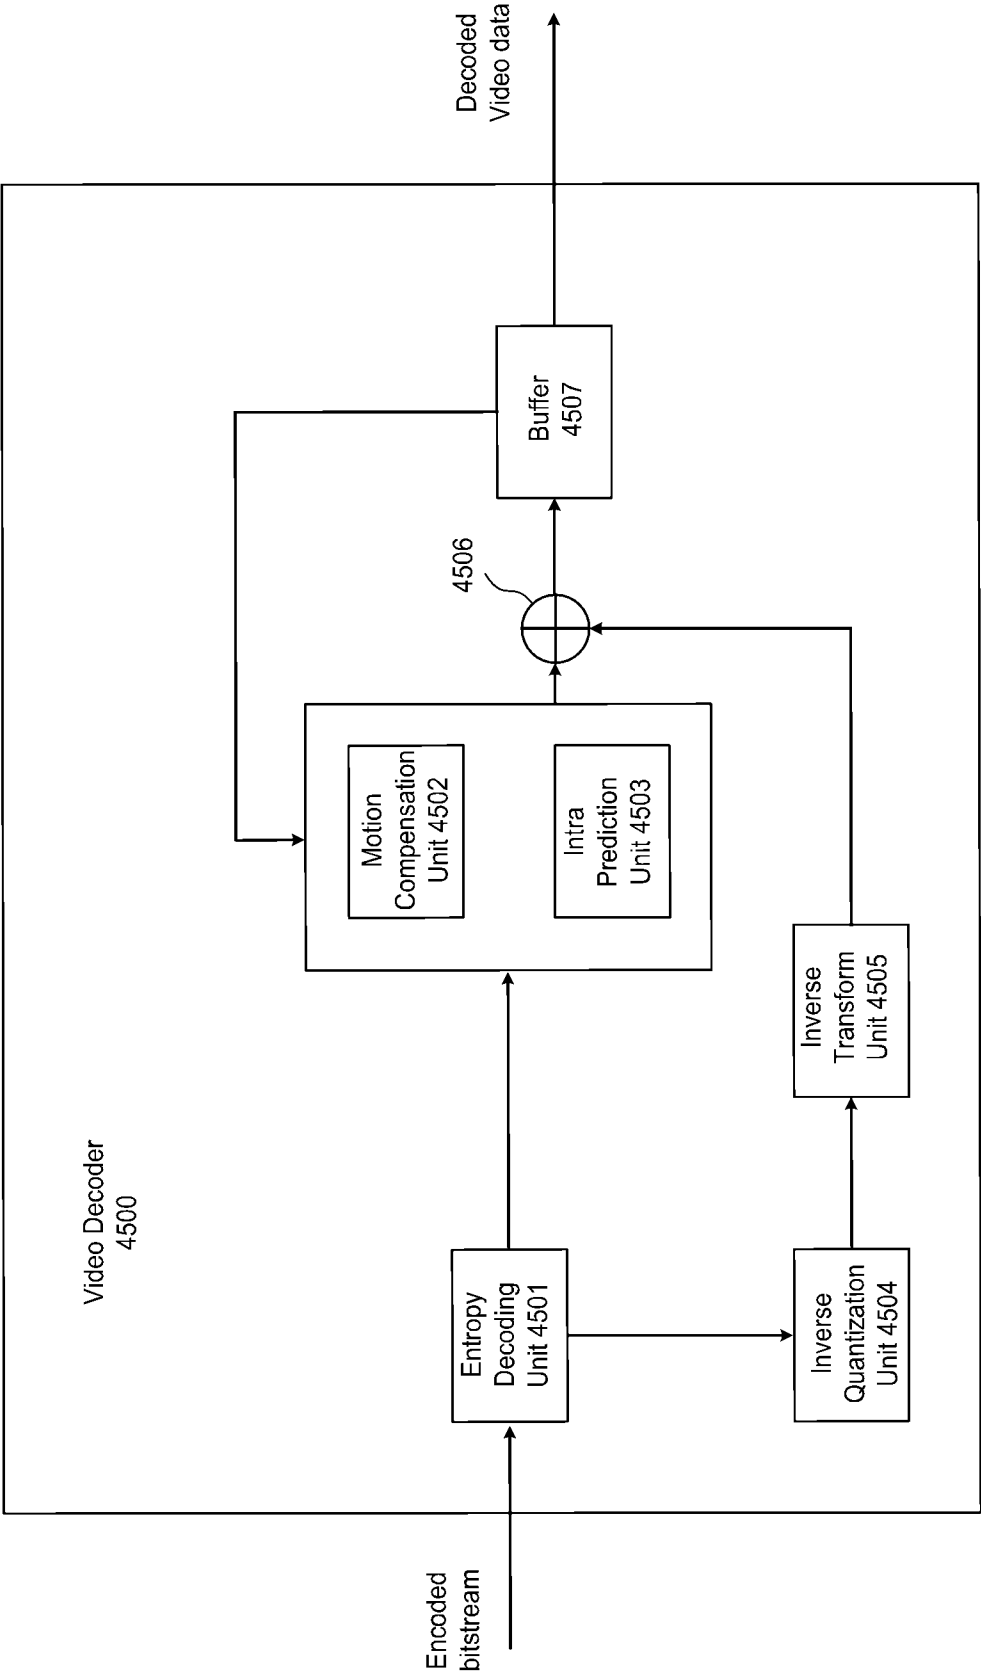


FIG. 18

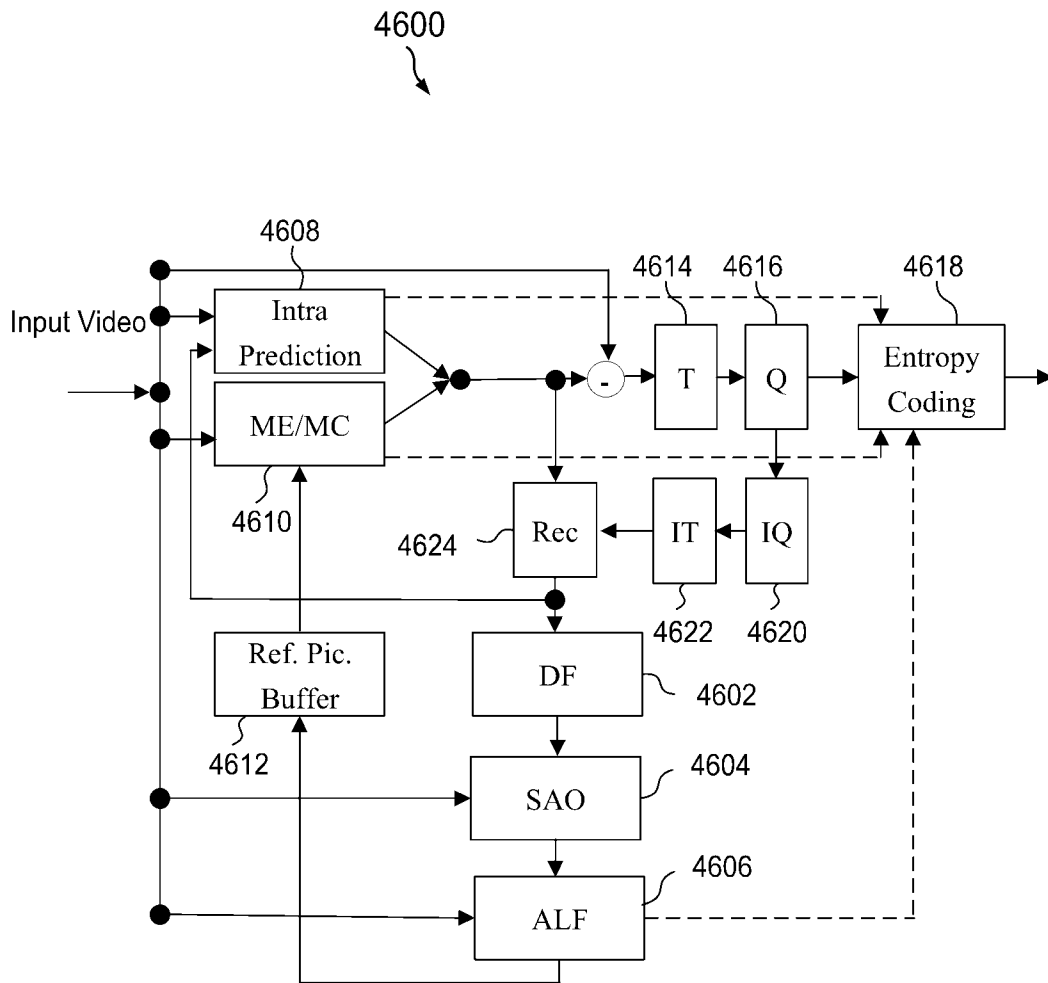


FIG. 19

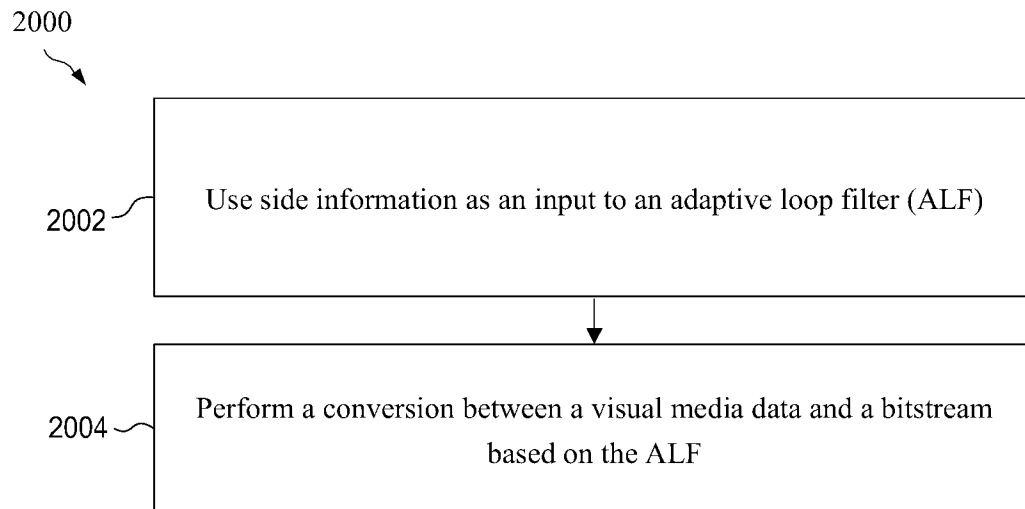


FIG. 20

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2023/129103

A. CLASSIFICATION OF SUBJECT MATTER

H04N19/82(2014.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC:H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

VEN;WPABS;ENTXT;IEEE;CNKI;CNTXT:ALF, adaptive loop filter, side information, reconstruction sample, bitstream, video, input, prediction

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	CN 114080805 A (高通股份有限公司) 22 February 2022 (2022-02-22) the whole document	1-153
A	US 2021099700 A1 (TENCENT AMERICA LLC) 01 April 2021 (2021-04-01) the whole document	1-153
A	US 2019373258 A1 (QUALCOMM INC) 05 December 2019 (2019-12-05) the whole document	1-153
A	WO 2011140960 A1 (MEDIATEK INC ET AL) 17 November 2011 (2011-11-17) the whole document	1-153
A	US 2020314423 A1 (QUALCOMM INC) 01 October 2020 (2020-10-01) the whole document	1-153
A	EP 3177014 A1 (SAMSUNG ELECTRONICS CO LTD) 07 June 2017 (2017-06-07) the whole document	1-153



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

“A” document defining the general state of the art which is not considered to be of particular relevance

“D” document cited by the applicant in the international application

“E” earlier application or patent but published on or after the international filing date

“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

“O” document referring to an oral disclosure, use, exhibition or other means

“P” document published prior to the international filing date but later than the priority date claimed

“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

“&” document member of the same patent family

Date of the actual completion of the international search

29 January 2024

Date of mailing of the international search report

31 January 2024

Name and mailing address of the ISA/CN

**CHINA NATIONAL INTELLECTUAL PROPERTY
ADMINISTRATION**
6, Xitucheng Rd., Jimen Bridge, Haidian District, Beijing
100088, China

Authorized officer

SUN,Jing

Telephone No. (+86) 010-62411583

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/CN2023/129103

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)			Publication date (day/month/year)
CN	114080805	A	22 February 2022	AU	2020301234	A1	06 January 2022
				WO	2020264004	A1	30 December 2020
				EP	3987812	A1	27 April 2022
				TW	202110177	A	01 March 2021
				KR	20220024101	A	03 March 2022
				BR	112021025357	A2	01 February 2022
				US	2020404335	A1	24 December 2020
				US	11412262	B2	09 August 2022
US	2021099700	A1	01 April 2021	US	11159792	B2	26 October 2021
US	2019373258	A1	05 December 2019	PH	12020551866	A1	19 July 2021
				CO	2020014698	A2	10 December 2020
				MX	2020012846	A	18 February 2021
				KR	20210015819	A	10 February 2021
				JP	2021525981	A	27 September 2021
				AU	2019278991	A1	03 December 2020
				AU	2019278991	B2	24 November 2022
				WO	2019232412	A1	05 December 2019
				SG	11202010952	XA	30 December 2020
				BR	112020024520	A2	02 March 2021
				CL	2020003085	A1	11 June 2021
				CA	3099795	A1	05 December 2019
				TW	202005399	A	16 January 2020
				EP	3804337	A1	14 April 2021
				US	11451773	B2	20 September 2022
WO	2011140960	A1	17 November 2011	DE	112011100420	T5	13 December 2012
				DE	112011100420	B4	12 October 2023
				US	2017163982	A1	08 June 2017
				US	9998737	B2	12 June 2018
				US	2013259117	A1	03 October 2013
				US	9154778	B2	06 October 2015
				US	2011274158	A1	10 November 2011
				US	9094658	B2	28 July 2015
				US	2015350648	A1	03 December 2015
				US	9615093	B2	04 April 2017
US	2020314423	A1	01 October 2020	WO	2020197751	A1	01 October 2020
				EP	3949393	A1	09 February 2022
EP	3177014	A1	07 June 2017	US	2017223352	A1	03 August 2017
				US	10250879	B2	02 April 2019
				EP	3177014	A4	28 February 2018
				EP	3177014	B1	16 February 2022
				US	2019222840	A1	18 July 2019
				US	10701357	B2	30 June 2020
				KR	20160015799	A	15 February 2016
				KR	102276854	B1	13 July 2021
				WO	2016017937	A1	04 February 2016
				SG	11201700676	TA	27 February 2017