

(19)



(11)

EP 3 293 316 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
11.12.2019 Bulletin 2019/50

(51) Int Cl.:
E03D 11/08^(2006.01)

(21) Application number: **17186195.8**

(22) Date of filing: **14.08.2017**

(54) **A WC PAN FLUSHING SYSTEM**

WC-SPÜLBECKEN

SYSTÈME DE RINÇAGE DE CUVETTE DE TOILETTE

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **07.09.2016 TR 201612657**

(43) Date of publication of application:
14.03.2018 Bulletin 2018/11

(73) Proprietor: **Matel Hammadde Sanayi Ve Ticaret
Anonim Sirketi
45030 Manisa (TR)**

(72) Inventors:
• **DOGAN, Zafer
Manisa (TR)**
• **SUNAR, Aldonat
Izmir (TR)**

(74) Representative: **Dericioglu Kurt, Ekin
Ankara Patent Bureau Limited
Kavaklidere Mahallesi
Bestekar Caddesi No: 10
06680 Cankaya, Ankara (TR)**

(56) References cited:
**EP-A1- 2 944 730 US-A- 1 957 809
US-A1- 2006 005 310 US-A1- 2013 047 330**

EP 3 293 316 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Field of the Invention

[0001] The present invention relates to a WC pan flushing system which regulates flow of the flushing function and which also prevents overflow of the flushing water in the WC pan and enables the WC pan flushing channels to be easily cleaned.

Background of the Invention

[0002] In the WC pan applications in the state of the art, after use of the WC pan, the reservoir water is used for delivering the waste in the WC pan chambers to the city sewer system. This function is fulfilled by use of different amounts of water depending on the structural properties of the WC pan water distribution and flushing channel and the WC pan chamber.

[0003] In the process of preparing a WC pan design for production, the first information that will be able to provide insight about the function performance of the chamber and water distribution structure are obtained by numerical analysis (CFD - Computational Fluid Dynamics) methods. Nevertheless, relatively different results can be obtained in the experiments conducted via test and experiment methods determined by the international standards, and it is possible to achieve favorable results by generally applying design changes in the chamber structure, if necessary, depending on the function performance of the product. Making changes in the chamber structure in WC pans in order to achieve function performance usually causes limitations in terms of the design in cases where aesthetics is important. The design changes made on the chamber in order to achieve function performance are applied on the WC pan trial mold, and since this requires organizing a plurality of mold parts together, the cost of the time consuming work is high.

[0004] Instead of making changes in the chamber structure for achieving function performance, minor changes intended to be made in the conventional flushing channel structures are generally sufficient for making significant improvements in the function performance. Making design changes in the flushing channel structures can be at least as costly as making chamber changes.

[0005] In the upper part of the WC pan chamber in the state of the art, there is provided an all-around open flushing water channel whose upper part is closed while the lower part thereof is a continuation of the WC pan chamber. The flushing water flows through the all-around open channel towards the bottom of the chamber / siphon structure following the chamber surface under the influence of gravity. It is quite easy to make a change in the flushing channel in such structures; however it is not effective to ensure performance in function tests. The chamber structure should be made compliant to the function performance.

[0006] In another WC pan structure in the state of the

art, the flushing water supplied to the entire upper part of the WC pan fills into the delivery channel and it flows through the flow holes, which are prepared in compliance with the chamber structure on the lower part of the flushing channel, towards the chamber bottom / siphon structure by following the chamber surface under the influence of gravity. It is difficult and costly to make amendments in both the flushing channel and the chamber structure in such structures.

[0007] Although these two examples of types of WC pans in the state of the art are conventional approaches applied by all producers for long years, researches and applications are conducted in order to produce structures which are easier to clean due to the fact that particularly the flushing channel structure causes hard-to-clean areas which are not sanitary.

[0008] In the flushing systems disclosed in the state of the art patent documents numbered WO2013087195A1 and US2015176264A1, the flushing water directed from a single outlet located on the upper part of the WC pan chamber towards the chamber rotates within the chamber and follows the chamber surfaces and flows towards the chamber bottom part / siphon structure. Although these exemplary approaches provide easy to clean WC pan chamber structures which are cleared of details, the flushing system is not controllable for the different flow requirements needed for different areas of the WC pan chamber. At the same time, in order to enable flow of the flushing water within the WC pan chamber, the general appearance of the WC pan should have an elliptical or similar form and applying this flushing system to the WC pan chambers having different plan views (e.g. rectangular or similar structures) poses difficulties.

[0009] In the flushing systems disclosed in the state of the art patent document numbered WO2013126921A2, in the guiding outlet alternatives formed at the area where the reservoir water speed is the highest at the rear upper part of the WC pan chamber; the flushing water which is directed in two directions (to the right and to the left parallel to the ground) follows the chamber surfaces and flows towards the chamber bottom part / siphon structure. Although the WC pan chamber structure is relatively simplified and easy to clean, it is not possible to control the flushing for different areas of the WC pan chamber. As it is the case in the previous example, the chamber structure is required to have an elliptical form.

[0010] In WC pan structures, the flushing water delivery and distribution system is located on the upper part of the structure. There are widespread production methods and applications of molding the upper part and lower part of the WC pan separately and then assembling them after or during the production. With this type of applications, which are realized by means of ceramic production methods, it becomes possible to produce details, which are difficult or impossible to produce via single-piece production methods, in both the upper and lower parts of the WC pan.

[0011] The patent document numbered US1435644A,

in the state of the art, shows forming a flushing channel system and flushing water channels opening to the chamber via molding the lower and upper parts of the WC pan separately and assembling them by adhesion. It shows the change in the orifice sections for distributing the water, which enters the flushing channel from the rear part of the WC pan and is delivered towards the front part in the channel, in line with the purpose.

[0012] The patent document numbered WO0136169 in the state of the art is an example showing production methods by adhesion of the lower and upper parts of the WC pan.

[0013] The flushing channel, which is defined in the patent document numbered WO2016009230 in the state of the art, is produced by molding the WC pan as two pieces and then adhering them. The flushing channel, which is positioned very close to the upper part of the WC pan chamber, enables flow towards the chamber bottom part / siphon structure via a flow following the chamber surfaces all around. Flow of the water from the flushing channel towards the chamber is controlled by the flow opening formed on the upper part of the chamber. There is provided a set in the flushing channel which controls the relation of the water with the flow opening.

[0014] Other flushing systems are disclosed e.g. in US 2006/0005310 and US 2013/0047330.

Problems Solved by the Invention

[0015] The objective of the present invention is to provide a WC pan flushing system which enables cleaning with lower water consumption by regulating the flow of the flushing function in WC pans.

[0016] Another objective of the present invention is to provide a WC pan flushing system which prevents splashing of the water outside during flushing in WC pans.

[0017] A further objective of the present invention is to provide a WC pan flushing system which enables the WC pan flushing channels to be easily cleaned.

Detailed Description of the Invention

[0018] A WC pan flushing system developed to fulfill the objective of the present invention is illustrated in the accompanying figures wherein:

Figure 1 is a perspective view of the WC pan flushing system.

Figure 2 is a perspective view of the main part.

Figure 3 is a front sectional view of the WC pan flushing system.

Figure 4 is a top view of the water flow in the WC pan flushing system.

Figure 5 is a perspective view of the upper part.

Figure 6 is a detailed sectional view of the WC pan flushing system.

[0019] The components in the figures are given reference numbers as follows:

1. WC pan flushing system

2. Main part

201. WC pan chamber inlet

202. WC pan chamber

203. Lower surface

204. WC pan water inlet hole

205. Set

206. Guiding rib

207. First edge line curve

208. First side surface

209. Main part adhesion surface

3. Upper part

301. Upper part adhesion surface

302. Second side surface

303. Abutment surface

304. Pressing surface

305. Horizontal surface

306. Second edge line curve

307. Inner surface

308. Cleansing hole

4. Flushing channel

5. Flow channel

[0020] A WC pan flushing system, which regulates flow of the flushing function and which also prevents overflow of the flushing water in the WC pan and enables the WC pan flushing channels to be easily cleaned, is proposed in accordance with the technical features of independent claim 1.

[0021] The WC pan flushing system (1) of the present invention basically comprises two main systems, namely the main part (2) and the upper part (3). The main part (2) has a WC pan structure and is connected onto the drain. There is provided a WC pan chamber inlet (201), which constitutes the drain part of the WC pan, on the main part (2); and the drain water is collected in the WC pan chamber inlet (201). A WC pan chamber (202) is provided which serves as a funnel with its curved structure to enable the water to flow towards the WC pan chamber inlet (201). On the upper end part of the WC pan chamber (202), there is a lower surface (203) which preferably extends parallel to the ground plane. There is a WC pan water inlet hole (204) provided on the WC pan chamber (202) and the WC pan is cleaned with the water entering through the WC pan water inlet hole (204). A set (205) is provided on the lower surface (203) and in front of the water inlet hole (204) such that it will serve as a barrier against the flow of the entering water. Guiding ribs (206), which are located on the lower surface (203) and the set (205), are used to guide the water entering through the water inlet hole (204) towards the WC pan

chamber (202). By means of the guiding ribs (206), the water is enabled to move more easily in the WC pan chamber (202) and flushing/cleaning process is performed with a smaller amount of water. A first edge line curve (207) in the form of an arc is located on the side corner of the part of the lower surface (203) facing the WC pan chamber inlet (201). A first side surface (208), which extends upwards in the form of a wall, is located on the other edge of the lower surface (203). A main part adhesion surface (209) is placed on the side surface of the first side surface (208) such that it is preferably parallel to the ground plane.

[0022] An upper part (3) is placed on the main part (2). An upper part adhesion surface (301) is located so as to correspond to the main part adhesion surface (209). A second side surface (302) extends from the upper part adhesion surface (301) preferably parallel to the main part (2) first side surface (208). An abutment surface (303) extends on the end edge of the second side surface (302) preferably parallel to the ground plane. The abutment surface (303) is placed on the guiding ribs (206). The guiding ribs (206) carry the abutment surface (303). A pressing surface (304) is placed on the end edge of the abutment surface (301) and the pressing surface (304) extends towards the WC pan chamber (202). A horizontal surface (305) is located on the end edge of the pressing surface (303) and the horizontal surface (305) is preferably disposed parallel to the ground plane. A second edge line curve (306) is located on the side corner of the part of the horizontal surface (305) facing the WC pan chamber inlet (201), and the second edge line curve (306) is in the form of an arc. An inner surface (307) extends from the second edge line curve (306) towards the upper part adhesion surface (301). A cleansing hole (308) is drilled on the inner surface (307) and the second side surface (302). A flushing channel (4) in the form of a hollow is located between the first side surface (208) and the second side surface (302) for passage of the water. A flow channel (5) in the form of a hollow is located between the horizontal surface (305) and the lower surface (203) for passage of the water.

[0023] The flushing channel (4) is a closed structure obtained by molding the WC pan as two pieces, namely the main part (2) and the upper part (3), during the production process and then assembling thereof.

[0024] By means of the flushing channel (4), the flushing water coming from the WC pan water inlet hole (204) hits the set (205) located on the lower surface (203) and it is enabled to be homogeneously spread on the lower surface (203). The water homogeneously spread on the lower surface (203) enters into the flushing channel (4) located between the first side surface (204) and the second side surface (302). The water in the flushing channel (4) is directed towards the WC pan chamber (202) through the guiding ribs (206). This way, the flow is enabled to be controlled. The water passing through the guiding ribs (206) is directed to a narrow flow channel (5) provided between the horizontal surface (305) and the

lower surface (203). Since the flow channel (5) between the horizontal surface (305) and the lower surface (203) is narrow, it enables the water to flow towards the WC pan chamber (202) with high pressure. In order to prevent the water flowing towards the WC pan chamber (202) with high pressure from overflowing out of the WC pan, the first edge line curve (207) located at the end part of the lower surface (203) and the second edge line curve (306) located on the horizontal surface (305) enable the water to flow towards the WC pan chamber (202) with high pressure. The inner surface (307) and the WC pan chamber (202) surfaces are positioned close to each other; by this means, cleaning the flow channel (5) through which the water flows towards the WC pan chamber (202) can be easily carried out by one person.

[0025] A WC pan system (1) is produced by assembling the main part (2) and the upper parts (3) which are molded separately. Adhesion process, which is a ceramic production method, is performed by using slurry, which is a ceramic raw material, as an adhesive in the phase wherein the molded parts are yet defined as "greenware" and shaping is possible. When the upper part (3) and the main part (2) of the WC pan are assembled, the upper part adhesion surface (301) abuts onto the main part adhesion surface (209) thereby forming the hollow of the flushing channel (4). The upper part (3) fits onto the guiding ribs (206) and enables the structure of the WC pan flushing system (1) to be more rigid. The flushing channel (4) is formed by connection of the first side surface (208) and lower surface (203) of the main part (2), which restrict the flushing channel (4) hollow, with the surfaces of the upper part (3), which restrict the flushing channel (4).

[0026] The flushing channel (4) guides the water towards the WC pan chamber (202) in a desired manner by means of the guiding ribs (206) which are positioned in the hollow of the flushing channel (4) formed on the main part (2). The guiding ribs (206) guiding the water flow in the flushing channel (4), are positioned on the surface which is located on the main part (2) and which forms the lower surface (203) of the flushing channel (4).

[0027] When the main part (2) and the upper part (3) of the WC pan are assembled, the WC pan chamber (202) and the inner surface (301) of the upper part (3) that complements the WC pan chamber (202) are approximately aligned, and a circumferential (all-around) flow channel (5) is formed between these two parts. The flow channel (5) enables the water directed through the flushing channel (4) to be output to the WC pan chamber (202) under certain conditions.

[0028] The purpose of the flushing water is to deliver the waste in the WC pan chamber (202) bottom part/siphon structure inlet, i.e. WC pan chamber inlet (201), to the drain line in the shortest possible time. In order to achieve this, a part of the flushing water is required to be delivered to the WC pan chamber (202) bottom part/siphon structure inlet, i.e. WC pan chamber inlet (201), without losing its speed. At the same time in the function tests, almost the entire surface area forming the WC pan

chamber (202) is enabled to be flushed at a certain ratio.

[0029] During the flushing function, providing different flow models at the same time is related to the water passing through the flushing channel (4) being directed to the WC pan chamber (202) by means of the structural details of the circumferential flow channel (5). For this, the water, whose flow model and direction is regulated by being passed through the flushing channel (4) and the guiding ribs (206), passes through the final hollow at the end of the flushing channel (4) and exits the circumferential flow channel (5) by a specific velocity vector. When the radius (rR), i.e. the second edge line curve (306), located circumferentially at the edge of the second side surface (302) of the flow channel (5) on the upper part (3) is kept in minimum sizes allowed by the ceramic production methods, the water is prevented from getting scattered by holding onto the curved surface (306) due to adhesion force. A part of the water output from the flow channel (5) by a specific velocity via a velocity vector (V(FR)) horizontally acquires a flow (FR) slope under the influence of gravity (Fg). In this case, with the FR flow model, a part of the water is directly guided to the WC pan chamber (202) bottom part/siphon structure inlet, i.e. WC pan chamber inlet (201). This flow model can be changed as desired by changing/enlarging the width of the circumferential flow channel (5) at certain parts thereof. By providing this flow model (FR), the water is prevented from splashing out of the WC pan.

[0030] The rounding (rB), i.e. the first edge line curve (207), formed at the edge line where the WC pan chamber (202) is connected with the circumferential flow channel (5) has an important function for flushing of the WC pan chamber (202). The first edge line curve (rB) (207), by making use of the adhesion force of the water, provides the flow (FB) that is formed as a result of the amount of water in direct proportion to the size of the first edge line curve (rB) (207) following the WC pan chamber (202) surface.

[0031] By means of simultaneous control of these different flow types, the waste in the WC pan chamber (201) is enabled to be discharged within the shortest time possible, and water conservation is obtained due to use of smaller amount of water during the function and the entire WC pan chamber is enabled to be flushed.

[0032] The WC pan water inlet hole (204), through which the water first enters into the WC pan flushing channel (4), is the area where the velocity of the water is the highest. This area is the most suitable area through which direct flow towards the WC pan chamber (202) bottom part can be enabled during flushing without splashing water out of the WC pan. However, a set (205), whose form and details may vary depending on different chamber forms, is formed at this area for controlling the velocity and flow rate of the water.

Claims

1. A WC pan flushing system, which regulates flow of water during flushing function and which also prevents overflow of the flushing water in the WC pan and enables the WC pan flushing channels to be easily cleaned, **comprising**

- at least one main part (2) which has a structure of a WC pan and is connected onto a drain,

- at least one WC pan chamber inlet (201) which forms the drain of the WC pan and in which the drain water is collected,

- at least one WC pan chamber (202) which has a curved structure enabling flush water to go to the WC pan chamber inlet (201),

wherein the WC pan further comprises:

- at least one lower surface (203) which is located on the upper end point of the WC pan chamber (202),

- at least one WC pan water inlet hole (204) which is provided on the WC pan chamber (202) and which enables the water to enter the WC pan chamber (202),

- at least one set (205) which is located on the lower surface (203) and in front of the WC pan water inlet hole (204) thereby serving as a barrier in front of the water entering the WC pan chamber (202) through the WC pan water inlet hole (204),

- at least one guiding rib (206), which is placed on the lower surface (203) or the set (205), and which enables to guide the water entering through the WC pan water inlet hole (204) towards the WC pan chamber (202),

- at least one first edge line curve (207) in the form of an arc located on the side corner part of the lower surface (203), the side corner part facing the WC pan chamber inlet (201),

- at least one first side surface (208) which extends upwards in the form of a wall on the other side of the lower surface (203), opposite the first edge line curve (207),

characterised by:

- at least one main part adhesion surface (209) which extends from the end point of the first side surface (208),

- at least one upper part (3) which is placed on the main part (2), the at least one upper part (3) having at least one upper part adhesion surface

(301) which is located so as to correspond to the main part (2) adhesion surface (209) and adhered thereto when assembling the WC pan from the at least main part (2) and the at least one upper part (3), the at least one upper part (3) further comprising:

- at least one second side surface (302) which extends from the at least one upper part adhesion surface (301) such that it is parallel to the main part (2) first side surface (208),
 - the at least one second side surface (302) comprising at least one abutment surface (303) which extends at the lower end edge of the second side surface (302) and is placed on the at least one guiding rib (206),
 - at least one pressing surface (304) extending from the end edge of the abutment surface (303) towards the lower surface (203) of the WC pan chamber (202),
 - at least one horizontal surface (305) which is located on the end edge of the pressing surface (303) and extends downward from the end point thereof,
 - at least one second edge line curve (306) in the form of an arc which is located on the side corner part of the horizontal surface (305) facing the WC pan chamber inlet (201),
 - at least one inner surface (307) which extends from the second edge line curve (306) towards the upper surface of the at least one upper part (3),
 - at least one cleansing hole (308) which is drilled on the inner surface (307) and the second side surface (302),
- wherein
- at least one flushing channel (4) in the form of a hollow is located between the first side surface (208) in form of a wall and facing the WC pan chamber (202) and the second side surface (302) facing outside the WC pan chamber (202), for passage of flushing water, and wherein
 - at least one flow channel (5) in the form of a hollow is located between the horizontal surface (305) and the lower surface (203) for passage of the water.

2. A WC pan flushing system (1) according to Claim 1, wherein the at least one flow channel (5) is a narrow area between the at least one inner surface (307) and the at least one first edge line curve (207) of the WC pan chamber (202), enabling flush water to flow towards the WC pan chamber (202) with high pressure.
3. A WC pan flushing system (1) according to Claim 1, wherein the at least one main part (2) and the at least one upper part (3) are produced in separate molds before being assembled to each other by adhering.

4. A WC pan flushing system (1) according to Claim 1, wherein the at least one flow channel (5) which is formed circumferentially of the WC pan, between the WC pan chamber (202) and the inner surface (301) of the upper part (3).

5. A WC pan flushing system (202) according to Claim 1, wherein the at least one flow channel (5) enables flushing water to be directed through the flushing channel (4) and to be output to the WC pan chamber (202).

Patentansprüche

1. WC-Pfannenspülsystem, das den Wasserstrom während der Spülfunktion regelt und gleichzeitig ein Überlaufen des Spülwassers in der WC-Pfanne verhindert und eine einfache Reinigung der WC-Pfannenspülkanäle ermöglicht, **umfassend**

- mindestens ein Hauptteil (2), das eine Struktur einer WC-Pfanne aufweist und mit einem Ablauf verbunden ist,
- mindestens einen WC-Pfannenkammereinlass (201), der den Ablauf der WC-Pfanne bildet und in dem das Ablaufwasser gesammelt wird,
- mindestens eine WC-Pfannenkammer (202), die eine gekrümmte Struktur aufweist, die es ermöglicht, dass Spülwasser zum WC-Pfannenkammereinlass (201) gelangt,

wobei die WC-Pfanne ferner umfasst:

- mindestens eine Unterseite (203), die sich am oberen Endpunkt der WC-Pfannenkammer (202) befindet.
- mindestens eine WC-Pfannenwasser-Einlassöffnung (204), die an der WC-Pfannenkammer (202) vorgesehen ist und dem Wasser den Eintritt in die WC-Pfannenkammer (202) ermöglicht
- mindestens ein Set (205), das sich auf der Unterseite (203) und vor der WC-Pfannenwasser-Einlassöffnung (204) befindet, somit als Barriere vor dem in die WC-Pfannenkammer (202) eintretenden Wasser durch die WC-Pfannenwasser-Einlassöffnung (204) dient,
- mindestens eine Führungsrippe (206), die auf der Unterseite (203) oder dem Set (205) platziert ist und die es ermöglicht, das durch die WC-Pfannenwasser-Einlassöffnung (204) eintretende Wasser in Richtung der WC-Pfannenkammer (202) zu leiten,
- mindestens eine erste Randlinienkurve (207) in Form eines Bogens, der sich auf dem Seiteneckteil der Unterseite (203) befindet, die Seitenecke zum WC-Pfannenkammereinlass (201) zugewandt,

- mindestens eine erste Seitenfläche (208), die sich auf der anderen Seite der Unterseite (203) gegenüber der ersten Randlinienkurve (207) in Form einer Wand nach oben erstreckt,

gekennzeichnet durch:

- mindestens eine Hauptteilhaufffläche (209), die sich vom Endpunkt der ersten Seitenfläche (208) erstreckt,

- mindestens ein Oberteil (3), das auf dem Hauptteil (2) platziert ist, der mindestens eine Oberteil (3) mit mindestens einer Oberteilhaufffläche (301), die entsprechend der Hauptteil (2) Haufffläche (209) befindet und daran bei der Montage der WC-Pfanne aus dem mindestens Hauptteil (2) und dem mindestens einen Oberteil (3) angeheftet ist, der mindestens eine Oberteil (3) ferner umfassend:

- mindestens eine zweite Seitenfläche (302), die sich von der mindestens einen Oberteilhaufffläche (301) so erstreckt, dass sie parallel zur ersten Seitenfläche (208) des Hauptteils (2) erstreckt,

- die mindestens eine zweite Seitenfläche (302) mindestens eine Anlagefläche (303) umfasst, die sich an der unteren Endkante der zweiten Seitenfläche (302) erstreckt und auf der mindestens einen Führungsrippe (206) platziert ist,

- mindestens eine Druckfläche (304), die sich von der Endkante der Anlagefläche (303) zur Unterseite (203) der WC-Pfannenkommer (202) erstreckt,

- mindestens eine horizontale Fläche (305), die sich an der Endkante der Druckfläche (303) befindet und sich vom Endpunkt derselben nach unten erstreckt,

- mindestens eine zweite Randlinienkurve (306) in Form eines Bogens, die sich auf dem dem WC-Pfannenkommereinlass (201) zugewandten Seiteneckteil der horizontalen Fläche (305) befindet,

- mindestens eine Innenfläche (307), die sich von der zweiten Randlinienkurve (306) zur Oberseite des mindestens einen Oberteils (3) erstreckt,

- mindestens ein Reinigungsloch (308), das auf der Innenfläche (307) und der zweiten Seitenfläche (302) gebohrt ist,

wobei

- zwischen in Form einer Wand zwischen der ersten Seitenfläche (208), und der WC-Pfannenkommer (202) zugewandt ist, der zweiten Seitenfläche (302), die außerhalb der WC-Pfannenkommer (202) zugewandt ist, mindestens ein Spülkanal (4) in Form eines Hohlraums zum

Durchleiten von Spülwasser befindet ist, und wobei

- mindestens ein Strömungskanal (5) in Form eines Hohlraums zwischen der horizontalen Fläche (305) und der Unterseite (203) zum Durchleiten des Wassers befindet ist.

2. WC-Pfannenspülsystem (1) nach Anspruch 1, wobei der mindestens eine Strömungskanal (5) ein schmaler Bereich zwischen der mindestens einen Innenfläche (307) und der mindestens einen ersten Randlinienkurve (207) der WC-Pfannenkommer (202) ist, der einen Spülwasserfluss in Richtung der WC-Pfannenkommer (202) mit hohem Druck ermöglicht.

3. WC-Pfannenspülsystem (1) nach Anspruch 1, wobei das mindestens eine Hauptteil (2) und das mindestens eine Oberteil (3) in separaten Formen hergestellt werden, bevor sie durch Anhaften miteinander verbunden werden.

4. WC-Pfannenspülsystem (1) nach Anspruch 1, wobei der mindestens eine Strömungskanal (5), der in Umfangsrichtung der WC-Pfanne gebildet ist, zwischen der WC-Pfannenkommer (202) und der Innenfläche (301) des oberen Teils (3) liegt.

5. WC-Pfannenspülsystem (202) nach Anspruch 1, wobei der mindestens eine Strömungskanal (5) es ermöglicht, Spülwasser durch den Spülkanal (4) zu leiten und an die WC-Pfannenkommer (202) abzugeben.

Revendications

1. Système de rinçage de cuvette de WC, qui régule le débit d'eau pendant la fonction de rinçage et qui empêche également le débordement de l'eau de rinçage dans la cuvette de WC et permet de nettoyer facilement les canaux de rinçage de cuvette de WC, comprenant

- au moins une partie principale (2) qui présente une structure de cuvette de WC et qui est reliée à un drain,

- au moins une entrée (201) de chambre de cuvette de WC qui forme le drain de la cuvette de WC et dans laquelle l'eau de drainage est captée,

- au moins une chambre de cuvette de WC (202) qui présente une structure courbe permettant à l'eau de rinçage d'entrer dans l'entrée de la chambre de cuvette de WC (201), dans laquelle la cuvette de WC comprend en outre :

- au moins une surface inférieure (203) qui est située sur le point d'extrémité supérieur

de la chambre de cuvette WC (202),
 - au moins un orifice d'entrée d'eau de cuvette de WC (204) qui est prévu sur la chambre de cuvette de WC (202) et qui permet à l'eau d'entrer dans la chambre de cuvette de WC (202),
 - au moins un ensemble (205) qui est situé sur la surface inférieure (203) et devant l'orifice d'entrée d'eau de cuvette de WC (204) servant ainsi de barrière devant l'eau entrant dans la chambre de cuvette de WC (202) par l'orifice d'introduction d'eau de cuvette de WC (204),
 - au moins une nervure de guidage (206), qui est placée sur la surface inférieure (203) ou sur l'ensemble (205), et qui permet de guider l'eau entrant par l'orifice d'entrée d'eau de cuvette de WC (204) vers la chambre de cuvette de WC (202),
 - au moins une première courbe de ligne de bord (207) sous la forme d'un arc situé sur la partie d'angle latérale de la surface inférieure (203), l'angle latéral faisant face à l'entrée (201) de la chambre de cuvette WC,
 - au moins une première surface latérale (208) qui s'étend vers le haut sous la forme d'une paroi de l'autre côté de la surface inférieure (203), opposée à la première courbe de ligne de bord (207),

caractérisé par:

- au moins une surface d'adhérence de partie principale (209) qui s'étend depuis le point final de la première surface latérale (208),
 - au moins une partie supérieure (3) qui est placée sur la partie principale (2), la au moins une partie supérieure (3) ayant au moins une surface d'adhérence de la partie supérieure (301) qui est située de manière à correspondre à la surface d'adhérence (209) de la partie principale (2) et y a adhéré lors du montage de la cuvette de WC depuis la au moins partie principale (2) et la au moins une partie supérieure (3), ladite au moins une partie supérieure (3) comprenant en plus:
 - au moins une deuxième surface latérale (302) qui s'étend à partir de la au moins une surface d'adhérence (301) de la partie supérieure de manière à être parallèle à la première surface latérale (208) de la partie principale (2),
 - la au moins une deuxième surface latérale (302) comprenant au moins une surface de butée (303) qui s'étend au bord d'extrémité inférieur de la deuxième surface latérale (302) et est placée sur la au moins une ner-

vure de guidage (206),
 - au moins une surface de pressage (304) s'étendant du bord d'extrémité de la surface de butée (303) vers la surface inférieure (203) de la chambre de cuvette de WC (202),
 - au moins une surface horizontale (305) qui est située sur le bord d'extrémité de la surface de pressage (303) et s'étend vers le bas à partir de son point d'extrémité,
 - au moins une seconde courbe de ligne de bord (306) sous la forme d'un arc qui est situé sur la partie d'angle latérale de la surface horizontale (305) tournée vers l'entrée (201) de la chambre de cuvette de WC,
 - au moins une surface intérieure (307) qui s'étend de la deuxième courbe de ligne de bord (306) vers la surface supérieure de la au moins une partie supérieure (3),
 - au moins un trou de nettoyage (308) qui est percé sur la surface intérieure (307) et la seconde surface latérale (302),

dans lequel

- au moins un canal de rinçage (4) en forme de creux est situé entre la première surface latérale (208) en forme de paroi et tournée vers la chambre de cuvette de WC (202) et la seconde surface latérale (302) tournée vers l'extérieur de la chambre de cuvette de WC (202), pour le passage d'eau de rinçage, et dans lequel
 - au moins un canal d'écoulement (5) en forme de creux est disposé entre la surface horizontale (305) et la surface inférieure (203) pour le passage de l'eau.

2. Système de rinçage de cuvette de WC (1) selon la revendication 1, dans lequel le au moins un canal d'écoulement (5) est une zone étroite entre la au moins une surface intérieure (307) et la au moins une première courbe de ligne de bord (207) de la chambre de cuvette WC (202), permettant à l'eau de rinçage de s'écouler vers la chambre de cuvette de WC (202) à haute pression.
3. Système de rinçage de cuvette de WC (1) selon la revendication 1, dans lequel la au moins une partie principale (2) et la au moins une partie supérieure (3) sont fabriquées dans des moules séparés avant d'être assemblées l'une à l'autre par collage.
4. Système de rinçage de cuvette de WC (1) selon la revendication 1, dans lequel le au moins un canal d'écoulement (5) qui est formé circonférentiellement de cuvette de WC, entre la chambre de cuvette WC (202) et la surface intérieure (301) de la partie supérieure (3).

5. Système de rinçage de cuvette de WC (202) selon la revendication 1, dans lequel le au moins un canal d'écoulement (5) permet de diriger l'eau de rinçage à travers le canal de rinçage (4) et de l'acheminer vers la chambre de cuvette WC (202).

5

10

15

20

25

30

35

40

45

50

55

FIGURE 1

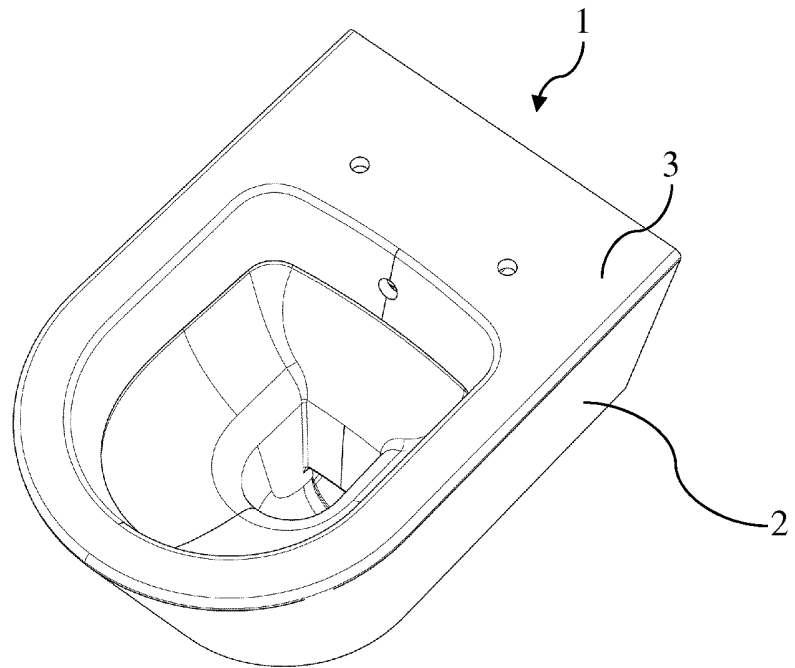


FIGURE 2

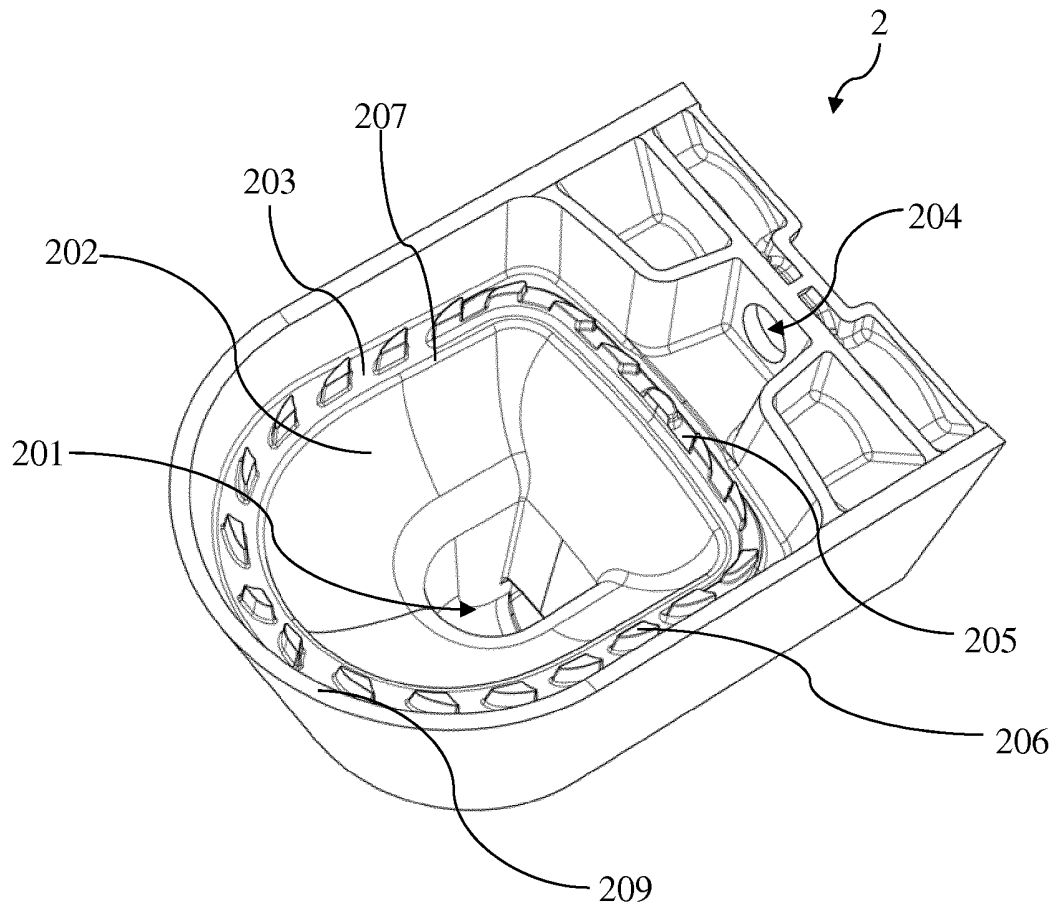


FIGURE 3

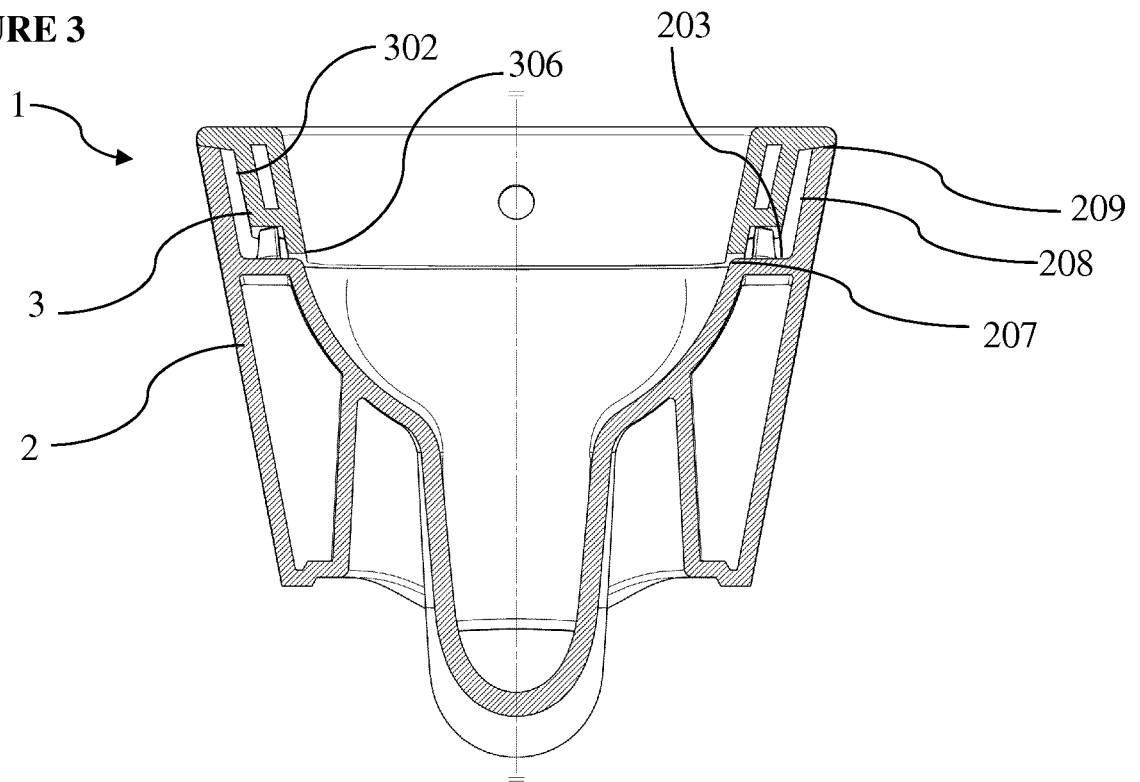


FIGURE 4

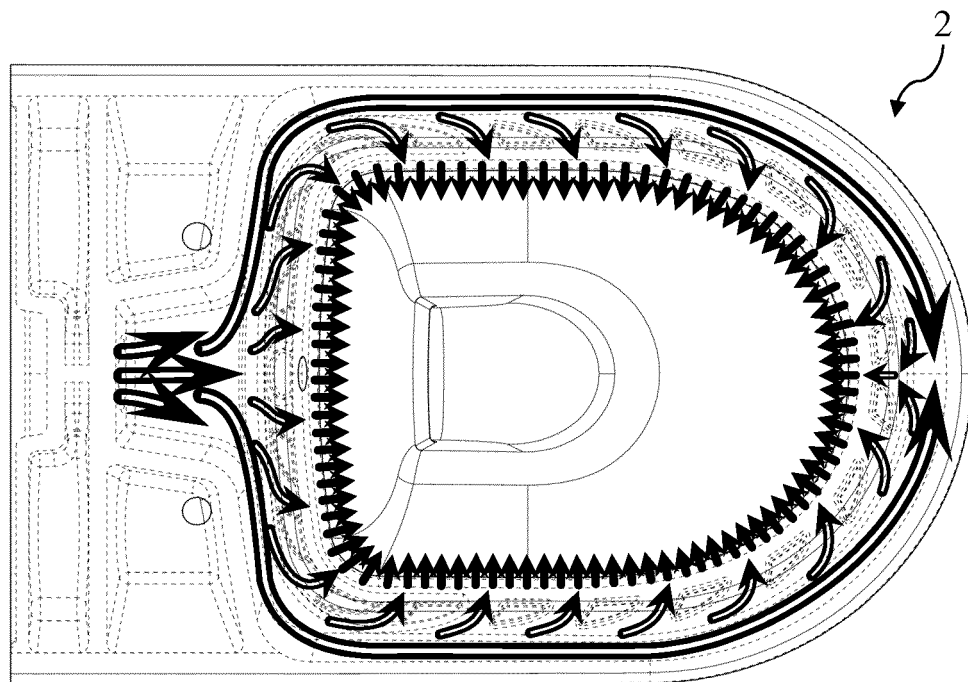


FIGURE 5


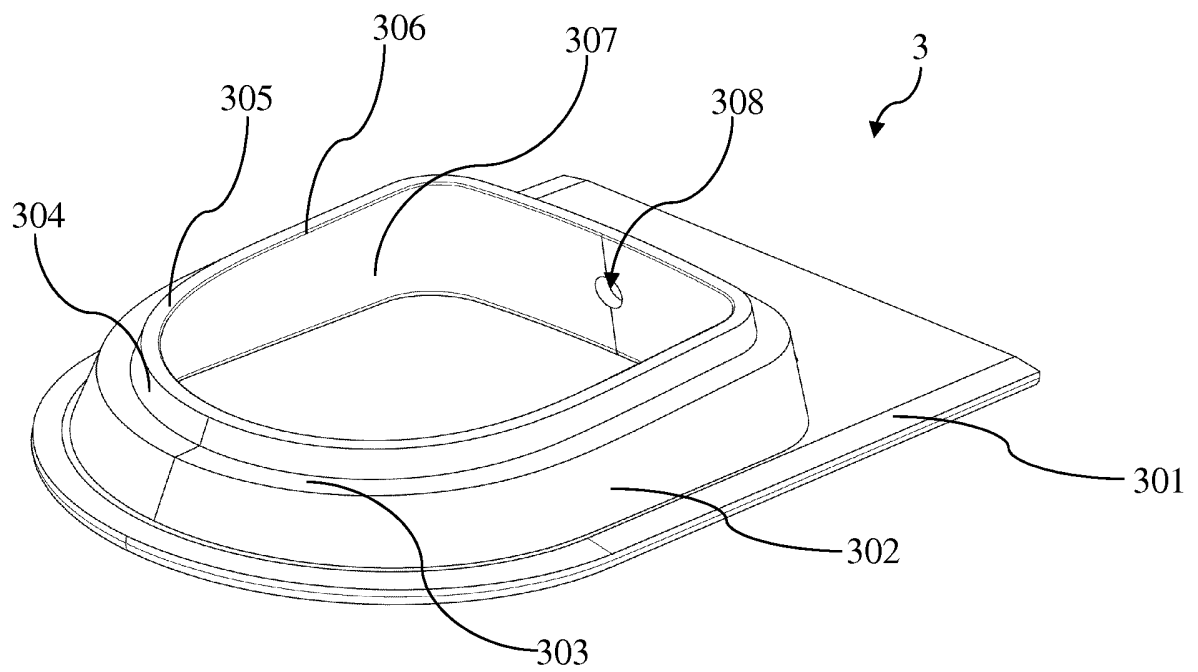


FIGURE 6

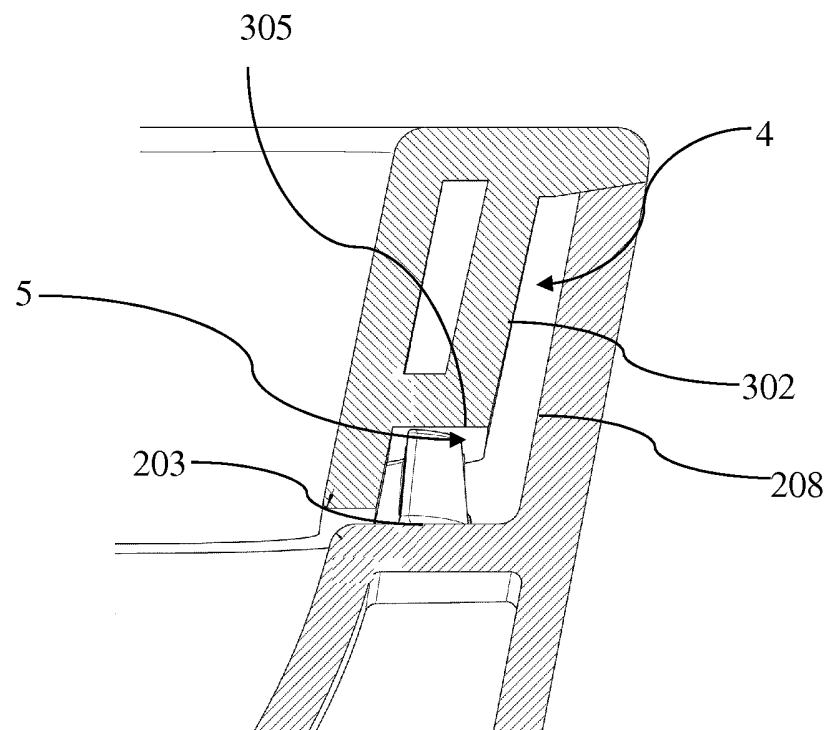

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 2013087195 A1 **[0008]**
- US 2015176264 A1 **[0008]**
- WO 2013126921 A2 **[0009]**
- US 1435644 A **[0011]**
- WO 0136169 A **[0012]**
- WO 2016009230 A **[0013]**
- US 20060005310 A **[0014]**
- US 20130047330 A **[0014]**