



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
20.06.2018 Bulletin 2018/25

(51) Int Cl.:
H04B 5/00 (2006.01)

(21) Application number: **17199033.6**

(22) Date of filing: **27.10.2017**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
MA MD

(72) Inventors:
• **HUEBERT, Gernot**
5656 AG Eindhoven (NL)
• **BRUCKBAUER, Johannes**
5656 AG Eindhoven (NL)
• **MERLIN, Erich**
5656 AG Eindhoven (NL)

(30) Priority: **19.12.2016 US 201615383406**

(74) Representative: **Krott, Michel**
NXP Semiconductors
Intellectual Property & Licensing
High Tech Campus 60
5656 AG Eindhoven (NL)

(71) Applicant: **NXP B.V.**
5656 AG Eindhoven (NL)

(54) **METHOD AND SYSTEM FOR OPERATING A COMMUNICATIONS DEVICE THAT COMMUNICATES VIA INDUCTIVE COUPLING**

(57) Embodiments of methods and systems for operating a communications device that communicates via inductive coupling are described. In an embodiment, a method for operating a communications device that communicates via inductive coupling involves obtaining

transmission output power information related to the communications device and measuring a detuning condition based on the transmission output power information. Other embodiments are also described.

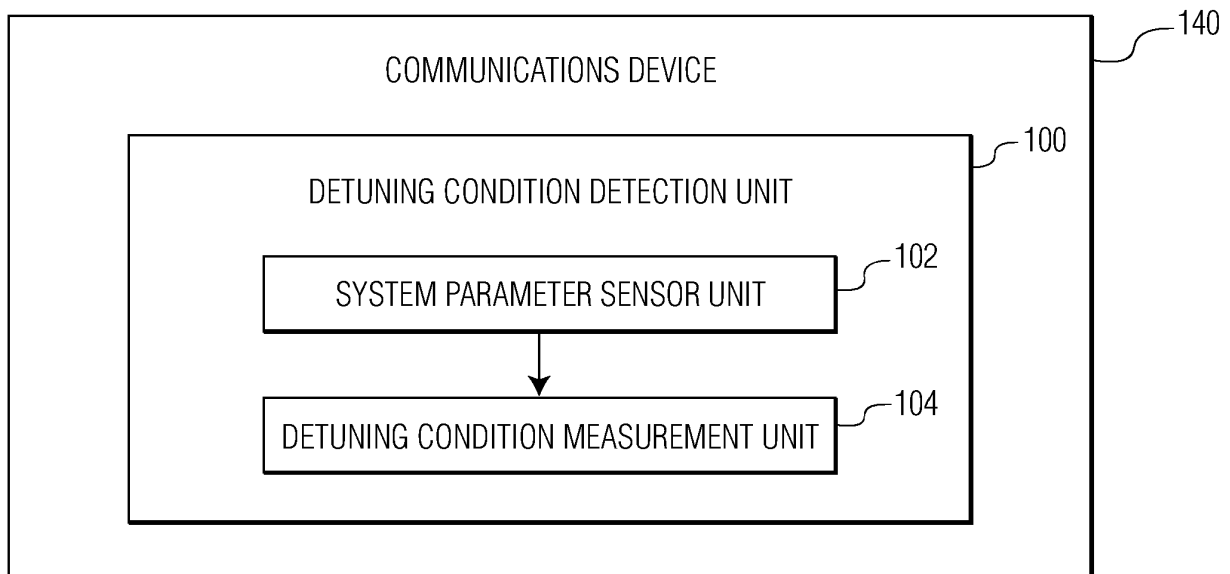


FIG. 1

Description

BACKGROUND

[0001] Communications devices can communicate with each other via inductive coupling. For example, near field communications (NFC) is a wireless technology based on radio frequency identification (RFID). NFC defines a wireless connection between two devices in close proximity to each other to exchange data between the two devices. For example, the data communications between a reader and a transponder typically are bi-directional and initiated by the reader, which generates a continuous magnetic field. RFID devices that utilize NFC typically can be configured for either passive load modulation (PLM) or active load modulation (ALM).

[0002] In a communications device that communicates via inductive coupling, a detuning condition can affect the performance of the communications device. For example, a detuning condition can affect power transfer, shift characteristics (e.g., resonant frequency and Q-factor) of a matching network of the communications device, and the load of the transmitter. However, a typical communications device that communicates via inductive coupling generally does not have a built-in ability to detect the detuning condition.

SUMMARY

[0003] Embodiments of methods and systems for operating a communications device that communicates via inductive coupling are described. In an embodiment, a method for operating a communications device that communicates via inductive coupling involves obtaining transmission output power information related to the communications device and measuring a detuning condition based on the transmission output power information. Other embodiments are also described.

[0004] In an embodiment, the method further involves obtaining a received signal strength indicator (RSSI) at the communications device. Measuring the detuning condition includes measuring the detuning condition based on the transmission output power information and the RSSI.

[0005] In an embodiment, the transmission output power information includes a transmitter current and a transmitter voltage within the communications device.

[0006] In an embodiment, the method further involves adjusting a transmitter configuration of the communications device in response to the detuning condition.

[0007] In an embodiment, obtaining the transmission output power information includes obtaining a transmitter current and a transmitter voltage within the communications device from a supply regulator of the communications device.

[0008] In an embodiment, obtaining the transmission output power information includes obtaining a transmitter current and a transmitter voltage within the communica-

tions device from a transmitter driver of the communications device.

[0009] In an embodiment, measuring the detuning condition based on the transmission output power information of the communications device includes generating a ratio between a transmitter impedance when a corresponding communications device is in close proximity to the communications device and a nominal transmitter impedance when there is not a corresponding communications device in close proximity to the communications device.

[0010] In an embodiment, measuring the detuning condition based on the transmission output power information of the communications device further includes generating a ratio between a receiver gain when a corresponding communications device is in close proximity to the communications device and a nominal receiver gain when there is not a corresponding communications device in close proximity to the communications device.

[0011] In an embodiment, measuring the detuning condition based on the transmission output power information of the communications device includes measuring the detuning condition based on the transmission output power information before transmitting a response message.

[0012] In an embodiment, a communications device that communicates via inductive coupling includes a system parameter sensor unit configured to obtain transmission output power information related to the communications device and a detuning condition measurement unit configured to measure a detuning condition based on the transmission output power information.

[0013] In an embodiment, the system parameter sensor unit is configured to obtain an RSSI at the communications device. The detuning condition measurement unit is configured to measure the detuning condition based on the transmission output power information and the RSSI.

[0014] In an embodiment, the transmission output power information includes a transmitter current and a transmitter voltage within the communications device.

[0015] In an embodiment, the communications device further includes a control unit configured to adjust a transmitter configuration of the communications device in response to the detuning condition.

[0016] In an embodiment, the system parameter sensor unit is configured to obtain a transmitter current and a transmitter voltage within the communications device from a supply regulator of the communications device.

[0017] In an embodiment, the system parameter sensor unit is configured to obtain a transmitter current and a transmitter voltage within the communications device from a transmitter driver of the communications device.

[0018] In an embodiment, the detuning condition measurement unit is configured to generate a ratio between a transmitter impedance when a corresponding communications device is in close proximity to the communications device and a nominal transmitter impedance

when there is not a corresponding communications device in close proximity to the communications device.

[0019] In an embodiment, the detuning condition measurement unit is configured to generate a ratio between a receiver gain when a corresponding communications device is in close proximity to the communications device and a nominal receiver gain when there is not a corresponding communications device in close proximity to the communications device.

[0020] In an embodiment, the detuning condition measurement unit is configured to measure the detuning condition based on the transmission output power information before transmitting a response message

[0021] In an embodiment, a method for operating a communications device that communicates via inductive coupling involves obtaining a transmitter current and a transmitter voltage within the communications device from a supply regulator of the communications device and an RSSI at the communications device and measuring a detuning condition based on the transmitter current and the transmitter voltage and the RSSI.

[0022] In an embodiment, measuring the detuning condition based on the transmission output power information of the communications device includes measuring the detuning condition based on the transmission output power information before transmitting a response message.

[0023] Other aspects and advantages of embodiments of the present invention will become apparent from the following detailed description taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0024]

Fig. 1 is a functional block diagram of a communications device in accordance with an embodiment of the invention.

Fig. 2 depicts an embodiment of a communications device that can be used with a corresponding reader to form an inductively coupled communications system.

Fig. 3 illustrates a plot of transmitter current within the communications device depicted in Fig. 2 versus the distance between the communications device and the corresponding reader device depicted in Fig. 2.

Fig. 4 illustrates a plot of the received signal voltage of the communications device depicted in Fig. 2 versus the distance between the communications device and the corresponding reader device depicted in Fig. 2.

Fig. 5 is a process flow diagram of a method for accessing the transmitter current within the communications device depicted in Fig. 2.

Fig. 6 depicts a sequence of commands received at the communications device depicted in Fig. 2 and a

sequence of responses transmitted to the reader device by the communications device depicted in Fig. 2 during a transaction.

Fig. 7 is a process flow diagram of a method for operating a communications device that communicates via inductive coupling in accordance with an embodiment of the invention.

Fig. 8 is a process flow diagram of a method for operating a communications device that communicates via inductive coupling in accordance with another embodiment of the invention.

[0025] Throughout the description, similar reference numbers may be used to identify similar elements.

DETAILED DESCRIPTION

[0026] It will be readily understood that the components of the embodiments as generally described herein and illustrated in the appended figures could be arranged and designed in a wide variety of different configurations. Thus, the following more detailed description of various embodiments, as represented in the figures, is not intended to limit the scope of the present disclosure, but is merely representative of various embodiments. While the various aspects of the embodiments are presented in drawings, the drawings are not necessarily drawn to scale unless specifically indicated.

[0027] The present invention may be embodied in other specific forms without departing from its spirit or essential characteristics. The described embodiments are to be considered in all respects only as illustrative and not restrictive. The scope of the invention is, therefore, indicated by the appended claims rather than by this detailed description. All changes which come within the meaning and range of equivalency of the claims are to be embraced within their scope.

[0028] Reference throughout this specification to features, advantages, or similar language does not imply that all of the features and advantages that may be realized with the present invention should be or are in any single embodiment of the invention. Rather, language referring to the features and advantages is understood to mean that a specific feature, advantage, or characteristic described in connection with an embodiment is included in at least one embodiment of the present invention. Thus, discussions of the features and advantages, and similar language, throughout this specification may, but do not necessarily, refer to the same embodiment.

[0029] Furthermore, the described features, advantages, and characteristics of the invention may be combined in any suitable manner in one or more embodiments. One skilled in the relevant art will recognize, in light of the description herein, that the invention can be practiced without one or more of the specific features or advantages of a particular embodiment. In other instances, additional features and advantages may be recognized in certain embodiments that may not be present in all embod-

iments of the invention.

[0030] Reference throughout this specification to "one embodiment," "an embodiment," or similar language means that a particular feature, structure, or characteristic described in connection with the indicated embodiment is included in at least one embodiment of the present invention. Thus, the phrases "in one embodiment," "in an embodiment," and similar language throughout this specification may, but do not necessarily, all refer to the same embodiment.

[0031] Fig. 1 is a functional block diagram of a communications device 140 in accordance with an embodiment of the invention. In the embodiment depicted in Fig. 1, the communications device communicates via inductive coupling. In some embodiments, the communications device may be a card/transponder device or the communications device may be in a "card-mode." In some other embodiments, the communications device may be a reader device or the communications device may be in a "reader mode." The communications device may include a detuning condition detection unit 100 configured to perform detuning condition detection for the communications device. In the embodiment depicted in Fig. 1, the detuning condition detection unit 100 includes a system parameter sensor unit 102 and a detuning condition measurement unit 104. The communications device may be an integrated circuit (IC) device. In some embodiments, the communications device is implemented in a handheld computing system or a mobile computing system, such as a mobile phone. The communications device may be a near field communications (NFC) device that utilizes inductive coupling to communicate. In some embodiments, the communications device is implemented as an RF transponder compatible with the ISO/IEC 14443 standard. Although the illustrated communications device is shown with certain components and described with certain functionality herein, other embodiments of the communications device may include fewer or more components to implement the same, less, or more functionality. In some embodiments, the communications device is an active load modulation (ALM) device. In such embodiments, the communications device can be configured to generate its own magnetic field for transmitting an outgoing RF signal using a current source, such as a battery, which results in greater communications distances compared to passive load modulation (PLM) systems.

[0032] In some embodiments, the detuning condition detection unit 100 can detect a detuning condition related to the communications device 140 based on one or more system parameters of the communications device. The communications device can perform various operations in response to the detected the detuning condition related to the communications device. The detuning condition detection unit can be used to adjust a transmitter configuration of the communications device. For example, the communications device can adjust a transmitter modulation configuration of the communications device, a

transmitter impedance configuration of the communications device, and/or a transmitter output power configuration of the communications device to compensate for the detuning condition related to the communications device 140 to improve the overall system performance of the communications device. Consequently, the overall inductive coupling based communications performance of the communications device can be improved.

[0033] In the embodiment depicted in Fig. 1, the system parameter sensor unit 102 is used to obtain at least one system parameter related to the communications device 140. The system parameter sensor unit may be implemented as firmware, hardware and a combination of software, firmware, and/or hardware. In some embodiments, the system parameter sensor unit includes at least one sensor, for example, a voltage sensor or a current sensor. In some embodiments, the system parameter sensor unit obtains transmission output power information related to the communications device. The transmission output power information can be used to derive a transmitter detuning condition related to the communications device. The transmission output power information may include a transmitter voltage within the communications device and/or a transmitter current within the communications device. The system parameter sensor unit may also obtain a received signal strength indicator (RSSI) at the communications device. For example, the system parameter sensor unit may include an RSSI sensor configured to measure the signal amplitude of the received RF signal at the communications device to generate an RSSI. The RSSI can be used to derive a receiver detuning condition related to the communications device.

[0034] In the embodiment depicted in Fig. 1, the detuning condition measurement unit 104 is used to measure a detuning condition based on at least one system parameter related to the communications device 140. The detuning condition measurement unit may be implemented as software, firmware, hardware and a combination of software, firmware, and/or hardware. In some embodiments, the detuning condition measurement unit includes at least one processor, for example, a microprocessor. In some embodiments, the detuning condition measurement measures a transmitter (TX) detuning condition related to the communications device based on the transmission output power information related to the communications device. In an embodiment, the detuning condition measurement unit generates a ratio between a transmitter impedance when a corresponding communications device (e.g., a reader device or a card/tag device) is in close proximity to the communications device (e.g., when a corresponding communications device is within the NFC communications range (e.g., 20 centimeters) of the communications device) and a nominal transmitter impedance when there is not a corresponding communications device in close proximity to the communications device (e.g., when a corresponding communications device is out of the NFC communications range (e.g., 20 centimeters) of the communications device). For

example, the detuning condition measurement unit generates a ratio between a transmitter impedance when a corresponding communications device is within a predefined communications range of the communications device) and a nominal transmitter impedance when there is no corresponding communications device within, for example, at least 10 times of the predefined communications range. In some embodiments, the detuning condition measurement may measure a receiver (RX) detuning condition related to the communications device based on the RSSI at the communications device. In an embodiment, the detuning condition measurement unit generates a ratio between a receiver gain when a corresponding communications device is in close proximity to the communications device (e.g., when a corresponding communications device is within the NFC communications range (e.g., 20 centimeters) of the communications device) and a nominal receiver gain when there is not a corresponding communications device in close proximity to the communications device (e.g., when a corresponding communications device is out of the NFC communications range (e.g., 20 centimeters) of the communications device). For example, the detuning condition measurement unit generates a ratio between a receiver gain when a corresponding communications device is within a predefined communications range of the communications device and a nominal receiver gain when there is no corresponding communications device within, for example, at least 10 times of the predefined communications range. In some embodiments, the detuning condition measurement unit may measure a system detuning condition related to the communications device based on the transmission output power information related to the communications device and the RSSI at the communications device.

[0035] Fig. 2 depicts an embodiment of a communications device 240, similar to the communications device 140 depicted in Fig. 1, which can be used with a corresponding reader device 230 to form an inductively coupled communications system 250. The corresponding reader device may be a dedicated reader device or a communications device in reader-mode. In the embodiment depicted in Fig. 2, a communications device 240 includes a detuning condition measurement unit 204, a control unit 222, a matching network 210 that is coupled to an antenna 212, an analog receiver 214, a RSSI sensor 216 configured to measure the signal amplitude of the received RF signal (RX signal) to generate a received signal strength indicator (RSSI), an analog transmitter driver 218, and a low-dropout regulator (LDO) 220. The antenna may be an induction type antenna such as a loop antenna. In an example operation of the communications device, an RF signal (e.g., an RX signal) is received by the antenna via inductive coupling from an antenna 232 of the corresponding reader device and is passed to the analog receiver to convert the RF signal into a digital signal (e.g., RX data). A signal (e.g., TX data) is generated in response to the RF signal and is

used to produce an outgoing RF signal (e.g., a TX signal) at the transmitter driver, which is transmitted via inductive coupling using the antenna. The communications device 240 depicted in Fig. 2 is one possible embodiment of the communications device 140 depicted in Fig. 1. However, the communications device depicted in Fig. 1 is not limited to the embodiment shown in Fig. 2. In some embodiments, the communications device 240 is an active load modulation (ALM) device. Although the communications device 240 is shown in Fig. 2 as including the LDO 222, in other embodiments, the communications device 240 includes other type of supply regulator (e.g., a DC-to-DC converter). In addition, although the communications device 240 is shown in Fig. 2 as being used with the corresponding reader device 230 to form the inductively coupled communications system 250, in other embodiments, the communications device 240 is in reader mode and is used with a corresponding card/tag device to form an inductively coupled communications system.

[0036] The detuning condition in the inductively coupled communications system 250 can affect multiple factors that have an effect on the system performance of the inductively coupled communications system. For example, a detuning condition can affect the load on the antenna 212 of the communications device 240 and hence the load on the transmitter driver 218. For a strongly detuned communications system, the load on the transmitter driver can be relatively low (e.g., lowered by 10dB). Consequently, the current for the voltage controlled transmitter driver can increase, which will increase the driver current and power dissipation. The detuning condition can also affect the load on the receiver 214. For example, in the event of an increase in power at the matching network 210, the receiver might get overloaded and/or the receiver signal budget can change. The detuning condition can also affect the phase configuration of the communications device 240. For example, due to the change in the inductively coupled communications system caused by the detuning condition, the phase relation caused by the matching networks and antennas of the communications device 240 and the corresponding reader device 230 can change. For phase sensitive communication (e.g., ALM in FeliCa network, EMVCo LMA), the detuning condition can negatively affect the load modulation amplitude (LMA) performance. The detuning condition can also affect the frequency response of the inductively coupled communications system. For example, the detuning condition can impact the frequency response (resonant frequency, Q-factor) of the antenna/matching network of the communications device 240 and the corresponding reader device and consequently, affect the transferred signal (amplitude and phase) in both communication directions. The detuning condition in the inductively coupled communications system may be important for platforms with small antennas such as wearable devices and/or platforms with significant metal content that have a degrade in communication or power transfer performance even under normal (non-detuned)

conditions.

[0037] The detuning condition measurement unit 204 can measure a transmitter (TX) detuning condition and/or a receiver (RX) detuning condition in the inductively coupled communications system 250. In some embodiments, the transmitter detuning condition is defined as a ratio between the actual transmitter impedance (with the reader device 230 in close proximity to the communications device 240) and the nominal transmitter impedance (without a reader in close proximity to the communications device). The transmitter detuning condition can be measured by the detuning condition measurement unit 204 based on transmitter (TX) power (e.g., transmitter (TX) voltage and/or transmitter (TX) current) during a transmitter operation. In some embodiments, the transmitter power information is assessed based on the transmitter voltage level that can be determined by the transmitter driver 218, the LDO 220 (e.g., automatic power control), and the control unit 222 and/or the transmitter current, which is measured by a current monitor of the transmitter driver, the LDO or the control unit. Fig. 3 illustrates a plot of transmitter (TX) current within the communications device 240 depicted in Fig. 2 versus the distance between the communications device and the corresponding reader device 230 depicted in Fig. 2. As illustrated in Fig. 3, the transmitter current decreases when the distance between the communications device and the corresponding reader device, "z," increases.

[0038] In some embodiments, the receiver detuning condition is defined as a ratio of actual receiver gain (from reader source field to target receiver input) when a reader antenna is in close proximity to the communications device 240 versus a nominal receiver gain (from reader source field to target receiver input) when a reader antenna is not in close proximity to the communications device. The receiver detuning condition can be measured by the detuning condition measurement unit based on the receiver input level, which may be represented by the value of the RSSI, which is generated by the RSSI sensor 216. Fig. 4 illustrates a plot of the received signal voltage of the communications device 240 depicted in Fig. 2 versus the distance between the communications device and the corresponding reader device 230 depicted in Fig. 2. As illustrated in Fig. 4, the received signal voltage decreases as the distance between the communications device and the corresponding reader device, "z," increases. In some embodiments, the received signal voltage may saturate and stay constant or even decrease when the communications device is in close proximity to the corresponding reader device. In these embodiments, the receiver detuning condition can be detected based on one or more additional input signal parameters.

[0039] In some embodiments, the detuning condition measurement unit 204 can measure a transmitter/receiver detuning condition in the inductively coupled communications system 250 based on the transmitter power information and the value of the RSSI from the RSSI sensor 216. The combination of the transmitter power informa-

tion and the value of the RSSI can provide information for the field strength, H, of inductive coupling (and in turn an estimate of the distance between the communications device 240 and the corresponding reader device 230), and an estimate of the transmitter/receiver detuning condition.

[0040] In some embodiments, the control unit 222 enables a sequence of steps to activate the transmitter driver 218 and other components of the transmitter section of the communications device 240 to execute the measurement of the transmitter detuning condition. The control unit may be implemented as software, firmware, hardware and a combination of software, firmware, and/or hardware. In some embodiments, the control unit includes at least one processor, for example, a microprocessor. Fig. 5 is a process flow diagram of a method for accessing the transmitter current within the communications device depicted in Fig. 2. At block 502, transmitter blocks (e.g., transmitter phase-locked loop (PLL) and transmitter supply) are activated. For example, transmitter biasing is enabled, transmitter PLL is started and settled, and the transmitter supply is setup. At block 504, the transmitter driver is activated and an RF pulse is generated. At block 506, the transmitter current is captured in the transmitter driver. At block 508, the transmitter driver is deactivated. At block 510, transmitter blocks (e.g., transmitter PLL and transmitter supply) are deactivated.

[0041] In some embodiments, the control unit 222 adjusts a transmitter configuration of the communications device 240 in response to the detuning condition to compensate for the detuning condition. For example, the control unit can adjust a transmitter modulation configuration of the communications device, a transmitter impedance configuration of the communications device, and/or a transmitter output power configuration of the communications device to compensate for the detuning condition related to the communications device to improve the overall system performance of the communications device. Consequently, the overall inductive coupling based communications performance of the communications device can be improved.

[0042] In some embodiments, when the communications device 240 is in reader mode, the measurement of the detuning condition is performed continuously as the communications device actively generates the RF field. In some embodiments, when the communications device is in card mode, the measurement of the detuning condition is performed intermittently to a transaction, based on a time-out and/or after the RF field is activated. Fig. 6 depicts a sequence of commands received at the communications device 240 depicted in Fig. 2 at reader-mode and a sequence of responses transmitted to the reader device 230 by the communications device depicted in Fig. 2 during a transaction. In the course of the transaction (e.g., a payment transaction), the measurement of the detuning condition may be performed immediately before transmitting a response message to the reader device, as represented by the respective arrows 610,

620, 630, and 640.

[0043] Fig. 7 is a process flow diagram of a method for operating a communications device that communicates via inductive coupling in accordance with an embodiment of the invention. At block 702, transmission output power information related to the communications device is obtained. At block 704, a detuning condition is measured based on the transmission output power information. The communications device may be the same or similar to the communications device 140 depicted in Fig. 1 and/or the communications device 240 depicted in Fig. 2.

[0044] Fig. 8 is a process flow diagram of a method for operating a communications device that communicates via inductive coupling in accordance with another embodiment of the invention. At block 802, a transmitter current and a transmitter voltage within the communications device from a supply regulator of the communications device and a received signal strength indicator (RSSI) at the communications device are obtained. At block 804, a detuning condition is measured based on the transmitter current, the transmitter voltage, and the RSSI. The communications device may be the same or similar to the communications device 140 depicted in Fig. 1 and/or the communications device 240 depicted in Fig. 2.

[0045] Although the operations of the method(s) herein are shown and described in a particular order, the order of the operations of each method may be altered so that certain operations may be performed in an inverse order or so that certain operations may be performed, at least in part, concurrently with other operations. In another embodiment, instructions or sub-operations of distinct operations may be implemented in an intermittent and/or alternating manner.

[0046] It should also be noted that at least some of the operations for the methods may be implemented using software instructions stored on a computer useable storage medium for execution by a computer. As an example, an embodiment of a computer program product includes a computer useable storage medium to store a computer readable program that, when executed on a computer, causes the computer to perform operations, as described herein.

[0047] The computer-useable or computer-readable medium can be an electronic, magnetic, optical, electro-magnetic, infrared, or semiconductor system (or apparatus or device), or a propagation medium. Examples of a computer-readable medium include a semiconductor or solid-state memory, magnetic tape, a removable computer diskette, a random access memory (RAM), a read-only memory (ROM), a rigid magnetic disc, and an optical disc. Current examples of optical discs include a compact disc with read only memory (CD-ROM), a compact disc with read/write (CD-R/W), a digital video disc (DVD), and a Blu-ray disc.

[0048] In the above description, specific details of various embodiments are provided. However, some embodiments may be practiced with less than all of these specific details. In other instances, certain methods, proce-

dures, components, structures, and/or functions are described in no more detail than to enable the various embodiments of the invention, for the sake of brevity and clarity.

[0049] Although specific embodiments of the invention have been described and illustrated, the invention is not to be limited to the specific forms or arrangements of parts so described and illustrated. The scope of the invention is to be defined by the claims appended hereto and their equivalents.

Claims

1. A method for operating a communications device that communicates via inductive coupling, the method comprising:
 - obtaining transmission output power information related to the communications device; and
 - measuring a detuning condition based on the transmission output power information.
2. The method of claim 1, further comprising obtaining a received signal strength indicator (RSSI) at the communications device, wherein measuring the detuning condition comprises measuring the detuning condition based on the transmission output power information and the RSSI.
3. The method of claim 1 or 2, wherein the transmission output power information comprises a transmitter current and a transmitter voltage within the communications device.
4. The method of any preceding claim, further comprising adjusting a transmitter configuration of the communications device in response to the detuning condition.
5. The method of any preceding claim, wherein obtaining the transmission output power information comprises obtaining a transmitter current and a transmitter voltage within the communications device from a supply regulator of the communications device.
6. The method of any preceding claim, wherein obtaining the transmission output power information comprises obtaining a transmitter current and a transmitter voltage within the communications device from a transmitter driver of the communications device.
7. The method of any preceding claim, wherein measuring the detuning condition based on the transmission output power information of the communications device comprises generating a ratio between a transmitter impedance when a corresponding communications device is in close proximity to the com-

munications device and a nominal transmitter impedance when there is not a corresponding communications device in close proximity to the communications device.

8. The method of any preceding claim, wherein measuring the detuning condition based on the transmission output power information of the communications device further comprises generating a ratio between a receiver gain when a corresponding communications device is in close proximity to the communications device and a nominal receiver gain when there is not a corresponding communications device in close proximity to the communications device. 5 10 15
9. The method of any preceding claim, wherein measuring the detuning condition based on the transmission output power information of the communications device comprises measuring the detuning condition based on the transmission output power information before transmitting a response message. 20
10. A communications device that communicates via inductive coupling, the communications device comprising: 25
a system parameter sensor unit configured to obtain transmission output power information related to the communications device; and 30
a detuning condition measurement unit configured to measure a detuning condition based on the transmission output power information.
11. The communications device of claim 10, wherein the system parameter sensor unit is configured to obtain a received signal strength indicator (RSSI) at the communications device, wherein the detuning condition measurement unit is configured to measure the detuning condition based on the transmission output power information and the RSSI. 35 40
12. The communications device of claim 10 or 11, wherein the transmission output power information comprises a transmitter current and a transmitter voltage within the communications device. 45
13. The communications device of claim 10, 11 or 12, further comprising a control unit configured to adjust a transmitter configuration of the communications device in response to the detuning condition. 50
14. The communications device of any one of claims 10 to 13, wherein the system parameter sensor unit is configured to obtain a transmitter current and a transmitter voltage within the communications device from a supply regulator of the communications device. 55

15. The communications device of any one of claims 10 to 14, wherein the system parameter sensor unit is configured to obtain a transmitter current and a transmitter voltage within the communications device from a transmitter driver of the communications device.

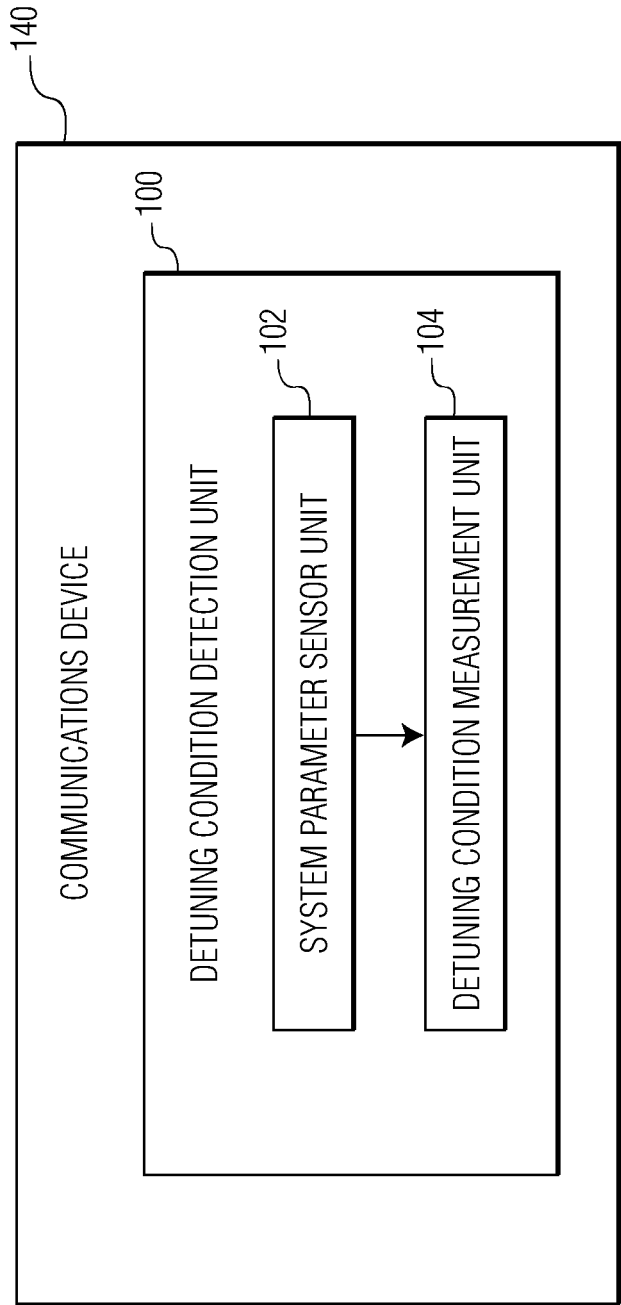


FIG. 1

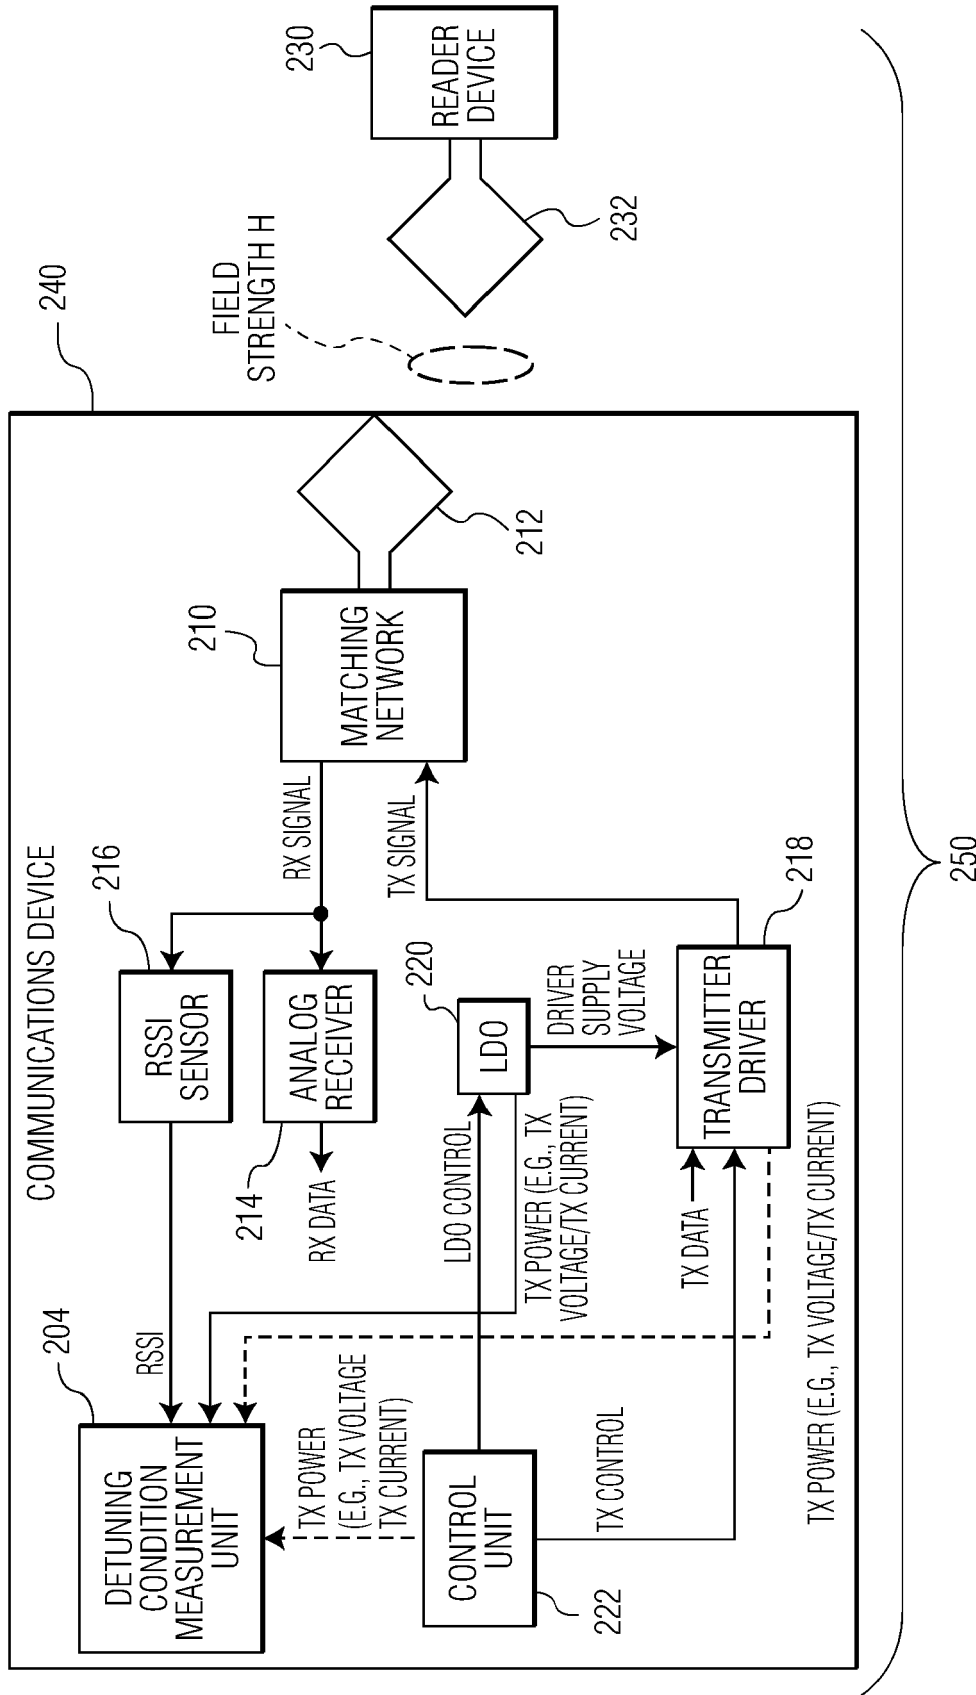


FIG. 2

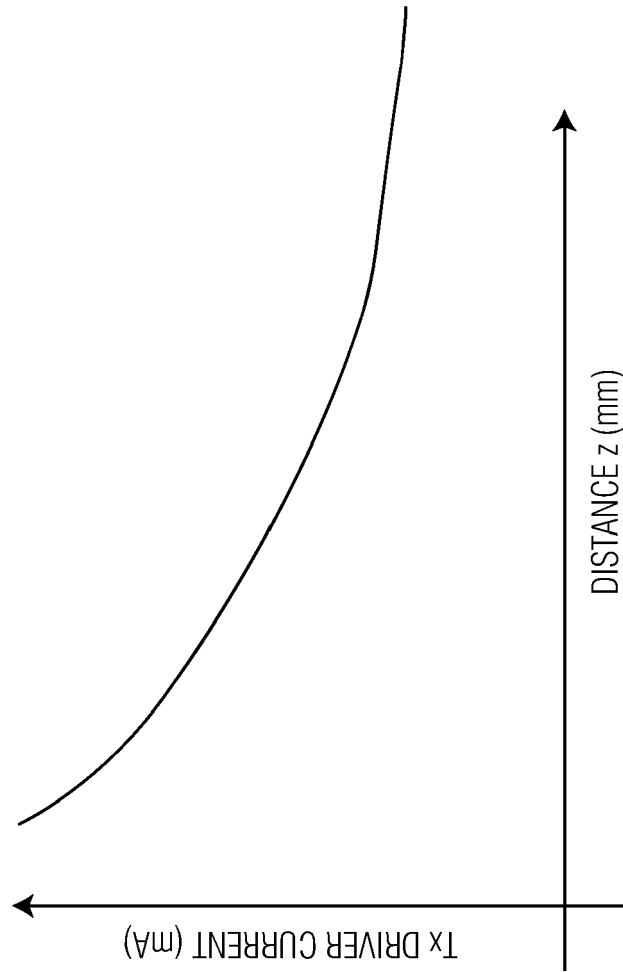


FIG. 3

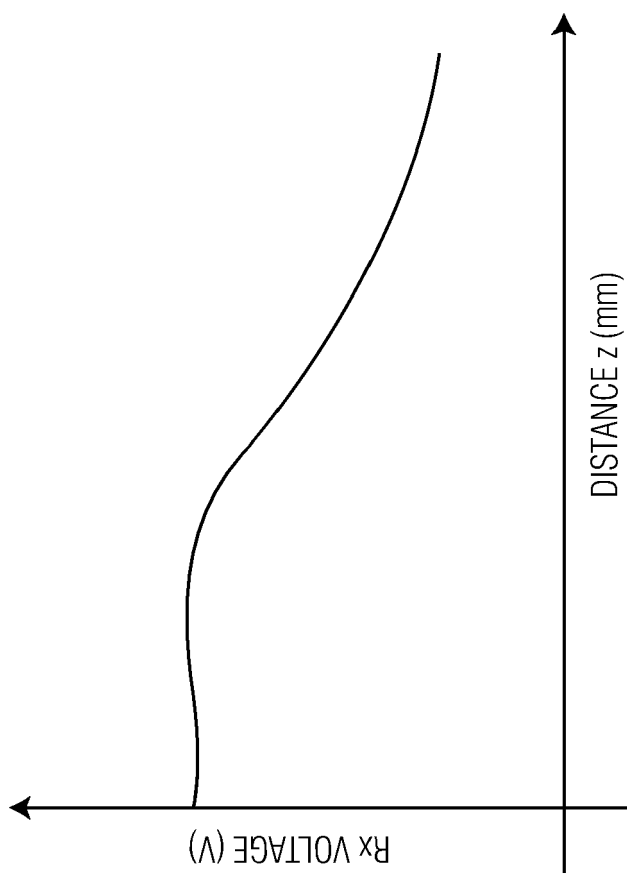


FIG. 4

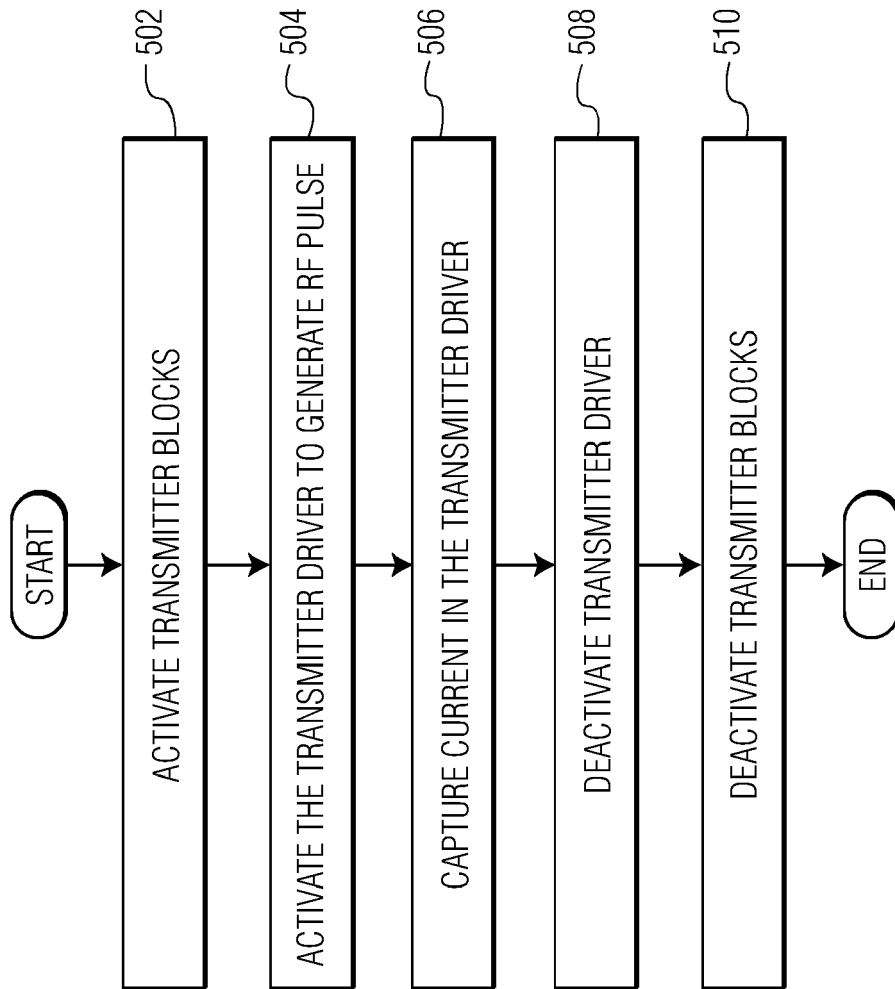


FIG. 5

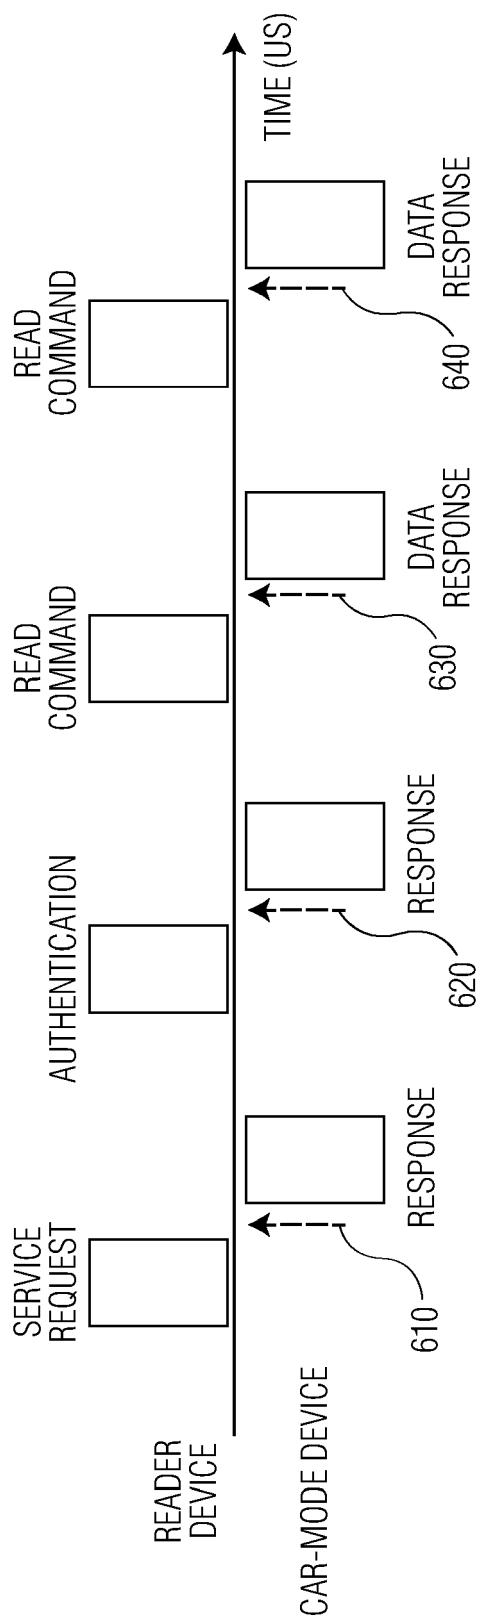


FIG. 6

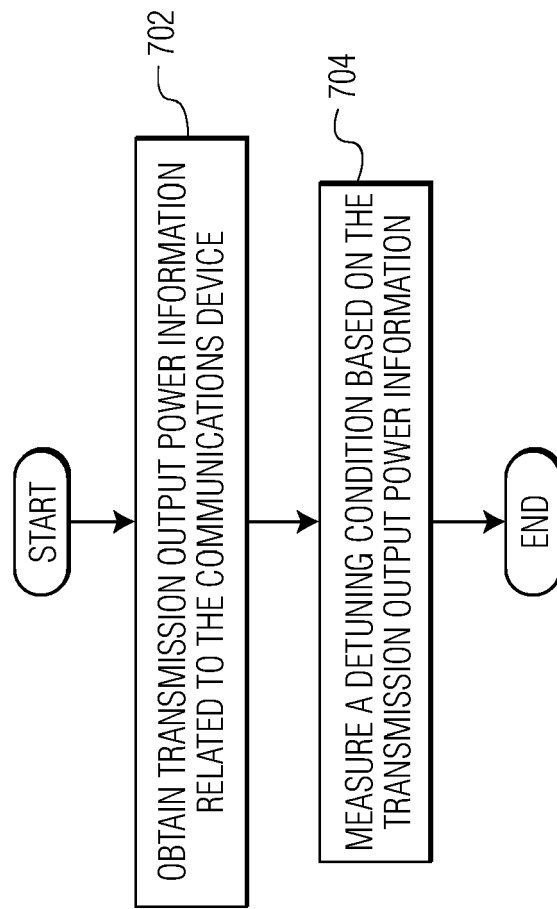


FIG. 7

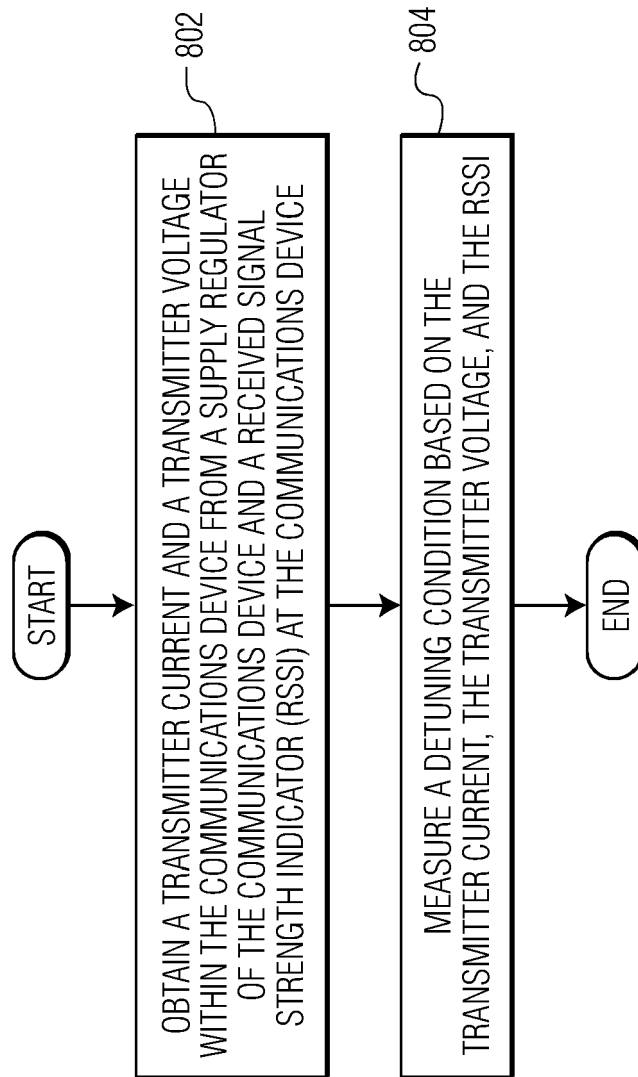


FIG. 8



EUROPEAN SEARCH REPORT

Application Number
EP 17 19 9033

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X,P	EP 3 156 935 A1 (NXP BV [NL]) 19 April 2017 (2017-04-19)	1,3-6, 10,12-15 2,7-9,11	INV. H04B5/00
A,P	* paragraph [0002] - paragraph [0006] * * paragraph [0018] - paragraph [0021] * * paragraph [0028] - paragraph [0033] * * paragraph [0042] - paragraph [0044] * * figures 1, 3, 7-9 *		
X	US 2016/197510 A1 (STRÖMMER ESKO [FI] ET AL) 7 July 2016 (2016-07-07) * paragraph [0007] - paragraph [0008] * * paragraph [0013] - paragraph [0021] * * paragraph [0041] - paragraph [0043] * * paragraph [0048] - paragraph [0078] * * figures 1-4 *	1-15	
			TECHNICAL FIELDS SEARCHED (IPC)
			H04B
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 3 May 2018	Examiner Spinnler, Florian
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03/82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 17 19 9033

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

03-05-2018

10

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 3156935 A1	19-04-2017	CN 106953650 A	14-07-2017
		EP 3156935 A1	19-04-2017
		US 2017104468 A1	13-04-2017

US 2016197510 A1	07-07-2016	US 2016197510 A1	07-07-2016
		WO 2015022450 A1	19-02-2015

15

20

25

30

35

40

45

50

55

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82