



(22) Date de dépôt/Filing Date: 2005/08/17

(41) Mise à la disp. pub./Open to Public Insp.: 2006/02/28

(45) Date de délivrance/Issue Date: 2010/03/16

(30) Priorité/Priority: 2004/08/31 (EP EP04104168.2)

(51) Cl.Int./Int.Cl. *H04W 8/22* (2009.01),
H04W 84/18 (2009.01), *H04W 88/02* (2009.01)


(72) Inventeurs/Inventors:
HAZELL, BARRY, CA;
RUSH, KEVIN, CA

(73) Propriétaire/Owner:
RESEARCH IN MOTION LIMITED, CA

(74) Agent: MOFFAT & CO.

(54) Titre : METHODE ET SYSTEME POUR CONFIGURER UN CIRCUIT EN BANDE DE BASE D'UNE STATION
MOBILE EN FONCTION D'UN ACCESSOIRE ACOUSTIQUE

(54) Title: METHOD AND SYSTEM FOR THE CONFIGURATION OF A MOBILE STATION BASEBAND CIRCUIT FOR
AN ACOUSTIC ACCESSORY

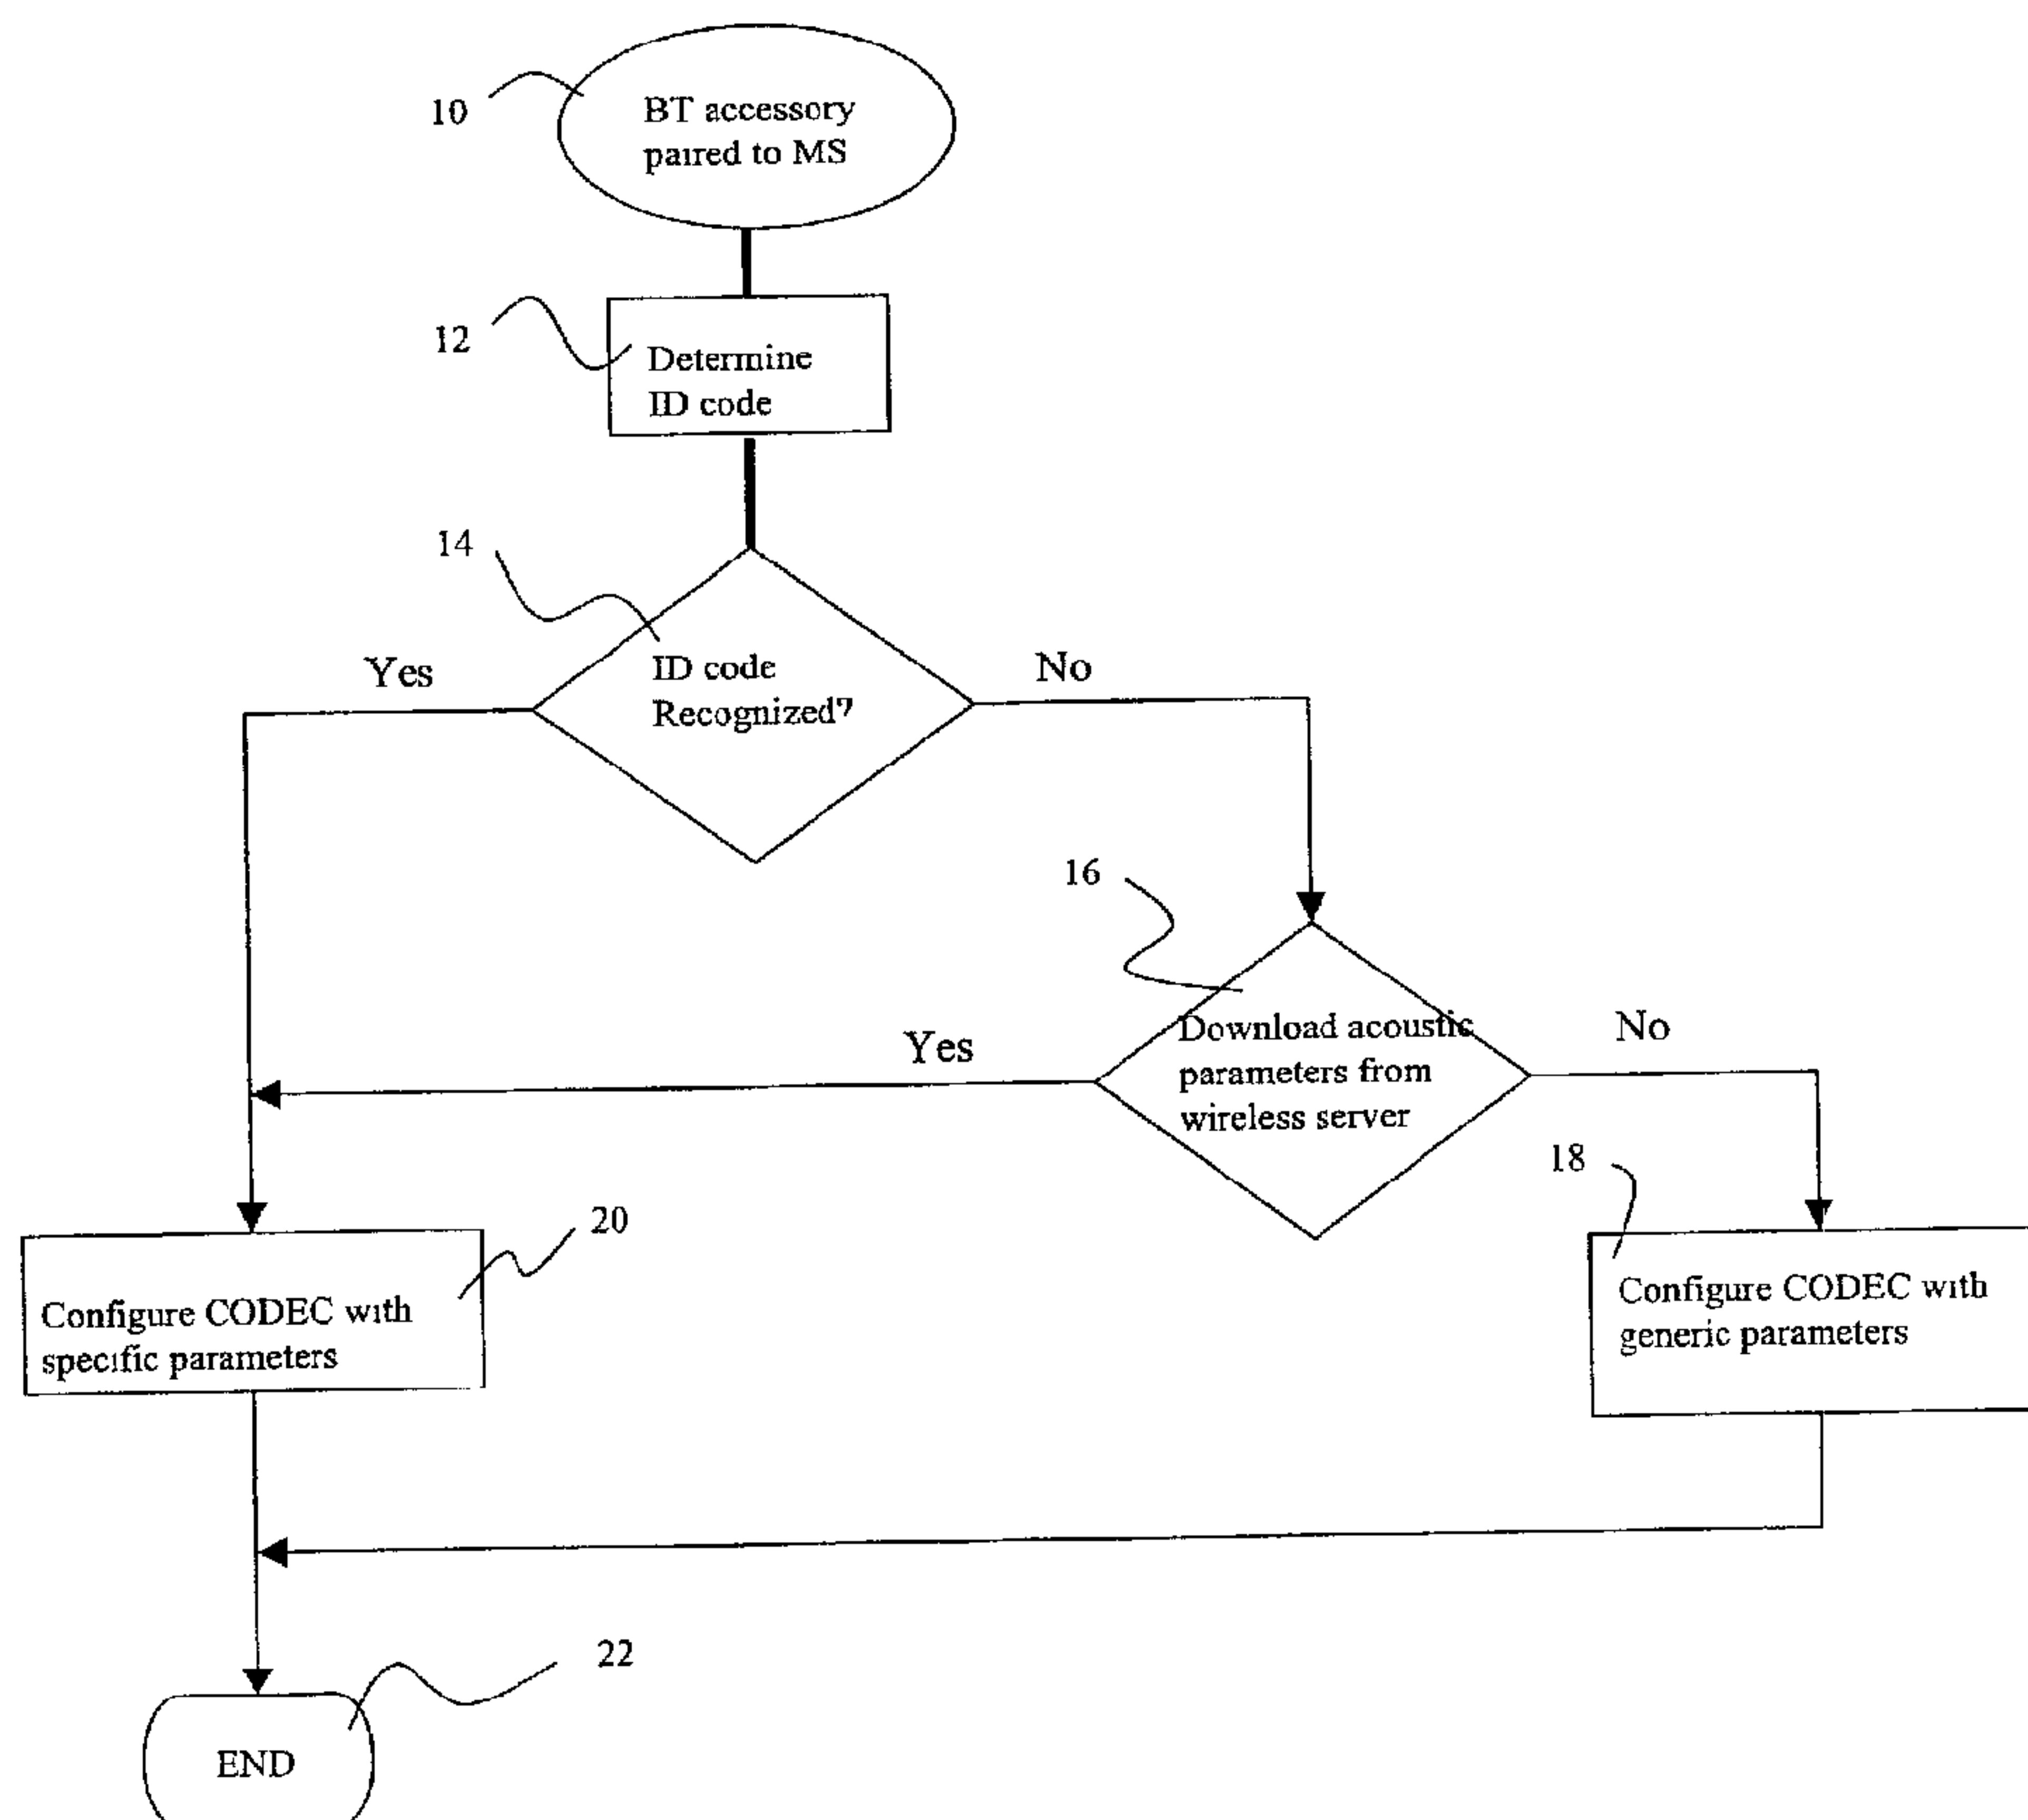

(57) Abrégé/Abstract:

A method and system for the configuration of a mobile station baseband circuit for an acoustic accessory having an identifier, the method comprising the steps of: determining whether the mobile device recognizes the identifier of the acoustic device; and

(57) **Abrégé(suite)/Abstract(continued):**

configuring the baseband circuit with a DSP filter response and CODEC acoustic gain parameters for the acoustic device if the mobile device recognizes the identifier of the acoustic device. The system comprising: an identifier for each of the plurality of acoustic devices; a local memory in the mobile station storing a frequency (filter) response and gain parameters for at least one of the plurality of acoustic devices and for mapping them to the identifier; and a digital signal processor to re-shape an acoustic frequency response and adjust an audio gain of a baseband circuit for the mobile station based on the stored frequency response and gain parameters.

ABSTRACT

A method and system for the configuration of a mobile station baseband circuit for an acoustic accessory having an identifier, the method comprising the steps of: determining whether the mobile device recognizes the identifier of the acoustic device; and configuring the baseband circuit with a DSP filter response and CODEC acoustic gain parameters for the acoustic device if the mobile device recognizes the identifier of the acoustic device. The system comprising: an identifier for each of the plurality of acoustic devices; a local memory in the mobile station storing a frequency (filter) response and gain parameters for at least one of the plurality of acoustic devices and for mapping them to the identifier; and a digital signal processor to re-shape an acoustic frequency response and adjust an audio gain of a baseband circuit for the mobile station based on the stored frequency response and gain parameters.

METHOD AND SYSTEM FOR THE CONFIGURATION OF A MOBILE STATION BASEBAND CIRCUIT FOR AN ACOUSTIC ACCESSORY

FIELD OF THE TECHNOLOGY

[0001] The present system and method relates to the configuration of a mobile station baseband circuit for an acoustic accessory, and in particular to the configuration of the acoustic frequency response and audio gain parameters for a specific acoustic accessory.

BACKGROUND

[0002] Acoustic devices come in a variety of shapes and are made of various materials. This results in a different form factor for each acoustic device which will impact the acoustic characteristics of the microphone and receiver.

[0003] Such acoustic devices include wireless short-range communication devices such as Bluetooth™ devices. Bluetooth™ devices are capable of point-to-point or point-to-multipoint communications.

[0004] In present systems, a mobile station uses a generic CODEC and audio filter parameters for the acoustic device. These parameters cannot compensate for the different acoustic characteristics of all the various acoustic devices.

SUMMARY

[0005] The present system and method provides for the configuration of a mobile station based on the acoustic device being used in association with that mobile station. While various acoustic devices and communication protocols can be used, in one embodiment the acoustic device is a Bluetooth™ device. Every Bluetooth™ device has its own identification code consisting of a Bluetooth™ device address. As well, many manufacturers encode Bluetooth™ devices to transmit a Bluetooth™ device name and / or model number, providing a unique identifier for the type of device that is being used.

[0006] Accordingly, the present system and method receives the Bluetooth™ device name and / or model number, or in a different communications protocol, a unique identifier for the device, and configures the acoustic baseband circuit in the mobile station with the acoustics of the acoustic device. This will ensure the overall acoustic frequency response of mobile station and acoustic device will meet the required Telecommunications Industry Association Electro-Acoustic Standard.

[0007] In one embodiment of the present system and method, the digital signal processing (DSP) filter response and coder-decoder (CODEC) acoustic gain parameters of the mobile station for a specific acoustic device can be stored in the memory of the mobile station. In other embodiments, the DSP filter response and coder-decoder (CODEC) acoustic gain parameters can be loaded from a remote database.

[0008] The present application therefore provides a method for the configuration of a mobile station baseband circuit for an acoustic accessory having an identifier, the method comprising the steps of: determining whether the mobile device recognizes the identifier of the acoustic device; and configuring the baseband circuit with a DSP filter response and CODEC acoustic gain parameters for the acoustic device if the mobile device recognizes the identifier of the acoustic device.

[0009] The present application further provides a system for providing similar acoustic characteristics for each of a plurality of acoustic devices communicating with a mobile station, the system comprising: an identifier for each of the plurality of acoustic devices; a local memory in the mobile station storing a filter response and gain parameters for at least one of the plurality of acoustic devices and for mapping the filter response and gain parameters with the identifier of at least one of the plurality of acoustic devices; and a digital signal processor to re-shape an acoustic frequency response and adjust an

audio gain of a baseband circuit for said mobile station based on the acoustic device identifier.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] The present system and method will be better understood with reference to the drawings in which:

Figure 1 is one embodiment of the present method;

Figure 2 is a graph of the frequency response characteristics of two sample devices and an ideal frequency response;

Figure 3 shows a block diagram of a communications system, including a mobile station upon which the present system and method can be implemented; and

Figure 4 shows a block diagram of a mobile station upon which the present system and method can be implemented.

DETAILED DESCRIPTION OF THE DRAWINGS

[0011] The present system and method ensures that the frequency response and voice output levels for each audio accessory paired with a mobile station are equivalent and all meet the same certification acoustic mark. It is required that the mobile station therefore automatically reshapes the acoustic frequency response and adjusts the audio gain parameters in the mobile station baseband circuit for a particular acoustic accessory.

[0012] The present invention is described below with reference to a Bluetooth™ accessory and a mobile station. However, as will be appreciated by those skilled in the art, other communications protocols could be used including a wired connection or other wireless protocols. Further, one skilled in the art will appreciate that, instead of a mobile station, other hosted devices could be used. These could include, for example, a desktop computer streaming music to a remote headset accessory, a stereo system

streaming music to speakers, other voice devices, the acoustic portion of a video device, or a headset/car kit for a vehicle.

[0013] Reference is now made to **Figure 1**. In step **10**, a mobile station determines whether a Bluetooth™ accessory is paired with the mobile station. Further, in step **10** it is determined whether the Bluetooth™ accessory is an audio or multi-media device. This can be recognized from the Bluetooth™ standard which provides identifiers to indicate the type of device.

[0014] If a Bluetooth™ audio or multimedia accessory is paired to the mobile station, the mobile station in step **12** determines an identifier for the Bluetooth™ accessory. This would generally be the model number of the accessory and would be provided to the mobile station during the handshaking between the accessory and the mobile station. Currently, it is not within the standard Bluetooth™ specification to provide a model number necessarily. However, many manufacturers are including this information voluntarily.

[0015] The mobile station next proceeds to step **14** in which it is determined whether or not the identifier found in step **12** is recognized. As will be appreciated by those skilled in the art, if the identifier is not provided by the device manufacturer, then no ID code will exist and therefore the device will not be recognized.

[0016] Step **14** only recognizes the identifier if the identifier and characteristics for the device are stored locally.

[0017] In step **14** if the identifier is not recognized, the mobile station next proceeds to step **16**. In step **16** it is determined whether or not the acoustic parameters can be downloaded from a wireless server. As will be appreciated by those skilled in the art, this step can only occur if using a mobile station that is connected to a communications network. If the present system is implemented on a device without communications

capabilities, this step will not exist and the system will need to proceed directly to step 18 as described below.

[0018] If, in step **16**, it is found to not be possible to download the acoustic parameters from a wireless server, then the mobile station proceeds to step **18** in which a DSP filter response and CODEC acoustic gain parameters are set for a generic device. This is the default setting in case the acoustic device does not provide an identifier, does not have a frequency response DSP filter or CODEC acoustic gain parameter within a database or stored in the memory of the mobile station or the host device does not have communication capability.

[0019] If, in step **14**, the identifier is recognized and stored in local memory, or if in step **16** the acoustic parameters can be downloaded from a wireless server, the mobile station proceeds to step **20**. In step **20** the DSP filter response of the mobile station is configured for the specific Bluetooth™ accessory based on the ID code. Also, the CODEC acoustic gain parameters of the mobile station are configured for the specific Bluetooth™ accessory based on the identifier.

[0020] Step **16** preferably allows the mobile station to access a remote database that contains a list of acoustic devices and the acoustic DSP filter response and acoustic gain parameters for these devices. The use of a remote database enables the present system and method to be configured for a plurality of devices without the necessity to store the parameters for these devices in local memory.

[0021] From step **18** or step **20**, the mobile station proceeds to step **22** and ends the configuration of the mobile station baseband circuitry.

[0022] Reference is now made to **Figure 2**. **Figure 2** shows an example of acoustic response of two different acoustic accessories and an ideal response that could be achieved using the system and method of the present allocation. Specifically, a first

device includes a first frequency response **30** between 300 and 3000 Hz and a second device displays a second frequency response **32** between the same frequencies. These frequencies are includes as examples only and the present system and method is not meant to be limited to this frequency range.

[0023] The dotted line on **Figure 2** shows the preferred frequency response **34** for all acoustic accessories. By having the same acoustic response 34, the voice quality and audio level will be equivalent for each acoustic accessory and the output frequency response will meet the required certification acoustic mask, regardless of the device being used. This is preferred rather than having to adjust the volume and deal with poor audio quality. DSP filters are well known to those skilled in the art.

[0024] In a further alternative embodiment, multiple devices could be used with a single mobile station. Bluetooth provides for the communication between multiple devices, and the baseband circuitry could be reconfigured depending on which device the mobile station is communicating with. If communicating with multiple devices simultaneously, this communication is divided into timeslots for each device, and the mobile station could be reconfigured between each of these timeslots.

[0025] Reference is now made to **Figure 3**. **Figure 3** is a block diagram of a communication system **100** which includes a mobile station **102** which communicates through a wireless communication network **104**. Mobile station **102** preferably includes a visual display **112**, a keyboard **114**, and perhaps one or more auxiliary user interfaces (UI) **116**, each of which is coupled to a controller **106**. Controller 106 is also coupled to radio frequency (RF) transceiver circuitry **108** and an antenna **110**.

[0026] Typically, controller **106** is embodied as a central processing unit (CPU) which runs operating system software in a memory component (not shown). Controller **106** will normally control overall operation of mobile station **102**, whereas signal processing operations associated with communication functions are typically performed in RF

transceiver circuitry **108**. Controller **106** interfaces with device display **112** to display received information, stored information, user inputs, and the like. Keyboard **114**, which may be a telephone type keypad or full alphanumeric keyboard, is normally provided for entering data for storage in mobile station **102**, information for transmission to network **104**, a telephone number to place a telephone call, commands to be executed on mobile station **102**, and possibly other or different user inputs.

[0027] Mobile station **102** sends communication signals to and receives communication signals from network **104** over a wireless link via antenna **110**. RF transceiver circuitry **108** performs functions similar to those of a radio network (RN) **128**, including for example modulation/demodulation and possibly encoding/decoding and encryption/decryption. It is also contemplated that RF transceiver circuitry **108** may perform certain functions in addition to those performed by RN **128**. It will be apparent to those skilled in art that RF transceiver circuitry **108** will be adapted to particular wireless network or networks in which mobile station **102** is intended to operate.

[0028] Mobile station **102** includes a battery interface **122** for receiving one or more rechargeable batteries **124**. Battery **124** provides electrical power to electrical circuitry in mobile station **102**, and battery interface **122** provides for a mechanical and electrical connection for battery **124**. Battery interface **122** is coupled to a regulator **126** which regulates power to the device. When mobile station **102** is fully operational, an RF transmitter of RF transceiver circuitry **108** is typically turned on only when it is sending to network, and is otherwise turned off to conserve resources. Similarly, an RF receiver of RF transceiver circuitry **108** is typically periodically turned off to conserve power until it is needed to receive signals or information (if at all) during designated time periods.

[0029] Mobile station **102** operates using a memory module **120**, such as a Subscriber Identity Module (SIM) or a Removable User Identity Module (R-UIM), which is connected to or inserted in mobile station **102** at an interface **118**. As an alternative to a SIM or an R-UIM, mobile station **102** may operate based on configuration data

programmed by a service provider into an internal memory which is a non-volatile memory. Mobile station **102** may consist of a single unit, such as a data communication device, a cellular telephone, a multiple-function communication device with data and voice communication capabilities, a personal digital assistant (PDA) enabled for wireless communication, or a computer incorporating an internal modem. Alternatively, mobile station **102** may be a multiple-module unit comprising a plurality of separate components, including but in no way limited to a computer or other device connected to a wireless modem. In particular, for example, in the mobile station block diagram of **Figure 3**, RF transceiver circuitry **108** and antenna **110** may be implemented as a radio modem unit that may be inserted into a port on a laptop computer. In this case, the laptop computer would include display **112**, keyboard **114**, and one or more auxiliary UIs **116**, and controller **106** may remain within the radio modem unit that communicates with the computer's CPU or be embodied as the computer's CPU. It is also contemplated that a computer or other equipment not normally capable of wireless communication may be adapted to connect to and effectively assume control of RF transceiver circuitry **108** and antenna **110** of a single-unit device such as one of those described above. Such a mobile station **102** may have a more particular implementation as described later in relation to mobile station **202** of **Figure 4**.

[0030] Mobile station **102** communicates in and through wireless communication network **104**. In the embodiment of **Figure 3**, wireless network **104** is a Third Generation (3G) supported network based on Code Division Multiple Access (CDMA) technologies. In particular, wireless network **104** is a CDMA2000 network which includes fixed network components coupled as shown in **Figure 3**. Wireless network **104** of the CDMA2000-type includes a Radio Network (RN) **128**, a Mobile Switching Center (MSC) **130**, a Signaling System 7 (SS7) network **140**, a Home Location Register/Authentication Center (HLR/AC) **138**, a Packet Data Serving Node (PDSN) **132**, an IP network **134**, and a Remote Authentication Dial-In User Service (RADIUS) server **136**. SS7 network **140** is communicatively coupled to a network **142** (such as a

Public Switched Telephone Network or PSTN), whereas IP network is communicatively coupled to a network **144** (such as the Internet).

[0031] During operation, mobile station **102** communicates with RN **128** which performs functions such as call-setup, call processing, and mobility management. RN **128** includes a plurality of base station transceiver systems that provide wireless network coverage for a particular coverage area commonly referred to as a "cell". A given base station transceiver system of RN **128**, such as the one shown in **Figure 3**, transmits communication signals to and receives communication signals from mobile stations within its cell. The base station transceiver system normally performs such functions as modulation and possibly encoding and/or encryption of signals to be transmitted to the mobile station in accordance with particular, usually predetermined, communication protocols and parameters, under control of its controller. The base station transceiver system similarly demodulates and possibly decodes and decrypts, if necessary, any communication signals received from mobile station **102** within its cell. Communication protocols and parameters may vary between different networks. For example, one network may employ a different modulation scheme and operate at different frequencies than other networks. The underlying services may also differ based on its particular protocol revision.

[0032] The wireless link shown in communication system **100** of **Figure 3** represents one or more different channels, typically different radio frequency (RF) channels, and associated protocols used between wireless network **104** and mobile station **102**. An RF channel is a limited resource that must be conserved, typically due to limits in overall bandwidth and a limited battery power of mobile station **102**. Those skilled in art will appreciate that a wireless network in actual practice may include hundreds of cells depending upon desired overall expanse of network coverage. All pertinent components may be connected by multiple switches and routers (not shown), controlled by multiple network controllers.

[0033] For all mobile station's **102** registered with a network operator, permanent data (such as mobile station **102** user's profile) as well as temporary data (such as mobile station's **102** current location) are stored in a HLR/AC **138**. In case of a voice call to mobile station **102**, HLR/AC **138** is queried to determine the current location of mobile station **102**. A Visitor Location Register (VLR) of MSC **130** is responsible for a group of location areas and stores the data of those mobile stations that are currently in its area of responsibility. This includes parts of the permanent mobile station data that have been transmitted from HLR/AC **138** to the VLR for faster access. However, the VLR of MSC **130** may also assign and store local data, such as temporary identifications. Mobile station **102** is also authenticated on system access by HLR/AC **138**. In order to provide packet data services to mobile station **102** in a CDMA2000-based network, RN **128** communicates with PDSN **132**. PDSN **132** provides access to the Internet **144** (or intranets, Wireless Application Protocol (WAP) servers, etc.) through IP network **134**. PDSN **132** also provides foreign agent (FA) functionality in mobile IP networks as well as packet transport for virtual private networking. PDSN **132** has a range of IP addresses and performs IP address management, session maintenance, and optional caching. RADIUS server **136** is responsible for performing functions related to authentication, authorization, and accounting (AAA) of packet data services, and may be referred to as an AAA server.

[0034] Wireless communication network **104** also includes a Push-to-talk over Cellular (PoC) server **137** which may be coupled to IP network **134**. PoC server **137** operates to facilitate PoC individual and group communication sessions between mobile stations within network **104**. A conventional PoC communication session involves a session connection between end users of mobile stations, referred to as session "participants", who communicate one at a time in a half-duplex manner much like conventional walkie-talkies or two-way radios.

[0035] Those skilled in art will appreciate that wireless network **104** may be connected to other systems, possibly including other networks, not explicitly shown in **Figure 3**. A

network will normally be transmitting at very least some sort of paging and system information on an ongoing basis, even if there is no actual packet data exchanged. Although the network consists of many parts, these parts all work together to result in certain behaviours at the wireless link.

[0036] **Figure 4** is a detailed block diagram of a preferred mobile station **202**. Mobile station **202** is preferably a two-way communication device having at least voice and advanced data communication capabilities, including the capability to communicate with other computer systems. Depending on the functionality provided by mobile station **202**, it may be referred to as a data messaging device, a two-way pager, a cellular telephone with data messaging capabilities, a wireless Internet appliance, or a data communication device (with or without telephony capabilities). Mobile station **202** may communicate with any one of a plurality of base station transceiver systems **200** within its geographic coverage area. Mobile station **202** selects or helps select which one of base station transceiver systems **200** it will communicate with.

[0037] Mobile station **202** will normally incorporate a communication subsystem **211**, which includes a receiver **212**, a transmitter **214**, and associated components, such as one or more (preferably embedded or internal) antenna elements **216** and **218**, local oscillators (LOs) **213**, and a processing module such as a digital signal processor (DSP) **220**. Communication subsystem **211** is analogous to RF transceiver circuitry **108** and antenna **110** shown in **Figure 3**. As will be apparent to those skilled in field of communications, particular design of communication subsystem **211** depends on the communication network in which mobile station **202** is intended to operate.

[0038] Mobile station **202** may send and receive communication signals over the network after required network registration or activation procedures have been completed. Signals received by antenna **216** through the network are input to receiver **212**, which may perform such common receiver functions as signal amplification, frequency down conversion, filtering, channel selection, and like, and in example shown

in **Figure 4**, analog-to-digital (A/D) conversion. A/D conversion of a received signal allows more complex communication functions such as demodulation and decoding to be performed in DSP **220**. In a similar manner, signals to be transmitted are processed, including modulation and encoding, for example, by DSP **220**. These DSP-processed signals are input to transmitter **214** for digital-to-analog (D/A) conversion, frequency up conversion, filtering, amplification and transmission over communication network via antenna **218**. DSP **220** not only processes communication signals, but also provides for receiver and transmitter control. For example, the gains applied to communication signals in receiver **212** and transmitter **214** may be adaptively controlled through automatic gain control algorithms implemented in DSP **220** or based on a gain parameter derived from a specific auxiliary device, as described below.

[0039] Network access is associated with a subscriber or user of mobile station **202**, and therefore mobile station **202** requires a memory module **262**, such as a Subscriber Identity Module or "SIM" card or a Removable User Identity Module (R-UIM), to be inserted in or connected to an interface **264** of mobile station **202** in order to operate in the network. Alternatively, memory module **262** may be a non-volatile memory which is programmed with configuration data by a service provider so that mobile station **202** may operate in the network. Since mobile station **202** is a mobile battery-powered device, it also includes a battery interface **254** for receiving one or more rechargeable batteries **256**. Such a battery **256** provides electrical power to most if not all electrical circuitry in mobile station **202**, and battery interface **254** provides for a mechanical and electrical connection for it. The battery interface **254** is coupled to a regulator (not shown in **Figure 4**) which provides power $V+$ to all of the circuitry.

[0040] Mobile station **202** includes a microprocessor **238** (which is one implementation of controller **106** of **Figure 3**) which controls overall operation of mobile station **202**. This control includes network selection techniques of the present application. Communication functions, including at least data and voice communications, are performed through communication subsystem **211**. Microprocessor **238** also interacts

with additional device subsystems such as a display **222**, a flash memory **224**, a random access memory (RAM) **226**, auxiliary input/output (I/O) subsystems **228**, a serial port **230**, a keyboard **232**, a speaker **234**, a microphone **236**, a short-range communications subsystem **240**, and any other device subsystems generally designated at **242**. Some of the subsystems shown in **Figure 4** perform communication-related functions, whereas other subsystems may provide “resident” or on-device functions. Notably, some subsystems, such as keyboard **232** and display **222**, for example, may be used for both communication-related functions, such as entering a text message for transmission over a communication network, and device-resident functions such as a calculator or task list. Operating system software used by microprocessor **238** is preferably stored in a persistent store such as flash memory **224**, which may alternatively be a read-only memory (ROM) or similar storage element (not shown). Those skilled in the art will appreciate that the operating system, specific device applications, or parts thereof, may be temporarily loaded into a volatile store such as RAM **226**.

[0041] Microprocessor **238**, in addition to its operating system functions, preferably enables execution of software applications on mobile station **202**. A predetermined set of applications which control basic device operations, including at least data and voice communication applications, will normally be installed on mobile station **202** during its manufacture. A preferred application that may be loaded onto mobile station **202** may be a personal information manager (PIM) application having the ability to organize and manage data items relating to user such as, but not limited to, e-mail, calendar events, voice mails, appointments, and task items. Naturally, one or more memory stores are available on mobile station **202** and SIM **256** to facilitate storage of PIM data items and other information.

[0042] The PIM application preferably has the ability to send and receive data items via the wireless network. In a preferred embodiment, PIM data items are seamlessly integrated, synchronized, and updated via the wireless network, with the mobile station

user's corresponding data items stored and/or associated with a host computer system thereby creating a mirrored host computer on mobile station **202** with respect to such items. This is especially advantageous where the host computer system is the mobile station user's office computer system. Additional applications may also be loaded onto mobile station **202** through network, an auxiliary I/O subsystem **228**, serial port **230**, short-range communications subsystem **240**, or any other suitable subsystem **242**, and installed by a user in RAM **226** or preferably a non-volatile store (not shown) for execution by microprocessor **238**. Such flexibility in application installation increases the functionality of mobile station **202** and may provide enhanced on-device functions, communication-related functions, or both. For example, secure communication applications may enable electronic commerce functions and other such financial transactions to be performed using mobile station **202**.

[0043] In a data communication mode, a received signal such as a text message, an e-mail message, or web page download will be processed by communication subsystem **211** and input to microprocessor **238**. Microprocessor **238** will preferably further process the signal for output to display **222** or alternatively to auxiliary I/O device **228**. A user of mobile station **202** may also compose data items, such as e-mail messages, for example, using keyboard **232** in conjunction with display **222** and possibly auxiliary I/O device **228**. Keyboard **232** is preferably a complete alphanumeric keyboard and/or telephone-type keypad. These composed items may be transmitted over a communication network through communication subsystem **211**.

[0044] For voice communications, the overall operation of mobile station **202** is substantially similar, except that the received signals would be output to speaker **234** and signals for transmission would be generated by microphone **236**. Alternative voice or audio I/O subsystems, such as a voice message recording subsystem, may also be implemented on mobile station **202**. Although voice or audio signal output is preferably accomplished primarily through speaker **234**, display **222** may also be used to provide

an indication of the identity of a calling party, duration of a voice call, or other voice call related information, as some examples.

[0045] Serial port **230** in **Figure 4** is normally implemented in a personal digital assistant (PDA)-type communication device for which synchronization with a user's desktop computer is a desirable, albeit optional, component. Serial port **230** enables a user to set preferences through an external device or software application and extends the capabilities of mobile station **202** by providing for information or software downloads to mobile station **202** other than through a wireless communication network. The alternate download path may, for example, be used to load an encryption key onto mobile station **202** through a direct and thus reliable and trusted connection to thereby provide secure device communication.

[0046] Short-range communications subsystem **240** of **Figure 4** is an additional component which provides for communication between mobile station **202** and different systems or devices, which need not necessarily be similar devices. For example, subsystem **240** may communicate with an acoustic device **280** that may include an infrared device and associated circuits and components, or a Bluetooth™ communication module to provide for communication with similarly-enabled systems and devices. Bluetooth™ is a registered trademark of Bluetooth SIG, Inc.

[0047] The above-described embodiments are meant to be illustrative of preferred embodiments and are not intended to limit the scope of the present system and method. Also, various modifications, which would be readily apparent to one skilled in the art, are intended to be within the scope of the present system and method. The only limitations to the scope of the present application are set forth in the following claims.

Claims:

1. A method for the configuration of a baseband circuit for an acoustic accessory (280) of a mobile station (102, 202), said acoustic accessory having an identifier, the method comprising the steps of:

determining whether the mobile station recognizes the identifier of the acoustic accessory;

configuring the baseband circuit with a DSP filter response and CODEC acoustic gain parameter for the acoustic accessory if the mobile device recognizes the identifier of the acoustic accessory;

seeking a DSP filter response and CODEC acoustic gain parameter for the acoustic accessory from a remote database if the mobile station does not recognize the identifier of the acoustic accessory; and

if the seeking step is successful; configuring the baseband circuit with the DSP filter response and CODEC acoustic gain parameter found in said seeking step.

2. The method of claim 1, further comprising the step of:

configuring the baseband circuit with a generic DSP filter response and CODEC acoustic gain parameter if the seeking step is unsuccessful.

3. The method of claim 1 or claim 2, wherein the acoustic accessory (280) is a BluetoothTM device (280).

4. The method of claim 3, wherein the identifier is a model number for the BluetoothTM device (280).

5. The method of any one of claims 1 to 4, wherein the seeking step is performed over a data network (134).

6. The method of any one of claims 1 to 5, wherein the determining step requires the DSP filter response and CODEC acoustic gain parameters for an identifier to be stored in a local memory of the mobile station (102, 202).

7. A system for providing similar acoustic characteristics for each of a plurality of acoustic devices (280) communicating with a mobile station (102, 202), the system comprising:

- 5 an identifier for each of the plurality of acoustic devices;
 a local memory in the mobile station for storing a filter response
 and gain parameters for at least one of the plurality of acoustic devices and
 for mapping the filter response and gain parameters with the identifier of
 the at least one of the plurality of acoustic devices;
10 a digital signal processor (220) to re-shape an acoustic frequency
 response and adjust an audio gain of a baseband circuit for said mobile
 station based on the acoustic device identifier; and
 a communications subsystem (211) to retrieve a filter response and
 gain parameters for an identifier not stored in local memory.

15

8. The system of claim 7, wherein the acoustic device (280) is a BluetoothTM device (280).

20


9. The system of claim 8, wherein the identifier is a model number for the BluetoothTM device (280).

25

10. A computer program product for the configuration of a baseband circuit of an acoustic accessory (280) of a mobile station (102, 202), said acoustic accessory having an identifier, the computer program product comprising a computer readable medium embodying program code means executable by a processor of a computer device, system or apparatus (102, 202) for implementing the method of any one of claims 1 to 6.

30

11. A wireless communications system (104) comprising at least one system according to any one of claims 7 to 9.

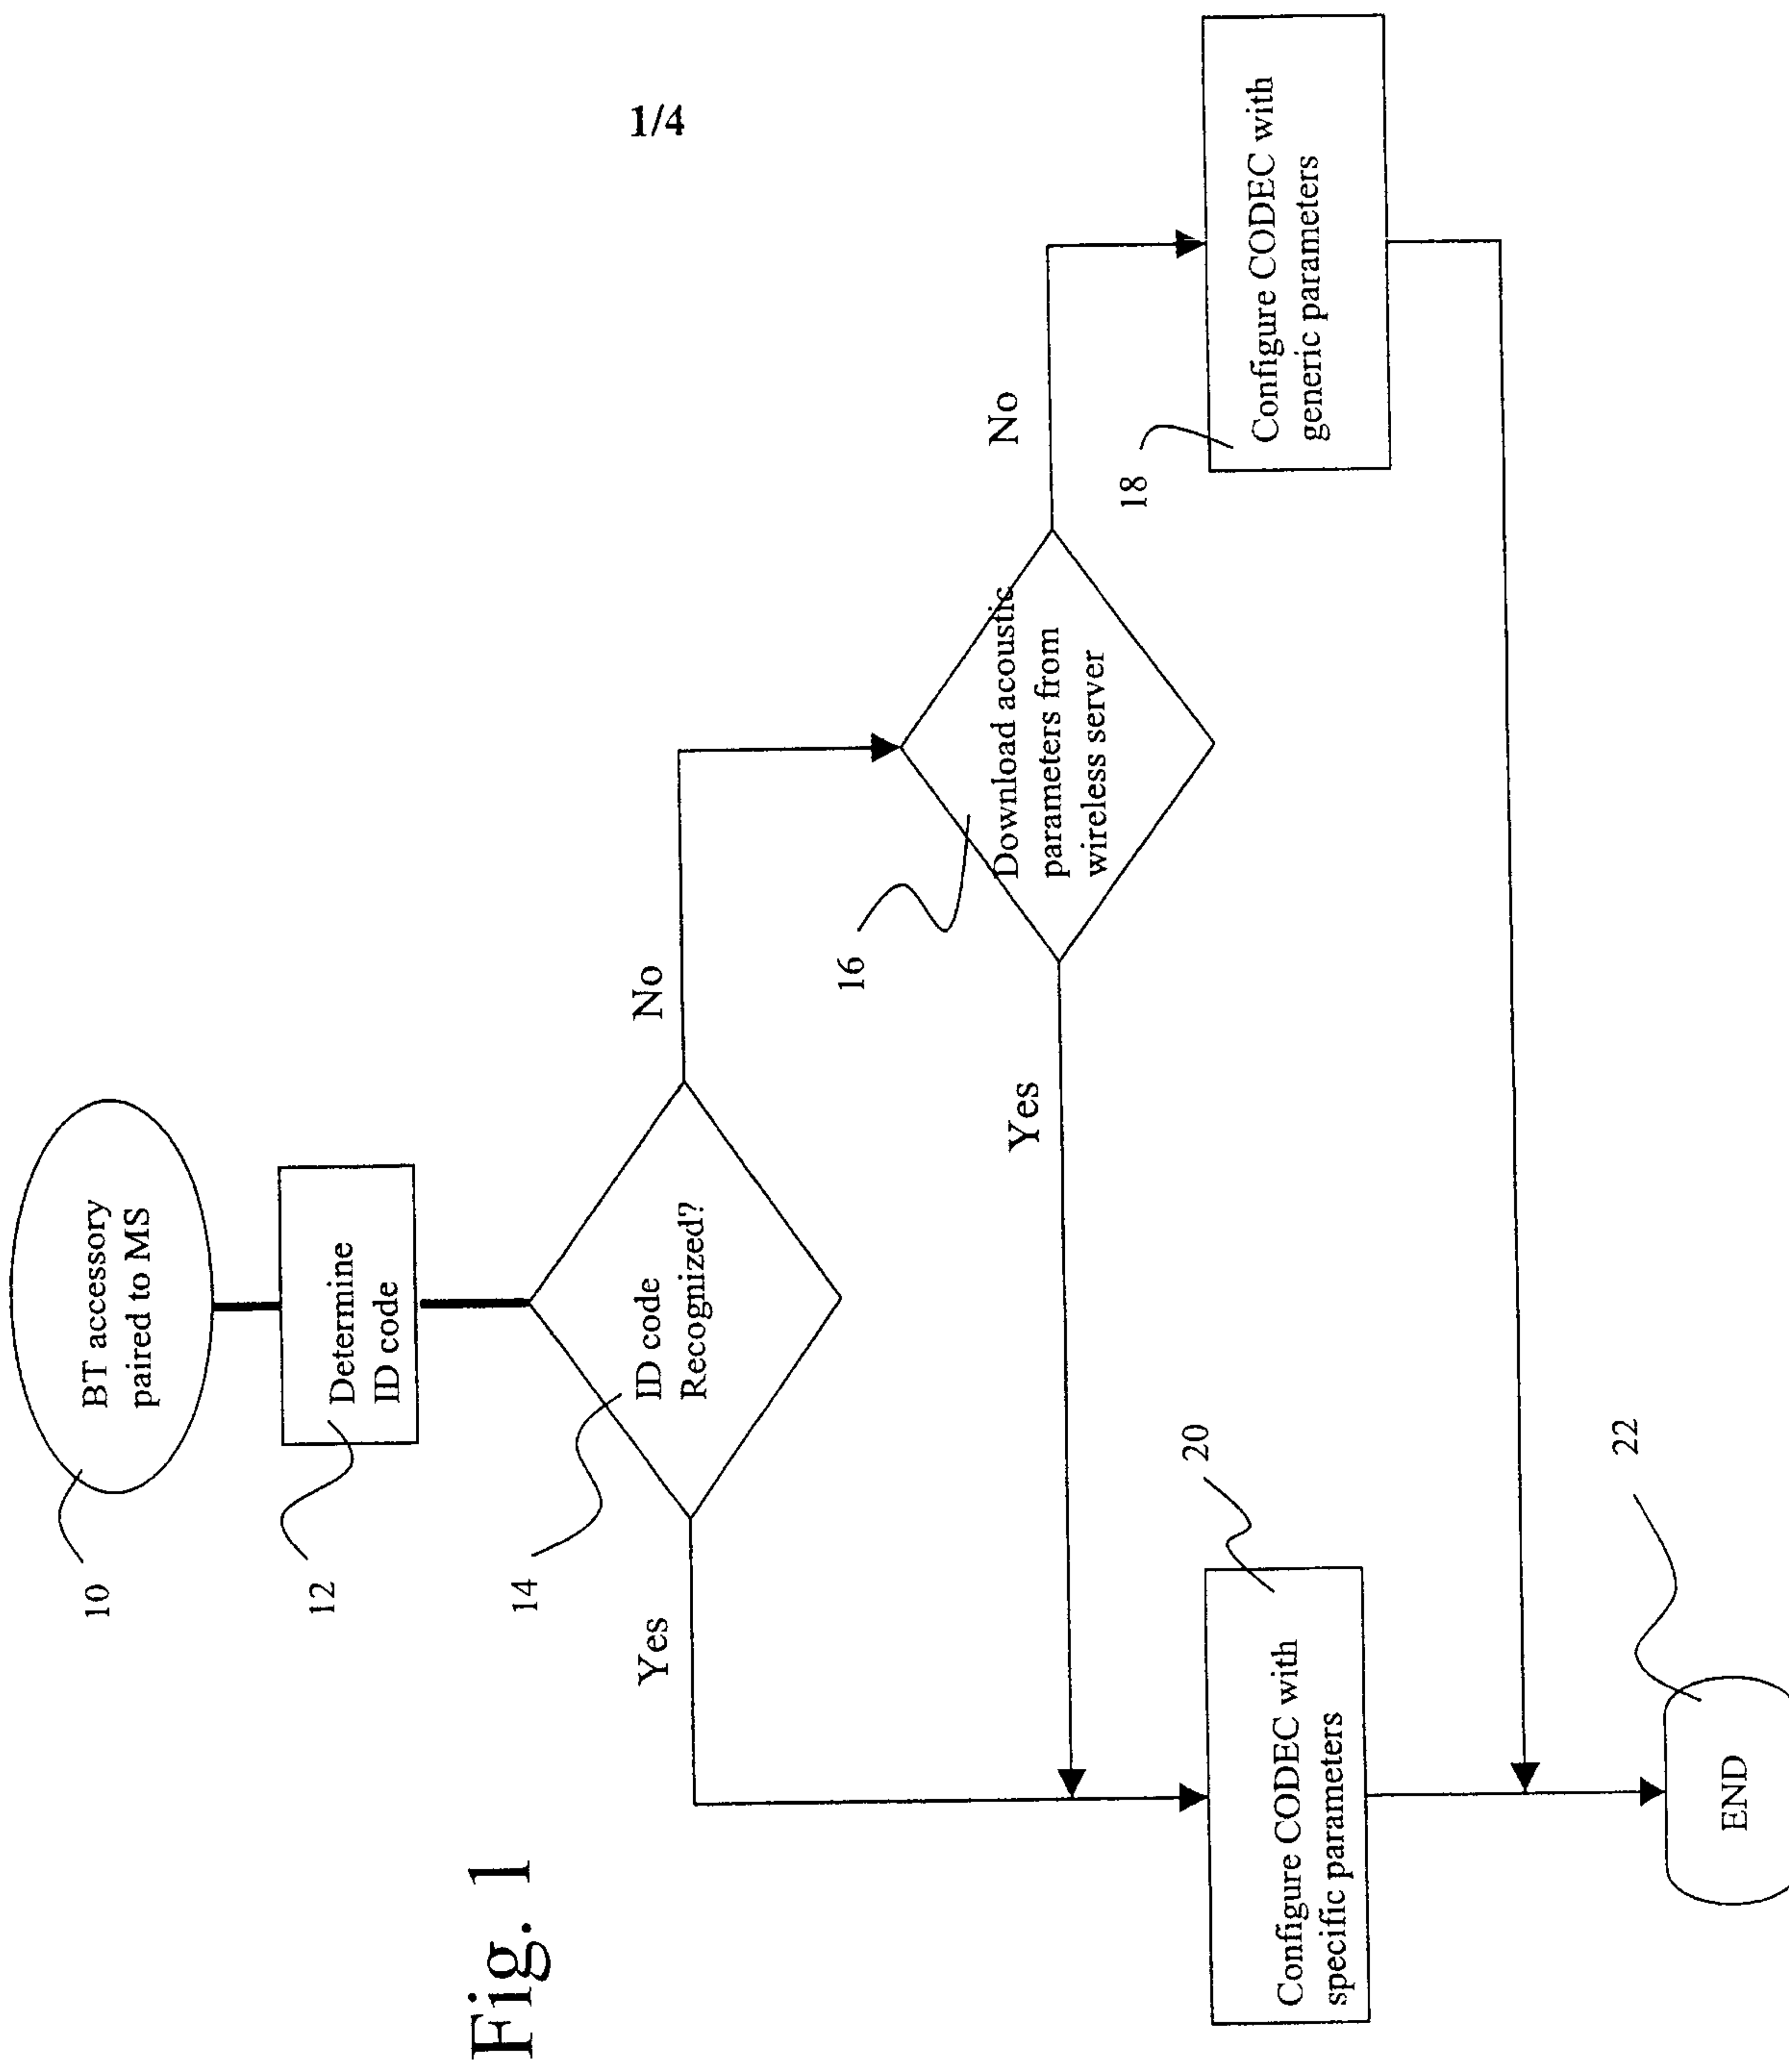


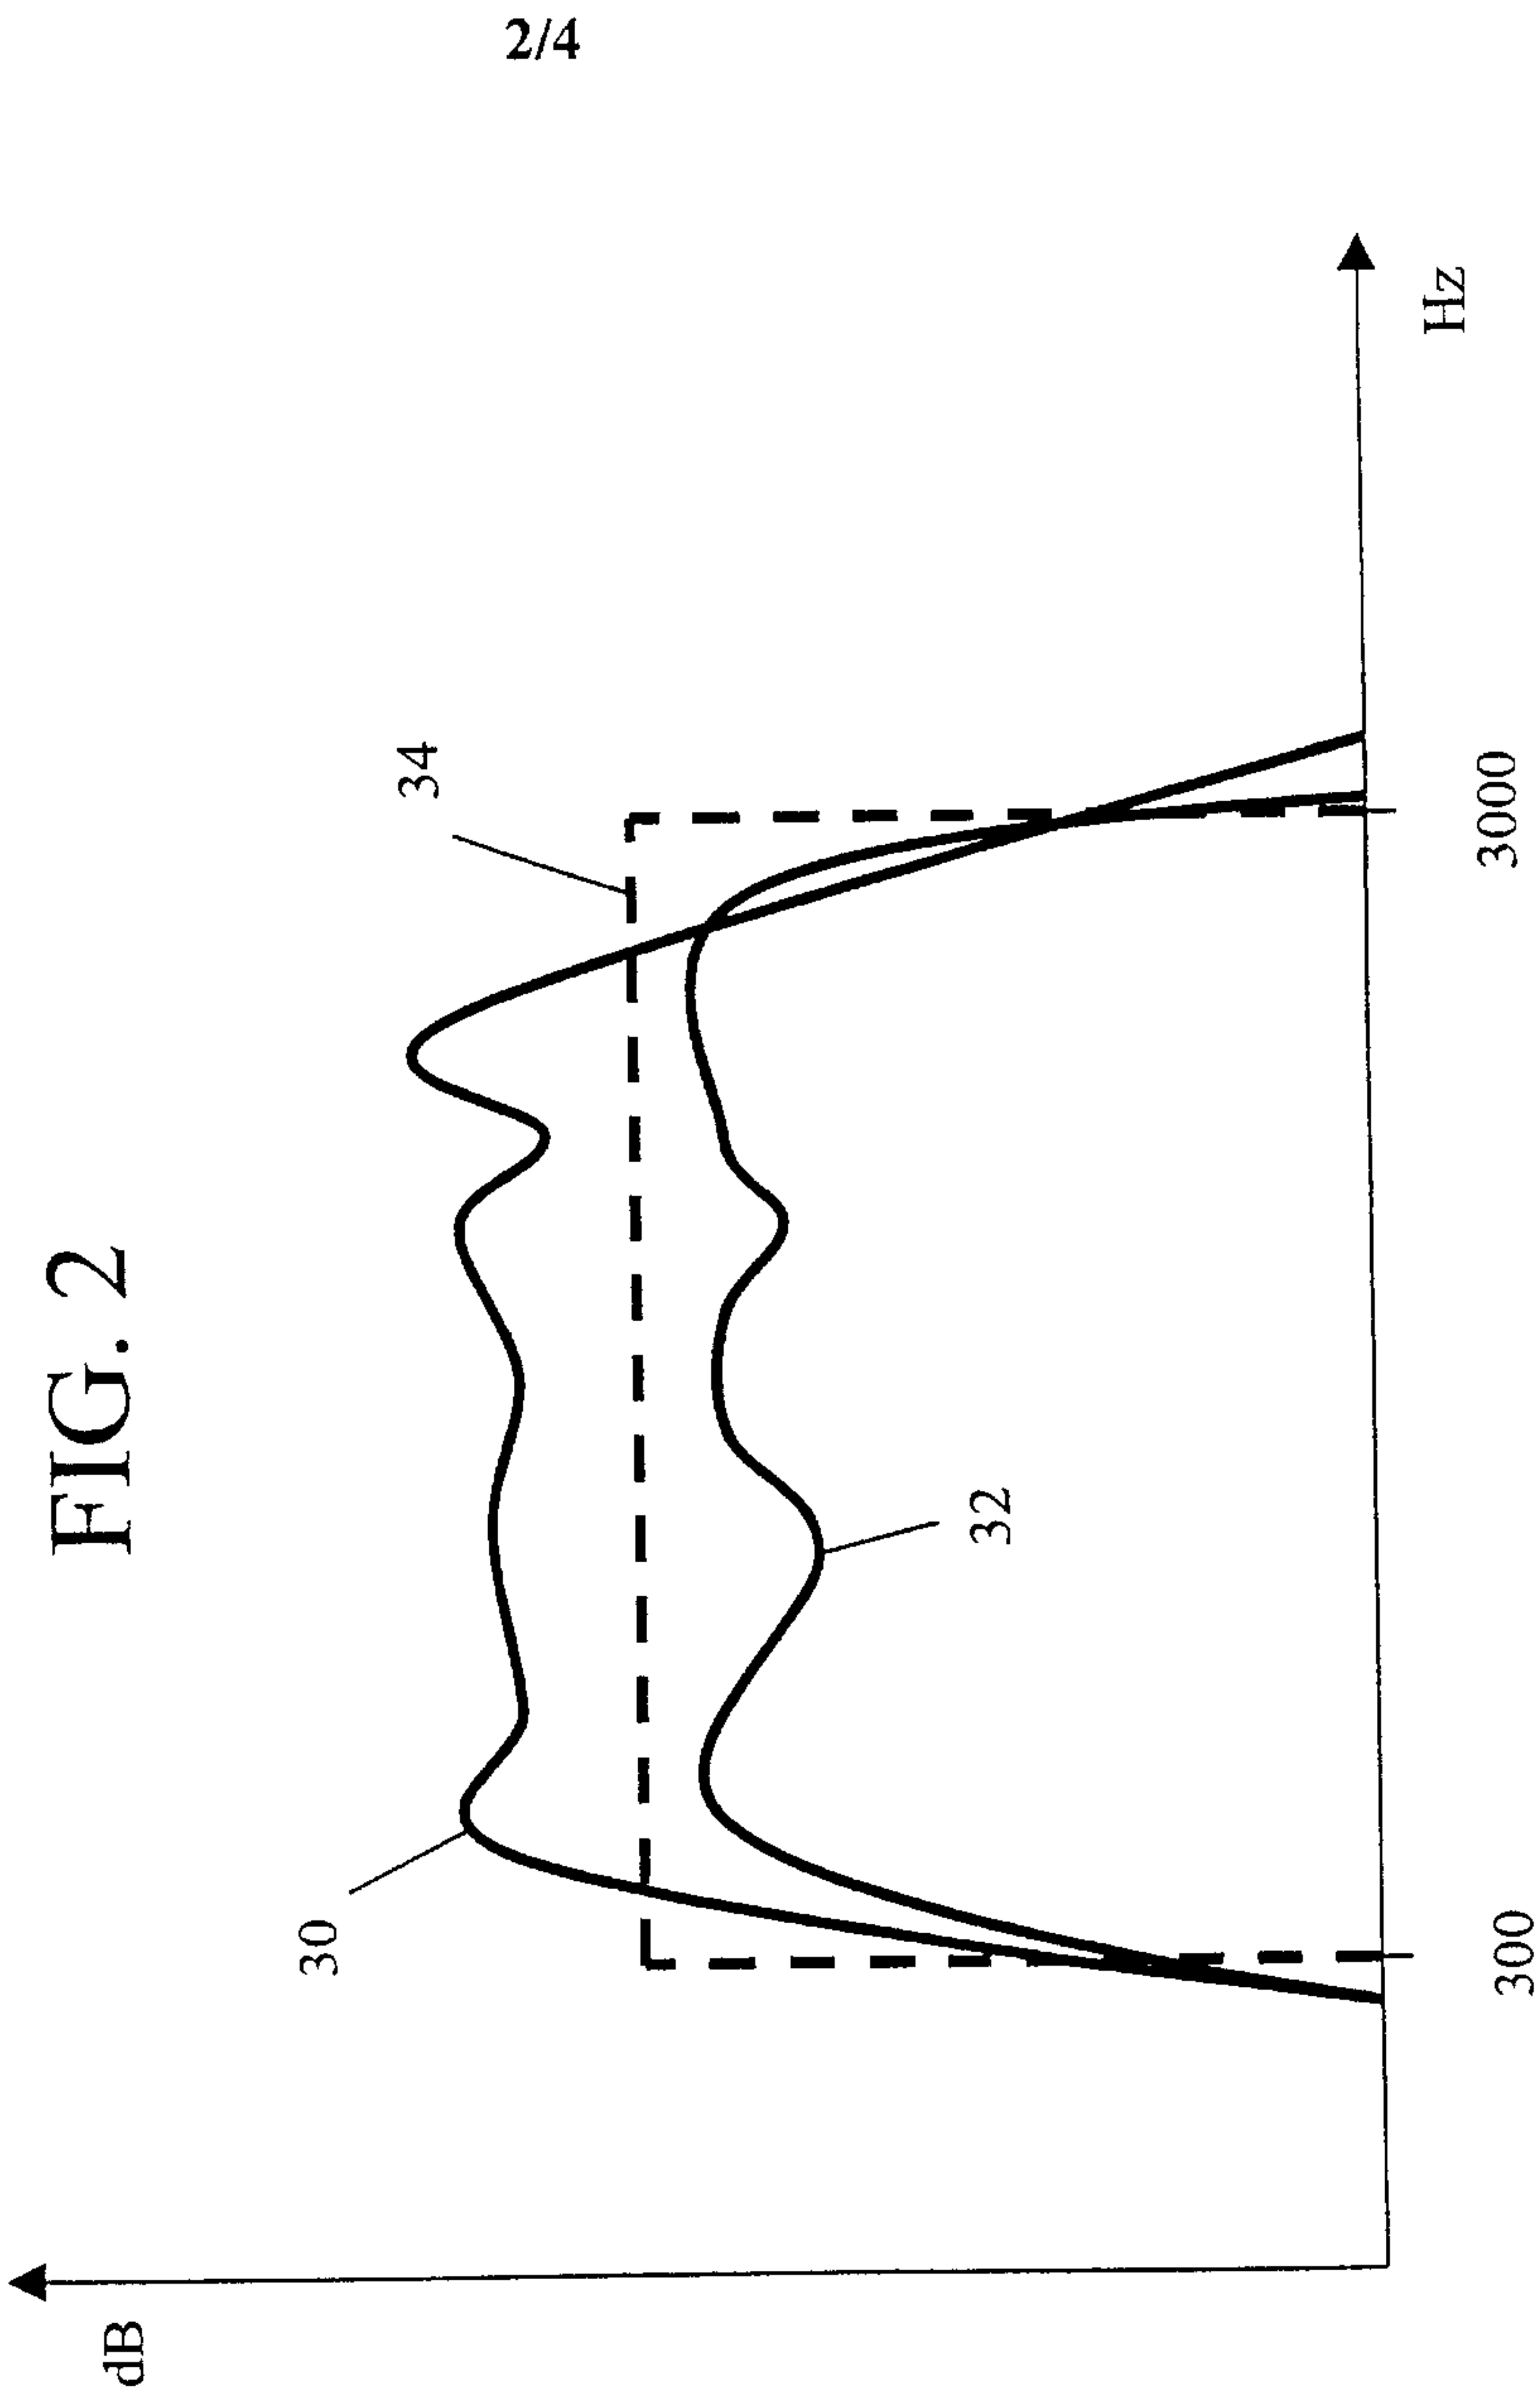


FIG. 3



4/4

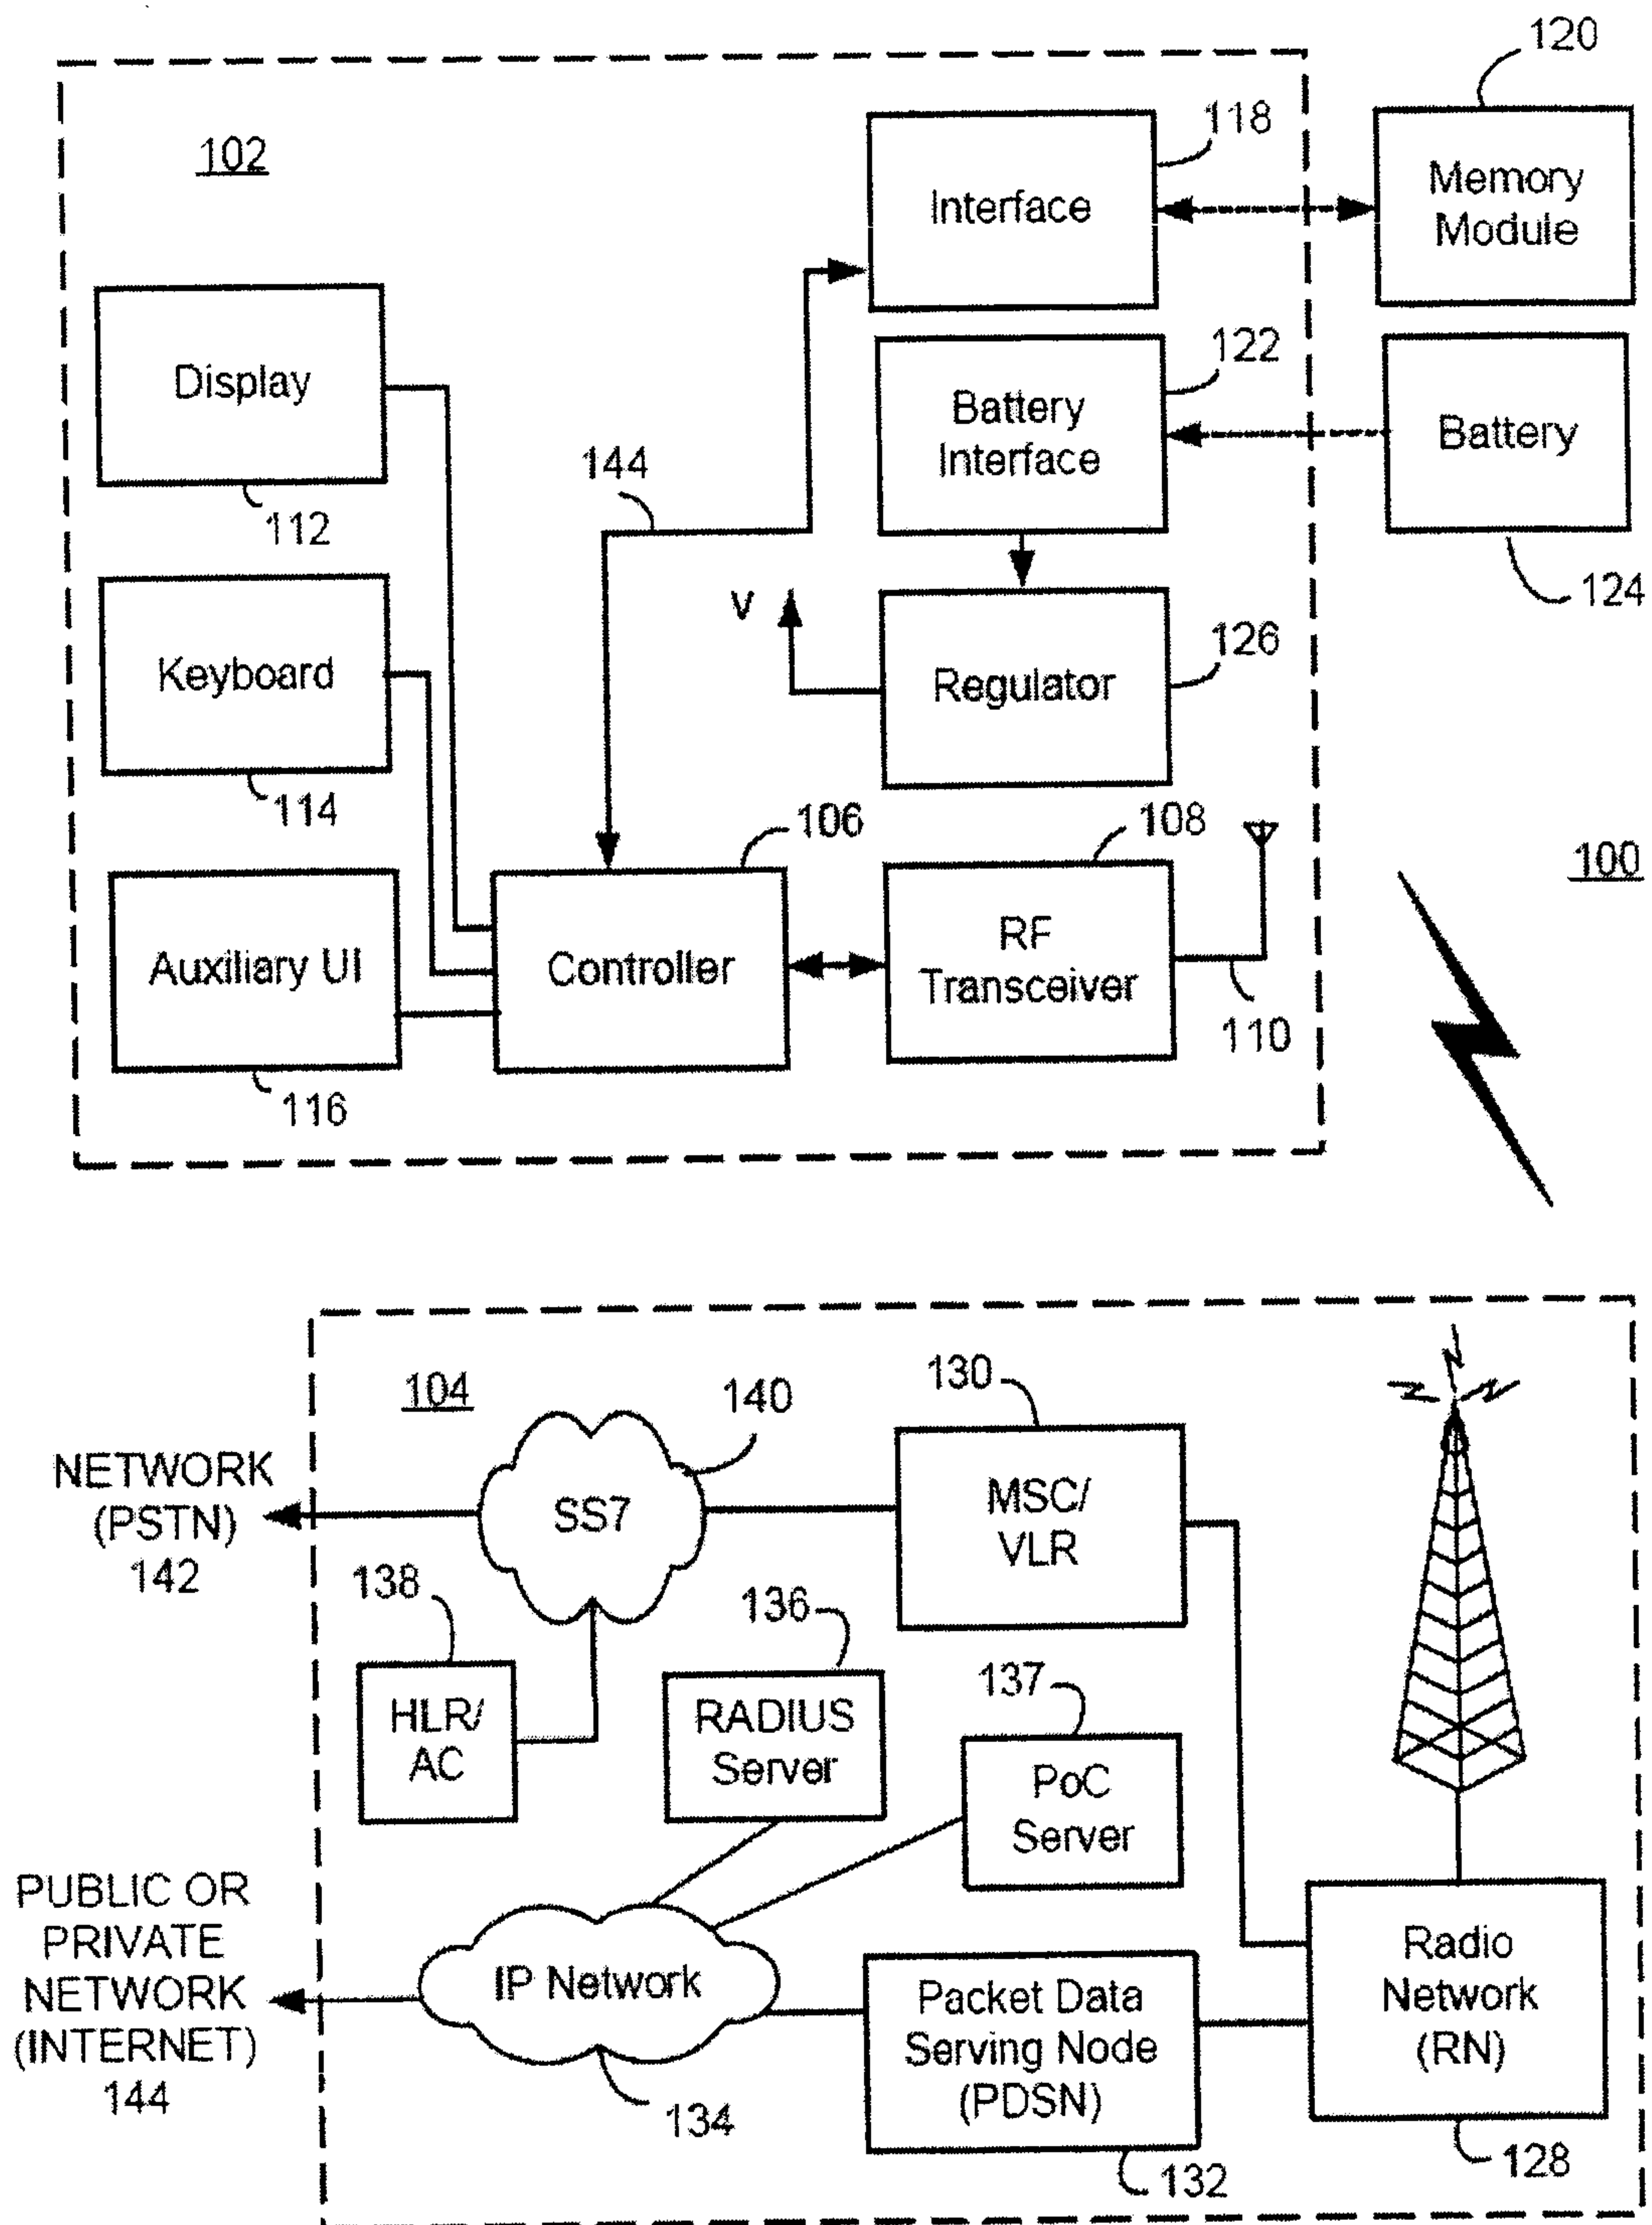