



US00RE46694E

(19) **United States**
(12) **Reissued Patent**
Ahn et al.

(10) **Patent Number:** **US RE46,694 E**
(45) **Date of Reissued Patent:** ***Jan. 30, 2018**

(54) **METHOD FOR RECEIVING CONTROL INFORMATION IN ORTHOGONAL FREQUENCY DIVISION MULTIPLEXING SYSTEM OF MOBILE COMMUNICATION SYSTEM**

(52) **U.S. Cl.**
CPC **H04L 1/1812** (2013.01); **H04J 11/0036** (2013.01); **H04L 5/0007** (2013.01);
(Continued)

(71) Applicant: **LG ELECTRONICS INC.**, Seoul (KR)

(58) **Field of Classification Search**
CPC **H04L 1/1812**; **H04L 5/0007**; **H04L 5/094**; **H04L 27/2601**; **H04L 5/0053**; **H04J 11/0036**
(Continued)

(72) Inventors: **Joon Kui Ahn**, Seoul (KR); **Young Woo Yun**, Seoul (KR); **Ki Jun Kim**, Seoul (KR); **Eun Sun Kim**, Seoul (KR); **Dae Won Lee**, Seoul (KR); **Dong Youn Seo**, Seoul (KR); **Suk Hyon Yoon**, Seoul (KR)

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,870,391 A 2/1999 Nago
6,452,936 B1 9/2002 Shiino
(Continued)

(73) Assignee: **LG ELECTRONICS INC.**, Seoul (KR)

FOREIGN PATENT DOCUMENTS

(*) Notice: This patent is subject to a terminal disclaimer.

CN 1256033 A 6/2000
CN 1567761 A 1/2005
(Continued)

(21) Appl. No.: **14/684,747**

OTHER PUBLICATIONS

(22) Filed: **Apr. 13, 2015**

U.S. Appl. No. 13/179,319, Notice of Allowance dated Sep. 26, 2011, 7 pages.

Related U.S. Patent Documents

Reissue of:

(64) Patent No.: **8,009,760**
Issued: **Aug. 30, 2011**
Appl. No.: **12/942,968**
Filed: **Nov. 9, 2010**

(Continued)

Primary Examiner — John M Hotaling
(74) *Attorney, Agent, or Firm* — Dentons US LLP

U.S. Applications:

(63) Continuation of application No. 14/163,661, filed on Jan. 24, 2014, now Pat. No. Re. 45,523, which is a
(Continued)

(57) **ABSTRACT**

The present invention relates to receiving control information in an orthogonal frequency division multiplexing (OFDM) system of a mobile communication system. The present invention includes receiving information related to a number of OFDM symbols in a subframe for receiving first control information, receiving information related to a number of OFDM symbols in the subframe for receiving second control information, decoding the first control information according to the received information related to the number of OFDM symbols in the subframe for receiving the first


(Continued)

Foreign Application Priority Data

Nov. 29, 2007 (KR) 10-2007-0122985

(51) **Int. Cl.**
H04L 27/00 (2006.01)
H04B 7/216 (2006.01)

(Continued)



* the number n is equal to or greater than the number m ($n \geq m$) and a transmission interval of the information about the number m is greater than a transmission interval of the information about the number n.

control information, and decoding the second control information according to the received information related to the number of OFDM symbols in the subframe for receiving the second control information, wherein the number of OFDM symbols for receiving the first control information is less than or equal to the number of OFDM symbols for receiving the second control information.

5 Claims, 6 Drawing Sheets

Related U.S. Application Data

continuation of application No. 13/941,313, filed on Jul. 12, 2013, now Pat. No. Re. 45,103, which is a continuation of application No. 13/941,277, filed on Jul. 12, 2013, now Pat. No. Re. 44,928, which is an application for the reissue of Pat. No. 8,009,760, which is a continuation of application No. 12/143,647, filed on Jun. 20, 2008, now Pat. No. 8,019,017.

(60) Provisional application No. 60/945,585, filed on Jun. 21, 2007, provisional application No. 60/946,400, filed on Jun. 27, 2007.

(51) **Int. Cl.**

H04L 1/18 (2006.01)
H04L 27/26 (2006.01)
H04L 5/00 (2006.01)
H04J 11/00 (2006.01)

(52) **U.S. Cl.**

CPC **H04L 5/0053** (2013.01); **H04L 5/0094** (2013.01); **H04L 27/2601** (2013.01)

(58) **Field of Classification Search**

USPC 370/342, 280, 336, 468, 329; 375/295, 375/300, 219, 267, 260
 See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,842,487 B1 1/2005 Larsson
 6,934,318 B2 8/2005 Sarkar
 7,069,050 B2 6/2006 Yoshida
 7,315,577 B2 1/2008 Shao
 7,336,633 B2 2/2008 Krusys
 7,386,076 B2 6/2008 Onggosanusi et al.
 7,885,176 B2* 2/2011 Pi H04L 5/0007
 370/204
 7,894,395 B2* 2/2011 Yi H04W 72/10
 370/329
 7,953,169 B2 5/2011 Lee et al.
 7,954,032 B2 5/2011 Kim et al.
 7,995,661 B2 8/2011 Xu et al.
 8,014,352 B2* 9/2011 Tirola H04L 1/0039
 370/329
 8,102,862 B2* 1/2012 Lee H04L 1/0025
 370/400
 8,369,378 B2 2/2013 Lee et al.
 8,774,297 B2 7/2014 Lee et al.
 8,774,299 B2 7/2014 Lee et al.
 8,792,570 B2 7/2014 Lee et al.
 2001/0005681 A1* 6/2001 Kim 455/458
 2001/0034236 A1* 10/2001 Tong et al. 455/450
 2003/0039227 A1 2/2003 Kwak
 2003/0133426 A1 7/2003 Schein et al.
 2004/0009780 A1 1/2004 Dick et al.
 2004/0081131 A1 4/2004 Walton et al.
 2004/0100896 A1 5/2004 Vayanos et al.

2004/0190640 A1 9/2004 Dubuc et al.
 2005/0083977 A1 4/2005 Mousley et al.
 2005/0117536 A1 6/2005 Cho et al.
 2005/0122898 A1 6/2005 Jang et al.
 2005/0165949 A1 7/2005 Teague
 2005/0181799 A1 8/2005 Laroia et al.
 2005/0220000 A1 10/2005 Kim et al.
 2005/0232181 A1 10/2005 Park et al.
 2005/0233754 A1 10/2005 Beale
 2005/0286402 A1 12/2005 Byun et al.
 2006/0013186 A1 1/2006 Agrawal et al.
 2006/0045001 A1 3/2006 Jalali
 2006/0171295 A1* 8/2006 Ihm H04L 5/0046
 370/208
 2006/0198294 A1 9/2006 Gerlach
 2006/0209814 A1 9/2006 Fujii
 2006/0250941 A1 11/2006 Onggosanusi et al.
 2006/0264218 A1 11/2006 Zhang et al.
 2006/0274842 A1 12/2006 Pan et al.
 2006/0280256 A1 12/2006 Kwon et al.
 2007/0064669 A1* 3/2007 Classon H04L 1/1822
 370/347
 2007/0097915 A1* 5/2007 Papasakellariou H04L 1/0003
 370/329
 2007/0097942 A1 5/2007 Gorokhov et al.
 2007/0097981 A1 5/2007 Papasakellariou
 2007/0110104 A1 5/2007 Sartori et al.
 2007/0149137 A1 6/2007 Richardson et al.
 2007/0183533 A1 8/2007 Schmidl et al.
 2007/0184849 A1 8/2007 Zheng
 2007/0206559 A1 9/2007 Cho et al.
 2007/0208986 A1 9/2007 Luo et al.
 2007/0211667 A1 9/2007 Agrawal et al.
 2007/0254662 A1 11/2007 Khan et al.
 2007/0258373 A1 11/2007 Frederiksen et al.
 2007/0258540 A1* 11/2007 Ratasuk et al. 375/267
 2008/0025247 A1 1/2008 McBeath et al.
 2008/0025337 A1 1/2008 Smith et al.
 2008/0045272 A1 2/2008 Wang et al.
 2008/0075184 A1 3/2008 Muharemovic et al.
 2008/0090528 A1 4/2008 Malladi
 2008/0095106 A1 4/2008 Malladi et al.
 2008/0095252 A1 4/2008 Kim et al.
 2008/0151829 A1 6/2008 Khandekar et al.
 2008/0205348 A1 8/2008 Malladi
 2008/0225784 A1 9/2008 Tseng
 2008/0225791 A1 9/2008 Pi et al.
 2008/0227398 A1 9/2008 Haghghat et al.
 2008/0232307 A1 9/2008 Pi et al.
 2008/0253469 A1 10/2008 Ma et al.
 2008/0267158 A1 10/2008 Zhang et al.
 2008/0267310 A1 10/2008 Khan et al.
 2008/0304593 A1 12/2008 Khan et al.
 2008/0310483 A1 12/2008 Lee et al.
 2009/0046793 A1 2/2009 Love et al.
 2009/0059884 A1 3/2009 Zhang et al.
 2009/0060081 A1 3/2009 Zhang et al.
 2009/0154580 A1* 6/2009 Ahn et al. 375/260
 2009/0196279 A1 8/2009 Kim et al.
 2009/0262699 A1 10/2009 Wengerter et al.
 2009/0274037 A1 11/2009 Lee et al.
 2009/0285163 A1 11/2009 Zhang et al.
 2009/0310719 A1 12/2009 Stirling-gallacher
 2009/0323615 A1 12/2009 Ihm et al.
 2010/0034163 A1 2/2010 Damjanovic et al.
 2010/0067445 A1* 3/2010 Rinne H04L 5/0053
 370/329
 2010/0098005 A1 4/2010 Lee et al.
 2010/0157913 A1 6/2010 Nagata et al.
 2010/0167746 A1* 7/2010 Lee H04W 48/12
 455/450
 2010/0260164 A1* 10/2010 Moon et al. 370/345
 2011/0002309 A1 1/2011 Park et al.
 2011/0051841 A1 3/2011 Ahn et al.
 2012/0106478 A1 5/2012 Han et al.
 2012/0113945 A1 5/2012 Moon et al.
 2013/0294282 A1 11/2013 Seo

(56)

References Cited

U.S. PATENT DOCUMENTS

FOREIGN PATENT DOCUMENTS

CN 1701550 A 11/2005
 CN 1829373 9/2006
 CN 1969522 A 5/2007
 CN 101005326 A 7/2007
 EP 1185001 3/2002
 EP 1248485 10/2002
 EP 1448012 A2 8/2004
 EP 1476855 1/2007
 EP 1746810 1/2007
 EP 1746855 1/2007
 EP 2 056 500 A1 5/2009
 EP 2171878 4/2010
 JP 04-074026 3/1992
 JP 2001-044900 2/2001
 JP 2002-369258 12/2002
 JP 2004-312291 11/2004
 JP 2004-364321 12/2004
 JP 2005-244960 9/2005
 JP 2005253073 9/2005
 JP 2005-288300 10/2005
 JP 2006-166382 6/2006
 JP 2007-124682 5/2007
 JP 2007-511975 5/2007
 JP 2007-221755 8/2007
 JP 2008-053858 3/2008
 JP 2008-092051 4/2008
 JP 2008-092377 4/2008
 JP 2008-236018 10/2008
 JP 2010-506505 2/2010
 JP 2011-193521 9/2011
 KR 101999013366 2/1999
 KR 10-2002-0009079 2/2002
 KR 1020020088085 11/2002
 KR 1020030081464 10/2003
 KR 1020050021965 3/2005
 KR 10-2005-0043302 5/2005
 KR 1020050073256 7/2005
 KR 10-2005-0120244 12/2005
 KR 1020060016600 2/2006
 KR 10-2006-0081352 7/2006
 KR 10-2006-0092055 8/2006
 KR 1020060095576 8/2006
 KR 1020070107614 11/2007
 KR 1020080023664 3/2008
 KR 1020080030905 4/2008
 KR 1020080039772 5/2008
 KR 1020080065853 7/2008
 KR 1020080096088 10/2008
 KR 100894142 4/2009
 KR 1020090082843 7/2009
 RU 2142672 10/1999
 RU 214672 12/1999
 RU 221335 1/2004
 RU 2221335 1/2004
 RU 2267225 12/2005
 TW 545074 8/2003
 WO 03/043245 5/2003
 WO 2003/077579 9/2003
 WO 03/085858 10/2003
 WO 2004/038991 5/2004
 WO 2004/049591 6/2004
 WO 2005/006250 1/2005
 WO 05/050875 6/2005
 WO 2005/060132 6/2005
 WO 2005/065062 7/2005
 WO 2005065062 A2 7/2005
 WO 2005/074184 8/2005
 WO 2005/088869 9/2005
 WO 2005099123 10/2005
 WO 2005/125140 12/2005
 WO 2005119959 12/2005
 WO 2006/023192 3/2006
 WO 06/069299 6/2006

WO 2006-071050 7/2006
 WO 2006/073284 7/2006
 WO 2006/102771 10/2006
 WO 07/007380 1/2007
 WO 2007/011180 A1 1/2007
 WO 2007/052941 5/2007
 WO 2007049208 5/2007
 WO 2007/078146 7/2007
 WO 2007091836 A1 8/2007
 WO 2008041819 4/2008
 WO 2008-133439 11/2008
 WO 2009/041785 A2 4/2009

OTHER PUBLICATIONS

U.S. Appl. No. 13/217,204, Notice of Allowance dated Apr. 8, 2013, 8 pages.
 U.S. Appl. No. 13/045,455, Office Action dated Dec. 2, 2011, 8 pages.
 U.S. Appl. No. 13/190,318, Office Action dated May 21, 2012, 7 pages.
 U.S. Appl. No. 13/014,665, Office Action dated Nov. 29, 2012, 24 pages.
 U.S. Appl. No. 13/295,974, Office Action dated Jan. 29, 2013, 8 pages.
 U.S. Appl. No. 13/295,987, Office Action dated Feb. 6, 2013, 8 pages.
 U.S. Appl. No. 13/165,711, Office Action dated Mar. 13, 2013, 10 pages.
 U.S. Appl. No. 13/295,884, Office Action dated Mar. 14, 2013, 8 pages.
 European Patent Office Application Serial No. 13185491.1, Search Report dated Nov. 7, 2013, 8 pages.
 NTT Docomo et al., "ACK/NACK Signal Structure in E-UTRA Downlink R1-070867", 3GPP Draft; 3rd Generation Partnership Project (3GPP), XP050104879, Feb. 6, 2007.
 LG Electronics: "Allocation of UL ACK/NACK index R1-072348", 3GPP Draft; 3rd Generation Partnership Project (3GPP), XP050106077, May 2, 2007.
 "E-UTRA Downlink Control Channel Structure and TP", 3rd Generation Partnership Project (3GPP); R1-060378, XP002458193, Feb. 13, 2006.
 3GPP Draft; 41-071820, 3rd Generation Partnership Project (3GPP), XP050596361, Apr. 3, 2007.
 Panasonic; "CCE aggregation size and transport format signaling", 3GPP Draft; R1-073608, 3rd Generation Partnership Project (3GPP), XP050107206, Aug. 5, 2007.
 LG Electronics; "Consideration on the amount of control channel overhead in downlink", 3GPP Draft; R1-072353, 3rd Generation Partnership Project (3GPP), XP050106082, May 2, 2007.
 Motorola: "Downlink Acknowledgment and Group Transmit Indicator Channels", 3GPP Draft; R1-061165_DL_ACK, 3rd Generation Partnership Project (3GPP), XP050102052, May 12, 2006.
 Samsung: "DL ACK/NACK signalling", 3GPP Draft; R1-061697-DL ACK, 3rd Generation Partnership Project (3GPP), XP050111527, Jun. 20, 2006.
 Via Telecom: "Hybrid CDM/TDM Structure for UL E-DCH", 3GG Draft; R1-041162, 3rd Generation Partnership Project (3GPP), XP050099359, Sep. 18, 2004.
 Samsung, Rules for mapping VRBs to PRBs (R1-060808), 3GPP TSG RAN WG1 Meeting #44bis, R1-060808, Mar. 31, 2006.
 Ericsson and NTT DoCoMo, E-UTRA Downlink Control Signaling-Overhead Assessment, 3GPP TSG RAN WG1 Meeting #44, R1-060573, Feb. 17, 2006.
 Su, et al., "Obtaining full-diversity space-frequency codes from space-time codes via mapping," IEEE Transactions on Signal Processing, vol. 51 No. 11, XP-011102805, Nov. 2003, pp. 2905-2916.
 Samsung, "Transmit Diversity for 4-Tx Antenna", 3GPP TSG RAN WG1 Meeting #49, R1-072238, XP-002578959, May 2007, 5 pages.
 Zhang, et al., "Space-Time/Frequency Coding for MIMO-OFDM in Next Generation Broadband Wireless Systems," Next-Generation

(56) **References Cited**

OTHER PUBLICATIONS

CDMA vs. FDMA for 4G Wireless Applications, IEEE Wireless Communications, vol. 14 No. 3, XP-011189164, Jun. 2007, pp. 32-43.

Kim et al., "Transmit Diversity and Multiplexing Methods for 3G-LTE Downlink Control Channels," 64th IEEE Vehicular Technology Conference, XP-031051218, Sep. 2006, 4 pages.

Ryu, "System Design and Analysis of MIMO SFBC CI-OFDM System against the Nonlinear Distortion and Narrowband Interference," IEEE Transactions on Consumer Electronics, vol. 54, No. 2, May 2008, pp. 368-375.

Ryu, H.G., et al., "Design and Performance Evaluation of the MIMO SFBC CI-OFDM Communication System," The Fourth International Conference on Wireless and Mobile Communications, Jul. 2008, pp. 60-64.

Panasonic, "Mapping Position of Control Channel for Uplink SC-FDMA", TSG-RAN WG1 #43, Doc. No. R1-051395, XP-002450961, Nov. 2005, 6 pages.

3rd Generation Partnership Project (3GPP), "3rd Generation Partnership Project; Technical Specification Group Radio Access Network; LTE Physical Layer—General Description (Release 8)" 3GPP TS 36.201 V1.20.0, XP-050380347, Jun. 2007, 12 pages.

Zhang, et al., "Space-Frequency Block Code with Matched Rotation MIMO-OFDM System with Limited Feedback", EURASIP Journal on Advances in Signal Processing, Jun. 2009, 16 pages.

Zhang, et al., "Universal Space-Frequency Block Coding for MIMO-OFDM Systems", IEEE Asia-Pacific Conference on Communications, pp. 227-231, Oct. 2005, 5 pages.

Samsung, "Downlink ACK/NACK Transmission Structure," 3GPP TSG RAN WG1 Meeting #49, R1-072247, May 2007, 4 pages.

Intel Corporation, "Text Proposal for downlink OFDMA resource allocation and mapping rules for distributed mode users in E-UTRA, with discussion on control information", 3GPP TSG RAN WG1 #45, R1-061149, May 2006, 7 pages.

Huwei, "E-E-UTRA Downlink L 1/L2 Control Channel Structure," 3GPP TSG-RAN-WG1 Meeting #48bis, R1-071689, Mar. 2007, 4 pages.

ETRI, "Downlink L1/L2 control signaling", 3GPP TSG RAN WG1 Meeting #47bis, R1-070079, Jan. 2007, 10 pages (relevant portions: section 5).

Ericsson, et al., "Way Forward on Downlink Control Signaling," 3GPP TSG RAN WG1 Meeting #48, R1-071223, Feb. 2007, 6 pages.

NTT DoCoMo, et al., "Comparison between RB-level and Sub-carrier-level Distributed Transmission for Shared Data Channel in E-UTRA Downlink," 3GPP TSG RAN WG1 Meeting #46, R1-062089, Aug. 2006, 14 pages.

Morimoto, et al., "Transmit Diversity Schemes Suitable for Common Control Channel in Evolved UTRA Downlink," IEEE Technical Report RSC2007-50, Evolved UTRA vol. 107, No. 147, Jul. 2007, pp. 125-130.

Samsung, "Performance of 4-Tx Antenna diversity with realistic channel estimation," 3GPP TSG RAN WG1 Meeting#49, R1-072239, May 2007, 6 pages.

Nortel, "SCH Search Performance with Transmit Diversity," 3GPP TSG-RAN WG1 Meeting on LTE, R1-061843, Jun. 2006, 10 pages.

Qualcomm Europe, "Considerations on Multiplexing of Control and User Data for Xfdma based E-UTRA Uplink Evaluation", 3GPP TSG-RAN WG1 #42bis, R1-051102, XP002446638, Oct. 2005, 6 pages.

Qualcomm Europe, "Mapping of UL ACK Transmission based on DL VRB", 3GPP TSG RANI #48, R1-070660, Feb. 2007, 4 pages.

Panasonic, "Assignment of Downlink ACK/NACK Channel," 3GPP TSG-RAN WG1 Meeting #49bis, R1-072794, XP002660823, Jun. 2007, 3 pages.

NTT DoCoMo, et al., "RB-level Distributed Transmission Method for Shared Data Channel in E-UTRA Downlink," 3GPP TSG RAN WG1 Meeting #46, R1-062285, Aug. 2006, 3 pages.

NTT DoCoMo, et al., "Downlink L1/L2 Control Signaling Channel Structure: Mapping," 3GPP TSG RAN WG Meeting #47bis, R1-070104, Jan. 2007, 17 pages.

NTT DoCoMo, et al., "Coding Scheme of L1/L2 Control Channel for E-UTRA Downlink," 3GPP TSG RAN WG1 LTE Ad Hoc, R1-061672, Jun. 2006, 19 pages.

Nortel, "Discussion on linkage of PHICH to uplink transmissions," 3GPP TSG-RAN WG1 Meeting #52, R1-080771, Feb. 2007, 3 pages.

NEC Group, "Efficient Downlink ACK/NACK signalling for E-UTRA," TSG-RAN WG1 #48Bis, R1-071508, Mar. 2007, 3 pages.

LG Electronics, "Downlink ACK/NACK Index Mapping," 3GPP RAN WG1 #48-bis, R1-071552, XP002660818, Mar. 2007, 6 pages.

LG Electronics, "Downlink control signalling," 3GPP TSG RAN WG1 #47, R1-063177, Nov. 2006, 6 pages.

LG Electronics, "Downlink CatO signaling for scheduling assignments," 3GPP TSG RAN WG1 #47bis, R1-070247, Jan. 2007, 4 pages.

LG Electronics, "DL ACK/NACK Structure," 3GPP TSG RAN WG1 #49bis, R1-072878, Jun. 2007, 6 pages.

LG Electronics, "Uplink ACK/NACK Index Mapping", 3GPP RAN WG1 #48-bis, R1-071547, XP002660822, Mar. 2007, 6 pages.

Kaiser, et al., "Space frequency block coding in the uplink of broadband MC-CDMA mobile radio systems with pre-equalization", Vehicular Technology Conference, Institute of Electrical and Electronics Engineers, XP10701084, VTC Fall 2003, 5 pages.

LG Electronics, "Downlink resource allocation for localized and distributed transmission", 3GPP TSG RAN WG1 #48bis, R1-071549, Mar. 2007, 3 pages.

Texas Instruments, "Shared Control Channel Structure for E-UTRA Downlink," 3GPP TSG-RAN WG1 #45, R1-061433, May 2006, 5 pages.

Texas Instruments, "Shared Control Channel Structure and Coding for E-UTRA Downlink," 3GPP TSG RAN WG1 LTE Ad Hoc, R1-061740, Jun. 2006, 8 pages.

Sharp, "UE Identity in L1/L2 Downlink Control Signalling," 3GPP TSG-RAN WG1#45, R1-061136, May 2006, 7 pages.

United States Patent and Trademark Office U.S. Appl. No. 13/165,711, Final Office Action dated Aug. 9, 2013, 9 pages.

The State Intellectual Property Office of the People's Republic of China Application Serial No. 200780036950.8, Office Action dated Jan. 31, 2012, 4 pages.

European Patent Office Application Serial No. 08723583.4, Search Report dated Sep. 6, 2011, 6 pages.

European Patent Office Application Serial No. 08723584.2, Search Report dated Oct. 26, 2011, 8 pages.

European Patent Office Application Serial No. 11171776.5, Search Report dated Aug. 24, 2012, 8 pages.

United Kingdom Intellectual Property Office Application Serial No. GB1000405.9, Office Action dated Apr. 5, 2012, 2 pages.

Russian Federation Federal Service for Intellectual Property, Patents and Trademarks Application Serial No. 2009123819/08, Notice of Allowance dated Oct. 14, 2011, 8 pages.

Russian Federation Federal Service for Intellectual Property, Patents and Trademarks Application Serial No. 2010100873/07, Notice of Allowance dated Sep. 22, 2011, 16 pages.

Taiwan Intellectual Property Office Application Serial No. 097122232, Office Action dated Feb. 29, 2012, 7 pages.

Taiwan Intellectual Property Office Application Serial No. 096136988, Office Action dated May 17, 2013, 6 pages.

U.S. Appl. No. 13/166,750, Office Action dated Jul. 26, 2012, 8 pages.

U.S. Appl. No. 13/014,665, Final Office Action dated May 22, 2013, 25 pages.

U.S. Appl. No. 13/165,711, Final Office Action dated Aug. 9, 2013, 9 pages.

* cited by examiner

FIG. 1

Varying period of the number m of
OFDM through which an ACK/NAK channel is transmitted



Varying period of the number n of
OFDM for control channel transmission



FIG. 2

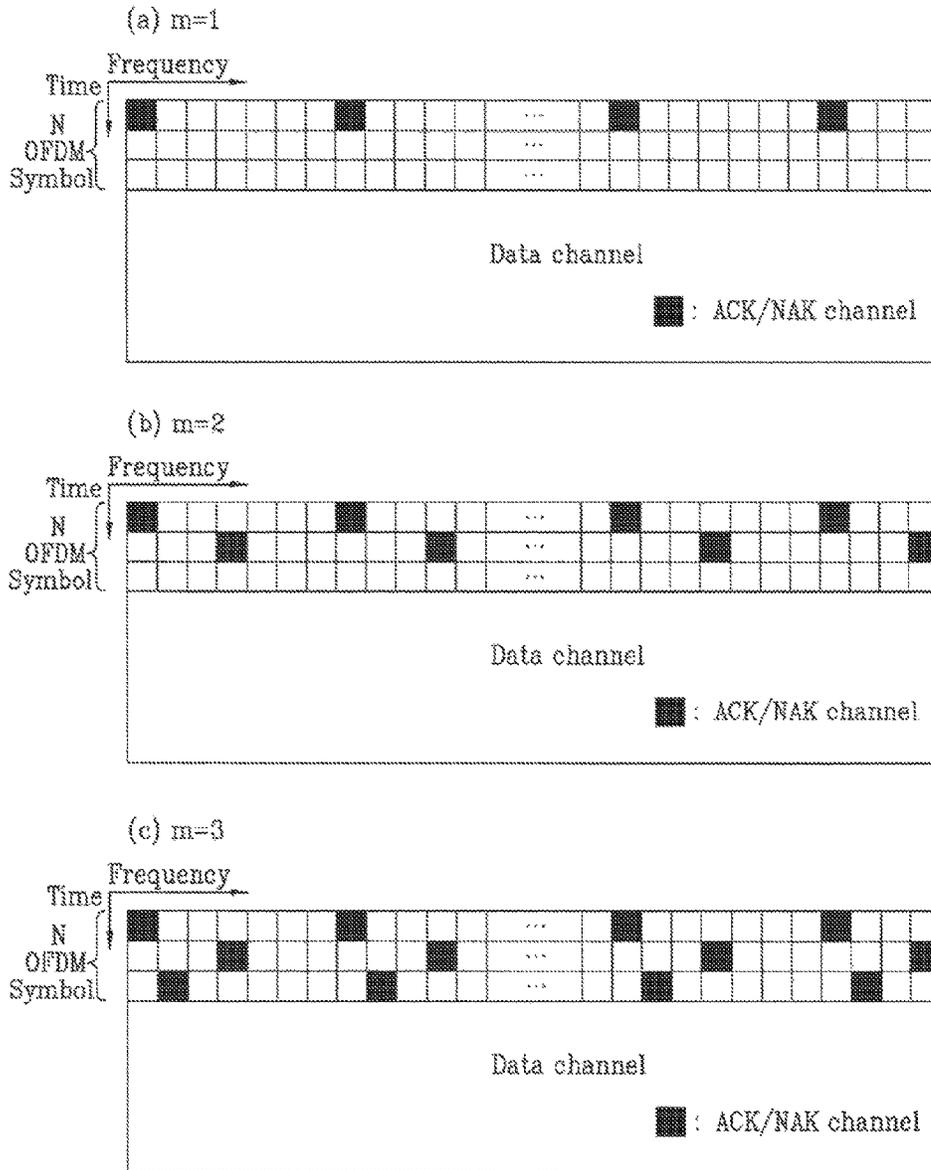


FIG. 3

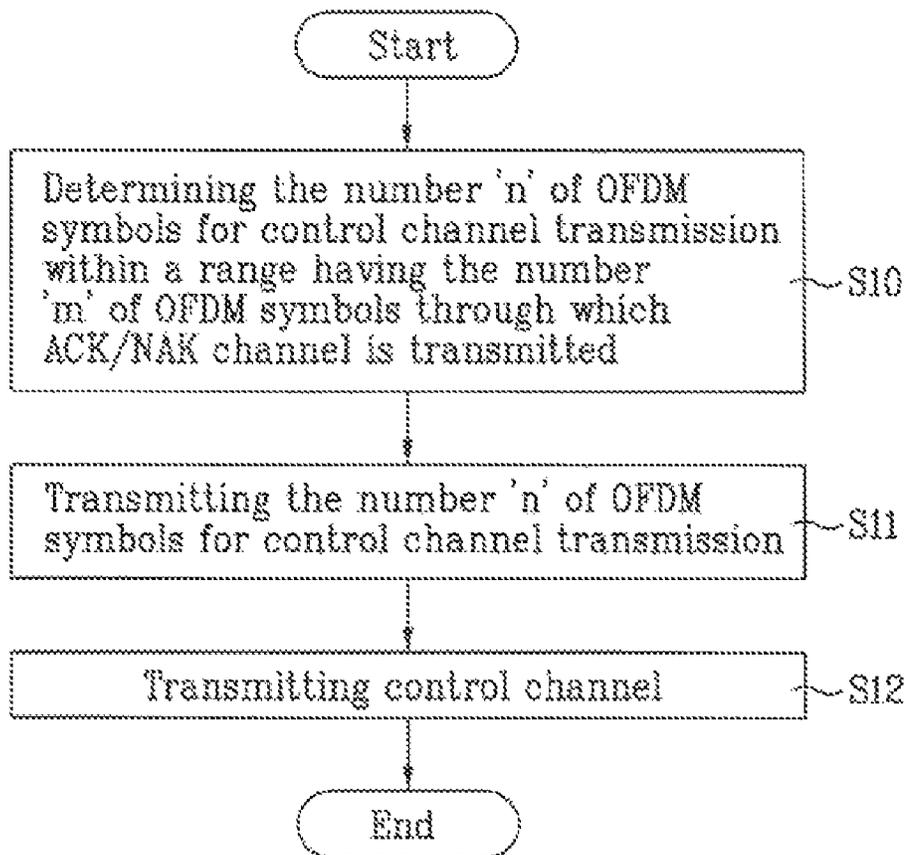


FIG. 4

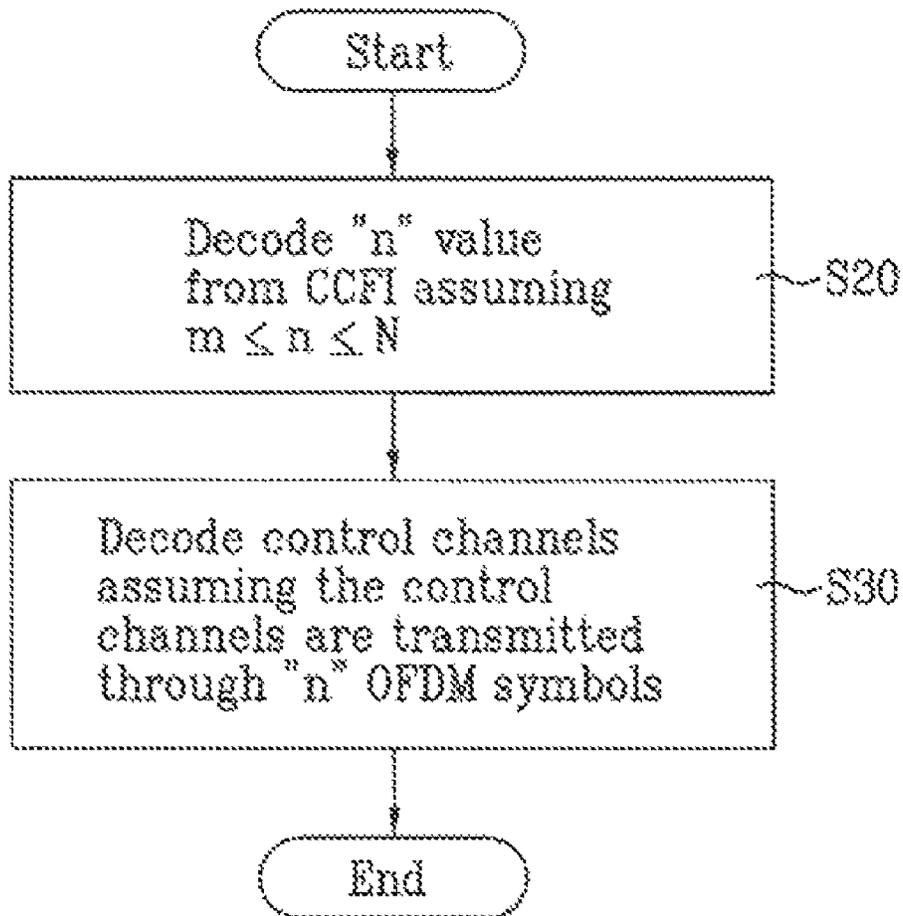


FIG. 5


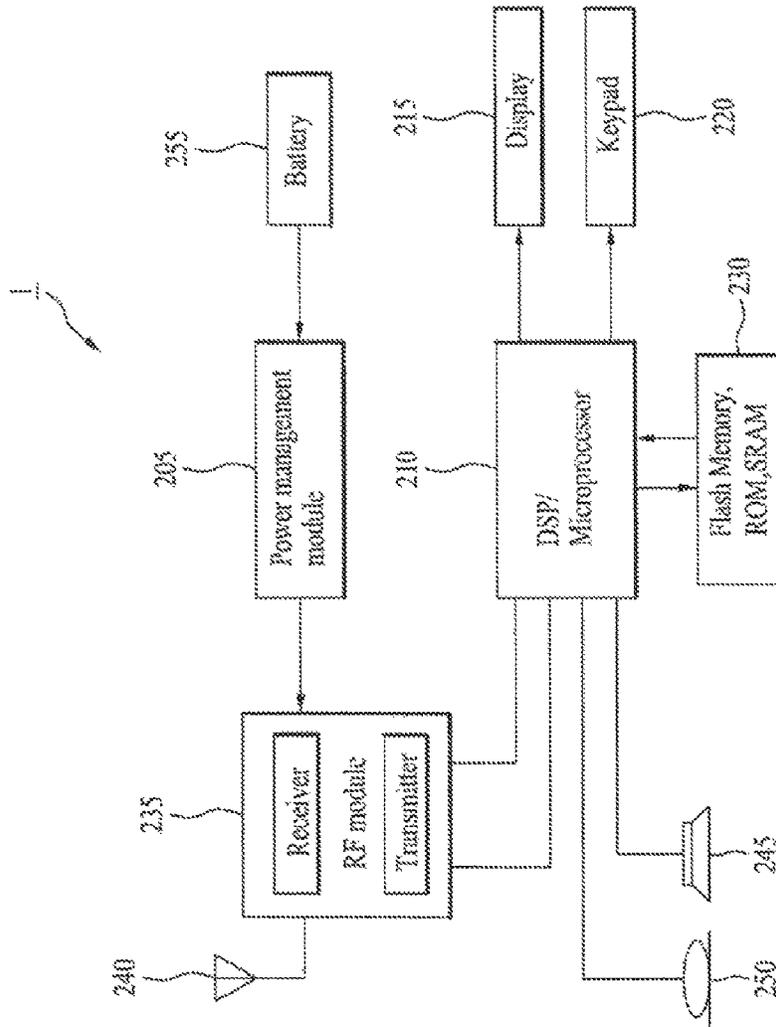


FIG. 6

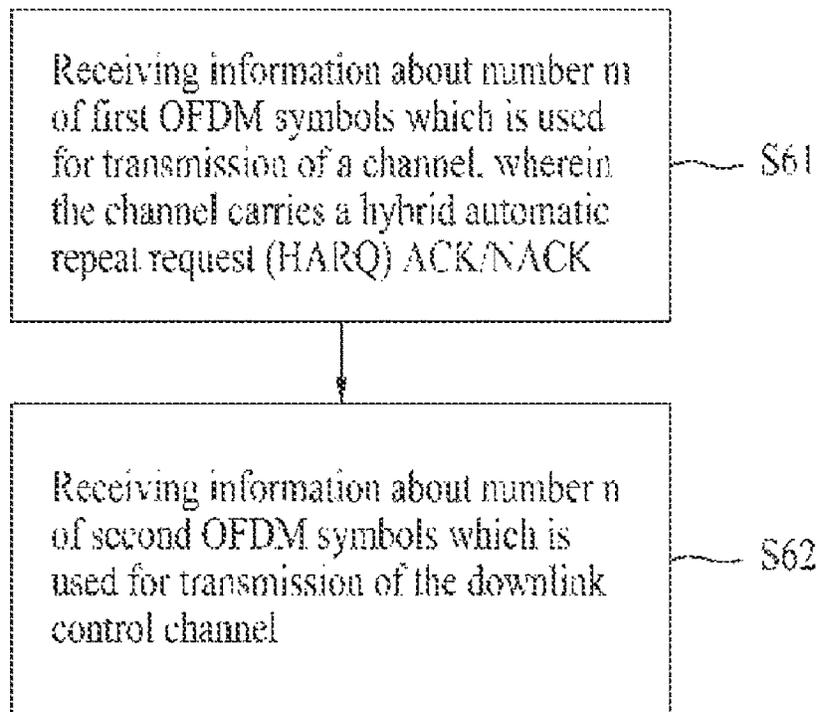

* the number n is equal to or greater than the number m ($n \geq m$) and a transmission interval of the information about the number m is greater than a transmission interval of the information about the number n .

**METHOD FOR RECEIVING CONTROL
INFORMATION IN ORTHOGONAL
FREQUENCY DIVISION MULTIPLEXING
SYSTEM OF MOBILE COMMUNICATION
SYSTEM**

Matter enclosed in heavy brackets [] appears in the original patent but forms no part of this reissue specification; matter printed in italics indicates the additions made by reissue; a claim printed with strikethrough indicates that the claim was canceled, disclaimed, or held invalid by a prior post-patent action or proceeding.

CROSS-REFERENCE TO RELATED
APPLICATIONS

More than one reissue application has been filed for the reissue of U.S. Pat. No. 8,009,760. This application is a continuation reissue of U.S. application Ser. No. 14/163,661 filed Jan. 24, 2014, now U.S. Pat. No. Re. 45,523, which is a continuation reissue of U.S. application Ser. No. 13/941,313 filed Jul. 12, 2013, now U.S. Pat. No. Re. 45,103, which is a continuation reissue of U.S. application Ser. No. 13/941,277 filed Jul. 12, 2013, now U.S. Pat. No. Re. 44,928, which is a reissue of U.S. Pat. No. 8,009,760 issued Aug. 30, 2011, which is a continuation of U.S. application Ser. No. 12/143,647, filed Jun. 20, 2008, [currently pending] now U.S. Pat. No. 8,019,017, which claims the benefit of earlier filing date and right of priority to Korean Application No. 10-2007-0122985, filed on Nov. 29, 2007, and U.S. Provisional Application Ser. Nos. 60/945,585, filed on Jun. 21, 2007, and 60/946,400, filed on Jun. 27, 2007, the contents of which are hereby incorporated by reference herein in their entirety.

FIELD OF THE INVENTION

The present invention relates to a mobile communication system, and more particularly, to a method for receiving control information in an orthogonal frequency division multiplexing system of the mobile communication system.

BACKGROUND OF THE INVENTION

In a cellular orthogonal frequency division multiplexing (OFDM) radio packet communication system, uplink and downlink data packet transmissions are transmitted via a subframe unit. A subframe is defined as a predetermined time period including a plurality of OFDM symbols. Currently, various control information for uplink/downlink data packet transmissions are also transmitted. Such control information includes information necessary for transmitting and receiving the uplink/downlink data packets, such as radio resource information used for transmitting and receiving the uplink/downlink data packets, a coding scheme, and a modulation scheme, for example. The control information is transmitted using at least one of the plurality of OFDM symbols included in the subframe.

A plurality of mobile terminals may communicate through one base station in a cellular OFDM radio packet communication system. Accordingly, scheduling for allocating radio resources for each of the plurality of mobile terminals is required. In particular, for a downlink control channel transmission, control information for the plurality of mobile terminals may be transmitted together. Thus, scheduling for

allocating radio resources for the control information transmission is also required. Therefore, such scheduling information is also transmitted.

Among the plurality of OFDM symbols included in the subframe, the number of OFDM symbols used in transmitting the control information and/or the scheduling information may be varied per subframe according to a communication environment, the amount of control channel information, and the amount of scheduling information, etc. Thus, such information should be informed to a receiver. If errors occur in receiving the control information and the scheduling information, it is quite probable that errors occur in receiving the data of the corresponding subframe. Accordingly, what is needed is a system that overcomes the deficiencies of the prior art, such that control information and scheduling information can be decoded with a high success rate.

SUMMARY OF THE INVENTION

The present invention is directed to a method for receiving control information in an orthogonal frequency division multiplexing system of a mobile communication system.

Additional features and advantages of the invention will be set forth in the description which follows, and in part will be apparent from the description, or may be learned by practice of the invention. The objectives and other advantages of the invention will be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

To achieve these and other advantages and in accordance with the purpose of the present invention, as embodied and broadly described, the present invention is embodied in a method for receiving control information in an orthogonal frequency division multiplexing (OFDM) system of a mobile communication system, the method comprising receiving information related to a number of OFDM symbols in a subframe for receiving first control information, receiving information related to a number of OFDM symbols in the subframe for receiving second control information, decoding the first control information according to the received information related to the number of OFDM symbols in the subframe for receiving the first control information, and decoding the second control information according to the received information related to the number of OFDM symbols in the subframe for receiving the second control information, wherein the number of OFDM symbols for receiving the first control information is less than or equal to the number of OFDM symbols for receiving the second control information.

Preferably, the second control information is not decoded if the number of OFDM symbols for receiving the first control information is greater than the number of OFDM symbols for receiving the second control information.

In one aspect of the invention, the method further comprises decoding the second control information using all possible numbers of OFDM symbols in the subframe for receiving the second control information if the number of OFDM symbols for receiving the first control information is greater than the number of OFDM symbols for receiving the second control information. In another aspect of the invention, the method further comprises decoding the second control information using all possible numbers of OFDM symbols in the subframe for receiving the second control information greater than or equal to the number of OFDM symbols for receiving the first control information if the number of OFDM symbols for receiving the first control

3

information is greater than the number of OFDM symbols for receiving the second control information.

Preferably, the first control information comprises an ACK/NACK signal and the second control information comprises a physical downlink control channel. Preferably, the information related to the number of OFDM symbols in the subframe for receiving the first control information is received via a broadcast channel. Preferably, the information related to the number of OFDM symbols in the subframe for receiving the second control information is received via a physical control channel format indicator channel. Preferably, the number of OFDM symbols in the subframe for receiving the second control information is 1, 2 or 3.

In accordance with another embodiment of the present invention, a method for transmitting control information in an orthogonal frequency division multiplexing (OFDM) system of a mobile communication system comprises transmitting information related to a number of OFDM symbols in a subframe for transmitting first control information, transmitting information related to a number of OFDM symbols in the subframe for transmitting second control information, transmitting the first control information according to the transmitted information related to the number of OFDM symbols in the subframe for transmitting the first control information, and transmitting the second control information according to the transmitted information related to the number of OFDM symbols in the subframe for transmitting the second control information, wherein the number of OFDM symbols for transmitting the first control information is less than or equal to the number of OFDM symbols for transmitting the second control information.

Preferably, the first control information comprises an ACK/NACK signal and the second control information comprises a physical downlink control channel.

Preferably, the information related to the number of OFDM symbols in the subframe for transmitting the first control information is transmitted via a broadcast channel. Preferably, the information related to the number of OFDM symbols in the subframe for transmitting the second control information is transmitted via a physical control channel format indicator channel. Preferably, the number of OFDM symbols for transmitting the second control information is 1, 2 or 3.

It is to be understood that both the foregoing general description and the following detailed description of the present invention are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this specification, illustrate embodiments of the invention and together with the description serve to explain the principles of the invention. Features, elements, and aspects of the invention that are referenced by the same numerals in different figures represent the same, equivalent, or similar features, elements, or aspects in accordance with one or more embodiments.

FIG. 1 is a diagram relatively comparing a varying period of the number of OFDM symbols through which an ACK/NACK channel is transmitted (m) with a varying period of the number of OFDM symbols for control channel transmission (n) in accordance with one embodiment of the present invention.

4

FIG. 2 is a diagram illustrating one example of a method for allocating the transmission of OFDM symbols of a control channel and an ACK/NAK channel in an orthogonal frequency division multiplexing (OFDM) system in accordance with one embodiment of the present invention.

FIG. 3 is a flow chart illustrating one example of a method for transmitting information on the number of OFDM symbols for control channel transmission (n) and a control channel from a base station in accordance with one embodiment of the present invention.

FIG. 4 is a flow chart illustrating one example of a method for receiving information on the number of OFDM symbols for control channel transmission (n) and a control channel in a mobile terminal in accordance with one embodiment of the present invention.

FIG. 5 illustrates a block diagram of a mobile terminal in accordance with the present invention.

FIG. 6 is a diagram explaining an example of a method for receiving information of OFDM symbols of a downlink control channel in an orthogonal frequency division multiplexing (OFDM) system in accordance with one embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The present invention relates to receiving control information in OFDM system of a mobile communication system.

Hereinafter, the present invention will be described in more detail with reference to the accompanying drawings. The detailed description described below with reference to the accompanying drawings intends to explain exemplary embodiments rather than a sole embodiment where the present invention can be carried out. The detailed description described below includes specific details for assisting in a complete understanding of the present invention. However, those skilled in the art may appreciate that the present invention can be carried out without such specific details of the present invention. For example, although the detailed description described below is explained centering on certain terms, it is not necessarily limited to the terms but the same meanings can be represented thereby even in the case where it is explained by optional terms.

In some cases, the present invention may omit a publicly known structure or apparatus in order to avoid obscurity of the present invention, and the present invention may be presented via a block view and/or a flow chart centering on the core function of each structure and/or apparatus. Also, like reference numerals refer to like elements throughout the specification.

The below embodiments are the embodiments in which the constituents of the present invention and the properties are coupled to each other in a predetermined shape. Each constituent or property should be selectively considered so far as there are not any specific mentions thereof. Each constituent or property may be carried out in a shape that they are not coupled to another constituent or property. Also, the embodiments of the present invention may be configured by combining some constituents and/or properties. The order of the operations explained in the embodiments of the present invention may be changed. Some constitution or property of any embodiment may be included in another embodiment, or may be replaced by the constitution or property corresponding to another embodiment.

The embodiments of the present invention are explained centering on a data transmitting/receiving relationship

between a base station and a mobile terminal. Herein, the base station is a terminal node of a network directly performing a communication with the mobile terminal. The specific operation explained to be performed by the base station may be performed by an upper node of the base station according to circumstances. In other words, various operations performed for communication with the mobile terminal in a network configured of a plurality of network nodes including the base station may be performed by the base station or another network node other than the base station. The "base station" may be replaced by terms, such as fixed station, Node B, enode B, eNB, and access point, for example. Also, the "mobile terminal" may be replaced by terms, such as User Equipment (UE), Mobile Station (MS), and Mobile Subscriber Station (MSS), for example.

When transmitting packet data in a mobile communication system, a receiving side may notify a transmitting side whether or not the receiving side has received a packet successfully. For example, when packet reception is successful, the receiving side may transmit an ACK signal to inform the transmitting side of the successful reception, therefore allowing the transmitting side to transmit a new packet. When packet reception fails, the receiving side may transmit a NAK signal to the transmitting side to inform the transmitting side of the failed reception. Accordingly, the transmitting side may retransmit the packet to the receiving side.

The operation described above may be referred to as an automatic repeat request (ARQ) operation. An expansion of the ARQ operation may be referred to as a Hybrid ARQ (HARQ) operation, which is capable of raising the efficiency of an entire system. The HARQ operation lowers error probability by combining a retransmission packet with an original packet, and by being coupled with a channel coding scheme. In order to improve performance by applying the HARQ scheme, the HARQ prefers prompt ACK/NAK responses from a receiver as compared to the previous ARQ operation. Therefore, in the HARQ, the ACK/NAK signal may be transmitted in a physical channel signaling manner.

Preferably, downlink ACK/NAK signals, which are a response to data transmitted in the uplink, may be transmitted through "m" number of OFDM symbols of each subframe. Furthermore, it is preferable that the ACK/NAK signals be transmitted through a part of resource elements within the "m" number of OFDM symbols rather than the entire "m" number of OFDM symbols. Herein, for example, the "m" value is a value that may vary according to a degree of cell coverage. Hereinafter, a method for transmitting an ACK/NAK channel through which the ACK/NAK signals are transmitted, and a method for determining OFDM symbols for control channel transmission, will be described in more detail.

FIG. 1 is a diagram relatively comparing a varying period of the number of OFDM symbols through which ACK/NAK channels are transmitted (m) with a varying period of the number of OFDM symbols for control channel transmission (n) in accordance with one embodiment of the present invention. Hereinafter, the embodiments of the present invention will be described for a case where first n OFDM symbols among OFDM symbols in one subframe of a downlink transmission time interval (TTI) unit of an OFDM system (e.g., a 3GPP LTE OFDM radio communication system) are used for transmitting uplink/downlink scheduling signals and other control signals.

In accordance with the present invention, "n" represents the number of OFDM symbols used for control channel transmission. A maximum number of OFDM symbols for

control channel transmission is denoted by the value "N". The "n" value may vary per subframe according to the amount of uplink/downlink control signals and/or the amount of scheduling signals to be transmitted to the uplink. For example, if $N=3$, then n may be determined by a natural number less than or equal to 3 ($n \leq N$, where $N=3$).

As described above, because the "n" value may vary per subframe, the base station transmits a control channel format indicator (CCFI) indicating information associated with the "n" value through a physical control channel format indicator channel (PCFICH) to inform the mobile terminals of the "n" value in each subframe. For example, the CCFI may be transmitted through a first OFDM symbol of the subframe.

As described above, the "m" value, which is the number of OFDM symbols through which the ACK/NAK channel is transmitted, may also vary. However, the number of OFDM symbols through which the ACK/NAK is transmitted on the downlink may be controlled by cell coverage. Therefore, it is not necessary for the "m" to frequently change for each cell. Moreover, if the number of OFDM symbols through which the ACK/NAK is transmitted varies per subframe similar to the number of OFDM symbols for control channel transmission, it may be difficult to relate the uplink data transmission of each mobile terminal with the ACK/NAK channels through which the ACK/NAK signals of the data are transmitted.

Therefore, in accordance with the present invention, it is preferable that the number of OFDM symbols through which the ACK/NAK channel is transmitted (m) vary over a larger period than a period that the number of OFDM symbols for control channel transmission (n) varies independently from the number of ACK/NAK signals actually transmitted in an optional subframe. In other words, as shown in FIG. 1, it is preferable to set the number of OFDM symbols through which the ACK/NAK channel is transmitted (m) to be relatively semi-static as compared to the number of OFDM symbols for control channel transmission (n) that can be variously set per subframe.

Preferably, in order for the mobile terminals to receive the ACK/NAK signals, an allocation structure of the ACK/NAK channels should be known so that the base station may notify the mobile terminals of the "m" value through an upper layer RRC message or a broadcast channel with a slower period than the "n" value. Differently therefrom, the "n" value may be transmitted per subframe through the CCFI as described above.

FIG. 2 is a diagram illustrating one example of a method for allocating the transmission of OFDM symbols of a control channel and ACK/NAK channels in an orthogonal frequency division multiplexing (OFDM) system in accordance with one embodiment of the present invention.

In accordance with the present invention, a number of OFDM symbols through which the ACK/NAK channel is transmitted (m) is set as a minimum value within a varying range of the number of OFDM symbols for control channel transmission (n) that may vary per subframe. Preferably, the number "m" of OFDM symbols varies semi-statically. Accordingly, the number of OFDM symbols for control channel transmission (n) may be selected among values within a range from the number of OFDM symbols through which the ACK/NAK channel is transmitted (m) to the maximum number of OFDM symbols for control channel transmission (N). This relationship is represented by Equation (1).

$$m \leq n \leq N$$

In Equation (1), “m” represents the number of OFDM symbols through which the ACK/NAK channel is transmitted, “n” represents the number of OFDM symbols for control channel transmission, and “N” represents the maximum number of OFDM symbols for control channel transmission. Here, the ACK/NAK channel is allocated to first m OFDM symbols. Moreover, like the “N” value, a maximum number of OFDM symbols through which the ACK/NAK channel is transmitted (M) may be previously determined. Accordingly, the “m” value may be within a range from 0 to M. Preferably, the “M” value is less than or equal to the “N” value.

If the “n” value varies per subframe using the above-described method, and although the amount of time/frequency resources within the “n” number of OFDM symbols capable of being allocated to the ACK/NAK channel in one subframe also varies, the number of OFDM symbols for control channel transmission may be varied within a limited range per subframe while a structure of the ACK/NAK channel is semistatically fixed in accordance with one embodiment of the present invention. Examples of the varying range of the “n” value according to the “M” value will be described with reference to FIG. 2.

FIG. 2(a) is a diagram illustrating an example that the number of OFDM symbols through which the ACK/NAK channel is transmitted (m) is 1. In the example that m=1, the ACK/NAK channel is transmitted through predetermined resource elements within a first OFDM symbol of each subframe, and the “n” value may vary within a range from 1 to 3 per subframe.

FIG. 2(b) is a diagram illustrating an example that the number of OFDM symbols through which the ACK/NAK channel is transmitted (m) is 2. In the example that m=2, the ACK/NAK channel is transmitted through predetermined resource elements within first and second OFDM symbols of each subframe, and the “n” value may vary within a range from 2 to 3 per subframe.

FIG. 2(c) is a diagram illustrating an example that the number of OFDM symbols through which the ACK/NAK channel is transmitted (m) is 3. In the example that m=3, the ACK/NAK channel is transmitted through predetermined resource elements within first, second and third OFDM symbols of each subframe. In this particular case, the “n” value is fixed at 3.

Through the above described method, the number of OFDM symbols for control channel transmission may be varied within a limited range per subframe while a structure of the ACK/NAK channel is semi-statically fixed, wherein control signals are transmitted on the control channel. Also, if the ACK/NAK channel transmission is performed using the OFDM symbols for control channel transmission as above, downlink data transmitted through OFDM symbols other than the OFDM symbols for control channel transmission and ACK/NAK signals are multiplexed to be transmitted in each subframe. Accordingly, complication in setting data transmission power is prevented.

FIG. 3 is a flow chart illustrating one example of a method for transmitting information on the number of OFDM symbols for control channel transmission (n) and a control channel from a base station in accordance with one embodiment of the present invention.

Initially, a base station may determine the number of OFDM symbols for control channel transmission (n) within a range of minimizing the number of OFDM symbols through which the ACK/NAK channel is transmitted (m) by considering the number of OFDM symbols through which a predetermined ACK/NAK channel is transmitted (S10).

Here, the “n” value is preferably less than or equal to the maximum number of OFDM symbols for control channel transmission (N), as described above.

Thereafter, the base station may transmit, to at least one mobile terminal, information regarding the determined number of OFDM symbols for control channel transmission (n) (S11). Finally, the relevant control channel may be transmitted to the at least one mobile terminal (S12).

Particularly, when the ACK/NAK channel is allocated to be transmitted through the maximum number of OFDM symbols for control channel transmission (N) that can be used in transmitting scheduling signals (N=M and m=M), as explained with reference to FIG. 2(c), the “n” value cannot have a value other than n=N. Thus, the “n” value may not be broadcast through the CCFI per subframe. Accordingly, the time/frequency resources reserved for CCFI transmission may not be used for CCFI transmission, but may have other uses. Preferably, the time/frequency resources may be extensively used for control signal transmission including the scheduling signals or the ACK/NAK signals.

In the above descriptions, an “n” value and an “m” value do not always exist in a unit of 1 within $n \leq N$ and $m \leq N$, respectively. Rather, the values may be selected from a specific natural number set existing within $n \leq N$ and $m \leq N$. Herein, the specific natural number set may include 0.

FIG. 4 is a flow chart illustrating one example of a method for receiving information on the number of OFDM symbols for control channel transmission (n) and a control channel in a mobile terminal in accordance with one embodiment of the present invention.

In the present embodiment, the number of OFDM symbols through which the ACK/NAK channel is transmitted (m) is a value that can be semi-statically varied as described above. Preferably, a mobile terminal previously acquires information regarding the number of OFDM symbols through which the ACK/NAK channel is transmitted (m) through an upper layer RRC message or other broadcasting channel before receiving and decoding a corresponding subframe(s).

In accordance with the present invention, the mobile terminal receives CCFI, which is information regarding the number of OFDM symbols for control channel transmission (n), through PCFICH. Here, the number of OFDM symbols for control channel transmission (n) may be varied within a range of minimizing the number of OFDM symbols through which the ACK/NAK channel is transmitted (m) according to one embodiment of the present invention. Preferably, the mobile terminal decodes the received number of OFDM symbols for control channel transmission (n) by obtaining correlation values using expected “n” values that can be the number of OFDM symbols for control channel transmission, etc.

As stated above, the mobile terminal may assume the expected “n” values based on the “m” value previously informed to the mobile terminal according to the present embodiment. Thus, when decoding the “n” value, the mobile terminal may decode the CCFI assuming that the “n” value is within the range of $m \leq n \leq N$ so that the CCFI decoding outputs the “n” value within the range (S20).

After obtaining the “n” value by the above procedure, a mobile terminal may decode the second control channels assuming the control channels are transmitted through “n” OFDM symbols (S30).

In another aspect of the invention, the mobile terminal may decode the CCFI to obtain the “n” value without considering the expected range of $m \leq n \leq N$. Therefore, the mobile terminal may obtain the “n” value which is out of the

valid range of $m \leq n \leq N$. In this case, the mobile terminal may try to decode control channels for all possible "n" values, or for every possible "n" value within the range of $m \leq n \leq N$.

Otherwise, in another example, when the "n" value obtained deviates from the range $m \leq n \leq N$, then decoding CCFI is considered to have failed for the particular "n" value. If so, an operation corresponding thereto may be abandoned. For example, the mobile terminal may abandon receiving scheduling signals in the subframe if the "n" value does not satisfy $m \leq n \leq N$.

Particularly, as explained with reference to FIG. 2(c), when the already known "m" is equal to the maximum number of OFDM symbols for control channel transmission (N), such that $m=N$, then the base station does not transmit the CCFI, or the mobile terminal does not decode the CCFI even though the base station transmits the CCFI because the mobile terminal assumes that $n=N$. Therefore, the mobile terminal may operate assuming that the scheduling signals and other control signals are transmitted through the first N OFDM symbols.

Alternatively, if the already known "m" is equal to the maximum number of OFDM symbols for control channel transmission (N), such that $m=N$, and if the base station transmits the CCFI, the mobile terminal will decode the CCFI. However, the mobile terminal will assume that $n=N$ regardless of the decoding results. Accordingly, the mobile terminal may also operate assuming that the scheduling signals and other control signals are transmitted through the first N OFDM symbols.

FIG. 5 illustrates a block diagram of a mobile station (MS) or UE 1 in accordance with the present invention. The UE 1 includes a processor (or digital signal processor) 210, RF module 235, power management module 205, antenna 240, battery 255, display 215, keypad 220, memory 230, speaker 245 and microphone 250.

A user enters instructional information, such as a telephone number, for example, by pushing the buttons of a keypad 220 or by voice activation using the microphone 250. The microprocessor 210 receives and processes the instructional information to perform the appropriate function, such as to dial the telephone number. Operational data may be retrieved from the memory module 230 to perform the function. Furthermore, the processor 210 may display the instructional and operational information on the display 215 for the user's reference and convenience.

The processor 210 issues instructional information to the RF module 235, to initiate communication, for example, transmits radio signals comprising voice communication data. The RF module 235 comprises a receiver and a transmitter to receive and transmit radio signals. An antenna 240 facilitates the transmission and reception of radio signals. Upon receiving radio signals, the RF module 235 may forward and convert the signals to baseband frequency for processing by the processor 210. The processed signals would be transformed into audible or readable information outputted via the speaker 245, for example. The processor 210 also includes the protocols and functions necessary to perform the various processes described herein.

FIG. 6 is a diagram explaining an example of a method for receiving information of orthogonal frequency division multiplexing (OFDM) symbols of a downlink control channel in an OFDM system in accordance with one embodiment of the present invention. Referring to FIG. 6, a mobile terminal receives information about number m of first OFDM symbols which is used for transmission of a channel, wherein the channel carries a hybrid automatic repeat request (HARQ) ACK/NACK (S61). The mobile terminal receives informa-

tion about number n of second OFDM symbols which is used for transmission of the downlink control channel (S62). In this example, the number n is equal to or greater than the number m ($n \geq m$) and a transmission interval of the information about the number m is greater than a transmission interval of the information about the number n.

It is obvious that embodiments can be configured by combining the claims not having clear citation relations in the claims or new claims may be included in the claims by means of amendments after filing an application.

The embodiments according to the present invention can be implemented by various means, for example, hardware, firmware, software, or a combination thereof, etc. When implemented by the hardware, a method for receiving a control channel according to one embodiment of the present invention can be implemented by one or more application specific integrated circuits (ASICs), digital signal processors (DSPs), digital signal processing devices (DSPDs), programmable logic devices (PLDs), field programmable gate arrays (FPGAs), processors, controllers, micro controllers, micro processors, etc.

When implemented by the firmware or the software, a method for receiving a control channel according to one embodiment of the present invention can be implemented in the shapes of modules, processes, and functions, etc. performing the functions or the operations explained as above. Software codes are stored in a memory unit, making it possible to be driven by a processor. The memory unit is positioned inside or outside the processor, making it possible to exchange data with the processor by means of various means already publicly known.

Although a few embodiments of the present invention have been shown and described, it would be appreciated by those skilled in the art that changes might be made in this embodiment without departing from the principles and spirit of the invention, the scope of which is defined in the claims and their equivalents.

The foregoing embodiments and advantages are merely exemplary and are not to be construed as limiting the present invention. The present teaching can be readily applied to other types of apparatuses. The description of the present invention is intended to be illustrative, and not to limit the scope of the claims. Many alternatives, modifications, and variations will be apparent to those skilled in the art. In the claims, means-plus-function clauses are intended to cover the structure described herein as performing the recited function and not only structural equivalents but also equivalent structures.

What is claimed is:

[1. A method of transmitting downlink channels at a base station of an orthogonal frequency division multiplexing (OFDM) system, the method comprising:

transmitting first information indicating a size m of a first region through a broadcast channel, wherein the first region is defined by m OFDM symbol(s) starting from a beginning of a subframe and the first region is used for first channels that carry hybrid automatic repeat request (HARQ) ACK/NACKs;

transmitting second information indicating a size n of a second region through a physical control format indicator channel (PCFICH), wherein the second region is defined by n OFDM symbol(s) starting from the beginning of the subframe and the second region is used for second channels that carry downlink control information; and

11

transmitting the HARQ ACK/NACKs and the downlink control information through the first channels and second channels, respectively,

wherein first resources for the first channels are identified from the first information, and second resources for the second channels are identified from remaining resources excluding the first resources within the second region, and

wherein the second channels are physical downlink control channels (PDCCHs).]

[2. The method of claim 1, wherein the size n is configured to be equal to or greater than the size m such that $n \geq m$.]

[3. A method of receiving downlink channels at a mobile terminal of an orthogonal frequency division multiplexing (OFDM) system, the method comprising:

receiving first information indicating a size m of a first region through a broadcast channel, wherein the first region is defined by m OFDM symbol(s) starting from a beginning of a subframe and the first region is used for first channels that carry hybrid automatic repeat request (HARQ) ACK/NACKs;

receiving second information indicating a size n of a second region through a physical control format indicator channel (PCFICH), wherein the second region is defined by n OFDM symbol(s) starting from the beginning of the subframe and the second region is used for second channels that carry downlink control information; and

receiving the HARQ ACK/NACKs and the downlink control information through the first channels and second channels, respectively,

wherein first resources for the first channels are identified from the first information, and second resources for the second channels are identified from remaining resources excluding the first resources within the second region, and

wherein the second channels are physical downlink control channels (PDCCHs).]

[4. The method of claim 3, wherein the size n is configured to be equal to or greater than the size m such that $n \geq m$.]

[5. The method of claim 3, further comprising: performing operations in accordance with one of the second channels received through the second region that is designated to the mobile terminal.]

[6. A base station used in an orthogonal frequency division multiplexing (OFDM) system, the base station comprising:

a radio frequency unit; and
a processor,

wherein the processor is configured to:

transmit first information indicating a size m of a first region through a broadcast channel, wherein the first region is defined by m OFDM symbol(s) starting from beginning of a subframe and the first region is used for first channels that carry hybrid automatic repeat request (HARQ) ACK/NACKs;

transmit second information indicating a size n of a second region through a physical control format indicator channel (PCFICH), wherein the second region is defined by n OFDM symbol(s) starting from the beginning of the subframe and the second region is used for second channels that carry downlink control information; and

transmit the HARQ ACK/NACKs and the downlink control information through the first channels and second channels, respectively,

12

wherein first resources for the first channels are identified from the first information, and second resources for the second channels are identified from remaining resources excluding the first resources within the second region, and

wherein the second channels are physical downlink control channels (PDCCHs).]

[7. The base station of claim 6, wherein the size n is configured to be equal to or greater than the size m such that $n \geq m$.]

[8. A mobile terminal used in an orthogonal frequency division multiplexing (OFDM) system, the mobile terminal comprising:

a radio frequency unit; and

a processor,

wherein the processor is configured to: receive first information indicating a size m of a first region through a broadcast channel, wherein the first region is defined by m OFDM symbol(s) starting from a beginning of a subframe and the first region is used for first channels that carry hybrid automatic repeat request (HARQ) ACK/NACKs;

receive second information indicating a size n of a second region through a physical control format indicator channel (PCFICH), wherein the second region is defined by n OFDM symbol(s) starting from the beginning of the subframe and the second region is used for second channels that carry downlink control information; and

receive the HARQ ACK/NACKs and the downlink control information through the first channels and second channels, respectively,

wherein first resources for the first channels are identified from the first information, and second resources for the second channels are identified from remaining resources excluding the first resources within the second region, and

wherein the second channels are physical downlink control channels (PDCCHs).]

[9. The mobile terminal of claim 8, wherein the size n is configured to be equal to or greater than the size m such that $n \geq m$.]

[10. The mobile terminal of claim 8, wherein the processor is further configured to:

perform operations in accordance with one of the second channels received through the second region that is designated to the mobile terminal.]

11. A method of transmitting control information in a wireless communication system by a broadcasting manner, the method comprising:

transmitting first information related to control information by the broadcasting manner in a first number of Orthogonal Frequency Division Multiplexing (OFDM) symbols,

wherein the first number of OFDM symbols carrying the first information has a predetermined value; and transmitting second information related to control information in a second number of OFDM symbols, wherein a frame comprises a plurality of OFDM symbols including the second information following the first information,

wherein the second number of OFDM symbols carrying the second information is variable per the frame, wherein the second number of OFDM symbols carrying the second information is transmitted in the frame, wherein interval in which the first number of OFDM symbols carrying the first information changes is

13

greater than an interval in which the second number of OFDM symbols carrying the second information changes.

12. *The method of claim 11, wherein the first number of OFDM symbol for the first information is 1.*

13. *A method of receiving control information in a wireless communication system by a broadcasting manner, the method comprising:*

receiving first information related to control information by the broadcasting manner in a first number of Orthogonal Frequency Division Multiplexing (OFDM) symbol,

wherein the first number of OFDM symbols carrying the first information has a predetermined value; and

receiving second information related to control information in a second number of OFDM symbols, decoding the second number of OFDM symbols using the second information,

14

wherein a frame comprises a plurality of OFDM symbols including the second information following the first information,

wherein the second number of OFDM symbols carrying the second information is variable per the frame,

wherein the second number of OFDM symbols carrying the second information is transmitted in the frame,

wherein interval in which the first number of OFDM symbols carrying the first information changes is greater than an interval in which the second number of OFDM symbols carrying the second information changes.

14. *The method of claim 13, wherein the first number of OFDM symbol for the first information is 1.*

15. *The method of claim 13, the method includes: decoding the received first information and second information.*

* * * * *