

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
4 May 2006 (04.05.2006)

PCT

(10) International Publication Number
WO 2006/045487 A1

(51) International Patent Classification:
G03G 15/01 (2006.01)

(74) Agent: LAUERWALD, Jörg; c/o NexPress GmbH, Am
Kiel-Kanal 2, 24106 Kiel (DE).

(21) International Application Number:
PCT/EP2005/011186

(22) International Filing Date: 18 October 2005 (18.10.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10 2004 051 293.0 20 October 2004 (20.10.2004) DE
10 2005 027 352.1 13 June 2005 (13.06.2005) DE

(71) Applicant (for all designated States except US): EAST-
MAN KODAK COMPANY [US/US]; 343 State Street,
Rochester, NY 14650 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): BONESS, Jan, Dirk
[DE/DE]; Holsatenallee 38 B, 24576 Bad Bramstedt (DE).
DREHER, Ingo [DE/DE]; Muhliusstrasse 68, 24103 Kiel
(DE). SCHRADER, Stefan [DE/DE]; Seeblick 17, 24106
Kiel (DE). HUNOLD, Heiko [DE/DE]; Saalskamp 16,
24582 Wattenbek (DE). PETER, Karlheinz [DE/DE];
Capt.-Thiessen-Weg 2, 24113 Molfsee (DE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY,
MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO,
NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK,
SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT,
RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: METHOD AND DEVICE FOR CONTROLLING THE CIRCUMFERENTIAL REGISTER

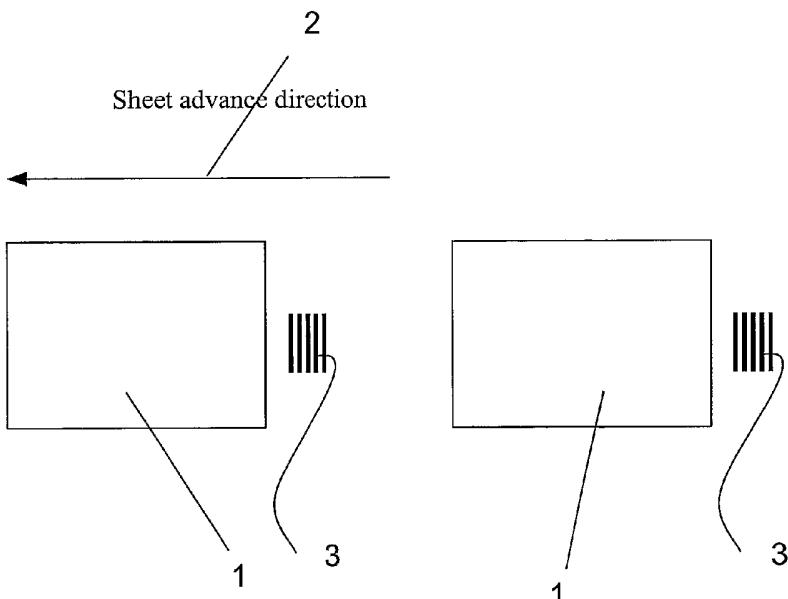

WO 2006/045487 A1

(57) Abstract: The invention relates to a method and a device for controlling the circumferential register in a digital multi-color printing machine for printing sheets during a printing process, whereby, for each sheet, at least one register mark per color printing unit of the multi-color printing machine is produced, assigned to said sheet and defined with respect to its position, and whereby, based on the determination of the position of the register marks of a sheet, the circumferential register of at least one sheet, which follows the sheet associated with said determined register marks downstream of the printing process, is controlled. In duplex printing a sheet by recto and verso printing with the invention, register marks are applied for each side and, in order to control recto and verso printing of at least one subsequent sheet, said register marks are analyzed.



- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Method and Device for Controlling the Circumferential Register

The invention relates to a method of controlling a circumferential register in a digital multi-color printing machine for printing sheets during a printing process, in particular in an electrophotographically operating printing machine, whereby, for each sheet, at least one register mark per color printing unit of the multi-color printing machine is produced, assigned to said sheet and defined with respect to its position, preferably relative to one of the color marks itself, said color marks being applied preferably to a support for said sheets and preferably downstream of the respectively associated sheet, and, based on the determination of the position of the register marks of a sheet, the circumferential register of at least one sheet being controlled, said sheet following the sheet associated with said determined register marks downstream of the printing process.

Furthermore, the invention relates to a device for controlling the circumferential register in a digital multi-color printing machine for printing sheets during a printing process, in particular in an electrophotographically operating printing machine, whereby, for each sheet, at least one register mark per color printing unit of the multi-color printing machine is produced, assigned to said sheet and defined with respect to its position, preferably relative to one of the color marks itself, said color marks being applied preferably to a support for said sheets and preferably downstream of the respectively associated sheet, and, based on the determination of the position of the register marks of a sheet, the circumferential register of at least one sheet being controlled, said sheet following the sheet associated with said determined register marks downstream of the printing process, said device comprising at least one monitoring and control arrangement for detecting register marks, for determining at least relatively the positions of said register marks and for controlling the color printing units based on the aforementioned register mark positions, preferably for carrying out the aforementioned method.

Conventionally, for the purpose of accurately registered printing, a series of control and pilot algorithms were developed which correct the influence of different interfering factors. Almost all of these methods are based on the principle that register marks are printed on a transport belt and read by a registration sensor. Data yielded in this manner are either used directly following completed low-pass filtering (as a so-called delay drift control) or are processed further, in particular, in special calibrating/printing sequences, in order to compute specific corrective parameters. EP-A-1 156 384 A2 (paragraph 28ff) describes a method of the aforementioned type.

The characteristics of a delay drift control are the following: During the printing operation, a register mark is printed on the transport belt between respectively two printing material sheets, in which case each register mark preferably consists of a line. (At least one register mark per active printing module or printing unit is printed.) These marks are measured by the registration sensor downstream of the last printing unit, and, the measured values are used to determine the circumferential register of the sheet that directly preceded the register marks of an array. Consequently, deviations from the optimal circumferential register are determined, and the circumferential register error of subsequently following sheets is corrected accordingly relative to zero. This may be applicable at the earliest to the sheet which is detected as the next sheet, for example, by a lead edge sensor.

However, it is optionally possible that a considerable path length exists in the printing machine between the aforementioned registration sensor and the aforementioned lead edge sensor. The result of this is that, directly following the measurement of a specific register mark, e.g., another six A3-size sheets having values computed in accordance with preceding measurements are printed (or are located, already partially printed, on the transport belt between the individual printing modules). Consequently, the dead time of the delay drift controller is, e.g., six A3-size sheets.

This is disadvantageous in particular when the circumferential register does not change substantially less rapidly than corresponds to the dead time of the controller.

Using the known delay drift controller, the register error may possibly have a rectangular form during a print job. It is obvious that, in this case, the circumferential register during a print job is anything but optimal.

Therefore, the object of the invention is to provide a method and a device of the aforementioned type, whereby said method and said device allow the improvement of register control.

Considering the method, this object is achieved in that, in duplex printing a sheet by recto and verso printing, register marks are applied for each side, that said register marks are assigned to the respective side of the sheet and determined with respect to their position, that, in order to control recto printing of at least one subsequent sheet, the positions of register marks assigned to the recto printing side of a previous sheet are analyzed, and that, in order to control verso printing of at least one subsequent sheet, the positions of register marks assigned to the verso printing side of a previous sheet are analyzed.

In accordance with the invention it has been recognized and taken into consideration that the circumferential register is disrupted synchronously to the recto and verso printing sides of a print job. This effect is particularly frequent and pronounced if, e.g., there is a significant difference in quality between the recto and verso printing sides or if the printed image content, and hence the toner application, is significantly different on both sides, e.g., considering a large picture with strong colors on the recto printing side and only a small amount of text on the verso printing side, because also the quantity of toner on the sheet changes the circumferential register. In accordance with the invention, such errors are systematically advantageously prevented or eliminated.

As a result, a single controller no longer needs to adjust to a periodically changing situation, but circumferential register errors of recto and verso printing sides can be controlled individually. If certain sheets are only to be recto-printed in the printing machine, the measured values are fed to both partial controllers (front and reverse

side controllers), and the circumferential register is corrected based on the front-side controller's output.

In fact, physically separate monitoring and controlling arrangements may be provided for the analysis of register marks of the recto printing sides and on the verso printing sides, whereby said register marks are then preferably configured identically; however, one and the same monitoring and control arrangement could be used for both analyses. Specifically, a monitoring and control arrangement can be virtually doubled by software technology for the respectively separate monitoring and control of a recto print and a verso print.

Another modification of the inventive method provides that, in a normal situation, control is effected substantially in a type of control loop, in which a currently determined control step (i) is added to a previously determined control step (i-1), in which case the current control step (i) being an addend is weighted with a percentage weighting coefficient which corresponds to a filter coefficient (a_0), and the previously determined control step (i-1) being an addend is weighted with a percentage weighting coefficient which is equal to the difference between 100 percent and the weighting factor of the current control step (i).

In so doing, it is preferred that the filter coefficient (a_0) is computed with an exponential function based on $1 - e^x$, where the exponent x represents the negative quotient of the time (Δt) elapsed between the current control step (i) and the previous control step (i-1), and a pre-specified time constant (τ).

A determined systematic drift can be introduced in a control step. In so doing, for example, the register or alignment error may additionally include a statistical distribution, whereas the systematic drift, for example, could have an approximately linear course. (Also, another functional course would be conceivable, detectable and correctable, for example, have an approximately square course.

Another modification of the inventive method provides that, in special cases, a so-called hard control is carried out, in which the current control step (i) is given greater

weighting importance than would be the case in a normal control situation. Such a special case may exist, for example, when, at the start of a printing process, the current control step (i) is initially determined based on a previous calibration of the printing machine in order to be able to start with a reasonable starting parameter, i.e., before a more current value could be determined during the printing process itself, and when the control during the continued process is then adapted by a hard control – taking into consideration the greater weighting – to one of the first current control steps determined during the printing process in order to make allowances for the current printing conditions more quickly during the current printing process.

This may include that, for the hard control, the weighting factor a_0 itself is increased by an (artificially assumed) increase of the elapsed time (Δt) between the two control steps (i) and (i-1).

Also, independent protection is claimed for a device for controlling a circumferential register in a digital multi-color printing machine for printing sheets during a printing process, in particular in an electrophotographically operating printing machine, whereby, for each sheet, at least one register mark per color printing unit of the multi-color printing machine is produced, assigned to said sheet and defined with respect to its position, preferably relative to one of the color marks itself, said color marks being applied preferably to a support for said sheets and preferably downstream of the respectively associated sheet, and, based on the determination of the position of the register marks of a sheet, the circumferential register of at least one sheet being controlled, said sheet following the sheet associated with said determined register marks downstream of the printing process, said device comprising at least one monitoring and control arrangement for detecting register marks, for determining at least relatively the positions of said register marks and for controlling the color printing units based on the aforementioned register mark positions, said device being used preferably for carrying out the inventive method which, in accordance with the achieved object, is characterized in that, for recto-printing and verso-printing both sides of sheets, the monitoring and control arrangement is set up in such a manner that, during the detection of register marks, during the at least relative determination of the positions of these register marks and during the control of the color printing

units, a distinction or differentiation based on the register mark positions can be made in order to assign the respective register mark to a recto printing side or a verso printing side of a sheet, so that, in order to control the color printing units based on the register mark positions for recto printing, only the positions of register marks assigned to a recto printing side and, for verso printing, only the positions of register marks assigned to a verso printing side can be used and taken into consideration.

The advantages resulting therefrom have already been basically described in conjunction with the inventive method.

As already mentioned above, at least two control devices for detecting register marks of verso printing sides and of recto printing sides and for at least relatively determining the positions of these register marks can be provided.

It is also possible to provide at least two complete monitoring and control arrangements for the respective printing of recto printing sides and for printing verso printing sides, although, of course, the devices as such need not be substantially different from each other, so that, optionally, also a single monitoring and control arrangement could be used for both tasks. This arrangement can be virtually doubled by software for the respectively separate monitoring and control of a recto print and a verso print.

An example of embodiment of the invention, which could result in additional inventive features but does not restrict the scope of the invention, is illustrated schematically in the drawings which show in:

Fig. 1 a plan view of sheets on a transport belt;

Fig. 2 a side elevation of printing units of an electrophotographically operating printing machine, above a transport belt for sheets;

Fig. 3 a type of flow diagram of an inventive monitoring and control arrangement; and,

Fig. 4 a type of block circuit diagram of an inventive monitoring and control arrangement.

Fig. 1 shows a plan view of sheets 1 which are transported on a transport belt (not illustrated in detail) in the direction of an arrow 2. Respectively after each sheet 1 is an array of line-shaped register marks 3 applied to the transport belt. In the present case, for example, respectively five register marks can be seen. For example (viewed against transport direction 2), initially a type of guide mark could be applied, relative to which the position of the other register marks can be determined. This register mark could preferably be applied in black, i.e., be produced by a printing unit using the "Key" color. Then follow, against transport direction 2, i.e., in the sequence of application, again one register mark, in the present case, e.g., "Key", "Yellow", "Magenta" and "Cyan" for each available printing unit of a multi-color printing machine. Should additional printing units be used, for example with custom colors, these printing units would also have to produce additional register marks. As an aside, it should be mentioned that this is referred to as an "application" of register marks. Basically, this could also be referred to as "printing"; however, in an electrophotographically operating printing machine, register marks are usually applied to the transport belt only as toner, which is not fused in order to be able to better remove it again from the transport belt at a later time. However, it could be a matter of discussion whether electrophotographic printing includes fusing or not. In this context, the concepts "printing", "applying" and "creating" in conjunction with register marks are to be understood as being synonymous, should there be any doubt. Specifically meant is the generation of a recognizable and measurable register mark.

Fig. 2 shows a side elevation of a part of an electrophotographically working printing machine, again depicted schematically.

Shown is a transport belt (web) 4 in accordance with Fig. 1, which is moved in the direction of arrow 2. Above this transport belt 4, on which sheets 1 can be transported, are four printing units or printing modules 5. These printing units 5 are labeled with the printing inks used by them, in this case abbreviated as follows: "K(ey)", "Y(yellow)", "M(magenta)" and "C(cyan)".

Each of these printing units 5 comprises essentially one write head 6, a toning station 6, an imaging cylinder 8, and a blanket cylinder 9. Write head 6 is used to apply the image to imaging cylinder 8, for example, by means of laser diodes, in order to create a latent printing image on imaging cylinder 8, said image being developed later with toner from toning station 7. Via a nip 10 (Nip1), this printing image is transferred to blanket cylinder 9 which transfers this printing image in a nip 11 (Nip2) to a sheet which is transported on the transport belt. The arrival of such a sheet is announced by a lead edge sensor 12, which, for example configured as a light barrier, recognizes the leading edge of the sheet. For transport, transport belt 4 is driven by drive rollers 13.

As already mentioned, printing units 5 also apply arrays of register marks 3 to transport belt 4, respectively after each sheet 1. These register marks are then detected by a registration sensor 14 (register mark sensor) and can thus be analyzed in accordance with the invention. The analysis of the register marks permits an inventive control of the subsequent printing of sheets in the same printing process. The control on the basis of a register mark that has just been detected by registration sensor 14, however, can be used at the earliest for a sheet which arrives as the next sheet at the lead edge sensor 13, because said sheet still has all the other printing units 5 ahead of it. However, because transport belt 4 is utilized better, additional sheets are already between the two sensors 13 and 14, which can no longer profit from this control, for example, six sheets in the DIN A3 format.

In accordance with the invention, the circumferential register, i.e., the color register, i.e., the correct relative positions of the color separations or partial color images created by printing units 5, is monitored. To achieve this in an offset printing machine, the register marks are used to correctly position the printing units relative to each other by mechanical means. In a digital printing machine, in particular an electro-photographically operating printing machine like the printing machine shown in Fig. 2, the analysis of the register marks can be used more elegantly for time-corrected printing in that imaging performed by print head 6 is appropriately timed with the arrival of new information from registration sensor 14, and thus with the position of the next sheet arriving at lead edge sensor 13, and with said sheet's continued transport

speed and the time of arrival in nip 11 computed therefrom. In so doing, it may be taken into consideration that a large part of potentially occurring register errors has already been detected by calibration runs before an actual print job, and that said errors can be and are corrected by an appropriate preliminary calibration of the printing machine.

Fig. 3 shows a type of flow diagram of an inventive monitoring and control arrangement for control as has been described briefly above.

The monitoring and control arrangement comprises, in particular, two registration sensors (14) (real) or one registration sensor 14 which performs two functions and has been quasi-virtually doubled. This registration sensor 14 detects arrays of register marks 3, which, for simplicity's sake, are indicated only as fat bars in Fig. 3. The thusly yielded registration data are forwarded by registration sensor 14 to a query means 15, which queries if data come from register marks assigned to a front surface or recto printing side of a sheet (yes) or not (no), i.e., instead of being assigned to a reverse or verso printing side. If the response is yes, the data are analyzed by a front surface controller 16; if the response is no, the data are analyzed by a back surface controller 17. Based on this, control data are released, i.e., on one hand, back to registration sensor 14' and, in particular, also to printing units 5. Also, dual controllers 16, 17 may be available, namely physically or virtually.

Fig. 4 shows a type of block circuit diagram of a monitoring and control arrangement.

As already mentioned farther above, control of the circumferential registration in a digital printing machine is achieved by timed control of the image application to imaging cylinder 8 by means of write head 6. An imagined frame is pre-specified for the imaging region on imaging cylinder 8. The time of the (chronological) beginning or start of this frame (Start of Frame – SOF) is controlled. Therefore, an error of circumferential registration can also be viewed as an SOF error, and this error should (by quasi definition) be equal to zero (NOMINAL value). This request (Desired SOF error: = 0) is used at point 18 on entry into the monitoring and control arrangement in Fig. 4. In the illustrated control loop, a proportionality link 19 is labeled "P" only for the

sake of completeness, which said link, in the present case, only multiplies an observed value 21 as control deviation – after it has been inverted at 28 – with a proportionality factor “1”, i.e., remains unchanged, so that the observed value 21 becomes setting value 27, as indicated. How this observed value 21 or setting value 27 is determined or yielded will be described in detail hereinafter.

In a model of the viewed or observed system (system model) 23, it is assumed, using a controlled system as basis, that within the already described “dead time”, during which a sheet moves from lead edge sensor 13 to registration sensor 14 and is processed by printing units 5, the circumferential register assigned to this sheet is subject to a drift and to statistical noise, in which case said drift is to be quasi counter-controlled by reverse “presentation” for correction. For example, a substantially linear systematic drift (system drift) is assumed, which said drift is superimposed by said noise and over time leads to position changes of the register marks, as illustrated in region 20. This is the ACTUAL value which is generated in the system and which is present at point 29. If the drift is corrected out, as shown in region 22, only the statistical noise around the requested NOMINAL zero value (SOF value) remains, whereby said noise cannot be further removed by correction.

In order to achieve the desired control, the system is reproduced on the side of an “observer” via the control loop. On the observer 24 side of the observed system, the drift of the system is observed and taken into account in point 25 via the ACTUAL value obtained in point 29. In order to synchronize the observer with the system, the dead time already mentioned in conjunction with system model 23 must be taken into consideration.

The ACTUAL value obtained at point 25 from the system, as shown in region 20, is input – in order to smooth said value and eliminate the noise – as filter input data (FilterIn) in a filter 26 labeled “PT₁”, said filter being essentially configured or acting as a low-pass filter. This is achieved by means of the following FilterIn algorithm :

$$(1) \quad \begin{aligned} \text{FilterIn (i)} &= \text{DriftCorrection (i - d)} - \text{RegError (i)} \\ &= \text{DriftCorrection (i - d)} - \{\text{RegData (i)} - \text{DesiredValue}\} \end{aligned}$$

with the current control step i and dead time d . The parameters of said algorithm are largely self-explanatory, i.e., "FilterIn" represents the input value for filter 26, "Drift-Correction" represents the drift to be corrected in view of the dead time, "RegError" represents the registration error to be corrected, "RegData" represents the registered register mark data (ACTUAL values), and "DesiredValue" represents the desired register mark data (SET values). In so doing, the determination of the difference $(i - d)$ takes into consideration that correction starts in the region of lead edge sensor 13, i.e., registered by dead time d earlier than the registration of register mark data in the region of registration sensor 14 (at "time" i). This determination of the difference can also be understood as the determination of the average over this period of time.

The FilterOut then results due to filter 26 in terms of:

$$(2) \quad \text{FilterOut}(i) = a_0 \cdot \text{FilterIn}(i) + (1 - a_0) \cdot \text{FilterOut}(i - 1)$$

with the current control step i and the previous control step $(i - 1)$.

a_0 is a filter coefficient expressed in terms of:

$$(3) \quad a_0 = 1 - \exp\left(-\frac{\Delta t}{\tau}\right)$$

where Δt is the time between the current and the previous control steps $t(i) - t(i - 1)$, and τ is a time constant of filter 26. Considering an artificial prespecified value, in particular an increase of Δt , the value of the filter coefficient or the weighting factor a_0 can be varied and, thus, also portions of the two addends in equation (2) can be prespecified. This determines the degree of the "hardness" or "softness" that is being considered in view of current or previous data during control. In particular at the start of a printing process, initially a harder control should be preferable.

Finally, in equation (2), the FilterOut value, which is represented as the observed value (Observed Drift) and is shown in region 21, and the smoothed drift which has

been freed of noise, as described above, are taken into consideration for the next control at point 28 in terms of:

$$(4) \quad \text{DriftCorrection}(i) = \text{FilterOut}(i)$$

Patent Claims

1. Method of controlling a circumferential register in a digital multi-color printing machine for printing sheets during a printing process, in particular in an electro-photographically operating printing machine, whereby, for each sheet, at least one register mark per color printing unit of the multi-color printing machine is produced, assigned to said sheet and defined with respect to its position, preferably relative to one of the color marks itself, said color marks being applied preferably to a support for said sheets and preferably downstream of the respectively associated sheet, and, based on the determination of the position of the register marks of a sheet, the circumferential register of at least one sheet being controlled, said sheet following the sheet associated with said determined register marks downstream of the printing process,
characterized in that,
in duplex printing a sheet by recto and verso printing, register marks are applied for each side, that said register marks are assigned to the respective side of the sheet and determined with respect to their position, that, in order to control recto printing of at least one subsequent sheet, the positions of register marks assigned to the recto printing side of a previous sheet are analyzed, and that, in order to control verso printing of at least one subsequent sheet, the positions of register marks assigned to the verso printing side of a previous sheet are analyzed.
2. Method as in Claim 1, **characterized in that** one monitoring and control arrangement can be virtually doubled by software for the respectively separate monitoring and control of a recto print and a verso print.
3. Method as in Claim 1 or 2, **characterized in that**, in a normal situation, control is effected substantially in a type of control loop, in which a currently determined

control step (i) is added to a previously determined control step (i-1), said current control step (i) being an addend weighted with a percentage weighting coefficient which corresponds to a filter coefficient (a_0), and the previously determined control step (i-1) being an addend weighted with a percentage weighting coefficient which is equal to the difference between 100 percent and the weighting factor of the current control step (i).

4. Method as in Claim 3, characterized in that the filter coefficient (a_0) is computed with an exponential function based on $1 - e^x$, where the exponent x represents the negative quotient of the time (Δt) elapsed between the current control step (i) and the previous control step (i-1), and a pre-specified time constant (τ).
5. Method as in one of the Claims 2 through 4, characterized in that the determined systematic drift is introduced in a control step.
6. Method as in one of the Claims 3 through 5, characterized in that, in special cases, a so-called hard control is performed, in which the current control step (i) is given greater weighting importance than would be the case in a normal control situation.
7. Method as in Claim 4 and 6, characterized in that, for the hard control, the weighting factor a_0 itself is increased by an increase of the elapsed time (Δt) between the current control step (i) and the previous control step (i-1).
8. Method as in Claim 6 or 7, characterized in that, at the start of a printing process, the current control step (i) is determined based on a previous calibration of the printing machine, and that the control during the continued process is then adapted by a hard control, taking into consideration the greater weighting, to one of the first current control steps determined during the printing process.
9. Device for controlling the circumferential register in a digital multi-color printing machine for printing sheets during a printing process, in particular in an electro-photographically operating printing machine, whereby, for each sheet, at least

one register mark per color printing unit of the multi-color printing machine is produced, assigned to said sheet and defined with respect to its position, preferably relative to one of the color marks itself, said color marks being applied preferably to a support for said sheets and preferably downstream of the respectively associated sheet, and, based on the determination of the position of the register marks of a sheet, the circumferential register of at least one sheet being controlled, said sheet following the sheet associated with said determined register marks downstream of the printing process, said device comprising at least one monitoring and control arrangement for detecting register marks, for determining at least relatively the positions of said register marks and for controlling the color printing units based on the aforementioned register mark positions, preferably for carrying out the aforementioned method in accordance with one or more of the previous Claims,

characterized in that,

for recto-printing and verso-printing both sides of sheets, the monitoring and control arrangement is set up in such a manner that, during the detection of register marks, during the at least relative determination of the positions of these register marks and during the control of the color printing units, a distinction or differentiation based on the register mark positions can be made in order to assign the respective register mark to a recto printing side or a verso printing side of a sheet, so that, in order to control the color printing units based on the register mark positions for recto printing, only the positions of register marks assigned to a recto printing side and, for verso printing, only the positions of register marks assigned to a verso printing side can be used and taken into consideration.

10. Device as in Claim 9, **characterized in that** at least two control devices for detecting register marks of verso printing sides and of recto printing sides and for at least relatively determining the positions of these register marks are provided.

11. Device as in Claim 10, characterized in that at least two complete monitoring and control arrangements for the respective printing of recto printing sides and for printing verso printing sides are provided.
12. Device as in Claim 11, characterized in that the monitoring and control arrangement is virtually doubled by software technology for the respectively separate monitoring and control of a recto print and a verso print.

Fig. 1

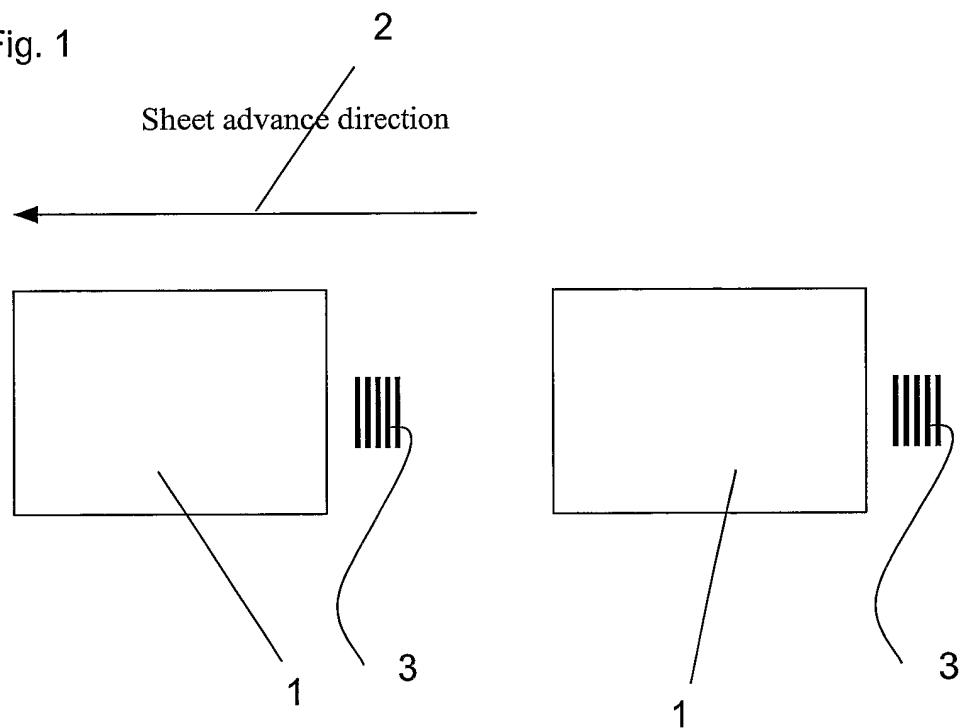


Fig. 2



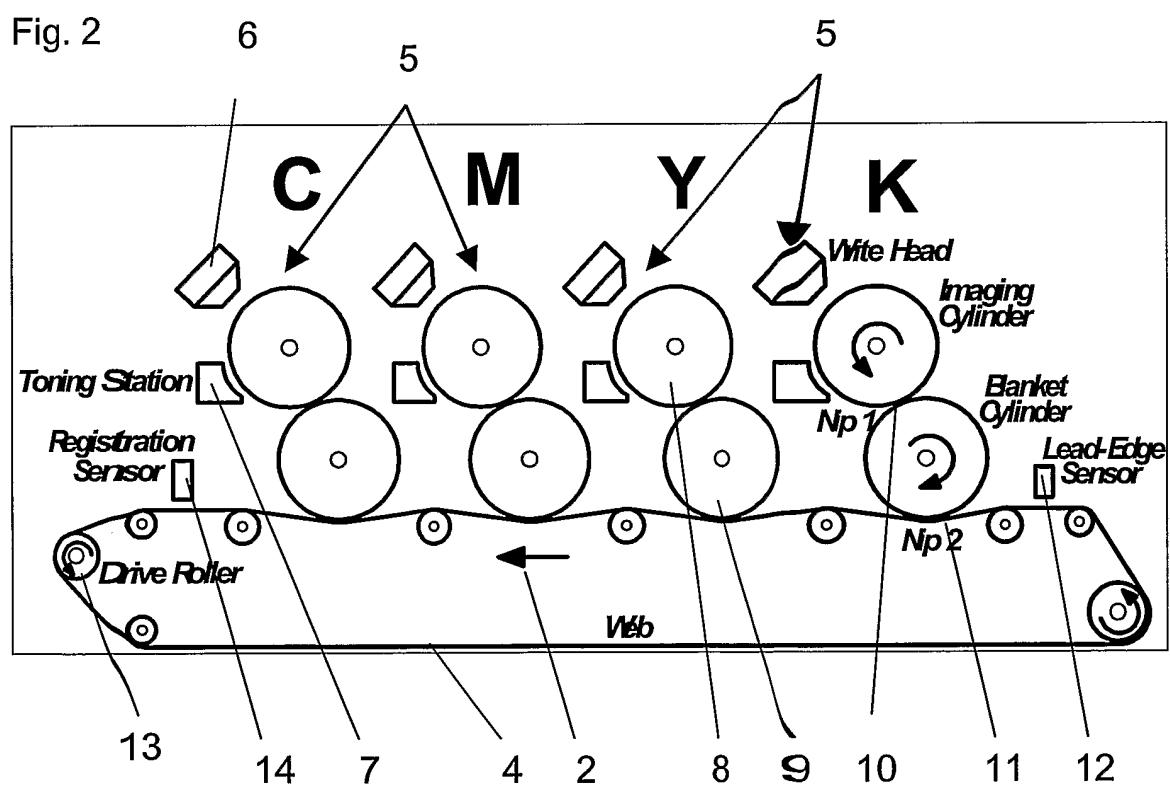


Fig. 3

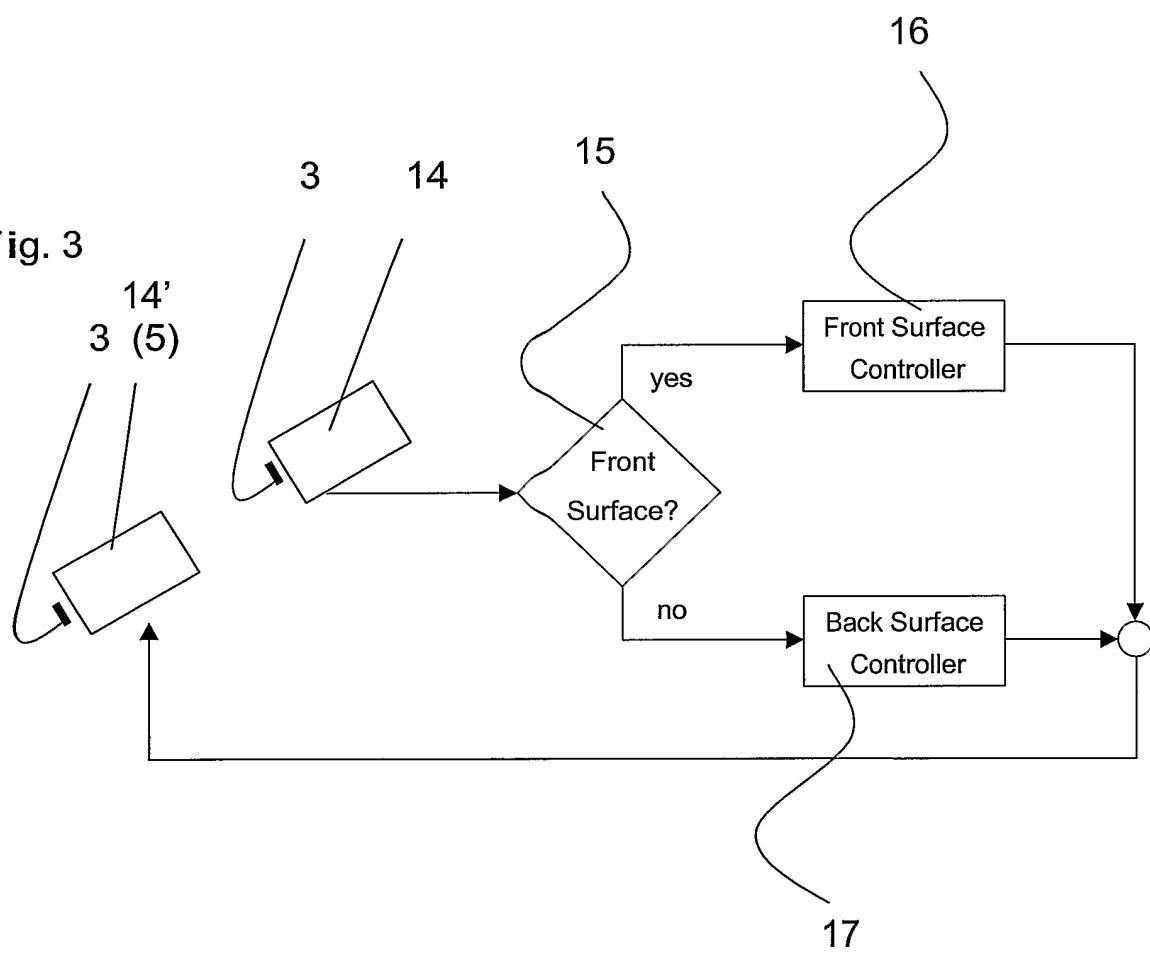

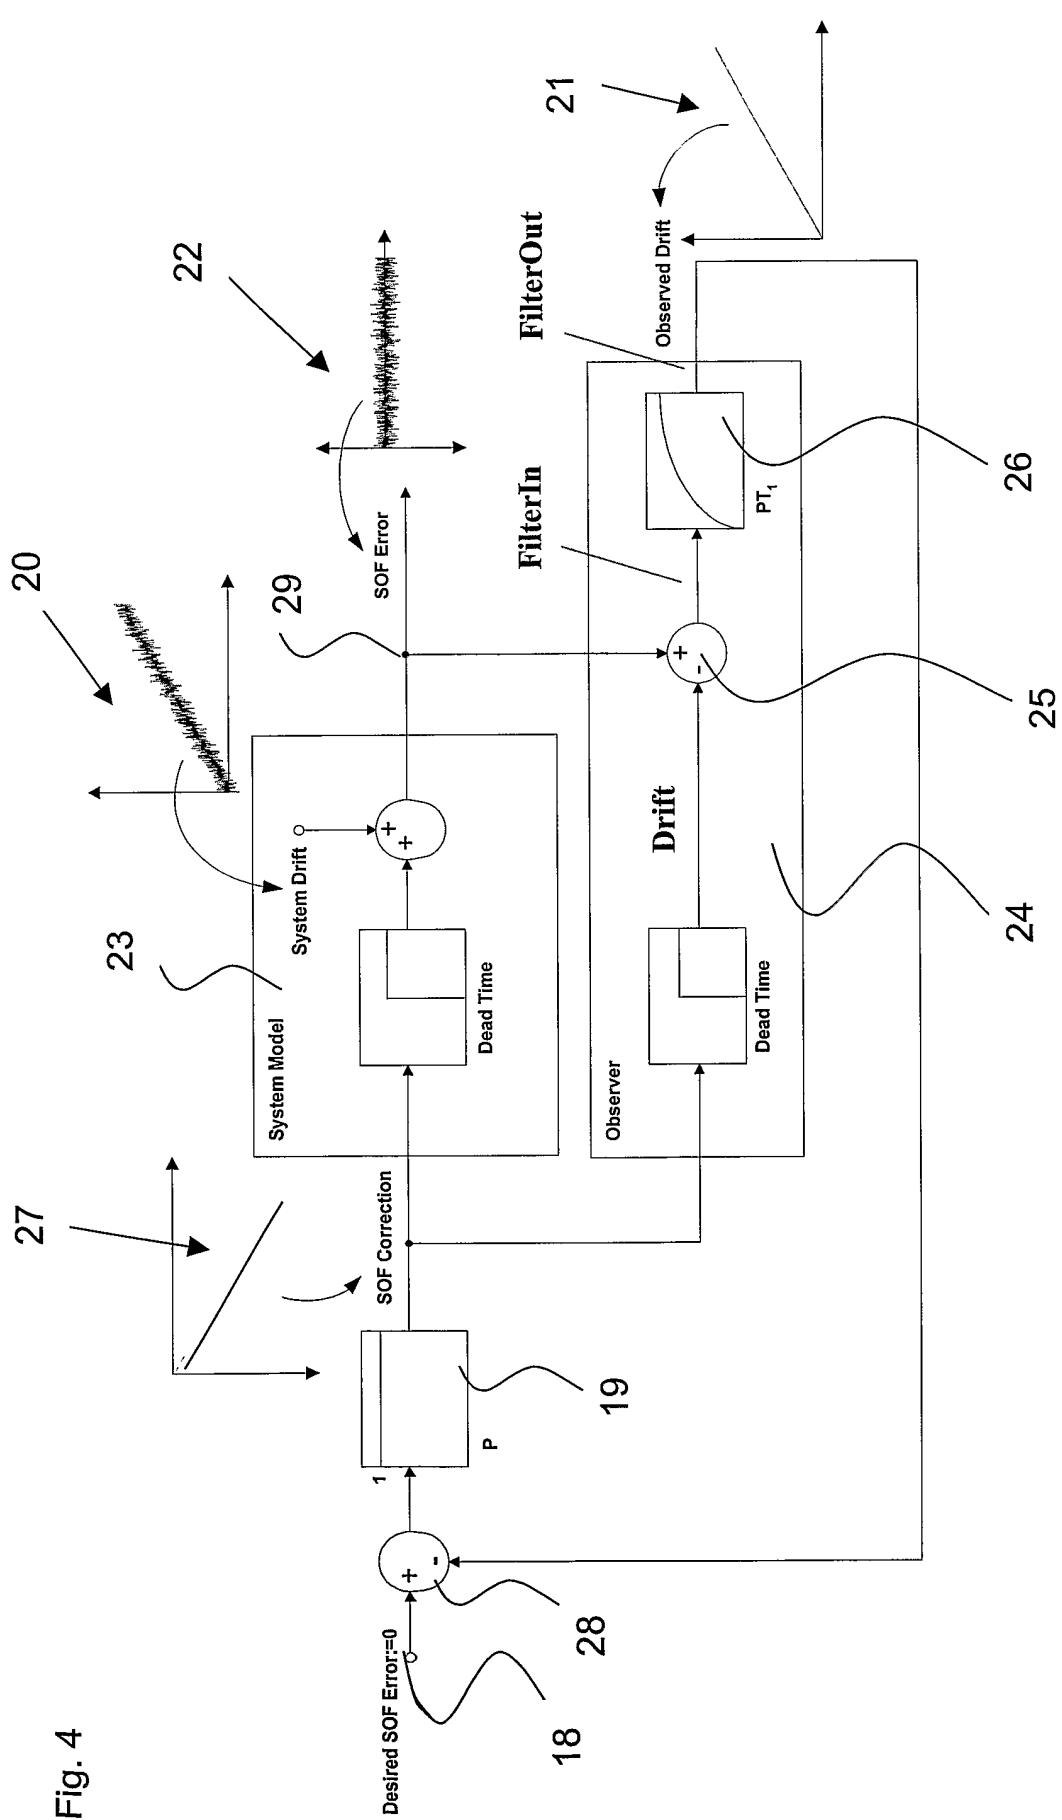

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2005/011186

A. CLASSIFICATION OF SUBJECT MATTER
G03G15/01

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
G03G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2002/001491 A1 (BUCH DONALD ET AL) 3 January 2002 (2002-01-03) paragraphs '0007!, '0008!, '0025!, '0027!, '0028!, '0040!, '0042!; figure 2 ----- US 2004/190920 A1 (ENGELN CHRISTIAN FRIEDRICH ET AL) 30 September 2004 (2004-09-30) paragraphs '0002!, '0003!, '0005!, '0013!, '0015!, '0016!; figures 1,2 -----	1-12
Y	EP 0 478 005 A (CANON KABUSHIKI KAISHA) 1 April 1992 (1992-04-01) column 8, line 40 - column 9, line 2 column 19, line 17 - line 27; figures 1,4 -----	1-12
A	----- -/-	1-12

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

16 February 2006

Date of mailing of the international search report

28/02/2006

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Van Ouytsel, K

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2005/011186

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 1 156 384 A (EASTMAN KODAK COMPANY) 21 November 2001 (2001-11-21) cited in the application paragraphs '0022!, '0023!, '0028!, '0032!; figure 1 -----	1,9
A	EP 0 848 300 A (AGFA-GEVAERT N.V; XEIKON NV) 17 June 1998 (1998-06-17) column 9, line 44 – column 10, line 35 -----	1,9
A	US 5 828 937 A (AERENS ET AL) 27 October 1998 (1998-10-27) column 2, lines 37-67 -----	1,9
P, X	DE 10 2004 007367 A1 (NEXPRESS SOLUTIONS LLC, ROCHESTER) 15 September 2005 (2005-09-15) paragraph '10.11!; figure 1 -----	1,9

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2005/011186

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
US 2002001491	A1	03-01-2002	NONE			
US 2004190920	A1	30-09-2004	DE	10306442 A1		02-09-2004
EP 0478005	A	01-04-1992	NONE			
EP 1156384	A	21-11-2001	JP	2002049203 A		15-02-2002
EP 0848300	A	17-06-1998	DE	69623024 D1		19-09-2002
			JP	10171173 A		26-06-1998
			US	5999785 A		07-12-1999
US 5828937	A	27-10-1998	NONE			
DE 102004007367 A1		15-09-2005	WO	2005077658 A1		25-08-2005