



- (51) **International Patent Classification:**
G11B 7/085 (2006.01) G11B 7/005 (2006.01)
- (21) **International Application Number:**
PCT/US2014/057594
- (22) **International Filing Date:**
26 September 2014 (26.09.2014)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
14/090,240 26 November 2013 (26.11.2013) US
- (71) **Applicant: ORACLE INTERNATIONAL CORPORATION** [US/US]; 500 Oracle Parkway, Redwood Shores, California 94065 (US).
- (72) **Inventor: MAHNAD, Faramarz;** 48 Summit Ave, #2, Brookline, Massachusetts 02446 (US).
- (74) **Agents: PROSCIA, James W. et al.;** Brooks Kushman P.C., 1000 Town Center, Twenty-Second Floor, Southfield, Michigan 48075 (US).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report (Art. 21(3))

(54) **Title:** QUADRATURE TRACK ERROR SIGNAL FOR OPTICAL RECORDING MEDIA AND DEVICES

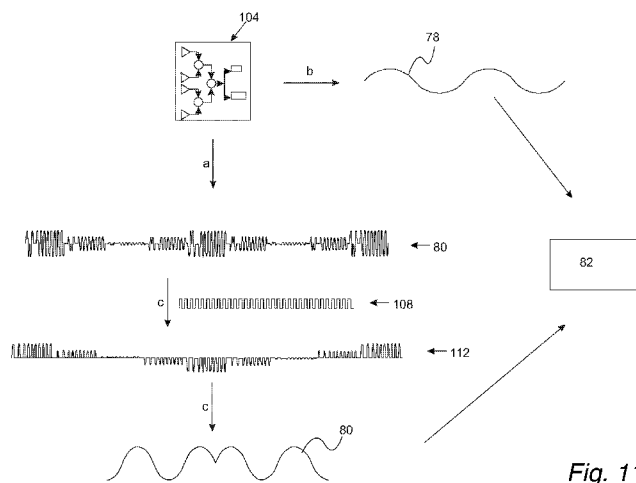


Fig. 11

(57) **Abstract:** A method for providing tracking error signals in an optical data storage system includes a step of receiving a wobble signal having a first frequency from the wobble detection system. The wobble detection system includes an optical pick up unit that detects positions of the head relative to lands and grooves. Characteristically, the wobble signal is amplitude modulated for positions intermediate between the land and the groove. The method further includes a step of receiving a primary tracking error signal from the wobble detection system. The wobble signal is multiplied with a synchronous signal to about a product signal. The product signal is positive for a first direction of motion and negative for a second direction of motion that is opposite that of the first direction. The product signal is integrated to obtain a quadrature track error signal.



QUADRATURE TRACK ERROR SIGNAL FOR OPTICAL RECORDING MEDIA AND DEVICES

TECHNICAL FIELD

[0001] In at least one aspect, the present invention is related to methods and apparatuses for detecting the movement of transducer heads in optical storage systems.

BACKGROUND

[0002] Servo systems in optical data recording devices such as optical tape drives utilize tracking error signals, detected from the optical media via an optical pickup unit (OPU) device, to accurately record and then retrieve data on the optical media.

[0003] Figures 1 and 2 illustrate a portion of a typical optical recording medium. Figure 1A is a top view while Figure 1B is a side view. Optical recording media 10 includes a nanostructure surface relief pattern embossed on the surface of the optical medium. The nanostructure includes lands 12 and grooves 14 embossed in the Z direction (i.e., perpendicular to the face of optical recording medium 10) thereon in a preformatting process. These surface relief patterns are used to generate the tracking signals used by a servo system to track the position of an optical head reading or writing to the medium. An optical drive OPU with the aid of electronic signal processing generates a tracking error signal (TES) from the detected patterns. In order to establish an addressing capability for these recording tracks, the edges of these embossed lands 12 and grooves 14 relief patterns are structurally modulated in the horizontal direction parallel to the face of optical recording medium 10 (e.g., Y axes to track X axes) with sinusoidal patterns 16 (i.e., wobbles) which contain individual track address codes. Figure 1A also depicts recording marks 18 encoded thereon.

[0004] A technique referred to as "Radial Push Pull" Tracking signal generation (also referred to as "Main Push Pull" (MPP), has been conventionally used to generate the Tracking Error Signal (TES) for the rewritable optical recording media preformatted with "land" and "groove" track geometries as set forth above. This scheme generates a reference tracking signal based on the

geometries of land and grooved tracks on the media and detectable by a main quad photodetector (QPD) of the OPU. Figure 3 provides a schematic illustration of a typical signal processing scheme for the TES signal generated by the QPD. Signal processing system 20 includes recording/reading head 21. Recording/reading head 21 includes quad photodetector 22 which includes individual photodetectors 24, 26, 28, and 30. Signals 32, 34, 36, 38 from photodetectors 24, 26, 28, 30 are amplified by amplifiers 42, 44, 46, 48 to provide signals 52, 54, 56, 58. Signals 52, 54 are provided to adder 60 which outputs summed signal 62. Signals 56, 58 are provided to adder 64 which outputs summed signal 66. Summed signal 62 and summed signal 66 are inputted into subtractor circuit 70 with outputs difference signal 72 which is further processed to provide TES signal 78 and wobble signal 80. For example, low pass filter 82 receives difference signal 72 as an input and outputs TES signal 78, while band pass filter 84 receives difference signal 72 and outputs wobble signal 80. The high frequency wobble signal includes, among other information, the key data track ID and Address codes. Moreover, TES signal 78 and wobble signal 80 are used by recording/reading head servo system 86 to provide positioning information regarding the position of head 21. In particular, digital servo systems control the dynamic operation of the OPUs by using wobble signal information to place the OPU on the correct desired data track.

[0005] As depicted in Figure 4, the Radial Push Pull method of TES derivation generates a quantized sinusoidal signal as the OPU 22 moves across multiple data track on the media 10 along direction d_1 while the medium is moving along direction d_{tape} . It is a well-known shortcoming that directional information is not provided by this method because of the quantized sinusoidal nature of the signal as depicted in Figure 5. Figure 5 demonstrates that movement first along direction d_1 and then along direction d_2 produces the same TES signal as movement only along direction d_1 . This lack of direction information has a severe impact on the robust control of the tracking servo system especially during cross track OPU motion. It is significant that the TES signals from both Figure 4 and 5 do not show any difference as OPU motion changes direction.

[0006] Accordingly, there is a need for improved methods and apparatuses for detecting the direction of OPU motion.

SUMMARY

[0007] The present invention solves one or more problems of the prior art, by providing a method for providing tracking error signals in an optical data storage system. In particular, the method generates signals that provide directional information on the motion of Optical Pickup Units across data tracks in optical recording media. The optical data storage system includes a head having a wobble detection system. The method includes a step of receiving a wobble signal having a first frequency from the wobble detection system. The wobble detection system includes an optical pick up unit that detects positions of the head relative to lands and grooves. The wobble signal for the optical pick up unit centered on a land is 180 degrees out of phase with the wobble signal for the optical pick up unit centered on a groove. Characteristically, the wobble signal is amplitude modulated for positions intermediate between the land and the groove. The method further includes a step of receiving a primary tracking error signal from the wobble detection system. The wobble signal is multiplied with a synchronous signal to about a product signal. The product signal is positive for a first direction of motion and negative for a second direction of motion that is opposite that of the first direction. The product signal is integrated to obtain a quadrature track error signal. Characteristically, the quadrature track error signal is 90 degrees out of phase with the primary track error signal. The quadrature track error signal and the primary track error signal in combination and individually provide direction information about movement of the tape head across the width of the tape.

[0008] In another embodiment, an apparatus for implementing the method set forth above is provided in which tracking error signals are provided in an optical storage system. The apparatus includes a transducer head having a wobble detection system. The wobble detection system includes an optical pick up unit that detects positions of the transducer head relative to lands and grooves and provides a wobble signal having a first frequency. The wobble signal for a land is amplitude modulated for positions intermediate between the land and the groove. A synchronous multiplier multiplies the wobble signal with a square wave signal having the first frequency to provide a product signal. The product signal is positive for a first direction of motion and negative for a second direction of motion that is opposite that of the first direction. An integrator integrates the product signal to obtain a quadrature track error signal. The quadrature track error signal being 90

degrees out of phase with the track error signal, the quadrature track error signal and the track error signal in combination provide direction information about movement of the transducer head across data tracks.

BRIEF DESCRIPTION OF THE DRAWINGS

- [0009]** Exemplary embodiments of the present invention will become more fully understood from the detailed description and the accompanying drawings, wherein:
- [0010]** FIGURE 1 provides a top view of optical recording media showing the embossed lands and grooves;
- [0011]** FIGURE 2 provides a side view of optical recording media showing the embossed lands and grooves;
- [0012]** FIGURE 3 provides a schematic illustration of a system for detecting a tracking error signal and a wobble signal from an optical storage medium having wobble patterns embossed thereon;
- [0013]** FIGURE 4 provides a schematic of an OPU crossing multiple tracks with the related TES signal;
- [0014]** FIGURE 5 provides a schematic of an OPU crossing multiple tracks along two opposite transverse directions with the related TES signal;
- [0015]** FIGURE 6A provides an example of a wobble signal for an optical pickup unit centered on a groove;
- [0016]** FIGURE 6B provides an example of a wobble signal for an optical pickup unit centered on a land;
- [0017]** FIGURE 7 provides a schematic showing the evolution of a wobble signal as the OPU moves across a storage medium;

[0018] FIGURE 8 provides a schematic illustration of a system for detecting a tracking error signal and a quadrature track error signal from an optical medium with wobble patterns embossed thereon;

[0019] FIGURE 9 provides a schematic illustration of a system for detecting a tracking error signal and a quadrature track error signal from an optical medium with wobble patterns embossed thereon;

[0020] FIGURE 10 provides a schematic of an OPU crossing multiple tracks along two opposite transverse directions with the related TES signal and quadrature track error signal; and

[0021] FIGURE 11 provides a schematic flow chart of the method implemented by the system of Figure 8 for detecting the quadrature track error signal.

DETAILED DESCRIPTION

[0022] Reference will now be made in detail to presently preferred compositions, embodiments and methods of the present invention, which constitute the best modes of practicing the invention presently known to the inventors. The Figures are not necessarily to scale. However, it is to be understood that the disclosed embodiments are merely exemplary of the invention that may be embodied in various and alternative forms. Therefore, specific details disclosed herein are not to be interpreted as limiting, but merely as a representative basis for any aspect of the invention and/or as a representative basis for teaching one skilled in the art to variously employ the present invention.

[0023] Except in the examples, or where otherwise expressly indicated, all numerical quantities in this description indicating amounts of material or conditions of reaction and/or use are to be understood as modified by the word "about" in describing the broadest scope of the invention. Practice within the numerical limits stated is generally preferred. Also, unless expressly stated to the contrary: the first definition of an acronym or other abbreviation applies to all subsequent uses herein of the same abbreviation and applies *mutatis mutandis* to normal grammatical variations of the initially defined abbreviation; and, unless expressly stated to the contrary, measurement of a property is determined by the same technique as previously or later referenced for the same property.

[0024] It is also to be understood that this invention is not limited to the specific embodiments and methods described below, as specific components and/or conditions may, of course, vary. Furthermore, the terminology used herein is used only for the purpose of describing particular embodiments of the present invention and is not intended to be limiting in any way.

[0025] It must also be noted that, as used in the specification and the appended claims, the singular form "a," "an," and "the" comprise plural referents unless the context clearly indicates otherwise. For example, reference to a component in the singular is intended to comprise a plurality of components.

[0026] Throughout this application, where publications are referenced, the disclosures of these publications in their entireties are hereby incorporated by reference into this application to more fully describe the state of the art to which this invention pertains.

[0027] Embodiments and variations of the invention, advantageously utilize wobble signal information from a digital data storage media to generate a novel complimentary Quadrature Track Error Signal (QTES) that provides the directions of OPU motion information. In this regard, a system such as that described by Figure 3 is utilized to provide a wobble signal. Methods for detecting wobble signals and/or Tracking Error Signals are set forth in U.S. Pat. Nos. 5,383,169; 6,009,059; and 6,937,542; the entire disclosures of which are hereby incorporated by reference. Advantageously, the QTES signal allows robust control of OPU motion by allowing in combination detection of the movement of the recording head. Figure 6A provides an example of a wobble signal obtained when the OPU is centered on a groove while Figure 6B provides an example of a wobble signal when the OPU is centered on a land. As set forth above, the wobble signals are the result of the wobbled edge structure of the grooved tracks at very high spatial frequency with narrow high frequency band passing filtering of MPP.

[0028] With reference to Figures 5 and 7, schematics illustrating the amplitude modulation of the wobble signal as a read/write head moves across data tracks are provided. Figure 7 provides a schematic showing the evolution of a wobble signal as OPU 22 moves across the data tracks of optical storage medium 10. Due to the properties of the diffraction pattern generated by the land and groove media surface structure, the polarity of the wobble signals changes as OPU 22 moves along

direction d_1 and medium 10 moves along direction d_{tape} . When OPU is placed over groove 14 at track n , the wobble signal is described by item number 90. As the OPU moves toward track $n+1$, the wobble signal amplitude modulates until the OPU is centered on a land, at which point the wobble signal is described by item number 92. At intermediate position, the amplitude of wobble signal 78 has an intermediate value.

[0029] With reference to Figure 8, a schematic illustration of a system for producing a quadrature track error signal is provided. In particular, the system generates signals that provide directional information on the motion of optical pickup units across data tracks in optical recording media (e.g., optical tapes or disks). Optical data storage system 100 includes transducer head 102 in communication with a wobble detection system 104. Wobble detection system 104 includes optical pick up unit 22 that detects positions of the transducer head relative to lands and grooves as set forth above with respect to the descriptions of Figures 1-3. Optical pick up unit 22 is positioned in transducer head 102. In a refinement, the wobble detection system of Figure 2 is used in this embodiment. Wobble detection system 104 provides direct track error signal 78 and wobble signal 80. As used herein, the term direct track error signal 78 refers to the normal prior art track error signal that is detected by the "Main Push Pull" (MPP) method or the differential push pull method. Wobble signal 80 is characterized by having a first frequency (i.e., a wobble signal frequency). In a refinement, the wobble signal frequency is from 0.5 megahertz to 10 megahertz. Typical wobble signal frequencies are about 1 megahertz. As set forth above, wobble signal 80 for a land is 180 degrees out of phase with the wobble signal for a groove with wobble signal 80 being amplitude modulated for positions intermediate between the land and the groove. More particularly, in this context, being 180 out of phase means that wobble signal peaks maxima for lands correspond to wobble signal minima for grooves and wobble signal peaks minima for lands correspond to wobble signal maxima for grooves. Synchronous multiplier 106 multiplies wobble signal 80 with square wave 108 signal derived from synchronous clock 110 having the first frequency to provide a product signal 112. In a refinement, square wave 108 has a voltage amplitude varying from 0 volts to a peak value (e.g. 1 volt). Product signal 112 is positive for a first direction of motion of transducer head 102 and negative for a second direction of motion of transducer head 102 that is opposite that of the first direction. These directions of motion are recognized as directions d_1 and d_2 from Figure 5. Integrator 114 integrates the product signal 112 to obtain quadrature track error signal 120.

Characteristically, quadrature track error signal 120 is 90 degrees out of phase with the track error signal. Quadrature track error signal (QTES) and the track error signal 78 in combination provide direction information about movement of the transducer head across data tracks as set forth below.

[0030] Optical storage system 100 also includes phase lock loop 122 which allows square wave 108 to lock onto wobble signal 80. Phase lock loop 122 receives the appropriate locking frequency from wobble signal 80. Phase lock loop 122 is phase adjustable to maximize product signal 112.

[0031] With reference to Figures 9 and 10, features of the quadrature track error signal are provided. Figure 9 provides aligned plots of direct track error signal 78, wobble signal 80, square wave signal 108, product signal 112, and quadrature track error signal 120. Figure 10 provides a schematic of an OPU crossing multiple tracks along two opposite transverse directions with the related TES signal and quadrature track error signal. Direct track error signal 78 and quadrature track error signal 120 both independently include an oscillating pattern as the transducer head moves across tracks. For example, the quadrature track error signal and the direct track error signal may each independently be approximated by a sinusoidal function as head moves across data tracks in an optical data storage medium. In this regard, the sinusoidal functions are within 5 percent of the actual values for the quadrature track error signal and the track error signal.

[0032] In one refinement, the direct track error signal leads the quadrature track error signal for the first direction of motion d_1 . In another refinement, the quadrature track error signal leads the direct track error signal for the second direction of motion d_2 . It should also be observed that quadrature track error signal 120 changes such that the product signal 112 is positive for first direction of motion d_1 and negative for second direction of motion d_2 that is opposite that of the first direction. Typically, direct track error signal 80 includes a first set of regions that are approximated by linear functions l_1 and quadrature track error signal 12 includes a second set of regions that are approximated by linear functions l_2 . The first set of regions that are approximated by linear functions and the second set of regions that are approximated by linear functions include non-overlapping portions with respect to displacement of the transducer head from a land or groove. Moreover, the first set of regions that are approximated by linear functions and the second set of regions that are

approximated by linear functions provide complete linearization of the motion of the transducer head across the data tracks.

[0033] With reference to Figure 11, the method implemented by the system of Figure 8 is summarized. In step a), wobble signal 80 having a first frequency is received from a wobble detection system 104 such as the system depicted in Figure 2. The wobble detection system includes an optical pick up unit that detects positions of a transducer head relative to lands and grooves. Wobble signal 80 for the optical pick up unit centered on a land is 180 degrees out of phase with the wobble signal for the optical pick up unit centered on a groove. Characteristically, the wobble signal is amplitude modulated for positions intermediate between the land and the groove. In step b), a direct tracking error signal 78 from the wobble detection system is received. In step c), wobble signal 80 is multiplied with a synchronous signal to about product signal 112. Product signal 112 is positive for a first direction of motion and negative for a second direction of motion that is opposite that of the first direction. In step d), product signal 112 is integrated to obtain quadrature track error signal 120. Characteristically, the quadrature track error signal is 90 degrees out of phase with the primary track error signal. The quadrature track error signal and the primary track error signal in combination and individually provide direction information about movement of the tape head across the width of the tape as set forth above. TES signal 78 and wobble signal 80 are used by recording/reading head servo system 86 to provide positioning information regarding the position of the transducer head. In particular, digital servo systems controls the dynamic operation of the OPUs by using wobble signal information to place the OPU on the correct desired data track.

[0034] While exemplary embodiments are described above, it is not intended that these embodiments describe all possible forms of the invention. Rather, the words used in the specification are words of description rather than limitation, and it is understood that various changes may be made without departing from the spirit and scope of the invention. Additionally, the features of various implementing embodiments may be combined to form further embodiments of the invention.

WHAT IS CLAIMED IS:

1. A method for providing tracking error signals in an optical digital storage system, the optical digital storage system including a transducer head and a wobble detection system, the method comprising:

receiving a wobble signal having a first frequency from the wobble detection system, the wobble detection system including an optical pick up unit that detects positions of the transducer head relative to lands and grooves, the wobble signal for the optical pick up unit centered on a land being 180 degrees out of phase with the wobble signal for the optical pick up unit centered on a groove, the wobble signal being amplitude modulated for positions intermediate between the land and the groove;

receiving a primary tracking error signal from the wobble detection system;

multiplying the wobble signal with a synchronous signal to produce a product signal, the product signal being positive for a first direction of motion and negative for a second direction of motion that is opposite that of the first direction; and

integrating the product signal to obtain a quadrature track error signal, the quadrature track error signal being 90 degrees out of phase with the primary track error signal, the quadrature track error signal and the track error signal in combination providing direction information about movement of the transducer head across data tracks.

2. The method of claim 1 wherein the quadrature track error signal and the track error signal each independently includes an oscillating pattern as the head moves across tracks.

3. The method of claim 1 or 2 wherein the quadrature track error signal leads the track error signal for the first direction of motion.

4. The method of any preceding claim wherein the track error signal leads the quadrature track error signal for the second direction of motion.

5. The method of any preceding claim wherein the quadrature track error signal changes such that the product signal is positive for a first direction of motion and negative for a second direction of motion that is opposite that of the first direction;

6. The method of any preceding claim wherein the quadrature track error signal and the track error signal are each independently approximated by a sinusoidal function as the head moves across tracks.

7. The method of any preceding claim wherein the track error signal includes a first set of regions that are approximated by linear functions.

8. The method of claim 7 wherein the quadrature track error signal includes a second set of regions that are approximated by linear functions.

9. The method of claim 8 wherein the first set of regions that are approximated by linear functions and the second set of regions that are approximated by linear functions include non-overlapping portions with respect to displacement of the transducer head from a land or groove.

10. The method of claim of claim 9 wherein the first set of regions that are approximated by linear functions and the second set of regions that are approximated by linear functions provide complete linearization of the motion of the transducer head across the data tracks.

11. An apparatus for providing tracking error signals in an optical storage system, the apparatus comprising

a transducer head;

a wobble detection system including an optical pick up unit positioned in the transducer head, the wobble detection system detecting positions of the transducer head relative to lands and grooves, the wobble detection system providing a wobble signal having a first frequency, the wobble signal for a land being 180 degrees out of phase with the wobble signal for a groove, the wobble signal being amplitude modulated for positions intermediate between the land and the groove;

a synchronous multiplier that multiplies the wobble signal with a square wave signal having the first frequency to provide a product signal, the product signal being positive for a first direction of motion and negative for a second direction of motion that is opposite that of the first direction; and

an integrator that integrates the product signal to obtain a quadrature track error signal, the quadrature track error signal being 90 degrees out of phase with the track error signal, the quadrature track error signal and the track error signal in combination providing direction information about movement of the transducer head across data tracks.

12. The apparatus of claim 11 further including a phase lock loop that ensures that the square wave signal is in phase with the wobble signal.

13. The apparatus of claim 11 or 12 wherein the quadrature track error signal and the track error signal each independently includes an oscillating pattern.

14. The apparatus of any of claims 11 to 13 wherein the quadrature track error signal leads the track error signal for the first direction of motion and wherein the quadrature track error signal lags the track error signal for the second direction of motion.

15. The apparatus of any of claims 11 to 14 wherein the quadrature track error signal shows a discontinuity for a change in the direction of motion of the transducer head.

16. The apparatus of any of claims 11 to 15 wherein the quadrature track error signal and the track error signal are each independently approximated by a sinusoidal function.

17. The apparatus of any of claims 11 to 16 wherein the track error signal includes a first set of regions that are approximated by linear functions and the quadrature track error signal includes a second set of regions that are approximated by linear functions.

18. The apparatus of claim 17 wherein the first set of regions that are approximated by linear functions and the second set of regions that are approximated by linear functions include non-overlapping portions with respect to displacement of the transducer head from a land or groove.

19. The apparatus of claim 18 wherein the first set of regions that are approximated by linear functions and the second set of regions that are approximated by linear functions provide complete linearization of the motion of the transducer head across the data tracks.

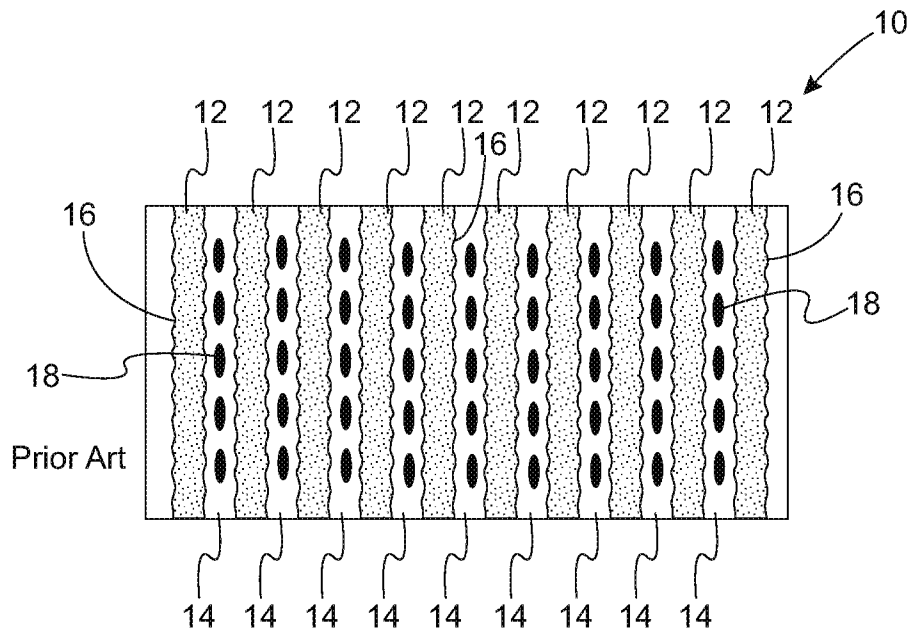


Fig. 1

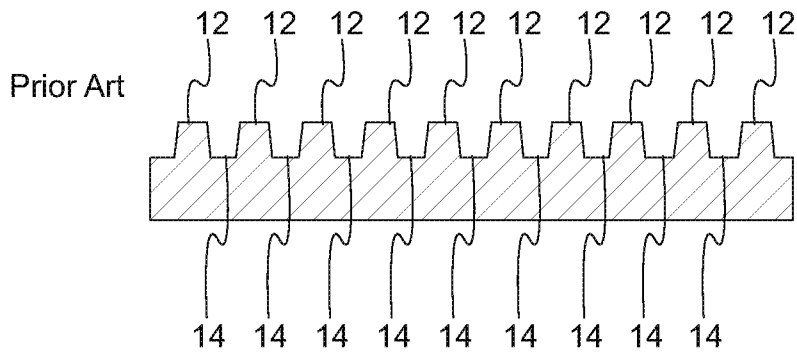


Fig. 2

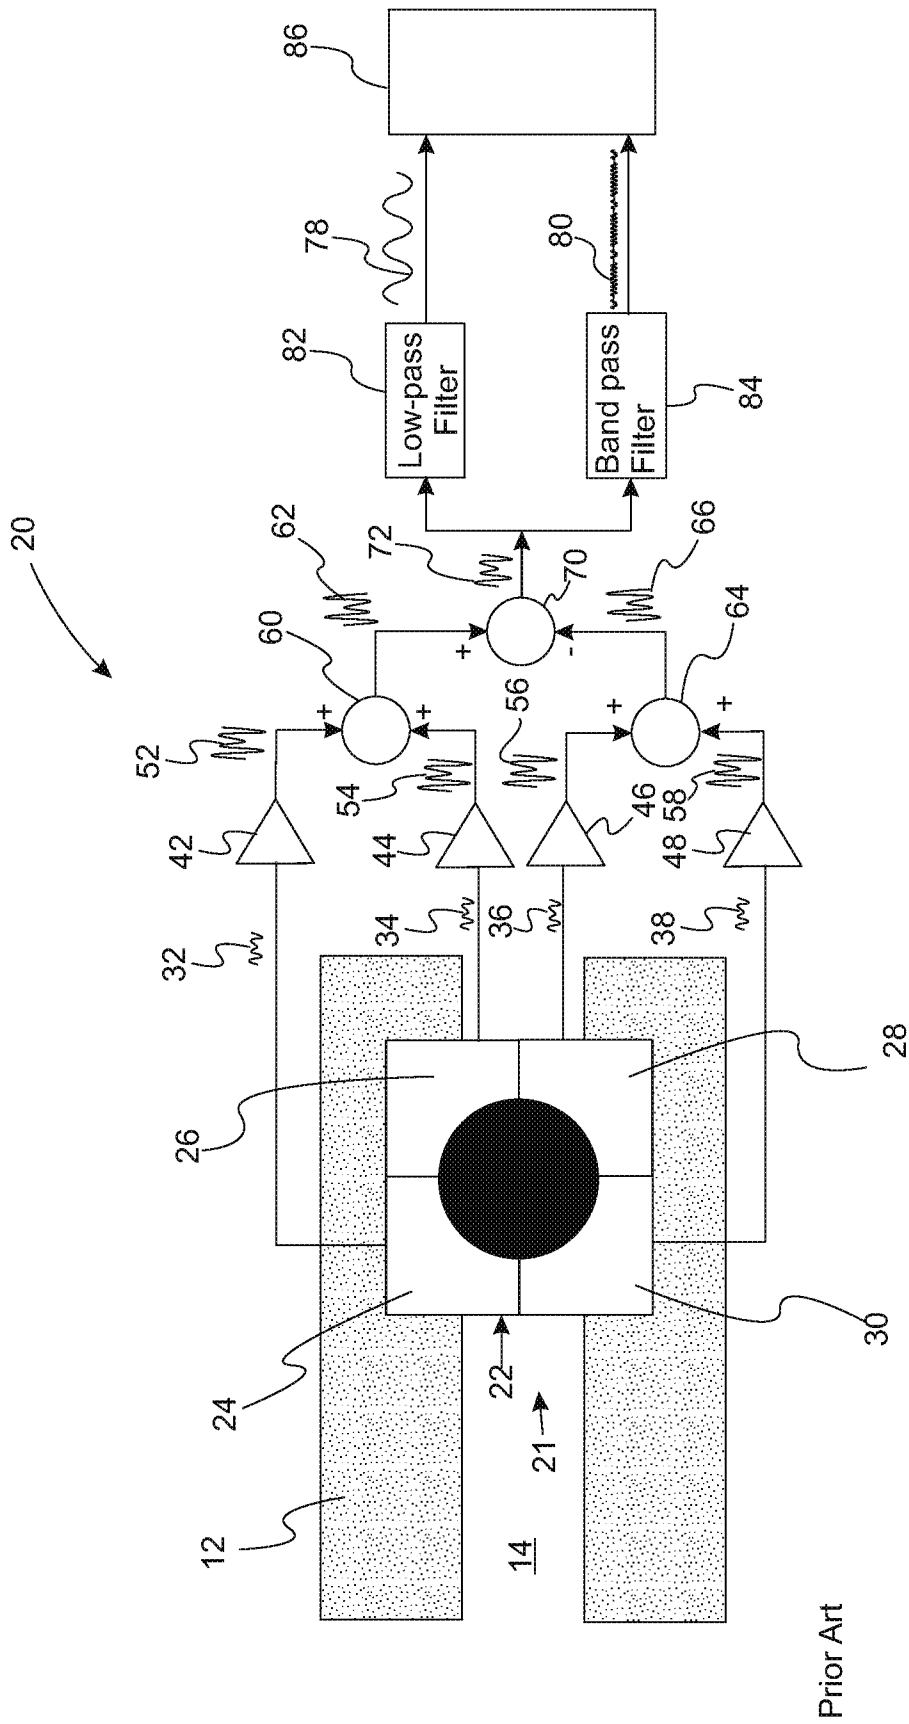


Fig. 3

Prior Art


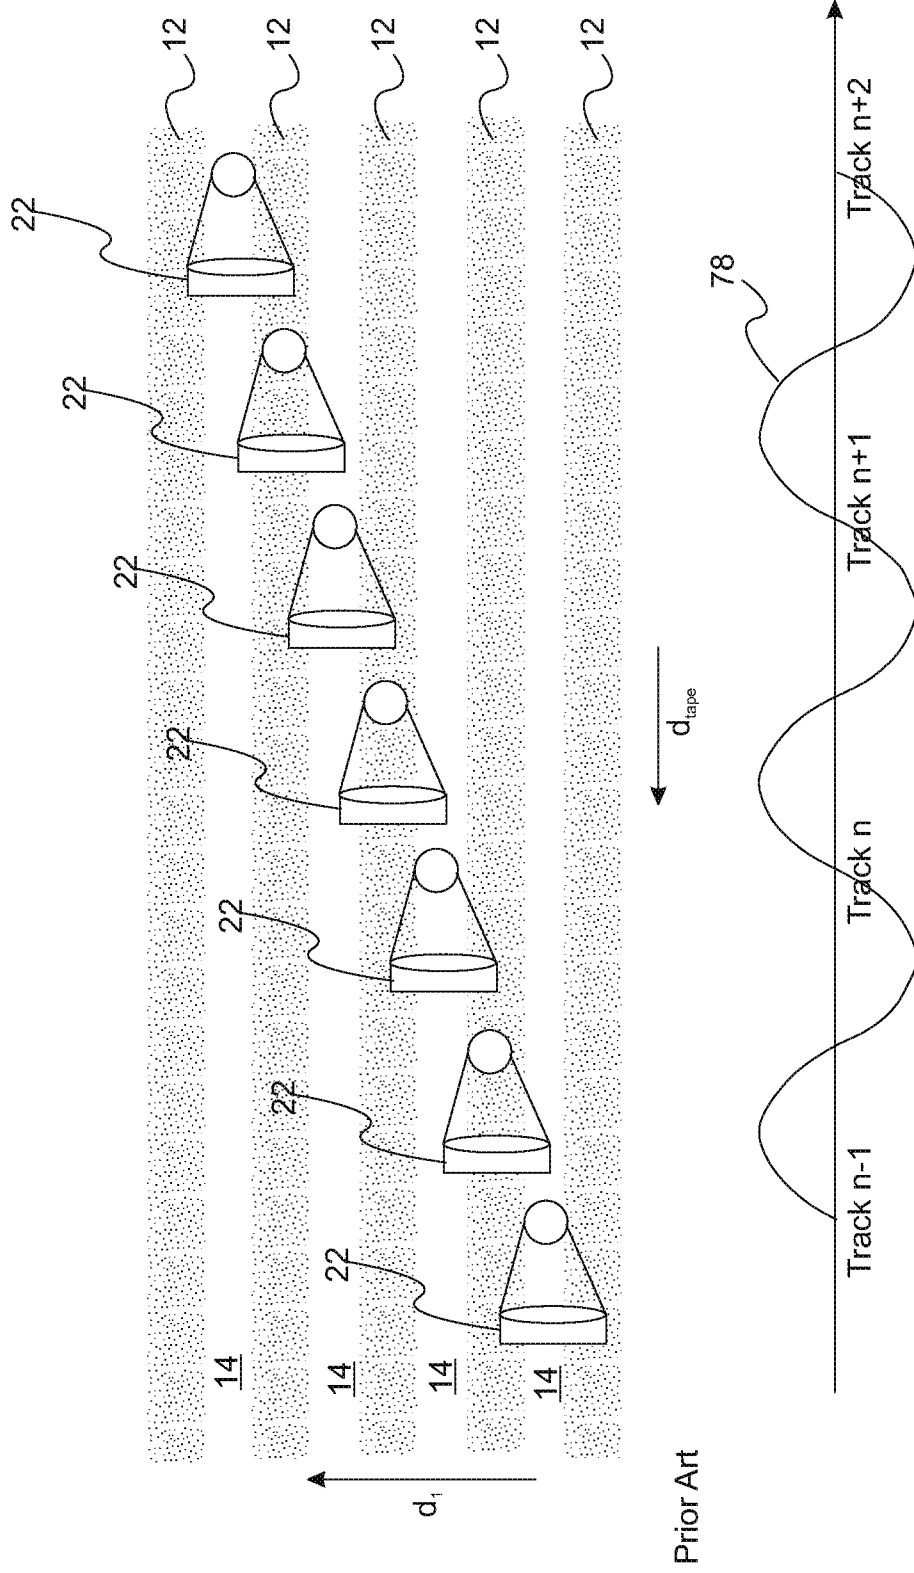


Fig. 4

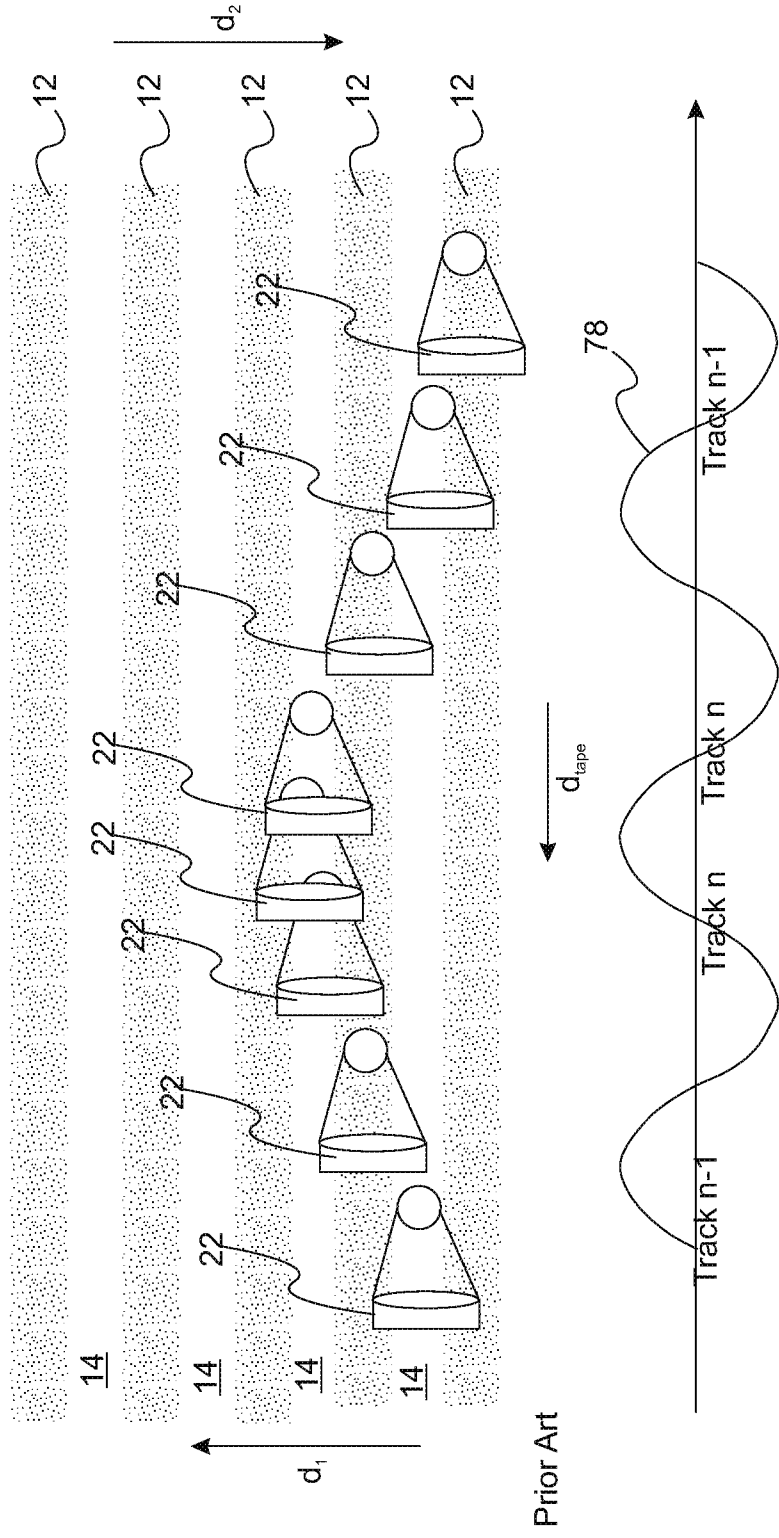

Prior Art

Fig. 5



Fig. 6A



Fig. 6B

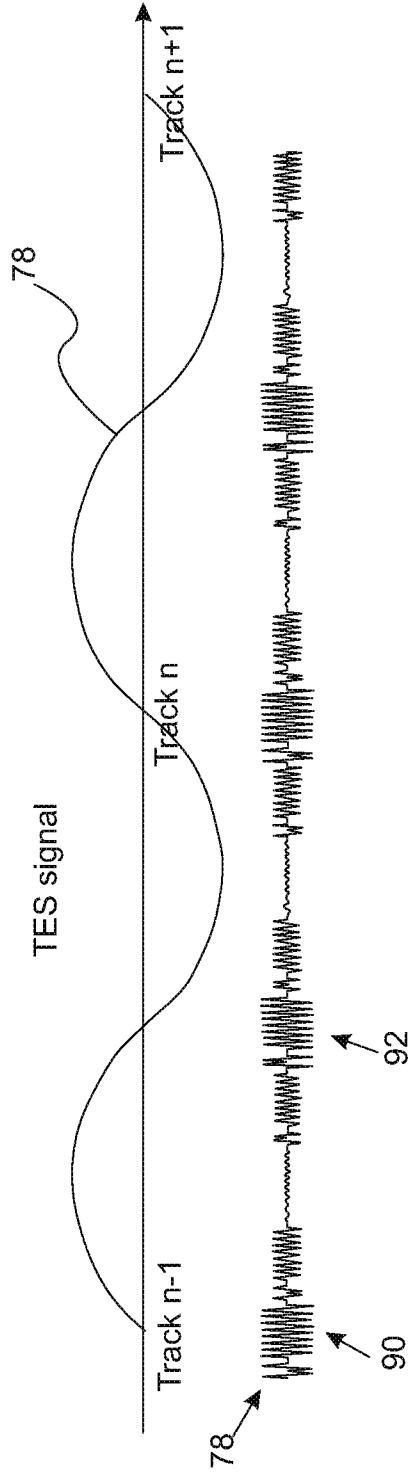


Fig. 7

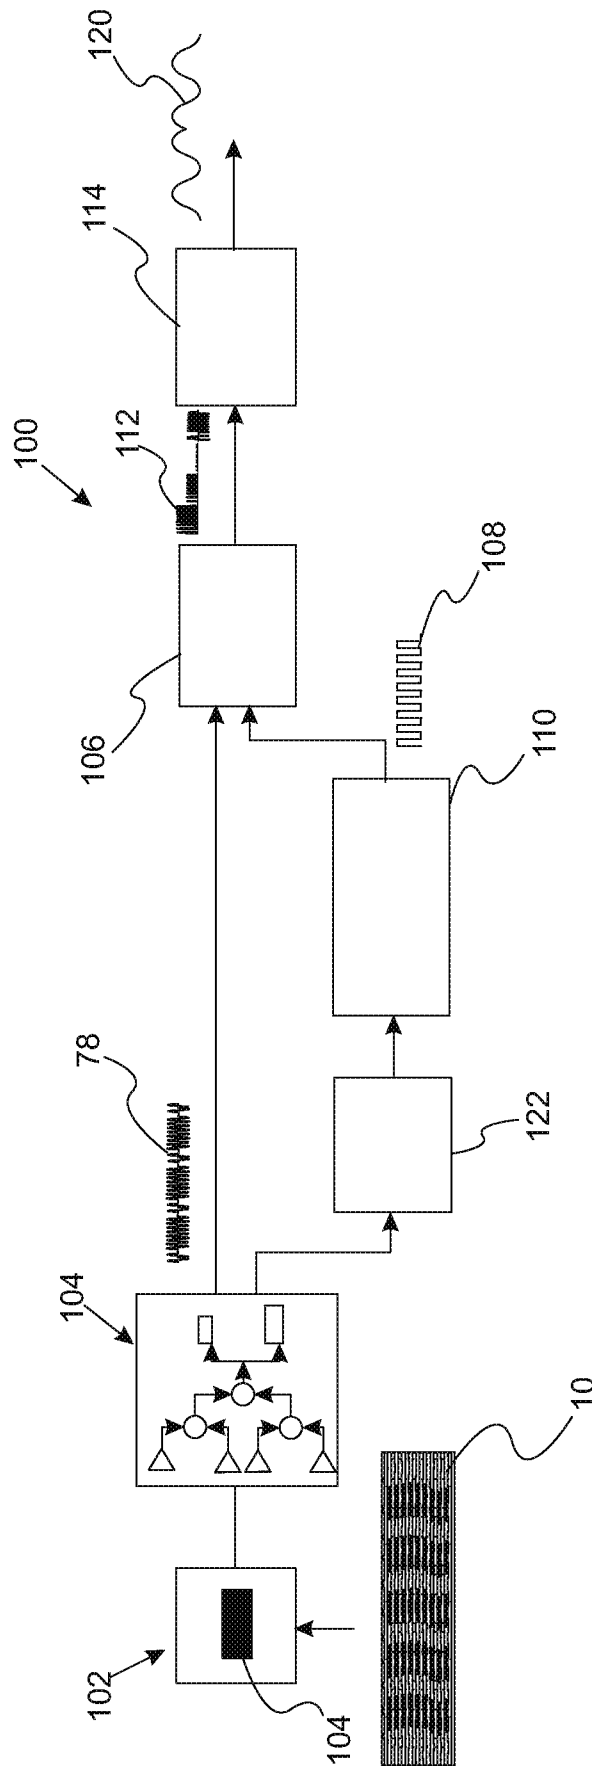


Fig. 8

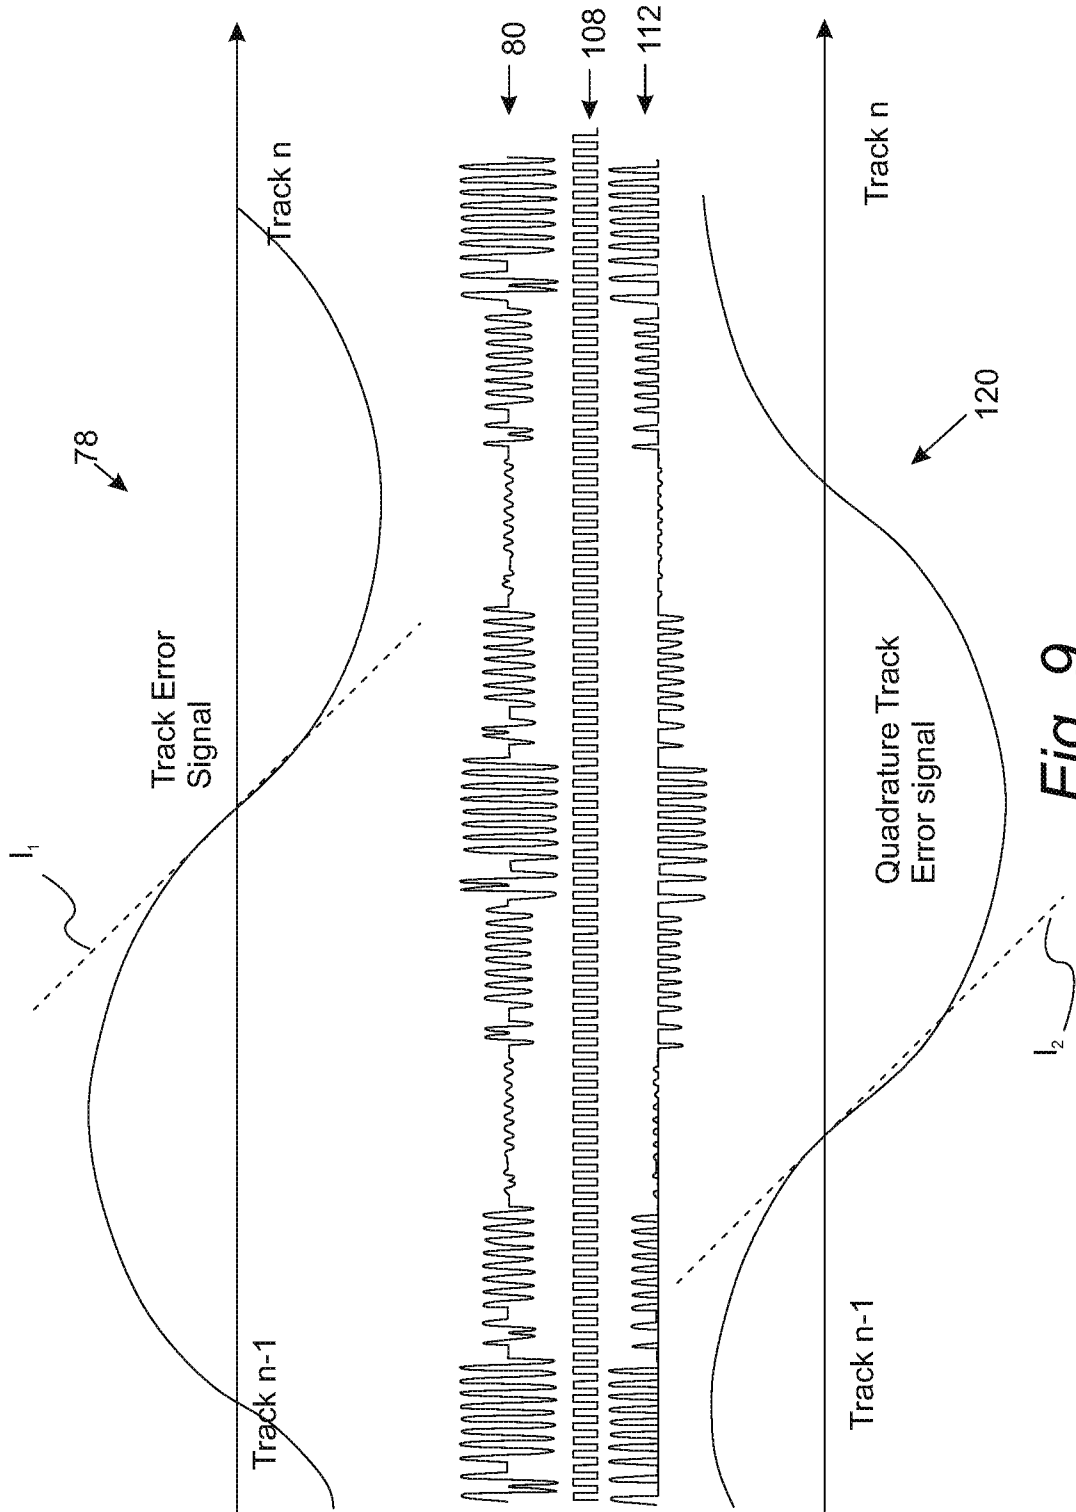


Fig. 9

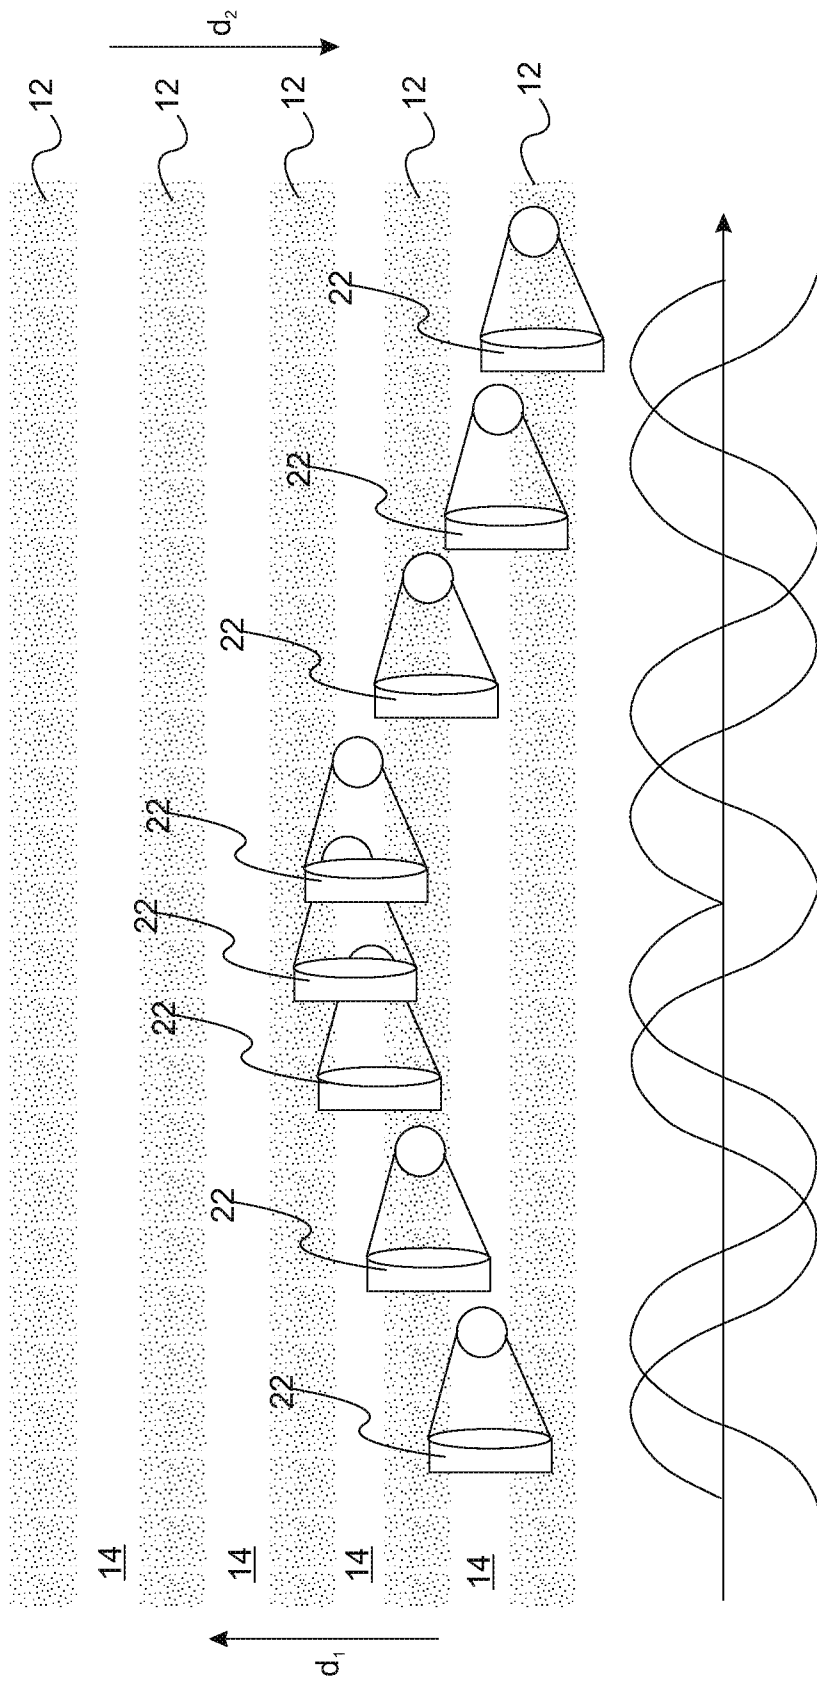


Fig. 10

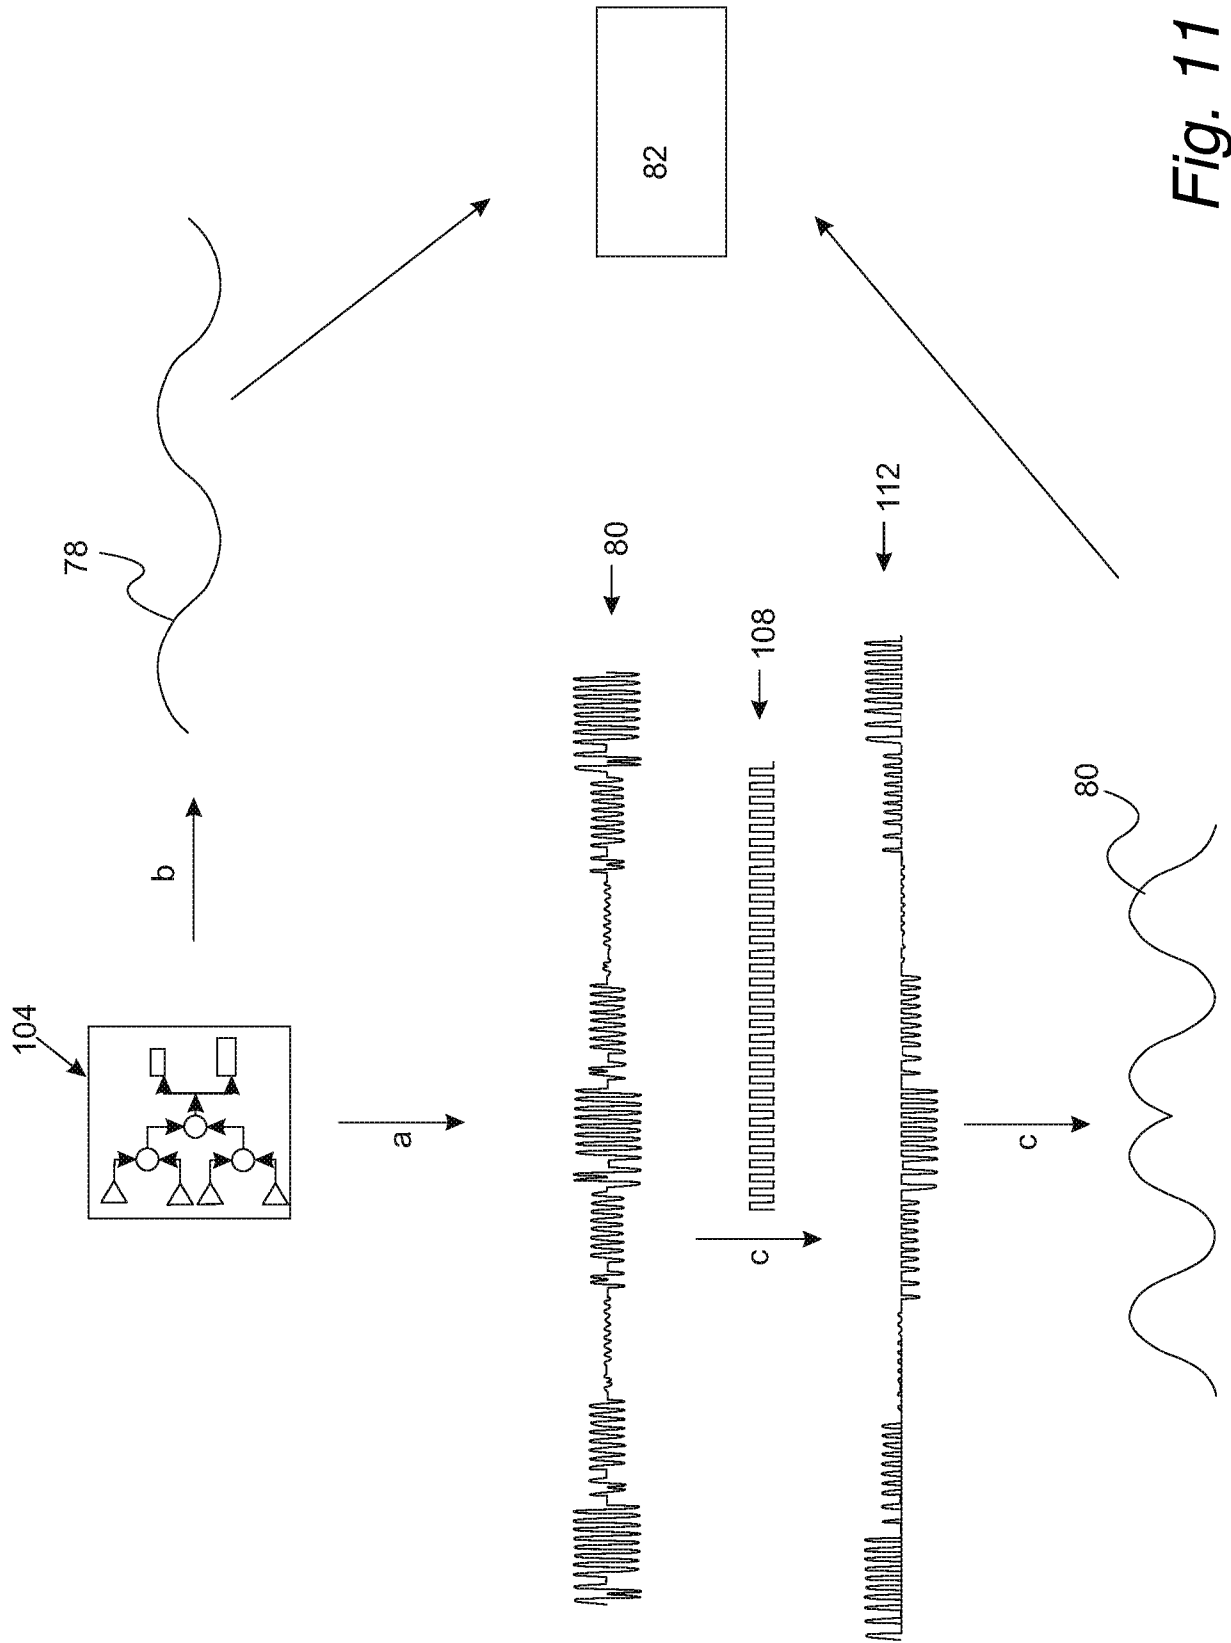


Fig. 11

INTERNATIONAL SEARCH REPORT

International application No PCT/US2014/057594

A. CLASSIFICATION OF SUBJECT MATTER INV. G11B7/085 G11B7/005 ADD.				
According to International Patent Classification (IPC) or to both national classification and IPC				
B. FIELDS SEARCHED				
Minimum documentation searched (classification system followed by classification symbols) G11B				
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched				
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal, WPI Data				
C. DOCUMENTS CONSIDERED TO BE RELEVANT				
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.		
A	US 2007/253293 A1 (BUECHLER CHRISTIAN [DE]) 1 November 2007 (2007-11-01) the whole document -----	1-19		
A	US 2006/203631 A1 (WU GWO-HUEI [TW] ET AL) 14 September 2006 (2006-09-14) the whole document -----	1-19		
A	US 2009/109807 A1 (HUANG CHAO-MING [TW] ET AL) 30 April 2009 (2009-04-30) the whole document -----	1-19		
A	EP 1 551 012 A1 (MATSUSHITA ELECTRIC IND CO LTD [JP] PANASONIC CORP [JP]) 6 July 2005 (2005-07-06) the whole document -----	1-19		
----- -/--				
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.				
* Special categories of cited documents : <table style="width: 100%; border: none;"> <tr> <td style="width: 50%; border: none; vertical-align: top;"> "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed </td> <td style="width: 50%; border: none; vertical-align: top;"> "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family </td> </tr> </table>			"A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family
"A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family			
Date of the actual completion of the international search	Date of mailing of the international search report			
13 January 2015	20/01/2015			
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Skaropoulos, N			

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2014/057594

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6 473 369 B1 (QUAN THOMAS [US] ET AL) 29 October 2002 (2002-10-29) the whole document -----	1-19

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/US2014/057594

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2007253293	A1	01-11-2007	AT 395692 T 15-05-2008
			CN 1977319 A 06-06-2007
			DE 102004019692 A1 10-11-2005
			EP 1738358 A1 03-01-2007
			JP 2007534091 A 22-11-2007
			KR 20060127263 A 11-12-2006
			US 2007253293 A1 01-11-2007
			WO 2005104107 A1 03-11-2005

US 2006203631	A1	14-09-2006	CN 1832008 A 13-09-2006
			TW 1331333 B 01-10-2010
			US 2006203631 A1 14-09-2006
			US 2010157783 A1 24-06-2010

US 2009109807	A1	30-04-2009	CN 101425302 A 06-05-2009
			TW 200919462 A 01-05-2009
			US 2009109807 A1 30-04-2009

EP 1551012	A1	06-07-2005	AU 2003272937 A1 04-05-2004
			CN 1703743 A 30-11-2005
			EP 1551012 A1 06-07-2005
			JP 4232428 B2 04-03-2009
			JP 2004134007 A 30-04-2004
			KR 20050059242 A 17-06-2005
			US 2006044962 A1 02-03-2006
			WO 2004034388 A1 22-04-2004

US 6473369	B1	29-10-2002	NONE
