



US 20020041480A1

(19) **United States**

(12) **Patent Application Publication**
Matthews

(10) **Pub. No.: US 2002/0041480 A1**

(43) **Pub. Date: Apr. 11, 2002**

(54) **ADAPTER FOR CONVERTING A SWITCHBOARD CASE FOR USE WITH A SOCKET MOUNTED ELECTRICITY METER**

non-provisional of provisional application No. 60/072,828, filed on Jan. 28, 1998.

Publication Classification

(76) Inventor: **Christopher Howard Matthews,**
Norcross, GA (US)

(51) **Int. Cl.⁷ H02B 1/00**

(52) **U.S. Cl. 361/665**

Correspondence Address:

Sanford J. Asman
570 Vinington Court
Dunwoody, GA 30350 (US)

(21) Appl. No.: **09/901,445**


(22) Filed: **Jul. 9, 2001**

Related U.S. Application Data

(63) Continuation-in-part of application No. 09/630,131, filed on Aug. 1, 2000, now patented, which is a continuation-in-part of application No. 09/238,392, filed on Jan. 27, 1999, now patented, which is a

(57) **ABSTRACT**

An adapter for converting a switchboard case for use with a socket mounted electricity meter uses a switchboard cradle which fits into a switchboard case, along with a meter socket which has been adapted so that it will fit into the front opening in the switchboard cradle, and which is mounted to a depth which permits the terminals of a socket meter to be fully engaged therein while the base of the socket meter overlies the front opening in the switchboard case and switchboard cradle. Electrical connections to the meter socket are made to the connection strips on the switchboard cradle, whereby no rewiring of the switchboard case will be required.

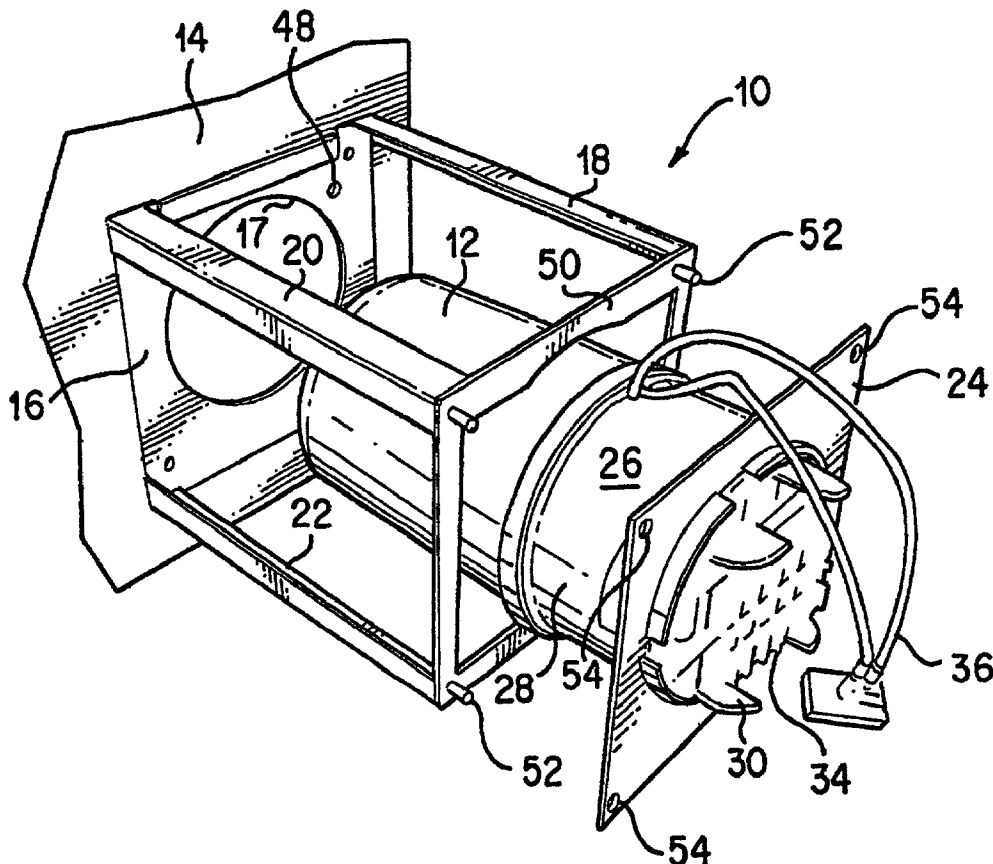

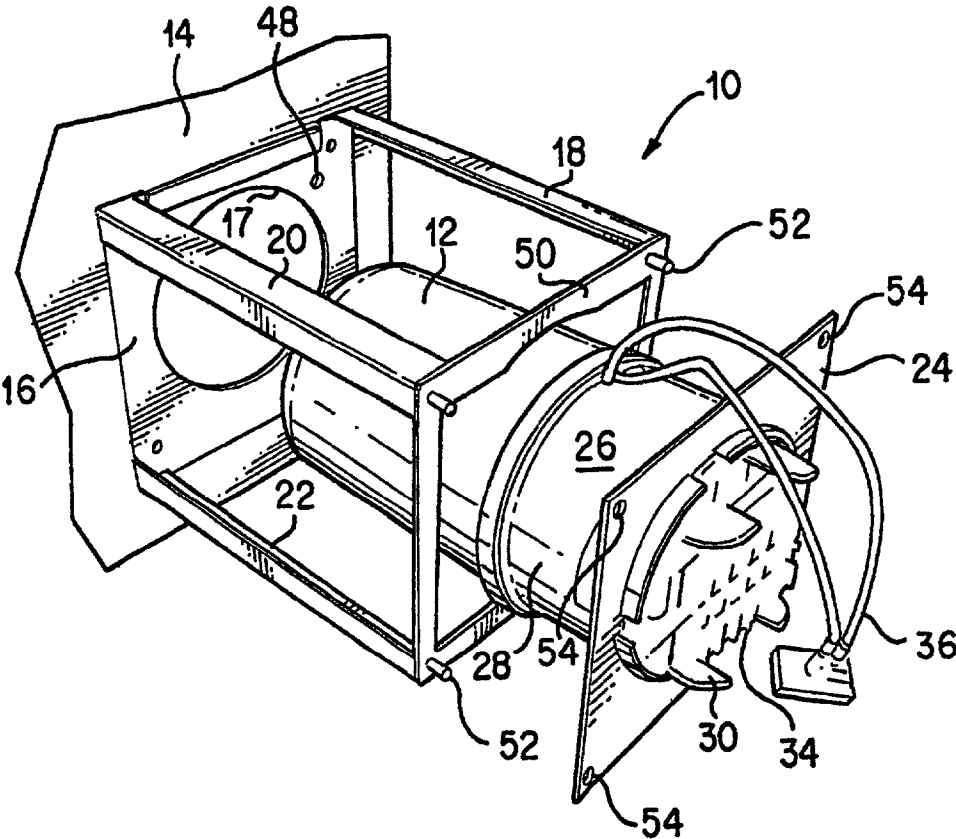


FIG. 1

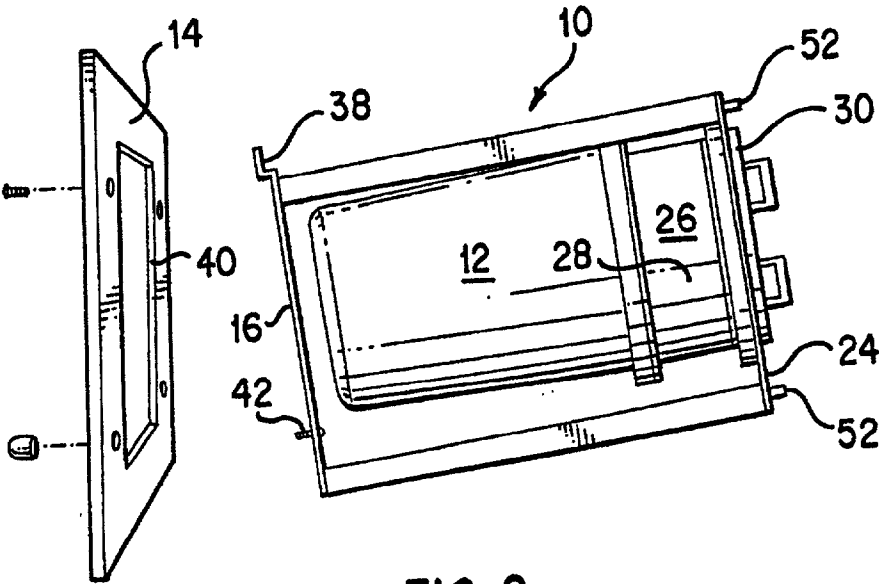


FIG. 2

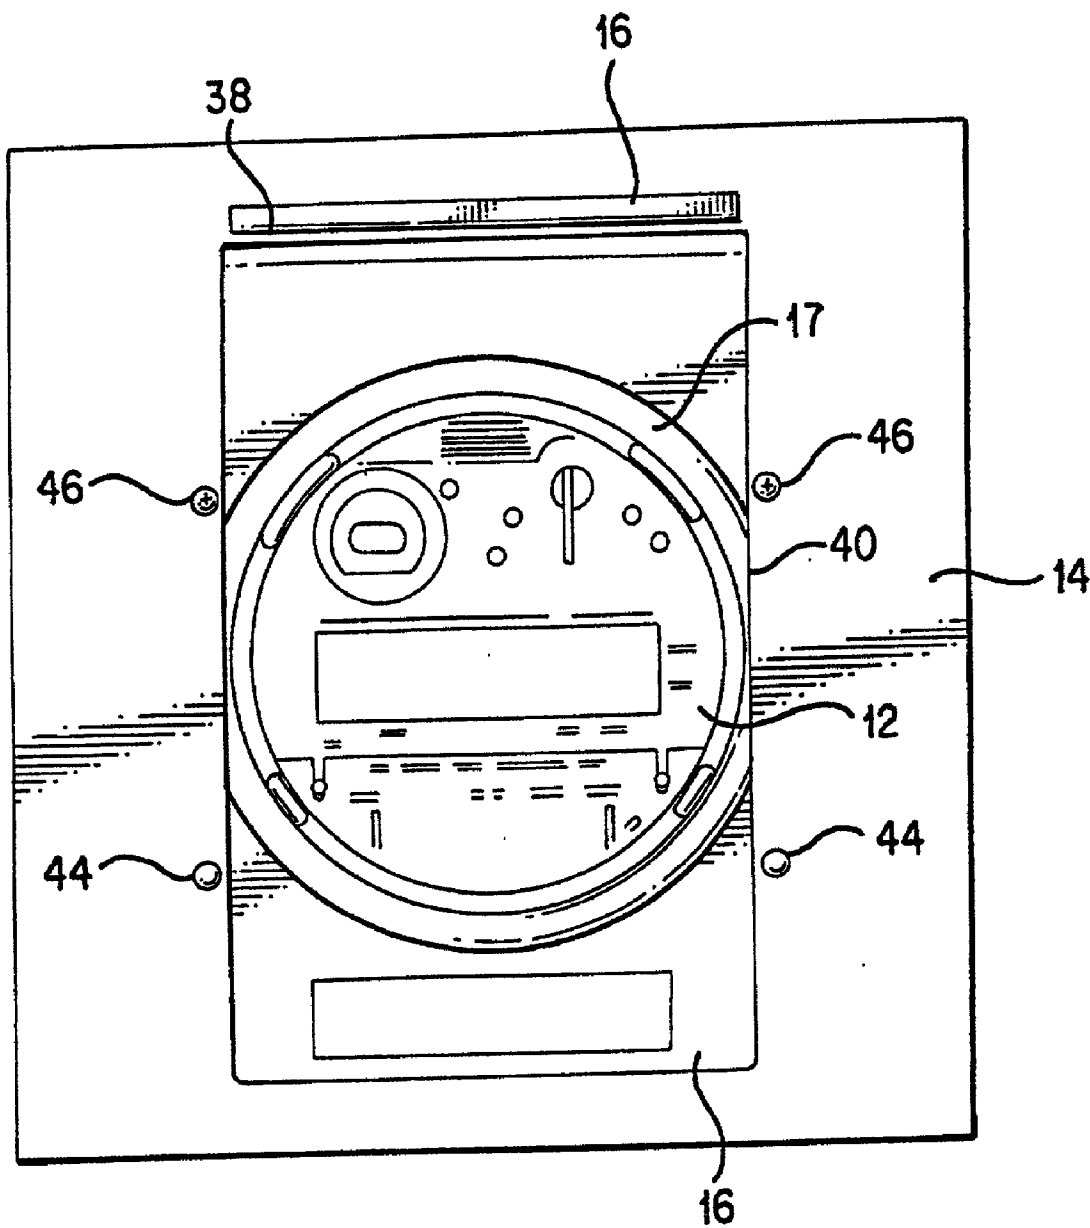


FIG. 3

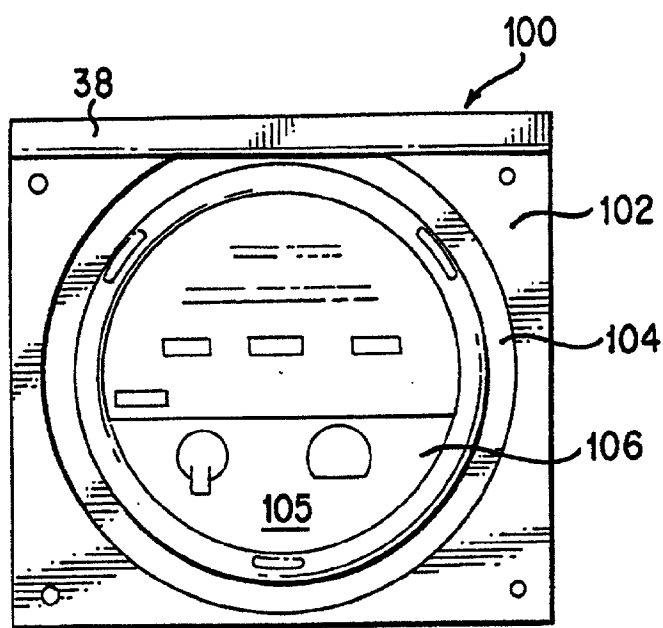


FIG. 4

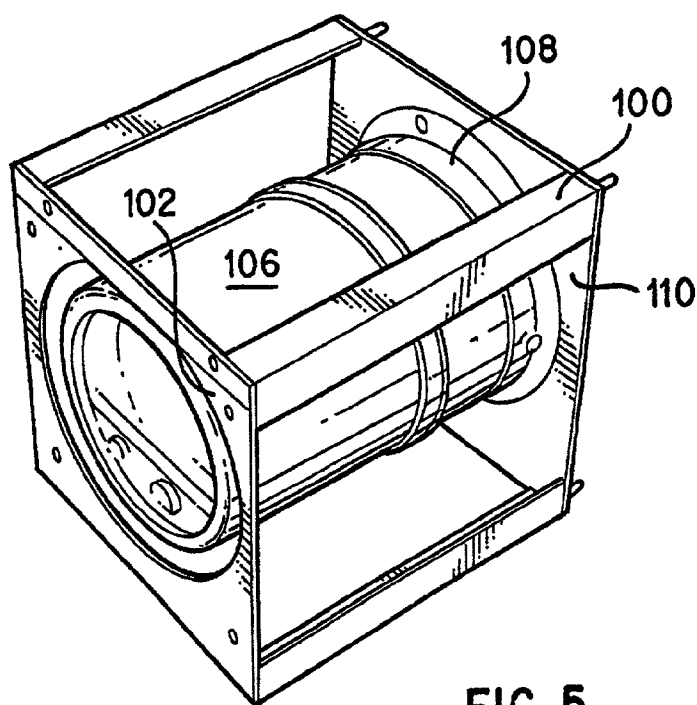


FIG. 5

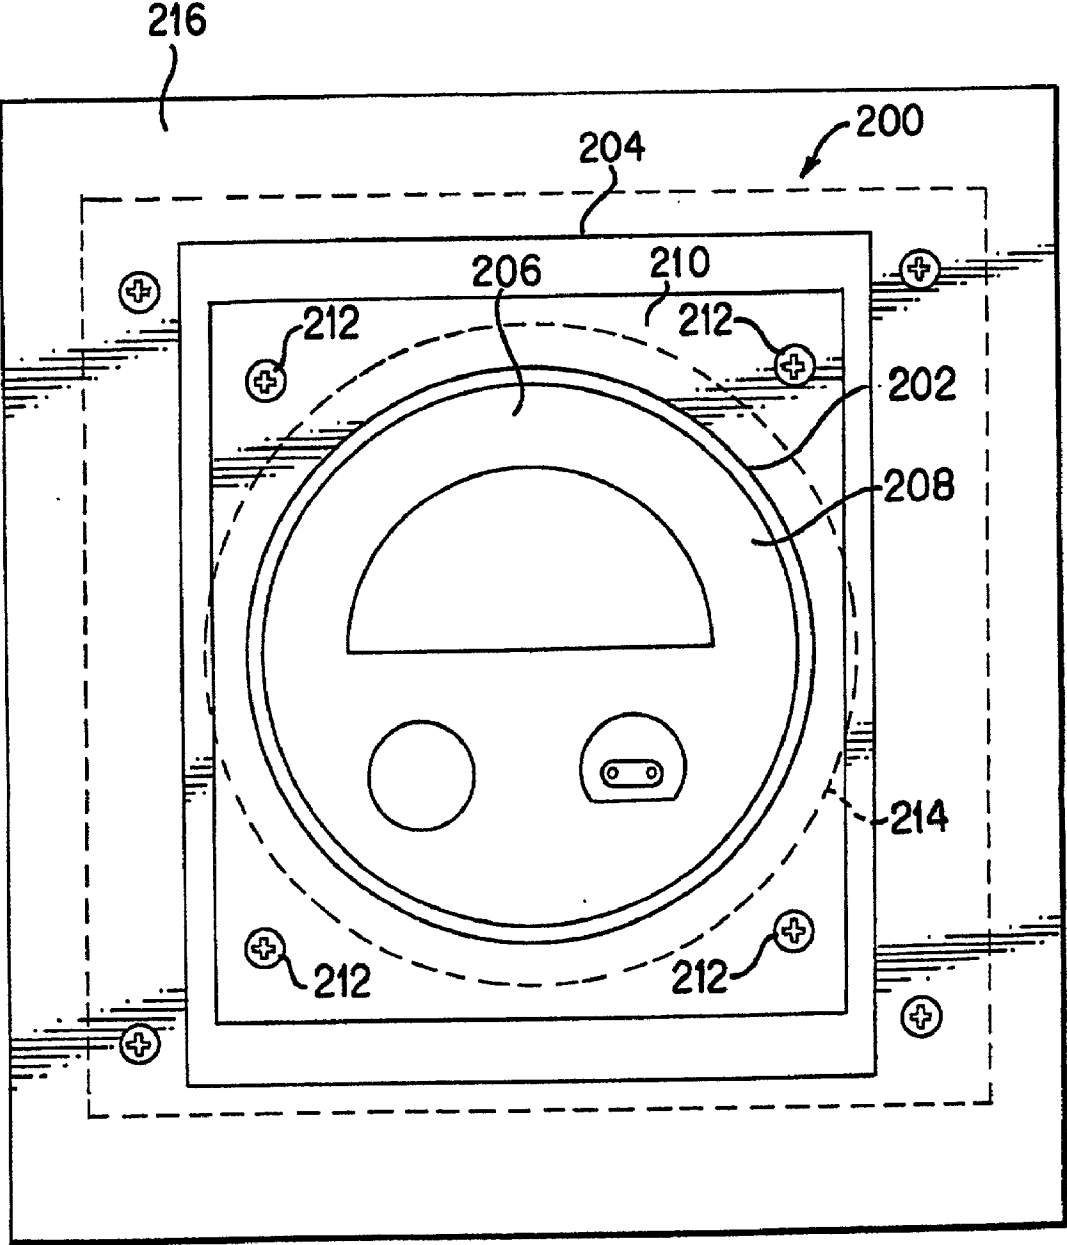


FIG. 6

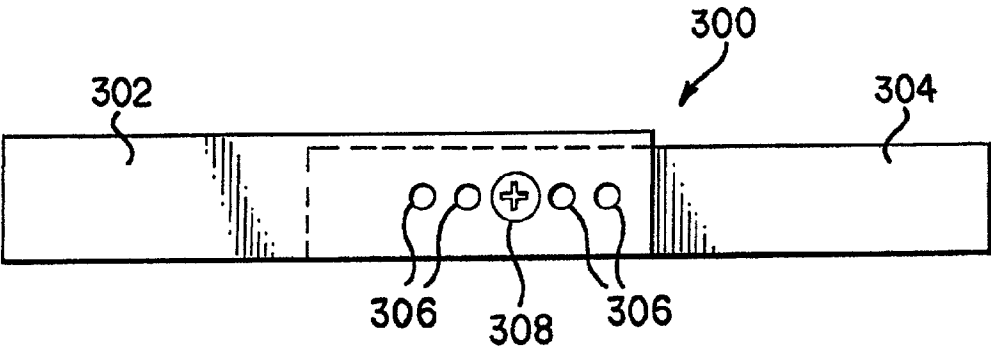


FIG. 7

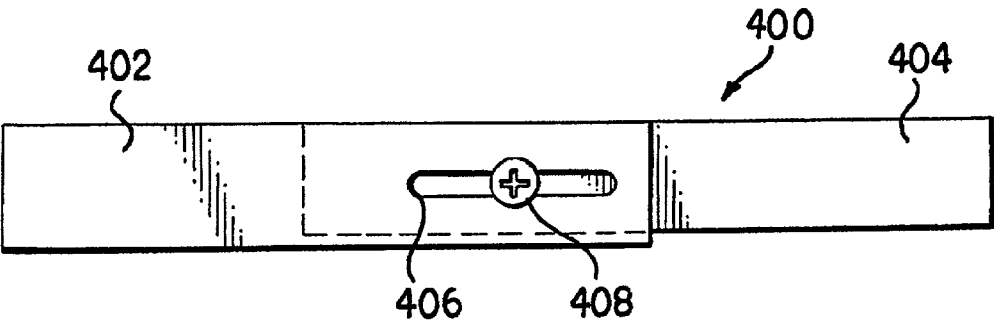


FIG. 8

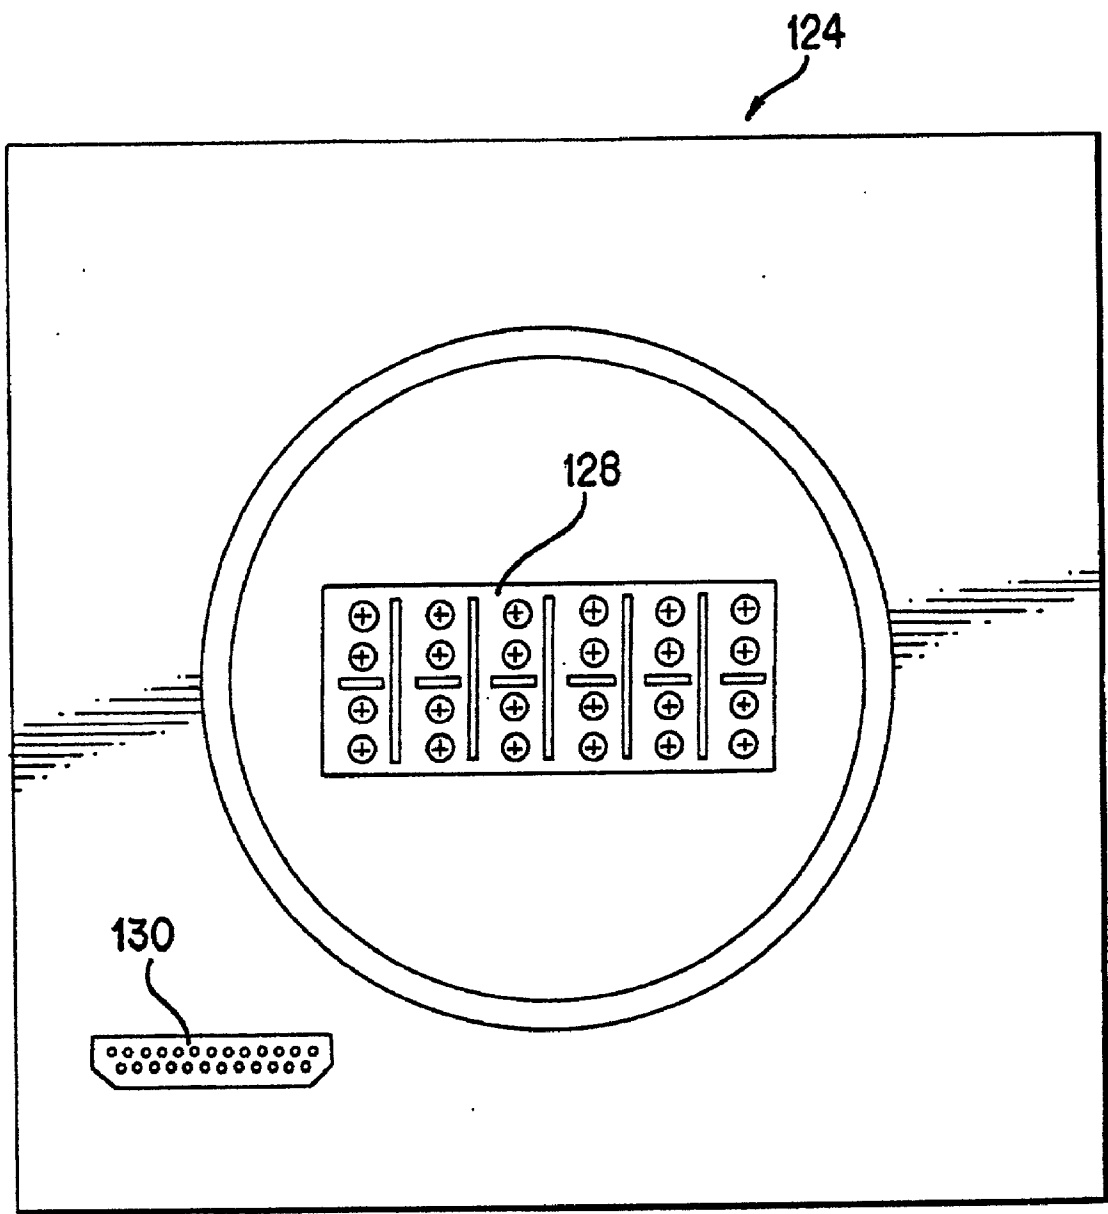
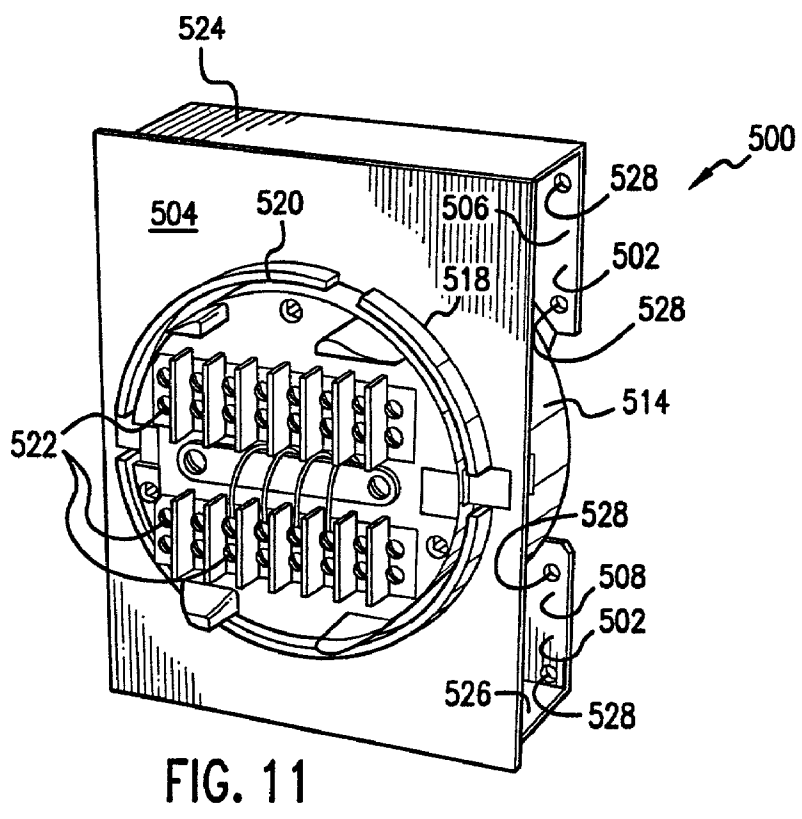
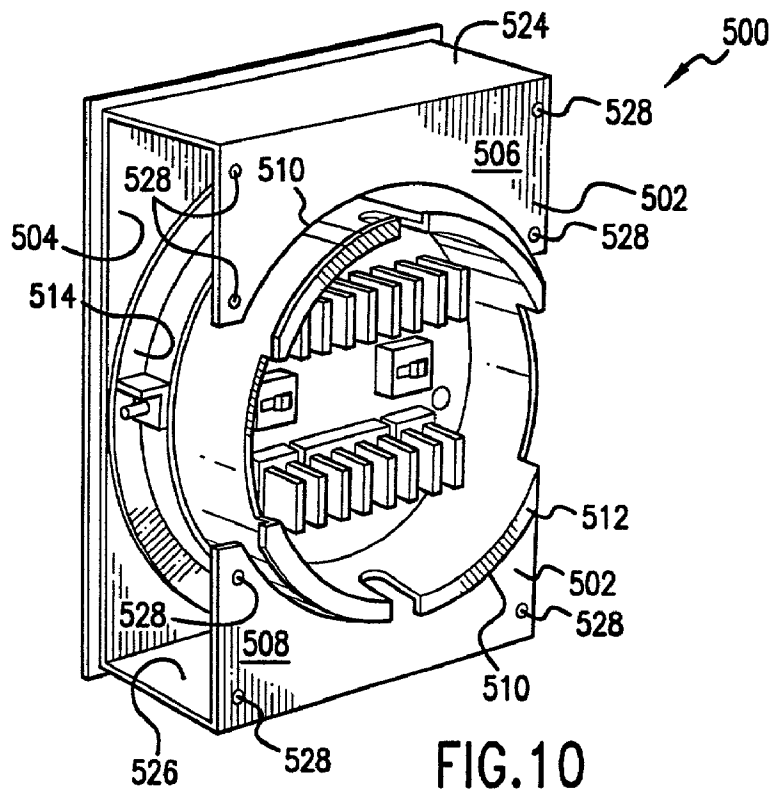


FIG. 9



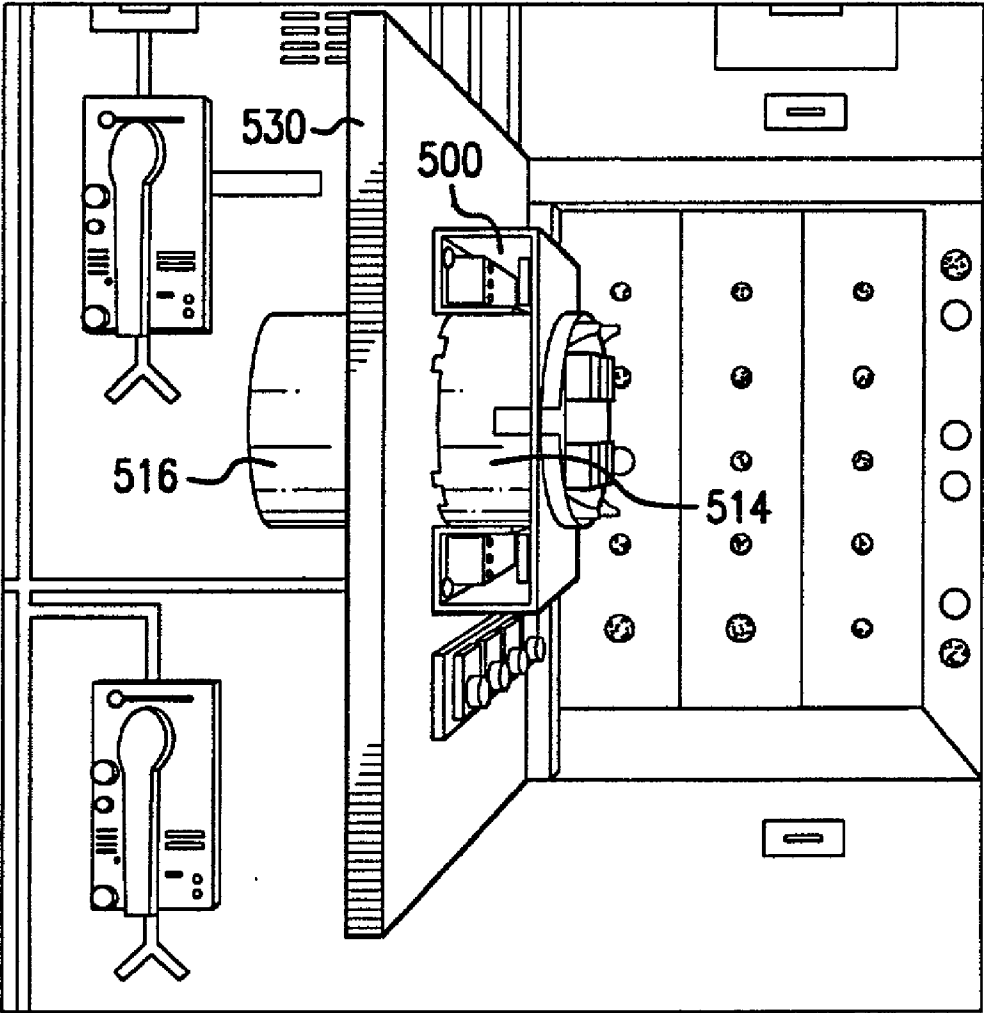


FIG. 12

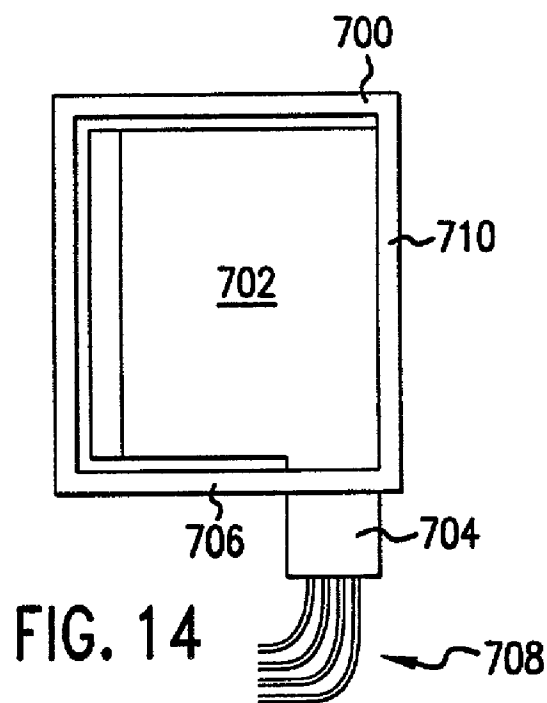
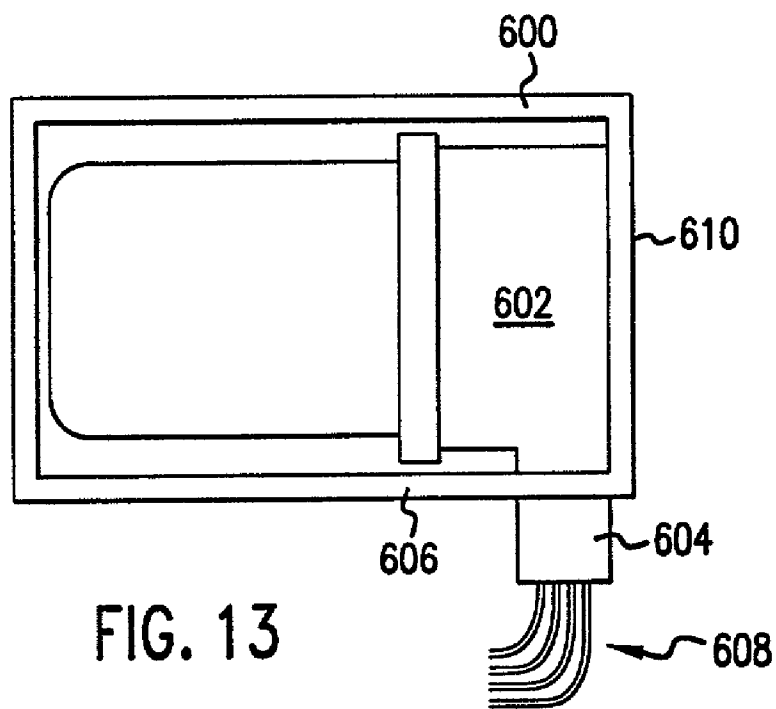


FIG. 15

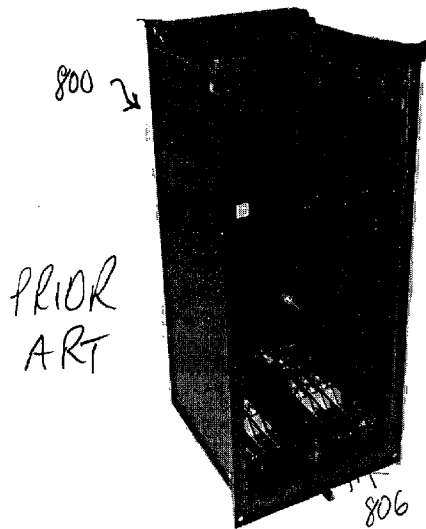


FIG. 18

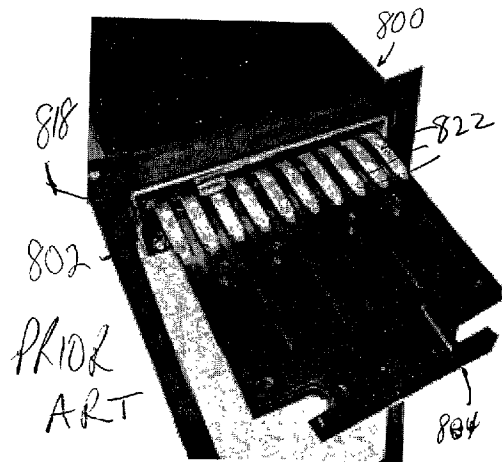


FIG. 16

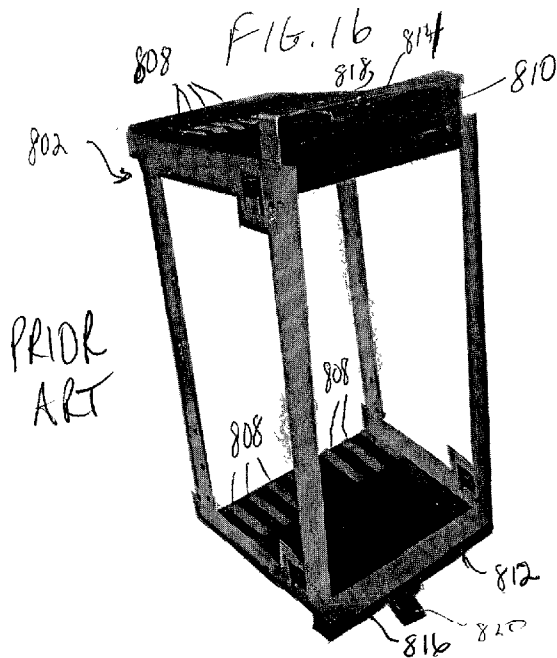


FIG. 17



FIG. 19

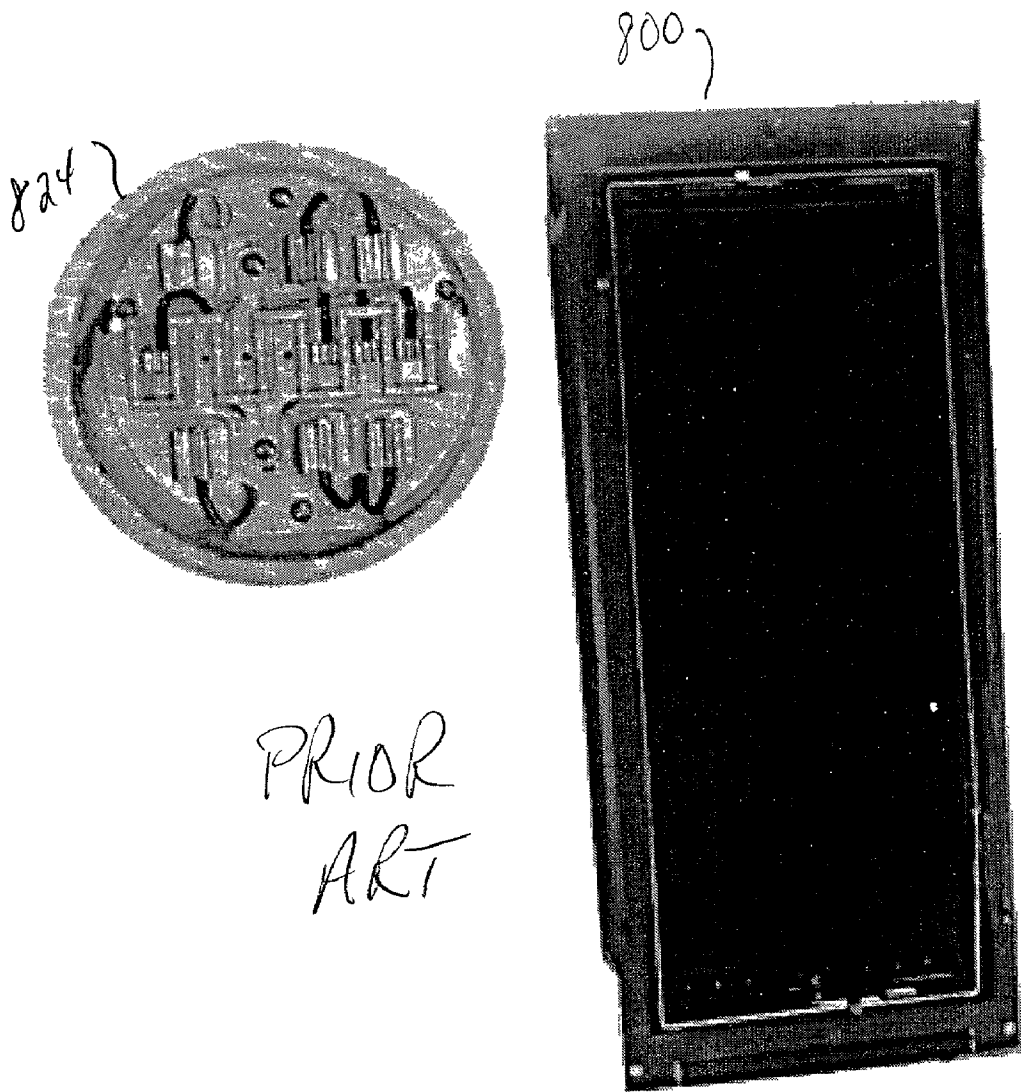


FIG. 20

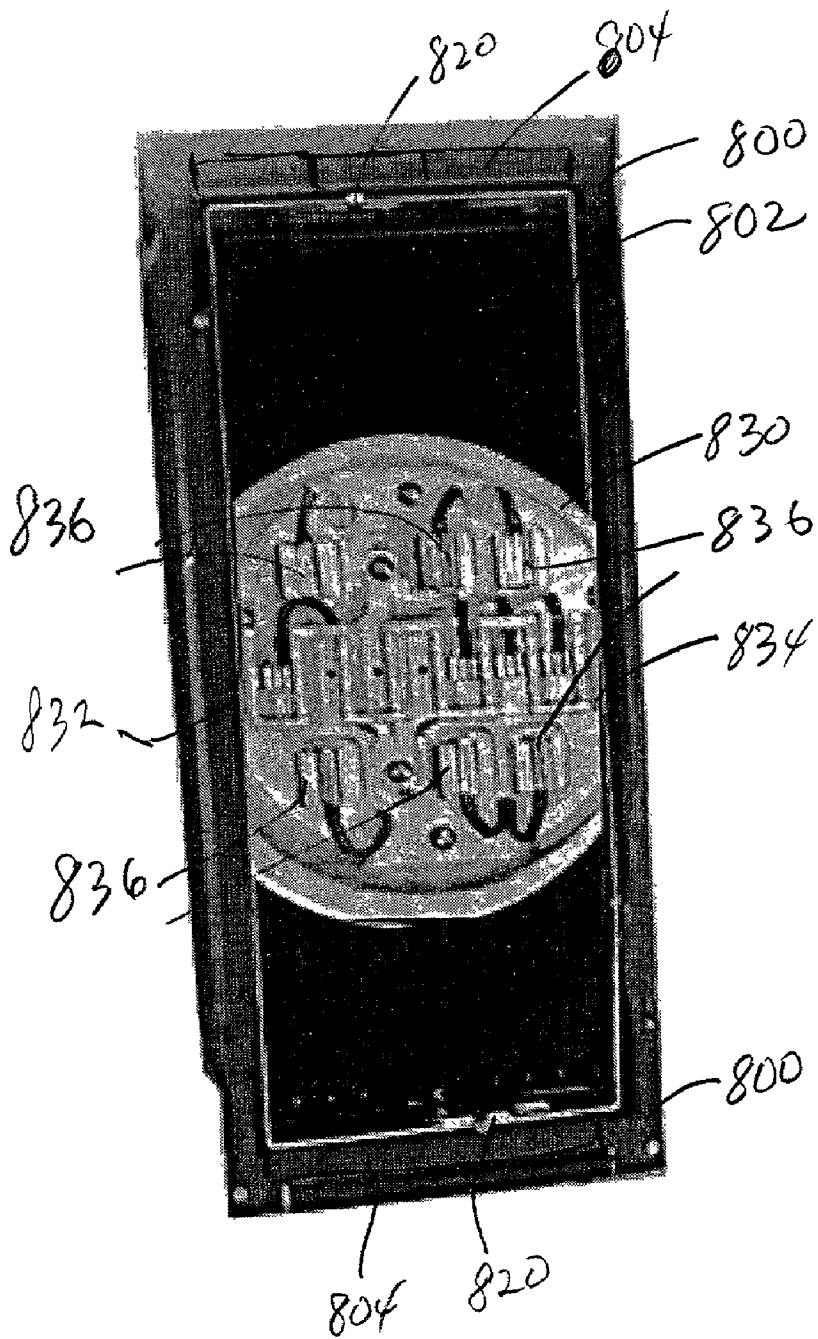


FIG. 21


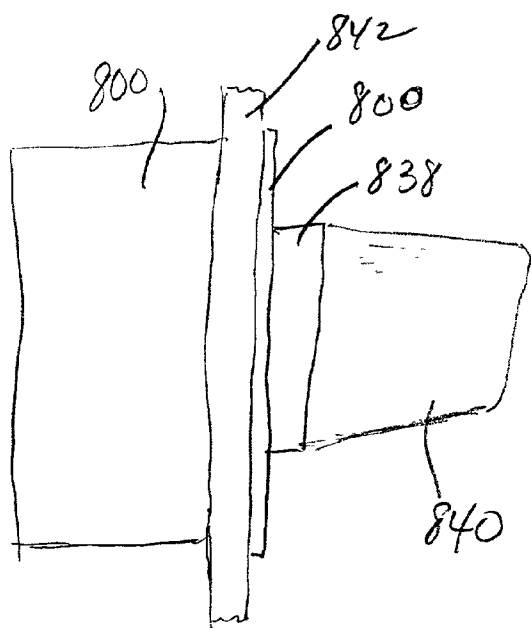


FIG. 22

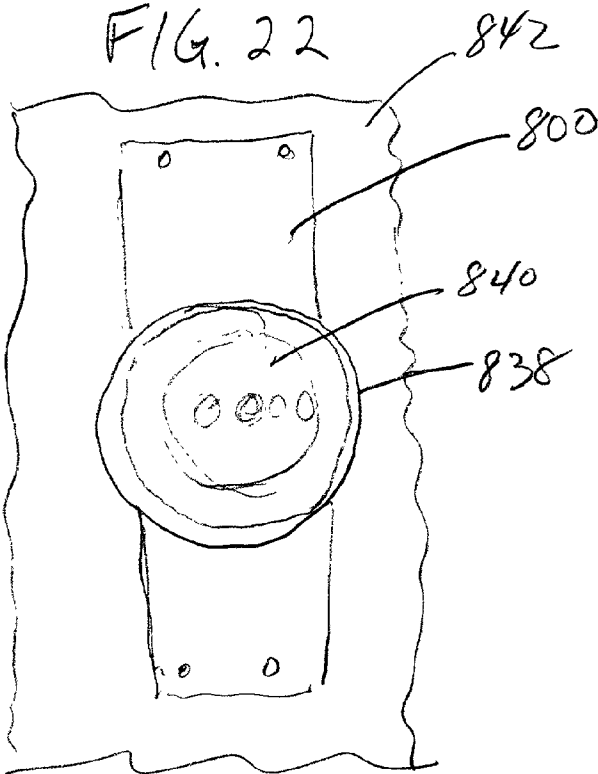

ADAPTER FOR CONVERTING A SWITCHBOARD CASE FOR USE WITH A SOCKET MOUNTED ELECTRICITY METER

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] The present application is a continuation-in-part of U.S. patent application Ser. No. 09/630,131, filed Aug. 1, 2000, now U.S. Pat. No. 6,259,956 entitled SURFACE MOUNTED PANEL ADAPTER FOR A SOCKET MOUNTED ELECTRICITY METER, issued Jul. 10, 2001, which was a continuation-in-part of U.S. patent application Ser. No. 09/238,392, filed Jan. 27, 1999, now U.S. Pat. No. 6,104,601 entitled PANEL ADAPTER FOR A SOCKET MOUNTED ELECTRICITY METER, issued Aug. 15, 2000, which was based upon provisional patent application Ser. No. 60/072,828 entitled PANEL ADAPTER FOR A SOCKET MOUNTED ELECTRICITY METER, filed Jan. 28, 1998.

BACKGROUND OF THE INVENTION

[0002] The present invention relates to electricity meters. In particular, the present invention relates to an adapter which can be used to enable a standard socket mounted electricity meter to be used in place of a switchboard meter.

[0003] As is known by those skilled in the electrical metering arts, socket mounted meters are used in numerous locations. As used herein, the term "socket mounted meter" is intended to mean an electricity meter which is intended to be mounted in a base. Common examples of socket mounted meters are those electricity revenue meters which are found on the sides of homes and commercial buildings and in substations.

[0004] As used herein, the term "switchboard" is used to refer to a relatively large, flat panel which has metering equipment mounted thereon, or more typically, therethrough, such that the metering equipment may be viewed from the front. However, the electrical connections to the panel mounted meters are made at the rear of the switchboard panel.

[0005] Due to the nature of a switchboard, in which the intent is to maintain a relatively flat frontal appearance, a class of metering equipment, called small case meters have been designed to mount either on, or through, switchboards in order to be able to have only their display portions, or a relatively small portion of the meter, exposed on the front side of the meter.

[0006] Another factor which is present in typical small case meters, of the type intended for use on a switchboard, is that they are generally adapted to be mounted from the front, and they are thereafter wired from the rear, enabling a single person to be able to both mount and wire them.

[0007] Heretofore the different physical configuration of a socket meter, in which the meter is significantly longer than what would be desired to extend through the panel prevented standard meters from being used, also, as switchboard meters. The present invention provides an apparatus which allows a standard socket meter to be used as a switchboard meter, so it is not necessary to store both socket meters and switchboard meters. A socket meter used with the present

invention, as a switchboard meter, can readily be removed and used as a standard socket meter.

[0008] While a number of adapters have been described by the present inventor, as set forth in U.S. Pat. Nos. 6,259,956 and 6,104,601, problems not heretofore addressed involve situations in which a meter is required to replace an existing switchboard meter. In such situations the issue of removing the existing switchboard meter and rewiring an adapter to replace the existing case become significant factors. In many situations the old switchboard meters were wired using asbestos covered wire, so merely accessing and rewiring often entails the need to bring in remediation personnel to deal with the asbestos wiring. Further, any time a meter is disconnected, the need to cut off service and the need to confirm the proper reconnection of the new adapter will be present. As the review of the wiring, called an "audit", may require the presence of different personnel than those who did the actual wiring, the whole issue of replacing the switchboard meter which was already in place with a socket meter becomes one of comparing the high cost of a replacement switchboard meter, with the higher cost of labor. Nevertheless, the labor, once performed, would not have to be repeated when the meter, again, required replacement, so the adapters described in the foregoing patents remain a viable alternative, particularly, when asbestos removal is not, also, an issue.

[0009] Nevertheless, in asbestos wiring situations, and in situations in which rewiring costs are exceptionally high, the replacement of a switchboard meter with another switchboard meter remained a viable option. Accordingly, another approach to replacing a switchboard meter with a socket meter, not involving removal and rewiring of the existing switchboard case would be desirable.

BRIEF DESCRIPTION OF THE DRAWING

[0010] In the drawing:

[0011] FIG. 1 illustrates a perspective view, showing the present invention, and illustrating how a socket meter is mounted in it;

[0012] FIG. 2 illustrates the manner of mounting the present invention, together with a socket mounted therein, in a switchboard;

[0013] FIG. 3 illustrates a front view of a switchboard showing how a socket meter appears when viewed from the front of the switchboard when the present invention is used to mount it;

[0014] FIG. 4 illustrates a front view of a second embodiment of the present invention which allows a socket meter to be mounted from the front of the panel; and

[0015] FIG. 5 illustrates a perspective view of the embodiment of FIG. 4 showing how a socket meter appears when mounted in that embodiment of the invention;

[0016] FIG. 6 illustrates a front view of a third embodiment of the present invention which allows a socket meter to be mounted from the front of the panel, but which does not expose a large opening when the meter has been installed;

[0017] FIG. 7 illustrates a side view of a first embodiment of an adjustable leg design for the adapter of the present invention;

[0018] FIG. 8 illustrates a side view of a second embodiment of an adjustable leg design for the adapter of the present invention;

[0019] FIG. 9 is a rear view of the rear wall of an alternative embodiment of the adapter of the present invention;

[0020] FIG. 10 is a front perspective view of a surface mount panel adapter in accordance with the present invention;

[0021] FIG. 11 is a rear perspective view of the surface mount panel adapter of FIG. 10;

[0022] FIG. 12 is a perspective view of the surface mount panel adapter of FIG. 10, as installed on a switchboard;

[0023] FIG. 13 is a side view of the embodiment of FIGS. 1-8 illustrating a meter socket which does not use terminal blocks mounted on its rear surface;

[0024] FIG. 14 is a side view of the embodiment of FIGS. 10-12 illustrating a meter socket which does not use terminal blocks mounted on its rear surface;

[0025] FIG. 15 is a perspective view of a switchboard case, of the type known in the prior art;

[0026] FIG. 16 is a perspective view of a switchboard cradle, of the type known in the prior art, which is used with the switchboard case shown in FIG. 15;

[0027] FIG. 17 is a perspective view of a connecting paddle, of the type known in the prior art;

[0028] FIG. 18 is a perspective view, showing how the connecting paddle of FIG. 17 is inserted between the switchboard case of FIG. 15 and the switchboard cradle of FIG. 16, when they are assembled, whereby electrical connections between them are completed;

[0029] FIG. 19 is a perspective view of a switchboard case, of the type known in the prior art, along with a socket meter, of the type known in the prior art;

[0030] FIG. 20 is a perspective view of the adapter of the present invention;

[0031] FIG. 21 is a side view showing a socket meter mounted in the adapter of the present invention; and

[0032] FIG. 22 is a front view showing a socket meter mounted in the adapter of the present invention.

DETAILED DESCRIPTION OF THE EXEMPLARY EMBODIMENTS

[0033] Referring first to FIG. 1, a first embodiment 10 of the panel adapter of the present invention is shown. As shown, the panel adapter 10 allows a standard socket mounted meter 12 to be mounted in a switchboard 14. The panel adapter 10 is comprised of a front wall 16 having an opening 17, formed therein. The face 19 of the meter 12 will be visible through the opening 17, when the meter 12 is installed in the adapter 10, as shown in FIG. 3. As shown in FIG. 3, the face 19 of the meter 12 will be substantially flush with the front of the switchboard 14, following installation. As used herein, the term "substantially flush" is intended to mean that the face 19 of the meter 12 can protrude somewhat through the switchboard 14, or that it can be coplanar with

the front of the switchboard 14, or that it can be somewhat behind the front of the switchboard 14.

[0034] With continued reference to FIGS. 1 and 2, the front wall 16 has four legs attached to it, of which three of the legs 18, 20, 22, are visible in FIG. 1. The adapter 10 further includes a rear wall 24, on which a meter socket 26 is mounted. As shown in FIG. 1, the meter socket 26 has a socket portion 28, to which the meter 12 is attached, and a connection portion 30, which extends to the rear of the rear wall 24. At the rear of the connection portion 30, there are terminal blocks 34 used to make electrical connections to the meter 12. The meter socket 26, in the preferred embodiment of the invention, is wired with an input/output cable 36 which may be used to provide pulse outputs from the meter 12 to a data recorder or other device. Alternatively, the input/output cable 36 may be used for serial communications between the meter 12 and an external device (not shown).

[0035] With continued reference to FIGS. 1-3, the front wall 16 optionally includes an elongated hook 38, which is narrower than the width of the front wall 16, and which is offset from the remainder of the front wall 16, so that the hook 38 can extend through the cut-out opening 40 in the switchboard 14 (See FIG. 3).

[0036] The panel adapter 10 of the first embodiment of the invention is easily used by a single installer, even though installation must be accomplished from both sides of the switchboard 14. From the rear of the switchboard 14, the hook 38 on the front wall 16 of the adapter 10 is placed through the cut-out 40. This can be accomplished with the meter 12 installed, as shown in FIG. 2, or with the rear wall 24 removed from the adapter 10. As shown in FIG. 2, in the preferred embodiment of the invention, there are a pair of threaded lugs 42, which are placed through openings 44 in the switchboard 14. The installer then goes to the front of the switchboard (See FIG. 3) where he installs threaded nuts 44 on the lugs 42. Also, screws 46 are inserted through additional openings and screwed into threaded openings 48 (which may be trapped nuts, as shown in FIG. 1) on the front wall 16.

[0037] Next, the installer returns to the rear of the switchboard 14, where he installs the rear wall 24 (with the meter 12 already in the socket 26) to the rear frame 50, using threaded lugs 52, which extend through openings 54 on the rear wall 24, as shown in FIG. 1. Wing nuts or other nuts (not shown) are used to install the rear wall 24 to the rear frame of the adapter 10.

[0038] The adapter 10 of the present invention can have legs which are of different lengths to adapt meters 12 of different lengths. Hole patterns, openings, and the length of the hook 38 are based upon the openings and hole patterns in standard switchboards, but they may be varied, as needed. The adapter 10 is preferably made of powder coated steel, having a typical thickness of about 1/8 inch, although other materials can be used without departing from the present invention.

[0039] Referring now to FIG. 4, a front view of an alternative embodiment 100 of the invention is shown. In this embodiment 100, the front wall 102 of the adapter 100 has an opening 104 formed therethrough which preferably has a diameter of approximately 1.5 inches larger than the

diameter of the face **105** of the meter **106** which is installed using the adapter **100**. This larger opening **104** (relative to the opening **17** in the embodiment **10** shown in FIGS. 1-3) enables the user to remove the socket meter **106** from the front (i.e., through the opening **104**), as well as from the rear of the switchboard **14**, as is done when using the adapter **10** of the first embodiment (See FIG. 1) illustrated in FIGS. 1-3. In the adapter **10** of the first embodiment the socket meter **12** can be installed and removed only from the rear of the switchboard **14**, by removing the rear wall **24** (See FIG. 1).

[0040] In view of the fact that the embodiment **100** permits the socket meter **106** to be mounted from the front of the switchboard, rather than from the rear of the switchboard, it is not necessary, when using the embodiment **100** to mount the meter **106** and its associated socket **108** to the rear wall **110** of the adapter **100** prior to mounting the adapter **100** to the rear of the switchboard, as it was necessary to mount the meter **12** along with its associated socket **26** to the rear wall **24** of the adapter **10** of the first embodiment (See FIGS. 1 and 2) before mounting the adapter **10** of the first embodiment to the rear of the switchboard. Instead, the socket **108** is mounted to the rear wall **110** of this embodiment of the adapter **100** with the meter **106** either installed or not installed. If the meter **106** has not been installed when the adapter **100** is mounted to the switchboard, then the meter **106** may be installed through the opening **104** in the front **102** of the adapter **100**. Of course, even if the meter **106** is installed from the rear of the switchboard, this embodiment of the adapter **100** permits the meter **106** to be removed and/or replaced from the front of the switchboard, whereas the adapter **10** of the first embodiment requires removal of the rear wall **24** each time a meter **12** is installed or removed.

[0041] Referring to FIG. 6, an adapter **200** of yet another alternative embodiment of the of the present invention is shown. In the adapter **200**, the opening **202** in the front wall **204** of the adapter **200** is substantially the same diameter as the face **206** meter **208**. However, in the adapter **200**, the front wall **204** includes a removable face plate **210**, which is shown as being attached to the front wall **204** by a screws **212**. Beneath the removable face plate **210** there is another, larger opening **214** (shown in shadow). While the opening **214** is shown as being round, it can be rectangular or other suitable shape without departing from the concept disclosed with respect to this embodiment **200** of the invention, which is that the removable face plate **210**, can be removed from the front wall **204** of the adapter **200**, by removing the screws **212**. With the face plate **210** removed, the larger opening **214** is exposed, and the meter **208** can be installed, removed, or replaced from the front of the switchboard **216** as could be done with the embodiment **100** of the adapter, as shown in FIG. 4.

[0042] Another modification shown in the embodiment **200**, but which could be used in any of the embodiments of the adapter is the absence of the hook **38** shown in FIGS. 2 and 3.

[0043] Referring now to FIGS. 7 and 8, still other variations on the present invention are shown. In particular, while the embodiment **10** shown in FIGS. 1, 2, and 5, was shown as having legs which had a fixed length, there are meters which have different lengths. Accordingly, in order to pro-

vide an adapter which can be used with various meters, it is necessary to manufacture different adapters which have legs having different fixed lengths. In order to minimize costs while retaining manufacturing flexibility, it may be desirable to provide adapters having legs whose lengths can be varied. This can be accomplished by providing adapters with an adjustable leg configuration, as shown in FIGS. 7 and 8.

[0044] In FIG. 7, the adjustable leg **300** is comprised of a first leg portion **302** and a second leg portion **304**. The first leg portion **302** includes a series of fixed openings **306** which are spaced from one another, while the second leg **304** portion includes at least one tapped opening which can be used to receive a screw **308**. Alternatively, there can be one or more openings in the first leg portion **302**, and the second leg portion can include a number of tapped openings. In either case, by selecting a suitable opening **306** in the first leg portion, and matching it with a suitable tapped opening in the second leg portion **304**, the overall length of the leg **300** can be readily adjusted.

[0045] Similarly, with reference to FIG. 8, an adjustable leg **400** is comprised of a first leg portion **402** and a second leg portion **404**. The first leg portion **402** includes an elongated opening **406**, while the second leg portion **404** includes a tapped opening which can be used to receive a screw **408**. The overall length of the leg **400** can be adjusted by sliding the leg portions **402**, **404**, and then tightening the screw **408** when a suitable length has been achieved.

[0046] As described above with reference to FIG. 1, the rear wall **24** of the adapter **10** has a meter socket **26** mounted to it. The meter socket **26** includes a connection portion **30** to which electrical connections to the meter **12** are made when the meter **12** is in the adapter **10**. An input/output cable **36** connected to the meter **12** is shown as being separate from the rear wall **24**. As it may be desirable to avoid having a loose cable, FIG. 9 illustrates an alternative rear wall **124** which includes the standard connectors **128**, but which also includes a panel mounted input/output connector **130** which is mounted to the rear wall **124** in order to avoid the loose cable. Instead, the front portion of the rear wall **124** includes a connector (not shown) to which the input/output cable **36** is connected, and the panel mounted input/output connector **130** provides data accessibility, without the need for a loose cable as in FIG. 1.

[0047] Referring now to FIGS. 10-12, another embodiment of the present invention, in the form of a surface mount panel adapter **500**, is shown. As shown, the surface mount panel adapter **500** includes a front wall **502** and a rear wall **504**. As illustrated, the front wall **502** in the preferred embodiment **500** has an upper portion **506** and a lower portion **508**, with the two portions **506**, **508** being separated by an opening **510** formed therethrough (See FIG. 10). In the surface mount panel adapter **500** of the preferred embodiment, the opening **510** has a size and configuration which is slightly larger than the size of the front **512** of a meter socket **514** mounted in the panel adapter **500**, which meter socket **514** is intended to be used to mount a socket meter **516** (See FIG. 12) which is intended to be mounted in the panel adapter **500**.

[0048] With continued reference to FIGS. 10-12, the front wall **502** of the preferred embodiment of the surface mount panel adapter **500** includes an opening **518** having a size and configuration which is adapted to expose the rear portion

520 of the meter socket **514** which is mounted therein. As shown in **FIG. 11**, the rear portion of the meter socket **520** typically includes a number of terminal blocks **522** which are used to make connections to the meter socket **514** (and, ultimately, to a meter installed therein).

[0049] As illustrated, the preferred embodiment of the surface mount panel adapter **500** is formed of a single piece of metal. Accordingly, the upper portion **506** of the front wall **502** is connected to, and spaced from, the rear wall **504** by an upper leg **524**. Similarly, the lower portion **508** of the front wall **502** is connected to, and spaced from, the rear wall **504** by a lower leg **526**. As the purpose of the legs **524**, **526** is to provide spacing between the front wall **502** and the rear wall **504** it is not necessary for the legs **524**, **526** to be solid sheets, as shown. Alternatively, these legs could be in the form of individual legs (See legs **18**, **20**, **22** in **FIG. 1**). They could also be made adjustable, as illustrated in **FIGS. 7** and **8**.

[0050] The surface mount panel adapter includes means, such as the tapped openings **528**, which may be used, together with screws, for mounting the surface mount panel adapter **500** to a switchboard panel **530** (See, **FIG. 12**).

[0051] In use, the surface mount panel adapter **500** includes a meter socket **514** mounted in it, and it is mounted to a switchboard, as shown in **FIG. 12**. This exposes the front **512** of the meter socket **514** through the front of the switchboard panel, so that a socket meter **516** can simply be plugged into the meter socket **514**. The terminal blocks **522** on the rear portion **520** of the meter socket **514** are used to make electrical connections to the meter socket **514**.

[0052] While the preferred embodiment of the surface mount panel adapter **500** is constructed of a single piece of metal which has been folded to form the front and rear walls **502**, **504**, and the spacing upper and lower legs **524**, **526**, it is possible to form the device in separate parts, to mold it from a plastic material, or otherwise form it, so long as it maintains the relationships set forth herein so that it can be used to mount a meter socket. Thus, while the front wall **502** is formed in two portions, with the "opening" **510** formed therebetween, the specific format used in the preferred embodiment could be modified without departing from the inventive concept described. For example, if the front wall was formed of a single piece of material, the opening formed therein would be circular in shape. In such case, the rear wall could be discontinuous, or the legs could be removable or adjustable, to allow the mounting of the meter socket.

[0053] As will be obvious to those skilled in the art, the use of the surface mount panel adapter **500** in connection with a switchboard **530** provides a unique way to retrofit the switchboard **530** such that a meter **516** is mounted on the front surface of the switchboard **530**, rather than in the rear of the switchboard **530**.

[0054] While a number of designs for the present invention have been disclosed, those skilled in the art will recognize that other design differences may be utilized without departing from the scope of the present invention. Thus, while meter sockets have been shown in which the terminal blocks extend out of the rear of the meter socket, thereby requiring an opening in the rear wall of the panel adapter, other types of meter sockets exist, and are well known to those skilled in the metering arts in which the

terminal blocks are formed in the bottom of the meter socket. Thus, with reference to **FIG. 13**, a panel adapter **600**, having a meter socket **602** mounted thereon, is shown. The meter socket **602** includes a portion **604** containing the socket's terminal blocks which extends downward beneath the leg **606**, so that the wires **608** connecting the socket **602** to the terminal blocks do not extend through the rear wall **610** of the panel adapter **600**.

[0055] Similarly, a surface mount panel adapter **700** is shown in **FIG. 14**, in which a meter socket **702** is mounted thereon. The meter socket **702** includes a portion **704** containing the socket's terminal blocks which extends downward beneath the leg **706**, so that the wires **708** connecting the socket **702** to the terminal blocks do not extend through the rear wall **710** of the panel adapter **700**.

[0056] Referring now to **FIGS. 15-18**, a switchboard case **800**, of the type known in the prior art, is shown in **FIG. 15**; a switchboard cradle **802** is shown in **FIG. 16**; a connection paddle **804** is shown in **FIG. 17**; and the assembly of the switchboard case **800**, the switchboard cradle **802**, and the connection paddle **804** is shown in **FIG. 18**. Switchboard cases are used for mounting devices, such as power relays and switchboard meters, in switchboard panels. Basler Electric, located in Highland, Ill., is a manufacturer of switchboard cases, such as the switchboard case **800**; switchboard cradles, such as the switchboard cradle **802**; and connection paddles, such as the connection paddle **804**.

[0057] As will be understood by those skilled in the art, the switchboard case **800** is mounted on the switchboard panel (not shown), and it is wired to the service located behind the switchboard panel. A device, such as a switchboard meter or power relay is mounted in the switchboard cradle **802**, and then the switchboard cradle **802** is slid into the switchboard case **800**. There are a series of contact strips **806** at the bottom and top of the switchboard case **800**, and there are similar contact strips **808** at the bottom and top of the switchboard cradle **802**. When the switchboard cradle **802** is slid into the switchboard case **800**, there is a space **810** above the switchboard cradle **802** (See, **FIGS. 16** and **18**), and a similar space **812** below the switchboard cradle **802** (See, **FIG. 16**) between the connection strips **806**, **808**, which prevents them from making contact with each other. The spaces **810**, **812** can be seen in **FIG. 16**, as the spaces between the upper and lower cradle bars **814**, **816** and the main body of the switchboard cradle **802**. As illustrated, the upper and lower cradle bars **814**, **816** also include latches **818**, **820** which are used to retain the switchboard cradle **802** in the switchboard case **800**. As will also be understood by those skilled in the art, a pair of connection paddles **804** is then inserted in the spaces **810** (See, **FIG. 18**) and **812**. The connection paddles **804** each have a series of connection strips **822** which wrap around their distal end for making electrical contact between the connection strips **806**, in the switchboard case **800**, and the connection strips **808**, in the switchboard cradle **802**, whereby the electrical device (e.g., the meter or relay) in the switchboard cradle **802** is electrically connected to the service when the connection paddles **804** are inserted.

[0058] With reference to **FIG. 19**, the problem which has heretofore existed in mounting a socket meter in an existing switchboard case **800** can be explained. A standard socket **824** for a socket meter is simply too wide in diameter to be

retrofitted into the opening in a switchboard cradle. Here-
tofore, those skilled in the art have simply assumed that
given the diameter of the socket **824**, and the diameter of a
standard socket meter, the only way to place a meter in
service was to use a switchboard meter, designed to fit inside
of a switchboard cradle **802**, or to retrofit a socket meter as
described in U.S. Pat. Nos. 6,259,956 and 6,104,601. In
those instances where retrofitting would require asbestos
remediation, or in those instances where the labor involved
in wiring and auditing is expensive, it has generally been
thought that the most economical approach to replacing a
switchboard meter, is simply to replace it with another
switchboard meter. However, due to the fact that switch-
board meters are much more expensive than socket meters,
and the fact that spares must be retained, the solution to the
retrofit problem presented by the present invention is highly
desired.

[0059] Referring to FIGS. 20-21, the present invention
uses a modified socket base **830** which is mounted in a
standard switchboard cradle **802**, and electrically connected
to the connection strips **808**, therein. The socket base **830**
differs from the standard socket base **824** of the prior art, in
that its side walls **832**, **834** have been trimmed to permit it
to be mounted inside of the switchboard cradle **802**. Due to
the fact that the diameter of the base **838** of a standard socket
meter **840** (See, FIG. 21) is larger than the width of the
opening in the switchboard case **800** or the opening in the
switchboard cradle **802**, it is necessary to mount the modi-
fied case **830** in the switchboard cradle **802**, so that when the
terminals of a socket meter **840** are fully inserted into the
connectors **836** in the socket base **830**, the meter **840**
remains outside of the panel **842** to which the switchboard
case **800** is attached. Thus, the present invention makes it
possible to convert from a switchboard meter, using a
switchboard case **800**, to a surface mounted socket meter
which uses the same switchboard case **800**, with no rewir-
ing, no service disconnection, no auditing, and now asbestos
remediation.

I claim:

1. An adapter for use in converting a switchboard case for
use with a socket mounted electricity meter, comprising:

- (a) a switchboard cradle adapted to be inserted into and
connected to said switchboard case, said switchboard
cradle having a front opening which is narrower than
the diameter of a socket meter intended to be mounted
to said adapter;
- (b) a meter socket mounted inside said switchboard case,
the external wall of said meter socket having a shape
which allows it to fit within said front opening in said
switchboard cradle, said meter socket being mounted
adjacent said front opening in said switchboard cradle,

whereby terminals which extend from the rear surface of
said socket meter can be fully engaged in said meter
socket while the base of said socket meter overlies said
front opening when said socket meter is mounted in
said meter socket.

2. The adapter of claim 1 wherein said meter socket is
wired to connection strips in said switchboard cradle,
whereby when said switchboard cradle is slid into said
switchboard case, and connection paddles are inserted, a
socket meter mounted in said meter socket will be fully
connected to existing service.

3. A method for retrofitting a socket meter to replace a
switchboard meter in a switchboard case, comprising:

- (a) providing a switchboard cradle which fits said switch-
board case, said switchboard cradle having a front
opening formed therein and a series of connection
strips affixed thereto;
- (b) providing a meter socket which has walls which fit
within said front opening of said switchboard cradle;
- (c) mounting said meter socket in said switchboard cradle
adapter such that said meter socket is inserted into said
opening to a depth which permits the terminals of a
socket meter to be fully inserted into said meter socket
when the rear wall of said socket meter contacts the
outer surface of said switchboard case, such that the
base of said socket meter overlies said front opening in
said switchboard cradle.

* * * * *