



(43) International Publication Date
09 February 2023 (09.02.2023)

(51) International Patent Classification:

H04W 24/02 (2009.01) H04L 41/14 (2022.01)
H04L 41/0803 (2022.01) H04L 41/16 (2022.01)

(21) International Application Number:

PCT/KR2022/011315

(22) International Filing Date:

01 August 2022 (01.08.2022)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

63/228,481 02 August 2021 (02.08.2021) US
17/814,186 21 July 2022 (21.07.2022) US

(71) Applicant: SAMSUNG ELECTRONICS CO., LTD.

[KR/KR]; 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do 16677 (KR).

(72) Inventors: KURT, Mehmet Necip; 665 Clyde Avenue,

Mountain View, California 94043 (US). ALBERT, Sa-


muell; 665 Clyde Avenue, Mountain View, California 94043 (US). XIN, Yan; 665 Clyde Avenue, Mountain View, California 94043 (US). FORD, Russell Douglas; 665 Clyde Avenue, Mountain View, California 94043 (US). ZHANG, Jianzhong; 665 Clyde Avenue, Mountain View, California 94043 (US).

(74) Agent: LEE, Keon-Joo et al.; Mihwa Bldg., 16, Daehak-ro 9-gil, Chongro-gu, Seoul 03079 (KR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available):

AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH,

(54) Title: METHODS AND APPARATUS FOR CONFIGURATION MANAGEMENT ANALYTICS AND AUTOMATION IN CELLULAR NETWORKS

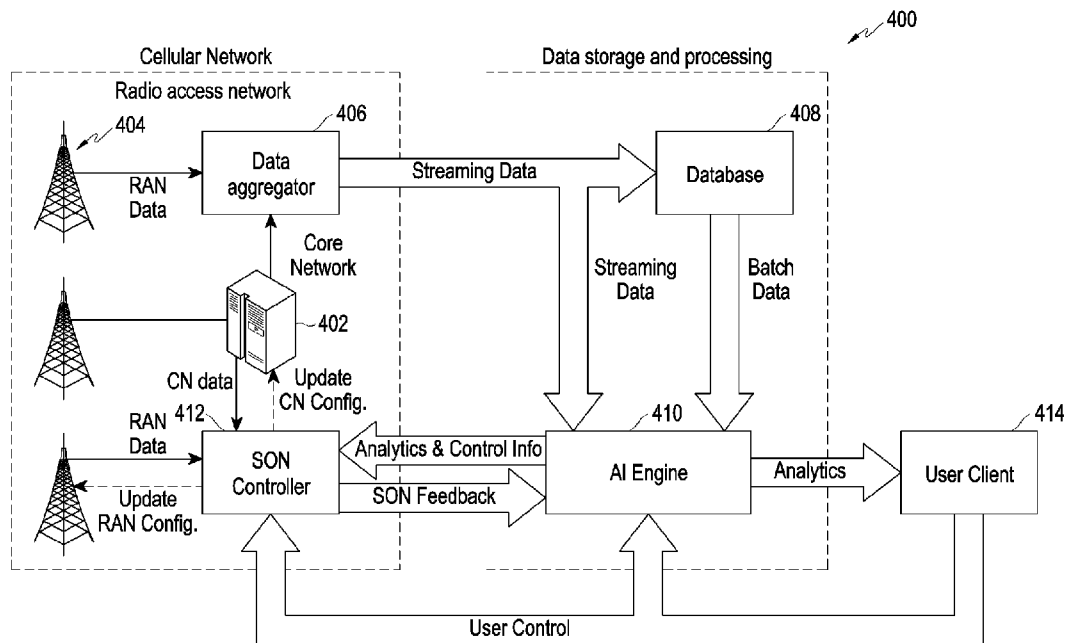

(57) Abstract: A method includes partitioning a set of configuration management (CM) data for one or more cellular network devices into multiple distinct time intervals, each time interval associated with a distinct set of CM settings at the one or more cellular network devices, the CM data comprising multiple CM parameters. The method also includes determining a regression model based on the set of CM data. The method also includes applying the regression model to compute a distinct set of scores and compare the set of scores to estimate whether a performance of the one or more cellular network devices has changed during a second time interval relative to a first time interval.



WO 2023/014019 A1

TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS,
ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

Description

Title of Invention: METHODS AND APPARATUS FOR CONFIGURATION MANAGEMENT ANALYTICS AND AUTOMATION IN CELLULAR NETWORKS

Technical Field

- [1] The disclosure relates generally to wireless communication systems and, for example, the disclosure relates to a system and method for automatically using configuration management analytics in cellular networks.

Background Art

- [2] The size and complexity of today's cellular networks makes their management highly challenging and costly for cellular operators. In cellular networks, a large volume of metadata is generated by network devices such as base stations, core network elements and end-user devices. This metadata includes Performance Management (PM) data (e.g., time-series data such as counters, performance metrics, and measurements), Fault Management (FM) data (e.g., alarm events that indicate a device has entered an erroneous state), and Configuration Management (CM) data (e.g., the configuration parameters and values of various network devices). The CM data may include records of all configuration changes that have been made historically, which is referred to as a CM change log. To maintain good service quality for end-users, operators should continuously monitor network performance benchmarks, such as Key Performance Indicators (KPIs) and Key Quality Indicators (KQIs), for thousands of base stations and other devices in the network.
- [3] The above information is presented as background information only to assist with an understanding of the disclosure. No determination has been made, and no assertion is made, as to whether any of the above might be applicable as prior art with regard to the disclosure.

Disclosure of Invention

Solution to Problem

- [4] The disclosure relates to wireless communication systems and, for example, to a system and method for automatically using configuration management analytics in cellular networks.
- [5] In an example embodiment, a method includes partitioning a set of configuration management (CM) data for one or more cellular network devices into multiple distinct time intervals, each time interval associated with a distinct set of CM settings at the one or more cellular network devices, the CM data comprising multiple CM pa-

rameters. The method also includes determining a regression model based on the set of CM data. The method also includes applying the regression model to compute a distinct set of scores and compare the set of scores to estimate whether a performance of the one or more cellular network devices has changed during a second time interval relative to a first time interval.

[6] In an example embodiment, a device includes a transceiver configured to transmit and receive information. The device also includes a processor operably connected to the transceiver. The processor is configured to: partition a set of CM data for one or more cellular network devices into multiple distinct time intervals, each time interval associated with a distinct set of CM settings at the one or more cellular network devices, the CM data comprising multiple CM parameters; determine a regression model based on the set of CM data; and apply the regression model to compute a distinct set of scores and compare the set of scores to estimate whether a performance of the one or more cellular network devices has changed during a second time interval relative to a first time interval.

[7] In an example embodiment, a non-transitory computer readable medium includes program code. The program code, when executed by a processor of a device, causes the device to: partition a set of configuration management (CM) data for one or more cellular network devices into multiple distinct time intervals, each time interval associated with a distinct set of CM settings at the one or more cellular network devices, the CM data comprising multiple CM parameters; determine a regression model based on the set of CM data; and apply the regression model to compute a distinct set of scores and compare the set of scores to estimate whether a performance of the one or more cellular network devices has changed during a second time interval relative to a first time interval.

[8] To further illustrate the advantages and features of the present disclosure, a more particular description will be rendered by reference to various example embodiments thereof, which is illustrated in the appended drawings. It is appreciated that these drawings depict only example embodiments of the disclosure and are therefore not to be considered limiting its scope. The disclosure will be described and explained with additional specificity and detail with reference to the accompanying drawings.

Brief Description of Drawings

[9] The above and other aspects, features, and advantages of certain embodiments of the present disclosure will be more apparent from the following detailed description, taken in conjunction with the accompanying drawings, wherein like characters represent like parts throughout the drawings, and in which:

[10] FIGURE 1 illustrates an example wireless network according to embodiments of the

- disclosure;
- [11] FIGURE 2 illustrates an example gNB according to embodiments of the disclosure;
- [12] FIGURE 3 illustrates an example UE according to embodiments of the disclosure;
- [13] FIGURE 4 illustrates an example system for automatically using configuration management analytics in cellular networks according to embodiments of the disclosure;
- [14] FIGURE 5 illustrates further details of the AI engine of FIGURE 4 according to embodiments of the disclosure;
- [15] FIGURE 6 illustrates a process for KPI selection in CM filtering to avoid masking a configuration change according to embodiments of the disclosure;
- [16] FIGURE 7 illustrates a process for KPI selection in PM filtering by correlation with the target KPI according to embodiments of the disclosure;
- [17] FIGURE 8 illustrates a process for root cause analysis (RCA) for configuration changes at a cell of interest according to embodiments of the disclosure;
- [18] FIGURE 9 illustrates a chart showing target KQI vs. time at a cell under different parameter configurations;
- [19] FIGURE 10 illustrates an example process for cell-level analysis for parameter recommendation, according to embodiments of the disclosure;
- [20] FIGURE 11 illustrates a process for RCA for degradation events based on a regression approach, according to embodiments of the disclosure;
- [21] FIGURE 12 illustrates an example process for recommending tuning parameters based on a parameter sensitivity analysis for a general regression model, according to embodiments of the disclosure; and
- [22] FIGURE 13 illustrates a flow chart of a method for automatically using configuration management analytics in cellular networks according to embodiments of the disclosure.
- [23] Further, skilled artisans will appreciate that elements in the drawings are illustrated for simplicity and may not have necessarily been drawn to scale. For example, the flowcharts illustrate the method in terms of operations involved to help to improve understanding of aspects of the present disclosure. Furthermore, in terms of the construction of the device, one or more components of the device may have been represented in the drawings by conventional symbols, and the drawings may show those specific details that are pertinent to understanding the various example embodiments of the present disclosure so as not to obscure the drawings with details that may be readily apparent to those of ordinary skill in the art.

Mode for the Invention

- [24] It may be advantageous to set forth definitions of certain words and phrases used

throughout this patent document. The term "couple" and its derivatives refer to any direct or indirect communication between two or more elements, whether or not those elements are in physical contact with one another. The terms "transmit," "receive," and "communicate," as well as derivatives thereof, encompass both direct and indirect communication. The terms "include" and "comprise," as well as derivatives thereof, mean inclusion without limitation. The term "or" is inclusive, meaning and/or. The phrase "associated with," as well as derivatives thereof, means to include, be included within, interconnect with, contain, be contained within, connect to or with, couple to or with, be communicable with, cooperate with, interleave, juxtapose, be proximate to, be bound to or with, have, have a property of, have a relationship to or with, or the like. The term "controller" means any device, system, or part thereof that controls at least one operation. Such a controller may be implemented in hardware or a combination of hardware and software and/or firmware. The functionality associated with any particular controller may be centralized or distributed, whether locally or remotely. The phrase "at least one of," when used with a list of items, means that different combinations of one or more of the listed items may be used, and only one item in the list may be needed. For example, "at least one of: A, B, and C" includes any of the following combinations: A, B, C, A and B, A and C, B and C, and A and B and C.

[25] Moreover, various functions described below can be implemented or supported by one or more computer programs, each of which is formed from computer readable program code and embodied in a computer readable medium. The terms "application" and "program" refer to one or more computer programs, software components, sets of instructions, procedures, functions, objects, classes, instances, related data, or a portion thereof adapted for implementation in a suitable computer readable program code. The phrase "computer readable program code" includes any type of computer code, including source code, object code, and executable code. The phrase "computer readable medium" includes any type of medium capable of being accessed by a computer, such as read only memory (ROM), random access memory (RAM), a hard disk drive, a compact disc (CD), a digital video disc (DVD), or any other type of memory. A "non-transitory" computer readable medium excludes wired, wireless, optical, or other communication links that transport transitory electrical or other signals. A non-transitory computer readable medium includes media where data can be permanently stored and media where data can be stored and later overwritten, such as a rewritable optical disc or an erasable memory device.

[26] Definitions for other certain words and phrases are provided throughout this patent document. Those of ordinary skill in the art should understand that in many if not most instances, such definitions apply to prior as well as future uses of such defined words and phrases.

- [27] FIGURES 1 through 13, discussed below, and the various embodiments used to describe the principles of the disclosure in this patent document are by way of illustration only and should not be construed in any way to limit the scope of the disclosure. Those skilled in the art will understand that the principles of the disclosure may be implemented in any suitably arranged system or device.
- [28] Aspects, features, and advantages of the disclosure are readily apparent from the following detailed description, simply by illustrating a number of particular embodiments and implementations, including the best mode contemplated for carrying out the disclosure. The disclosure is also capable of other and different embodiments, and its several details can be modified in various obvious respects, all without departing from the spirit and scope of the disclosure. Accordingly, the drawings and description are to be regarded as illustrative in nature, and not as restrictive. The disclosure is illustrated by way of example, and not by way of limitation, in the figures of the accompanying drawings.
- [29] The disclosure covers several components which can be used in conjunction or in combination with one another, or can operate as standalone schemes.
- [30] To meet the demand for wireless data traffic having increased since deployment of 4G communication systems and to enable various vertical applications, efforts have been made to develop and deploy an improved 5G/new radio (NR) or pre-5G/NR communication system. Therefore, the 5G/NR or pre-5G/NR communication system is also called a "beyond 4G network" or a "post LTE system." The 5G/NR communication system is considered to be implemented in higher frequency (mmWave) bands, e.g., 28 GHz or 60GHz bands, so as to accomplish higher data rates or in lower frequency bands, such as 6 GHz, to enable robust coverage and mobility support. To decrease propagation loss of the radio waves and increase the transmission distance, the beamforming, massive multiple-input multiple-output (MIMO), full dimensional MIMO (FD-MIMO), array antenna, analog beam forming, large scale antenna techniques are discussed in 5G/NR communication systems.
- [31] In addition, in 5G/NR communication systems, development for system network improvement is under way based on advanced small cells, cloud radio access networks (RANs), ultra-dense networks, device-to-device (D2D) communication, wireless backhaul, moving network, cooperative communication, coordinated multi-points (CoMP), reception-end interference cancelation and the like.
- [32] The discussion of 5G systems and frequency bands associated therewith is for reference as certain embodiments of the disclosure may be implemented in 5G systems. However, the disclosure is not limited to 5G systems or the frequency bands associated therewith, and embodiments of the disclosure may be utilized in connection with any frequency band. For example, aspects of the disclosure may also be applied to

deployment of 5G communication systems, 6G or even later releases which may use terahertz (THz) bands.

- [33] FIGURES 1-3 below describe various embodiments implemented in wireless communications systems and with the use of orthogonal frequency division multiplexing (OFDM) or orthogonal frequency division multiple access (OFDMA) communication techniques. The descriptions of FIGURES 1-3 are not meant to imply physical or architectural limitations to the manner in which different embodiments may be implemented. Different embodiments of the disclosure may be implemented in any suitably-arranged communications system.
- [34] FIGURE 1 illustrates an example wireless network according to embodiments of the disclosure. The embodiment of the wireless network shown in FIGURE 1 is for illustration only. Other embodiments of the wireless network 100 could be used without departing from the scope of this disclosure.
- [35] As shown in FIGURE 1, the wireless network includes a gNB 101 (e.g., base station, BS), a gNB 102, and a gNB 103. The gNB 101 communicates with the gNB 102 and the gNB 103. The gNB 101 also communicates with at least one network 130, such as the Internet, a proprietary Internet Protocol (IP) network, or other data network.
- [36] The gNB 102 provides wireless broadband access to the network 130 for a first plurality of UEs within a coverage area 120 of the gNB 102. The first plurality of UEs includes a UE 111, which may be located in a small business; a UE 112, which may be located in an enterprise (E); a UE 113, which may be located in a WiFi hotspot (HS); a UE 114, which may be located in a first residence (R); a UE 115, which may be located in a second residence (R); and a UE 116, which may be a mobile device (M), such as a cell phone, a wireless laptop, a wireless PDA, or the like. The gNB 103 provides wireless broadband access to the network 130 for a second plurality of UEs within a coverage area 125 of the gNB 103. The second plurality of UEs includes the UE 115 and the UE 116. In some embodiments, one or more of the gNBs 101-103 may communicate with each other and with the UEs 111-116 using 5G/NR, LTE, LTE-A, WiMAX, WiFi, or other wireless communication techniques.
- [37] Depending on the network type, the term "base station" or "BS" may refer to any component (or collection of components) configured to provide wireless access to a network, such as transmit point (TP), transmit-receive point (TRP), an enhanced base station (eNodeB or eNB), a 5G/NR base station (gNB), a macrocell, a femtocell, a WiFi access point (AP), or other wirelessly enabled devices. Base stations may provide wireless access in accordance with one or more wireless communication protocols, e.g., 5G/NR 3GPP new radio interface/access (NR), LTE, LTE advanced (LTE-A), high speed packet access (HSPA), Wi-Fi 802.11a/b/g/n/ac, etc. For the sake of convenience, the terms "BS" and "TRP" are used interchangeably in this patent document

to refer to network infrastructure components that provide wireless access to remote terminals. Also, depending on the network type, the term "user equipment" or "UE" may refer to any component such as "mobile station," "subscriber station," "remote terminal," "wireless terminal," "receive point," or "user device." For the sake of convenience, the terms "user equipment" and "UE" are used in this patent document to refer to remote wireless equipment that wirelessly accesses a BS, whether the UE is a mobile device (such as a mobile telephone or smartphone) or is normally considered a stationary device (such as a desktop computer or vending machine).

[38] Dotted lines show the approximate extents of the coverage areas 120 and 125, which are shown as approximately circular for the purposes of illustration and explanation only. It should be clearly understood that the coverage areas associated with gNBs, such as the coverage areas 120 and 125, may have other shapes, including irregular shapes, depending upon the configuration of the gNBs and variations in the radio environment associated with natural and man-made obstructions.

[39] As described in more detail below, one or more of the UEs 111-116 include circuitry, programming, or a combination thereof for implementing a system and method for automatically using configuration management analytics. In certain embodiments, and one or more of the gNBs 101-103 includes circuitry, programming, or a combination thereof for implementing a system and method for automatically using configuration management analytics.

[40] Although FIGURE 1 illustrates one example of a wireless network, various changes may be made to FIGURE 1. For example, the wireless network could include any number of gNBs and any number of UEs in any suitable arrangement. Also, the gNB 101 could communicate directly with any number of UEs and provide those UEs with wireless broadband access to the network 130. Similarly, each gNB 102-103 could communicate directly with the network 130 and provide UEs with direct wireless broadband access to the network 130. Further, the gNBs 101, 102, and/or 103 could provide access to other or additional external networks, such as external telephone networks or other types of data networks.

[41] FIGURE 2 illustrates an example gNB 102 according to embodiments of the disclosure. The embodiment of the gNB 102 illustrated in FIGURE 2 is for illustration only, and the gNBs 101 and 103 of FIGURE 1 could have the same or similar configuration. However, gNBs come in a wide variety of configurations, and FIGURE 2 does not limit the scope of this disclosure to any particular implementation of a gNB.

[42] As shown in FIGURE 2, the gNB 102 includes multiple antennas 205a-205n, multiple RF transceivers 210a-210n, transmit (TX) processing circuitry 215, and receive (RX) processing circuitry 220. The gNB 102 also includes at least one controller/processor 225, a memory 230, and a backhaul or network interface 235.

- [43] The RF transceivers 210a-210n receive, from the antennas 205a-205n, incoming RF signals, such as signals transmitted by UEs in the network 100. The RF transceivers 210a-210n down-convert the incoming RF signals to generate IF or baseband signals. The IF or baseband signals are sent to the RX processing circuitry 220, which generates processed baseband signals by filtering, decoding, and/or digitizing the baseband or IF signals. The RX processing circuitry 220 transmits the processed baseband signals to the controller/processor 225 for further processing.
- [44] The TX processing circuitry 215 receives analog or digital data (such as voice data, web data, e-mail, or interactive video game data) from the controller/processor 225. The TX processing circuitry 215 encodes, multiplexes, and/or digitizes the outgoing baseband data to generate processed baseband or IF signals. The RF transceivers 210a-210n receive the outgoing processed baseband or IF signals from the TX processing circuitry 215 and up-converts the baseband or IF signals to RF signals that are transmitted via the antennas 205a-205n.
- [45] The controller/processor 225 may include one or more processors or other processing devices that control the overall operation of the gNB 102. For example, the controller/processor 225 could control the reception of forward channel signals and the transmission of reverse channel signals by the RF transceivers 210a-210n, the RX processing circuitry 220, and the TX processing circuitry 215 in accordance with well-known principles. The controller/processor 225 could support additional functions as well, such as more advanced wireless communication functions. For instance, the controller/processor 225 could support methods for automatically using configuration management analytics in cellular networks. Any of a wide variety of other functions could be supported in the gNB 102 by the controller/processor 225.
- [46] The controller/processor 225 is also capable of executing programs and other processes resident in the memory 230, such as an OS. The controller/processor 225 may move data into or out of the memory 230 as required by an executing process.
- [47] The controller/processor 225 is also coupled to the backhaul or network interface 235. The backhaul or network interface 235 allows the gNB 102 to communicate with other devices or systems over a backhaul connection or over a network. The interface 235 could support communications over any suitable wired or wireless connection(s). For example, when the gNB 102 is implemented as part of a cellular communication system (such as one supporting 5G/NR, LTE, or LTE-A), the interface 235 could allow the gNB 102 to communicate with other gNBs over a wired or wireless backhaul connection. When the gNB 102 is implemented as an access point, the interface 235 could allow the gNB 102 to communicate over a wired or wireless local area network or over a wired or wireless connection to a larger network (such as the Internet). The interface 235 includes any suitable structure supporting communications over a wired

or wireless connection, such as an Ethernet or RF transceiver.

[48] The memory 230 is coupled to the controller/processor 225. Part of the memory 230 could include a RAM, and another part of the memory 230 could include a Flash memory or other ROM.

[49] Although FIGURE 2 illustrates one example of gNB 102, various changes may be made to FIGURE 2. For example, the gNB 102 could include any number of each component shown in FIGURE 2. As a particular example, an access point could include a number of interfaces 235, and the controller/processor 225 could support routing functions to route data between different network addresses. As another particular example, while shown as including a single instance of TX processing circuitry 215 and a single instance of RX processing circuitry 220, the gNB 102 could include multiple instances of each (such as one per RF transceiver). Also, various components in FIGURE 2 could be combined, further subdivided, or omitted and additional components could be added according to particular needs.

[50] FIGURE 3 illustrates an example UE 116 according to embodiments of the disclosure. The embodiment of the UE 116 illustrated in FIGURE 3 is for illustration only, and the UEs 111-115 of FIGURE 1 could have the same or similar configuration. However, UEs come in a wide variety of configurations, and FIGURE 3 does not limit the scope of this disclosure to any particular implementation of a UE.

[51] As shown in FIGURE 3, the UE 116 includes an antenna 305, a radio frequency (RF) transceiver 310, TX processing circuitry 315, a microphone 320, and RX processing circuitry 325. The UE 116 also includes a speaker 330, at least one processor 340, an input/output (I/O) interface (IF) 345, a touchscreen 350, a display 355, and a memory 360. The memory 360 includes an operating system (OS) 361 and one or more applications 362.

[52] The RF transceiver 310 receives, from the antenna 305, an incoming RF signal transmitted by a gNB of the network 100. The RF transceiver 310 down-converts the incoming RF signal to generate an intermediate frequency (IF) or baseband signal. The IF or baseband signal is sent to the RX processing circuitry 325, which generates a processed baseband signal by filtering, decoding, and/or digitizing the baseband or IF signal. The RX processing circuitry 325 transmits the processed baseband signal to the speaker 330 (such as for voice data) or to the processor 340 for further processing (such as for web browsing data).

[53] The TX processing circuitry 315 receives analog or digital voice data from the microphone 320 or other outgoing baseband data (such as web data, e-mail, or interactive video game data) from the processor 340. The TX processing circuitry 315 encodes, multiplexes, and/or digitizes the outgoing baseband data to generate a processed baseband or IF signal. The RF transceiver 310 receives the outgoing processed

baseband or IF signal from the TX processing circuitry 315 and up-converts the baseband or IF signal to an RF signal that is transmitted via the antenna 305.

- [54] The processor 340 may include one or more processors or other processing devices and execute the OS 361 stored in the memory 360 in order to control the overall operation of the UE 116. For example, the processor 340 could control the reception of forward channel signals and the transmission of reverse channel signals by the RF transceiver 310, the RX processing circuitry 325, and the TX processing circuitry 315 in accordance with well-known principles. In some embodiments, the processor 340 includes at least one microprocessor or microcontroller.
- [55] The processor 340 is also capable of executing other processes and programs resident in the memory 360, such as processes for automatically using configuration management analytics in cellular networks. The processor 340 may move data into or out of the memory 360 as required by an executing process. In some embodiments, the processor 340 is configured to execute the applications 362 based on the OS 361 or in response to signals received from gNBs or an operator. The processor 340 is also coupled to the I/O interface 345, which provides the UE 116 with the ability to connect to other devices, such as laptop computers and handheld computers. The I/O interface 345 is the communication path between these accessories and the processor 340.
- [56] The processor 340 is also coupled to the touchscreen 350 and the display 355. The operator of the UE 116 may use the touchscreen 350 to enter data into the UE 116. The display 355 may be a liquid crystal display, light emitting diode display, or other display capable of rendering text and/or at least limited graphics, such as from web sites.
- [57] The memory 360 is coupled to the processor 340. Part of the memory 360 could include a random access memory (RAM), and another part of the memory 360 could include a Flash memory or other read-only memory (ROM).
- [58] Although FIGURE 3 illustrates one example of UE 116, various changes may be made to FIGURE 3. For example, various components in FIGURE 3 could be combined, further subdivided, or omitted and additional components could be added according to particular needs. As a particular example, the processor 340 could be divided into multiple processors, such as one or more central processing units (CPUs) and one or more graphics processing units (GPUs). Also, while FIGURE 3 illustrates the UE 116 configured as a mobile telephone or smartphone, UEs could be configured to operate as other types of mobile or stationary devices.
- [59] As discussed above, in cellular networks, a large volume of metadata is generated by network devices such as base stations, core network elements and end-user devices. This metadata may include PM data, FM data, and CM data. The CM data may include records of all configuration changes that have been made historically, which is referred

to as a CM change log. To maintain good service quality for end-users, operators should continuously monitor network performance benchmarks, such as KPIs and KQIs, for thousands of base stations and other devices in the network.

- [60] A typical 4G LTE cell has on the order of a thousand unique configuration parameters, with hundreds more added in the 5G NR cells, which are configured and updated through a CM system. Configuration changes may be made by engineers or automatic background processes such as self organizing network (SON) functions (e.g., the automatic neighbor relation (ANR) function or the automatic primary cell ID (PCI) assignment function). Configuration changes are necessary in many cases, such as setting up a new cell deployment, remediating failures and faults, or optimizing the performance of a cell. For example, the antenna tilt may be adjusted to improve coverage or reduce interference to neighboring cells.
- [61] With thousands of base stations, each generating hundreds of KPIs and alarms (amounting to hundreds of gigabytes of data each day), and with many configuration parameters, monitoring the network state, diagnosing faults such as caused by erroneous configuration changes, and optimizing the network performance via a proper parameter configuration require huge investments in time and human labor. Moreover, engineers often rely on experience and trial-and-error for configuration management in cellular networks, which may require several iterations of adjusting one or more parameters and observing the impact to network performance over a time period. Therefore, manual optimization of parameters may be imprecise, possibly leading to suboptimal performance.
- [62] In summary, in conventional cellular networks, tuning of configuration parameters is often based on a combination of human domain expertise, heuristics, and trial-and-error, which is subject to errors, performance loss, and, in the worst case, network outages or faults, leading to a diminished subscriber experience. Due to the large volume of complex network data, it is challenging and time consuming for engineers to manually monitor all the relevant PM metrics and FM events and analyze the impact of configuration parameters on the network. Moreover, the network performance is likely affected by many factors, such as the environment conditions, and there is a lack of complete information (i.e., unobservable factors). Finally, there are a large number of configuration parameters, and usually a subset of parameters are simultaneously updated in case of a configuration change, which makes it challenging to analyze the impact of each individual parameter. Thus, an intelligent CM analytics system is desired for automated data-driven configuration management, which may speed up the inference and optimization processes, reduce the operational costs, and provide better quality of service for end users.
- [63] To address these and other issues, this disclosure provides a system and method for

automatically using configuration management analytics in cellular networks. As described in more detail below, cell behavior is statistically captured by a regression model, which is a mapping from selected regressor KPIs and configuration parameters to a target KPI or KQI of interest (e.g., DL throughput). The regressor KPIs are selected such that they do not mask the impact of CM parameters. For example, the regressor KPIs are chosen to be the least dependent on the CM parameters. The disclosed embodiments feature a number of advantageous functions, including (i) parameter recommendation, in which a parameter configuration is recommended to optimize the network performance (i.e., improve one or more target KQIs or KPIs) based on existing cell-level parameter diversity, (ii) root cause analysis to determine if any configuration change has been the cause of a network anomaly, and (iii) parameter sensitivity analysis, in which the impact of individual parameters on the network performance is determined. Note that while some of the embodiments discussed below are described in the context of use in cellular networks, such as radio access networks, these are merely examples. It will be understood that the principles of this disclosure may be implemented in any number of other suitable contexts.

- [64] FIGURE 4 illustrates an example system 400 for automatically using configuration management analytics in cellular networks according to embodiments of the disclosure. The embodiment of the system 400 shown in FIGURE 4 is for illustration only. Other embodiments of the system 400 could be used without departing from the scope of this disclosure.
- [65] As shown in FIGURE 4, the system 400 includes a cellular network infrastructure, including a core network (CN) 402 and a radio access network (RAN) 404, which serves as a data source for the system 400. The cellular network infrastructure may represent (or be represented by) one or more of the gNBs 101-103 of FIGURE 1. The system 400 also includes one or more data aggregators 406, one or more databases 408, an artificial intelligence (AI) engine 410, one or more SON controllers 412, and a user client 414. The user client 414 may represent (or be represented by) one or more of the UEs 111-116 of FIGURE 1.
- [66] Data from the CN 402 and the RAN 404 may be collected and aggregated at the data aggregator(s) 406, which are intermediate nodes that may also be referred to as element management systems (EMS) or LTE management systems (LMS). The RAN data may include measurements, metrics and other data collected from the base station and UE devices. Other collected data may include PM data, FM data, CM data, or a combination of these. PM data may include, e.g., KQIs/KPIs, counters, and metrics, which may be in the form of structured time series data or as unstructured data, such as log files. FM data may include, e.g., alarms events indicating a device failure or error state has occurred in the network. CM data may include, e.g., a log of configuration

changes including timestamps and IDs of the network devices with before and after parameter values.

[67] Once collected and aggregated at the data aggregator(s) 406, the network data may be transferred and stored in the database(s) 408. Batches of historical data may then be retrieved from the database(s) 408 by the AI engine 410, which processes the data to provide various CM analytics and inference capabilities. Data may also be streamed directly from the CN 402, the RAN 404, or the data aggregator(s) 406 to the AI engine 410 for real-time processing. Further details on the functions of the AI engine 410 are provided below.

[68] The AI engine 410 performs computation on the input data and produces analytics and control information (ACI), which may then be sent to the SON controller(s) 412. It is noted that the AI engine 410, the SON controller(s) 412, or both, may be hosted at a data center or local central office near the RAN 404, or may be collocated with a BS itself. The SON controller(s) 412 use the ACI from the AI engine 410 to automatically perform actions on the network, such as updating the configuration of one or more network devices. The AI engine 410 also specifies in the ACI messages which devices or variables are of interest for the SON controller(s) 412 to monitor, so that the SON controller(s) 412 may only monitor a subset of network devices and data variables for more efficient operation. The SON controller(s) 412 may also provide feedback messages to the AI engine 410 about the state of the monitored devices and variables, so that the AI engine 410 may quickly adapt to changing network conditions and provide updated ACI to the SON controller(s) 412.

[69] Analytics information generated by the AI engine 410 may be transmitted to the user client 414 in one or more user client information (UCI) messages for analysis by a network operations engineer or other personnel. The user client 414 may display the analytics results in a user interface, which may include data tables, plots and other visualizations of the PM/CM/FM data along with anomalies or faults that have been detected, root cause analysis (RCA) of the faults, and one or more configuration parameters that may be correlated with the results. Additionally, the user interface may accept commands from the user, which may be sent to the SON controller 412 or directly to the network device(s) to perform an action, such as a configuration update. Commands or feedback may also be sent by the user to the AI engine 410. This feedback may be used by the AI engine 410 to adjust its analysis results, for example, by retraining one or more machine learning (ML) algorithms. For example, a user may provide feedback to the AI engine 410 indicating the root cause of certain anomaly events, or an indication of whether or not the automatic RCA diagnosis from the AI engine 410 was correct.

[70] FIGURE 5 illustrates further details of the AI engine 410 according to embodiments

of the disclosure. The embodiment of the AI engine 410 shown in FIGURE 5 is for illustration only. Other embodiments of the AI engine 410 could be used without departing from the scope of this disclosure. As shown in FIGURE 5, the AI engine 410 includes a data loading operation 502, a data preprocessing/feature engineering operation 504, and a CM analytics operation 506.

[71] In the data loading operation 502, PM, FM, and/or CM data are loaded into the AI engine 410. As discussed above, batches of network data may be retrieved from the database(s) 408, or data may be streamed directly from the data aggregator(s) 406 to the AI engine 410. The system 400 supports both offline processing of batch data and real-time processing of streaming data.

[72] The data preprocessing/feature engineering operation 504 includes operations to prepare the loaded data for use during the CM analytics operation 506. The data preprocessing/feature engineering operation 504 may include (but is not limited to) any one or more of the following: (i) removing invalid data samples, (ii) normalizing or scaling the data, (iii) removing trends and seasonality in time-series data, (iv) generating additional synthetic features from the existing KPIs and other fields in the data, (v) selecting a subset of the data samples or fields, such as a specific timeframe or a group of network devices, and (vi) merging the PM/FM and CM data into a combined data set, for example, by matching the eNB/gNB ID and cell number fields and the timestamp of entries in the PM/FM data and the CM data.

[73] As an example, the data preprocessing/feature engineering operation 504 may include (but is not limited to) any one or more of the following operations.

[74] (1) Data cleaning and filtering: In this operation, the non-busy hour, weekend, and US holiday data are filtered out, and the data corresponding to outliers and missing values are removed. For example, in some embodiments, the busy hours may be defined as 8:00 am to 9:00 pm; weekends consist of Saturday and Sunday; US holidays may be selected by using a Python built-in function from a holidays package (e.g., `holidays.US()`). Outliers may be identified by statistical outlier detection techniques or based on predetermined thresholds on KPIs. The missing values may include "NA" and "NaN" values. Of course, other data may be filtered out according to other rules, which are within the scope of this disclosure.

[75] (2) Synthetic KPI generation: In this operation, certain sets of synthetic KPIs are generated using the available KPIs. For example, the cumulative distribution of each KPI may be generated.

[76] (3) KPI selection based on domain knowledge: Based on engineering domain knowledge, KPIs may be selected as features of the ML models (particularly the regression models) to be trained in the CM analytics operation 506. Domain-knowledge based feature selection methods are typically reliable since they depend on engineering

physics but are very coarse if it is difficult to quantify the impacts of features. After this operation is done, only the selected KPIs will be kept in the PM data.

[77] (4) CM filtering (KPI selection to mitigate parameter masking effects): The purpose of this filtering operation is to remove any KPIs that are highly correlated with the configuration changes of interest. Particularly, in the regression models to be trained in the CM analytics operation 506, there is a target KPI/KQI (e.g., DL throughput) as well as other selected KPIs. In the KPI selection procedure, one needs to be careful that selected KPIs do not just capture (or mask) the configuration changes. The CM filter of operation (4) may be realized using any of several different techniques, one example of which is shown in FIGURE 6, which illustrates a process 600 for KPI selection in CM filtering to avoid masking a configuration change.

[78] As shown in FIGURE 6, in the process 600, let C be the set of all cells under consideration. In operation 601, per cell $c \in C$, parameters that always change at the same time for that cell are grouped together. For example, if p_1 and p_2 change at times t_1 , t_2 , and t_3 , and p_3 changes at times t_2 and t_3 , then these parameters may be grouped into two parameter groups, $g_1 = \{p_1, p_2\}$ and $g_2 = \{p_3\}$.

[79] In operation 603, the parameters are encoded as an array X_{CM}^c , where the rows correspond to time and the columns correspond to the encoding of the parameters that have changed value over the period of interest (discussed in detail below).

[80] In operation 605, for each KPI, a regression is performed as follows:

$$[81] \quad \hat{Y}^{c,kpi} = f^{c,kpi}(X_{CM}^c)$$

[82] and a corresponding R2 score, denoted as $R2^{c,kpi}$, is calculated.

[83] Next, in operation 607, for each group of parameters g_1^c, \dots, g_k^c identified for this cell, the columns of X_{CM}^c associated with group g_i^c are removed, and another regression is performed as follows:

$$[84] \quad \hat{Y}^{c,kpi} = f_{g_i^c}^{c,kpi}(X_{CM,g_i^c}^c)$$

[85] The corresponding R2 score, denoted as $R2_{g_i^c}^{c,kpi}$, is calculated.

[86] In operation 609, the difference in the two R2 scores is computed as follows:

$$[87] \quad \Delta R2_{g_i^c}^{c,kpi} = R2^{c,kpi} - R2_{g_i^c}^{c,kpi}$$

[88] The computed difference is a rough proxy for the explanatory power of this configuration change group on the KPI.

[89] In operation 611, given $c \in C$, the set of parameters that have changed for that cell, denoted as P^c , are identified.

[90] In operation 613, for each KPI, a score s^{kpi} is calculated as follows:

$$[91] \quad s^{kpi} = \max_{c \in C, P^c \cap g_i^c \neq \emptyset} \Delta R Z_{g_i^c}^{c, kpi}.$$

[92] In operation 615, the s^{kpi} scores are sorted in an increasing order to rank KPIs with respect to their sensitivity to the configuration changes. Then, only the least sensitive K% (e.g., 20%) of the KPIs are selected as the output of the CM filtering.

[93] (5) Encoding configuration parameters: For configuration parameters with an associated numerical value, that value may be used to define a feature in a ML model. If no numerical value may naturally be associated with a parameter, all categorical values for that parameter that appear in the CM dataset are identified and assigned an ordinal value. For configuration changes that apply at an eNB/gNB level, the constructed feature is made available for all cells associated with that eNB/gNB. Finally, some parameters may have to be encoded as vectors at the eNB level, and so these parameters appear as vectors when applied to the associated cells.

[94] (6) PM filtering: This filter is specific to the target KPI or KQI of interest and is summarized in FIGURE 7, which illustrates a process 700 for KPI selection in PM filtering by correlation with the target KPI. As shown in FIGURE 7, in operation 701, the individual correlations between the target KQI and other regressor KPIs are calculated. In operation 703, all KPIs are sorted based on the absolute value of their correlations with the target KQI. In operation 705, the regressor KPIs that are most correlated with the target are selected. For example, the G% (e.g., 90%) most correlated KPIs are selected. The intersection of this set of KPIs and the one resulting from the CM filter in operation (4) (FIGURE 6) may then be used in the regression models.

[95] Turning again to FIGURE 5, the CM analytics operation 506 analyzes the pre-processed data (provided by the operation 504) via statistical tools (including, e.g., ML and AI algorithms), provides useful analytics, and suggests one or more actions, such as recommending or updating a configuration parameter to improve performance or resolve a network fault or other abnormal event.

[96] With the complexity of current cellular networks, whenever a configuration change is made, either by engineers or automated processes, there is a potential for errors to be introduced, which may inadvertently result in anomalies such as faults and performance loss. To ensure proper network operation, cellular operators should keep track of the configuration changes and investigate anomalies caused by the configuration changes, and take action to remedy them. Therefore, it is useful for operators to have at their disposal an automated RCA system that intelligently monitors the network state and automatically identifies anomalies caused by the configuration changes. To this end, the CM analytics operation 506 includes performing the RCA.

[97] The general workflow of the RCA for configuration changes is summarized in

FIGURE 8, which illustrates a process 800 for RCA for configuration changes at a cell of interest, which may be performed during the CM analytics operation 506. As shown in FIGURE 8, in operation 801, the PM and CM time-series data collected from a cell of interest are split into time intervals based on the configuration changes. In particular, for each configuration change, the before and after intervals are identified such that no other configuration changes happen within these intervals. In operation 803, the before and after intervals are analyzed to detect if there is a performance degradation after configuration change (i.e., anomaly detection). In operation 805, if there is a performance degradation, the before and after intervals are analyzed to decide if the performance degradation is caused by the configuration change. To perform the RCA, a regression-based approach may be used, as described in greater detail below. Of course, other techniques may be used for performing the RCA and are within the scope of this disclosure.

[98] In addition to RCA, the CM analytics operation 506 also recommends values of configuration parameters to optimize the network performance. For each cell, functional cell behavior might be different because of the cell physics as well as cell surroundings (e.g., buildings near the base station). Hence, a cell-level analysis may be useful for parameter recommendation, as described with respect to FIGURE 9.

[99] FIGURE 9 illustrates a chart 900 showing target KQI vs. time at a cell under different parameter configurations $\mathbf{p}_1, \mathbf{p}_2, \mathbf{p}_3,$ and \mathbf{p}_4 . Assume there are L possible parameter values $\mathbf{p}_\ell, \ell = 1, 2, \dots, L$ at a cell (e.g., in FIGURE 9, L=4, although other values are possible). Considering that \mathbf{p}^ℓ is a parameter vector (i.e., consists of multiple parameters) and there are typically only a few possible historical parameter values for a given cell (i.e., L is small), it may not be possible to learn the functional dependency in the form of $y = F(\mathbf{x}, \mathbf{p})$ at the cell-level. This is because parameter diversity is typically insufficient to learn such a regression model. On the other hand, assuming that for each parameter setting \mathbf{p}^ℓ , a group of samples $S_\ell = \{(\mathbf{x}_\ell, y_\ell)\}$ with cardinality $|S_\ell| = N_\ell$ exists, it is, in general, possible to learn a functional dependency in the form of $y = F_p(\mathbf{x})$ for each parameter setting $\mathbf{p} = \mathbf{p}_\ell$ at the cell.

[100] FIGURE 10 illustrates an example process 1000 for the cell-level analysis for parameter recommendation, according to embodiments of the disclosure. One objective of the process 1000 (which may be performed during the CM analytics operation 506) is to infer the best static (i.e., long-term) parameter configuration at a given cell with the available data. As shown in FIGURE 10, in operation 1001, per parameter setting, a cell-level regression model $y = F_p(\mathbf{x}) + \epsilon$ is calibrated. Based on the regression models for all possible parameter settings, in operation 1003, a pairwise comparison of parameter settings \mathbf{p}_ℓ and \mathbf{p}_k is performed to test if there is a statistically

significant improvement or degradation in the mean target KQI and if this is because of the parameter configuration. In operation 1005, with at most $\binom{L}{2}$ pairwise comparisons,

the best static parameter configuration at a given cell may be determined and recommended. The operations 1001 and 1003 are explained in further detail below, along with example solutions ((i) one-group regression with parametric test and (ii) two-group regression with parametric test) for the pairwise parameter comparison between any two parameter settings \mathbf{p}_ℓ and \mathbf{p}_k .

[101] One-group Regression with Parametric Test

[102] In some embodiments, a one-group regression approach with parametric mean test may be used for the parameter recommendation as well as the RCA for configuration changes. As an example, the procedure for parameter recommendation will now be explained.

[103] Under the parameter setting \mathbf{p}_ℓ , let the unknown ground truth function be $y = F_{\mathbf{p}_\ell}(\mathbf{x})$. Similarly, under the parameter setting \mathbf{p}_k , let the unknown ground truth function be $y = F_{\mathbf{p}_k}(\mathbf{x})$. For ease of explanation, assume

$F_{\mathbf{p}_k}(\mathbf{x}) \geq F_{\mathbf{p}_\ell}(\mathbf{x})$, $\mathbf{x} \in \text{dom}(F_{\mathbf{p}_\ell}) \cap \text{dom}(F_{\mathbf{p}_k})$ (i.e., the parameter setting \mathbf{p}_k is better than \mathbf{p}_ℓ). Here, $\text{dom}(\cdot)$ denotes the domain of a function, which means the set into which all inputs of the function is constrained to fall. In the one-group regression approach, the following procedure may be used for a comparison between \mathbf{p}_ℓ and \mathbf{p}_k regardless of the former assumption.

[104] Operation 1: Partition the group ℓ samples $S_\ell = \{(\mathbf{x}_\ell, y_\ell)\}$ into training and test sets, $S_\ell^{\text{train}} = \{(\mathbf{x}_\ell^{\text{train}}, y_\ell^{\text{train}})\}$ with $|S_\ell^{\text{train}}| = N_\ell^{\text{train}}$ and $S_\ell^{\text{test}} = \{(\mathbf{x}_\ell^{\text{test}}, y_\ell^{\text{test}})\}$ with $|S_\ell^{\text{test}}| = N_\ell^{\text{test}}$, respectively, where $N_\ell^{\text{train}} + N_\ell^{\text{test}} = N_\ell$.

[105] Operation 2: Calibrate a regression model $\hat{F}_{\mathbf{p}_\ell}(\cdot)$ using training samples from the group ℓ only: $\mathbf{y}_\ell^{\text{train}} = \hat{F}_{\mathbf{p}_\ell}(\mathbf{x}_\ell^{\text{train}}) + \epsilon_\ell$, where ϵ_ℓ denotes the residual term.

[106] Operation 3: Compute the residuals on the two groups separately:

[107]
$$\epsilon_\ell = y_\ell^{\text{test}} - \hat{F}_{\mathbf{p}_\ell}(\mathbf{x}_\ell^{\text{test}}),$$

$$\epsilon_k = y_k - \hat{F}_{\mathbf{p}_\ell}(\mathbf{x}_k).$$

[108] At this point, it is noted that $\hat{F}_{\mathbf{p}_\ell}(\mathbf{x}) \cong F_{\mathbf{p}_\ell}(\mathbf{x})$ and because of the assumption

$F_{\mathbf{p}_k}(\mathbf{x}) \geq F_{\mathbf{p}_\ell}(\mathbf{x})$ in the beginning, it is expected that $F_{\mathbf{p}_k}(\mathbf{x}) \geq \hat{F}_{\mathbf{p}_\ell}(\mathbf{x})$. Hence, while ϵ_ℓ is expected to be zero-mean, ϵ_k is expected to take positive values on the average. Hence, the parameter settings \mathbf{p}_ℓ and \mathbf{p}_k may be compared based on their residual

means.

[109] Operation 4: Perform the mean test on the set of residuals $\{\epsilon_\ell\}$ and $\{\epsilon_k\}$ computed in the previous operation:

$$[110] \quad H_0: \bar{\epsilon}_\ell = \bar{\epsilon}_k,$$

$$H_1: \bar{\epsilon}_k > \bar{\epsilon}_\ell,$$

[111] where H_0 and H_1 denote the null and alternative hypotheses, respectively. If H_0 is rejected at a chosen significance level α , decide that \mathbf{p}_k is better than \mathbf{p}_ℓ and finish the procedure. If not, go to the next operation.

[112] Operation 5: Perform the mean test on the set of residuals:

$$[113] \quad H_0: \bar{\epsilon}_\ell = \bar{\epsilon}_k,$$

$$H_1: \bar{\epsilon}_\ell > \bar{\epsilon}_k.$$

[114] If H_0 is rejected at a chosen significance level α decide that \mathbf{p}_ℓ is better than \mathbf{p}_k and finish the procedure. If not, go to the next operation.

[115] Operation 6: Decide that there is no statistically significant difference between \mathbf{p}_ℓ and \mathbf{p}_k , and finish the procedure.

[116] The mean tests in Operations 4 and 5 above may be performed using a parametric mean test, for example, the Welch's t-test. By construction, the Welch's t-test assumes independent and identically distributed Gaussian residuals for both groups, but the test is still valid with non-normal residuals for sufficiently large sample sizes (roughly $N_\ell, N_k \geq 50$ should be fine).

[117] Note that in the one-group regression approach, only \mathbf{x}_ℓ samples are used while training the regression model and thus \mathbf{x}_k samples are never seen by $\hat{F}_{\mathbf{p}_\ell}(\cdot)$ during training. However, to compute the residuals ϵ_k for the group k in Operation 3 above, it may be necessary to compute $\hat{F}_{\mathbf{p}_\ell}(\mathbf{x}_k)$ and for a reliable computation with

$\hat{F}_{\mathbf{p}_\ell}(\mathbf{x}_k)$, \mathbf{x}_ℓ and \mathbf{x}_k should have similar statistics. As the discrepancy (e.g., the KL divergence) between the (unknown) distributions of \mathbf{x}_ℓ and \mathbf{x}_k increases, performance of the one-group regression approach is expected to degrade. This motivates an alternative solution based on the two-group regression, as explained next.

[118] Two-Group Regression with Parametric Test

[119] In some embodiments, a two-group regression approach with parametric mean test may be used for the parameter recommendation as well as the RCA for configuration changes. As an example, the procedure for parameter recommendation will now be explained.

[120] Suppose that under the parameter setting \mathbf{p}_ℓ , the unknown ground truth function is

$y = F_{p_\ell}(\mathbf{x})$. Similarly, under the parameter setting p_k , suppose the unknown ground truth function is $y = F_{p_k}(\mathbf{x})$. For ease of explanation, assume

$F_{p_k}(\mathbf{x}) \geq F_{p_\ell}(\mathbf{x})$, $\mathbf{x} \in \text{dom}(F_{p_\ell}) \cap \text{dom}(F_{p_k})$. In the two-group regression approach, the following procedure may be used (regardless of the former assumption).

[121] Operation 1: Partition group ℓ samples $S_\ell = \{(\mathbf{x}_\ell, y_\ell)\}$ into training and test sets,

$$S_\ell^{\text{train}} = \{(\mathbf{x}_\ell^{\text{train}}, y_\ell^{\text{train}})\} \text{ with } |S_\ell^{\text{train}}| = N_\ell^{\text{train}} \text{ and}$$

$$S_\ell^{\text{test}} = \{(\mathbf{x}_\ell^{\text{test}}, y_\ell^{\text{test}})\} \text{ with } |S_\ell^{\text{test}}| = N_\ell^{\text{test}}, \text{ respectively, where } N_\ell^{\text{train}} + N_\ell^{\text{test}} = N_\ell.$$

Similarly, partition group k samples $S_k = \{(\mathbf{x}_k, y_k)\}$ into training and test sets,

$$S_k^{\text{train}} = \{(\mathbf{x}_k^{\text{train}}, y_k^{\text{train}})\} \text{ with } |S_k^{\text{train}}| = N_k^{\text{train}} \text{ and } S_k^{\text{test}} =$$

$$\{(\mathbf{x}_k^{\text{test}}, y_k^{\text{test}})\} \text{ with } |S_k^{\text{test}}| = N_k^{\text{test}}, \text{ respectively, where } N_k^{\text{train}} + N_k^{\text{test}} = N_k.$$

[122] Operation 2: Generate a training dataset by pooling samples from both groups:

$$[123] \quad \mathbf{x}^{\text{train}} = \mathbf{x}_\ell^{\text{train}} \cup \mathbf{x}_k^{\text{train}},$$

$$\mathbf{y}^{\text{train}} = \mathbf{y}_\ell^{\text{train}} \cup \mathbf{y}_k^{\text{train}}.$$

[124] Operation 3: Calibrate a regression model $\hat{F}(\cdot)$ such that $\mathbf{y}^{\text{train}} = \hat{F}(\mathbf{x}^{\text{train}}) + \epsilon$,

where ϵ is the residual term. In the regression training, use sample weighting in favor of the smaller-size group if there is a sample size imbalance between two groups (i.e., if $N_\ell^{\text{train}} \gg N_k^{\text{train}}$ or $N_k^{\text{train}} \gg N_\ell^{\text{train}}$).

[125] Operation 4: Compute the residuals on the test sets of two groups separately:

$$[126] \quad \epsilon_\ell = y_\ell^{\text{test}} - \hat{F}(\mathbf{x}_\ell^{\text{test}}),$$

$$\epsilon_k = y_k^{\text{test}} - \hat{F}(\mathbf{x}_k^{\text{test}}).$$

[127] At this point, it is noted that because of the assumption $F_{p_k}(\mathbf{x}) \geq F_{p_\ell}(\mathbf{x})$ in the

beginning and since $\hat{F}(\cdot)$ is calibrated with samples from both groups, it is expected that $F_{p_k}(\mathbf{x}) \geq \hat{F}(\mathbf{x}) \geq F_{p_\ell}(\mathbf{x})$. That is, the regression model does smoothing between

the ground truth functions of the two groups. Hence, while ϵ_ℓ is expected to take negative values on the average, ϵ_k is expected to take positive values on the average.

The parameter settings p_ℓ and p_k may then be compared based on their residual means.

[128] Operation 5: Perform the mean test on the set of residuals $\{\epsilon_\ell\}$ and $\{\epsilon_k\}$ computed in Operation 4:

$$[129] \quad H_0: \bar{\epsilon}_\ell = \bar{\epsilon}_k,$$

$$H_1: \bar{\epsilon}_k > \bar{\epsilon}_\ell,$$

[130] If H_0 is rejected at a chosen significance level α , decide that p_k is better than p_ℓ and

finish the procedure. If not, go to the next operation.

[131] Operation 6: Perform the mean test on the set of residuals:

$$[132] \quad H_0: \bar{\epsilon}_\ell = \bar{\epsilon}_k,$$

$$H_1: \bar{\epsilon}_\ell > \bar{\epsilon}_k,$$

[133] If H_0 is rejected at a chosen significance level α , decide that p_ℓ is better than p_k and finish the procedure. If not, go to the next operation.

[134] Operation 7: Decide that there is no statistically significant difference between p_ℓ and p_k , and finish the procedure.

[135] The mean tests in Operations 5 and 6 above may be performed using a parametric mean test, for example the Welch's t-test. It is noted that the two-group regression approach does not require the same domain or the same distribution for the regressors x_ℓ and x_k of the two groups. Although discrepancy between the distributions of x_ℓ and x_k may still degrade its performance, the two-group regression approach is more robust to this discrepancy compared to the one-group regression approach.

[136] M-fold Regression

[137] In some embodiments, a M-fold regression technique may be used during the CM analytics operation 506 as a regression enhancement technique. To improve both sample efficiency and model stability (despite more computations), $M > 1$ different regression models may be trained with the available data and all M models may be incorporated into the decision process for pairwise parameter comparison. The procedure is explained as follows.

[138] Operation 1: Partition the available data into equally-sized M parts.

[139] Operation 2: Use M-1 parts of data to train a regression model.

[140] Operation 3: Use the remaining one part to compute a subset of residuals.

[141] Operation 4: Repeat Operations 2 and 3 M times, where at each repetition, use a different dataset for training the regression model (and for computing the residuals).

[142] Operation 5: Generate the final set of residuals by pooling together the M subsets of residuals (where each subset is computed at Operation 3). The final set of residuals will be used in the mean tests for parameter comparison.

[143] This M-fold regression enhancement technique may be applied to both the one-group regression and the two-group regression approaches discussed above. In the M-fold one-group regression, referring to the one-group regression approach described before, S_ℓ is partitioned into M parts in Operation 1 above and the regression is trained using the M-1 parts of S_ℓ . Next, the remaining one part of S_ℓ is used to compute the residual for the group ℓ in Operation 3. Moreover, residuals for the group k are computed using the regression model calibrated at Operation 2. This is repeated M times as stated

in Operation 4. Finally, in Operation 5, the final set of residuals for each group are obtained separately by pooling together the subsets of residuals previously computed at Operation 3.

[144] In the M-fold two-group regression, referring to the two-group regression approach described before, both S_p and S_k are partitioned into M parts in Operation 1 above. Next, in Operation 2, M-1 parts of S_p and M-1 parts of S_k are pooled together to train a common regression model. Next, in Operation 3, residuals for each group are computed separately using the remaining one part of each group. This is repeated M times as stated in Operation 4. Finally, in Operation 5, the final set of residuals for each group are obtained separately by pooling together their subsets of residuals previously computed at Operation 3.

[145] An ensemble of ML models may perform better than a single ML model (see, e.g., the random forest learning as an ensemble of decision trees). The M-fold regression depends on an ensemble of regression models and hence improves the model stability. Furthermore, the M-fold regression improves sample efficiency since (i) more samples are used in the training of each regression model, particularly (M-1)/M ratio of available samples is used in each regression, and (ii) the size of the final residual sets is larger for both groups. The sample efficiency is especially critical for small sample sizes, typically observed at field tests for continuous improvement trials and closed-loop parameter optimizations in the cellular networks. With more residual samples obtained based on multiple regression models, the mean tests for parameter comparison may output more reliable decisions (i.e., a higher probability of correct decision).

[146] Validation

[147] The parameter recommendation solutions described above may be validated using artificial data. The objective of using artificial data is to generate test cases where the ground truth comparison between any two parameters is known and evaluate the performance of the parameter recommendation solutions accordingly. In some embodiments, the following linear model may be used to generate the artificial data:

$$[148] \quad y = \mathbf{w}(p)^T \mathbf{x}(h) + n,$$

[149] where y denotes the target KQI, \mathbf{x} denotes the regressor KPIs, p denotes the parameter value, h denotes a hidden variable to account for unobservable factors, and n denotes the zero-mean Gaussian noise. The coefficient vector \mathbf{w} may be determined based on the parameter value p (it is assumed that p is scalar for convenience). Moreover, the distribution of regressors \mathbf{x} depends on the hidden variable h , controlled via the sample size. For this model, the signal-to-noise ratio (SNR) is given by

$$[150] \quad \text{SNR} = \frac{\text{E}\left[\left(\mathbf{w}(p)^T \mathbf{x}(h)\right)^2\right]}{\text{E}[n^2]}.$$

[151] Assuming Gaussian regressor KPIs and for each group i , $\mathbf{x}_i \sim N(\boldsymbol{\mu}_{x,i}, \sigma_{x,i}^2 \mathbf{I})$. It is assumed that in the long-term, random and seasonal effects (representing hidden variables) will be similar under different parameter settings. To capture the long-term and short-term effects, the variance $\sigma_{x,i}^2$ of each regressor in the group S_i is assigned inversely proportional to the sample size as given by:

$$[152] \quad \sigma_{x,i}^2 = \frac{\sigma^2}{c N_i},$$

[153] where σ^2 is a chosen base value for the regressor variance and c is a variable to adjust the proportionality. For two groups S_i and S_j , divergence of regressor distributions increases with sample size imbalance, which may be represented by $\max\left\{\frac{N_i}{N_j}, \frac{N_j}{N_i}\right\}$.

[154] Let $\mathbf{w}(p) = [w_{p,1}, w_{p,2}, \dots, w_{p,B}]$ for a given parameter value p . If p_j is better (larger) than p_i , then it is assumed that $w_{p_j,b} \geq w_{p_i,b}, \forall b \in \{1,2, \dots, B\}$ and there exists at least one $b \in \{1,2, \dots, B\}$ such that $w_{p_j,b} > w_{p_i,b}$. In some embodiments, the following operations may be used to generate the coefficient vectors $\mathbf{w}(p_i)$ and $\mathbf{w}(p_j)$ for the two groups based on their parameter values:

[155] (i) A random coefficient vector $\mathbf{w}(p_i)$ is generated for the first group,

[156] (ii) If $p_j = p_i$, set $\mathbf{w}(p_j) = \mathbf{w}(p_i)$,

[157] (iii) If $p_j \neq p_i$, a random index subset I is chosen from $\{1, 2, \dots, B\}$,

[158] (iv) For all $b \notin I$, set $w_{p_j,b} = w_{p_i,b}$,

[159] (v) For all $b \in I$, set $w_{p_j,b} = w_{p_i,b} + (p_j - p_i) U[0,1]$ where $U[0,1]$ is a uniform random variable. That is, $\mathbf{w}(p_j) - \mathbf{w}(p_i)$ is proportional to $p_j - p_i$.

[160] In some embodiments, it is assumed that there is a default parameter setting p_0 . Performance of conventional techniques and the regression-based solutions disclosed herein may be evaluated against the default setting. Evaluation is based on the long-term average target KPI (assuming that random and seasonal effects are similar in the long-term under different parameter settings). In one type of evaluation, let p_* denotes the best parameter setting among the possible settings (including the default setting).

[161] Let the long-term average target KPI under the best parameter setting and the default one be denoted with \bar{y}_* and \bar{y}_0 , respectively. The maximum possible gain that a

parameter setting may achieve over the default setting is then given by the following:

$$[162] \quad \text{Max Gain \%} = \frac{\bar{y}_* - \bar{y}_0}{\bar{y}_0} \times 100$$

[163] If a method recommends the parameter setting p_i with the corresponding long-term average target KPI \bar{y}_i , the gain of this method is then given by:

$$[164] \quad \text{Gain \%} = \frac{\bar{y}_i - \bar{y}_0}{\bar{y}_0} \times 100 \cdot$$

[165] In some experiments, the performance of conventional solutions is compared with the disclosed regression-based solutions at various SNRs (e.g., -5dB, 0dB, 5dB, and 10dB). These experiments show that performance of the regression-based solutions improves with the SNR and the sample size. Even at low SNRs, the ten-fold two-group regression solution disclosed herein always outperforms the conventional solutions. For larger SNRs, the regression-based solutions always outperform the conventional solutions.

[166] One-group Regression with Nonparametric Test

[167] In some embodiments, a one-group regression approach with nonparametric test may be used for the parameter recommendation as well as RCA for configuration changes. As an example, the RCA procedure described below may be used. The procedure is based on determining a change in the conditional distribution of the target KQI of interest with respect to selected KPIs. KPI selection may be based on both engineering domain knowledge and automated procedures (e.g., see the CM filtering and the PM filtering in the data preprocessing/feature engineering operation 504 above).

[168] (1) Anomaly definition: It is considered that an anomaly has happened after a configuration change if the performance of a target KQI is significantly lower than what would have been expected if no change had been made. Mathematically, this may be stated as the following:

$$[169] \quad \text{Prob}_b(S(Y_b, \mathbf{X}_b) \leq S(Y_a, \mathbf{X}_a)) \leq \delta$$

[170] where $S(\cdot)$ is a summary statistic, Y_b and Y_a are the target KQI before and after the change respectively, \mathbf{X}_b and \mathbf{X}_a are the regressor KPIs before and after the change respectively, and Prob_b is a probability model based on the pre-change world.

[171] (2) Probability model: It is assumed that the target KQIs y^t depend on observable KPIs \mathbf{x}^t , managed parameters \mathbf{p} , and unobservable parameters \mathbf{z}^t through a relation, which may be expressed as:

$$[172] \quad Y^t = F(\mathbf{X}^t, \mathbf{p}, \mathbf{Z}^t) = F_{\mathbf{p}}(\mathbf{X}^t, \mathbf{Z}^t).$$

[173] The placement of \mathbf{p} as a subscript is meant to indicate that these parameters do not

change frequently and one may think of separate functional dependencies before and after a change event. Using subscripts b to denote "before" values and subscripts a for "after" values, the following expressed are given:

$$[174] \quad Y_b^t = F_{\mathbf{p}_b}(\mathbf{X}_b^t, \mathbf{Z}_b^t),$$

$$[175] \quad Y_a^{t'} = F_{\mathbf{p}_a}(\mathbf{X}_a^{t'}, \mathbf{Z}_a^{t'}).$$

[176] One goal is to detect whether a configuration change has caused deterioration in the target KQI that cannot be explained by other regressors. To this end, assume that the above functional dependencies may be modelled as:

$$[177] \quad Y_b^t = \hat{F}_{\mathbf{p}_b}(\mathbf{X}_b^t) + \epsilon_b^t,$$

$$Y_a^{t'} = \hat{F}_{\mathbf{p}_a}(\mathbf{X}_a^{t'}) + \epsilon_a^{t'},$$

[178] where $\hat{F}(\cdot)$ is a regression model that captures the dependency of Y^t ($Y^{t'}$) on \mathbf{X}^t ($\mathbf{X}^{t'}$)

[179] (3) Degradation Identification Procedure: The summary statistic may be expressed as:

$$[180] \quad S(Y, \mathbf{X}) = \frac{1}{K} \sum_{i=1}^K (Y^i - \hat{F}_{\mathbf{p}_b}(\mathbf{X}^i)),$$

[181] The general workflow of the degradation identification procedure is summarized in FIGURE 11, which illustrates a process 1100 for root cause analysis for degradation events based on the regression approach, which may be performed during the CM analytics operation 506. As shown in FIGURE 11, in operation 1101, for a configuration change, identify the before and after intervals, which do not include any other change.

[182] At operation 1103, employ the CM filtering and the PM filtering (see the operation 504) to determine the regressor KPIs and calibrate a regression model to the before data:

$$[183] \quad Y_b^t = \hat{F}_{\mathbf{p}_b}(\mathbf{X}_b^t) + \epsilon_b^t.$$

[184] At operation 1105, calculate the residuals for the before data:

$$[185] \quad \epsilon_b^t = Y_b^t - \hat{F}_{\mathbf{p}_b}(\mathbf{X}_b^t).$$

[186] At operation 1107, given samples $\{Y_a^{t'}, X_a^{t'}\}_{i=1}^K$ after the configuration change,

calculate the following summary statistic:

$$[187] \quad \mu_a^K = \frac{1}{K} \sum_{i=1}^K (Y_a^{t'_i} - \hat{F}_{\mathbf{p}_b}(\mathbf{X}_a^{t'_i})).$$

[188] At operation 1109, given a large N, for $j = 1:N$, calculate

[189]

$$\mu_b^{K,j} = \frac{1}{K} \sum_{i=1}^K \epsilon_b^{t_{i,j}},$$

[190]

where the $\epsilon_b^{t_{i,j}}$ are randomly sampled with replacements from the residuals to determine the distribution of the K-mean residuals implied by the before data (i.e., a nonparametric distribution estimation). Then, compute

[191]

$$q_K = \frac{\sum_{j=1}^N l(\mu_b^{K,j}, \mu_a^K)}{N},$$

[192]

where

[193]

$$l(x, y) = \begin{cases} 1, & \text{if } x \leq y, \\ 0, & \text{otherwise.} \end{cases}$$

[194]

Here, q_K is the probability implied from the residual terms of the "before" model that the average would be less than or equal to what has been observed.

[195]

At operation 1111, if $q_K < q_{tol}$, declare that the configuration change has deteriorated performance at confidence level $1 - q_{tol}$. Since this test is based on a nonparametric distribution estimation, it is called a nonparametric test.

[196]

(4) Validation: In some embodiments, a large number of cells (e.g., 1967 cells) may be considered for validation of this procedure. Here, the term cell refers to a configuration change corresponding to a particular eNB and cell site for which there are at least 300 samples before and after the change event and no other configuration changes are made in any of these intervals. To reduce notation, cell indices are omitted in the discussion below. The context should make clear whether a calculation is per cell or aggregated across cells.

[197]

False Detection of Degradation and Improvement:

[198]

Per cell, each sample in the before data set is randomly assigned a label from the set $\{1, 2, 3, 4, 5\}$. The procedure then iterates through the labels, considering samples labeled with the current iteration as the test set, and the remaining samples as the training set. In the application of this model, the training data plays the role of data before the configuration change, and the test data plays the role of the "after" data. Specifying the degradation identification procedure to the current setting, let $Y_{test}^{t'}, X_{test}^{t'}$ denote data assigned to the test set and let $Y_{training}^t, X_{training}^t$ denote data assigned to the training set.

[199]

First, a regression model is fit to the data in the training set:

[200]

$$Y_{training}^t = \hat{F}_{training}(X_{training}^t) + \epsilon_{training}^t$$

[201] and the residuals of this model applied to the test set are calculated:

$$[202] \quad \epsilon_{test}^{t'} = Y_{test}^{t'} - \hat{F}_{training}(X_{test}^{t'})$$

[203] Assuming that there are K samples in the test set, the summary statistic is calculated as:

$$[204] \quad \mu_{test} = \frac{1}{K} \sum_{t'=1}^K \epsilon_{test}^{t'}$$

[205] Also, the empirical probability is calculated, based on residuals from the training data, whether this average would be in the left tail of the distribution based on K averages of the training residuals, $\epsilon_{training}^t$. Denoting the percentile corresponding to the j th test set from the cross validation as p_{test}^j , this is repeated for the five test samples, and the median p_{test}^{med} is taken as the cross-validation percentile. Next, for a given confidence level τ , it is determined that there has been a degradation at this confidence level if the percentile p_{test}^{med} is below $1-\tau$. As the training and test data are drawn from an interval with no configuration change, it is expected that p_{test}^{med} should not fall in the left tail of this empirical distribution. This is supported by the results reported in Table 1, where the probability refers to the frequency of cells where the event occurred.

[206] Table 1: Probability of False Detection of Degradation at Various Confidence Levels

Confidence	Degradation Probability
0.9	0.007
0.95	0.002
0.99	0.0

[208] Although the main objective is explaining degradation, the process may symmetrically consider detecting improvement. In this case, improvement may be detected at confidence level τ if the percentile p_{test}^{med} is above τ . The results reported in Table 2 demonstrate that no distributional change should be detected in the set used for cross validation.

[209] Table 2: Probability of False Detection of Improvement at Various Confidence Levels

[210]

Confidence	Improvement Probability
0.9	0.005
0.95	0.0
0.99	0.0

[211] Precision and Recall:

[212] Here, data is considered that crosses a configuration change and so splits into the before and after data. The entire before data is used to determine the regression function \hat{f}_{pb} . A complication that arises in this case is that the ground truth is unavailable, whether there has been degradation or improvement for the target KQI. To this end, all of the available samples in the after data may be used to calculate the following:

[213]

$$\mu_{gt} = \frac{1}{M} \sum_{t'=1}^M \epsilon_{after}^{t'}$$

[214]

where M is the number of data points after the configuration change. Letting $\mathbf{Pr}(\cdot)$ denote the empirical cumulative distribution function based on data from before the configuration change, it is then considered that degradation D has occurred at confidence level τ if $\mathbf{Pr}(\mu_{gt}) \leq 1 - \tau$ and improvement I at that confidence level if $\mathbf{Pr}(\mu_{gt}) \geq \tau$.

[215]

Next, the prediction for degradation or improvement is considered. In the spirit of the cross validation, it is possible to sample from the after data multiple times and take a median. Here, the maximum number of points in a sample is restricted to $\frac{M}{2}$, since it is not desirable to match the assumed ground truth just because the same data is sampled that is used for its calculation. Five times, $\frac{M}{2}$ points are drawn from the after data and randomly permuted. The following is then calculated:

[216]

$$p_j^d = \mathbf{Pr} \left(\frac{1}{d} \sum_{t''=1}^d \epsilon_{after}^{t''} \right), j = 1, \dots, 5, d = 60, 120, \dots, \min \left(\frac{M}{2}, 300 \right),$$

[217]

where j indexes the sample of $\frac{M}{2}$ points taken from the after data, and d is the number of these points used for prediction. It is noted that the points are indexed by t'' , since the sample taken from the after data is permuted. Using the following:

[218]

$$p^d = \text{median}_j \{p_j^d\},$$

[219] the degradation prediction events are defined as:

$$[220] \quad E_d = p^d \leq 1 - \tau, d = 60, 120, \dots, \min\left(\frac{M}{2}, 300\right)$$

[221] and the improvement events are defined as:

$$[222] \quad E_i = p^d \geq \tau, d = 60, 120, \dots, \min\left(\frac{M}{2}, 300\right).$$

[223] These events are per cell, and their probabilities may be determined by aggregating results across cells. In particular, the following may be defined: Precision and recall for degradation by $\text{Precision}_d = \text{Prob}(D|E_d)$ and $\text{Recall}_d = \text{Prob}(E_d|D)$; precision and recall for improvement by $\text{Precision}_i = \text{Prob}(I|E_i)$ and $\text{Recall}_i = \text{Prob}(E_i|I)$, respectively. Some test results are summarized in Tables 3, 4, 5, and 6.

[224] Table 3: Precision In Case of Degradation

confidence / days	1	2	3	4	5
0.9	0.991	0.99	0.988	0.992	0.986
0.95	0.99	0.991	0.995	0.994	0.99
0.99	0.992	0.998	1.0	1.0	1.0

[226] Table 4: Recall In Case of Degradation

confidence / days	1	2	3	4	5
0.9	0.75	0.829	0.877	0.84	0.835
0.95	0.701	0.795	0.831	0.813	0.809
0.99	0.651	0.755	0.811	0.789	0.785

[228] Table 5: Precision In Case of Improvement

confidence / days	1	2	3	4	5
0.9	0.975	0.987	0.99	0.981	0.993
0.95	0.984	0.996	0.998	0.992	0.984
0.99	0.996	1.0	0.997	0.997	0.995

[230] Table 6: Recall In Case of Improvement

[231]

confidence / days	1	2	3	4	5
0.9	0.604	0.757	0.832	0.858	0.863
0.95	0.544	0.712	0.812	0.839	0.842
0.99	0.413	0.603	0.704	0.763	0.773

[232] In both continuous improvement trial and closed-loop parameter optimization, tuning parameters should be determined before the field tests. If the functional relationship between a target KQI of interest and the configuration parameters may be predicted well, the system 400 may identify opportunities for performance improvement and select which parameters to tune accordingly. To this end, in some embodiments, the CM analytics operation 506 may include the parameter sensitivity analysis as detailed below.

[233] Suppose that the following data is available in the form of $\{(x_i, \mathbf{p}_i, y_i)\}$ collected from a cell. A cell-level regression model $\hat{F}(\cdot)$ may be calibrated on this dataset such that

$$[234] \quad y_i = \hat{F}(x_i, \mathbf{p}_i) + \epsilon_i,$$

[235] where ϵ_i denotes the residual term.

[236] Suppose that there are v parameters p_1, p_2, \dots, p_v in total such that $\mathbf{p}_i = [p_{1,i}, p_{2,i}, \dots, p_{v,i}]$. In the regression model, each parameter is used as a feature, and the feature importance may indicate the impact of each parameter on the target KQI and which parameters are most relevant to the target KQI. Hence, feature importance may be considered as an indicator of parameter sensitivity. As a special case, if $\hat{F}(\cdot)$ is a linear regression model, the following may be expressed:

$$[237] \quad y_i = \hat{F}(x_i, \mathbf{p}_i) + \epsilon_i = \mathbf{w}_x^T \mathbf{x}_i + \mathbf{w}_p^T \mathbf{p}_i + \epsilon_i,$$

[238] where \mathbf{w}_x and \mathbf{w}_p denote the coefficient vectors for the regressor KPIs and the parameters, respectively. In this case, the sign and magnitude of a linear regression coefficient show the impact of corresponding parameters on the target KQI of interest. Hence, letting $\mathbf{w}_p = [w_{p_1}, w_{p_2}, \dots, w_{p_v}]$, for each parameter p_v , its linear regression coefficient w_{p_v} indicates the parameter sensitivity. In practice, the linear regression models may be trained and the coefficients of each feature may be determined via open-source ML tools. For example, the `LinearRegression()` function in the Python `scikit-learn` package may be fit to the cell dataset, and the `coeff` property may be retrieved for the coefficients of all features, including the parameters.

[239] For a general regression model $\hat{F}(\cdot)$, the parameter sensitivity may be determined by

changing the value of a single parameter while keeping all other factors fixed, and computing the change in the predicted target KQI. Hence, the sensitivity of a parameter p_v , denoted as β_{p_v} , may be determined as follows:

$$[240] \quad \beta_{p_v} = E_{x,p} \left[\frac{\Delta \hat{F}(x, p)}{\Delta p_v} \right] = E_{x, p_a, p_b} \left[\frac{\hat{F}(x, p_a) - \hat{F}(x, p_b)}{p_{a,v} - p_{b,v}} \right] \cong \frac{1}{|X| |P|} \sum_{x \in X} \sum_{p_a, p_b \in P} \frac{\hat{F}(x, p_a) - \hat{F}(x, p_b)}{p_{a,v} - p_{b,v}},$$

[241] where $E[\cdot]$ is the expectation operator, and p_b and p_a denote pre- and post-change parameter vectors, where only the parameter p_v is changed with the before value $p_{b,v}$ and after value $p_{a,v}$. Moreover, X denotes a set of regressor KPI samples, P denotes the set of p_a, p_b pairs used in the experiment, and $|\cdot|$ denotes the cardinality of a set. It is noted that the procedure described for a general regression model may be applied to a linear regression model as well, and it is expected to obtain similar parameter sensitivity scores with the linear regression coefficients (i.e., $\beta_{p_v} \cong w_{p_v}$).

[242] FIGURE 12 illustrates an example process 1200 for recommending tuning parameters based on the parameter sensitivity analysis for a general regression model, according to embodiments of the disclosure. As shown in FIGURE 12, in operation 1201, a regression model is trained, as given by the equation for y_i shown above. In operation 1203, a fixed set of regressor KPI samples are determined for the next operation. In operation 1205, the parameter sensitivity scores are computed for each parameter interest, as given by the equation for β_{p_v} shown above. Finally, in operation 1207, parameters with the most positive impact on the target KQI are recommended as the tuning parameters. For example, if the target is the DL throughput, the parameters with positive and the largest-magnitude sensitivity scores may be recommended.

[243] Although FIGURES 4 through 12 illustrates one example of a system 400 for automatically using configuration management analytics in cellular networks and related details, various changes may be made to FIGURES 4 through 12. For example, other numbers of RANs, controllers, and user clients could be included in the system 400. Also, various components in FIGURE 4 could be combined, further subdivided, or omitted and additional components could be added according to particular needs. In addition, while shown as a series of operations, various operations in FIGURES 6-8 and 10-12 could overlap, occur in parallel, occur in a different order, or occur any number of times.

[244] FIGURE 13 illustrates a flow chart of a method 1300 for automatically using configuration management analytics in cellular networks according to embodiments of the

disclosure. In some embodiments, the method 1300 may be performed by a network device (e.g., a data center, a local central office, a BS, or the like) operating an AI engine (e.g., the AI engine 410 as illustrated in FIGURE 4). An embodiment of the method 1300 shown in FIGURE 13 is for illustration only. One or more of the components illustrated in FIGURE 13 may be implemented in specialized circuitry configured to perform the noted functions or one or more of the components may be implemented by one or more processors executing instructions to perform the noted functions.

- [245] As illustrated in FIGURE 13, the method 1300 begins at operation 1301. At operation 1301, the AI engine obtains a set of CM data for one or more cellular network devices, where the CM data includes multiple CM parameters. This could include, for example, the AI engine 410 performing the data loading operation 502 to obtain a set of CM data for the CN 402, the RAN 404, or the like.
- [246] At operation 1303, the AI engine performs at least one of multiple data preprocessing operations on the set of CM data. This could include, for example, the AI engine 410 performing the data preprocessing/feature engineering operation 504, which may include (i) removing invalid data samples, (ii) normalizing or scaling the CM data, (iii) removing trends or seasonality in the CM data, (iv) generating additional synthetic features from existing KPIs in the CM data, and (v) selecting a subset of the CM data associated with a specific timeframe or a specific group of the cellular network devices, and the like.
- [247] At operation 1305, the AI engine partitions the set of CM data into multiple distinct time intervals, where each time interval is associated with a distinct set of CM settings at the one or more cellular network devices. This could include, for example, the AI engine 410 partitioning the set of CM data into before and after intervals, such as described with respect to the process 800.
- [248] At operation 1307, the AI engine determines a regression model based on the set of CM data. This could include, for example, the AI engine 410 determining a cell level regression model, such as described with respect to the process 1000.
- [249] At operation 1309, the AI engine applies the regression model to compute a distinct set of scores and compare the set of scores to estimate whether a performance of the one or more cellular network devices has changed during a second time interval relative to a first time interval. This could include, for example, the AI engine 410 performing the CM analytics operation 506 and detecting if there is performance degradation after a configuration change, such as described with respect to the process 800.
- [250] At operation 1311, in response to estimating that the performance of the one or more cellular network devices has degraded during the second time interval, the AI engine

performs RCA to determine whether the performance degradation is attributable to the CM change. This could include, for example, the AI engine 410 performing the CM analytics operation 506 and operation 805 to perform the RCA.

[251] At operation 1313, the AI engine determines at least one recommended parameter configuration to optimize a target KPI or KQI. This could include, for example, the AI engine 410 AI engine 410 performing the CM analytics operation 506 and the process 1000 to recommend parameter values.

[252] At operation 1315, the AI engine performs parameter sensitivity analysis, including computing a respective sensitivity of each CM parameter of the set of CM data based on an average impact of that CM parameter on the target KPI or KQI while maintaining at least some other factors. This could include, for example, the AI engine 410 performing the CM analytics operation 506 and the process 1200 to determine parameter sensitivity scores.

[253] Although FIGURE 13 illustrates one example of a method 1300 for automatically using configuration management analytics in cellular networks, various changes may be made to FIGURE 13. For example, while shown as a series of operations, various operations in FIGURE 13 could overlap, occur in parallel, occur in a different order, or occur any number of times.

[254] While the disclosure has been illustrated and described with reference to various example embodiments, it will be understood that the various example embodiments are intended to be illustrative, not limiting. It will be further understood by those skilled in the art that various changes in form and detail may be made without departing from the true spirit and full scope of the disclosure, including the appended claims and their equivalents. It will also be understood that any of the embodiment(s) described herein may be used in conjunction with any other embodiment(s) described herein.


Claims

- [Claim 1] A method for configuration management analytics and automation in cellular networks, the method comprising:
partitioning a set of configuration management (CM) data for one or more cellular network devices into multiple distinct time intervals, each time interval associated with a distinct set of CM settings at the one or more cellular network devices, the CM data comprising multiple CM parameters;
determining a regression model based on the set of CM data; and
applying the regression model to compute a distinct set of scores and comparing the distinct set of scores to estimate whether a performance of the one or more cellular network devices has changed during a second time interval relative to a first time interval.
- [Claim 2] The method of Claim 1, further comprising:
in response to estimating that the performance of the one or more cellular network devices has degraded during the second time interval, performing root cause analysis (RCA) including statistically analyzing behavior of a network cell before and after a CM change to determine whether the degradation in the performance of the one or more cellular network devices is attributable to the CM change.
- [Claim 3] The method of Claim 1, further comprising:
determining at least one recommended parameter configuration to optimize a target key performance indicator (KPI) or key quality indicator (KQI).
- [Claim 4] The method of Claim 3, further comprising:
performing parameter sensitivity analysis comprising computing a respective sensitivity of each CM parameter of the set of CM data based on an average impact of that a CM parameter on the target KPI or the KQI while maintaining at least some other factors.
- [Claim 5] The method of Claim 1, wherein determining the regression model comprises:
selecting one or more regressor key performance indicators (KPIs) for the regression model to avoid masking one or more CM parameter effects.
- [Claim 6] The method of Claim 1, further comprising:
performing at least one of multiple data preprocessing operations on the set of CM data, the multiple data preprocessing operations comprising


- (i) removing invalid data samples, (ii) normalizing or scaling the CM data, (iii) removing trends or seasonality in the CM data, (iv) generating additional synthetic features from existing KPIs in the CM data, and (v) selecting a subset of the CM data associated with a specific timeframe or a specific group of the cellular network devices.
- [Claim 7] The method of Claim 1, wherein the regression model comprises a one-group regression or a two-group regression.
- [Claim 8] A device for configuration management analytics and automation in cellular networks, the device comprising:
a transceiver configured to transmit and receive information; and
at least one processor operably connected to the transceiver, the processor configured to:
partition a set of configuration management (CM) data for one or more cellular network devices into multiple distinct time intervals, each time interval associated with a distinct set of CM settings at the one or more cellular network devices, the CM data comprising multiple CM parameters;
determine a regression model based on the set of CM data; and
apply the regression model to compute a distinct set of scores and compare the distinct set of scores to estimate whether a performance of the one or more cellular network devices has changed during a second time interval relative to a first time interval.
- [Claim 9] The device of Claim 8, wherein the processor is further configured to:
in response to estimating that the performance of the one or more cellular network devices has degraded during the second time interval, perform root cause analysis (RCA) including statistically analyzing behavior of a network cell before and after a CM change to determine whether the degradation in the performance of the one or more cellular network devices is attributable to the CM change.
- [Claim 10] The device of Claim 8, wherein the processor is further configured to:
determine at least one recommended parameter configuration to optimize a target key performance indicator (KPI) or key quality indicator (KQI).
- [Claim 11] The device of Claim 10, wherein the processor is further configured to:
perform parameter sensitivity analysis in which the processor computes a respective sensitivity of each CM parameter of the set of CM data based on an average impact of that a CM parameter on the target KPI or the KQI while maintaining at least some other factors.

- [Claim 12] The device of Claim 8, wherein to determine the regression model, the processor is further configured to:
select one or more regressor key performance indicators (KPIs) for the regression model to avoid masking one or more CM parameter effects.
- [Claim 13] The device of Claim 8, wherein the processor is further configured to:
perform at least one of multiple data preprocessing operations on the set of CM data, the multiple data preprocessing operations comprising (i) removing invalid data samples, (ii) normalizing or scaling the CM data, (iii) removing trends or seasonality in the CM data, (iv) generating additional synthetic features from existing KPIs in the CM data, and (v) selecting a subset of the CM data associated with a specific timeframe or a specific group of the cellular network devices.
- [Claim 14] The device of Claim 8, wherein the regression model comprises a one-group regression or a two-group regression.
- [Claim 15] A non-transitory computer readable medium comprising program code that, when executed by at least one processor of a device, causes the device to:
partition a set of configuration management (CM) data for one or more cellular network devices into multiple distinct time intervals, each time interval associated with a distinct set of CM settings at the one or more cellular network devices, the CM data comprising multiple CM parameters;
determine a regression model based on the set of CM data; and
apply the regression model to compute a distinct set of scores and compare the distinct set of scores to estimate whether a performance of the one or more cellular network devices has changed during a second time interval relative to a first time interval.


[Fig. 1]

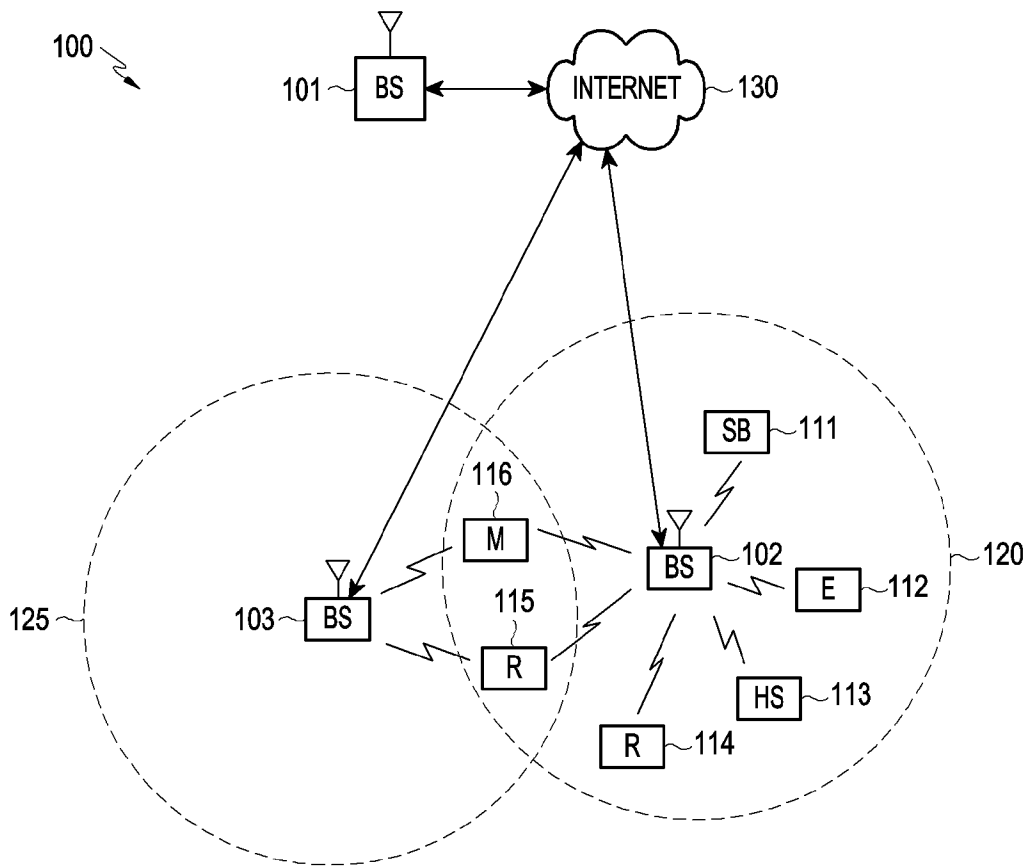


[Fig. 2]

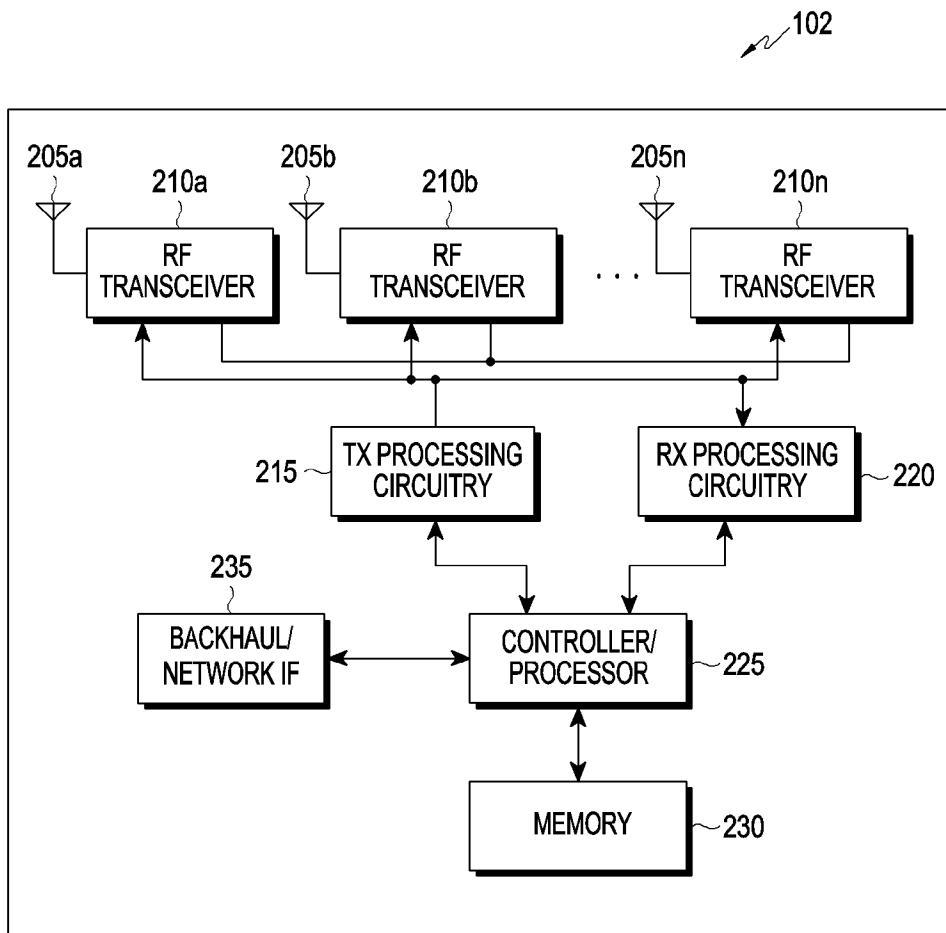


[Fig. 3]

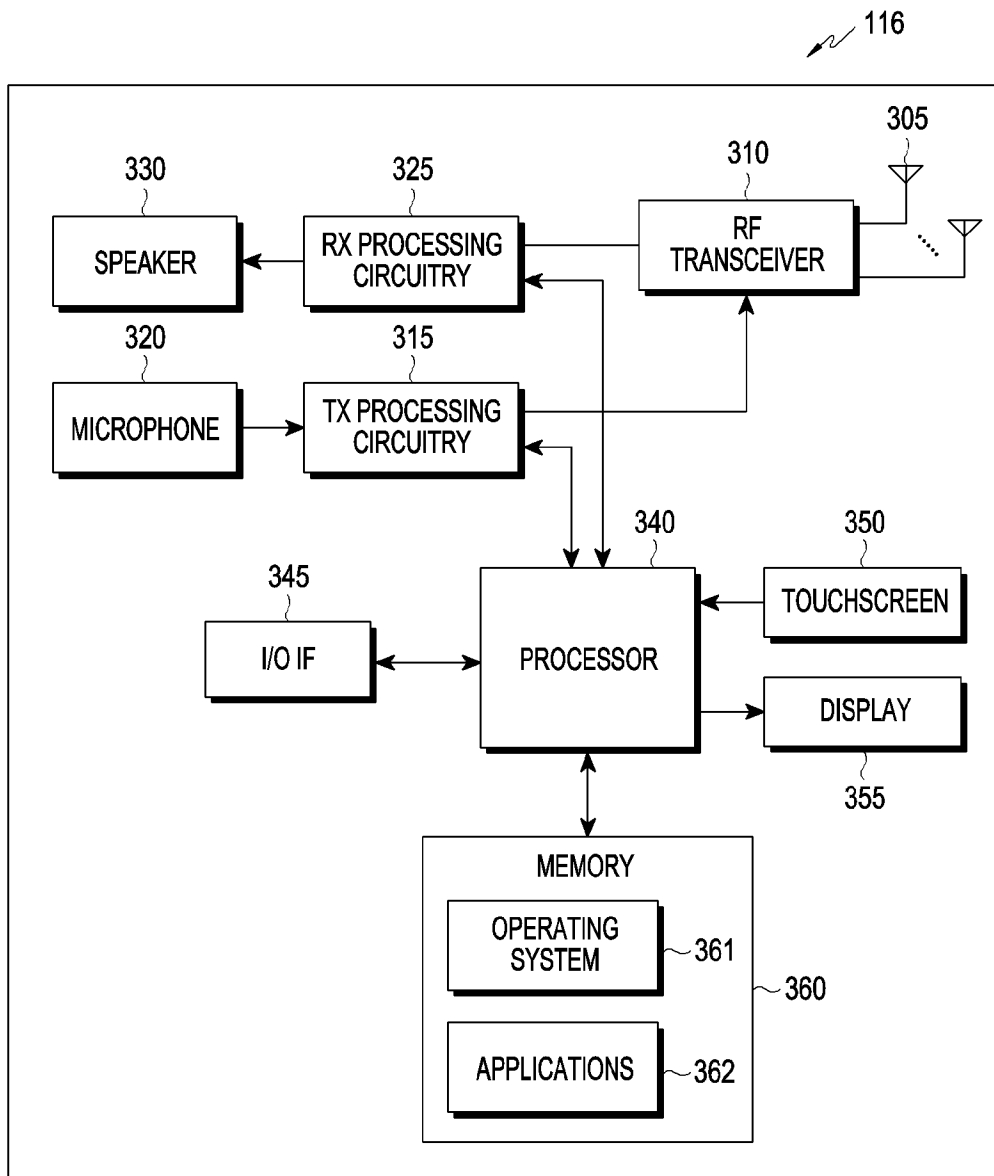


[Fig. 4]

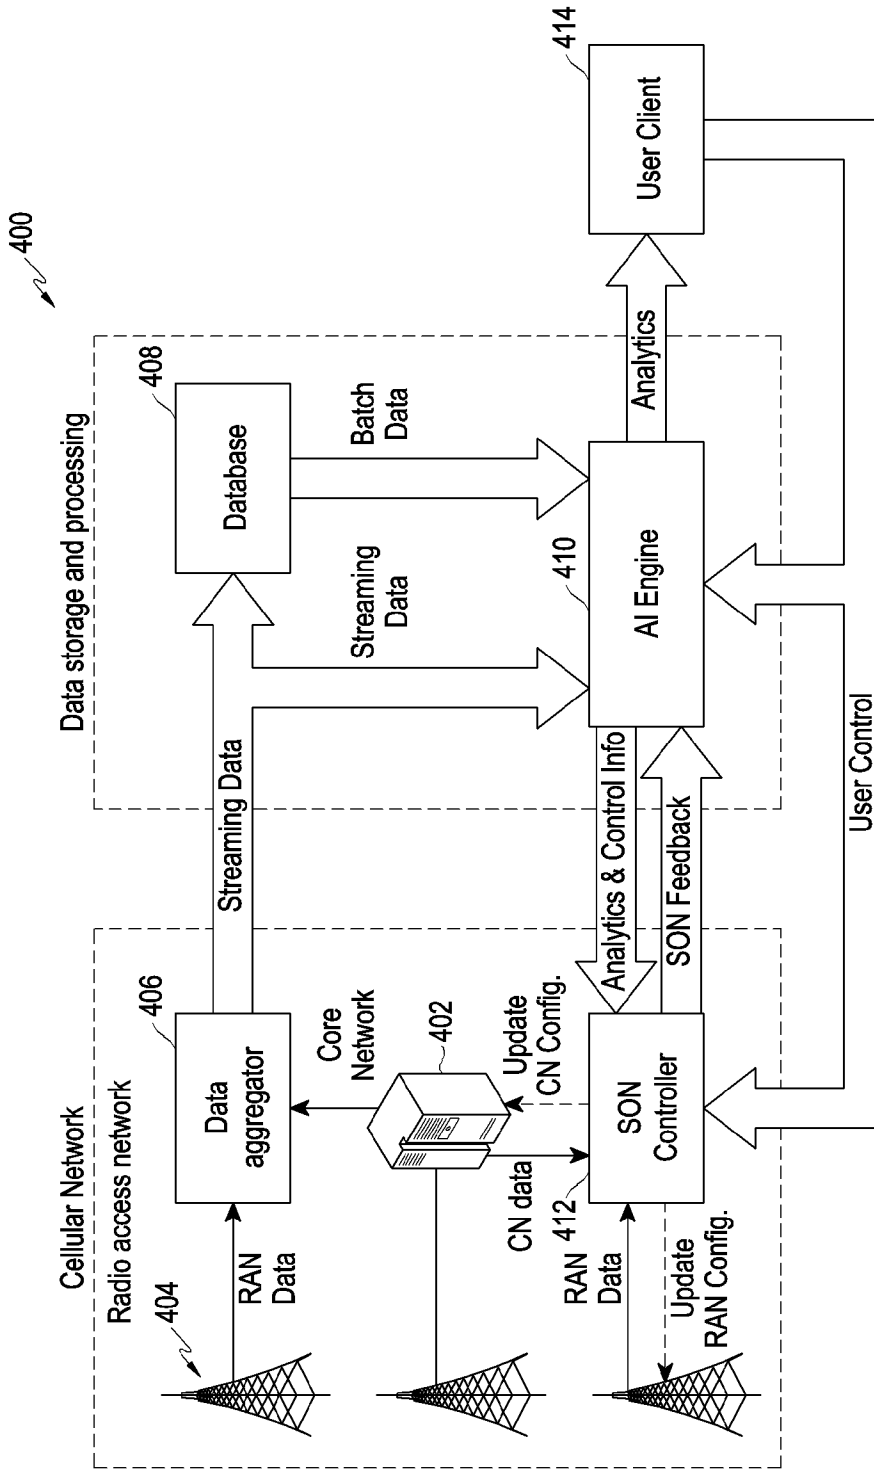


[Fig. 5]

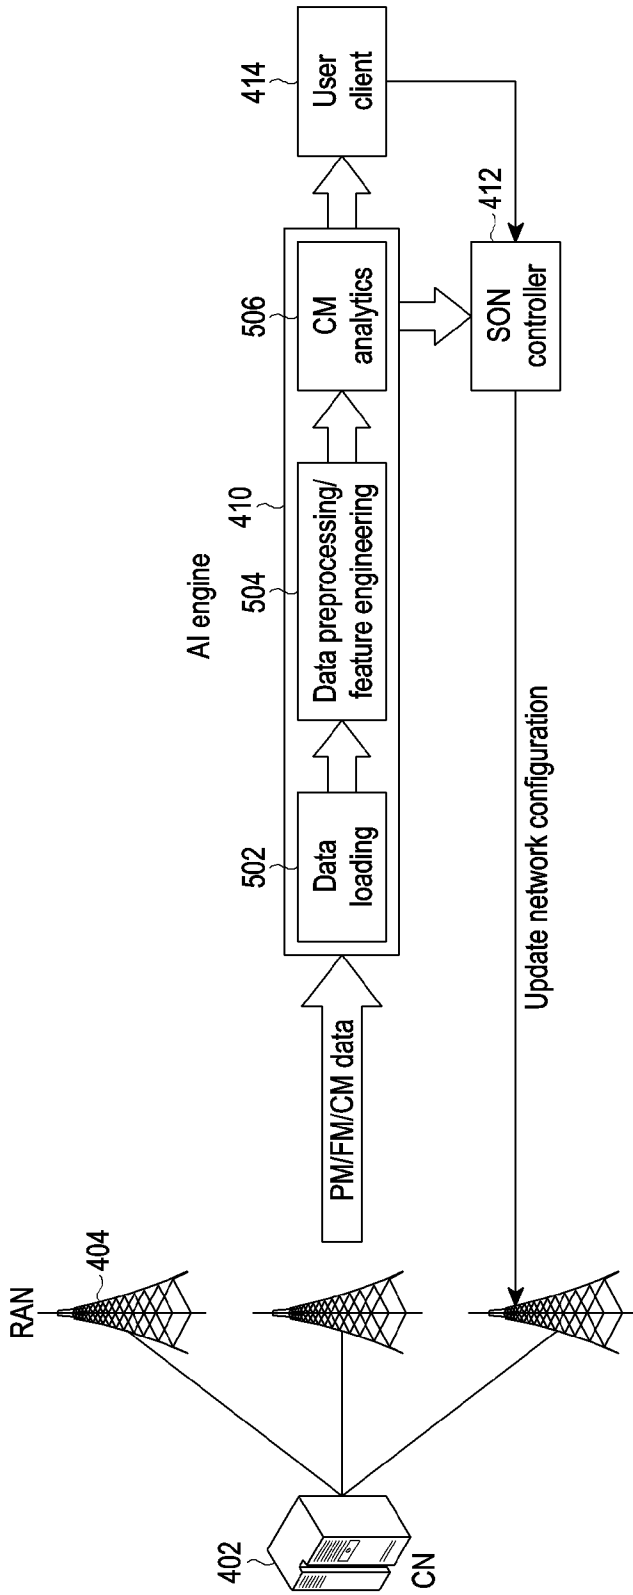


[Fig. 6]

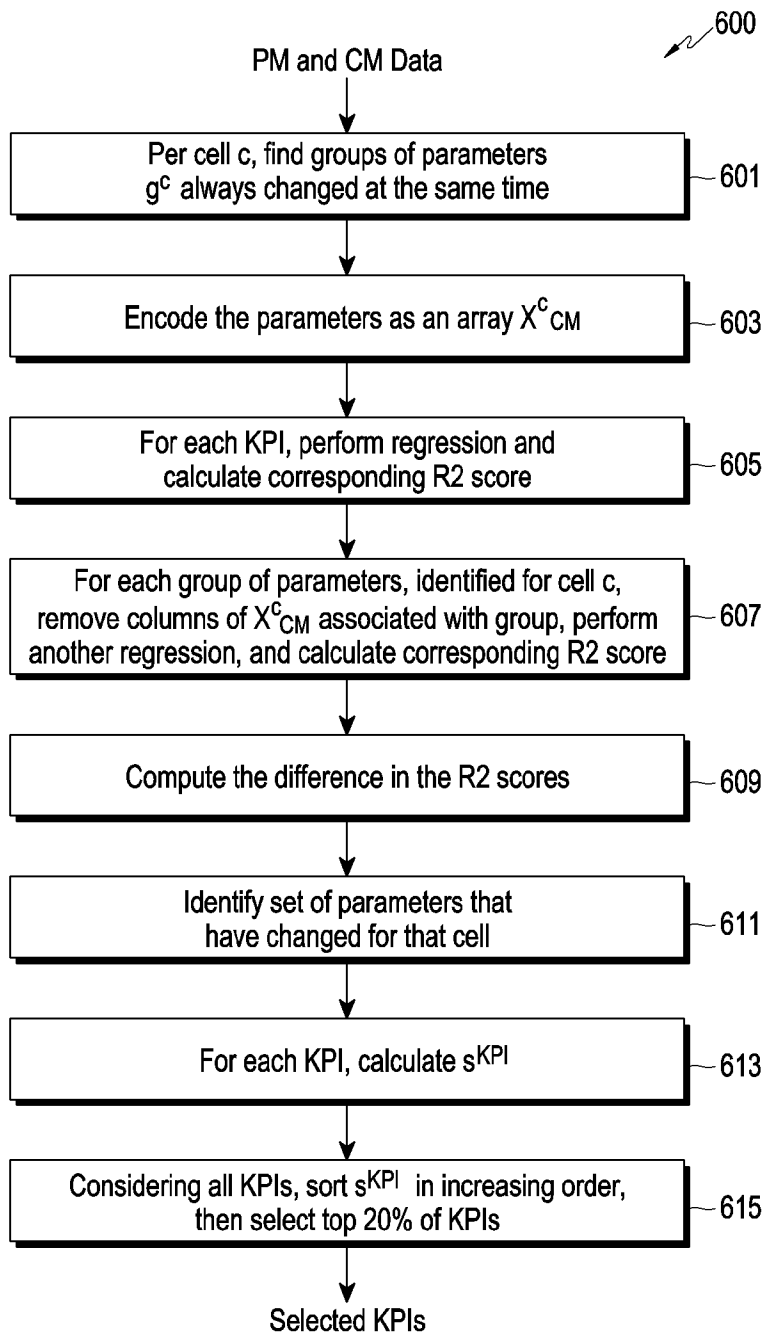


[Fig. 7]

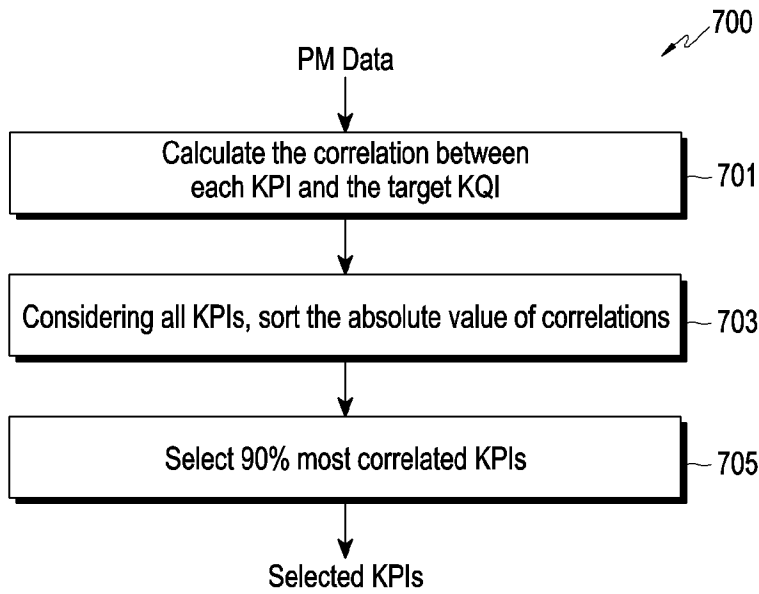


[Fig. 8]

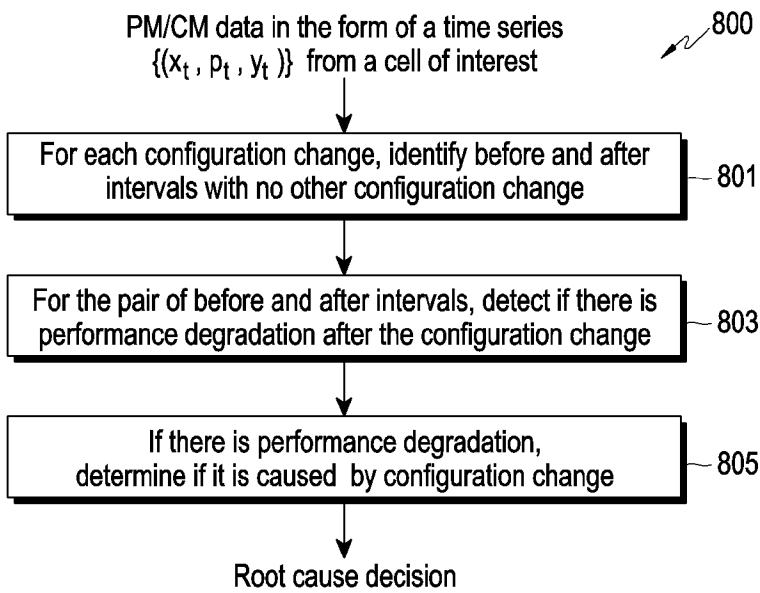


[Fig. 9]

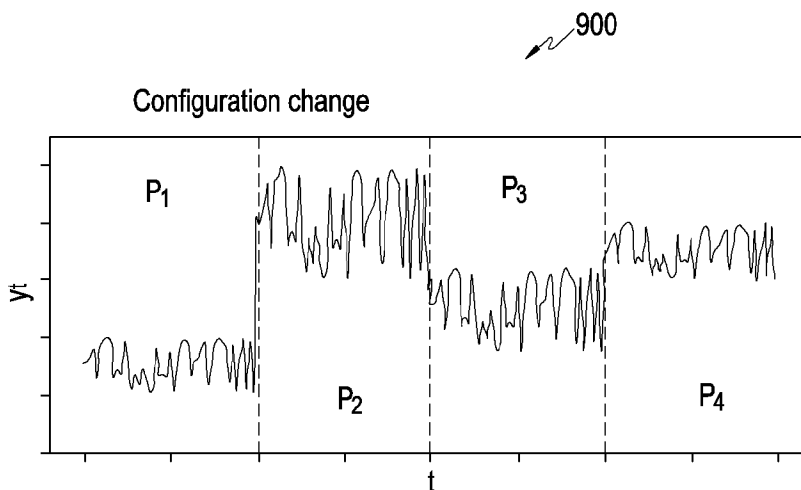


[Fig. 10]

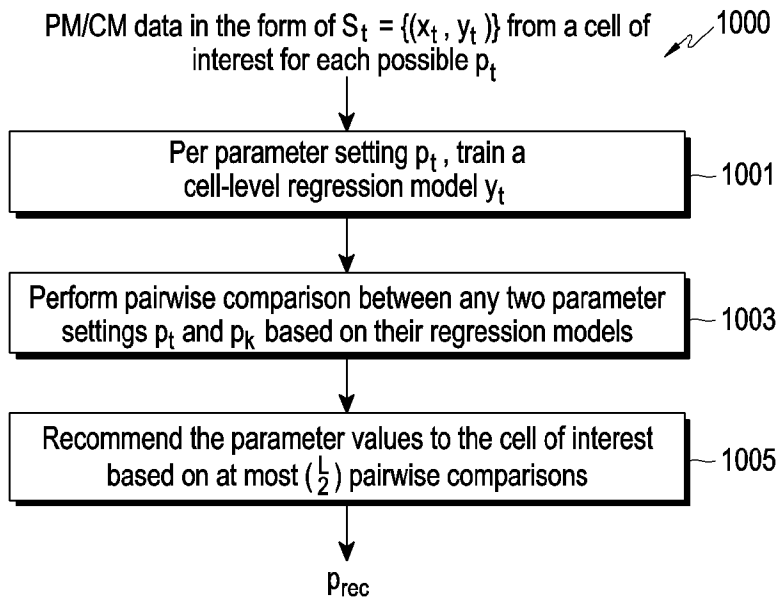


[Fig. 11]

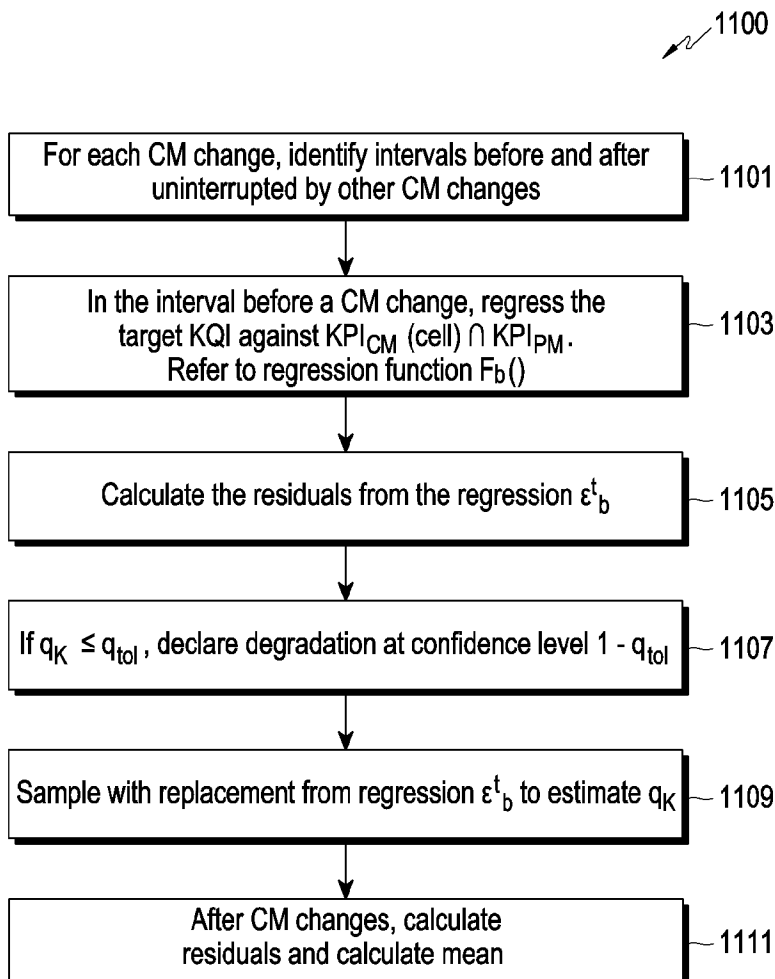

[Fig. 12]

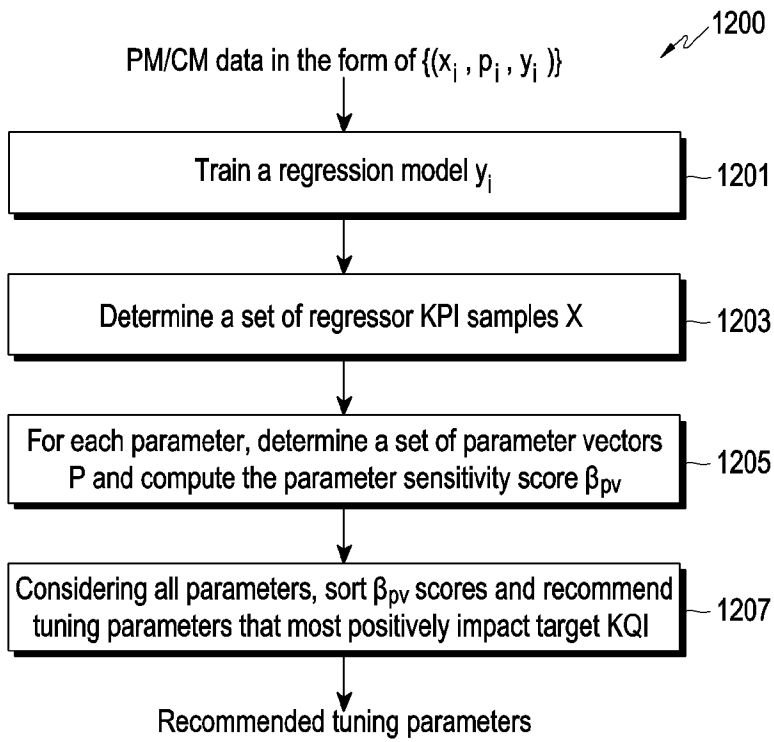

[Fig. 13]

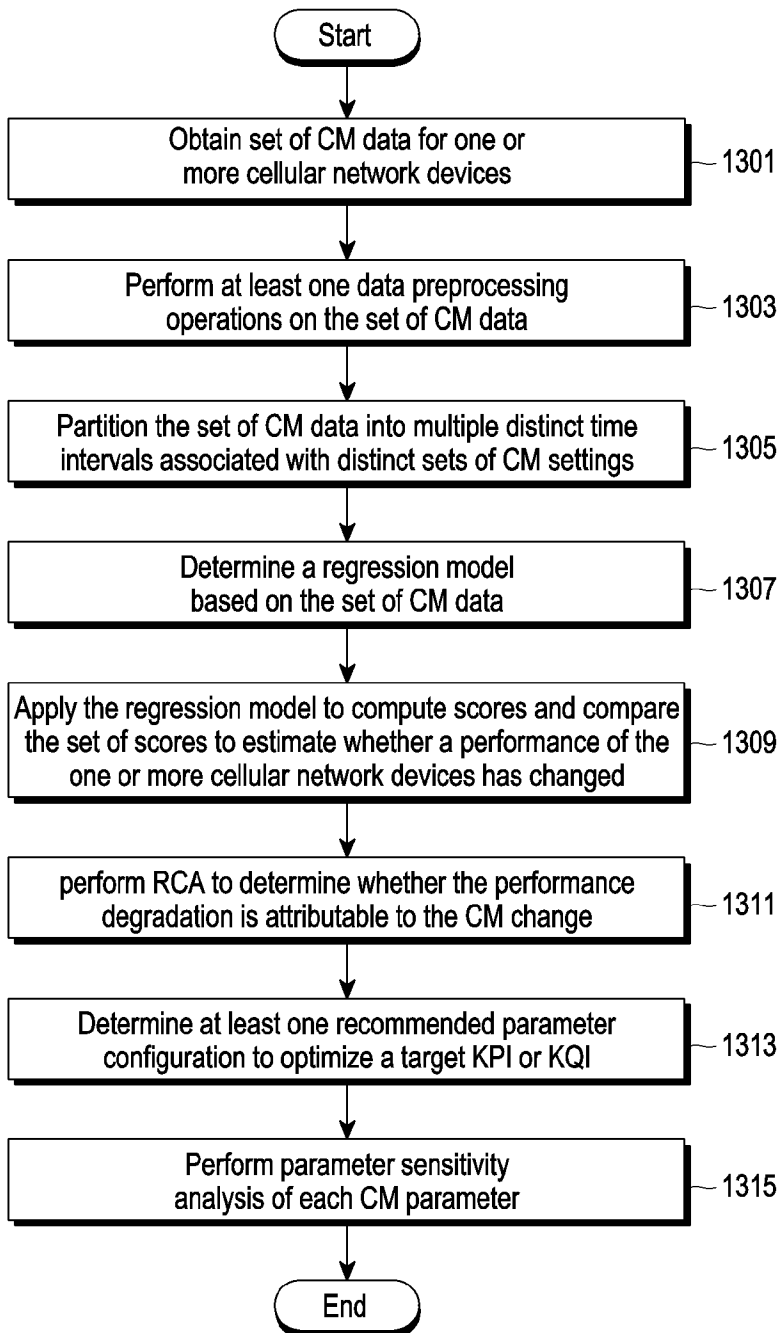

INTERNATIONAL SEARCH REPORT

International application No.

PCT/KR2022/011315

A. CLASSIFICATION OF SUBJECT MATTER		
H04W 24/02(2009.01); H04L 41/0803(2022.01); H04L 41/14(2022.01); H04L 41/16(2022.01)		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) H04W 24/02(2009.01); G06N 3/04(2006.01); G06N 3/08(2006.01); G06N 99/00(2010.01); H04L 12/24(2006.01); H04L 12/26(2006.01); H04W 24/08(2009.01); H04W 72/08(2009.01)		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Korean utility models and applications for utility models Japanese utility models and applications for utility models		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) eKOMPASS(KIPO internal) & Keywords: AI engine, CM (configuration management), cellular network, partition, time interval, automation, regression model, score, compare, performance		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2018-0227930 A1 (VERIZON PATENT AND LICENSING INC.) 09 August 2018 (2018-08-09) paragraphs [0052]-[0075]; claim 1; and figures 5-7	1-15
A	US 2019-0306023 A1 (CISCO TECHNOLOGY, INC.) 03 October 2019 (2019-10-03) paragraphs [0117]-[0122]; and figure 7	1-15
A	US 2019-0028357 A1 (CITRIX SYSTEMS, INC.) 24 January 2019 (2019-01-24) paragraphs [0076]-[0087]; and figures 3-5	1-15
A	US 2020-0012917 A1 (CAPITAL ONE SERVICES, LLC) 09 January 2020 (2020-01-09) paragraphs [0149]-[0173]; and figures 16-17	1-15
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "D" document cited by the applicant in the international application "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 26 October 2022		Date of mailing of the international search report 26 October 2022
Name and mailing address of the ISA/KR Korean Intellectual Property Office 189 Cheongsa-ro, Seo-gu, Daejeon 35208, Republic of Korea Facsimile No. +82-42-481-8578		Authorized officer YANG, Jeong Rok Telephone No. +82-42-481-5709

C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	SARASWATHI PRIYADHARSHINI A et al., 'Regression model for handover control parameter configuration in LTE-A networks', Computers and Electrical Engineering 72 (2018) 877-893, 19 January 2018 [retrieved on 12 October 2022]. Retrieved from the Internet:<URL: https://doi.org/10.1016/j.compeleceng.2018.01.011 > section 3.3	1-15

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/KR2022/011315

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)			Publication date (day/month/year)
US	2018-0227930	A1	09 August 2018	US	10187899	B2	22 January 2019
				US	2017-0290024	A1	05 October 2017
				US	9955488	B2	24 April 2018
US	2019-0306023	A1	03 October 2019	US	10680889	B2	09 June 2020
US	2019-0028357	A1	24 January 2019	US	10116521	B2	30 October 2018
				US	10484250	B2	19 November 2019
				US	2017-0111233	A1	20 April 2017
US	2020-0012917	A1	09 January 2020	EP	3591587	A1	08 January 2020
				US	10379995	B1	13 August 2019
				US	10382799	B1	13 August 2019
				US	10452455	B1	22 October 2019
				US	10459954	B1	29 October 2019
				US	10460235	B1	29 October 2019
				US	10482607	B1	19 November 2019
				US	10521719	B1	31 December 2019
				US	10592386	B2	17 March 2020
				US	10599550	B2	24 March 2020
				US	10599957	B2	24 March 2020
				US	10635939	B2	28 April 2020
				US	10664381	B2	26 May 2020
				US	10671884	B2	02 June 2020
				US	10860460	B2	08 December 2020
				US	10884894	B2	05 January 2021
				US	10896072	B2	19 January 2021
				US	10970137	B2	06 April 2021
				US	10983841	B2	20 April 2021
				US	11032585	B2	08 June 2021
				US	11113124	B2	07 September 2021
				US	11126475	B2	21 September 2021
				US	11182223	B2	23 November 2021
				US	11210144	B2	28 December 2021
				US	11210145	B2	28 December 2021
				US	11237884	B2	01 February 2022
				US	11256555	B2	22 February 2022
				US	11372694	B2	28 June 2022
				US	11385942	B2	12 July 2022
				US	11385943	B2	12 July 2022
				US	2019-0327501	A1	24 October 2019
				US	2020-0012540	A1	09 January 2020
				US	2020-0012583	A1	09 January 2020
				US	2020-0012584	A1	09 January 2020
				US	2020-0012657	A1	09 January 2020
				US	2020-0012662	A1	09 January 2020
				US	2020-0012666	A1	09 January 2020
				US	2020-0012671	A1	09 January 2020
				US	2020-0012811	A1	09 January 2020
				US	2020-0012886	A1	09 January 2020
				US	2020-0012890	A1	09 January 2020
				US	2020-0012891	A1	09 January 2020
				US	2020-0012892	A1	09 January 2020

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/KR2022/011315

Patent document cited in search report	Publication date (day/month/year)	Patent family member(s)	Publication date (day/month/year)
		US 2020-0012900 A1	09 January 2020
		US 2020-0012902 A1	09 January 2020
		US 2020-0012933 A1	09 January 2020
		US 2020-0012934 A1	09 January 2020
		US 2020-0012935 A1	09 January 2020
		US 2020-0012937 A1	09 January 2020
		US 2020-0014722 A1	09 January 2020
		US 2020-0051249 A1	13 February 2020
		US 2020-0065221 A1	27 February 2020
		US 2020-0117998 A1	16 April 2020
		US 2020-0218637 A1	09 July 2020
		US 2020-0218638 A1	09 July 2020
		US 2020-0250071 A1	06 August 2020
		US 2020-0293427 A1	17 September 2020
		US 2021-0049054 A1	18 February 2021
		US 2021-0081261 A1	18 March 2021
		US 2021-0120285 A9	22 April 2021
		US 2021-0182126 A1	17 June 2021
		US 2021-0200604 A1	01 July 2021
		US 2021-0224142 A1	22 July 2021
		US 2021-0255907 A1	19 August 2021
		US 2021-0365305 A1	25 November 2021
		US 2022-0075670 A1	10 March 2022
		US 2022-0083402 A1	17 March 2022
		US 2022-0092419 A1	24 March 2022
		US 2022-0107851 A1	07 April 2022
		US 2022-0147405 A1	12 May 2022
		US 2022-0308942 A1	29 September 2022