



(22) Date de dépôt/Filing Date: 2007/09/14

(41) Mise à la disp. pub./Open to Public Insp.: 2008/04/30

(45) Date de délivrance/Issue Date: 2012/08/21

(30) Priorité/Priority: 2006/10/31 (EP06123302.9)

(51) Cl.Int./Int.Cl. *H04L 1/18* (2006.01),
H04L 12/56 (2006.01), *H04W 80/00* (2009.01)


(72) Inventeurs/Inventors:
SUZUKI, TAKASHI, JP;
WOMACK, JAMES, US;
YOUNG, GORDON PETER, GB

(73) Propriétaire/Owner:
RESEARCH IN MOTION LIMITED, CA

(74) Agent: MOFFAT & CO.

(54) Titre : METHODE ET APPAREIL POUR LA RESEGMENTATION DE DONNEES PAR PAQUETS POUR LA RETRANSMISSION EN CAS DE PANNE DE TRANSMISSION HARQ

(54) Title: METHOD AND APPARATUS FOR RESEGMENTATION OF PACKET DATA FOR RETRANSMISSION ON HARQ TRANSMISSION FAILURE

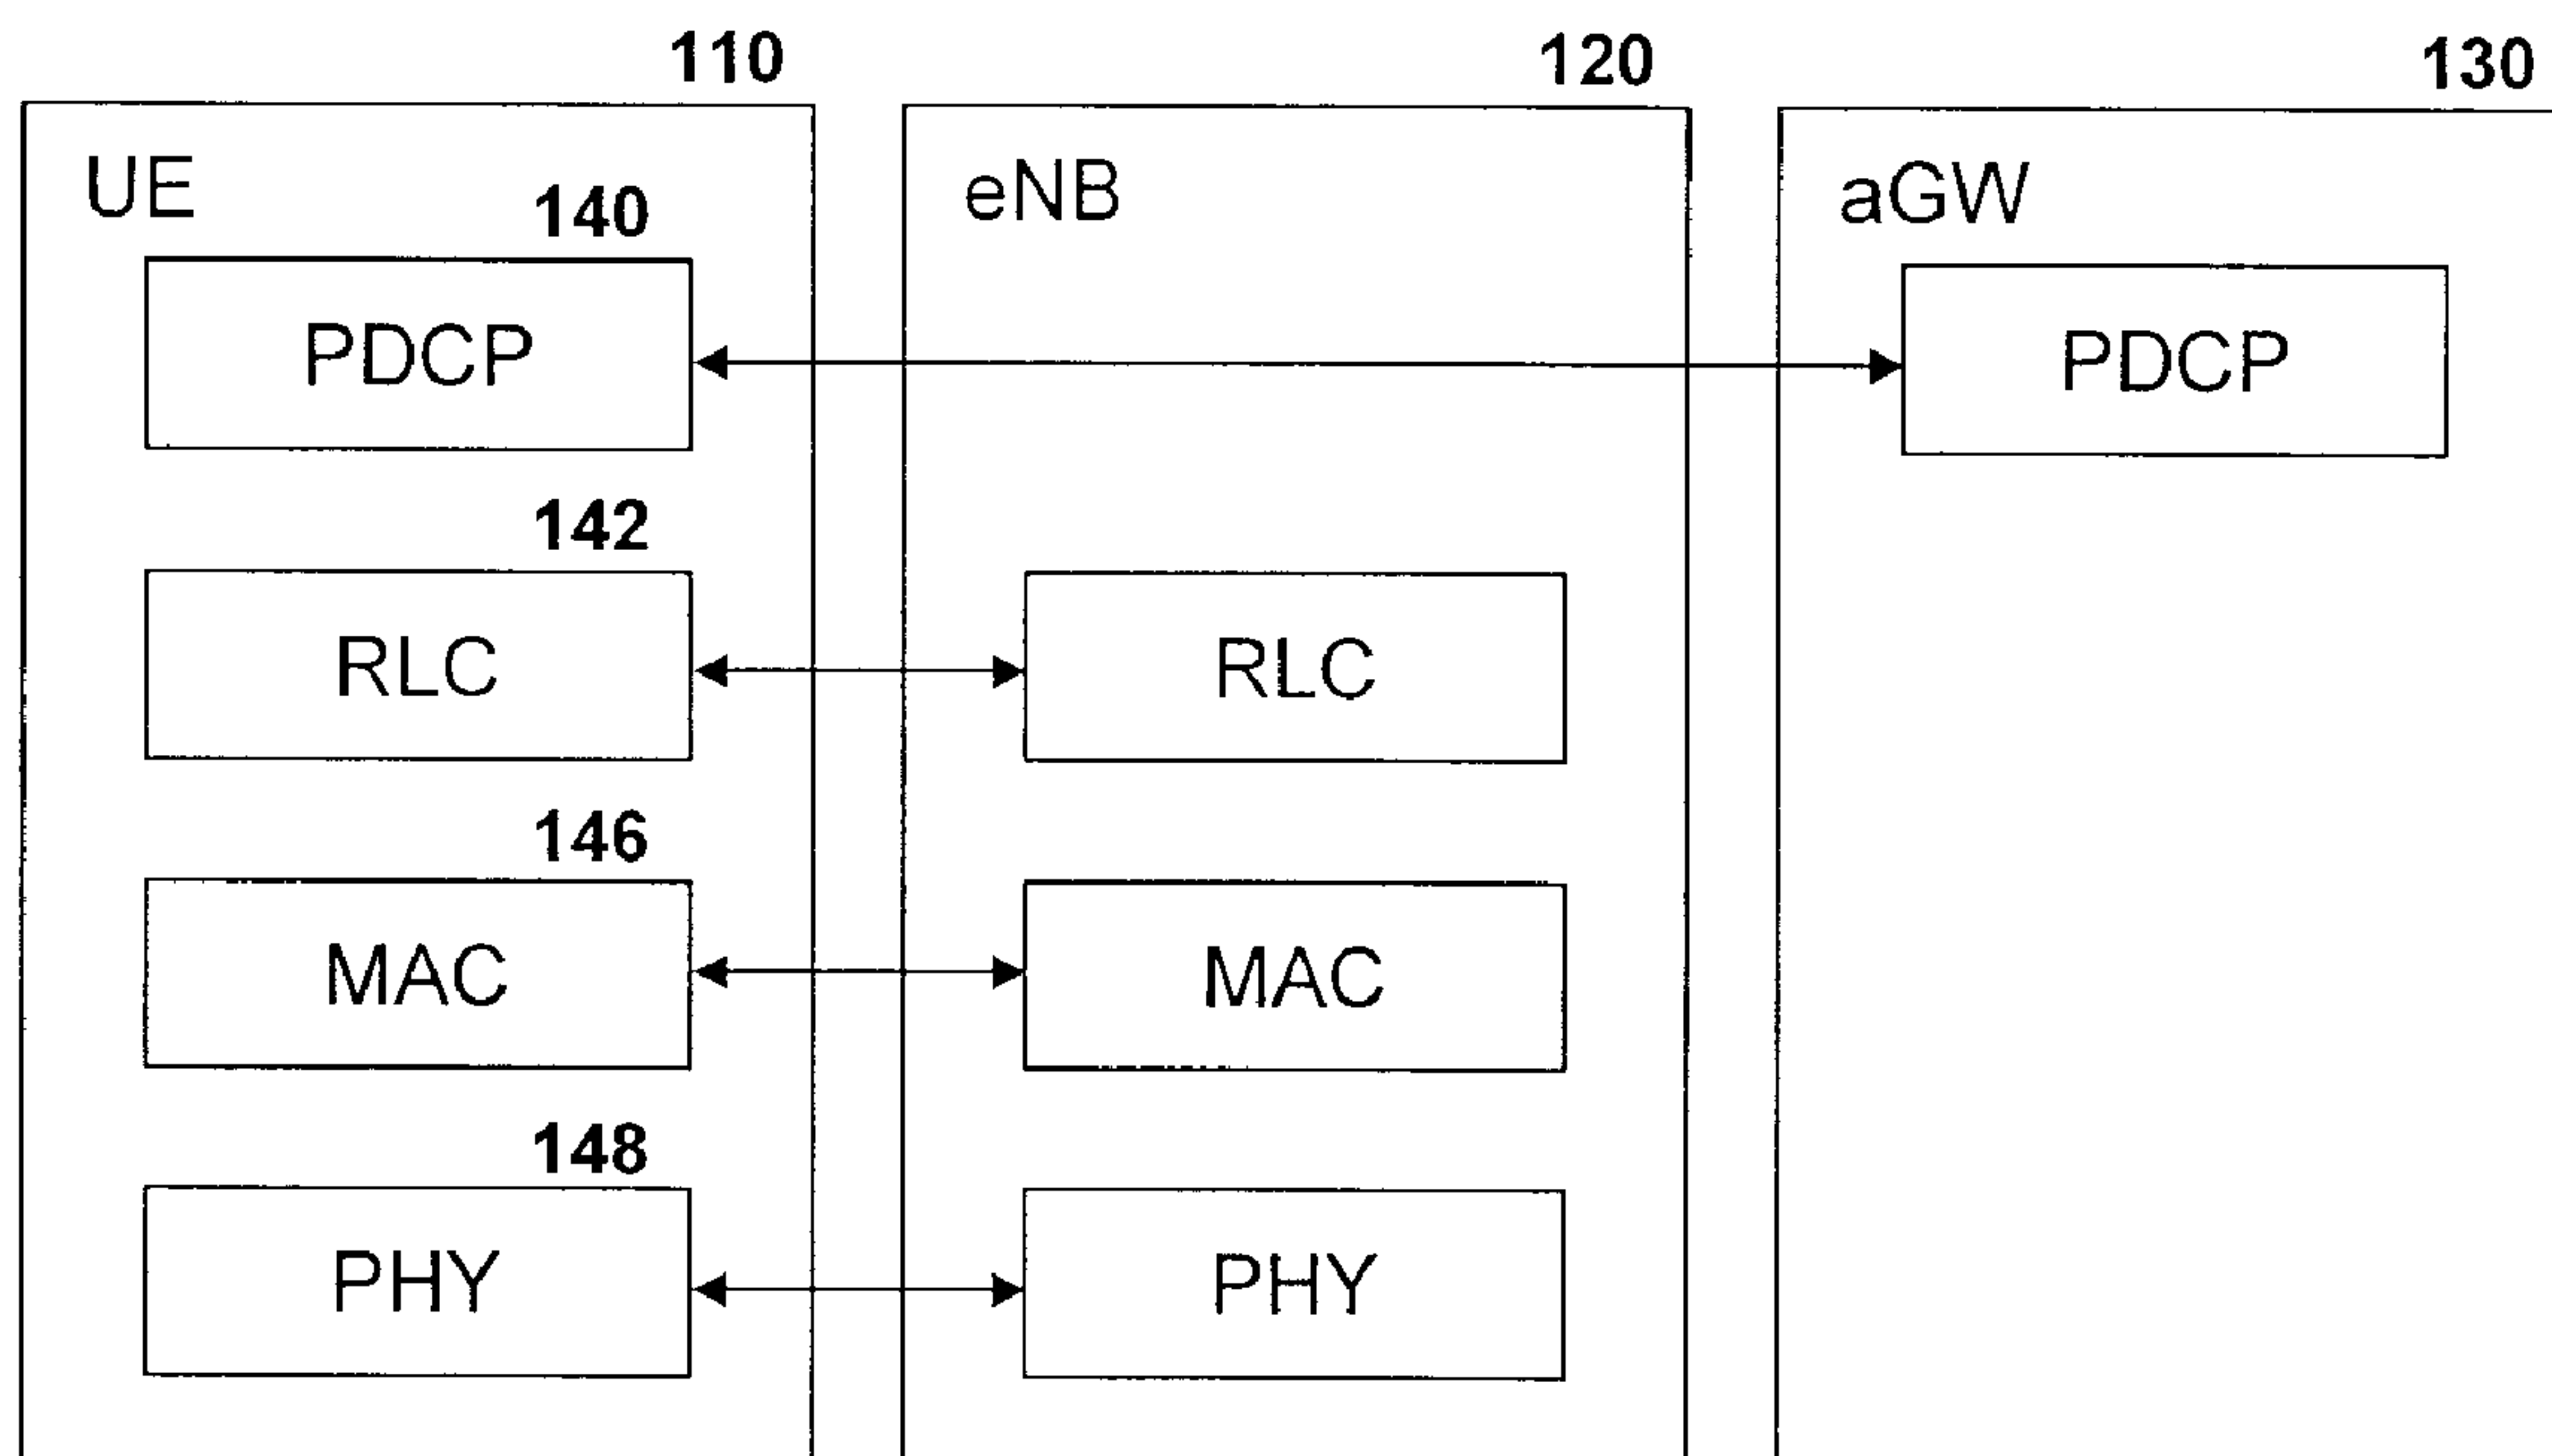

(57) Abrégé/Abstract:

A method for packet data retransmission on Hybrid Automatic Repeat Request (HARQ) Transmission failure having the steps of: checking whether changes to HARQ transmission error performance characteristics are greater than a threshold and/or a deterioration of channel conditions is indicated or less than threshold; if yes, re-segmenting an RLC-SDU or RLC-PDU data into smaller PDU data sizes; and transmitting said re-segmented RLC-PDU data; and if not yes, transmitting previous RLC-PDU data.

ABSTRACT

A method for packet data retransmission on Hybrid Automatic Repeat Request (HARQ) Transmission failure having the steps of: checking whether changes to HARQ transmission error performance characteristics are greater than a threshold and/or a deterioration of channel conditions is indicated or less than threshold; if yes, re-segmenting an RLC-SDU or RLC-PDU data into smaller PDU data sizes; and transmitting said re-segmented RLC-PDU data; and if not yes, transmitting previous RLC-PDU data.

METHOD AND APPARATUS FOR RESEGMENTATION OF PACKET DATA FOR RETRANSMISSION ON HARQ TRANSMISSION FAILURE

[0001] The present disclosure relates generally to the hybrid automatic repeat request (HARQ) scheme used in a media access control (MAC) layer data transmission, the radio link control (RLC) layer, and radio resource control (RRC) layer and in particular their interworking with respect to retransmission of data upon unsuccessful MAC protocol data unit reception.

[0002] In UMTS high speed download packet access (HSDPA) and enhanced dedicated uplink transport channel (E-DCH), collectively known as HSPA, use an HARQ scheme within the MAC layer to enhance the efficiency and reliability of data transmission between user equipment (UE) and the base station known as the Node B. This is, for example, defined in the 3GPP TS25.321 version 6.9.0 specification at sections 11.6 and 11.8. In HSDPA, the receiver side (UE) indicates the channel quality to the transmitter (Node B) using a 5 bit channel quality indicator (CQI) based on short term measurements of the pilot channel signal strength. These measurements can take approximately 2 ms.

[0003] Based on the reported CQI, the Node B will choose a transport block size and modulation and coding scheme (MCS) for the next transmission to the UE so that the transport block error probability should not exceed 10%.

[0004] Data is sent in the high-speed medium access control protocol data unit (MAC-hs PDU). When the UE receives the MAC-hs PDU, it computes a cyclic redundancy check (CRC) to determine correct reception. If the reception is successful, the UE sends an ACK to the Node B. If not, a NACK is sent. If the Node B receives a NACK, it retransmits the MAC-hs PDU again for Chase combining or the systematic and/or parity symbols for Incremental Redundancy if the number of retransmissions is within the specified maximum number as set by system operator. Incremental redundancy or a Chase Combining Scheme is used for the retransmission, as specified in 3GPP TS 25.212, version 6.9.0.

[0005] When the maximum number of HARQ retransmissions fail, as referred to herein as HARQ retransmission failure, retransmission of MAC-hs PDU is considered a failure. The acknowledged mode of operation of the radio link control (RLC), as defined in 3GPP TS25.322, version 6.8.0, sections 9.7 and 11.3, recovers the HARQ transmission error by retransmitting the RLC-PDUs originally multiplexed into the MAC-hs PDU which is indicated as not being received by the receiver side. This functionality is generally referred to as Automatic Repeat-request or ARQ. This is based on the transmitter polling the receiver for the status of PDUs that it has or hasn't received and the receiver send this information back to the transmitter for processing. This two way signaling clearly adds a degree of additional latency in the transmission period of the incorrectly received data between the transmitter and the receiver.

[0006] In order to reduce this RLC level retransmission latency, the RLC can be notified of the HARQ retransmission failure and the RLC service data unit (RLC-SDU) or part of the RLC-SDU (the RLC-PDUs) can be retransmitted on the notification rather than waiting for a status report control message from the receiving side. An example of this type of enhancement is indicated in the RAN2 meeting number 55 contribution R2-062906 from NTT DoCoMo for the work item "Long-term evolution of UMTS Terrestrial Radio Access (UTRA) and Universal Terrestrial Radio Access Network (UTRAN)" (LTE). The result of 3GPP study on LTE is shown in the 3GPP TR25.912 version 7.0.0 specification. However, second or subsequent attempts may fail again due to the relatively long lasting bad radio conditions due to shadowing or other factors. In particular the size of the RLC-PDU that is re-transmitted is the same as the previous transmissions. In UMTS, the size of this RLC-PDU is determined during segmentation of the RLC-SDU as determined by the RRC configuration of RLC.

GENERAL

[0007] The present disclosure may address the issue above for the improvement of retransmission latency further by re-segmenting data into more appropriate sizes according to radio channel conditions such as shadowing, among others.

Further, the present disclosure may address when the re-segmentation of data should occur.

[0008] The present application may provide a method for packet data retransmission on Hybrid Automatic Repeat Request (HARQ) Transmission failure comprising the steps of: checking whether the changes to the HARQ transmission error performance characteristics are greater than a threshold and/or a deterioration of channel conditions is indicated or less than threshold; if yes, re-segmenting an RLC-SDU or RLC-PDU data into smaller PDU data sizes; and transmitting said re-segmented RLC-PDU data; and if not yes, transmitting previous RLC-PDU data.

[0009] The present application may further provide a transmitter in a mobile network adapted to re-segment data into more appropriate sizes according to radio channel conditions comprising a re-segmentation layer, the re-segmentation layer adapted to: check whether the changes to the Hybrid Automatic Repeat Request (HARQ) transmission error performance characteristics are greater than a threshold and/or a deterioration of channel conditions is indicated or less than threshold; if yes, re-segment an RLC-SDU or RLC-PDU data into smaller PDU data sizes; and transmit said re-segmented RLC-PDU data; and if not yes, transmit previous RLC-PDU data. The application further provides a computer readable medium comprising program code executable by a computing device or system such as the transmitter for performing in said device or system the method of the present application. Further, the application provides a communication network comprising the transmitter and a plurality of User Equipments 'UEs' capable of receiving packet data transmission from said transmitter.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] The present application will be better understood with reference to the drawings in which:

Figure 1 is a block diagram showing a long-term evolution user plane protocol stack;

Figure 2 is a block diagram showing a long-term evolution control plane protocol architecture;

Figure 3 is a flow chart showing a method for a retransmission and re-segmentation decision within MAC layer in accordance with the present disclosure;

Figure 4 is a flow chart showing a method for retransmission and re-segmentation execution according to the present disclosure and the decision made in the Figure 3;

Figure 5 is a flow chart illustrating the configuration of the MAC layer both at the receiver and transmitter sides;

Figure 6 is a block diagram showing a flow chart of the indication of a handover from both the Node B and the UE sides;

Figure 7 is a block diagram showing interaction between the RRC, RLC and MAC layers where retransmission and re-segmentation is executed in the MAC and RLC in accordance with the present system and method; and

Figure 8 is a block diagram showing an alternative interaction between the RRC, RLC and MAC layers where retransmission and re-segmentation is executed in the MAC.

DESCRIPTION OF PREFERRED EMBODIMENTS

[0011] Reference is now made to the drawings. **Figure 1** shows a block diagram illustrating the long-term evolution (LTE) user plane protocol stack.

[0012] A UE **110** communicates with both an evolved Node B (eNB) **120** and an access gateway (aGW) **130**.

[0013] Various layers are illustrated in the protocol stack. The packet data convergence protocol (PDCP) layer **140** is illustrated both on the UE **110** and on aGW **130**. The PDCP layer **140** performs internet protocol (IP) header compression and decompression, transfer of user data and maintenance of sequence numbers (SN) for radio bearers.

[0014] Below PDPCP layer **140** is the radio link control protocol layer **142**, which communicates with the radio link control protocol layer **142** on the eNB **120**. As will be appreciated, communication occurs through the physical layer in protocol stacks such as those illustrated in **Figures 1** and **2**. However, packets from the RLC layer **142** of the UE are interpreted by the RLC layer **142** on the eNB **120**.

[0015] Below RLC layer **142** is the medium access control (MAC) data communication protocol layer **146**. As will be appreciated by those skilled in the art, the RLC and MAC protocols form the data link sublayers of the UMTS and LTE radio interface and reside on the Node B (or eNB in LTE) and user equipment.

[0016] The layer 1 (L1) LTE (physical layer **148**) is below the RLC/MAC layers **144** and **146**. This layer is the physical layer for communications.

[0017] Referring to **Figure 2**, **Figure 2** illustrates the LTE control plane protocol architecture. Similar reference numerals to those used in **Figure 1** will be used in **Figure 2**. Specifically, UE **110** communicates with eNB **120** and aGW **130**. Further, physical layer **148**, MAC layer **146**, RLC layer **142** and PDPCP layer **140** exist within **Figure 2**.

[0018] **Figure 2** also shows the non-access stratum (NAS) layer **210**. As will be appreciated, NAS layer **210** could include mobility management and session management.

[0019] The radio resource control protocol layer (RRC) **220**, is the part of the protocol stack that is responsible for the assignment, configuration and release of radio resources between the UE and the E-UTRAN (Evolved universal terrestrial radio access network). The basic functionalities of RRC protocol for LTE is described in the 3GPP TR25.813 specifications.

[0020] As will be appreciated by those skilled in the art, in UMTS, automatic repeat request (ARQ) functionality is carried out within the RLC layer which

resides in the radio network controller (RNC). Long Term Evolution (LTE) moves the ARQ functionality from the RNC to eNB where a tighter interaction may exist between the ARQ and the HARQ (within the MAC layer, also located in the eNB).

[0021] In HSDPA and E-DCH, an RLC SDU is segmented in a series of equally sized RLC PDUs (e.g. 42 octets) and given to the MAC layer for transmission over the air interface. The MAC usually multiplexes multiple RLC PDUs in to a MAC-PDU. If a MAC PDU cannot be delivered, after a certain number of tries the transmission of that MAC-PDU is abandoned. On the receiver side, the MAC layer de-multiplexes the received MAC-PDU in to multiple RLC-PDUs. If any missing RLC-PDUs are detected, the receiving side notifies the transmitting side using a STATUS message to request retransmission of the missing RLC PDUs. This is a relatively lengthy process.

[0022] In LTE, instead of abandoning the failed MAC level retransmission, resending after re-segmentation is currently being studied in order to greatly reduce latencies and increase data throughput. The issue is when and how to re-segment.

[0023] Referring to **Figures 3** and **4**, an overview of a method according to the present application is presented.

[0024] On HARQ retransmission failure, there are three choices in handling the error:

- 1) Do nothing - this means relying on the polling and status report functions of the ARQ function to recover the error. This option should be chosen when handover is expected or the receiver is considered to be out of radio coverage;
- 2) Re-segment and retransmit immediately - the failed data unit is re-segmented into a more appropriate size according to the current radio conditions before the retransmission. This option should be chosen when retransmitting the original transport block is not considered to be effective due to a deteriorated channel condition and/or decreased availability of radio resources.

3) Retransmit as is immediately. This option should be chosen when choices 1) and 2) are not applicable

[0025] **Figure 3** shows an exemplary flowchart of how a choice is made within MAC layer on HARQ retransmission failure. The decision will be passed to the re-segmentation and retransmission execution function (RREF) with the notification of HARQ retransmission failure. The RREF performs retransmission and/or re-segmentation according to the informed decision and handover indication from an upper layer as shown in **Figure 4**.

[0026] To make a choice in **Figure 3**, certain threshold values need to be configured. Such parameter configurations, both at the receiver and transmitter sides, are shown in **Figure 5**. **Figure 6** describes how the handover indication is provided to the RREF. **Figure 7** shows two possible protocol architectures, the first in which the RREF is included in the RLC and the second in which the RREF is included in MAC.

[0027] Referring to **Figure 3**, details of the decision making process are explained. When an HARQ retransmission failure occurs (maximum retransmission number is reached) at step **310**, an out-of-coverage condition is examined at step **311**. For example, if the number of consecutive failures in the reception of ACK/NAK from the receiver (Nanf) (if the transmitter cannot detect expected ACK/NAK response at the time when the ACK/NAK should be received from the receiver), exceeds the configured threshold value (TH-Nanf), an out of coverage indication is passed to RREF at step **312**.

[0028] Alternatively, if periodic CQI reporting from the receiver side is configured, the transmitter considers the receiver is out of radio coverage if the time between the most recent CQI report from the receiver and HARQ retransmission failure (TLastCQI) is longer than the configured threshold value (TH-LC), e.g. CQI interval * N, where N is an integer value. In such case out-of-coverage indication is passed to RREF at step **312**.

[0029] Furthermore if the physical layer can indicate the receiver being out of coverage, then such indication can be delivered to RREF through the MAC layer.

[0030] If the receiver is considered to be in radio coverage, as determined at step **311**, the average and gradient of most recently received CQI reports (designated $E(CQI)$ and $Grad(CQI)$, respectively) are calculated at step **320**. The number of CQIs used for the calculation (N_c) can be configured, for example, by the RRC. If severe deterioration of channel quality is detected, i.e. $Grad(CQI)$ is less than a configured threshold ($TH-G$), a new segmentation size such as half of original transport block size can be provided to RREF at step **322**.

[0031] For a more accurate evaluation of channel quality, the coding rate can be calculated to check if the original transport block size is still adequate. The derived rate is based on the assumption that the original transport block is retransmitted using the channel condition indicated by $E(CQI)$ and using radio resources currently allocated to the receiver. If the calculated coding rate is more than a configured threshold value, e.g. 1, the original size is no longer considered appropriate. The new segment value can be calculated and passed to RREF at step **332**. The new segment size value is chosen by a calculated coding rate which is considered to be appropriate, e.g. 0.5.

[0032] If the original transport block size is still adequate for the current channel condition, only HARQ retransmission failure is passed to the RREF at step **340**. In this case, the RREF will retransmit the original data as-is, without re-segmentation.

[0033] Referring to **Figure 4**, details of the RREF are described. The RREF can be in either the RLC layer or MAC layer. On notification of HARQ retransmission failure from MAC at step **410**, the process at step **411** checks if handover is indicated. If so, no immediate retransmission is attempted because data can be lost during handover. Therefore it is better to delay the retransmission by letting ARQ retransmission procedures handle the case (i.e. polling and status reporting).

[0034] Similar to the handover case, if out of coverage is indicated, then no immediate retransmission is attempted at step **412**.

[0035] If MAC indicates a new segment size at step **413** the original data is re-segmented into the specified size at step **414** and retransmitted at step **415**. As will be appreciated, the last segment may not be the specified size and in such a case padding can be inserted if necessary.

[0036] If the MAC indicates no new segment size the original data is retransmitted as is at step **415**. The process then ends at step **416**.

[0037] Reference is now made to **Figure 5**. **Figure 5** illustrates a flow chart for configuring threshold values for the decision made in **Figure 3**. At the receiver side, the MAC layer is configured to report CQI with a specified interval to the transmitter at step **510**. Alternatively, at the receiver side, the MAC layer is configured to report CQI with a specified interval to the transmitter if the CQI falls below a configured level at step **510**. At the transmitter side, the values of thresholds, TH-LC, TH-Nanf, TH-G and TH-CR and the number of most recent CQI reports (Nc) are configured at the step **520**. Values to be configured for the UE side can be configured by RRC or layer 2 signaling.

[0038] **Figure 6** illustrates the RRC indication to initiate handover for the eNB and the UE. It is currently assumed in LTE that only the eNB initiates handover.

[0039] The process for the network starts at step **610** and proceeds to step **612** in which it sends a measurement control message to configure the handover condition. The message can be a RRC message or Layer 2 level signaling.

[0040] The process then proceeds to step **614** in which it waits for a measurement report message. The message can be an RRC message or Layer 2 level signaling.

[0041] In step **616**, the process indicates handover to the RLC and ends in step **618**.

[0042] On the UE side, the process starts at step **630** and proceeds to step **632** in which it receives a measurement control message to configure a handover condition. The message can be an RRC message or Layer 2 level signaling.

[0043] The process then proceeds to step **634** in which it waits for a handover measurement condition to be satisfied. Once the handover measurement condition is satisfied, the process transmits measurement report message at step **635** and proceeds to step **636** in which it indicates the handover to the RLC and/or MAC [see **Figure 7** and **8**] and the process then ends at step **638**. The measurement report can be a RRC message or Layer 2 signaling.

[0044] Reference is now made to **Figure 7**. **Figure 7** depicts the interaction between the RRC, RLC and MAC layers in accordance with **Figure 3** and **4**. **Figure 7** shows the case where the RLC layer includes the functionality to determine whether re-segmentation should occur. **Figure 8**, described below, indicates the situation where the MAC layer includes the functionality to determine whether re-segmentation should occur.

[0045] In **Figure 7** the RRC **710** provides RLC **720** with a handover indication. The RLC then applies the method of **Figure 3** in determining that re-segmentation should not occur.

[0046] The MAC layer **730** passes the HARQ retransmission failure and channel condition status information to the RLC which enables the RLC to determine if the re-segmentation should occur.

[0047] Referring to **Figure 8**, **Figure 8** illustrates the MAC layer having the functionality for re-segmentation. In this case, the RRC **810** passes a handover indication to RLC **820**. The handover indication is then passed from the RLC **820** to MAC layer **830**. MAC layer already has HARQ retransmission failure information and can use the handover indication to perform the process of **Figure 3**.

[0048] The above therefore addresses the issue of improving the retransmission latency further by re-segmenting data into more appropriate sizes according to radio channel conditions such as shadowing, among others. The method uses the channel condition indication based on the most recently received CQI, gradient, or coding rates of the most recently reported CQIs. The process re-segments the RLC-SDU or RLC-PDU into more appropriate PDU sizes and passes them to the MAC layer for retransmission.

[0049] By comparing the number of HARQ retransmission failures within a certain period against a configured threshold, the transmitter can determine an approximation for the channel condition. If there are a large number of HARQ retransmission failures when compared to the threshold this can reflect significant deterioration in the channel condition. This is reflected by the transmitter's continued inability to successfully transmit the data based on the original channel estimates (e.g. the received CQIs). If significant deterioration of channel quality is detected, a new segmentation size such as half of original transport block size can be notified to RREF.

[0050] The comparison to a threshold for the determined number of HARQ retransmission failures within a certain period and the handover indication can be used to decide if the retransmission is attempted again.

[0051] The RRC configures the MAC at the receiver side to report the CQI periodically or report the CQI periodically when CQI falls below a configured threshold. For the transmitter side it also signals TH-LC, Nc, TH-G and TH-CR to MAC. If the gradient CQI is less than TH-G re-segmentation is performed. If the coding rate for E(CQI) is greater than TH-CR, re-segmentation is performed. The size of the re-segmented PDU can depend on the coding rate.

[0052] This therefore improves the transmitter efficiency on HARQ retransmission failures by re-segmenting the PDU according to the channel condition and waiting for retransmission until the handover procedure is complete.

[0053] The embodiments described herein are examples of structures, systems or methods having elements corresponding to elements of the techniques of this application. This written description may enable those skilled in the art to make and use embodiments having alternative elements that likewise correspond to the elements of the techniques of this application. The intended scope of the techniques of this application thus includes other structures, systems or methods that do not differ from the techniques of this application as described herein, and further includes other structures, systems or methods with insubstantial differences from the techniques of this application as described herein.

CLAIMS:

1. A method for handling Hybrid Automatic Repeat Request, hereafter referred to as HARQ, retransmission failure, HARQ retransmission failure being determined by whether a maximum number of HARQ data retransmissions from a transmitter to a receiver have failed, the method comprising the steps of:

determining an out-of-coverage condition:

by checking whether a time between the time of the last reception of a channel quality indicator, hereafter referred to as CQI, and the time of HARQ retransmission failure is longer than a threshold;
or

if the number of consecutive failures in reception of an acknowledgement, hereafter referred to as ACK, or negative acknowledgement, hereafter referred to as NACK, from the receiver exceeds a configurable threshold value;

if an out of coverage condition is determined, ending the retransmission process; and

if an out-of-coverage condition is not determined,

checking whether changes to HARQ data transmission error performance characteristics are greater than a threshold and/or a deterioration of channel conditions is less than a threshold;

if yes,

resegmenting for retransmission a Radio Link Control Service Data Unit, hereafter referred to as RLC-SDU, comprising Radio Link Control Protocol Data Units, hereafter referred to as RLC-PDU data, or a RLC-PDU data, into smaller PDU data sizes; and

transmitting said resegmented RLC-PDU data; and

if not yes, retransmitting the previous RLC-PDU data.

2. The method of claim 1, wherein the method further comprises the step of, prior to the checking step, determining whether a handover is indicated, and if yes, ending the retransmission process.
3. The method of claim 2, wherein the handover is indicated by the radio resource control protocol or layer 2 level signalling.
4. The method of claim 3, wherein the radio resource control protocol indicates if handover is expected when a measurement report or layer 2 level signalling is received or generated.
5. The method of any one of claims 1 to 4, wherein the method is performed at the Radio Link Control, hereafter referred to as RLC, layer of a transmitter.
6. The method of any one of claims 1 to 4, wherein segmentation is performed at the medium access control, hereafter referred to as MAC, layer.
7. The method of any one of claims 5 to 6, wherein a segment size is reported by the MAC layer to the RLC layer.
8. The method of any one of claims 5 to 6, wherein an out-of-coverage condition is reported from the MAC layer to the RLC layer.
9. The method of any of claims 1 to 4, wherein the re-segmented data is passed from the RLC layer to the MAC layer.
10. The method of claim 1, wherein the HARQ checks the deterioration of channel conditions by determining if a gradient channel quality indicator is less than a threshold.

11. The method of claim 10, wherein, if the gradient channel quality indicator is greater or not less than a threshold, the method further comprises the steps of checking whether a coding rate for a last channel quality indicator or an average of most recently received CQIs and the availability of a radio resource for the receiver is greater than a threshold,

if yes signalling HARQ retransmission failure with a new segment size;

if no signalling HARQ retransmission failure.

12. A transmitter for a mobile network adapted to re-segment data according to radio channel conditions based on Hybrid Automatic Repeat Request, hereinafter referred to HARQ, retransmission failure, HARQ retransmission failure being determined by whether a maximum number of HARQ data retransmissions have failed, the transmitter comprising a re-segmentation layer adapted to:

determine whether an out-of-coverage condition is indicated, wherein the out-of-coverage condition is determined:

by checking whether a time between the time of last reception of a channel quality indicator, hereinafter referred to as CQI, and the time of the HARQ retransmission failure is longer than the threshold; or

if the number of consecutive failures in reception of an acknowledgment, hereinafter referred to as ACK, or negative acknowledgment, hereinafter referred to as NACK, from the receiver exceeds a configurable threshold value;

if an out-of-coverage condition is determined, end the retransmission process;

and

if an out-of-coverage condition is not determined,

check whether changes to the HARQ data transmission error performance characteristics are greater than a threshold and/or a deterioration of channel conditions is less than a threshold;

if yes,

resegment for retransmission a Radio Control Link Service Data Unit, hereinafter referred to as RLC-SDU comprising Radio Control Link Data

Protocol Units, hereinafter referred to as RLC-PDU data, or a RLC-PDU data, into smaller PDU data sizes; and

transmit said resegmented RLC-PDU data; and
if not yes, retransmit the previous RLC-PDU data.

13. The transmitter of claim 12, wherein the re-segmentation layer comprises the RLC layer or the MAC layer.

14. The transmitter of claim 12, wherein the re-segmentation layer is further adapted to determine whether a handover is indicated, and if yes, end the retransmission process.

15. The transmitter of claim 14, wherein the radio resource control protocol or layer 2 level signalling is adapted to indicate the handover.


16. The transmitter of claim 15, wherein the radio resource control protocol is adapted to indicate if handover is expected when a measurement report or layer 2 level signalling is received or generated.

17. The transmitter of claim 16, wherein if the gradient channel quality indicator is greater not less than a threshold, the transmitter is adapted to check whether a coding rate for a last channel quality indicator is greater than a threshold,
if yes, signal HARQ retransmission failure with a new segment size;
if no signal HARQ retransmission failure.


18. A communication network comprising a transmitter as claimed in any one of claims 12 to 17 and a plurality of User Equipments, hereinafter referred to as UEs, capable of receiving packet data transmission from said transmitter.


19. A computer readable medium comprising program code executable in a computing device or system to perform the method of any one of claims 1 to 11.

1/7

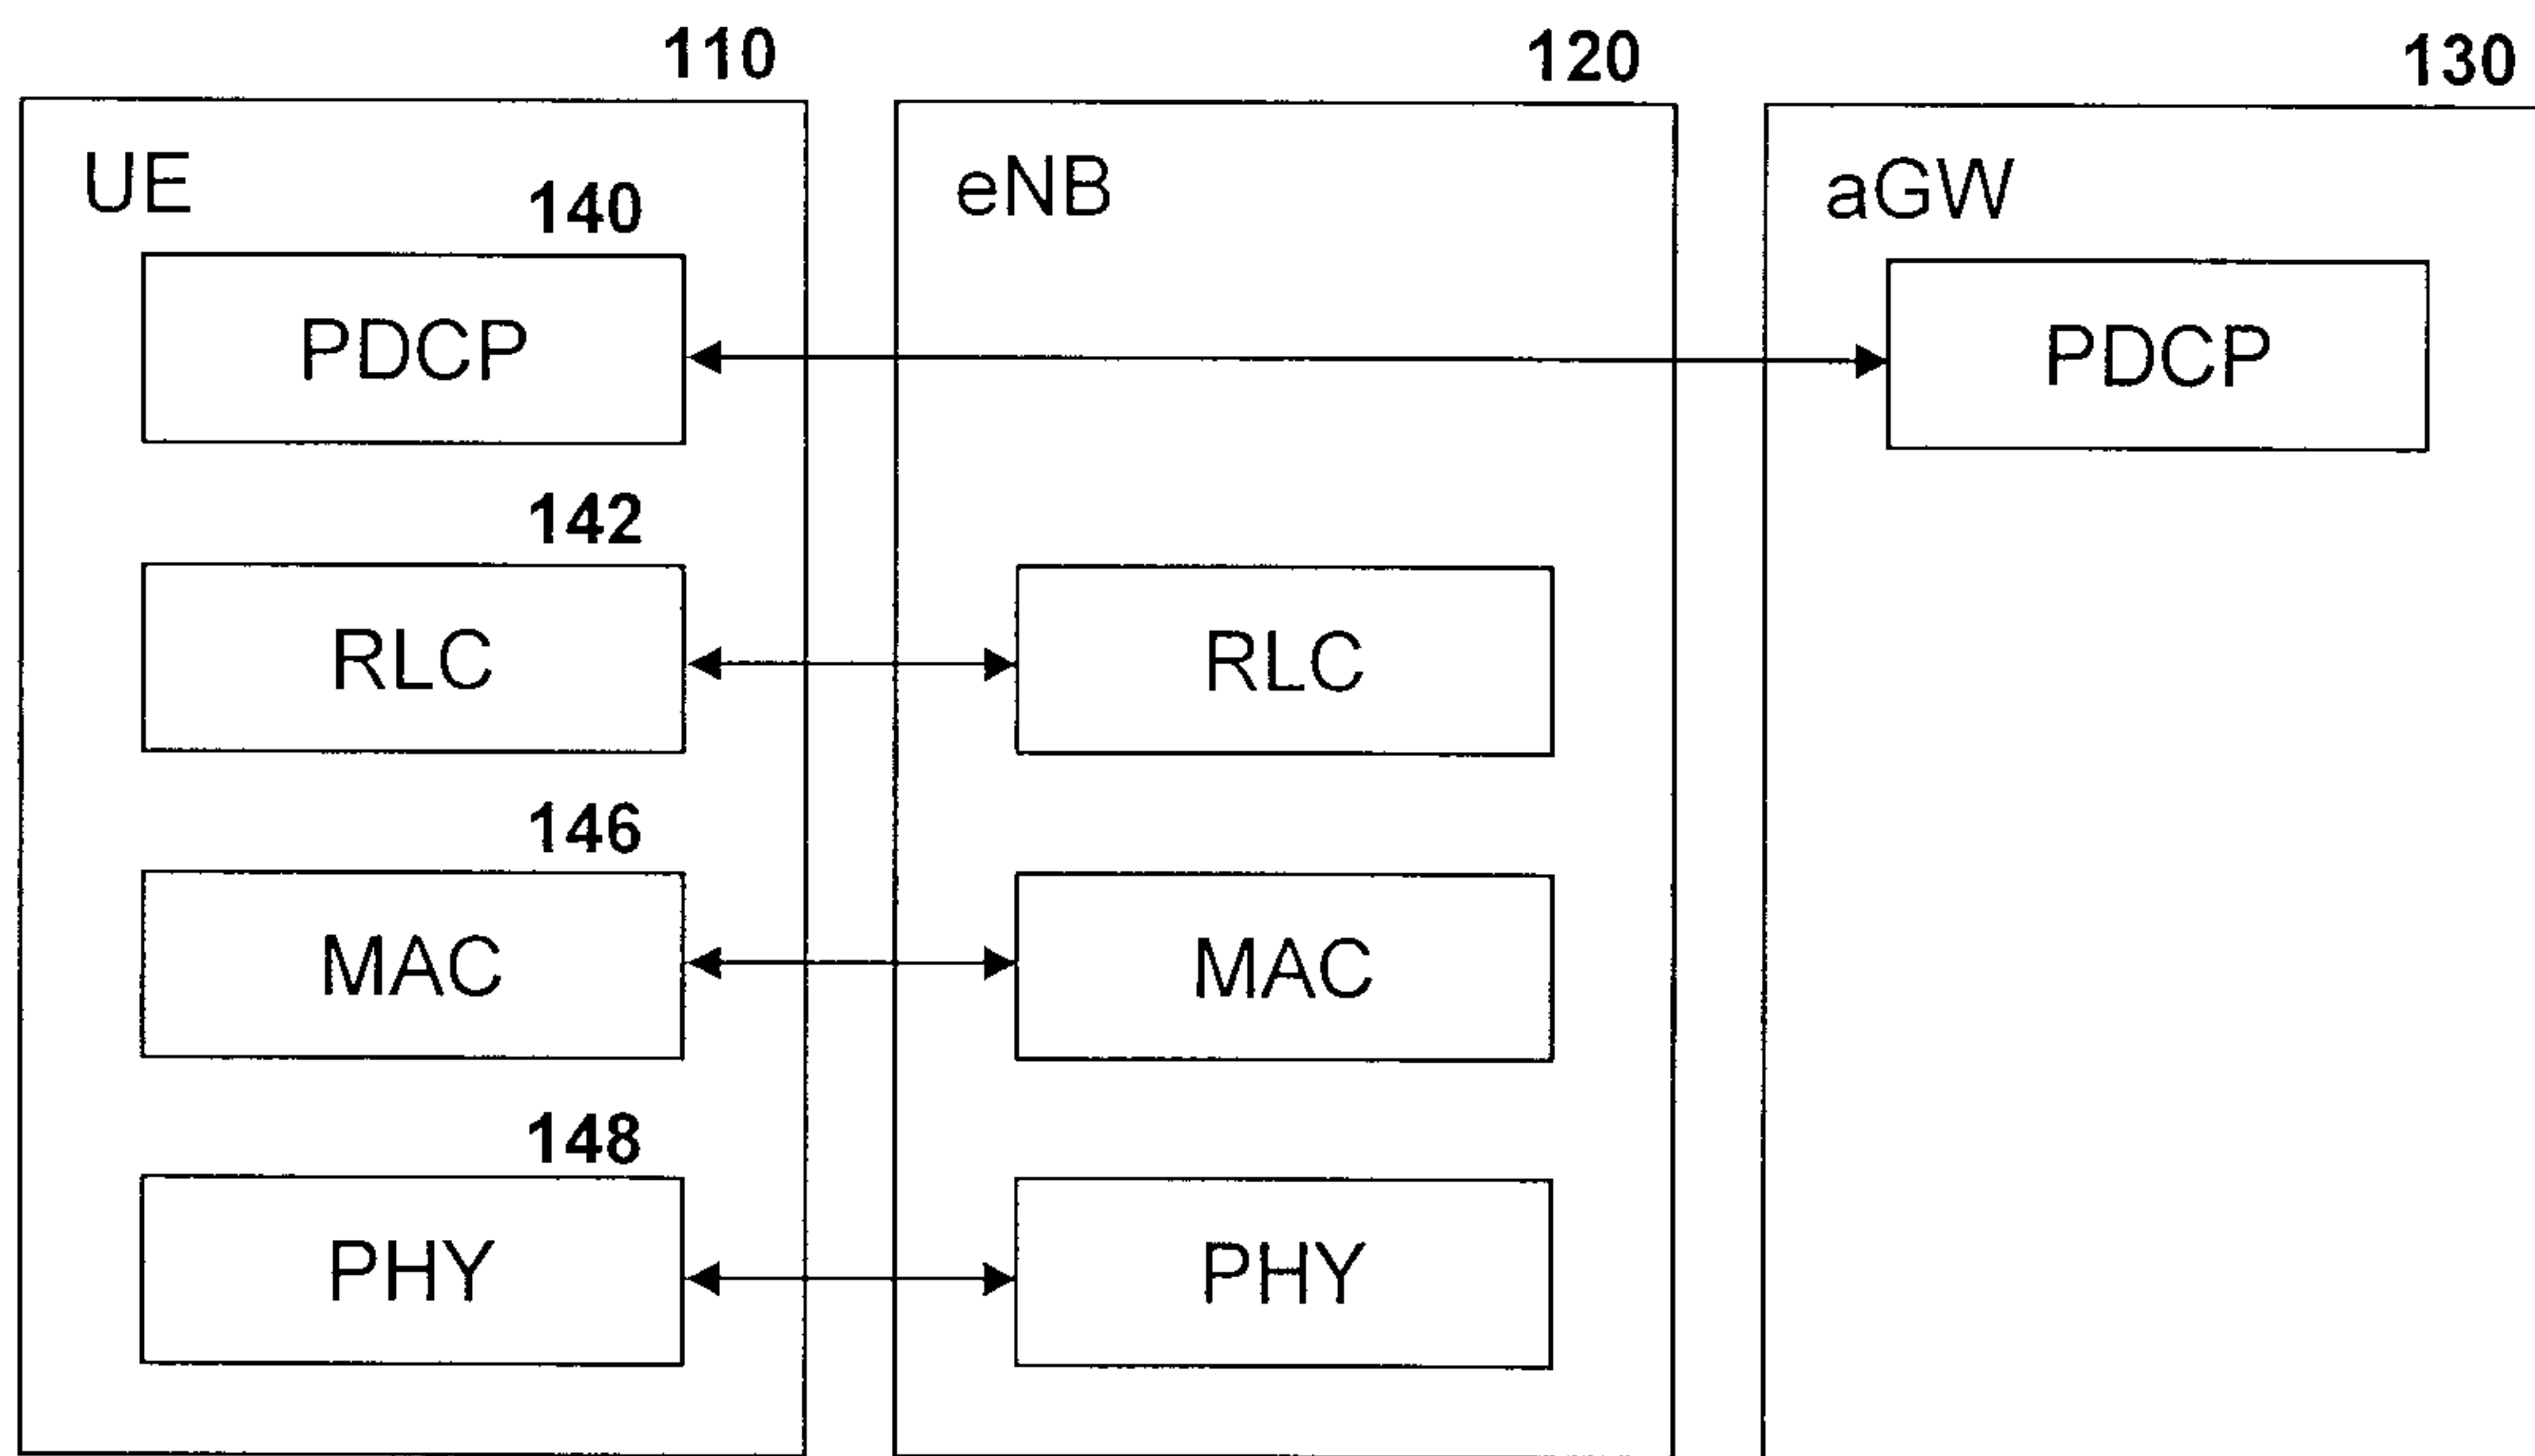
**FIG 1**

2/7

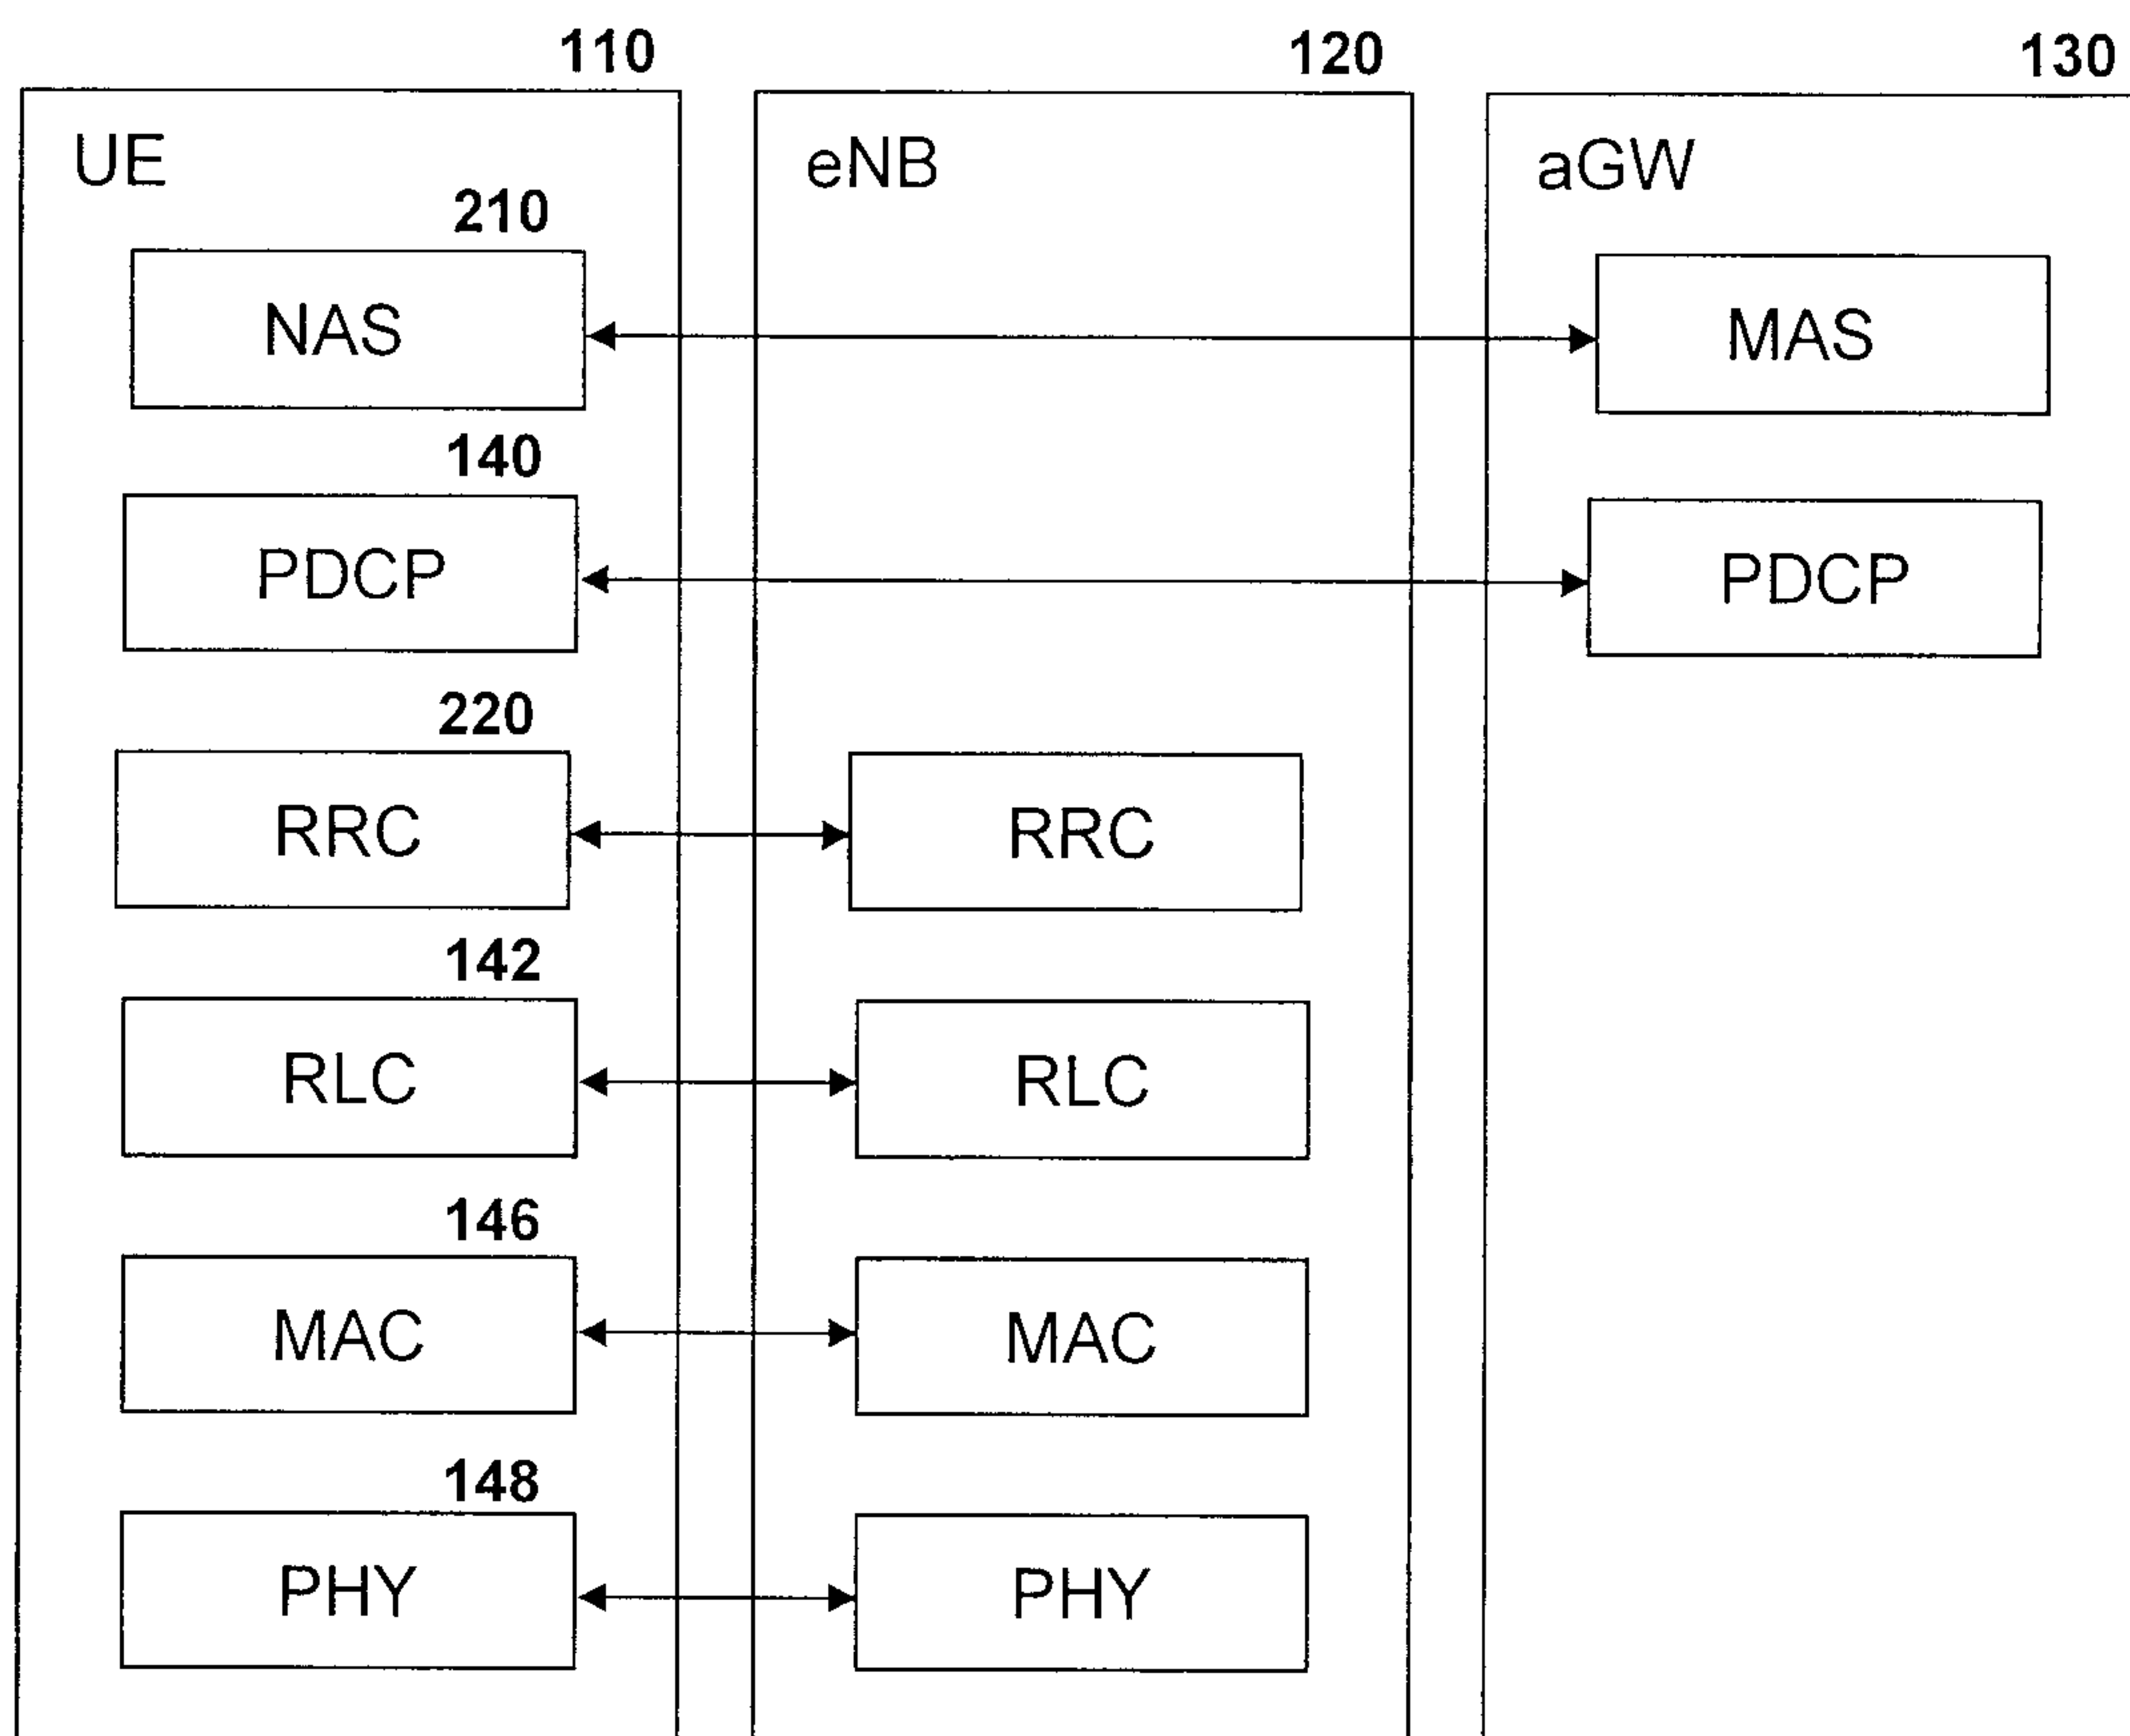**FIG 2**

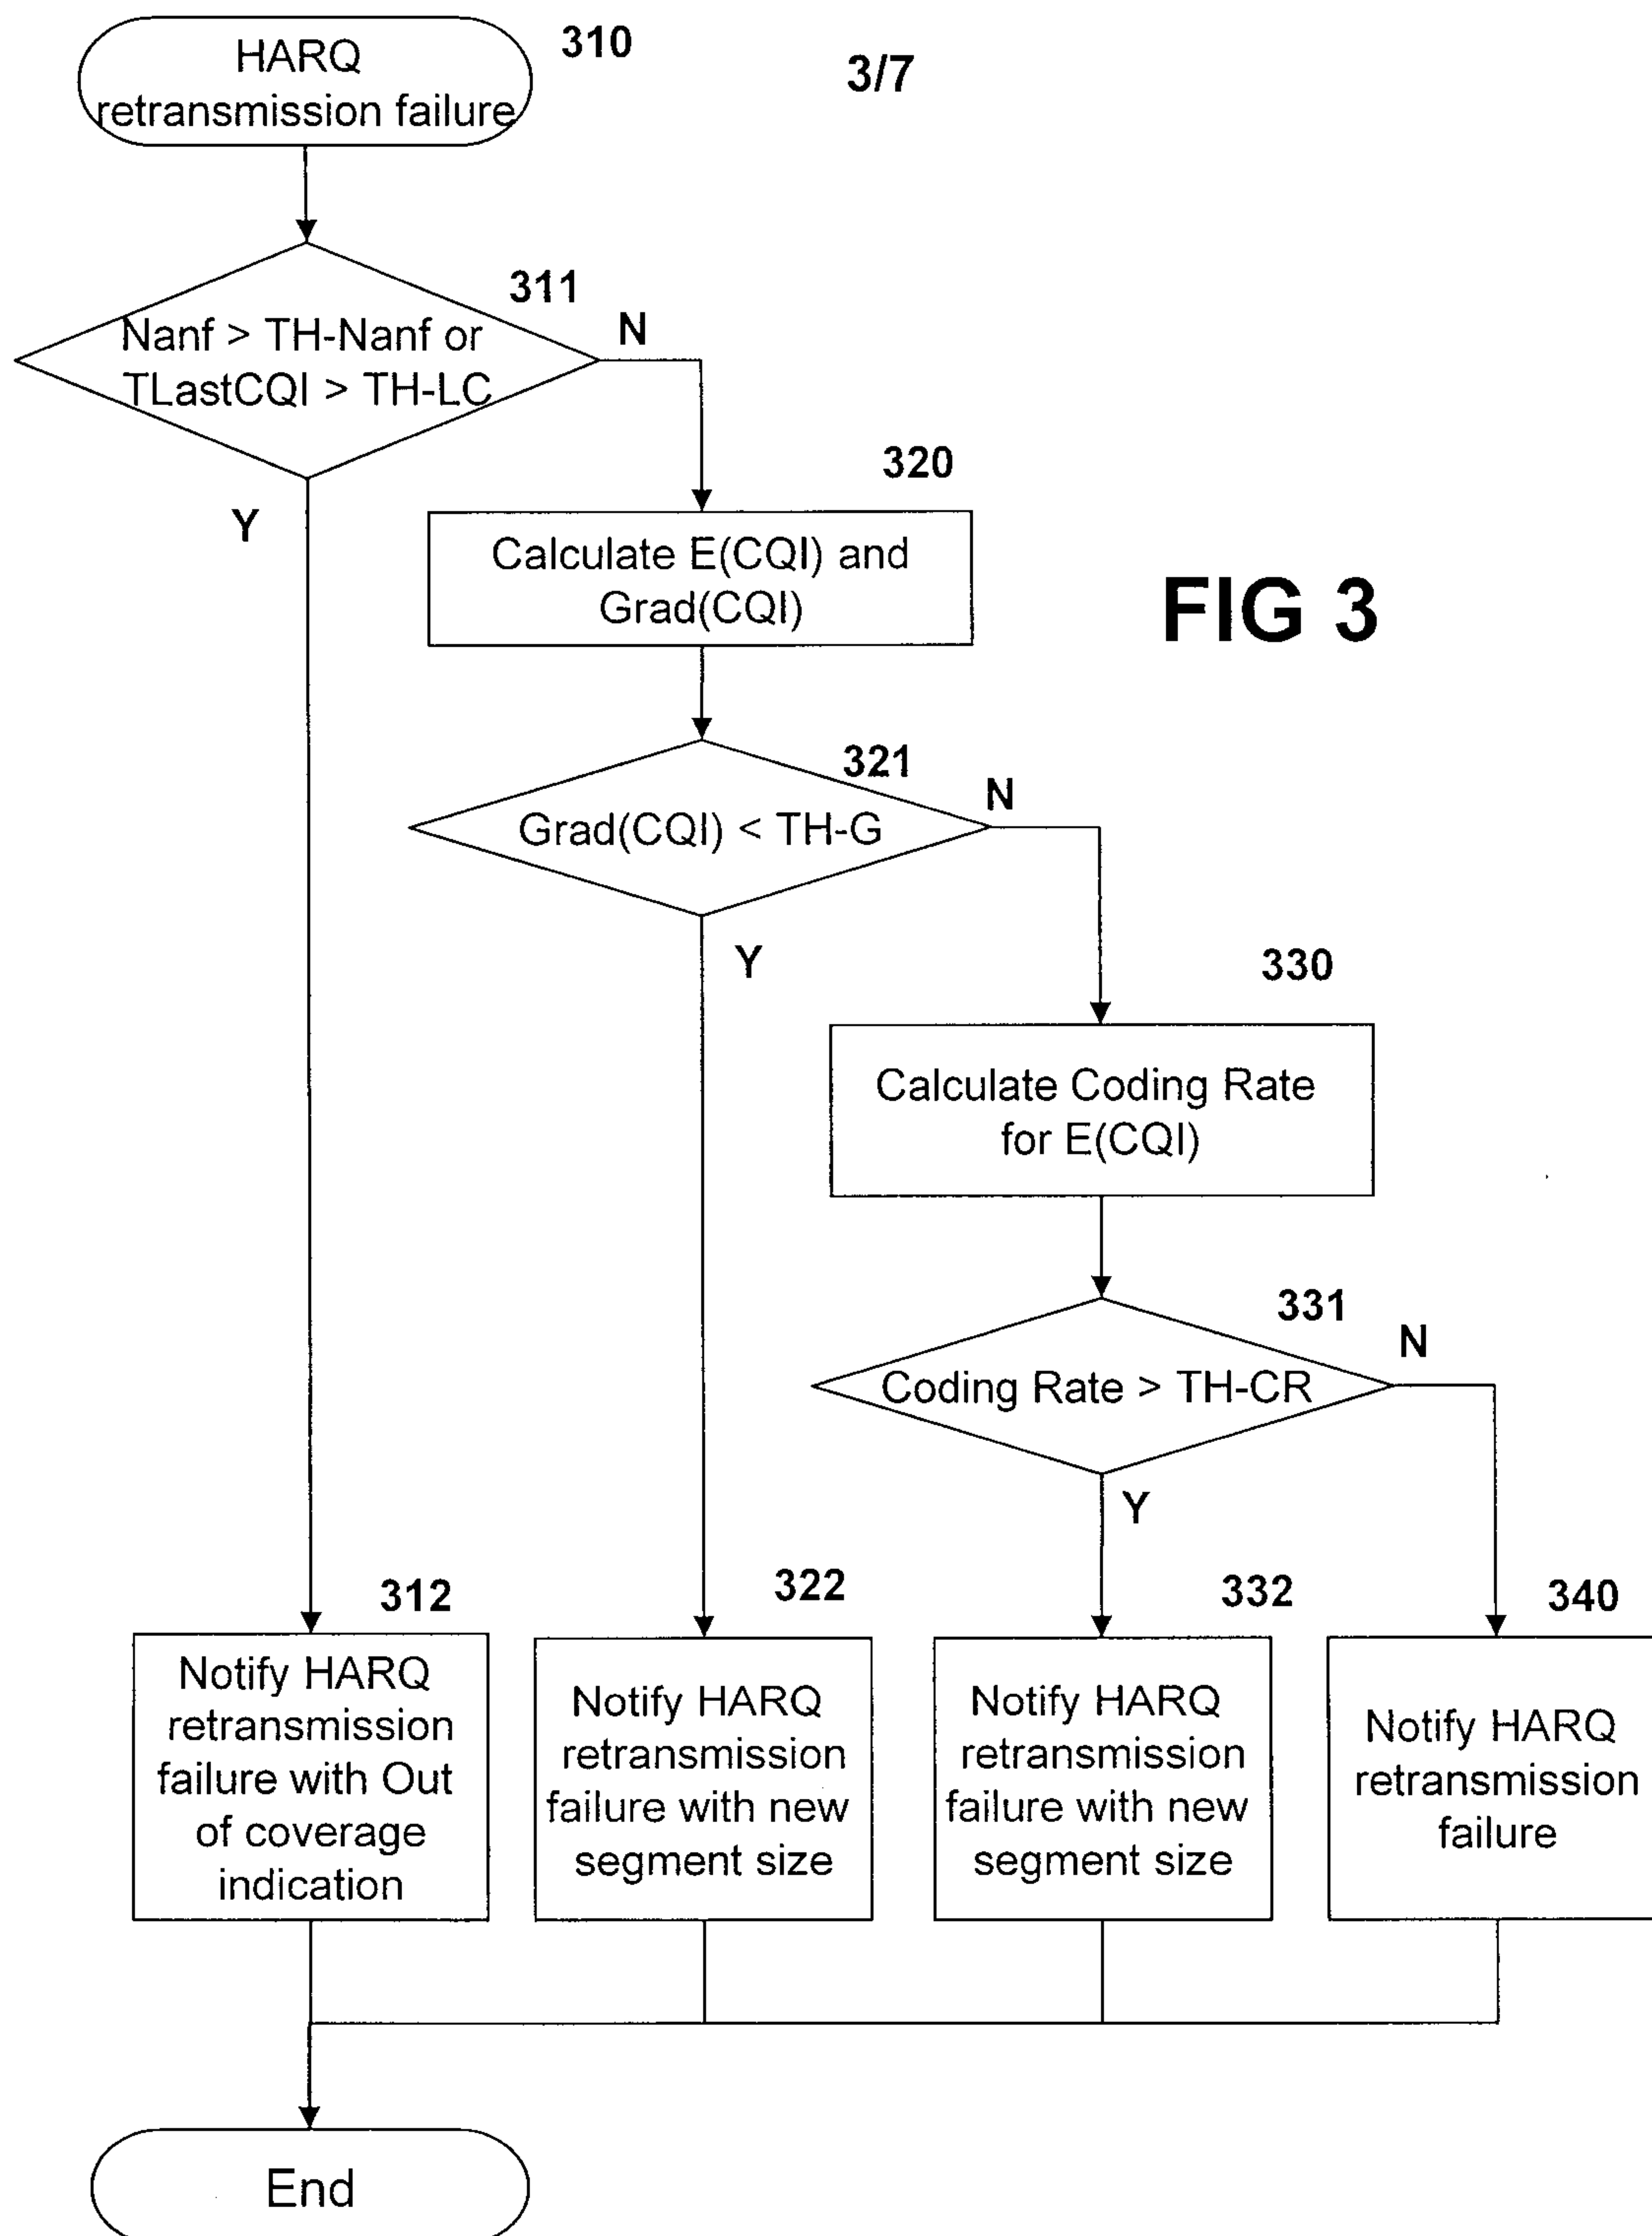

4/7

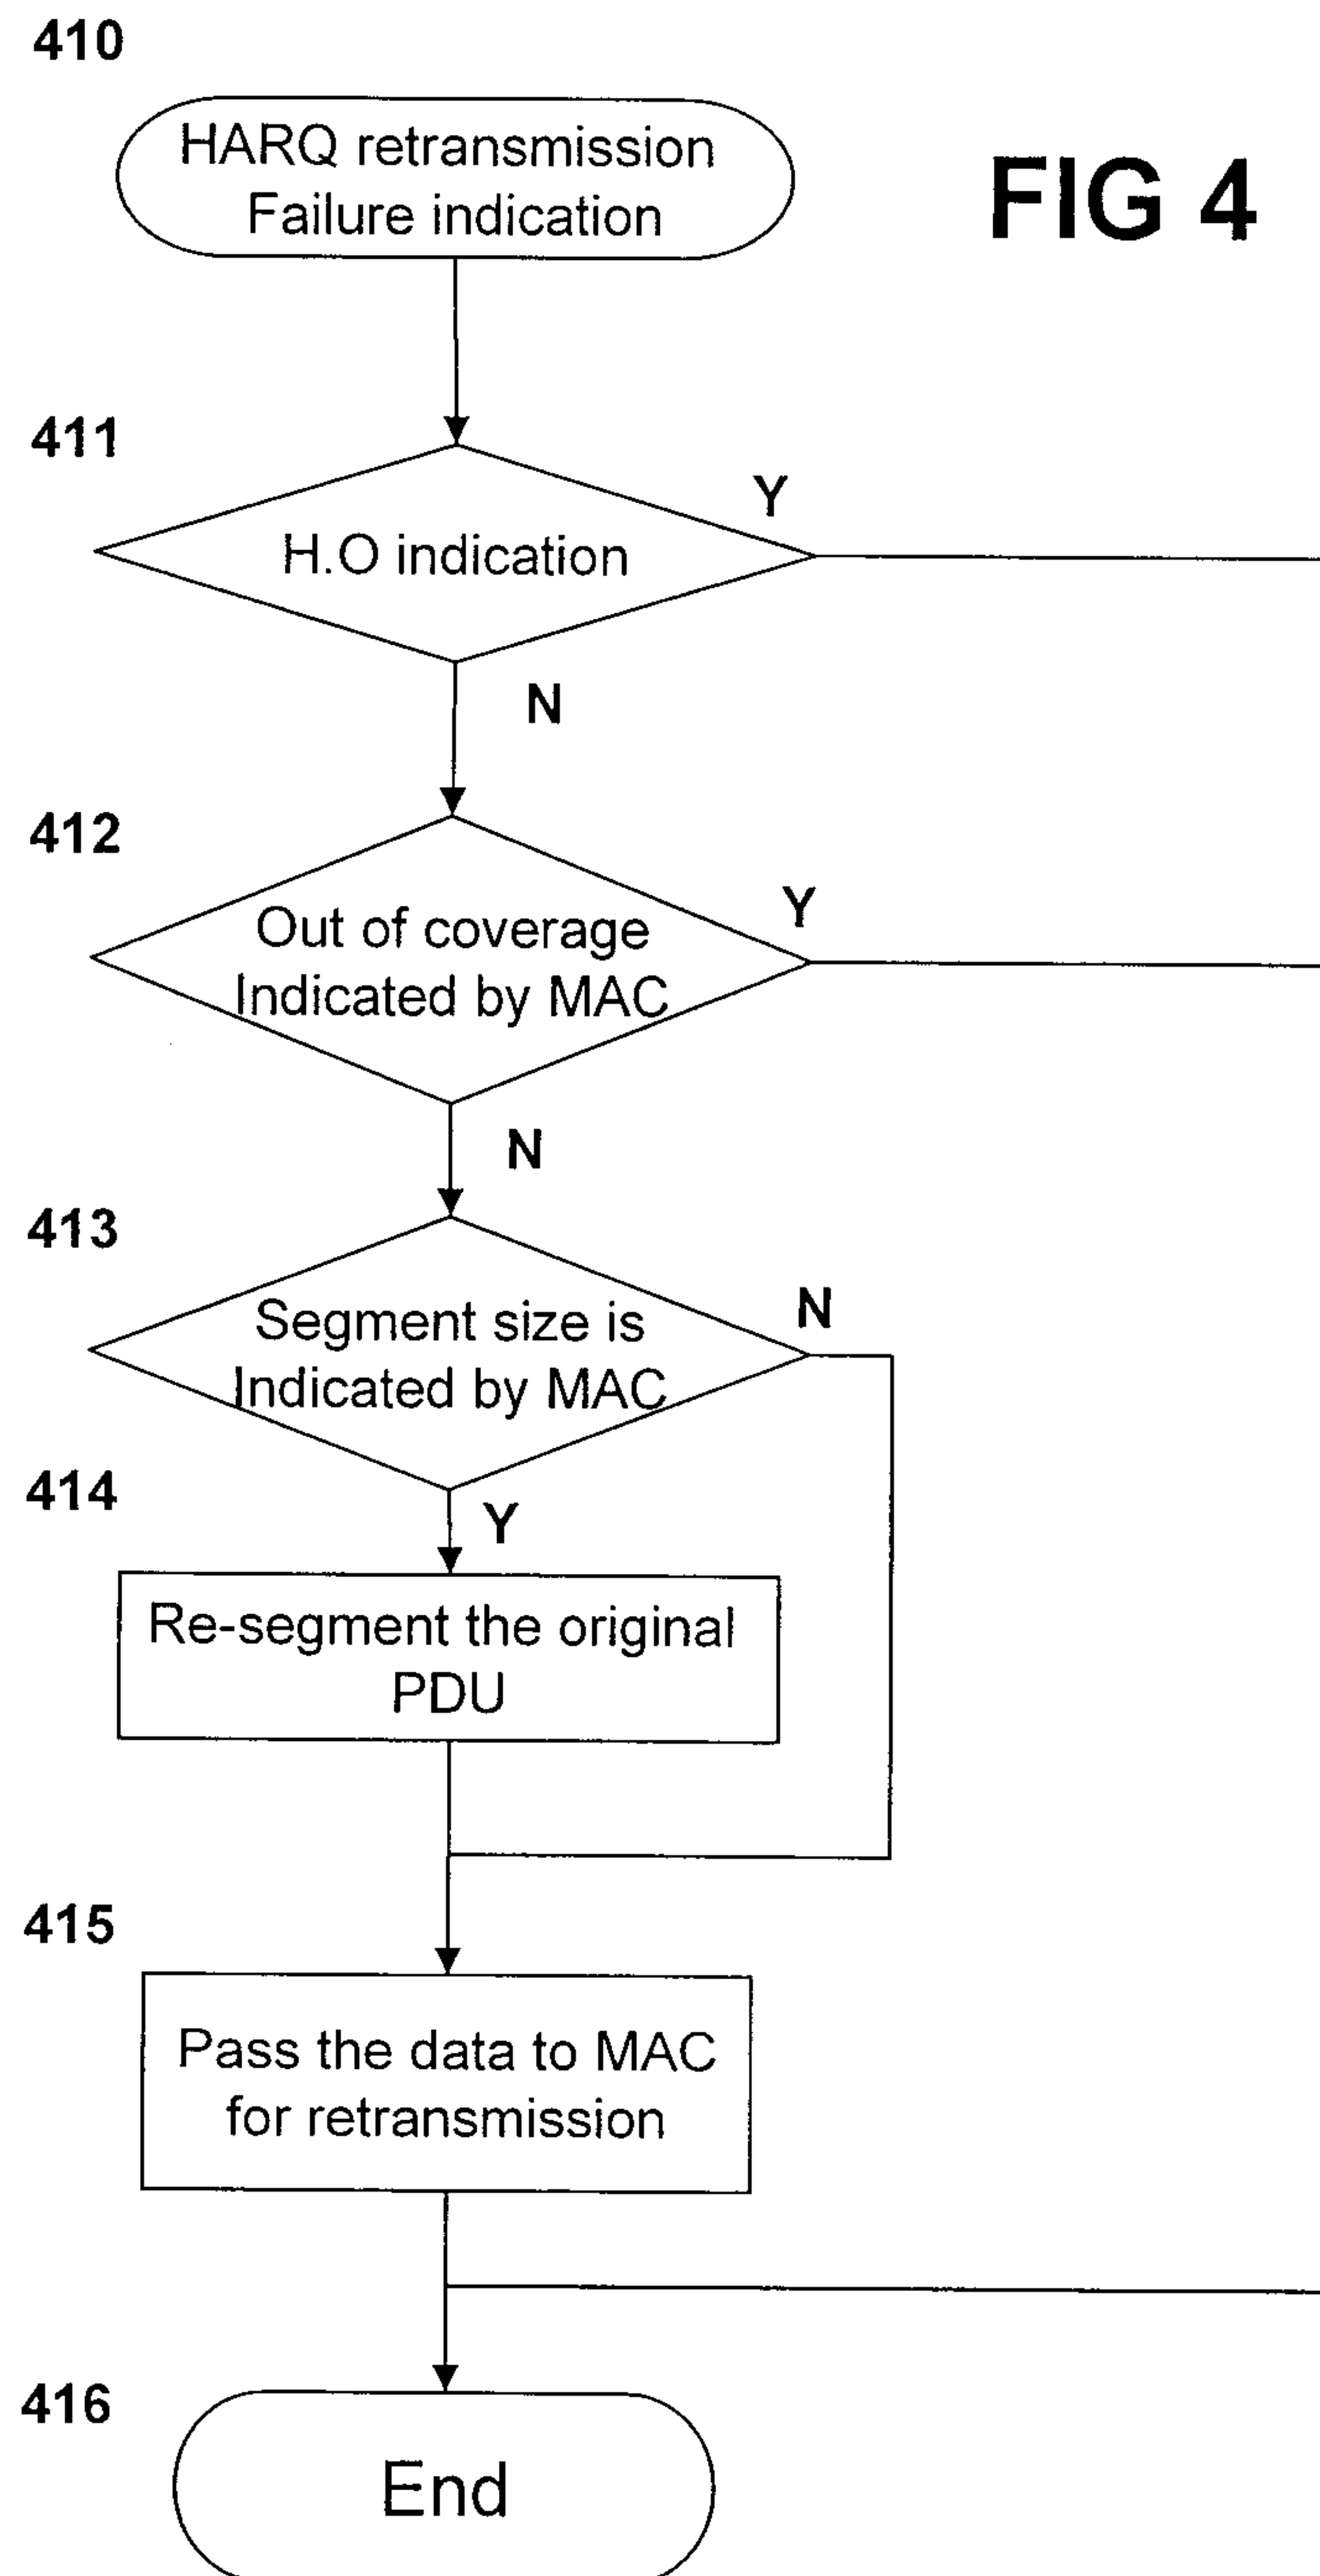

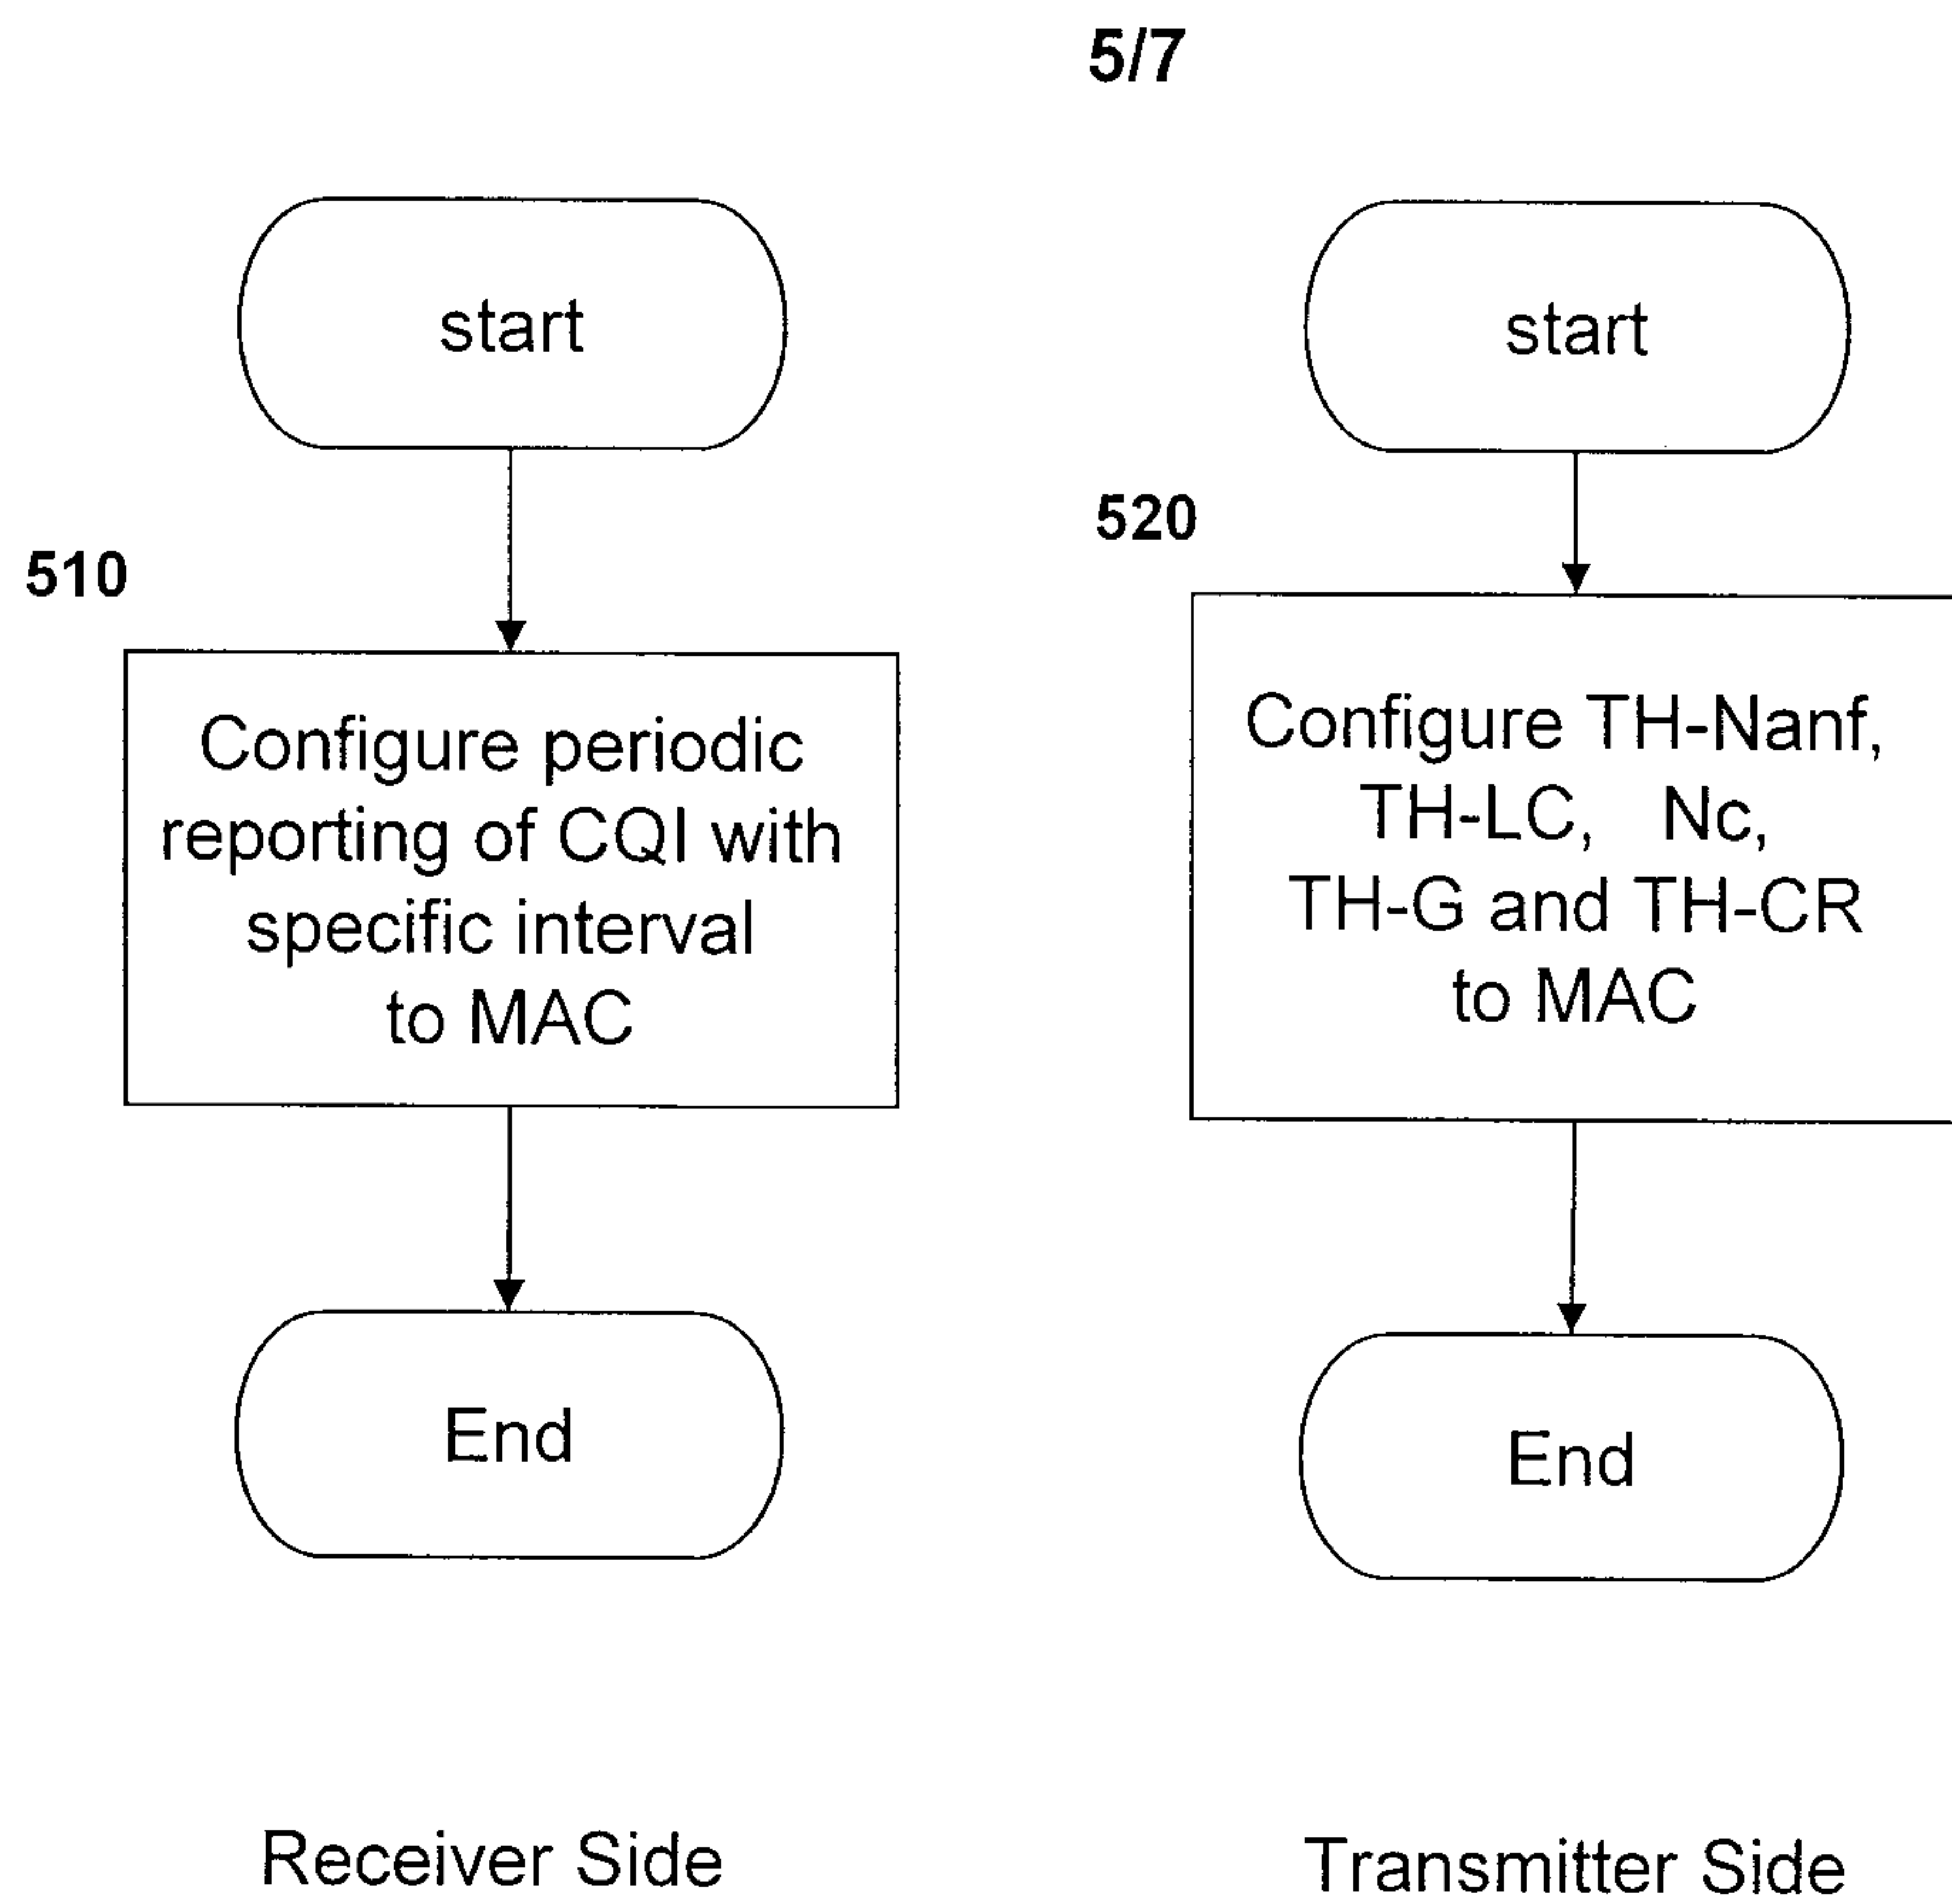
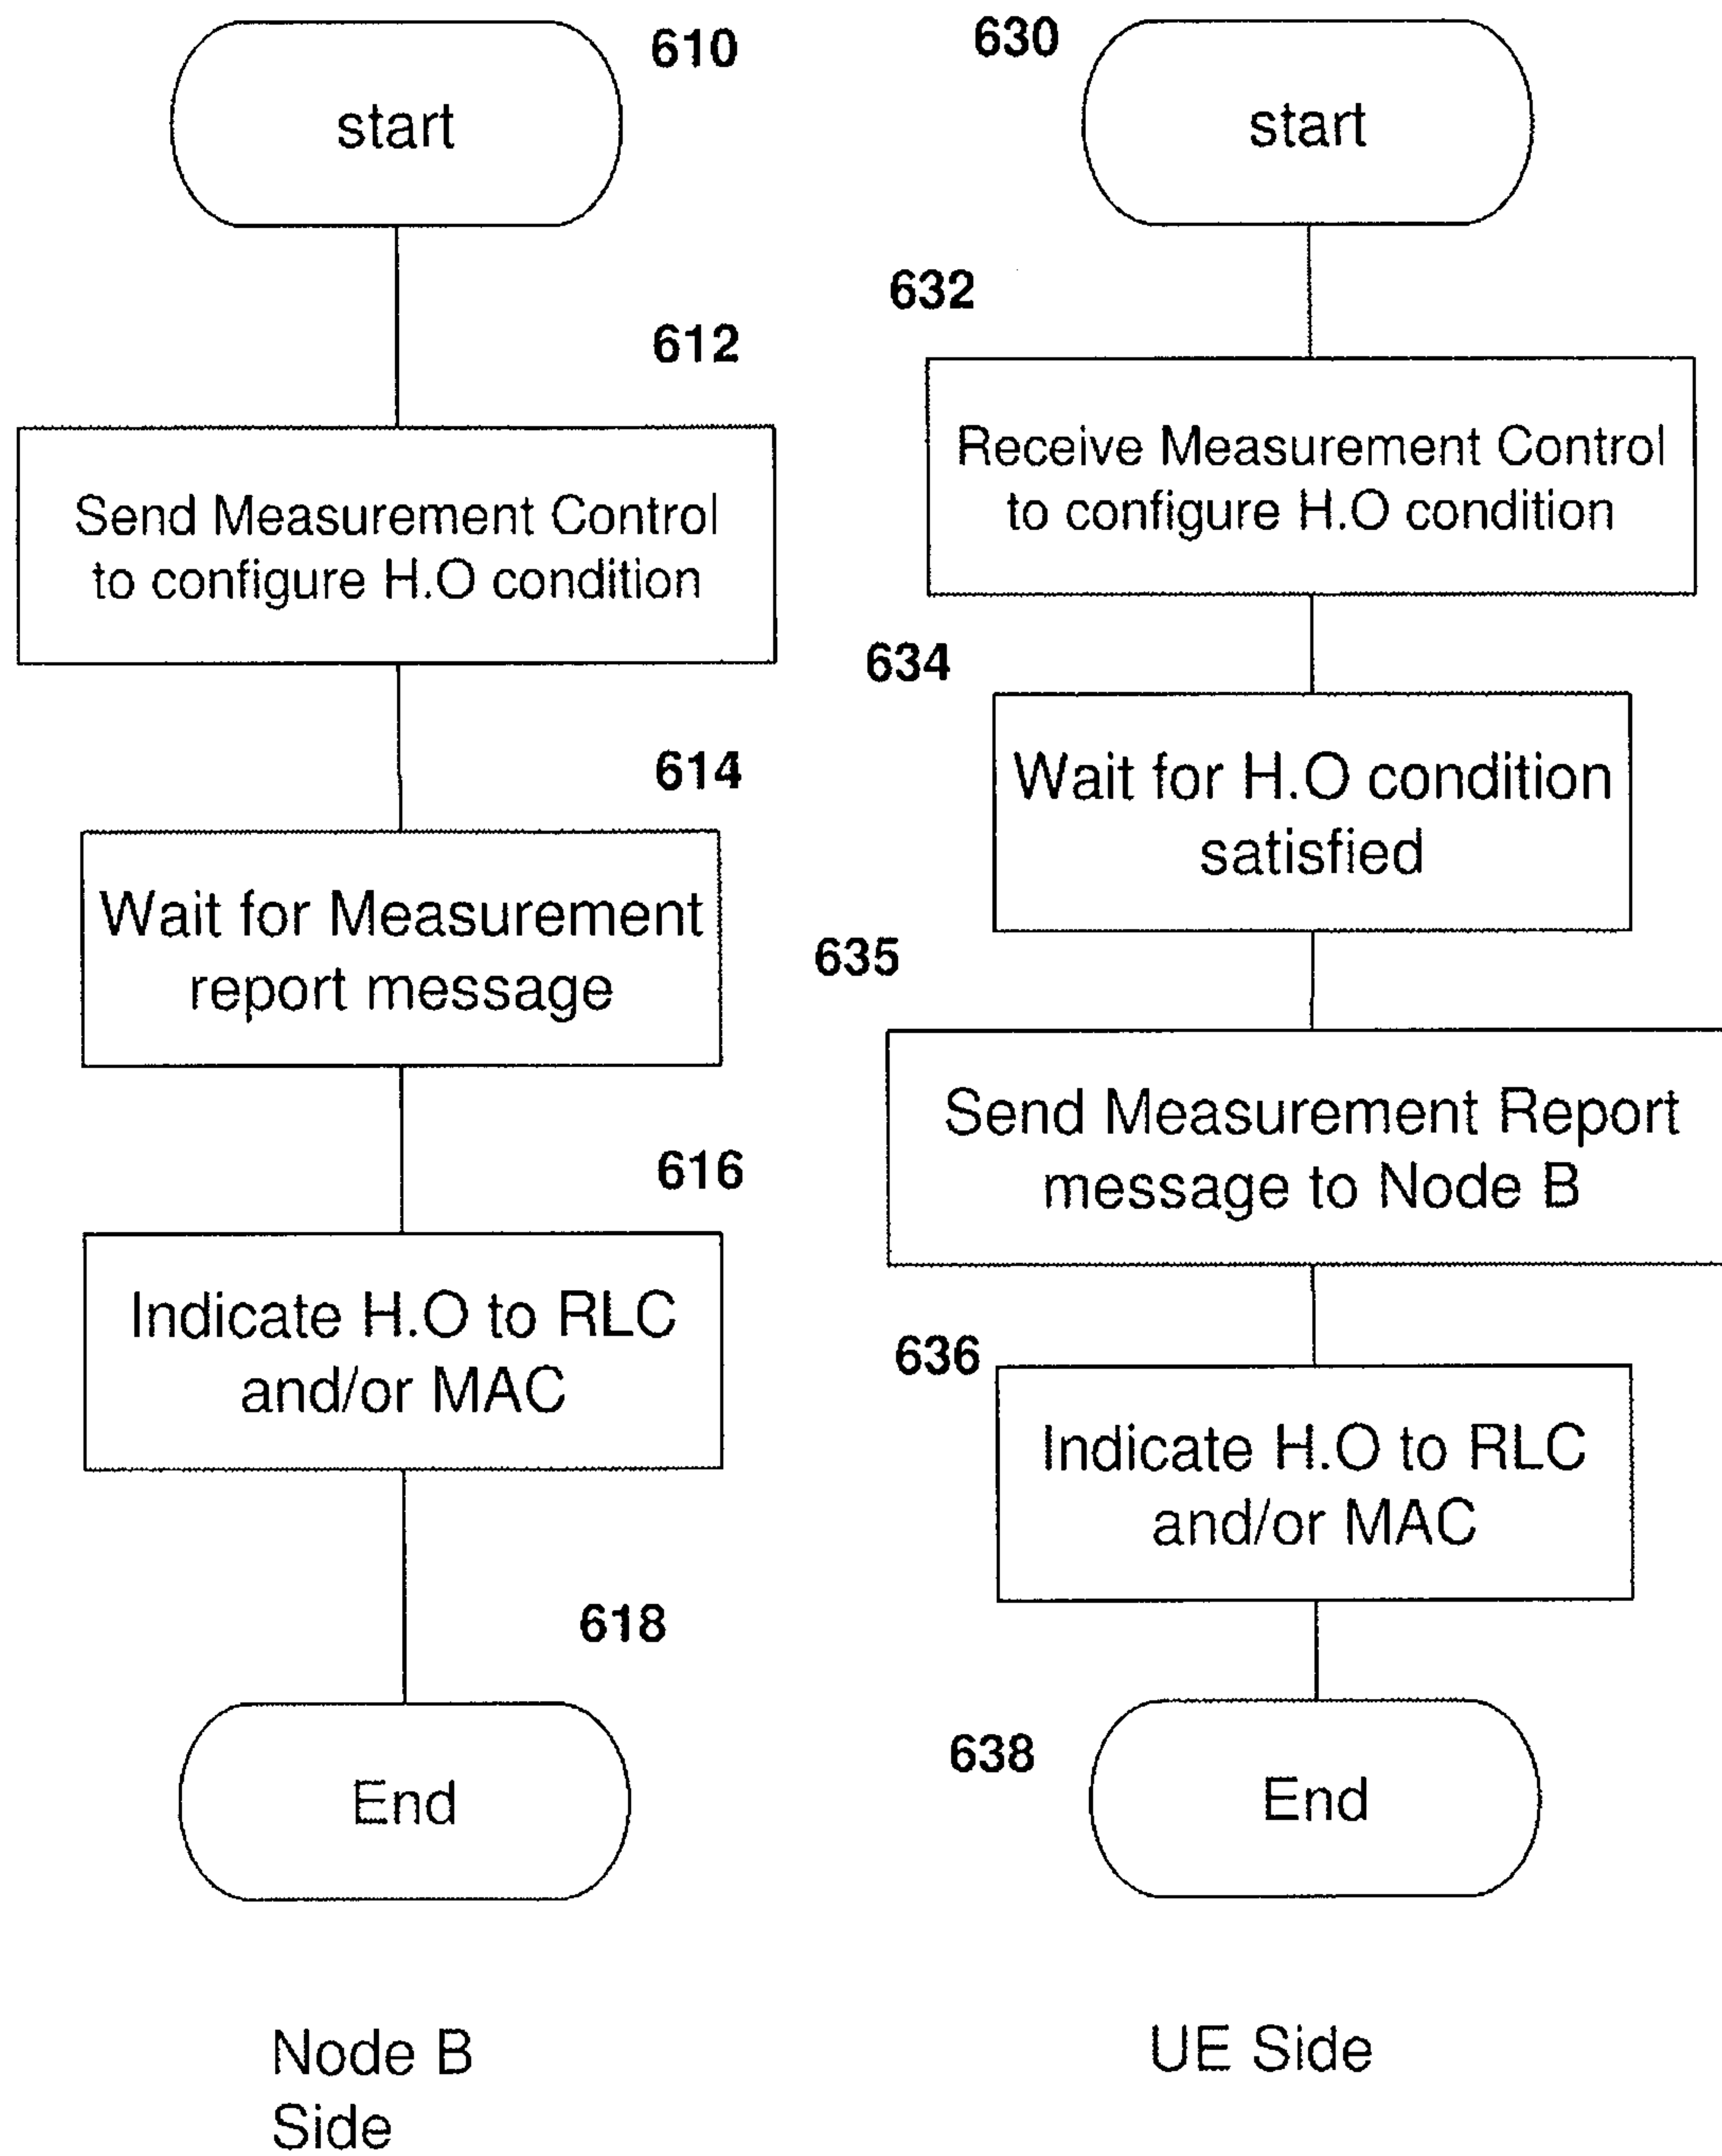


FIG 5

6/7

**FIG 6**

7/7

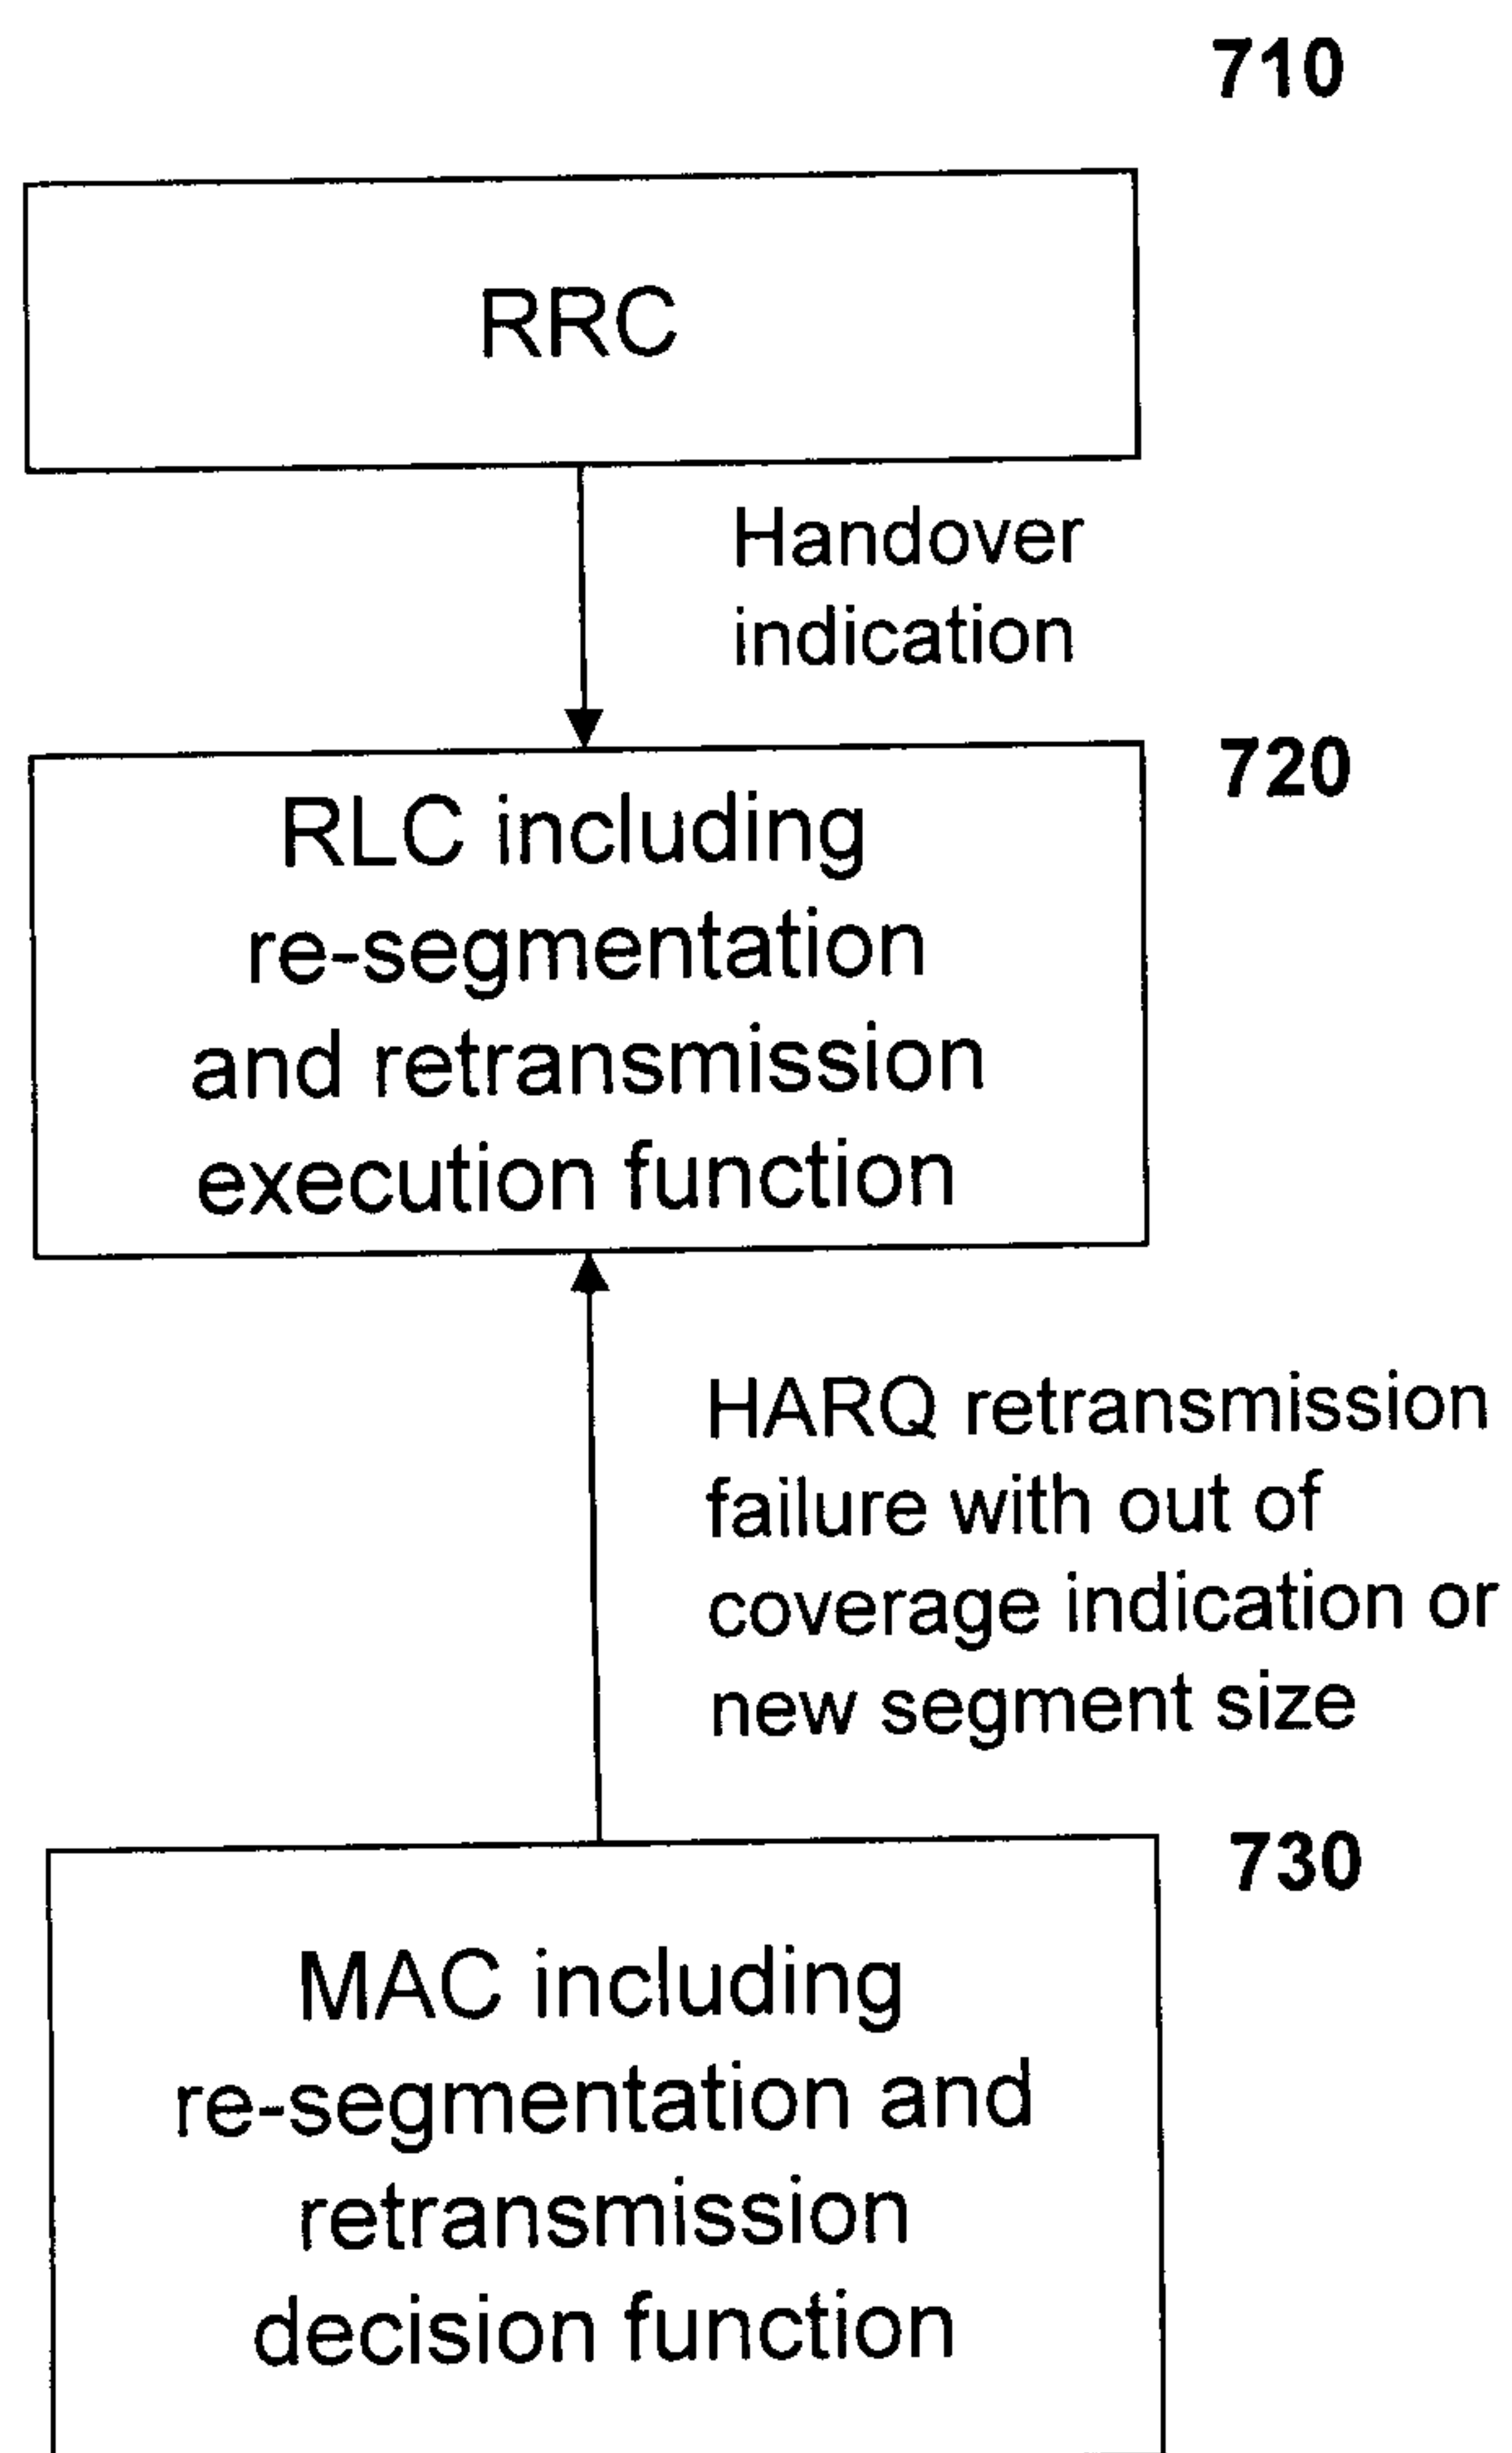


Fig 7

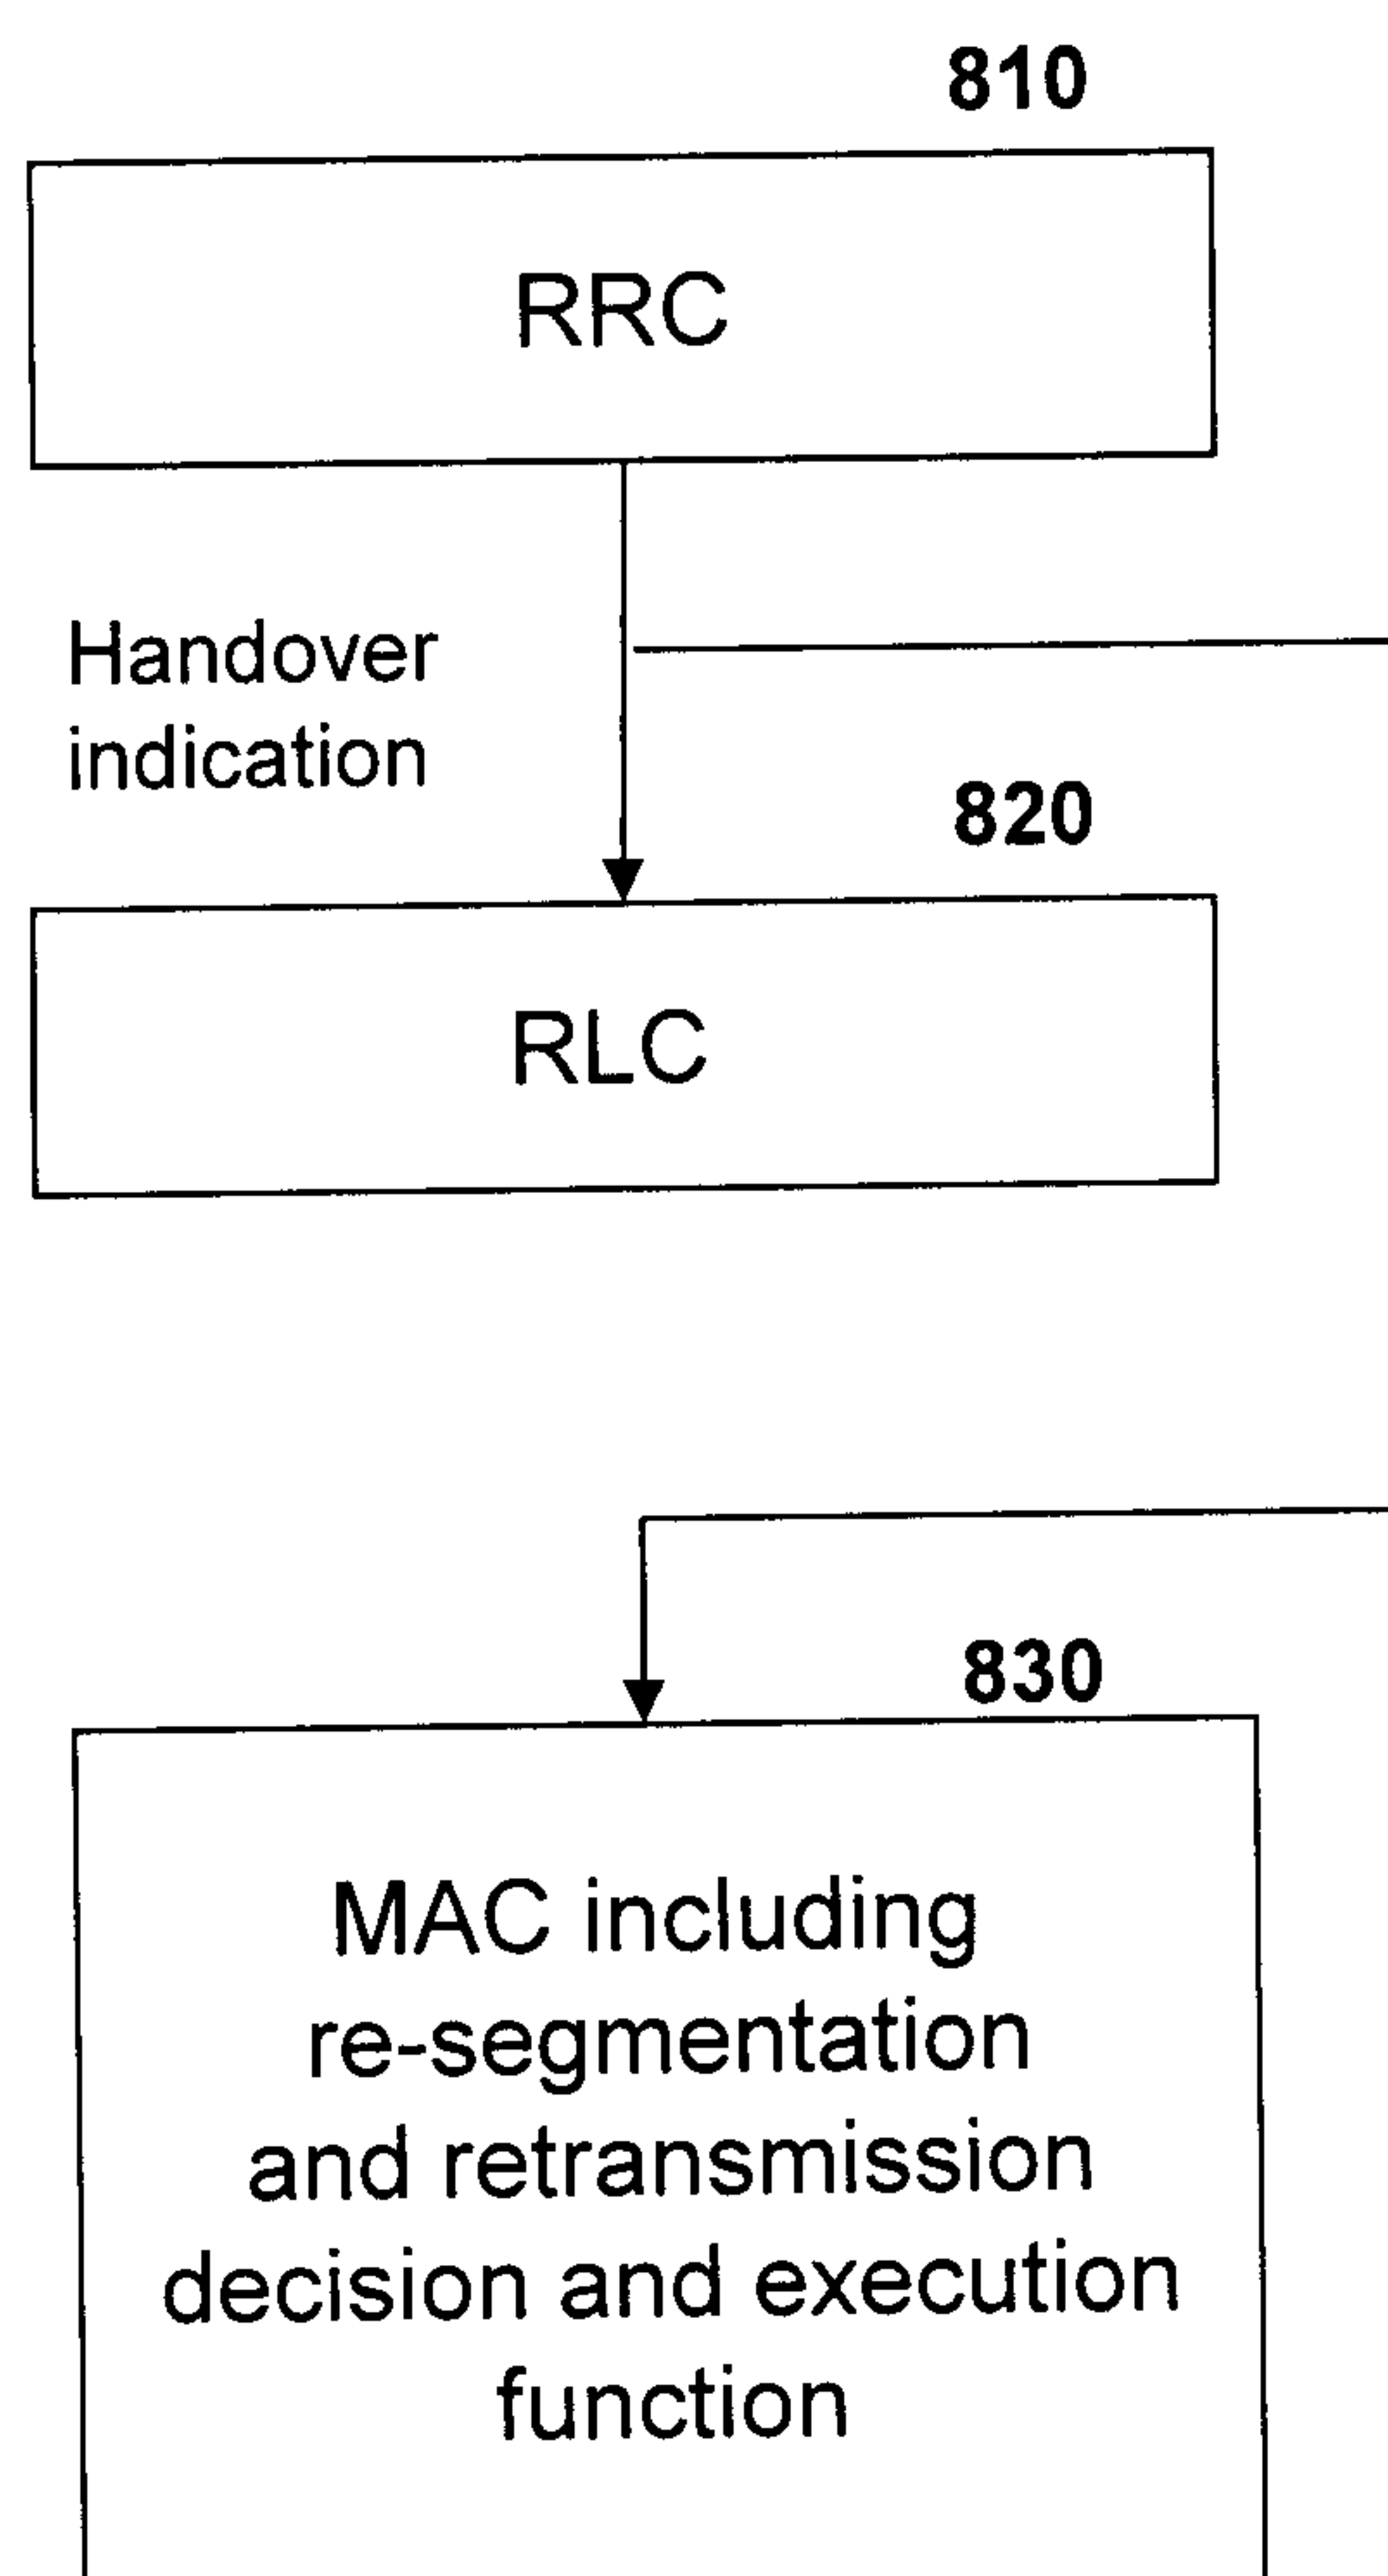


Fig 8

