

PCTWORLD INTELLECTUAL PROP.
International B

INTERNATIONAL APPLICATION PUBLISHED UNDER

(51) International Patent Classification⁶ :

H04N 7/173

A1

(11) Ir

WO 9608927A1

(43) International Publication Date:

21 March 1996 (21.03.96)

(21) International Application Number: PCT/US95/11552

(22) International Filing Date: 13 September 1995 (13.09.95)

(30) Priority Data:

08/305,847

14 September 1994 (14.09.94) US

(71) Applicant: TIME WARNER ENTERTAINMENT COMPANY, L.P. [US/US]; 75 Rockefeller Plaza, New York, NY 10019 (US).


(72) Inventors: BILLOCK, John, K.; 400 Stanwich Road, Greenwich, CT 06830 (US). CUTTNER, Craig, D.; 301 East Avenue, Norwalk, CT 06855 (US). DOWDELL, Kevin, C.; 159 East 30th Street #7A, New York, NY 10016 (US). FLANAGAN, Elisabeth, B.; 844 Dorian Road, Westfield, NJ 07090 (US). GRANGER, James, E.; 11 Sunnyside Avenue, Corte Madera, CA 94925 (US). HSU, Henry, C.; 12 Marino Avenue, Port Washington, NY 11050 (US). MARTIN, Robert, I., M.; Apartment 8D, 366 Broadway, New York, NY 10013 (US). MAY, Robert; 1230 18th Street, San Francisco, CA 94107 (US). PECK, Nicolas; 37 Matilda Avenue, Millvalley, CA 94941 (US). PONTECORVO, Michael, S.; 2142 45th Avenue, San Francisco, CA 94116 (US). PROBST, Bruce, E.; 66 Mount Airy Road East, Croton On Hudson, NY 10520 (US). ROSENBERG, Marc, D.; 308 West 18th Street, New York, NY 10011 (US). SMUL, Debra, R.; 220 West 71st Street #23, New York, NY 10023 (US). WILKINSON, Dennis, P.; 60 Shore Road, Old Greenwich, CT 06870 (US). ZITTER, Robert, M.; 41 East Lane, Stamford, CT 06905 (US).

(74) Agents: ROGERS, Laurence, S. et al.; Fish & Neave, 1251 Avenue of the Americas, New York, NY 10020 (US).

(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG).

Published*With international search report.**Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.*

(54) Title: TELECASTING SERVICE FOR PROVIDING VIDEO PROGRAMS ON DEMAND WITH AN INTERACTIVE INTERFACE FOR FACILITATING VIEWER SELECTION OF VIDEO PROGRAMS

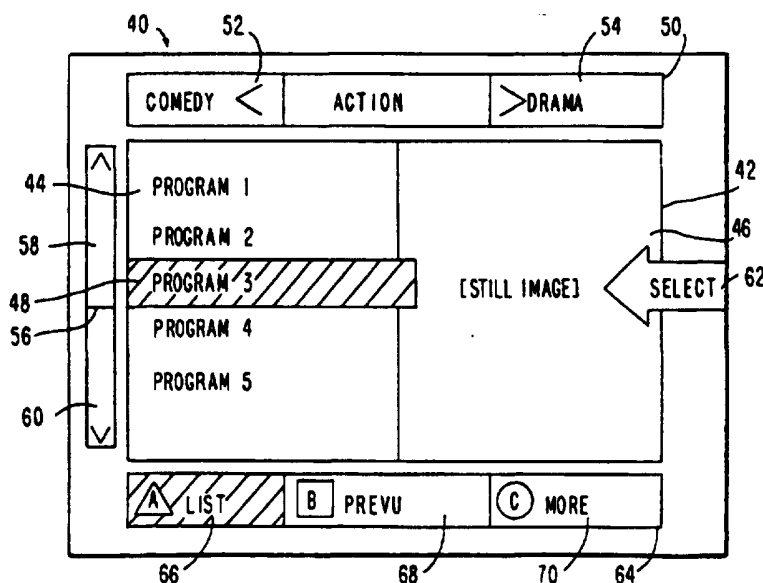**(57) Abstract**

A telecasting service is provided that offers video programs upon viewer demand, and which includes an interactive interface for facilitating viewer selection of video programs. The interactive interface allows the viewer to scan through a list of video programs available on the demand telecasting service. The interactive interface also provides the viewer with still images, full-motion previews, and textual descriptions of the available programs. The demand telecasting service distinguishes subscribers from non-subscribers, and provides an interactive facility for allowing non-subscribers to subscribe to the system.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

TELECASTING SERVICE FOR PROVIDING VIDEO PROGRAMS
ON DEMAND WITH AN INTERACTIVE INTERFACE FOR
FACILITATING VIEWER SELECTION OF VIDEO PROGRAMS

5 Background of the Invention

This invention relates to telecasting systems and particularly to telecasting systems that provide video programs which may be viewed on conventional televisions or other suitable video monitors. More particularly, this invention is directed toward a telecasting service that provides video programs upon viewer demand, and which includes an interactive interface for facilitating viewer selection of video programs.

15 Television viewing has become an increasingly popular pastime over the past several decades. Commercial and public broadcasting stations and cable networks provide viewers with entertainment programming, educational programming, as well as programming dedicated to news, weather, and commercial advertising. But programming variety is not the only reason for the popularity of television -- the convenience of television also contributes substantially to its popularity. Indeed, nearly every household in the United States is equipped with at least one (and commonly several) television sets. It is not surprising that many people take advantage of

- 2 -

the convenience of television instead of wasting valuable time seeking out other forms of entertainment.

Early telecasting systems relied almost exclusively on aerial transmissions to deliver video programs to the viewers' television sets. Many difficulties led to the demise of aerial broadcasting as the dominant video delivery system. For example, the quality of aerial broadcasts varies considerably depending on atmospheric conditions and the viewer's geographic location. But more importantly, aerial broadcasting systems could not keep up with viewer demands for increased variety, because of the limited bandwidth available for aerial transmissions.

In response to the difficulties associated with aerial broadcasting systems, cable telecasting systems have been developed, and they have become the telecasting systems of choice in areas where they are available. Cable telecasting systems provide consistent, high quality transmissions of video programming. They also offer greater variety than aerial systems because more bandwidth is available on cable networks. For example, whereas most viewers receive only a few aerial programming channels, typical cable telecasting systems currently provide 30-75 different programming channels, and systems with even greater channel capacity have been launched in certain areas.

In most cable telecasting systems, a central telecasting facility is coupled to the subscribing viewers' television sets through a communication network. Most current networks use coaxial cable as the communication medium. However, an increasing number of cable telecasting systems are migrating to fiber optic networks. Fiber optic networks offer substantially greater bandwidth than coaxial networks,

- 3 -

which has created the opportunity for even more programming variety than is currently available. Indeed, a cable telecasting system based on a fiber optic network can support hundreds of programming channels, as compared to the typical few dozen channels offered by coaxial cable-based systems.

The increased program variety offered by modern cable telecasting systems is advantageous because it gives the viewer a wider selection of video programs to choose from at any given time. However, no matter how many different programs are available, the viewer's selection has to date been limited to the programs that are being exhibited at any particular time. The viewer thus has been constrained by a predetermined program schedule, which may be undesirable in some situations. For example, television viewers are frequently forced to choose between watching a program of particular interest or engaging in an activity that temporally conflicts with the program of interest. Of course, the viewer may choose to record the program, but this is often a cumbersome task, especially if a video recorder is not immediately available.

Many viewers overcome scheduling conflicts by renting video programs. Although video rental establishments typically offer a wide variety of programs to choose from, the process of renting video programs is rather inconvenient. As a result, a large number viewers may forego viewing a particular program of interest until it is scheduled on one of the program channels -- which may not occur until sometime in the distant future, if at all.

In view of the foregoing, it would be desirable to provide a demand telecasting service which allows a viewer to select a video program from a

- 4 -

plurality of available programs, and which telecasts the selected program substantially at the time the viewer makes the program selection.

5 It would also be desirable to provide a telecasting service that includes an interactive interface which allows a viewer to review a list of available video programs and which facilitates the viewer's selection of a desired program.

10 It would further be desirable to provide a telecasting service that allows a viewer to preview a segment of a video program before viewing the entire video program.

15 It would even further be desirable to provide a telecasting service that distinguishes subscribers from non-subscribers, which allows even non-subscribers to preview a segment of a video program, but allows only subscribers to view the entire video program.

Summary of the Invention

20 It is an object of this invention to provide a demand telecasting service which allows a viewer to select a video program from a plurality of available programs, and which telecasts the selected program substantially at the time the viewer makes the program selection.

25 It is also an object of this invention to provide a telecasting service that includes an interactive interface which allows a viewer to review a list of available video programs and which facilitates the viewer's selection of a desired program.

30 It is a further object of this invention to provide a telecasting service that allows a viewer to preview a segment of a video program before viewing the entire video program.

- 5 -

It is even a further object of this invention to provide a telecasting service that distinguishes subscribers from non-subscribers, which allows even non-subscribers to preview a segment of a video
5 program, but allows only subscribers to view the entire video program.

In accordance with this invention, there is provided a demand telecasting service for telecasting video programs for display on a television or other
10 suitable video display. The demand telecasting service allows a viewer to select from among a plurality of programs that are available substantially at the time of viewer selection. The demand telecasting service provides an interactive interface for facilitating
15 viewer selection of a program. The interactive interface includes a memory for storing a list of available programs and a segment of each program in the list, a display generator for displaying the list on the display, and a viewer control unit that is used by
20 the viewer to select one of the programs on the list, to initiate display of the selected program, and to initiate display of one of the segments corresponding to the selected program. After selecting one of the programs from the list and before initiating display of
25 the selected program, the viewer can preview the selected program by initiating display of the segment corresponding to the selected program.

In order to distinguish subscribers from non-subscribers, the memory of the interactive interface
30 can further store a list of identifiers corresponding to subscribing viewers. The viewer control unit transmits an identifier corresponding to a viewer using the viewer control unit. The interactive interface further comprises a validator for comparing the
35 transmitted identifier to the list of identifiers

- 6 -

corresponding to subscribing viewers. When the transmitted identifier does not match any identifier on the list of identifiers, the validator prevents display of the selected program, but allows the viewer to
5 preview the segment corresponding to the selected program.

Brief Description of the Drawings

The above and other objects and advantages of the present invention will be apparent upon
10 consideration of the following detailed description, taken in conjunction with the accompanying drawings, in which like reference characters refer to like parts throughout, and in which:

FIG. 1 is a block diagram of a cable
15 telecasting network within which the demand telecasting service of the present invention may be implemented;

FIG. 2 is a more detailed block diagram of the telecasting facility shown in FIG. 1;

FIGS. 3 and 4 are tables containing lists of
20 data items stored in the mass storage system shown in FIG. 2;

FIG. 5 is a more detailed block diagram of one of the viewing stations shown in FIG. 1;

FIGS. 6-8 are sample screen displays which
25 illustrate the operation of the interactive interface of the present invention; and

FIGS. 9A-9H are logic flow diagrams representing a control program used to implement the interactive interface of the present invention.

30 Detailed Description of the Invention

Referring first to FIG. 1, a cable telecasting network 10 is described, within which the demand telecasting service of the present invention may

- 7 -

be implemented. The network 10 includes a telecasting facility 12, and a plurality of viewing stations 14. A communication medium 16 couples the telecasting facility 12 to the viewing stations 14. The
5 communication medium 16 may be any medium that is suitable for delivering signals over long distances between the telecasting facility 12 and the viewing stations 14. Preferably, the communication medium 16 is fiber optic cable, although other media (such as
10 coaxial cable) may be used instead.

In many respects, the network 10 operates in a conventional manner to make video programs available for viewing on the viewing stations 14. The telecasting facility 12 preferably includes a central
15 transmitting station that transmits video programs to the viewing stations 14 via the communication medium 16. The viewing stations 14 are typically located in the viewers' homes or other locations that are convenient for viewing video programs. Each of the
20 viewing stations 14 preferably includes a conventional television monitor or other suitable video display.

The telecasting facility 12 preferably telecasts a plurality of video programs simultaneously over a plurality of programming channels on the
25 communication medium 16. All of the viewing stations 14 on the network 10 have access to the plurality of programs that are telecast by the telecasting facility 12. A viewer can view a particular video program by tuning one of the viewing
30 stations 14 to the programming channel that is carrying the program of interest.

However, unlike conventional telecasting networks, the network 10 permits bi-directional communication between the telecasting facility 12 and
35 each of the viewing stations 14 over the communication

- 8 -

medium 16. Preferably, at least one of the plurality of programming channels is used for interactive applications, like the demand telecasting service of the present invention. However, it should be understood that a plurality of programming channels may be used for the demand telecasting service without departing from the spirit of the invention.

When the viewer tunes one of the viewing stations 14 to the interactive channel, commands may be sent from that viewing station 14 to the telecasting facility 12. As described in detail below, such commands may include a program selection command that causes the telecasting facility 12 to telecast a program of interest on the interactive channel substantially at the time that the command is transmitted. Although all of the viewing stations 14 receive all of the signals telecast on the interactive channel, only the viewing station 14 that is used to select a particular program displays the selected program. The use of the interactive channel by one of the viewing stations 14 does not interfere with the use of the interactive channel by another one of the viewing stations 14. Thus, many different viewing stations 14 on the network 10 may be used to view different interactively selected programs at the same time.

Referring now to FIG. 2, a preferred embodiment of a telecasting facility is described that is suitable for use as the telecasting facility 12 shown in FIG. 1. As mentioned above, the telecasting facility 12 includes a transmitting station 20 that transmits video programs to the viewing stations 14 (FIG. 1) over a plurality of programming channels on the communication medium 16 in a conventional manner. However, in order to implement the demand telecasting

- 9 -

service of the present invention, the telecasting facility 12 also includes a processing system 22 coupled to the transmitting station 20, a mass storage system 24, a tape drive system 26, and conventional I/O devices 28 (such as a keyboard, display monitor, and mouse). The mass storage system 24, the tape drive system 26, and the I/O devices 28 are considered peripheral components of the processing system 22.

The processing system 22 is preferably a multiple processor computer system that is capable of handling many programming requests that may be received from the viewing stations 14 (FIG. 1) over the communication medium 16 on the interactive channel. Such requests are initially received by the transmitting station 20 and are subsequently passed on to the processing system 22. In a preferred embodiment, the processing system 22 is a network of at least eight Challenge computer systems available from Silicon Graphics, Inc., located in Mountain View, California. Each Challenge computer is preferably equipped with at least eight processors operating in parallel, thus providing the processing system 22 with at least 64 processors for handling programming requests.

The mass storage system 24 is preferably an array of high performance disk drives. Alternatively, other types of data storage systems can be used, such as CD-ROM systems.

The tape drive system 26 is preferably a multi-component system that includes a tape storage unit (not shown), a plurality of tape players (not shown), and an automatic tape retrieval unit (not shown). When a request for a video program is received, the processing system 22 instructs the automatic tape retrieval unit to retrieve the tape

- 10 -

containing the selected video program from the appropriate location in the tape storage unit. The automatic tape retrieval unit then inserts the tape into an available tape drive, which in turn plays the
5 tape to be telecast. As the tape is played, the video program data (video and audio) is transferred to the mass storage system 24 for temporary storage, after which the program is telecast to the viewing station 14 (FIG. 1) from which the viewer made the selection.
10 When the tape has finished playing, the automatic tape retrieval unit returns the tape to the appropriate location.

The tape drive system 26 preferably accommodates professional recording tapes, such digital
15 linear tapes (DLTs), although systems which accommodate other types of media (such as conventional video tapes, digital audio tapes (DATs), video disks, etc.) may be used instead. A suitable automated tape drive system that uses DLTs is available from Digital Equipment
20 Corporation, located in Maynard, Massachusetts. It should be noted, however, that a manual tape storage and retrieval system may be used without departing from the spirit of the invention.

Preferably, the telecasting facility 12
25 receives tapes containing the video and audio portions of new video programs on a periodic basis (e.g., monthly). The video portion of each video program is preferably stored in a compressed format in accordance with the MPEG-1 video compression standard established
30 by the Motion Picture Experts Group. The tapes are loaded into the storage unit of the tape drive system 26, into locations that may be predetermined by the supplier of the tapes. If a particular predetermined location is occupied, another location

- 11 -

may be used, as long as the processing system 22 has information reflecting the actual tape location.

The mass storage system 24 stores many data files used in connection with the demand telecasting service of the present invention. These data files include data files for storing the video and audio portions of frequently selected video programs, data files for storing the video and audio portions of full-motion previews from the available video programs, and data files for storing still images from the available video programs. The mass storage system 24 also stores additional data (described below in connection with FIGS. 3 and 4) associated with each available video program and each subscribing viewing station 14 (FIG. 1). Further, as mentioned above, the mass storage system 24 temporarily stores data files containing the audio and video portions of programs that have been transferred from tape in response to viewer selections. The still image data, and the video portions of the full-length video programs and full-motion previews are preferably stored in a compressed format in accordance with the MPEG-1 standard.

The full-motion preview data and the still image data are preferably received on tape along with the tapes containing the corresponding full-length video programs. The full-motion preview data and the still image data for each available program are preferably transferred to the mass storage system 24 at the time the corresponding video program tapes are loaded into the tape storage unit of the tape drive system 26.

When a video program needs to be retrieved from the tape storage unit, the viewer may experience a noticeable delay between the time of selection and the time the program is exhibited. By storing the data for

- 12 -

frequently selected programs in the mass storage system 24 on a long-term basis, the telecasting facility 12 is able to service requests for such programs more rapidly than would otherwise be the case.

- 5 Indeed, if there is sufficient storage space, it may be preferable to store the entire program library in the mass storage system 24, to eliminate the delays associated with the use of the tape drive system 26.

The processing system 22 receives requests
10 for available video programs from the viewing stations 14 (FIG. 1). In a large telecasting network, it should be expected that the processing system 22 will be called upon to service a large number of requests within relatively short periods of time. In
15 order to promptly service a large number of requests, the processing system 22 preferably uses the asynchronous transfer mode (ATM) protocol to manage data flow on the communication medium 16. In accordance with the ATM protocol, the telecasting
20 facility 12 and each of the viewing stations 14 (FIG. 1) are assigned time slots during which they are permitted to transmit data on the communication medium 16. Data to be transmitted by a particular device are buffered by that device in a conventional
25 manner until its time slot is reached. When its time slot is reached, the transmitting device transmits the data, along with an address that identifies the device that is to receive the data.

When large amounts of data need to be
30 transmitted, such as when the telecasting facility 12 needs to transmit an entire video program to one of the viewing stations 14 (FIG. 1), the data are divided into smaller packets which are transmitted during different time slots. Each packet is transmitted with a
35 destination address. The destination device receives

- 13 -

and reassembles the packets as required. The telecasting facility 12 transmits packets at a rate that allows the receiving viewing station 14 (FIG. 1) to present an uninterrupted video program to the viewer.

FIGS. 3 and 4 are tables that list data items that are representative of data that are stored in the mass storage system 24 (FIG. 2) (in addition to the files containing the full-length video data, the full-motion preview data, and the still image data). The data represented by the tables shown in FIGS. 3 and 4 are preferably stored in conventional database tables.

The data items listed in FIG. 3 represent data that are stored in connection with each stored video program. This data is preferably transferred to the mass storage system 24 (FIG. 2) each time new video program tapes are received by the telecasting facility 12 (FIG. 2). This may be accomplished through a tape transfer (similar to the full-motion preview data and the still image data), or through a direct transfer from the video program supplier (e.g., through a modem connection).

The data item "PROGRAM_ID" represents a unique identifier that is associated with each available video program. As explained below, viewer requests for video programs are accomplished by the transmission of the PROGRAM_ID associated with the desired program from one of the viewing stations 14 (FIG. 1) to the processing system 22 (FIG. 2). A numerical identifier is preferred as the PROGRAM_ID to facilitate rapid processing of viewer requests.

The data item "PROGRAM_NAME" preferably represents a text field that contains the commonly known name of an available video program.

- 14 -

The data item "CATEGORY" preferably represents a text field that contains the name of one of several categories to which a video program may be assigned. Typical categories for video programs may include "action," "drama," "sports," etc. Preferably, the CATEGORY field can support multiple category assignments for each video program. Thus, some video programs may appear in the program listings for two or more categories. For example, a recently released comedy program may be assigned to a "comedy" category, as well as a special category designated "new releases."

The data item "CLASSIFICATION" is used to further categorize each video program. One particularly useful classification scheme distinguishes video programs that are suitable for children from those that are not. As explained below, this data item may be used to limit certain viewers' program choices.

The data item "DESCRIPTION" represents a text field that contains information that may be helpful to a viewer when searching for a particular video program of interest. Some examples of this type of information include the names of the performers, the name of the director, the length of the video program, and a brief description of the content of the video program. Other useful information may be added, as appropriate.

The data item "STILL_IMAGE" represents a text field that contains the name of a data file stored in the mass storage system 24 (FIG. 2) that contains image data that is used to provide the viewer with a still image from a video program. The still image is provided to the viewer (in a manner described below) as an aid to selecting a program of interest.

The data items "PREVIEW_VIDEO" and "PREVIEW_AUDIO" are text fields that represent the

- 15 -

names of data files stored in the mass storage system 24 (FIG. 2) that contain the video and audio portions of a short segment of a video program. The short segment of the video program is provided to the viewer (in a manner described below) as an aid to selecting a program of interest.

The data items "FULL_VIDEO" and "FULL_AUDIO" are text fields that represent data that are used by the processing system 22 (FIG. 2) to determine the location of a selected video program. If the video program is one that is stored on a long-term basis in the mass storage system 24 (FIG. 2), the FULL_VIDEO and FULL_AUDIO data items represent the names of the data files containing the full video and audio portions of the video program. Otherwise, the FULL_VIDEO data item represents a location in the tape storage unit of the tape drive system 26 (FIG. 2) where the tape containing the video program is stored. The FULL_AUDIO data item is not used in this situation.

The data items listed in FIG. 4 represent data that pertain to the viewing stations 14 (FIG. 1) that are connected to the network 10 (FIG. 1). This information may be entered by an operator using the I/O devices 28 (FIG. 2).

The data item "STATION_ID" preferably represents a numeric field that contains a unique identifier for each of the viewing stations 14 (FIG. 1) that have subscribed to the demand telecasting service of the present invention. The station identifiers are used by the processing system 22 (FIG. 2) as the destination addresses for data packets transmitted on the communication medium 16 (FIG. 2).

The data item "VIEWER_ID" represents a text field that contains a unique identifier for each person

- 16 -

that is permitted to use a particular viewing station 14 (FIG. 1).

The data item "CLASSIFICATION" is similar to the data item of the same name described in connection with FIG. 3. However, the purpose here is to define the classes of video programs that a particular viewer (as identified by the VIEWER_ID) is permitted to watch.

Referring now to FIG. 5, a preferred embodiment of a viewing station is described that is suitable for use as one of the viewing stations 14 shown in FIG. 1. The viewing station 14 includes a graphics computer 30, a video encoder 32, a television monitor 34, a signal converter 36, and a remote viewer control unit 38. It should be understood that some or all of these components, especially the graphics computer 30, the video encoder 32, and the signal converter 36, may be combined into a single device without departing from the spirit of the invention.

The graphics computer 30 performs the graphics functions required to implement the interactive interface of the present invention. The graphics computer 30 also performs the communications functions for the viewing station 14, including transmitting data packets to, and receiving data packets from, the telecasting facility 12 (FIG. 2). In a preferred embodiment, the graphics computer 30 is an R4000PC Indy computer available from Silicon Graphics, Inc. The Indy computer is preferably equipped with 8 megabytes of memory, a Newport graphics card, and an A/V card which provides an audio and video interface between the graphics computer 30 and the signal converter 36.

The graphics computer 30 receives several different types of information in packets from the telecasting facility 12 (FIG. 2) over the interactive

- 17 -

channel on the communication medium 16. This information includes the video and audio portions of video programs selected by the viewer, the video and audio portions of short segments of the video programs, still images from the video programs, textual descriptions of the available video programs, and listings of the available video programs. As explained below, this information is presented to the viewer through the use of a convenient interactive interface.

Information received by the viewing station 14 is initially processed by the graphics computer 30. Such processing steps may include reassembling of data packets, decompression of the compressed video portions of the video programs and short segments of the video programs, and synchronization of the video and audio portions of the video programs and the short segments of the video programs. These processing steps may be performed in a conventional manner.

The information processed by the graphics computer 30 that is to be made available to the viewer (e.g., video programs, short segments, still images, program lists, etc.) is sent to the video encoder 32. The video encoder 32 is preferably a 2826 Video Encoder II available from RasterOps, Inc., located in Santa Clara, California. The video encoder 32 converts the information from the native format of the graphics computer 30 to a television standard format such as NTSC, PAL, or SECAM, as appropriate. Converting the information to the appropriate format renders the information suitable for viewing on the conventional television monitor 34.

The viewer can communicate with the graphics computer 30 through the use of the combination of the signal converter 36 and the remote viewer control

- 18 -

unit 38. In many respects, the control unit 38 is similar to conventional remote control units that are commonly used with audio-visual equipment. However, the control unit 38 includes buttons that are used in
5 connection with the interactive interface of the present invention, as described below.

Preferably, the control unit 38 transmits infrared signals to the signal converter 36 in response to commands entered by the viewer. The signal
10 converter 36 receives the infrared signals and converts them to electrical signals suitable for transmission to the graphics computer 30. In a preferred embodiment, the signal converter 36 is an 8600 Converter available from Scientific-Atlanta, Inc., located in Atlanta,
15 Georgia.

The graphics computer 30 is programmed to provide an interactive interface that is intended to facilitate the viewer's selection of a video program. The interactive interface facilitates the viewer's
20 program selection by organizing the programs available for selection into a convenient menu, and by providing the viewer with helpful selection aids, including still images, short segment previews, and textual descriptions of the available programs. The
25 interactive interface may be understood by reference to the screen examples shown in FIGS. 6-8.

The interactive interface preferably operates in three modes -- a list mode, a preview mode, and an information mode. FIG. 6 depicts a list mode screen
30 that appears on the television monitor 34 when the interactive interface is operating in the list mode. The list mode screen 40 is preferably the first screen displayed after the viewer logs into the interactive interface.

- 19 -

In the center of the list mode screen 40 is a display window 42. In the list mode, the display window 42 is preferably divided into a menu window 44 (on the left side) and a still image window 46 (on the right side). The menu window 44 displays a list of video programs that are available for viewer selection. The list of video programs is transmitted from the telecasting facility 12 (FIG. 1) to the viewing station 14 (FIG. 1) that the viewer is using.

At any given time, one of the video programs in the menu window 44 is highlighted by an active program bar 48. When the list mode screen 40 first appears after start-up, the active program bar 48 highlights the first program in the list. The video program highlighted by the active program bar 48 is deemed the "active program."

The interactive interface provides several program selection tools that may be used by the viewer to learn more about the active program. One such tool requires no viewer interaction -- a still image of the active program automatically appears in the still image window 46. The still image may aid the viewer in identifying or remembering the subject matter of the active program. Data files used to display the still images corresponding to each available video program are transmitted to the viewing station 14 (FIG. 1) being used along with the list of video programs.

In order to simplify the program selection process, the available video programs are organized into categories, as described above in connection with FIG. 3. Only the programs in an "active category" appear in the menu window 44 at any given time. The name of the active category appears in the center of a category selection bar 50 which is displayed above the display window 42. When the list mode screen 40 is

- 20 -

first displayed after start-up, the first category in a sequence of available categories is the active category. The list of categories is transmitted to the viewing station 14 (FIG. 1) being used along with the
5 list of available video programs.

The category selection bar 50 also includes two actuators that are used to change the active category -- a previous category actuator 52 and a next category actuator 54. In general, the various
10 actuators described below in connection with the screens shown in FIGS. 6-8 preferably correspond to buttons on the control unit 38 (FIG. 5). In order to activate a particular actuator, the viewer simply presses the corresponding button on the control unit 38
15 (FIG. 5). Alternatively, the control unit 38 (FIG. 5) may include a highlighting device for activating some or all of the various actuators. It should be understood that the labels which appear in FIGS. 6-8 to denote the various actuators may be modified without
20 departing from the spirit of the invention.

The previous category actuator 52 is used by the viewer to change the active category to the preceding category in the sequence of categories. The next category actuator 54 is used to advance the active
25 category to the next category in the sequence. When either the previous category actuator 52 or the next category actuator 54 is used, the category name displayed in the center of the category selection bar 50, and the list of programs displayed in the menu
30 window 44, change accordingly. Both the previous category actuator 52 and the next category actuator 54 conveniently display the name of the category that will be the active category if the corresponding actuator is activated. Preferably, the category actuators operate
35 in an endless loop fashion.

- 21 -

Along the left side of the display window 42 is a program selection bar 56. The program selection bar 56 includes two actuators for changing the active program -- a previous program actuator 58 and a next program actuator 60. The previous program actuator 58 and the next program actuator 60 operate in a manner similar to that of the previous category actuator 52 and the next category actuator 54. Specifically, the viewer can move backward and forward in the list of programs displayed in the menu window 44 through the use of the previous program actuator 58 and the next program actuator 60.

Typically, only a subset of the programs in the active category can be displayed in the menu window 44 at any given time. To view other program titles, the viewer may use the previous program actuator 58 and the next program actuator 60 to cause the displayed list of programs to scroll backward and forward, respectively, through the complete list of programs within the active category. The previous program actuator 58 and the next program actuator 60 preferably operate in an endless loop fashion.

Preferably, the interactive interface stores a pointer to the most recently active program in each category. Thus, if the viewer leaves a first category to scan programs in a second category, and then returns to the first category, the active program will be the program that was active when the viewer left the first category. The viewer therefore does not need to re-scan the programs in the first category to locate the most recently considered program in that category.

A selection actuator 62 (labeled "SELECT") may be used by the viewer to select the active program (as indicated by the active program bar 48) for viewing. When the selection actuator 62 is activated,

- 22 -

the list mode screen 40 disappears and the full-length video program that was selected by the viewer begins. After the program has completed, the list mode screen 40 returns to allow the viewer to make another
5 selection.

In some situations, the still image from the active program that appears in the still image window 42 may not provide enough information for the viewer to make a program selection. The interactive
10 interface thus offers the preview mode and the information mode to provide the viewer with even more information to facilitate program selection.

The different operational modes of the interactive interface are selected by the viewer
15 through the use of three actuators in a mode selection bar 64. On the left side of the mode selection bar 64 is a list mode actuator 66 (labeled "A LIST"). When the list mode screen 40 is displayed, the list mode actuator 66 is preferably highlighted to show that the
20 list mode is the current mode of operation. The list mode actuator 66 is active only when the interactive interface is operating in either the preview mode or the information mode. Any depressions of the button on the control unit 38 (FIG. 5) corresponding to the list
25 mode actuator 66 have no effect on the operational mode when the list mode actuator 66 is highlighted.

A preview mode actuator 68 (labeled "B PREVU") is positioned in the center of the mode selection bar 64. The preview mode actuator 68 may be
30 used by the viewer to cause the interactive interface to switch to the preview mode. As described below in connection with FIG. 7, the preview mode is used to provide the viewer with a full-motion preview of the active program.

- 23 -

An information mode actuator 70 (labeled "C MORE") appears on the right side of the mode selection bar 64. The information mode actuator 70 may be used by the viewer to cause the interactive
5 interface to switch to the information mode. As described below in connection with FIG. 8, the information mode is used to provide the viewer with a textual description of the active program. Preferably, the graphics computer 30 (FIG. 5) causes the monitor 34
10 (FIG. 5) to play background music while the information mode is active. Background music may also be provided during the list mode.

When the viewer activates the preview mode actuator 68, a preview mode screen 72 is displayed, as
15 shown in FIG. 7. In the preview mode, the display window 42 serves a single large window for displaying a full-motion preview of the active program (i.e., the program that was highlighted by the active program bar 48 in the list mode shown in FIG. 6). Preferably,
20 the full-motion preview lasts for about 30 seconds, and includes video and audio components. The title of the active program appears in the lower portion of the display window 42.

The preview mode screen 72 also includes the
25 category selection bar 50, the program selection bar 56, and the mode selection bar 64. It should be noted that the preview mode actuator 68 becomes inactive while the interactive interface is operating in the preview mode, and accordingly, the preview mode
30 actuator is highlighted on the preview mode screen 72. However, the other actuators described above in connection with the various selection bars, as well as the selection actuator 62, remain active during the full-motion preview.

- 24 -

Through the use of the above-described actuators, the viewer can perform the functions described above in connection with the list mode screen 40 (FIG. 6). For example, the viewer can use
5 the previous category actuator 52 and the next category actuator 54 to change the active category. Also, the viewer can use the previous program actuator 58 and the next program actuator 60 to change the active program within the active category. When the viewer makes such
10 changes, the full-motion preview being displayed in the display window 42 changes accordingly. This allows the viewer to rapidly scan through several full-motion previews without having to return to the list mode screen 40 (FIG. 6).

15 The list mode actuator 66 may be used to return to list mode if the viewer desires to review the list of available programs in a menu-based format. If the viewer changed the active program or active category while in the preview mode, the changes are
20 "remembered" by the interactive interface, and the active program bar 48 (FIG. 6) in the list mode appears on the program title that corresponds to the program most recently made active during the preview mode.

The selection actuator 62 may also be used
25 from the preview mode screen 72 to begin a full-length presentation of the active program.

The interactive interface is preferably programmed to take one of four courses of action if the viewer does not use one of the available actuators on
30 the preview mode screen 72 before the end of the full-motion preview. In one embodiment, the interactive interface enters a waiting state where it simply waits until the viewer activates one of the various actuators. In another embodiment, the interactive
35 interface returns to the list mode to allow the viewer

- 25 -

to consider other programs. In still another embodiment, the interactive interface returns to the mode it was in when the viewer initiated a preview. In yet another embodiment, the interactive interface
5 begins a full-motion preview of the next program in the active category. If the active program is the last in the sequence of programs within the active category, the interactive interface preferably cycles to the first program in the active category. If the fourth
10 embodiment is adopted, the automatic cycling of programs during the preview mode preferably results in a corresponding change in the active program, such that the last program previewed at the time one of the actuators is activated becomes the active program.

15 From either the list mode screen 40 (FIG. 6) or the preview mode screen 72, the viewer may use the information mode actuator 70 (labeled "C MORE") to switch to an information mode screen 74, which is shown in FIG. 8. While in the information mode, the display
20 window 42 displays textual information pertaining to the actual program. Such information may include, for example, the title of the program, the length of the program, the program's cast, and the director of the program. Of course, this information can be varied in
25 accordance with the type of program being considered.

All of the actuators described above are available for use from the information mode screen 74, with the exception of the information mode actuator 70, which is highlighted. Thus, the viewer can freely
30 change the active program or the active category from the information mode screen 74. Also, the viewer can switch to either the list mode or the preview mode using the appropriate actuator from the mode selection bar 64. The selection actuator 62 may also be used

- 26 -

from the information mode screen 74 to begin a full-length presentation of the active program.

As can be seen from the screen examples of FIGS. 6-8, the interactive interface allows the viewer to efficiently acquire information about many available video programs. For example, after designating a particular program as the active program in the list mode screen 40, the viewer can quickly evaluate a still image of the program in the still image window 46. If more information is needed, the viewer can rapidly switch to either the preview mode or the information mode using the appropriate actuators. Further, the active program or active category can be changed in any of the three operational modes, thereby allowing the viewer to consider the same type of information for several different programs in succession. And once the viewer has made a program selection, the selection actuator 62 can be activated from within any of the three modes of operation to begin a full-length presentation of the active program.

Turning now to FIGS. 9A-9H, a series of logic flow diagrams are described which represent a control program that is executed by the graphics computer 30 (FIG. 5). The control program allows the graphics computer 30 (FIG. 5) to provide the interactive interface of the present invention. It also manages communication between the viewing station 14 (FIG. 5) and the telecasting facility 12 (FIG. 2).

Referring first to FIG. 9A, the control program starts when the viewer selects the demand telecasting service of the present invention from a list of interactive applications available on the interactive channel of the telecasting network 10 (FIG. 1). After start-up, the graphics computer 30 (FIG. 5) receives a VIEWER_ID provided by the viewer at

- 27 -

step 100. However, the viewer can choose not to provide a VIEWER_ID at step 100. As explained below, this prevents the viewer from viewing the full-length video programs, but allows the viewer to use the other
5 features of the interactive interface.

It should be understood that the present invention can be practiced without the use of VIEWER_IDS. Indeed, if it is determined that a viewing population would find the task of entering a VIEWER_ID
10 to be cumbersome, it may be preferable to eliminate VIEWER_IDS and any features which require them. For the purposes of the following discussion, it is assumed that the system accommodates VIEWER_IDS. Any
15 modifications required to eliminate VIEWER_IDS would be apparent to one of ordinary skill in the art.

At step 104, the graphics computer 30 (FIG. 5) transmits the VIEWER_ID and a STATION_ID to the telecasting facility 12 (FIG. 2). The STATION_ID is a unique identifier stored in the graphics
20 computer 30 (FIG. 5).

After the telecasting facility 12 (FIG. 2) receives the VIEWER_ID and the STATION_ID, the processing system 22 (FIG. 2) determines if the received information matches an entry in the station
25 table described in connection with FIG. 4. If there is a matching entry, the telecasting facility 12 (FIG. 2) transmits a subscriber confirmation signal, which is received by the graphics computer 30 (FIG. 5) at
step 106. Otherwise, the telecasting facility 12
30 (FIG. 2) transmits a non-subscriber confirmation signal, which is also received at the step 106.

At step 108, the graphics computer 30 (FIG. 5) receives a list of PROGRAM_IDS, PROGRAM_NAMES, and CATEGORIES from the telecasting facility 12
35 (FIG. 2). If a VIEWER_ID was received at step 100, the

- 28 -

list is limited to information pertaining to the programs that the viewer is authorized to view. The processing system 22 (FIG. 2) determines which data are to be transmitted by comparing the CLASSIFICATION data item from the station table (FIG. 4) corresponding to the viewer's VIEWER_ID to the CLASSIFICATION data items in the program table (FIG. 3). This step is useful, for example, for limiting the list of available programs to those that are appropriate for children.

10 If a VIEWER_ID was not received at step 100, the complete list of available video programs is preferably received by the graphics computer 30 (FIG. 5) at step 108.

At step 110, the graphics computer 30 (FIG. 5) sets the active category to the first category in the sequence of categories received at step 108. Then, at step 112, the active program is set to the first program in the sequence of programs within the active category.

20 At step 114, the actuators described in connection with FIGS. 6-8 are displayed on the monitor 34 (FIG. 5). At step 116, the graphics computer 30 (FIG. 5) then displays the active category in the center of the category selection bar 50 (FIGS. 6-8), the previous category in the sequence (which at this time is actually the last category in the sequence) in the previous category actuator 52 (FIGS. 6-8), and the next category in the sequence in the next category actuator 54 (FIGS. 6-8).

30 At step 118, the graphics computer 30 (FIG. 5) calls a list mode routine to establish the initial mode of operation for the interactive interface. The list mode routine is described below in connection with FIG. 9C. However, before turning to the list mode routine, the main program loop of the

35

- 29 -

control program, which responds to the viewer's use of the various actuators, will be described.

The main program loop is shown in FIG. 9B. It includes a series of six tests that are re-executed
5 until the viewer leaves the interactive interface (typically by changing the channel or turning off the viewing station 14 (FIG. 5) using the control unit 38 (FIG. 5)). The six tests are performed to detect when the viewer activates one of the actuators by pressing
10 one of the corresponding buttons on the control unit 38 (FIG. 5).

At test 120, the graphics computer 30 (FIG. 5) determines if the list mode actuator 66 (FIGS. 6-8) was activated. If so, the list mode
15 routine (FIG. 9C) is called at step 122.

At test 124, the graphics computer 30 (FIG. 5) determines if the preview mode actuator 68 (FIGS. 6-8) was activated. A preview mode routine (FIG. 9D) is called if appropriate at step 126.

20 At test 128, the graphics computer 30 (FIG. 5) determines if the information mode actuator 70 (FIGS. 6-8) was activated. An information mode routine (FIG. 9E) is called at step 130 when such an activation is detected.

25 At test 132, the graphics computer 30 (FIG. 5) determines if either the previous category actuator 52 (FIGS. 6-8) or the next category actuator 54 (FIGS. 6-8) was activated. Category changes are handled by a change category routine
30 (FIG. 9F) which is called at step 134.

Similarly, at test 136, the graphics computer 30 (FIG. 5) determines if either the previous program actuator 58 (FIGS. 6-8) or the next program actuator 60 (FIGS. 6-8) was activated. Program changes

- 30 -

are handled by a change program routine (FIG. 9G) which is called at step 138.

Finally, test 140 is performed by the graphics computer 30 (FIG. 5) to determine if the selection actuator 62 (FIGS. 6-8) was activated. Program selections are managed by a selection routine (FIG. 9H) which is called at step 142.

Turning now to FIG. 9C, the list mode routine is described. The list mode routine starts with test 144, where the graphics computer 30 (FIG. 5) determines if the list mode routine is being executed for the first time during the current session of the interactive interface. If so, step 146 is performed to initialize the menu window 44 (FIG. 6). Preferably, the PROGRAM_NAMES of at least the first five programs in the sequence of available programs within the active category are displayed. Since the active program is the first program in the sequence, the active menu bar 48 (FIG. 6) appears on the first displayed PROGRAM_NAME.

If the list mode routine was previously executed during the current session, test 148 is performed to determine if the active program is within the list of PROGRAM_NAMES that was previously displayed in the menu window 44 (FIG. 6). If not, at step 148, the graphics computer 30 (FIG. 5) scrolls the list of PROGRAM_NAMES, either upwardly or downwardly, to an extent that allows the active program bar 48 (FIG. 6) to appear on the PROGRAM_NAME corresponding to the active program.

At step 152, the graphics computer 30 (FIG. 5) transmits the PROGRAM_ID corresponding to the active program to the telecasting facility 12 (FIG. 2). The processing system 22 (FIG. 2) applies the PROGRAM_ID to the program table (FIG. 4) to determine

- 31 -

the name of the data file (STILL_IMAGE) stored in the mass storage system 24 (FIG. 2) that contains the still image data for the active program. The telecasting facility 12 (FIG. 2) then transmits the data file to
5 the graphics computer 30 (FIG. 5), which receives the data at step 154. The graphics computer 30 (FIG. 5) displays the still image in the still image window 46 (FIG. 6) at step 156.

At step 158, the graphics computer 30
10 (FIG. 5) sets the active mode to the list mode. Control then returns to the main program loop of FIG. 9B.

The logic flow diagram for the preview mode routine is shown in FIG. 9D. The preview mode routine
15 starts at step 160, where the graphics computer 30 (FIG. 5) transmits the PROGRAM_ID corresponding to the active program to the telecasting facility 12 (FIG. 2). The processing system 22 (FIG. 2) receives the PROGRAM_ID and applies it to the program table (FIG. 4)
20 to determine the names of the video file (PREVIEW_VIDEO) and the audio file (PREVIEW_AUDIO) stored in the mass storage system 24 (FIG. 2) that contain the data for the full-motion preview for the active program. The processing system 22 (FIG. 2) then
25 transmits the data files to the graphics computer 30 (FIG. 5), which receives the data at step 162.

At step 164, the PROGRAM_NAME of the active program is displayed at the bottom of the display window 42 (FIG. 7). At step 166, the graphics
30 computer 30 (FIG. 5) decompresses the video portion of the data. Then at step 168, graphics computer 30 (FIG. 5) synchronizes the video and the audio portions of the full-motion preview. The synchronized data is provided to the monitor 34 (FIG. 5) for viewing at the

- 32 -

step 170. At step 172, the active mode is set to the preview mode.

Preferably, each full-motion preview lasts about 30 seconds. It should be noted that the
5 interactive interface does not linger in the preview mode routine while the preview is running. Rather, the graphics computer 30 (FIG. 5) exits the preview mode routine to return to the main program loop (FIG. 9B) to allow the viewer to use the various actuators while the
10 preview is running. Thus, the viewer can stop a preview by activating either the list mode actuator 66 (FIG. 7), the information mode actuator 70 (FIG. 7) or the selection actuator 62 (FIG. 7).

It should also be noted that several possible
15 courses of action may be taken by the graphics computer 30 (FIG. 5) when a full-motion preview ends. In one embodiment, the graphics computer 30 (FIG. 5) enters a waiting state within the main program loop (FIG. 9B) until the viewer activates one of the various
20 actuators. In another embodiment (not shown), the graphics computer 30 (FIG. 5) resets the interactive interface to the list mode, so that viewer can consider other programs. In still another embodiment (not
25 shown), the graphics computer 30 (FIG. 5) resets the interactive interface to the mode it was in (either the list mode or the information mode) when the user initiated a preview. In yet another embodiment (not
shown), the graphics computer 30 (FIG. 5) cycles
30 through full-motion previews of the programs within the active category until the viewer activates one of the various actuators. The particular programming steps required for the second, third, and fourth embodiments can be easily implemented by one of ordinary skill in the art.

- 33 -

Turning now to FIG. 9E, the information mode routine is described. The information mode routine begins at step 174, where the graphics computer 30 (FIG. 5) transmits the PROGRAM_ID corresponding to the
5 active program to the telecasting facility 12 (FIG. 2). The processing system 22 (FIG. 2) receives the PROGRAM_ID and applies it to the program table (FIG. 4) to extract the DESCRIPTION data item corresponding to the active program. The processing system 22 (FIG. 2)
10 then transmits the DESCRIPTION to the graphics computer 30 (FIG. 5), which receives the data at step 176.

At step 178, the graphics computer 30 (FIG. 5) displays the PROGRAM_NAME and the DESCRIPTION
15 corresponding to the active program in the display window 42 (FIG. 8). The active mode is set to the information mode at step 180, and control then returns to the main program loop (FIG. 9B).

The change category routine is shown in
20 FIG. 9F. The change category routine is executed whenever the viewer actuates either the previous category actuator 52 (FIGS. 6-8) or the next category actuator 54 (FIGS. 6-8).

At test 182, the graphics computer 30
25 (FIG. 5) determines which of the two category actuators was activated. If the previous category actuator 52 (FIGS. 6-8) was activated, the active category is set to the previous category in the sequence at step 184. The active category may be set to the last category in
30 the sequence if the actuator 52 (FIGS. 6-8) is activated while the first category in the sequence is active. If the next category actuator 54 (FIGS. 6-8) was activated, the active category is set to the next category in the sequence at step 186. The active
35 category may be set to the first category in the

- 34 -

sequence if the actuator 54 (FIGS. 6-8) is activated while the last category in the sequence is active. At step 188, the graphics computer 30 (FIG. 5) displays the active, previous, and next categories in the category selection bar 50, as described above in connection with FIGS. 6-8.

At test 190, the graphics computer 30 (FIG. 5) determines whether the category made active at either step 184 or step 186 was ever previously active during the current session. If so, the active program is set to the program that was last active within the active category at step 192. Otherwise, the active program is set to the first program in the sequence of programs within the active category. Test 190 advantageously allows the viewer to quickly return to the most recently considered program within a particular category -- without having to re-scan the program list.

Tests 196, 200, and 204 are used by the graphics computer 30 (FIG. 5) to determine the mode that the interactive interface was operating in at the time one of the category actuators was activated. If it is determined at test 196 that the list mode is the active mode, the list mode routine is called at step 198. If it is determined at test 200 that the preview mode is the active mode, the preview mode routine is called at step 202. Or if it is determined at test 204 that the information mode is the active mode, the information mode routine is called at step 206. This sequence of tests and steps causes the interactive interface to return to the active mode and provide the viewer with information corresponding to the new active program.

The change program routine is shown in FIG. 9G. The change program routine is executed

- 35 -

whenever the viewer actuates either the previous program actuator 58 (FIGS. 6-8) or the next program actuator 60 (FIGS. 6-8).

At test 208, the graphics computer 30 (FIG. 5) determines which of the two program actuators was activated. If the previous program actuator 58 (FIGS. 6-8) was activated, the active program is set to the previous program in the sequence at step 212. The active program may be set to the last program in the sequence if the actuator 58 (FIGS. 6-8) is activated while the first program in the sequence is active. If the next program actuator 60 (FIGS. 6-8) was activated, the active program is set to the next program in the sequence at step 216. The active program may be set to the first program in the sequence if the actuator 60 (FIGS. 6-8) is activated while the last program in the sequence is active.

Tests 218, 222, and 226, and steps 220, 224, and 228 are executed by the graphics computer 30 (FIG. 5) to cause the interactive interface to return to the active mode and provide the viewer with information corresponding to the new active program, as described above in connection with FIG. 9F. Control then returns to the main program loop.

The selection routine, shown in FIG. 9H, is called when the viewer activates the selection actuator 62 (FIGS. 6-8) to view the active program. At test 230, the graphics computer 30 validates the subscriber confirmation data previously transmitted by the telecasting facility 12 (FIG. 2) to determine if the viewing station 14 (FIG. 5) is a subscribing viewing station. If it is, test 232 is performed to determine if the viewer provided a valid VIEWER_ID during the login procedure. If the VIEWER_ID is invalid, control returns to the main program loop. The

- 36 -

viewer is thus prevented from viewing the full-length video program unless a valid VIEWER_ID is provided.

If a valid VIEWER_ID was provided, the graphics computer 30 (FIG. 5) transmits the PROGRAM_ID
5 corresponding to the active program to the telecasting facility 12 (FIG. 2) at step 234. The processing system 22 (FIG. 2) receives the PROGRAM_ID and applies it to the program table (FIG. 4) to determine the location of the active program. If the FULL_VIDEO data
10 item indicates that the video program needs to be retrieved from the tape storage unit of the tape drive system 26 (FIG. 2), the processing system 22 (FIG. 2) causes the tape drive system 26 (FIG. 2) to retrieve the appropriate tape and transfer the data to the mass
15 storage system 24 (FIG. 2). Otherwise, the processing system 22 (FIG. 2) uses the FULL_VIDEO and FULL_AUDIO data items to locate the appropriate data files in the mass storage system 24 (FIG. 2). The processing system 22 (FIG. 2) then begins to transmit the data to
20 the graphics computer 30 (FIG. 5) (preferably in packets, as described above), which in turn receives the data at step 236.

At step 238, the graphics computer 30 (FIG. 5) decompresses the video portion of the data.
25 Then at step 240, the graphics computer 30 (FIG. 5) synchronizes the audio and video portions of the data. The synchronized data is provided to the monitor 34 (FIG. 5) for viewing at step 242. It should be noted that the full-length program may last several hours.
30 Accordingly, steps 236, 238, 240, and 242 are repeated as often as necessary to process the large number of data packets that are transmitted from the telecasting facility 12 (FIG. 2) in connection with the presentation of the full-length program.

- 37 -

When the full-length program has completed, the list mode routine is called at step 244. Control then returns to the main program loop (FIG. 9B), so that the viewer can use the interactive interface to
5 consider additional video programs for viewing.

If it is determined at test 230 that the viewing station is not a subscribing viewing station, the graphics computer 30 (FIG. 5) displays a message informing the viewer that only subscribing viewing
10 stations can receive full-length video programs. The graphics computer 30 (FIG. 5) may provide the viewer with subscription information (such as a program schedule, listing of features, etc.) at step 246. Then at step 248, the viewer may be provided with an
15 opportunity to interactively subscribe to the demand telecasting service. Preferably, if interactive subscribing is provided, the viewer is prompted to confirm a new subscription by pressing the button on the control unit 38 (FIG. 5) that corresponds to the
20 selection actuator 62 (FIGS. 6-8). If the viewer presses any other button on the control unit 38 (FIG. 5), it is interpreted as a refusal.

At test 250, the graphics computer 30 (FIG. 5) determines whether the viewer accepted or
25 refused a subscription. If the subscription was refused, control returns to the main program loop (FIG. 9B). Otherwise, the graphics computer 30 (FIG. 5) preferably assigns a temporary VIEWER_ID to the viewer so that the viewer can view full-length
30 programs (as described above in connection with steps 234, 236, 238, 240, and 242) until the subscription is confirmed. It is contemplated that new subscriptions will be confirmed by mail, telephone, or other suitable means.

- 38 -

Thus a telecasting service is provided that offers video programs upon viewer demand, and which includes an interactive interface for facilitating viewer selection of video programs. One skilled in the
5 art will appreciate that the present invention can be practiced by other than the described embodiments, which are presented for purposes of illustration and not of limitation, and the present invention is limited only by the claims which follow.

- 39 -

WHAT IS CLAIMED IS:

1. For use in an interactive telecasting system for telecasting programming to a viewer, wherein the viewer can select from among a plurality of programs to be telecast substantially at the time of viewer selection for viewing on a display, a program selection system for allowing said viewer to make said viewer selection, said program selection system comprising:

memory for storing (1) a list of programs available for selection, and (2) a respective segment of each of said programs in said list;

a display generator for displaying on said display (1) said list and (2) representations of viewer actuators for manipulating said list and selecting a program from said list;

a viewer control unit for engaging at viewer command a desired one of said actuators; wherein:

at least a first one of said actuators selects one of said programs from said list;

a second one of said actuators causes said selected one of said programs to be displayed; and

a third one of said actuators causes one of said segments, corresponding to said selected one of said programs, to be displayed; whereby:

after selecting one of said programs from said list using said first actuator, and before causing said selected one of said programs to be displayed using said second actuator, a viewer can preview said selected one of said programs by using said third actuator to cause said one of said segments, corresponding to said selected one of said programs, to be displayed.

- 40 -

2. The program selection system of claim 1 wherein:

said memory further stores a respective still image representative of each of said programs; and

after selection of said selected one of said programs, and before actuation of one of said second and third actuators for display of one of (a) said selected one of said programs and (b) said segment corresponding to said selected one of said programs, said display generator displays on said display one of said still images representative of said selected one of said programs.

3. For use in an interactive telecasting system for telecasting programming to a plurality of viewers, wherein:

each of said viewers is identified by an identifier, and

a subscribing viewer can select from among a plurality of programs to be telecast substantially at the time of viewer selection for viewing on a display, a program selection system comprising:

memory for storing (1) a list of programs available for selection, (2) a segment of each of said programs in said list, and (3) a list of identifiers corresponding to subscribing viewers;

a display generator for displaying said list on said display;

a viewer control unit for:

(a) selecting one of said programs from said list,

(b) initiating display of said selected one of said programs,

- 41 -

(c) initiating display of one of said segments, corresponding to said selected one of said programs, and

(d) transmitting an identifier corresponding to a viewer using said control unit; and a validator for comparing said transmitted identifier to said list of identifiers identifying said subscribing viewers and for preventing display of said selected one of said programs when said transmitted identifier fails to match any identifier on said list of identifiers; whereby:

after selecting one of said programs from said list, any viewer can preview said selected one of said programs by initiating display of said one of said segments, corresponding to said selected one of said programs, but only a subscribing viewer can initiate display of said selected one of said programs.

4. The program selection system of claim 3 wherein said validator generates a reject signal when said viewer is not a subscribing viewer, said system further comprising an interceptor for displaying a first message on said display, responsive to said reject signal, for informing said viewer that only a subscribing viewer can initiate display of said selected one of said programs.

5. The program selection system of claim 4 wherein:

said interceptor further displays a second message on said display instructing said viewer to actuate said viewer control unit to become a subscribing viewer; and

when said viewer control unit is actuated according to said second message, said viewer

- 42 -

control unit transmits a subscription signal and an identifier corresponding to said viewer; said interactive interface further comprising:

a subscription processor for receiving said subscription signal and said identifier corresponding to said viewer and adding said identifier to said list of identifiers identifying said subscribing viewers.

6. For use in an interactive telecasting system for telecasting programming to a viewer, wherein:

each of said viewers is identified by an identifier, and

a subscribing viewer can select from among a plurality of programs to be telecast substantially at the time of viewer selection for viewing on a display, a program selection system comprising:

memory for storing (1) a list of programs available for selection, (2) a respective segment of each of said programs in said list, and (3) a list of identifiers corresponding to subscribing viewers;

a display generator for displaying on said display (1) said list of programs and (2) representations of viewer actuators for manipulating said list and selecting a program from said list;

a viewer control unit for engaging at viewer command a desired one of said actuators and for transmitting an identifier corresponding to a viewer using said control unit; and

a validator for comparing said transmitted identifier to said list of identifiers

- 43 -

identifying said subscribing viewers and for preventing display of said selected one of said programs when said transmitted identifier fails to match any identifier on said list of identifiers; wherein:

at least a first one of said actuators selects one of said programs from said list;

a second one of said actuators causes said selected one of said programs to be displayed when said validator determines that said transmitted identifier matches an identifier on said list of identifiers; and

a third one of said actuators causes one of said segments, corresponding to said selected one of said programs, to be displayed; whereby:

after selecting one of said programs from said list using said first actuator, any viewer can preview said selected one of said programs by initiating display of said one of said segments corresponding to said selected one of said programs using said third actuator, but only a subscribing viewer can initiate display of said selected one of said programs using said second actuator.

7. The program selection system of claim 6 wherein said validator generates a reject signal when a viewer who is not a subscribing viewer actuates said second actuator, said system further comprising an interceptor for displaying a first message on said display, responsive to said reject signal, for informing said viewer that only a subscribing viewer can initiate display of said selected one of said programs.

8. The program selection system of claim 7 wherein:

- 44 -

said interceptor further displays a second message on said display instructing said viewer to again actuate said second actuator to become a subscribing viewer; and

when said second actuator is again actuated, said viewer control unit transmits a subscription signal and an identifier corresponding to said viewer; said interactive interface further comprising:

a subscription processor for receiving said subscription signal and said identifier corresponding to said viewer and adding said identifier to said list of identifiers identifying said subscribing viewers.

9. For use in an interactive telecasting system for telecasting programming to a viewer, wherein the viewer can select from among a plurality of programs to be telecast substantially at the time of viewer selection for viewing on a display, a program selection system for allowing said viewer to make said viewer selection, said program selection system comprising:

memory for storing (1) a list of programs available for selection, and (2) a segment of each of said programs in said list;

a display generator for displaying on said display, at any one time, one of:

- (1) said list,
- (2) a selected one of said segments, and
- (3) a selected one of said programs;

a viewer control unit for:

(a) selecting a list display mode for displaying said list,


- 45 -

(b) when said list is displayed,
selecting one of said programs from said list,
(c) selecting a program display mode for
displaying said selected one of said programs,
(d) selecting a preview mode for
displaying one of said segments, corresponding to said
selected one of said programs,
(e) moving among said programs within
any one of said list mode and said preview mode; and
(f) moving among said list display mode,
said program display mode and said preview mode;
whereby:

a viewer in preview mode, displaying one
of said segments corresponding to one of said programs,
can perform a function selected from the group
consisting of:


(a) moving to list mode,
(b) sequentially displaying additional
ones of said segments corresponding to said programs,
and
(c) displaying a program corresponding
to whichever one of said segments is being displayed.

1/16

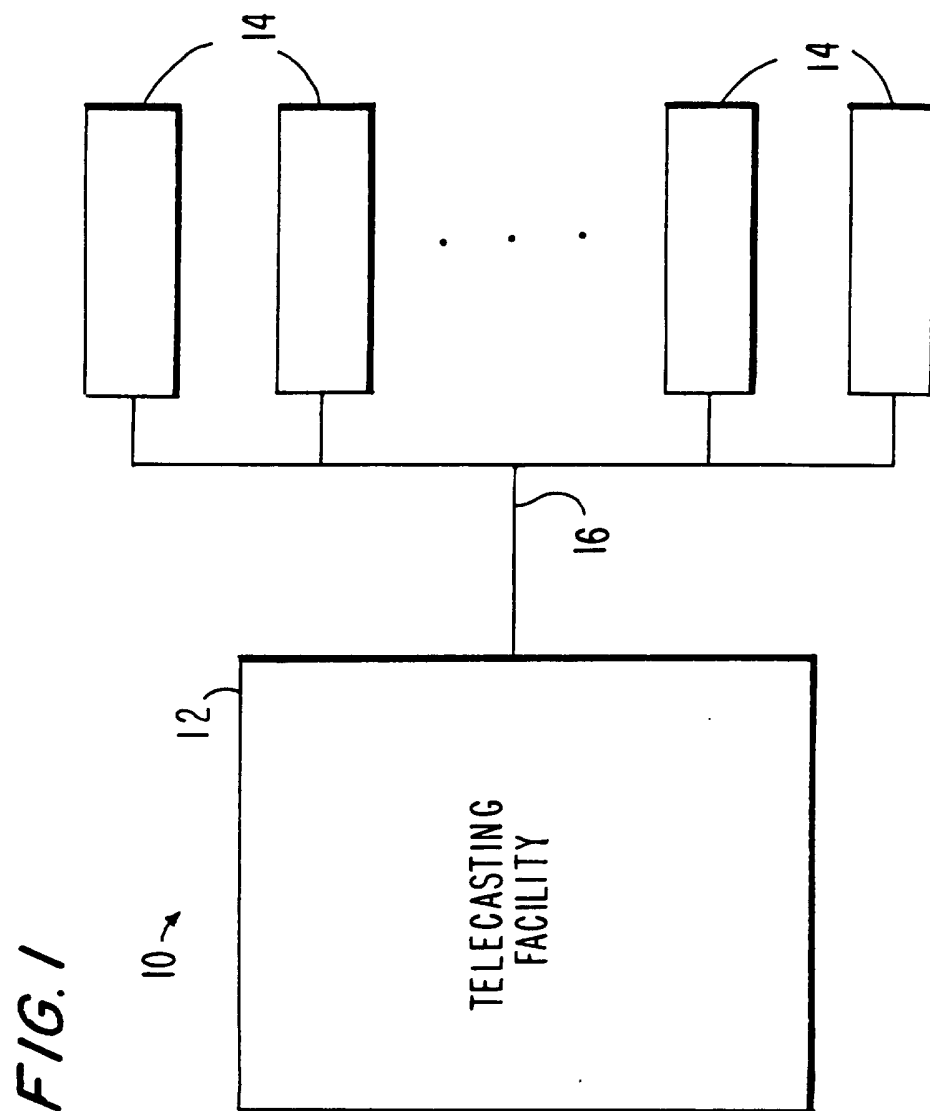

2/16

FIG. 2

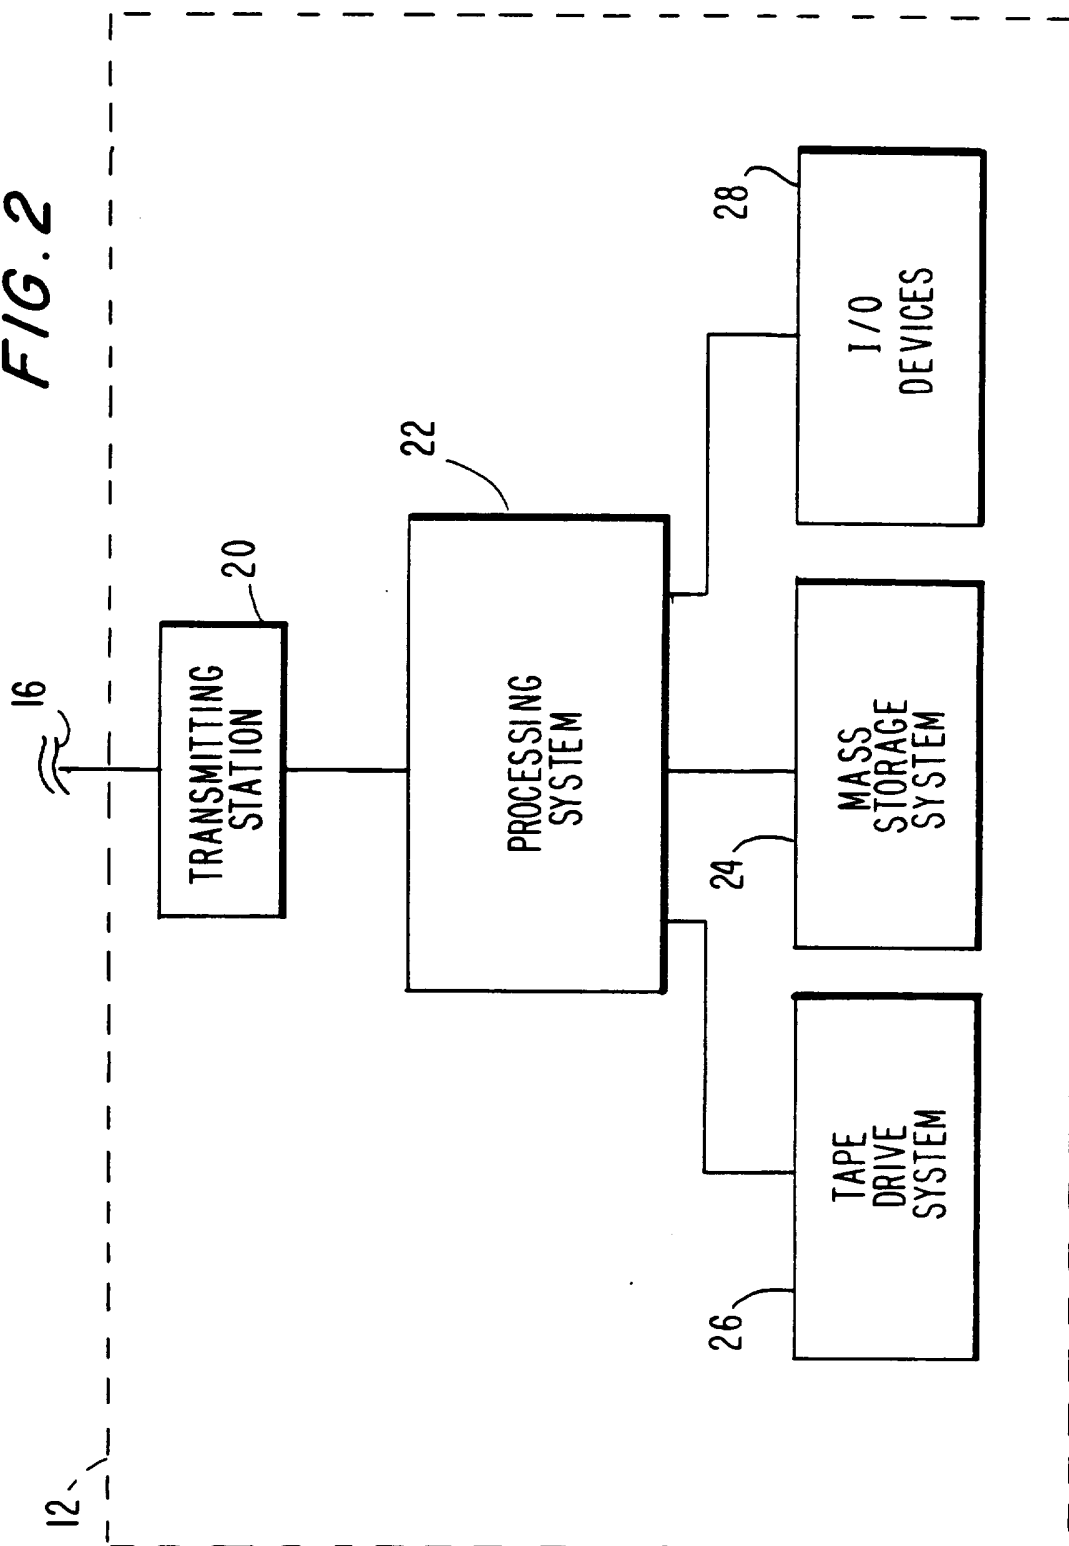

3/16

FIG. 3

PROGRAM_ID
PROGRAM_NAME
CATEGORY
CLASSIFICATION
DESCRIPTION
STILL_IMAGE
PREVIEW_VIDEO
PREVIEW_AUDIO
FULL_VIDEO
FULL_AUDIO

4/16

FIG. 4

STATION_ID
VIEWER_ID
CLASSIFICATION

5/16

FIG. 5



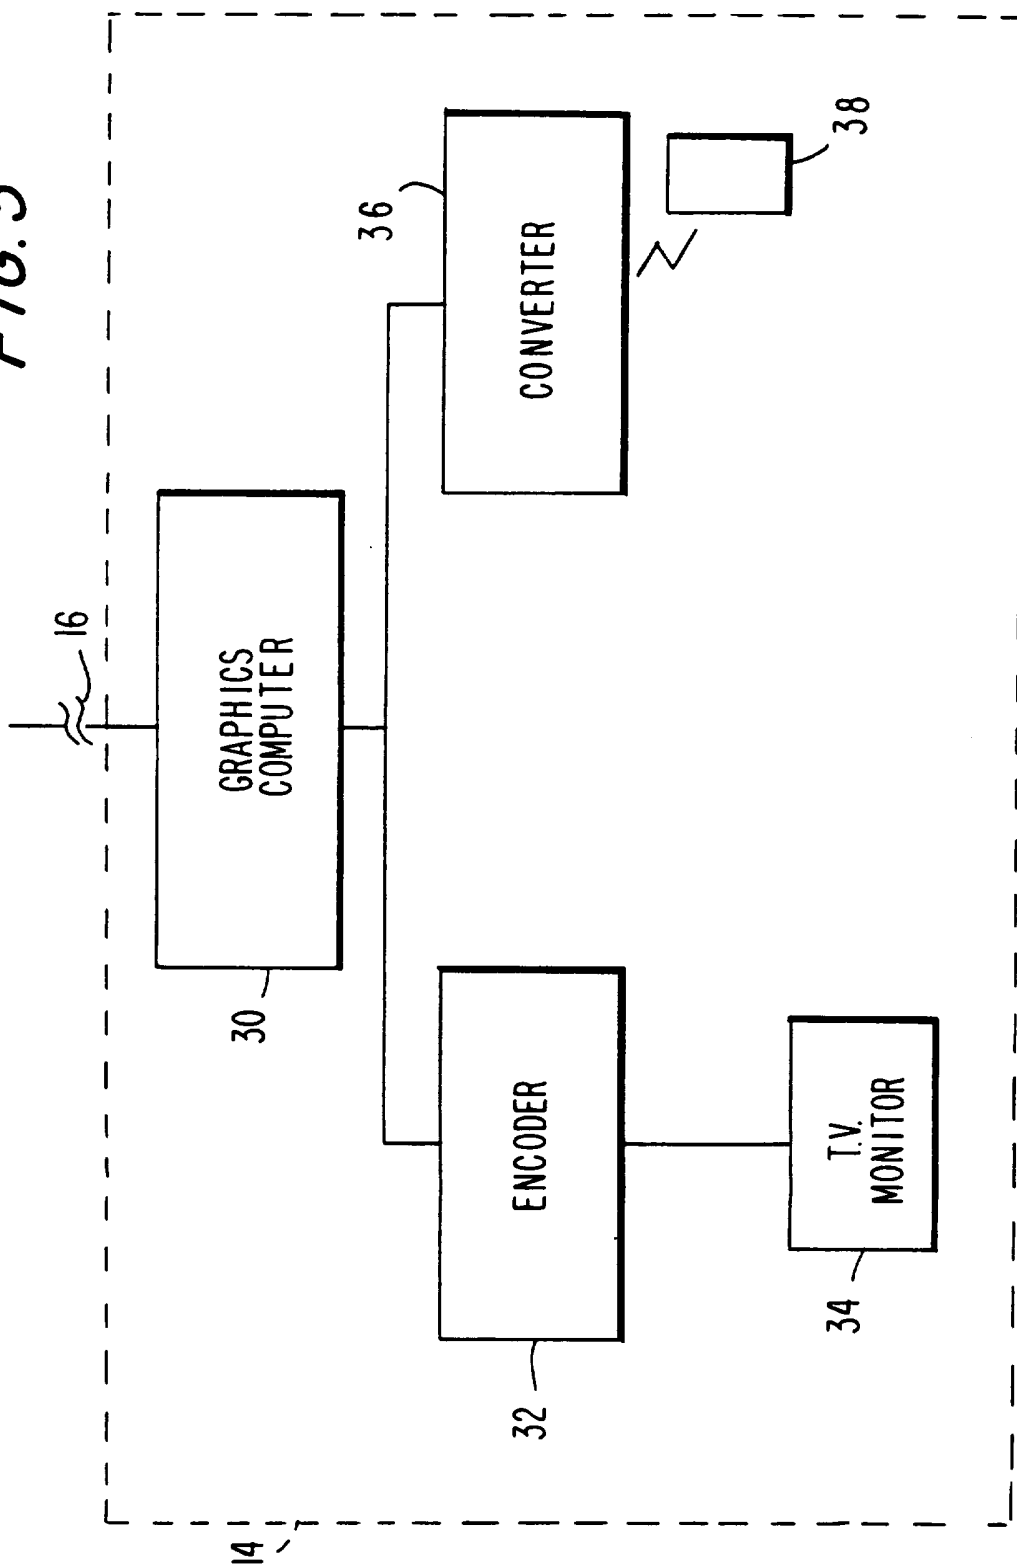


FIG. 6

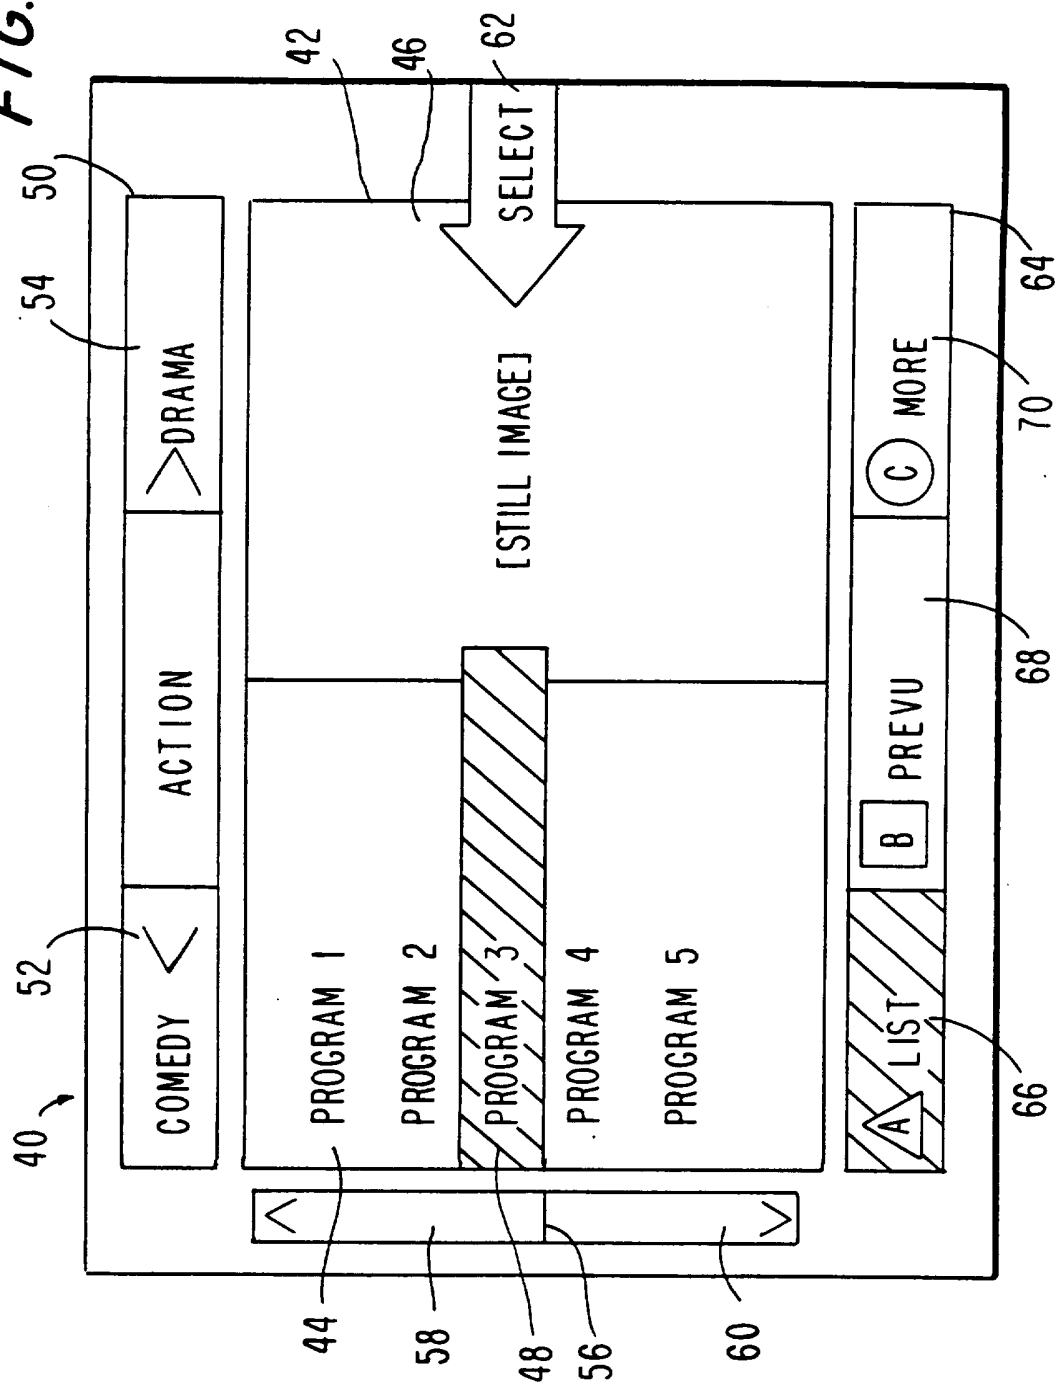


7/16

FIG. 7

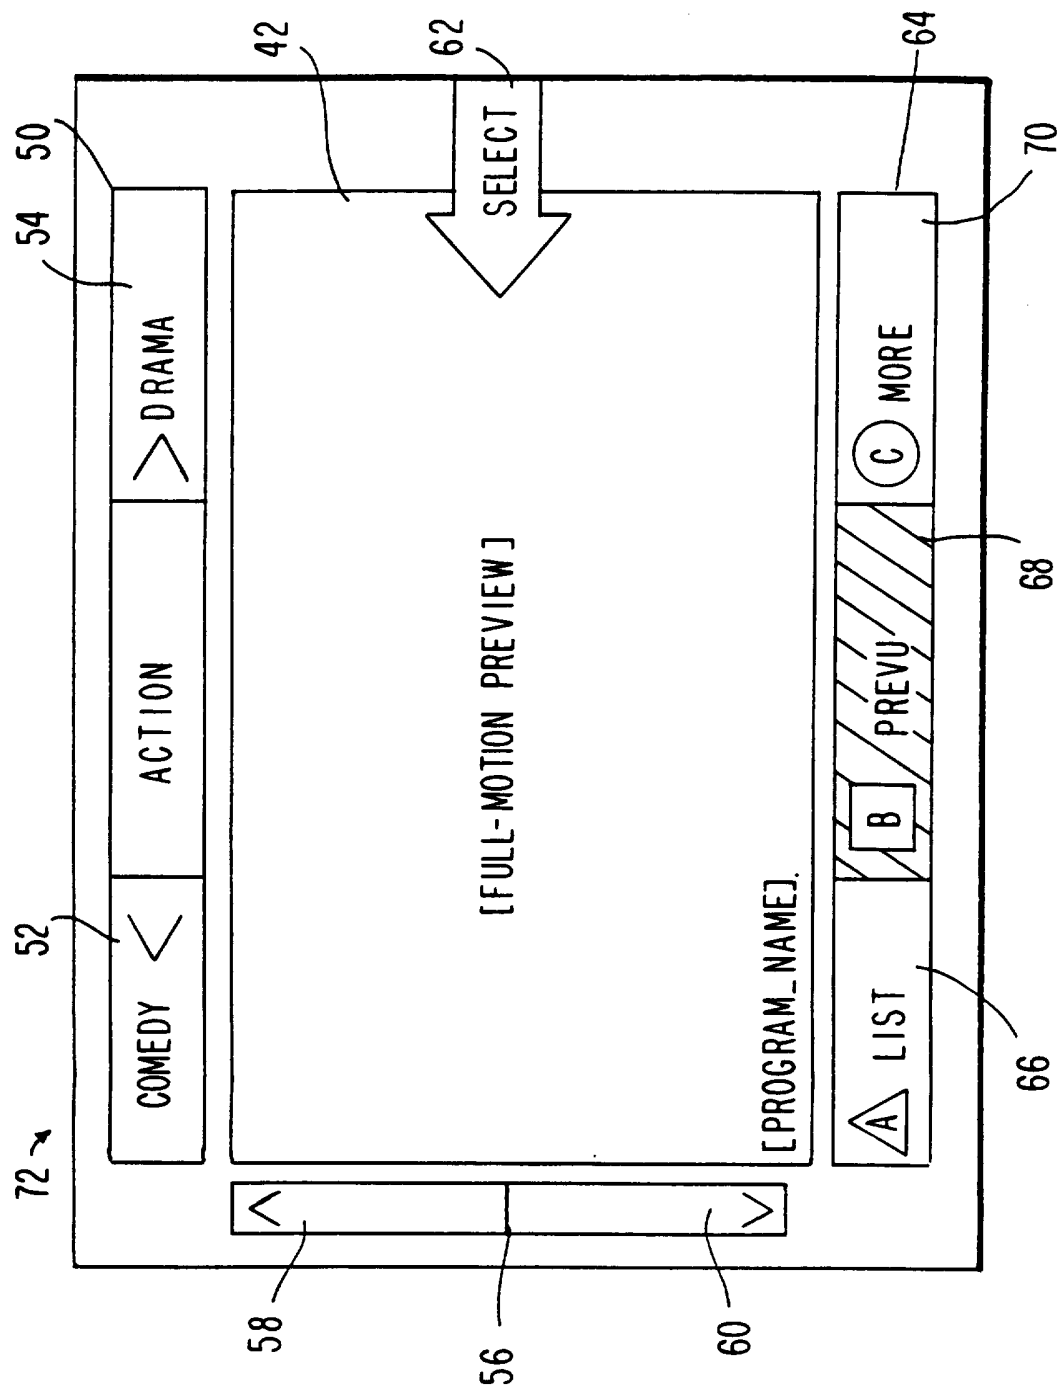

8/16

FIG. 8

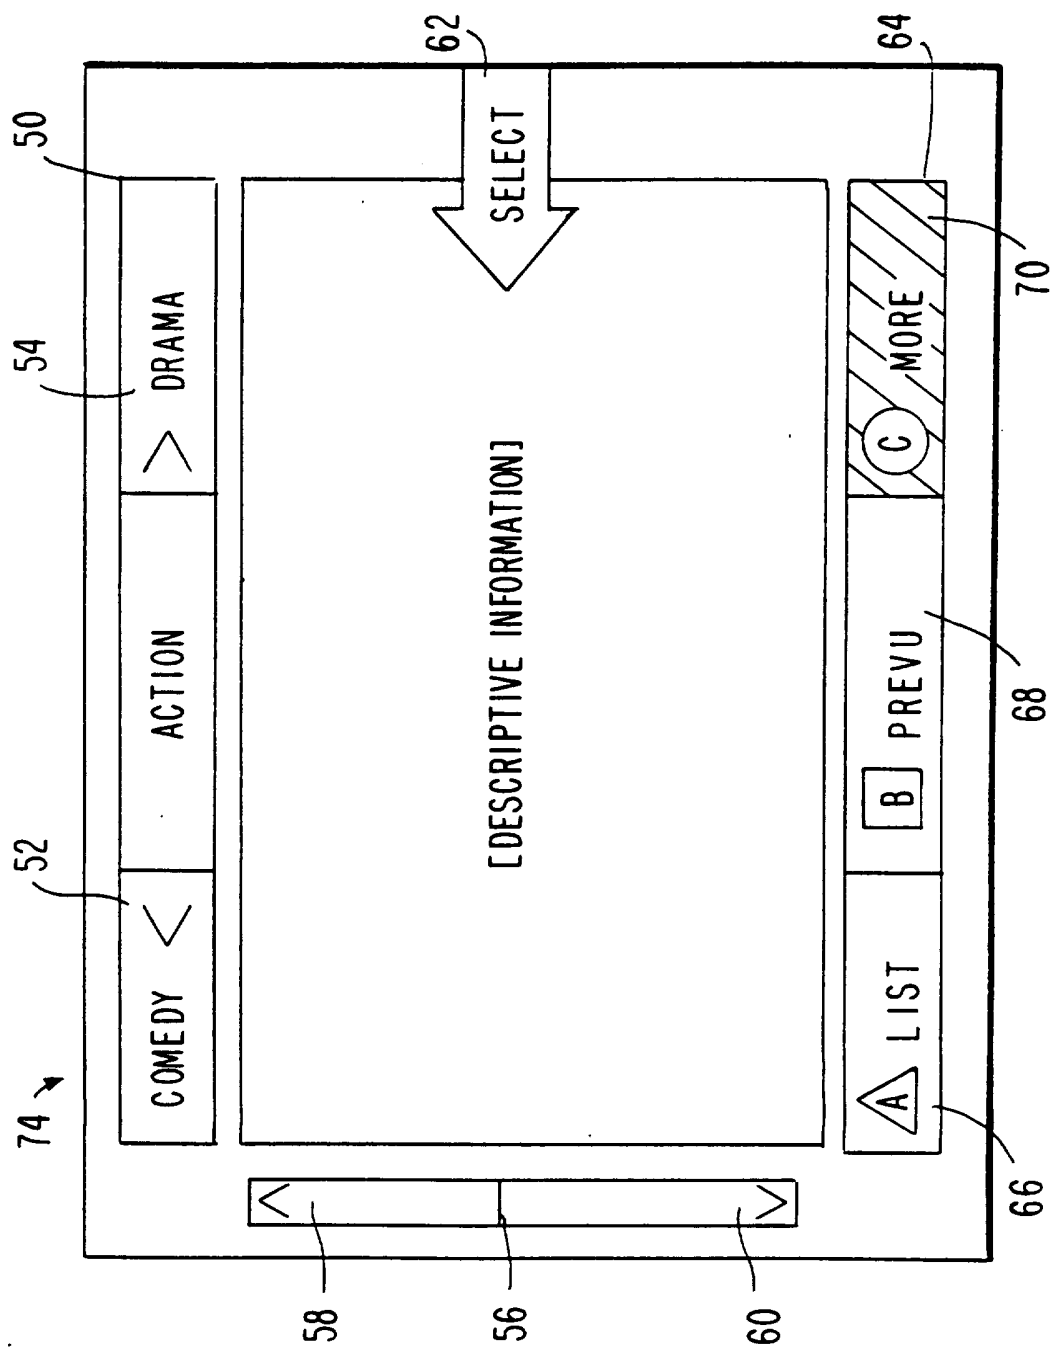


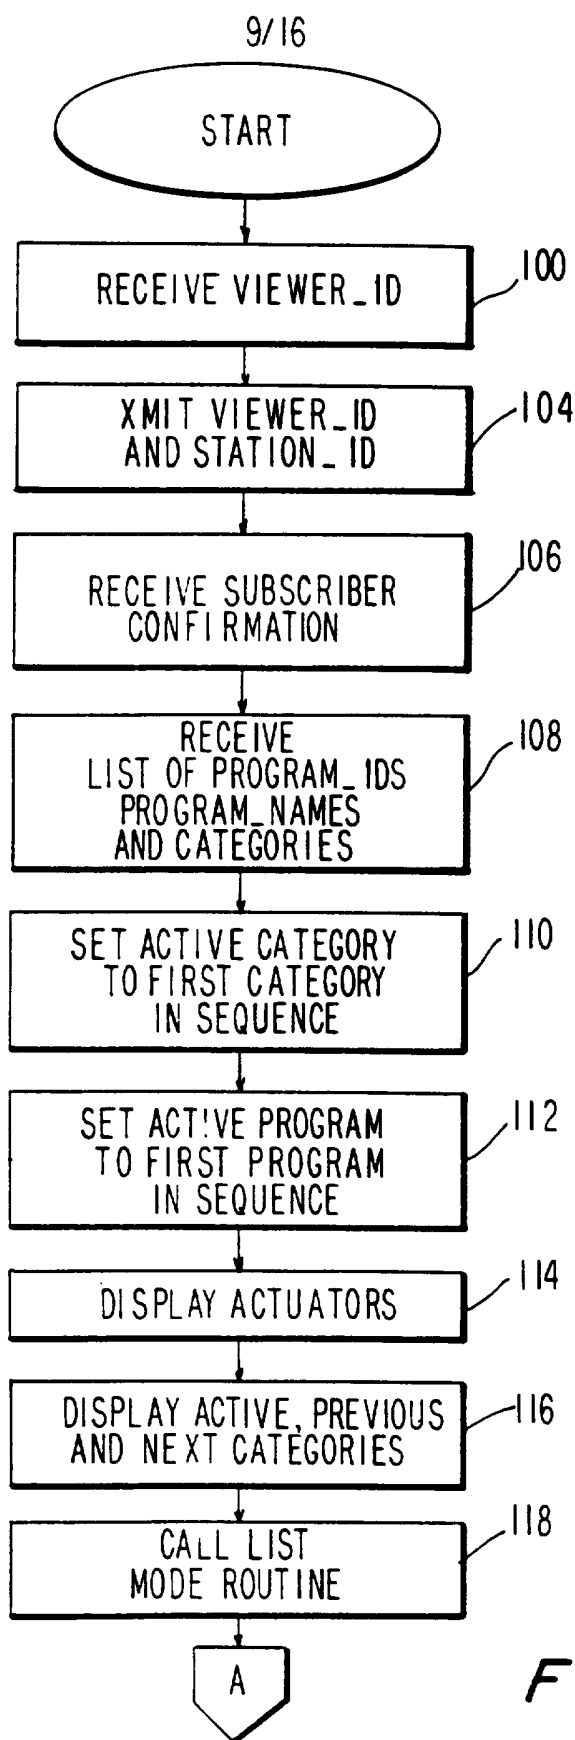


FIG. 9A


10/16

FIG. 9B

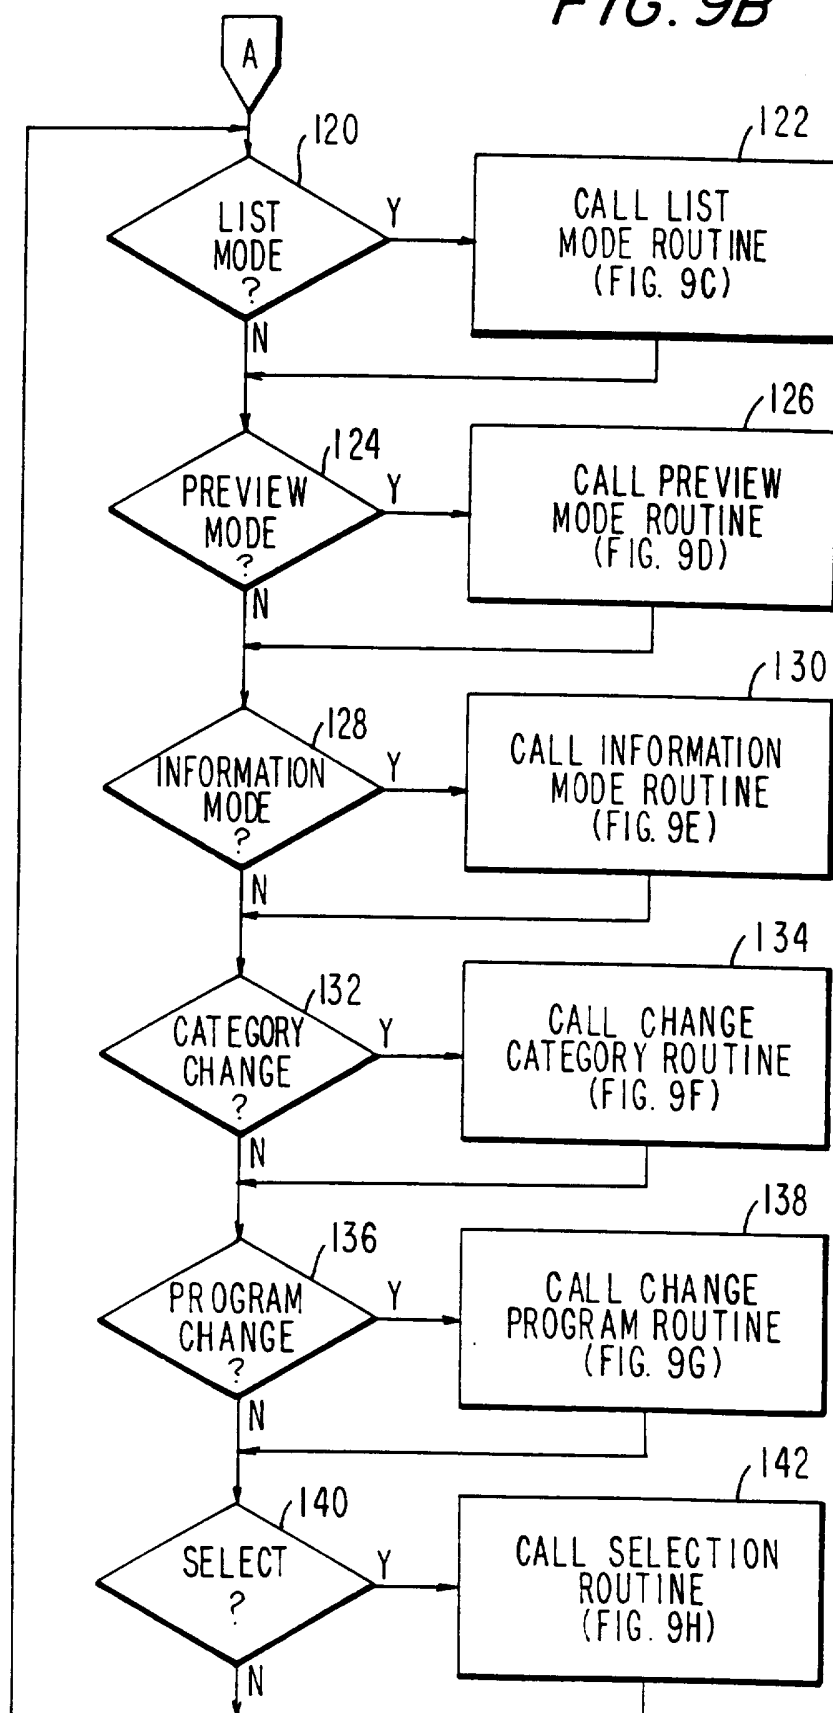


11/16

FIG.9C

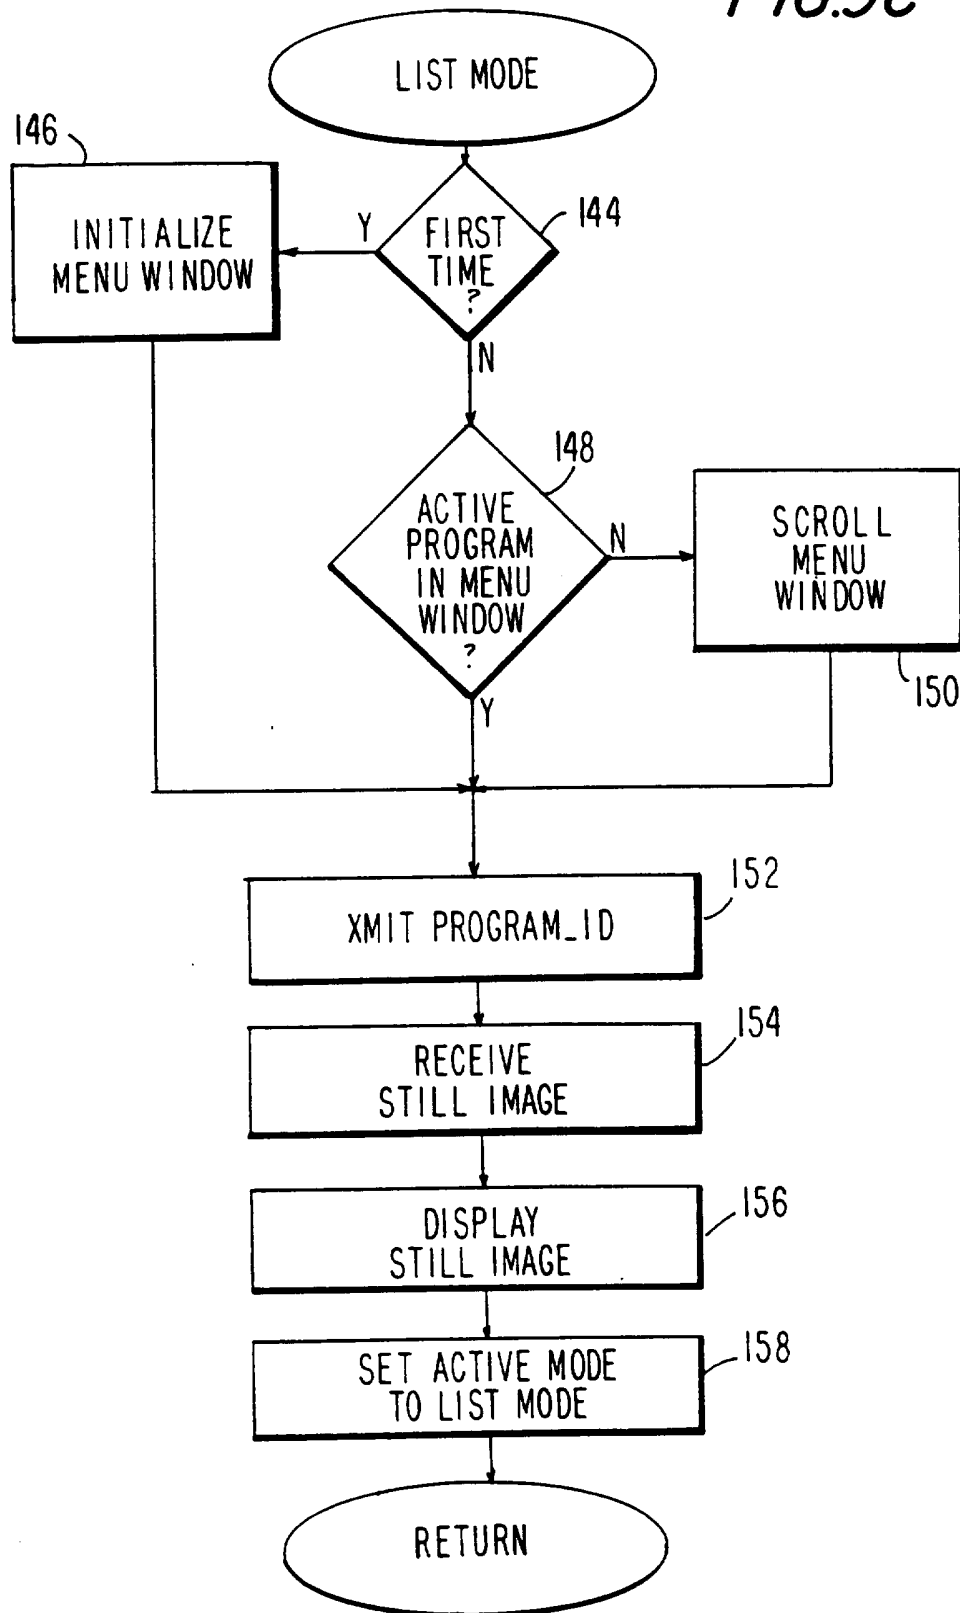


12 / 16

FIG. 9D

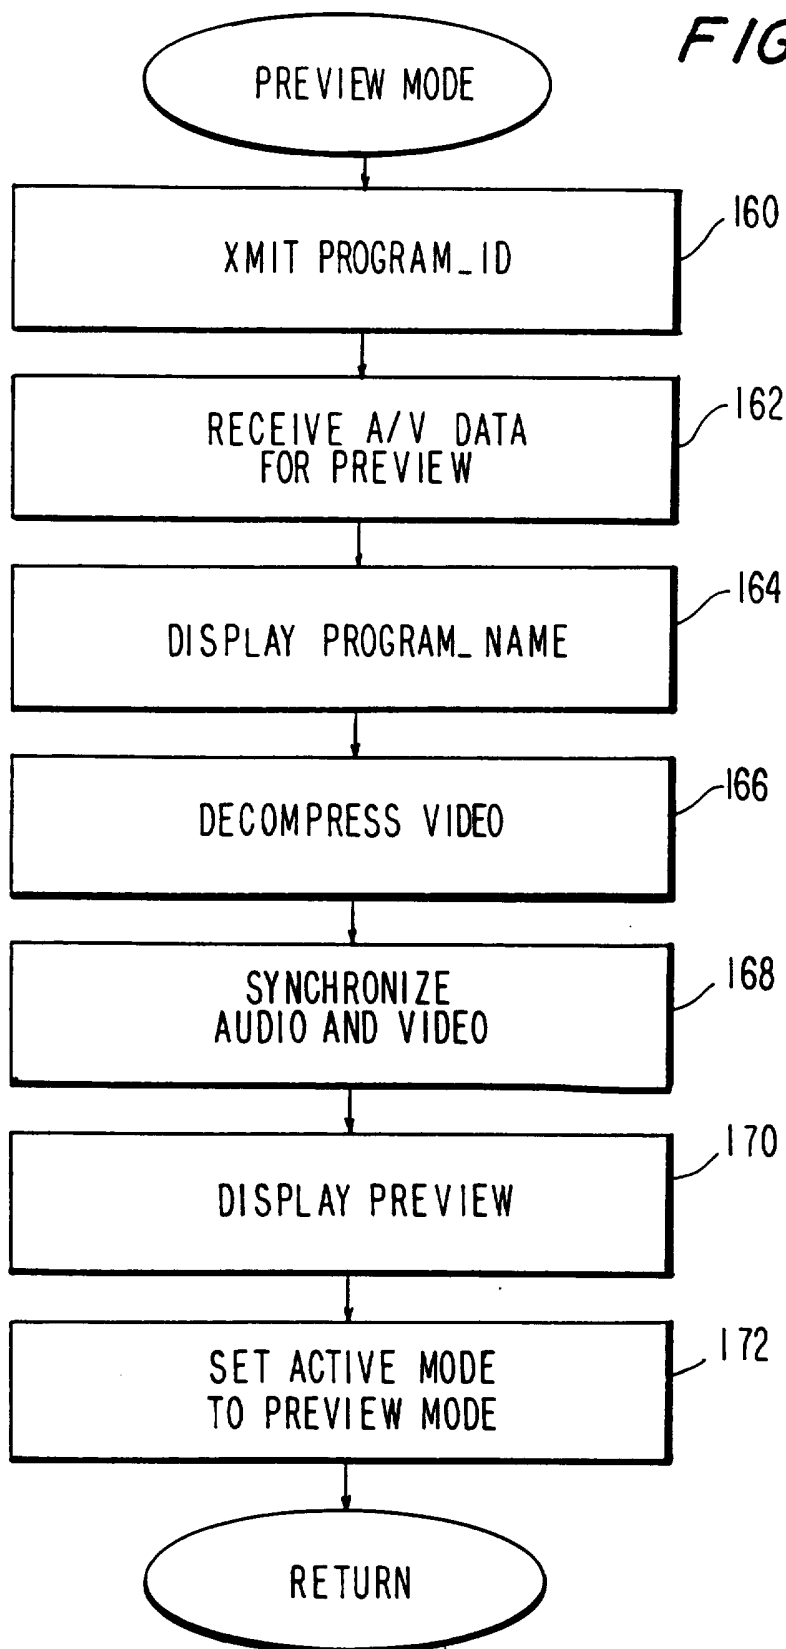


13/16

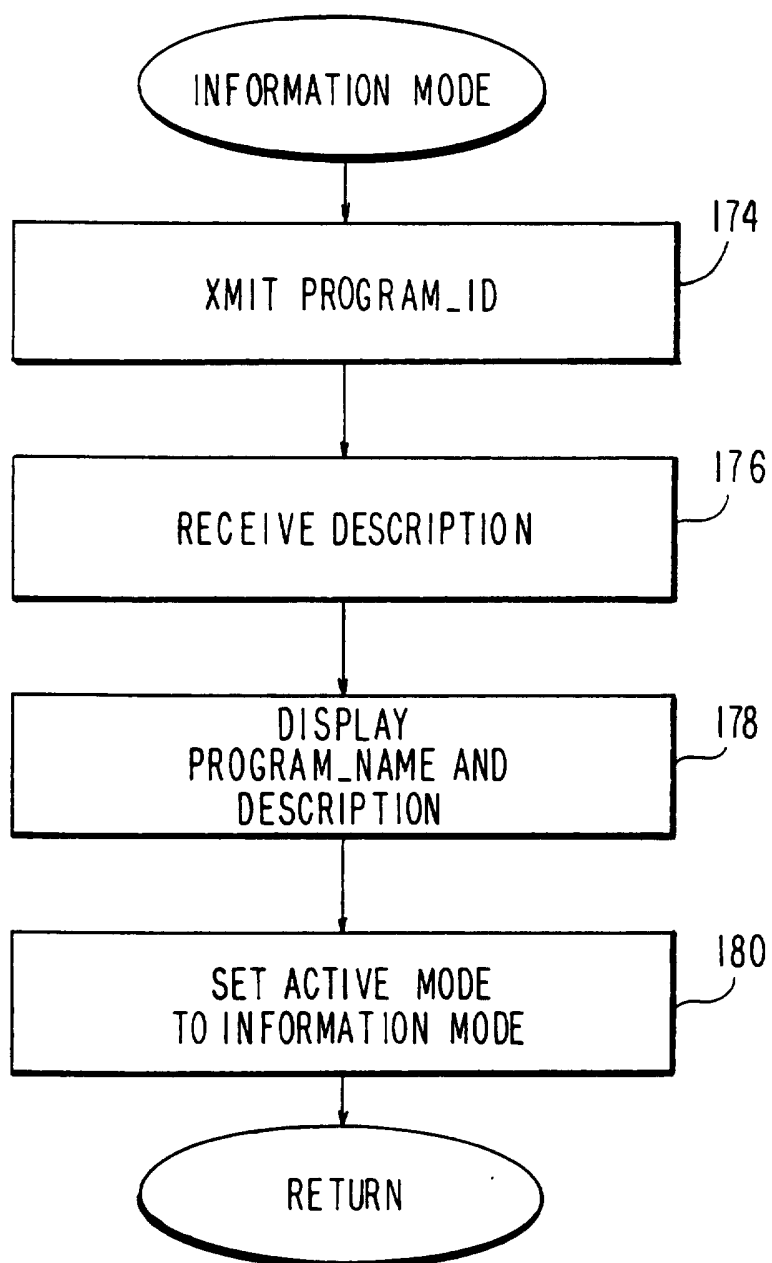*FIG.9E*


14/16

FIG. 9F

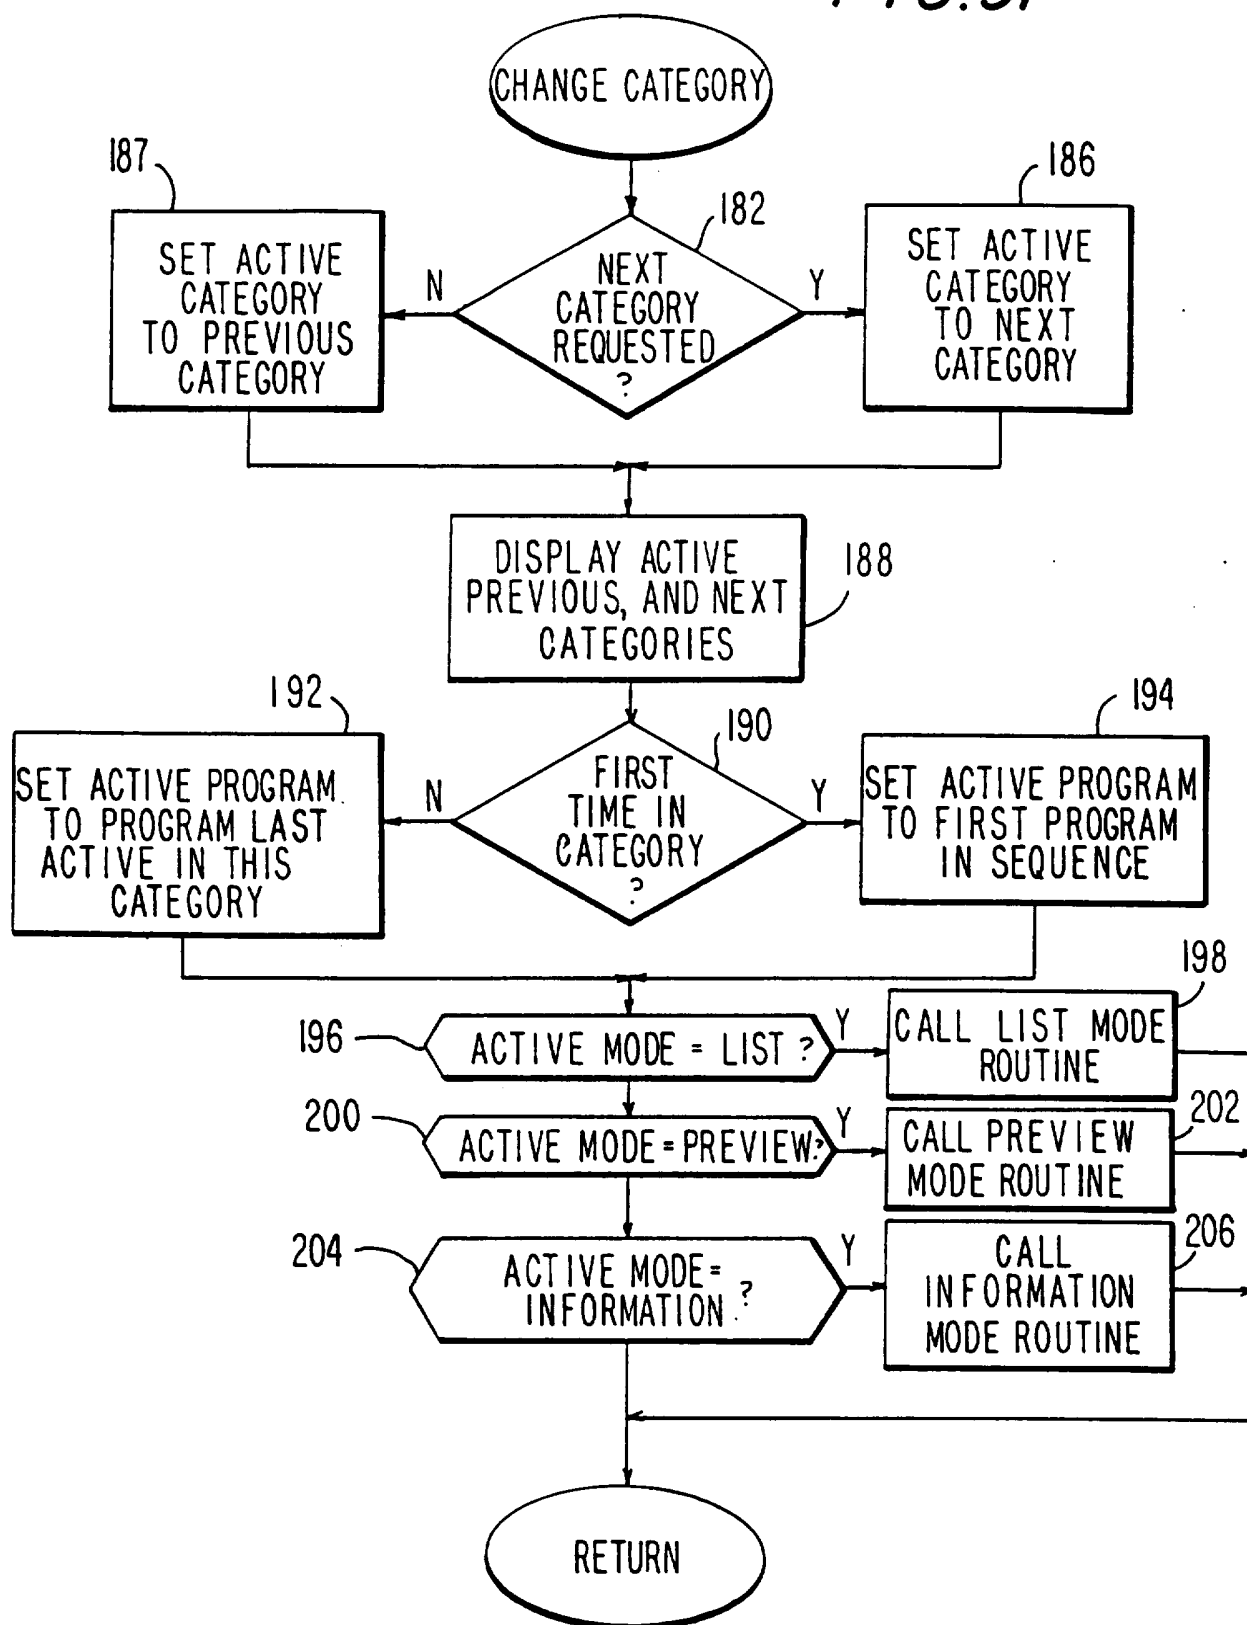


15716

FIG. 9G

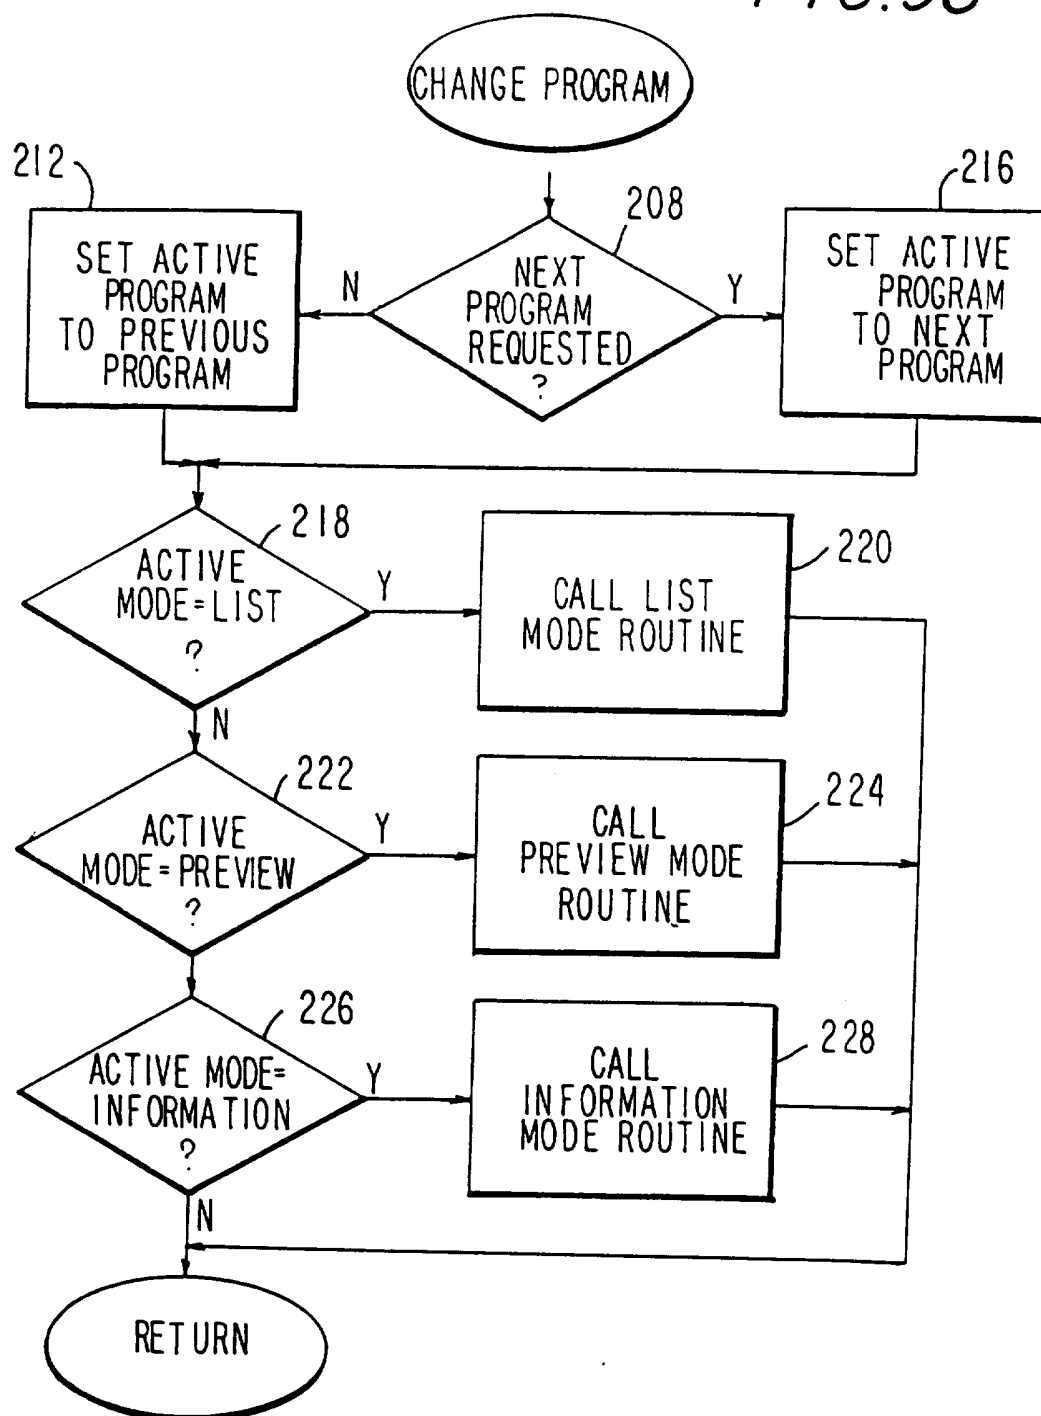

16/16

FIG. 9H

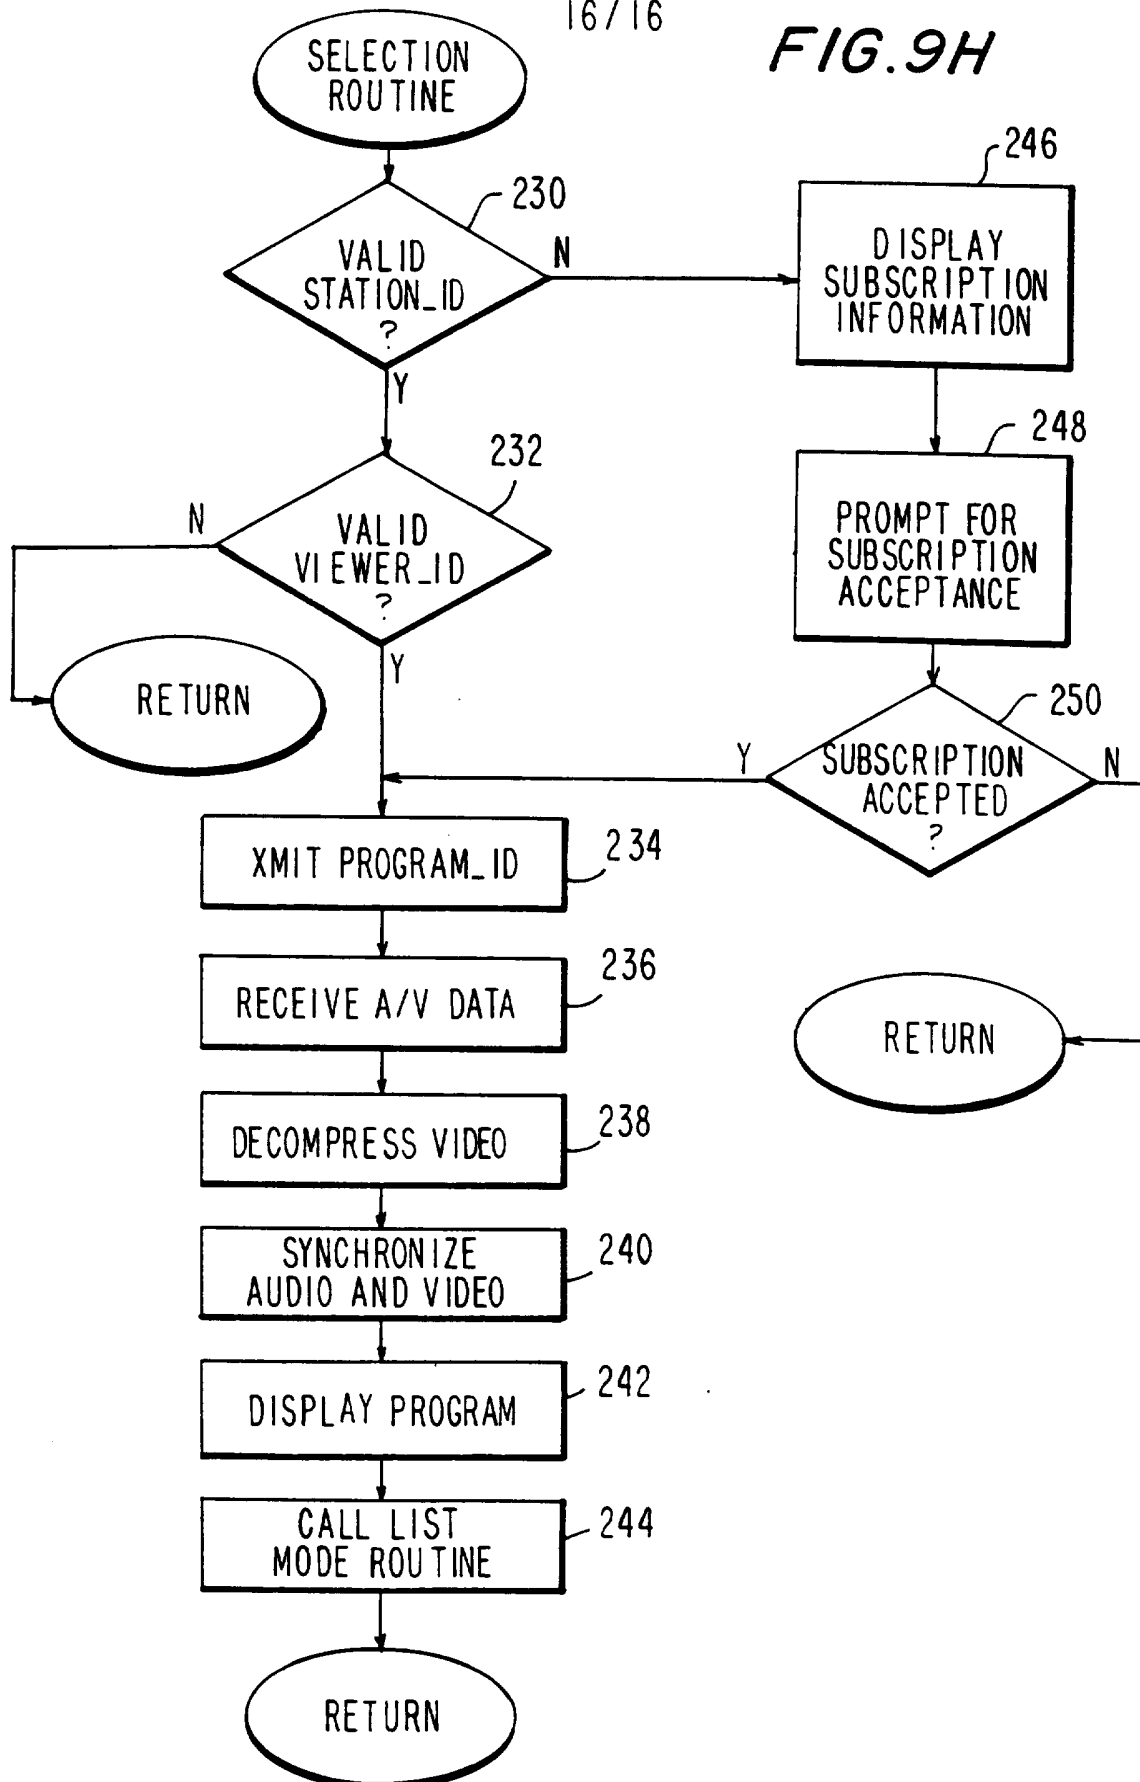

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 95/11552

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 H04N7/173

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,X	WO,A,95 01058 (APPLE COMPUTER) 5 January 1995 see page 25, line 1 - page 48, line 24 see page 68, line 1 - page 70, line 7 see figures 1-50 ---	1-9
Y	CABLE TV SESSIONS, MONTREUX, JUNE 10 - 15, 1993, no. SYMP. 18, 11 June 1993 POSTES;TELEPHONES ET TELEGRAPHES SUISSES, pages 555-567, XP 000379380 HOARTY W L 'MULTIMEDIA ON CABLE TELEVISION SYSTEMS' see page 557, line 1 - page 558, line 3 see page 558, line 27 - page 559, line 25 see page 561, line 8 - page 566, line 31 --- -/--	1-9

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

19 December 1995

Date of mailing of the international search report

24. 01. 96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Van der Zaal, R

INTERNATIONAL SEARCH REPORT

Inter national Application No
PCT/US 95/11552

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	GB,A,2 231 244 (PIONEER ELECTRONIC CORP) 7 November 1990 see page 1, line 32 - page 2, line 23 see page 9, line 14 - page 13, line 12 see figures 1-4 ---	1-9
Y	COMMUNICATIONS - RISING TO THE HEIGHTS, DENVER, JUNE 23 - 26, 1991, vol. 2 OF 3, 23 June 1991 INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS, pages 842-846, XP 000269608 GELMAN A D ET AL 'A STORE-AND-FORWARD ARCHITECTURE FOR VIDEO-ON-DEMAND SERVICE'	3-9
A	see the whole document ---	1,2
Y	US,A,4 920 432 (EGGERS DEREK C ET AL) 24 April 1990	3-9
A	see column 1, line 56 - column 2, line 12 see column 3, line 13 - column 5, line 42 see column 6, line 8 - column 9, line 53 see column 14, line 67 - column 15, line 8 see figures 1-11 -----	1,2

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 95/11552

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO-A-9501058	05-01-95	AU-B- 7114394	17-01-95
GB-A-2231244	07-11-90	JP-A- 2268092	01-11-90
		US-A- 5359419	25-10-94
US-A-4920432	24-04-90	NONE	