

(57) Abrégé(suite)/Abstract(continued):

battery pack exceeds a temperature limit (T_{Limit}). Further, the method involves activating, with the BTMS controller, at least one virtual cell to provide current or sink current for at least one of the battery cells in the battery pack that exceeds the temperature limit.

ABSTRACT

A system, method, and apparatus for virtual cells for battery thermal management are disclosed. The disclosed method involves sensing, with at least one temperature sensor, a temperature of at least one battery cell in a battery pack. The method further involves sensing, with at least one current sensor, at least one current within the battery pack. Also, the method involves determining, with a battery thermal management system (BTMS) controller, if the temperature of any of the battery cells in the battery pack exceeds a temperature limit (T_{Limit}). Further, the method involves activating, with the BTMS controller, at least one virtual cell to provide current or sink current for at least one of the battery cells in the battery pack that exceeds the temperature limit.

VIRTUAL CELL FOR BATTERY THERMAL MANAGEMENT

FIELD

[0001] The present disclosure relates to battery thermal management. In particular, it relates to virtual cells for battery thermal management.

BACKGROUND

[0002] Heat generation from a battery is directly related to the current it carries. The higher the current, the more heat is generated. In practice, there exists the possibility that an enormous amount of heat may be generated from the battery that is beyond the capability of an external battery thermal management system to reduce sufficiently. The causes of such high heat generation may be from: (1) an extremely high current resulting from an excess load demand or load fault, (2) a battery internal fault, and/or (3) a charge/discharge circuit failure. Additionally, the heat may accumulate rapidly within the battery if the thermal management system fails or cannot quickly transport the heat out, thereby resulting in very high battery temperature.

[0003] Traditional battery thermal management systems provide a means of transporting the heat away from the battery by an external active or passive cooling system. For advanced high energy density batteries (e.g., lithium-type batteries), conventional battery thermal management systems are often inadequate in the event of a fault or a continuous abusive condition. Currently, conventional methods do nothing to control the heat generation from within the battery.

[0004] As such, there is a need for an improved battery thermal management system that is able to control the heat generation from within the battery such that the temperature of the battery always remains within a safe limit, without compromising the normal load demand.

SUMMARY

[0005] The present disclosure relates to a method, system, and apparatus for virtual cells for battery thermal management.

[0006] In one embodiment there is provided a method for thermal battery management. The method involves sensing, with at least one temperature sensor, a temperature of at least one battery cell of a plurality of battery cells in a battery pack. The plurality of battery cells are arranged in a plurality of layers in the battery pack. The plurality of battery cells in each layer of the plurality of layers are connected in parallel. The method further involves sensing, with at least one current sensor, at least one current within the battery pack and, determining if the temperature of any of the at least one battery cells in the battery pack exceeds a temperature limit (T_{Limit}), and activating at least one virtual cell to provide current or receive sink current for the any of the at least one of the battery cell in the battery pack that exceeds the temperature limit.

[0007] In one embodiment, the plurality of layers may be connected in series.

[0008] In some embodiments, each of the at least one virtual cell may be connected to one of the plurality of layers.

[0009] The method may further involve sending, by the at least one temperature sensor, at least one temperature signal to a battery temperature management system (BTMS) controller. The at least one temperature signal may include information related to the temperature of the at least one of the plurality of battery cells.

[0010] The at least one current sensor may include at least one of a battery pack current sensor and at least one virtual cell current sensor.

[0011] The method may further involve sending, by the battery pack current sensor, at least one current signal to a battery temperature management system (BTMS) controller. The at least one current signal may include information related to a current of the battery pack.

[0012] The method may further involve sending, by the at least one virtual cell current sensor, at least one current signal to a battery temperature management system (BTMS) controller. The at least one current signal may include information related to a current of the plurality of battery cells in a layer of plurality of layers associated with the at least one virtual cell current sensor.

[0012a] The at least one virtual cell may be at least one of a direct current/direct current (DC/DC) converter and an alternating current/direct current (AC/DC) converter.

[0012b] The DC/DC converter may be a bi-directional direct current/direct current (DC/DC) converter.

[0012c] The AC/DC converter may be a bi-directional alternating current/alternating current (AC/DC) converter.

[0012d] An input of the DC/DC converter may be connected to one of terminals of the battery pack and a direct current (DC) source.

[0012e] An input of the AC/DC converter may be connected to terminals of an alternating current (AC) source.

[0012f] In another embodiment there is provided a system for thermal battery management. The system includes at least one temperature sensor configured to sense a temperature of at least one battery cell of a plurality of battery cells in a battery pack. The plurality of battery cells are arranged in a plurality of layers in the battery pack. The plurality of battery cells in each layer of the plurality of layers are connected in parallel. The system further includes at least one current sensor configured to sense at least one current within the battery pack and a battery thermal management system (BTMS) controller. The BTMS controller is configured to determine if the temperature of any of the at least one battery cell in the battery pack exceeds a temperature limit (T_{Limit}), and the BTMS controller is further configured to activate at least one virtual cell to provide current or receive sink current for the any of the at least one of the battery cells in the battery pack that exceeds the temperature limit.

[0012g] The plurality of layers may be connected in series.

[0012h] Each of the at least one virtual cell may be connected to one layer of the plurality of layers.

[0012i] The at least one temperature sensor may be further configured to send at least one temperature signal to the BTMS controller. The at least one temperature signal may include information related to the temperature of the at least one battery cell of the plurality of battery cells.

[0012j] The at least one current sensor may include at least one of a battery pack current sensor and at least one virtual cell current sensor.

[0012k] The battery pack current sensor may be configured to send at least one current signal to the BTMS controller. The at least one current signal may include information related a current of the battery pack.

[0012l] The at least one virtual cell current sensor may be configured to send at least one current signal to the BTMS controller. The at least one current signal may include information related to a current of the plurality of battery cells in a layer of the plurality of layers associated with the at least one virtual cell current sensor.

[0012m] The at least one virtual cell may be at least one of a direct current/direct current (DC/DC) converter and an alternating current/direct current (AC/DC) converter.

[0012n] The DC/DC converter may be a bi-directional direct current/direct current (DC/DC) converter.

[0012o] The AC/DC converter may be a bi-directional alternating current/direct current (AC/DC) converter.

[0012p] An input of the DC/DC converter may be connected to one of terminals of the battery pack and a direct current (DC) source.

[0012q] An input of the AC/DC converter may be connected to terminals of an alternating current (AC) source.

[0013] The features and functions can be achieved independently in various embodiments of the present disclosure or may be combined in yet other embodiments.

DRAWINGS

[0014] These and other features, aspects, and advantages of the present disclosure will become better understood with regard to the following description, appended claims, and accompanying drawings where:

[0015] FIG. 1 is a schematic diagram of the disclosed system for battery thermal management employing DC/DC converters for the virtual cells, in accordance with at least one embodiment of the present disclosure.

[0016] FIG. 2 is a schematic diagram of the disclosed system for battery thermal management employing AC/DC converters for the virtual cells, in accordance with at least one embodiment of the present disclosure.

[0017] FIG. 3 is a flow chart for an overview of the disclosed method for the operation of the system for battery thermal management of FIGS. 1 and 2, in accordance with at least one embodiment of the present disclosure.

[0018] FIG. 4 is a flow chart for the disclosed method for the operation of the system for battery thermal management of FIGS. 1 and 2, in accordance with at least one embodiment of the present disclosure.

[0019] FIG. 5 is a flow chart for the virtual cell discharge subroutine for the disclosed method of FIG. 4, in accordance with at least one embodiment of the present disclosure.

[0020] FIG. 6 is a flow chart for the virtual cell charge subroutine for the disclosed method of FIG. 4, in accordance with at least one embodiment of the present disclosure.

DESCRIPTION

[0021] The methods and apparatus disclosed herein provide an operative system for virtual cells for battery thermal management. The disclosed system provides a solution to control heat generation from within the battery, such that the temperature of the battery is always maintained within a safe limit, without compromising the normal load demand. In particular, during operation of the disclosed system, the system senses the temperatures of individual battery cells, identifies the cell or cells approaching or exceeding a maximum temperature limit, and reduces the current of the compromised cell or cells such that less heat is generated. As such, the system is able to prevent one or more battery cells from overheating and/or achieving thermal runaway.

[0022] As previously mentioned above, conventional methods for performing battery thermal management deal only with taking the heat away from the battery externally, either actively or passively. The present disclosure instead directly manages the heat generation from within the battery to perform battery thermal management, along with the use of a conventional external cooling system. The

present disclosure requires measurement of the battery cell temperature, and partially focuses on temperature management to prevent overheating.

[0023] Specifically, the disclosed system first senses the temperature of individual battery cells, and identifies the battery cell(s) approaching or exceeding a maximum temperature limit. Then, the system reduces the current load of the compromised battery cell(s) such that less heat is generated by the battery cell(s), thereby achieving a lower and stable temperature level. The current deficit created by the load reduction of the compromised battery cell(s) is compensated by a virtual cell(s) (e.g., an actively controlled bi-directional direct current/direct current (DC/DC) converter or an alternating current/direct current (AC/DC) converter) to which the battery cell(s) is connected in parallel.

[0024] The disclosed system is capable of: (1) reducing the current of battery cells having a temperature approaching or exceeding a maximum temperature limit, and (2) compensating for the current deficit resulting from the battery cell current reduction by using virtual cells to meet the entire battery current requirement, which is determined by the load. As such, the disclosed system is able to control the battery temperature preemptively, which is not currently possible by conventional battery thermal battery systems. The disclosed system controls the battery heat generation such that the temperature stays within a safe region all of the time, thereby preventing the system from overheating.

[0025] In the following description, numerous details are set forth in order to provide a more thorough description of the system. It will be apparent, however, to

one skilled in the art, that the disclosed system may be practiced without these specific details. In the other instances, well known features have not been described in detail so as not to unnecessarily obscure the system.

[0026] FIG. 1 is a schematic diagram of the disclosed system **100** for battery thermal management employing DC/DC converters **110a**, **110b** for the virtual cells **110a**, **110b**, in accordance with at least one embodiment of the present disclosure. In this figure, there are six main elements depicted for the system **100**. The first main element is the battery pack **120** (e.g., an array of battery cells, which is also referred to as a “battery array”). The battery pack **120** consists of MxN number of battery cells **130a–130f**, where there are M number of layers (i.e. rows) and N number of cells (i.e. columns) in each layer. The battery cells **130a–130f** are interconnected such that each layer of the total M layers has N battery cells **130a–130c** connected in parallel, and the total M battery cells layers are connected in series. This configuration creates an MxN battery array **120**.

[0027] The numbers M and N may be arbitrary, but M is greater than or equal to ($\geq$) one (1) and $N \geq 1$. For the battery cell **130f** positioned at the Mth layer and the Nth column, the variables of that battery cell **130f** are designated by the subscripts (M, N). The positive terminals of the top layer of battery cells **130a–130c** are connected together, and form the positive terminal **140** of the battery pack **120**. The negative terminals of the bottom layer battery cells **130d–130f** are connected together, and form the negative terminal **150** of the battery pack **120**.

[0028] The second main element is the virtual cells **110a**, **110b**. In this figure, a DC/DC converter is employed for each of the virtual cells **110a**, **110b**. Any type of current bi-directional DC/DC converters may be used for the virtual cells **110a**, **110b**. Also, one virtual cell **110a**, **110b** is employed for each layer of battery cells **130a** – **130f** (e.g., one virtual cell **110a** is employed for the top layer of the battery cells **130a** – **130c**, and the virtual cell **110b** is employed for the bottom layer of battery cells **130d** – **130f**) and, as such, there are a total of M number of virtual cells **110a**, **110b**. The output positive and negative terminals of each virtual cell **110a**, **110b** are connected to the positive and negative terminals of the virtual cell's corresponding battery cell layer **130a-130c**, **130d-130f**. The input positive and negative terminals of each virtual cell are connected to the positive **140** and negative **150** terminals of the battery pack **120**. It should be noted that in other embodiments, the input positive and negative terminals of each virtual cell are connected to terminals of a DC source instead of to the terminals of the battery pack **120**. It should also be noted that in other embodiments (refer to FIG. 2), an AC/DC converter may be employed for each of the virtual cells **110a**, **110b**.

[0029] The third main element is the battery cell temperature sensors, which are denoted in the figure by a diamond symbol. The temperature of each battery cell **130a-130f** is sensed by a temperature sensor, and the temperature sensor sends a temperature signal, containing information regarding the sensed temperature, to the battery thermal management system (BTMS) controller **160**. For the battery cell **130f** of the Mth layer and the Nth column, the temperature is designed as $T_{M,N}$. In this figure, a temperature sensor for each battery cell **130a-130f** is employed. However, it

should be noted that in other embodiments, more or less temperature sensors for each battery cell **130a-130f** may be employed. For example, more temperature sensors may be employed for the more critical battery cells.

[0030] The fourth main element is current sensors **170a-170c** (i.e. current sensors for the battery cells (i.e. the battery array) and the virtual cells), which are denoted in the figure as a dot surrounded by a semicircle. In this figure, a current sensor **170a** is employed for the battery pack **120**, and for each of the virtual cells **110a**, **110b**. The battery pack current is designated as I_0 , with the positive direction as shown by the arrow. The current of the M th virtual cell is designated as I_M , with the positive direction as shown by the arrow. The current of the battery pack **120** is sensed by the battery pack current sensor **170a** and the currents of the virtual cells **110a**, **110b** are sensed by virtual cells current sensors **170b**, **170c**; and the battery pack current sensor **170a** and the virtual cells current sensors **170b**, **170c** each send a current signal, containing information regarding the sensed current, to the BTMS controller **160**.

[0031] The fifth main element is the BTMS controller **160**. The BTMS controller **160** may be implemented using digital and/or analog electronics. The BTMS controller **160** receives the temperature signals and the current signals. The BTMS controller **160** makes specific control decisions for each of the M number of virtual cells **110a**, **110b** according to the received temperature signals and current signals. The BTMS controller **160** then sends out control signals related to the control decisions to the virtual cells **110a**, **110b**.

[0032] The sixth main element is the system controller **180**. The system controller **180** is interfaced with the BTMS controller **160**. The system controller **180** is responsible for sending system command and control signals to the BTMS controller **160**, and receiving the temperature and current signals from the BTMS controller **160**. The system controller **160** is also responsible for interfacing with other management systems including, but not limited to, the battery charge/discharge control system, and battery over-current protection system, the short circuit protection system, the battery life management system, and the power distribution control system.

[0033] As previously mentioned, the battery cell heat generation is directly related to the current it carries. The battery cell temperature becomes higher when the current is higher, and if the heat cannot be transported away immediately by the external cooling system, an overheating condition may occur. The fundamental mechanism to prevent this from happening, by the disclosed BTMS controller **160**, is to reduce the intensity of the heat source (i.e. reduce the current). The deficit of the battery cell current as a result of current reduction is compensated by the virtual cell(s) **110a**, **110b**.

[0034] During operation of the system, the system controller **180** passes the battery cell temperature limit T_{Limit} to the BTMS controller **160**. Then, the BTMS controller **160** constantly monitors the battery cell temperatures, and picks out the battery cells **130a-130f** exhibiting the maximum temperatures in their corresponding battery cell layers. If the maximum temperature of a battery cell **130a-130f** in a certain layer of battery cells approaches and/or exceeds the temperature limit (T_{Limit}), the virtual cell **110a**, **110b** corresponding to that battery cell layer is activated, by receiving a control signal

from the BTMS controller **160**, to provide a current or to sink a current. As such, the battery cell current in that battery cell layer is reduced and, thus, the heat production is decreased.

[0035] In one or more embodiments, the current increment ΔI , is set by the system controller **180**, and may depend upon a specific battery system design. For each time step Δt during operation, if a battery cell temperature over the temperature limit is detected, the current of the corresponding virtual cell **110a**, **110b** is adjusted by ΔI . The process continues until the system controller **180** sends a command signal to stop. A detailed description of the control algorithm for the BTMS controller **160** is described in the description of FIGS. **4**, **5**, and **6**.

[0036] FIG. **2** is a schematic diagram of the disclosed system **200** for battery thermal management employing AC/DC converters **210a**, **210b** for the virtual cells **210a**, **210b**, in accordance with at least one embodiment of the present disclosure. The system **200** of FIG. **2** is the same as the system **100** of FIG. **1** except that for the system **200** of FIG. **2**, AC/DC converters **210a**, **210b** are employed for the virtual cells **210a**, **210b** instead of DC/DC converters **110a**, **110b**. Any type of current bi-directional AC/DC converters **210a**, **210b** may be used for the virtual cells. In addition, the input positive and negative terminals of each AC/DC converters **210a**, **210b** are connected to the positive **240** and negative **250** terminals of an AC source **260** (e.g., an existing AC bus in the system).

[0037] FIG. **3** is a flow chart for an overview of the disclosed method **300** for the operation of the system for battery thermal management of FIGS. **1** and **2**, in

accordance with at least one embodiment of the present disclosure. In this figure, at the start **310** of the method **300**, at least one temperature sensor senses a temperature of at least one battery cell in the battery pack **320**. At least one current sensor senses at least one current within the battery pack **330**. Then, a battery thermal management system (BTMS) controller determines if the temperature of any of the battery cells in the battery pack exceeds a temperature limit (T_{Limit}) **340**. The BTMS controller activates at least one virtual cell to provide current or to sink current for at least one of the battery cells in the battery pack that exceeds the temperature limit **350**. Then, the method **300** ends **360**.

[0038] FIG. 4 is a flow chart for the disclosed method **400** for the operation of the system **100**, **200** for battery thermal management of FIGS. 1 and 2, in accordance with at least one embodiment of the present disclosure. In this figure, at the start of the method **400**, the BTMS controller receives a start command of time $(t) = 0$ (i.e. to initialize the start time equal to zero) from the system controller **405**. Then, the BTMS controller enters or obtains the values of T_{Limit} (i.e. the temperature limit for the battery cells), Δt (i.e. the time increment), and ΔI (i.e. the current increment) from the system controller **410**. The temperature sensors measure the battery cell temperatures ($T_{m,n}$, where $m = 1, 2, \dots, M$ and $n = 1, 2, \dots, N$) **415**. The current sensors measure the currents (I_0 and I_m , where $m = 1, 2, \dots, M$) **420**. The BTMS controller then finds the maximum battery cell temperature for each layer ($T_{max,m} = \text{Max}(T_{m,1}, T_{m,2}, \dots, T_{m,N})$, where $m = 1, 2, \dots, M$) **425**.

[0039] Then, the BTMS controller determines whether the battery pack current I_0 is greater than, equal to, or less than zero (**0**) (i.e. $I_0 >$, or $=$, or < 0) **430**. If the battery

pack current I_0 is greater than zero, the BTMS controller will execute the virtual cell discharge subroutine **435**, which will be described in the description of FIG. 5. And, if the battery pack current I_0 is less than zero, the BTMS controller will execute the virtual cell charge subroutine **440**, which will be described in the description of FIG. 6. However, if the battery pack current I_0 is equal to zero, the BTMS controller will keep the virtual cell in standby mode **445** (e.g., the BTMS controller will essentially do nothing), and the BTMS controller will check the latest command from the system controller **450**.

[0040] After the BTMS controller has executed the virtual cell discharge subroutine **435** or the virtual cell charge subroutine **440** or the standby mode **445**, the BTMS controller will check the latest command from the system controller **450**. The BTMS controller will determine if the command is to continue **455**. If the command is to continue, the method **400** will proceed to step **415**. However, if the command is not to continue, the method **400** will stop **465**.

[0041] FIG. 5 is a flow chart for the virtual cell discharge subroutine **435** for the disclosed method **400** of FIG. 4, in accordance with at least one embodiment of the present disclosure. In this figure, at the start of the discharge subroutine **435**, m is set equal to **1** (i.e. $m = 1$) so that the method starts from the first layer (i.e. layer **1**) **505**. The BTMS controller determines if the maximum temperature of the layer is greater than the temperature limit (i.e. $T_{\max,m} > T_{\text{Limit}}?$) **510**.

[0042] If the BTMS controller determines that the maximum temperature is not greater than the temperature limit, the BTMS controller determines if the current for

the virtual cell for the layer is greater than zero (i.e. $I_m > 0$?) **515**. If the BTMS controller determines that the current for the virtual cell is not greater than zero, then the battery cell layer does not need support from the virtual cell and, as such, a zero value is set as a reference for the virtual cell (i.e. $I_m(t + \Delta t) = 0$) **520**. Then, the subroutine **435** will proceed to step **530**. However, If the BTMS controller determines that the current for the virtual cell is greater than zero, then the layer is receiving support from the virtual cell (i.e. the virtual cell is providing a portion of the battery cell current), and the BTMS controller will decrease the current of the virtual cell by ΔI (i.e. $I_m(t + \Delta t) = I_m(t) - \Delta I$) **525**. Then, the subroutine **435** will proceed to step **530**.

[0043] However, if the BTMS controller determines that the maximum temperature is greater than the temperature limit, the BTMS controller will increase the current of the virtual cell by ΔI (i.e. $I_m(t + \Delta t) = I_m(t) + \Delta I$) to lower the current of the battery cells in the layer **535**. Then, the BTMS controller will check the new increased current setting of the virtual cell to determine if it is greater than the battery pack current (i.e. $I_m(t + \Delta t) > I_0$?) **540**. If the BTMS controller determines that the current of the virtual cell is greater than the battery pack current, the BTMS controller will limit the virtual cell current to the battery pack current (i.e. $I_m(t + \Delta t) = I_0$) **545**. Then, the subroutine **435** will proceed to step **530**. However, if the BTMS controller determines that the current of the virtual cell is not greater than the battery pack current, then the subroutine **435** will proceed to step **530**.

[0044] At step **530**, the BTMS controller determines whether m is less than M (i.e. $m < M$?) **530**. If the BTMS controller determines that m is less than M , the BTMS controller will set m equal to m plus **1** (i.e. $m = m + 1$) so that the method will restart

(by returning back to step **510**) from the next layer (i.e. layer **2**) **550**. The subroutine **435** then proceeds to step **510**. However, if the BTMS controller determines that m is not less than M , the BTMS controller will control the currents of the virtual cells to be equal to $I_m(t + \Delta t)$, where $m = 1, 2, \dots, M$ **555**. Then, the subroutine **435** proceeds to step **450** of method **400** (refer to FIG. **4**).

[0045] FIG. **6** is a flow chart for the virtual cell charge subroutine **440** for the disclosed method **400** of FIG. **4**, in accordance with at least one embodiment of the present disclosure. In this figure, at the start of the discharge subroutine **440**, m is set equal to **1** (i.e. $m = 1$) so that the method starts from the first layer (i.e. layer **1**) **605**. The BTMS controller determines if the maximum temperature of the layer is greater than the temperature limit (i.e. $T_{\max,m} > T_{\text{Limit}}$?) **610**.

[0046] If the BTMS controller determines that the maximum temperature is not greater than the temperature limit, the BTMS controller determines if the current for the virtual cell for the layer is less than zero (i.e. $I_m < 0$?) **615**. If the BTMS controller determines that the current for the virtual cell is not less than zero, then the battery cell layer does not need support from the virtual cell and, as such, a zero value is set as a reference for the virtual cell (i.e. $I_m(t + \Delta t) = 0$) **620**. Then, the subroutine **440** will proceed to step **630**. However, If the BTMS controller determines that the current for the virtual cell is less than zero, then the layer is receiving support from the virtual cell (i.e. the virtual cell is sinking a portion of the battery cell current), and the BTMS controller will increase the current of the virtual cell by ΔI (i.e. $I_m(t + \Delta t) = I_m(t) + \Delta I$) **525**. Then, the subroutine **440** will proceed to step **630**.

[0047] However, if the BTMS controller determines that the maximum temperature is greater than the temperature limit, the BTMS controller will control the virtual cell to sink more current by ΔI (i.e. $I_m(t + \Delta t) = I_m(t) - \Delta I$) to lower the current of the battery cells in the layer **635**. Then, the BTMS controller will check the new current setting of the virtual cell to determine if it is less than the battery pack current (i.e. $I_m(t + \Delta t) < I_0$?) **640**. If the BTMS controller determines that the current of the virtual cell is less than the battery pack current, the BTMS controller will limit the virtual cell current to the battery pack current (i.e. $I_m(t + \Delta t) = I_0$) **645**. Then, the subroutine **440** will proceed to step **630**. However, if the BTMS controller determines that the current of the virtual cell is not less than the battery pack current, then the subroutine **440** will proceed to step **630**.

[0048] At step **630**, the BTMS controller determines whether m is less than M (i.e. $m < M$?) **630**. If the BTMS controller determines that m is less than M , the BTMS controller will set m equal to m plus **1** (i.e. $m = m + 1$) so that the method will restart (by returning back to step **610**) from the next layer (i.e. layer **2**) **650**. The subroutine **440** then proceeds to step **610**. However, if the BTMS controller determines that m is not less than M , the BTMS controller will control the currents of the virtual cells to be equal to $I_m(t + \Delta t)$, where $m = 1, 2, \dots, M$ **655**. Then, the subroutine **440** proceeds to step **450** of method **400** (refer to FIG. 4).

[0049] Although particular embodiments have been shown and described, it should be understood that the above discussion is not intended to limit the scope of these embodiments. While embodiments and variations of the many aspects of the invention have been disclosed and described herein, such disclosure is provided for

purposes of explanation and illustration only. Thus, various changes and modifications may be made without departing from the scope of the claims.

[0050] Where methods described above indicate certain events occurring in certain order, those of ordinary skill in the art having the benefit of this disclosure would recognize that the ordering may be modified and that such modifications are in accordance with the variations of the invention. Additionally, parts of methods may be performed concurrently in a parallel process when possible, as well as performed sequentially. In addition, more parts or less part of the methods may be performed.

[0051] Accordingly, embodiments are intended to exemplify alternatives, modifications, and equivalents that may fall within the scope of the claims.

[0052] Although certain illustrative embodiments and methods have been disclosed herein, it can be apparent from the foregoing disclosure to those skilled in the art that variations and modifications of such embodiments and methods can be made without departing from the disclosure. Many other examples of the art disclosed exist, each differing from others in matters of detail only. Accordingly, it is intended that the art disclosed shall be limited only to the extent required by the appended claims and the rules and principles of applicable law.

THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:

1. A method for thermal battery management, the method comprising:

sensing, with at least one temperature sensor, a temperature of at least one battery cell of a plurality of battery cells in a battery pack, wherein the plurality of battery cells are arranged in a plurality of layers in the battery pack, and wherein the plurality of battery cells in each layer of the plurality of layers are connected in parallel;

sensing, with at least one current sensor, at least one current within the battery pack;

determining if the temperature of any of the at least one battery cells in the battery pack exceeds a temperature limit (T_{Limit}); and

activating at least one virtual cell to provide current or receive sink current for the any of the at least one of the battery cell in the battery pack that exceeds the temperature limit.

2. The method of claim 1, wherein the plurality of layers are connected in series.
3. The method of claim 1, wherein each of the at least one virtual cell is connected to one of the plurality of layers.
4. The method of claim 1, wherein the method further comprises sending, by the at least one temperature sensor, at least one temperature signal to a battery temperature management system (BTMS) controller, wherein the at least one

temperature signal comprises information related to the temperature of the at least one of the plurality of battery cells.

5. The method of claim 1, wherein the at least one current sensor comprises at least one of a battery pack current sensor and at least one virtual cell current sensor.
6. The method of claim 5, wherein the method further comprises sending, by the battery pack current sensor, at least one current signal to a battery temperature management system (BTMS) controller, wherein the at least one current signal comprises information related to a current of the battery pack.
7. The method of claim 5, wherein the method further comprises sending, by the at least one virtual cell current sensor, at least one current signal to a battery temperature management system (BTMS) controller, wherein the at least one current signal comprises information related to a current of the plurality of battery cells in a layer of plurality of layers associated with the at least one virtual cell current sensor.
8. The method of claim 1, wherein the at least one virtual cell is at least one of a direct current/direct current (DC/DC) converter and an alternating current/direct current (AC/DC) converter.
9. The method of claim 8, wherein the DC/DC converter is a bi-directional direct current/direct current (DC/DC) converter.
10. The method of claim 8, wherein the AC/DC converter is a bi-directional alternating current/alternating current (AC/DC) converter.

11. The method of claim 8, wherein an input of the DC/DC converter is connected to one of terminals of the battery pack and a direct current (DC) source.
12. The method of claim 10, wherein an input of the AC/DC converter is connected to terminals of an alternating current (AC) source.
13. A system for thermal battery management, the system comprising:
 - at least one temperature sensor configured to sense a temperature of at least one battery cell of a plurality of battery cells in a battery pack, wherein the plurality of battery cells are arranged in a plurality of layers in the battery pack, and wherein the plurality of battery cells in each layer of the plurality of layers are connected in parallel;
 - at least one current sensor configured to sense at least one current within the battery pack; and
 - a battery thermal management system (BTMS) controller configured to:
 - determine if the temperature of any of the at least one battery cell in the battery pack exceeds a temperature limit (T_{Limit}); and
 - activate at least one virtual cell to provide current or receive sink current for the any of the at least one of the battery cells in the battery pack that exceeds the temperature limit.
14. The system of claim 13, wherein the plurality of layers are connected in series.
15. The system of claim 13, wherein each of the at least one virtual cell is connected to one layer of the plurality of layers.

16. The system of claim 13, wherein the at least one temperature sensor is further configured to send at least one temperature signal to the BTMS controller, wherein the at least one temperature signal comprises information related to the temperature of the at least one battery cell of the plurality of battery cells.
17. The system of claim 13, wherein the at least one current sensor comprises at least one of a battery pack current sensor and at least one virtual cell current sensor.
18. The system of claim 17, wherein the battery pack current sensor is configured to send at least one current signal to the BTMS controller, wherein the at least one current signal comprises information related to a current of the battery pack.
19. The system of claim 17, wherein the at least one virtual cell current sensor is configured to send at least one current signal to the BTMS controller, wherein the at least one current signal comprises information related to a current of the plurality of battery cells in a layer of the plurality of layers associated with the at least one virtual cell current sensor.
20. The system of claim 13, wherein the at least one virtual cell is at least one of a direct current/direct current (DC/DC) converter and an alternating current/direct current (AC/DC) converter.
21. The system of claim 20, wherein the DC/DC converter is a bi-directional direct current/direct current (DC/DC) converter.
22. The system of claim 20, wherein the AC/DC converter is a bi-directional alternating current/direct current (AC/DC) converter.

- 23.** The system of claim **20**, wherein an input of the DC/DC converter is connected to one of terminals of the battery pack and a direct current (DC) source.
- 24.** The system of claim **20**, wherein an input of the AC/DC converter is connected to terminals of an alternating current (AC) source.


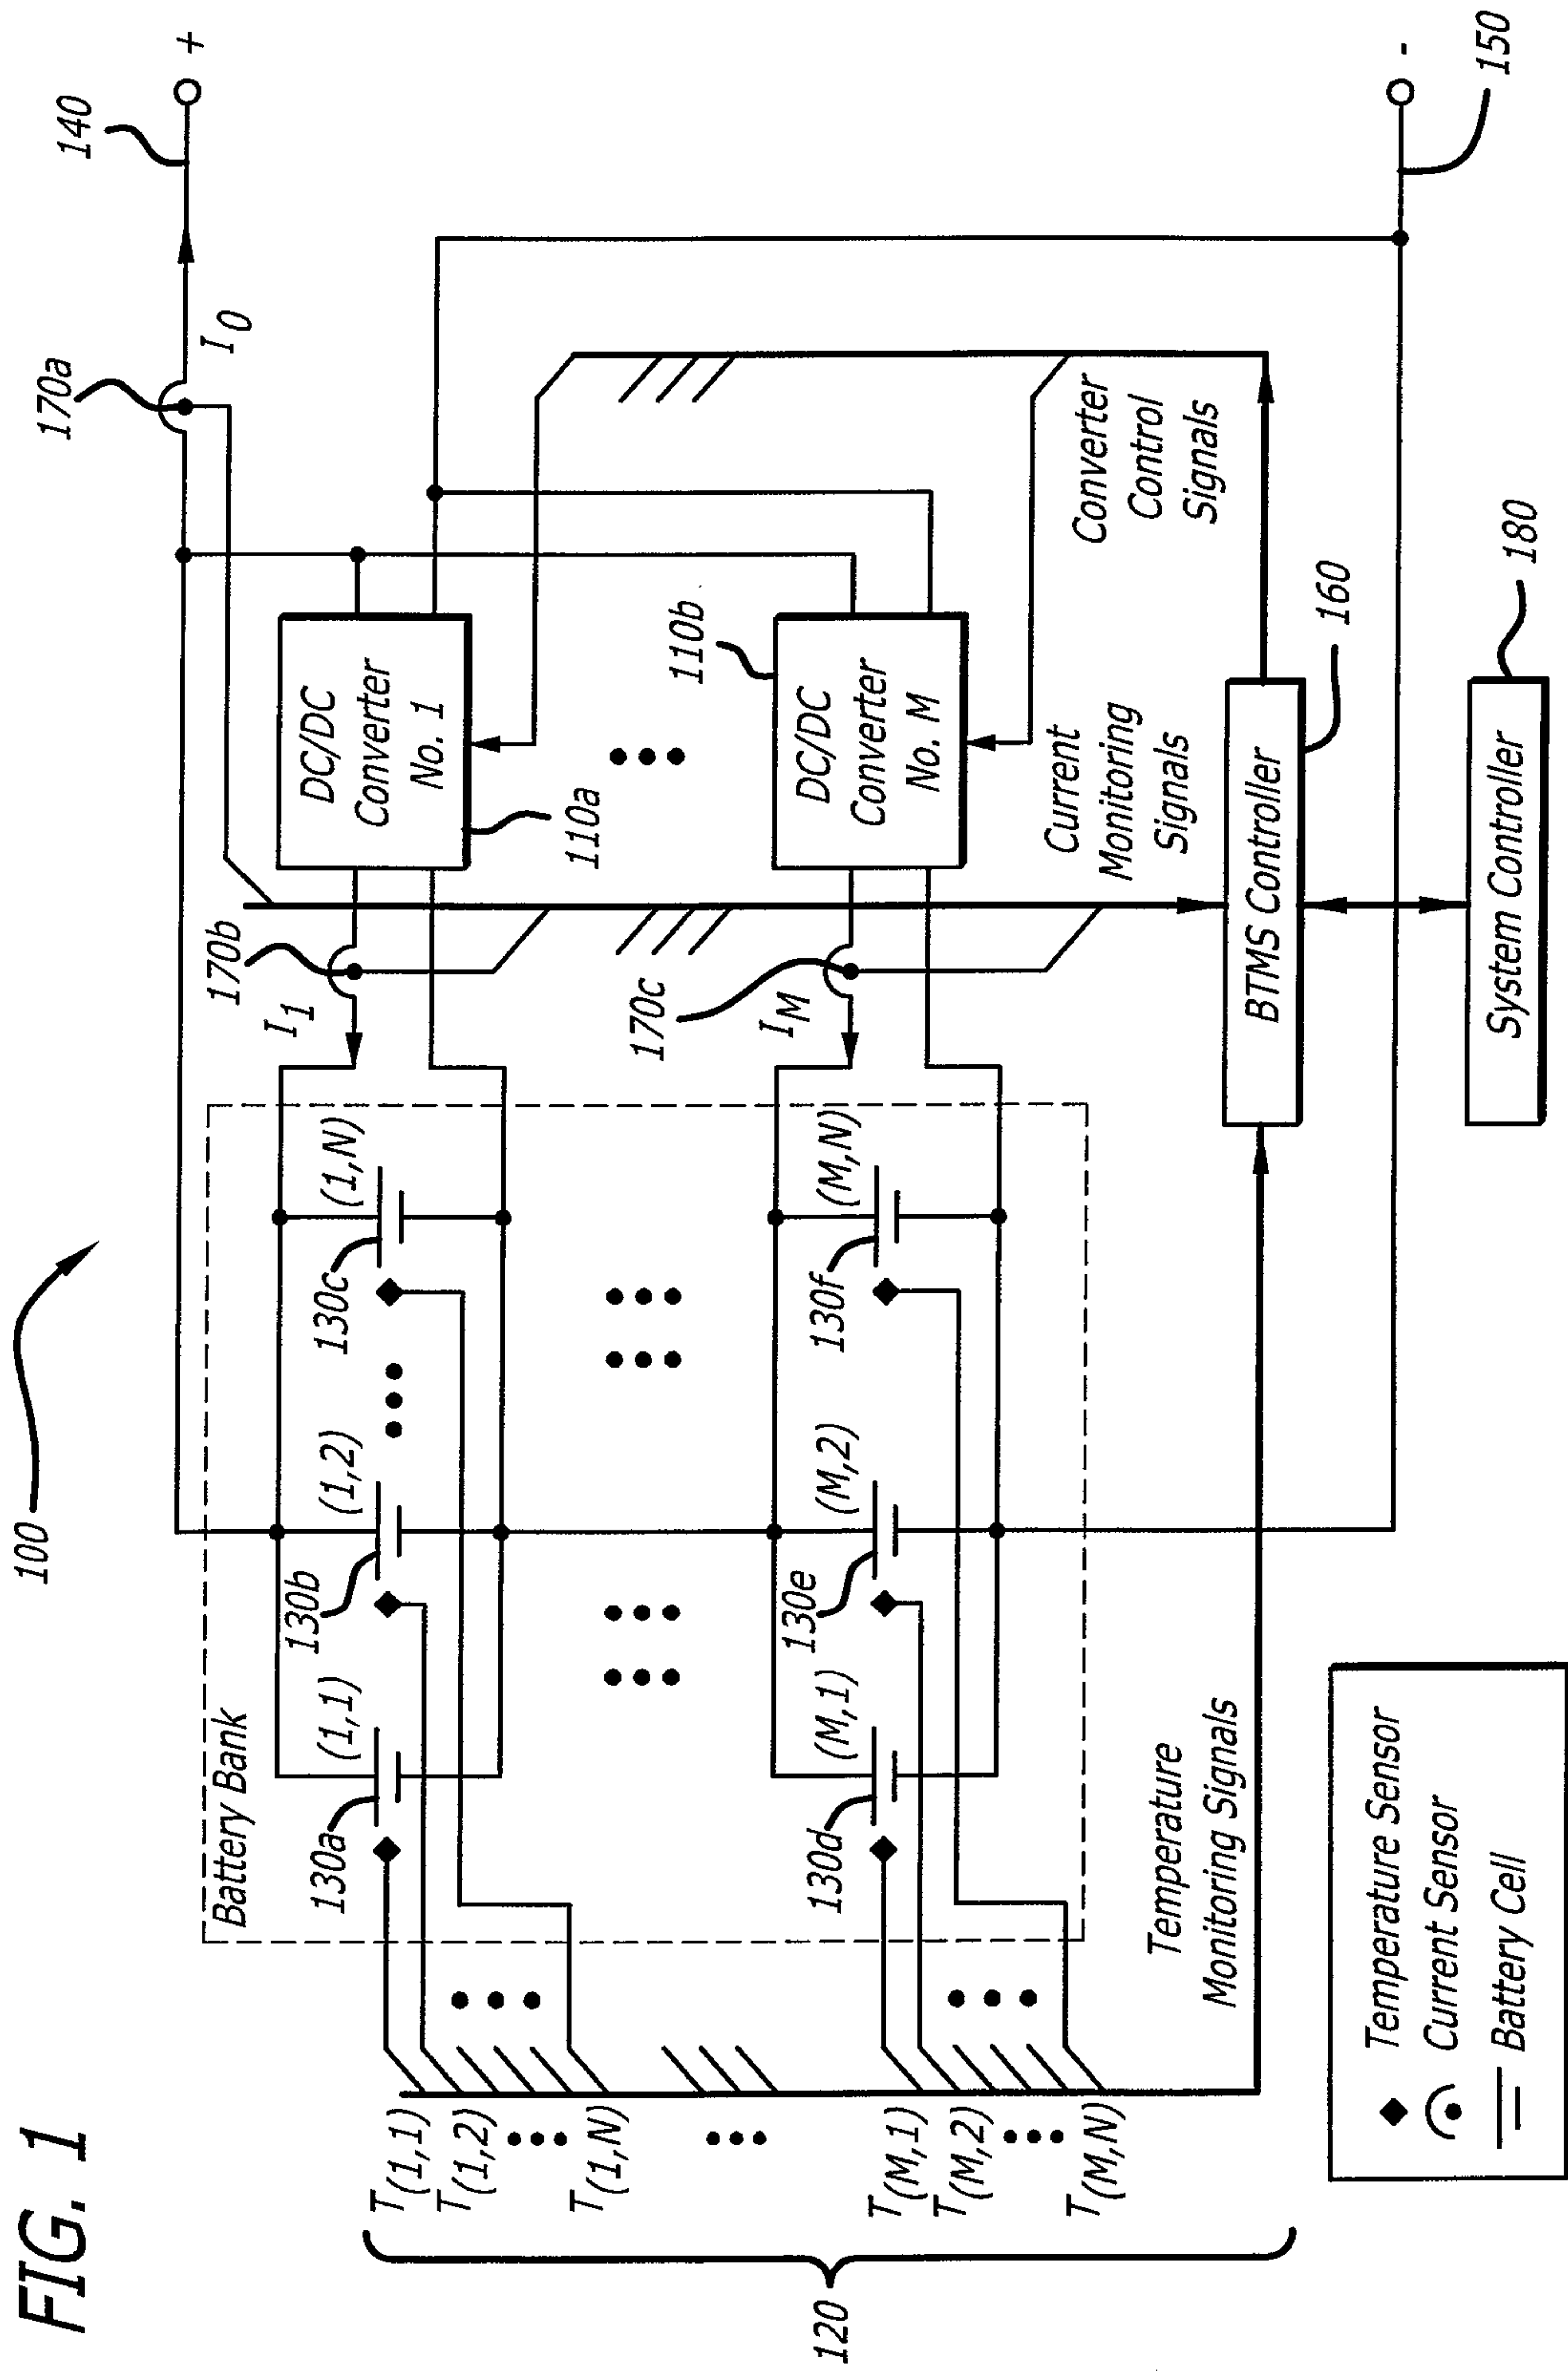


FIG. 2

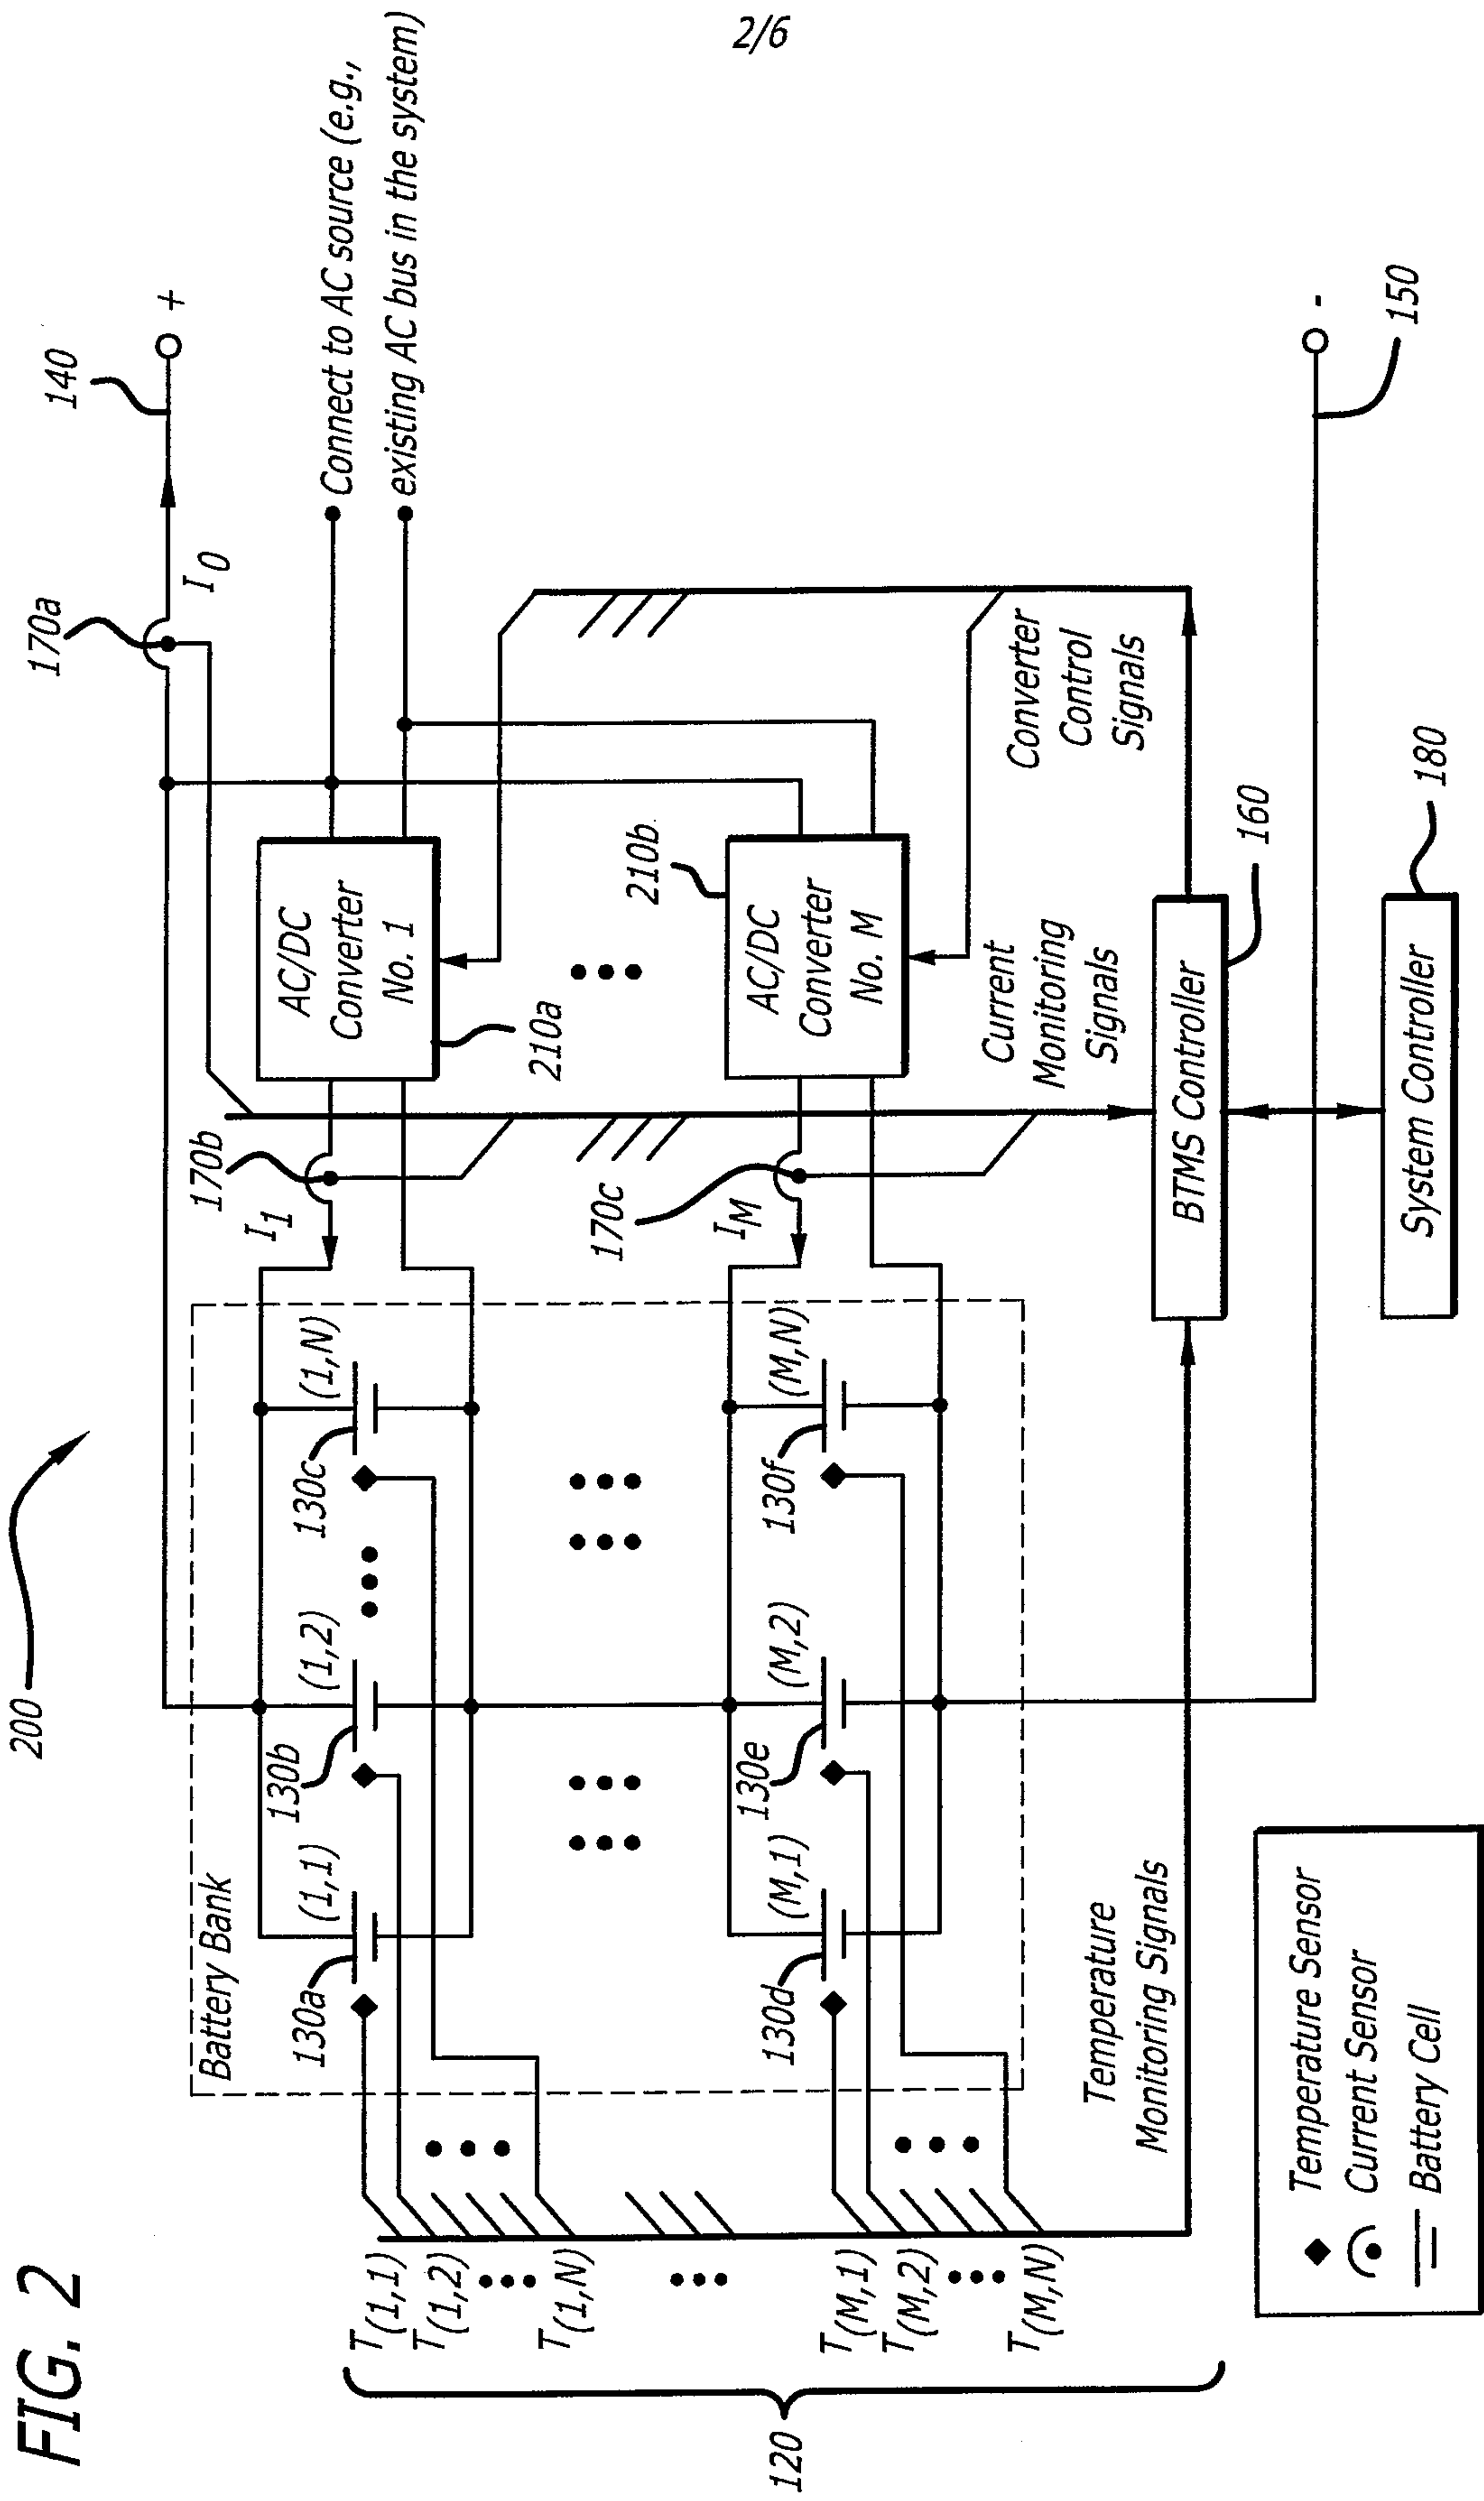

3/6


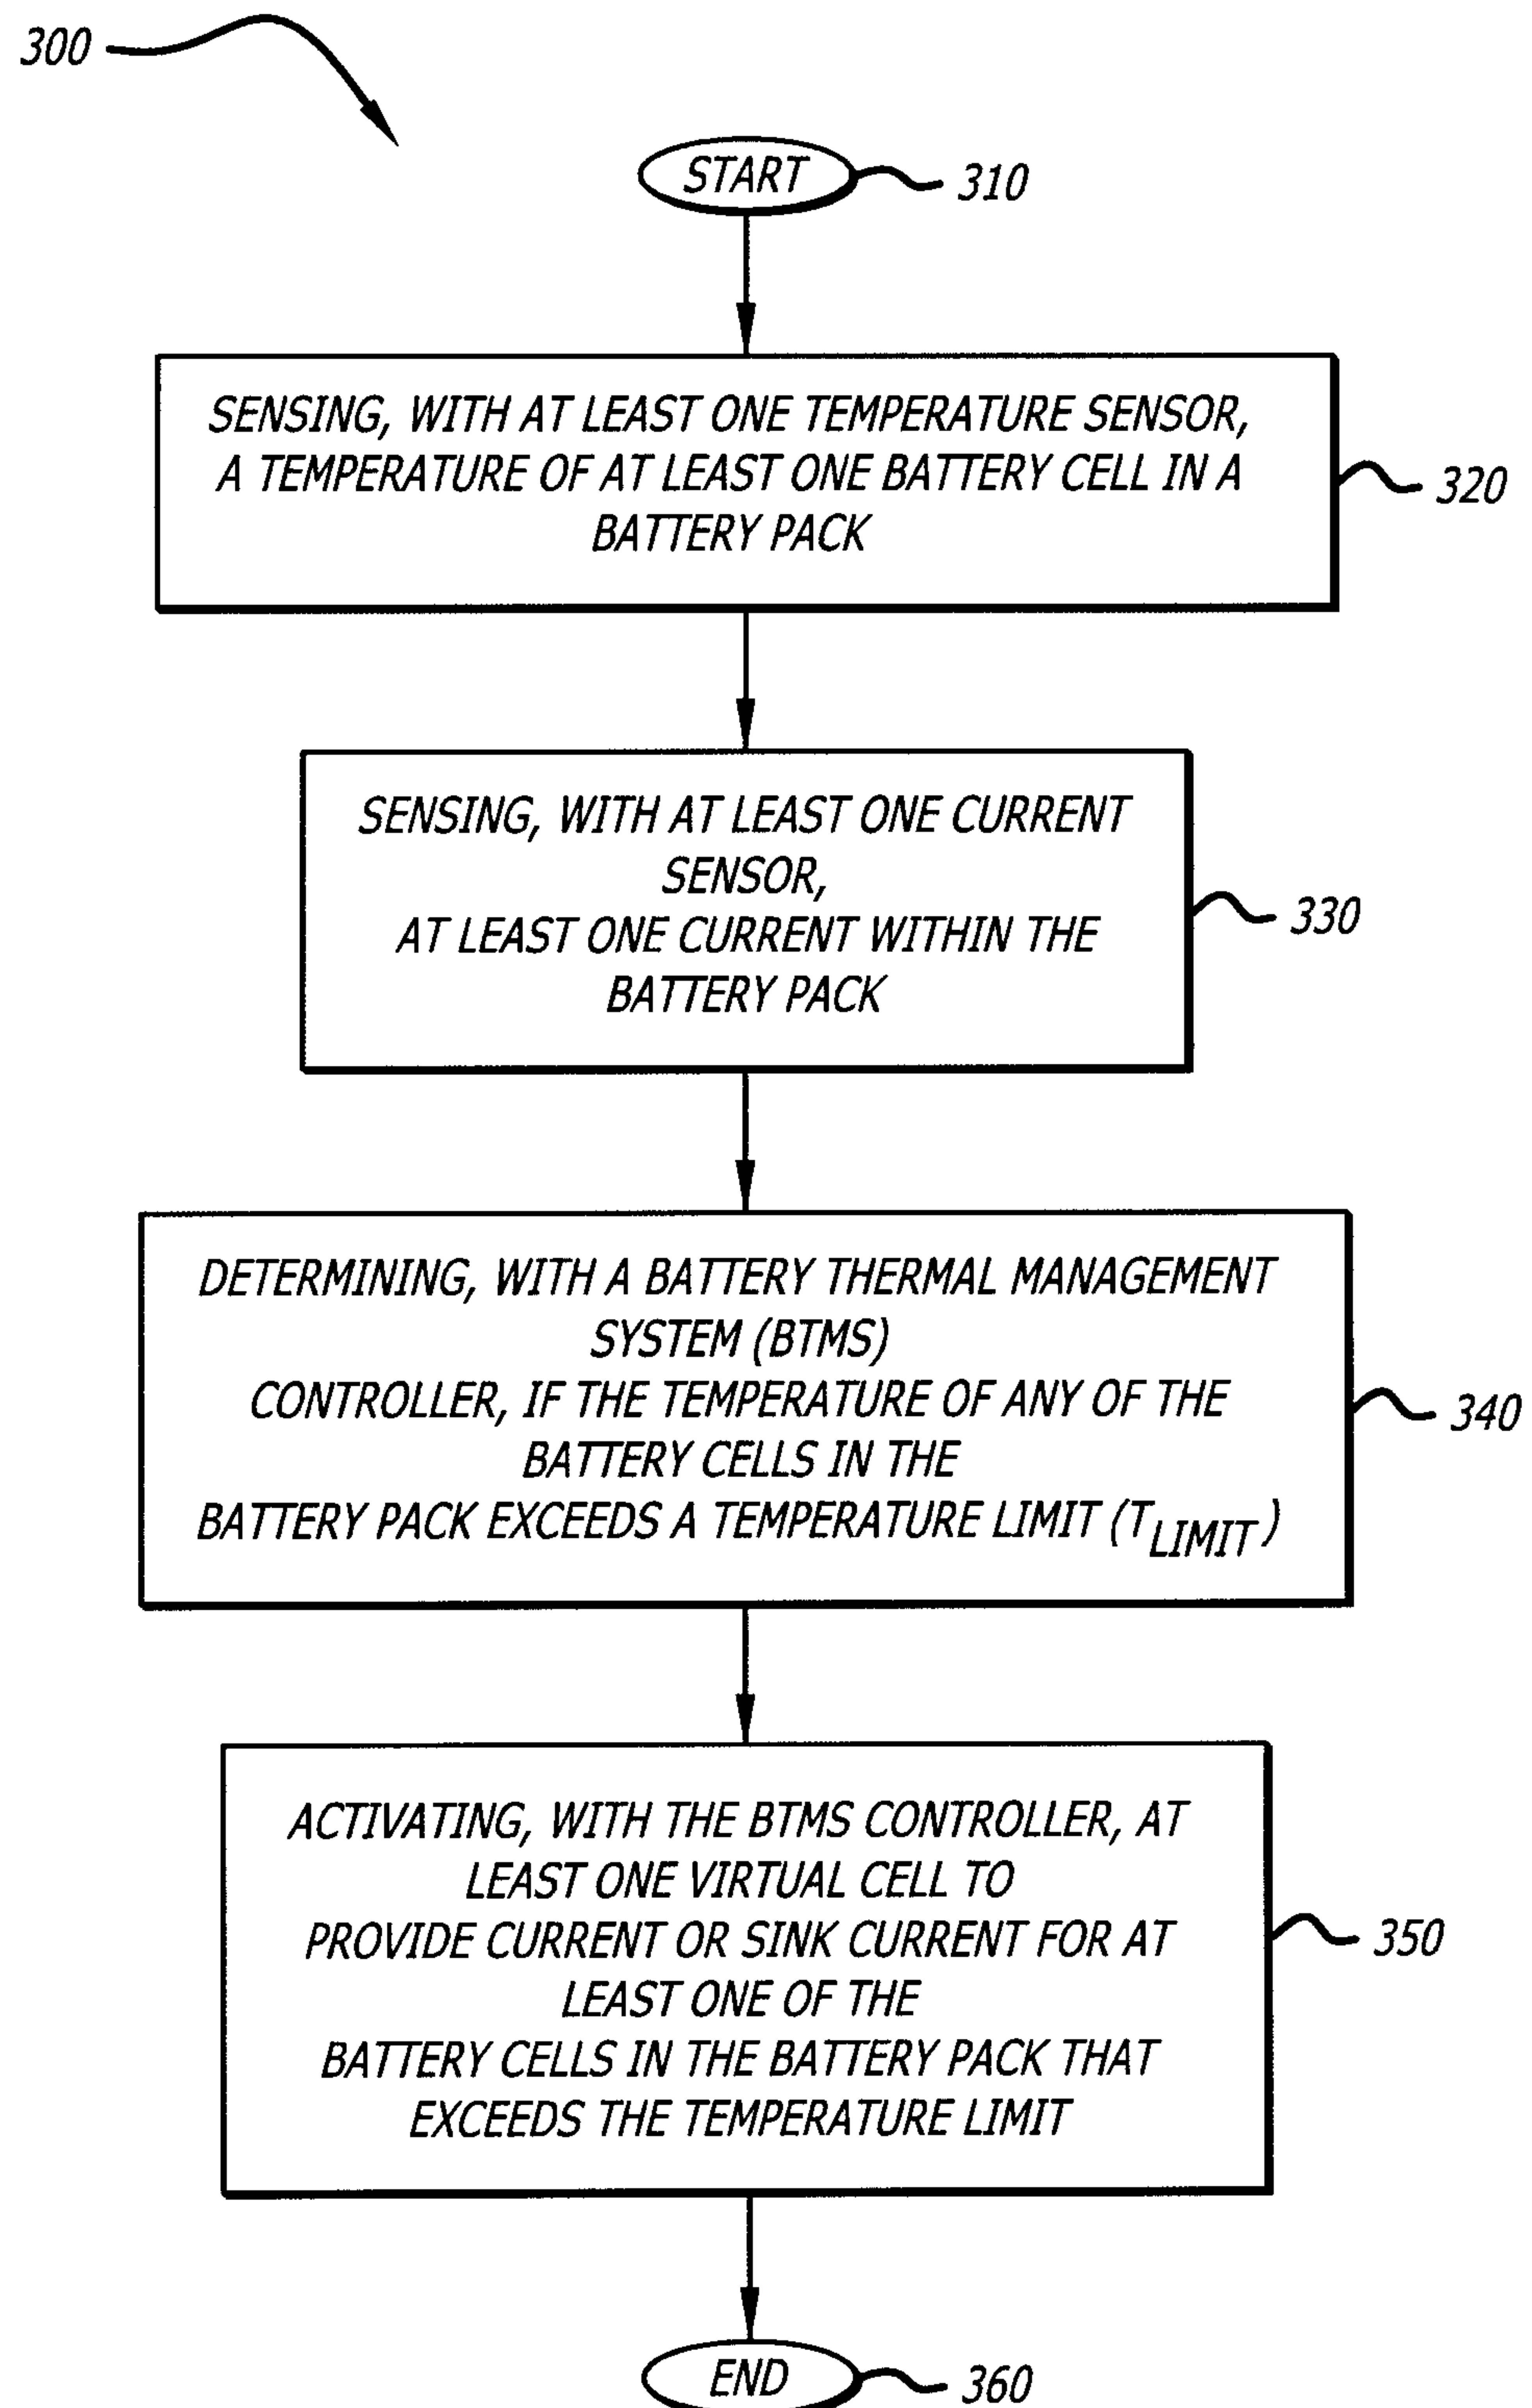



FIG. 3

FIG. 4

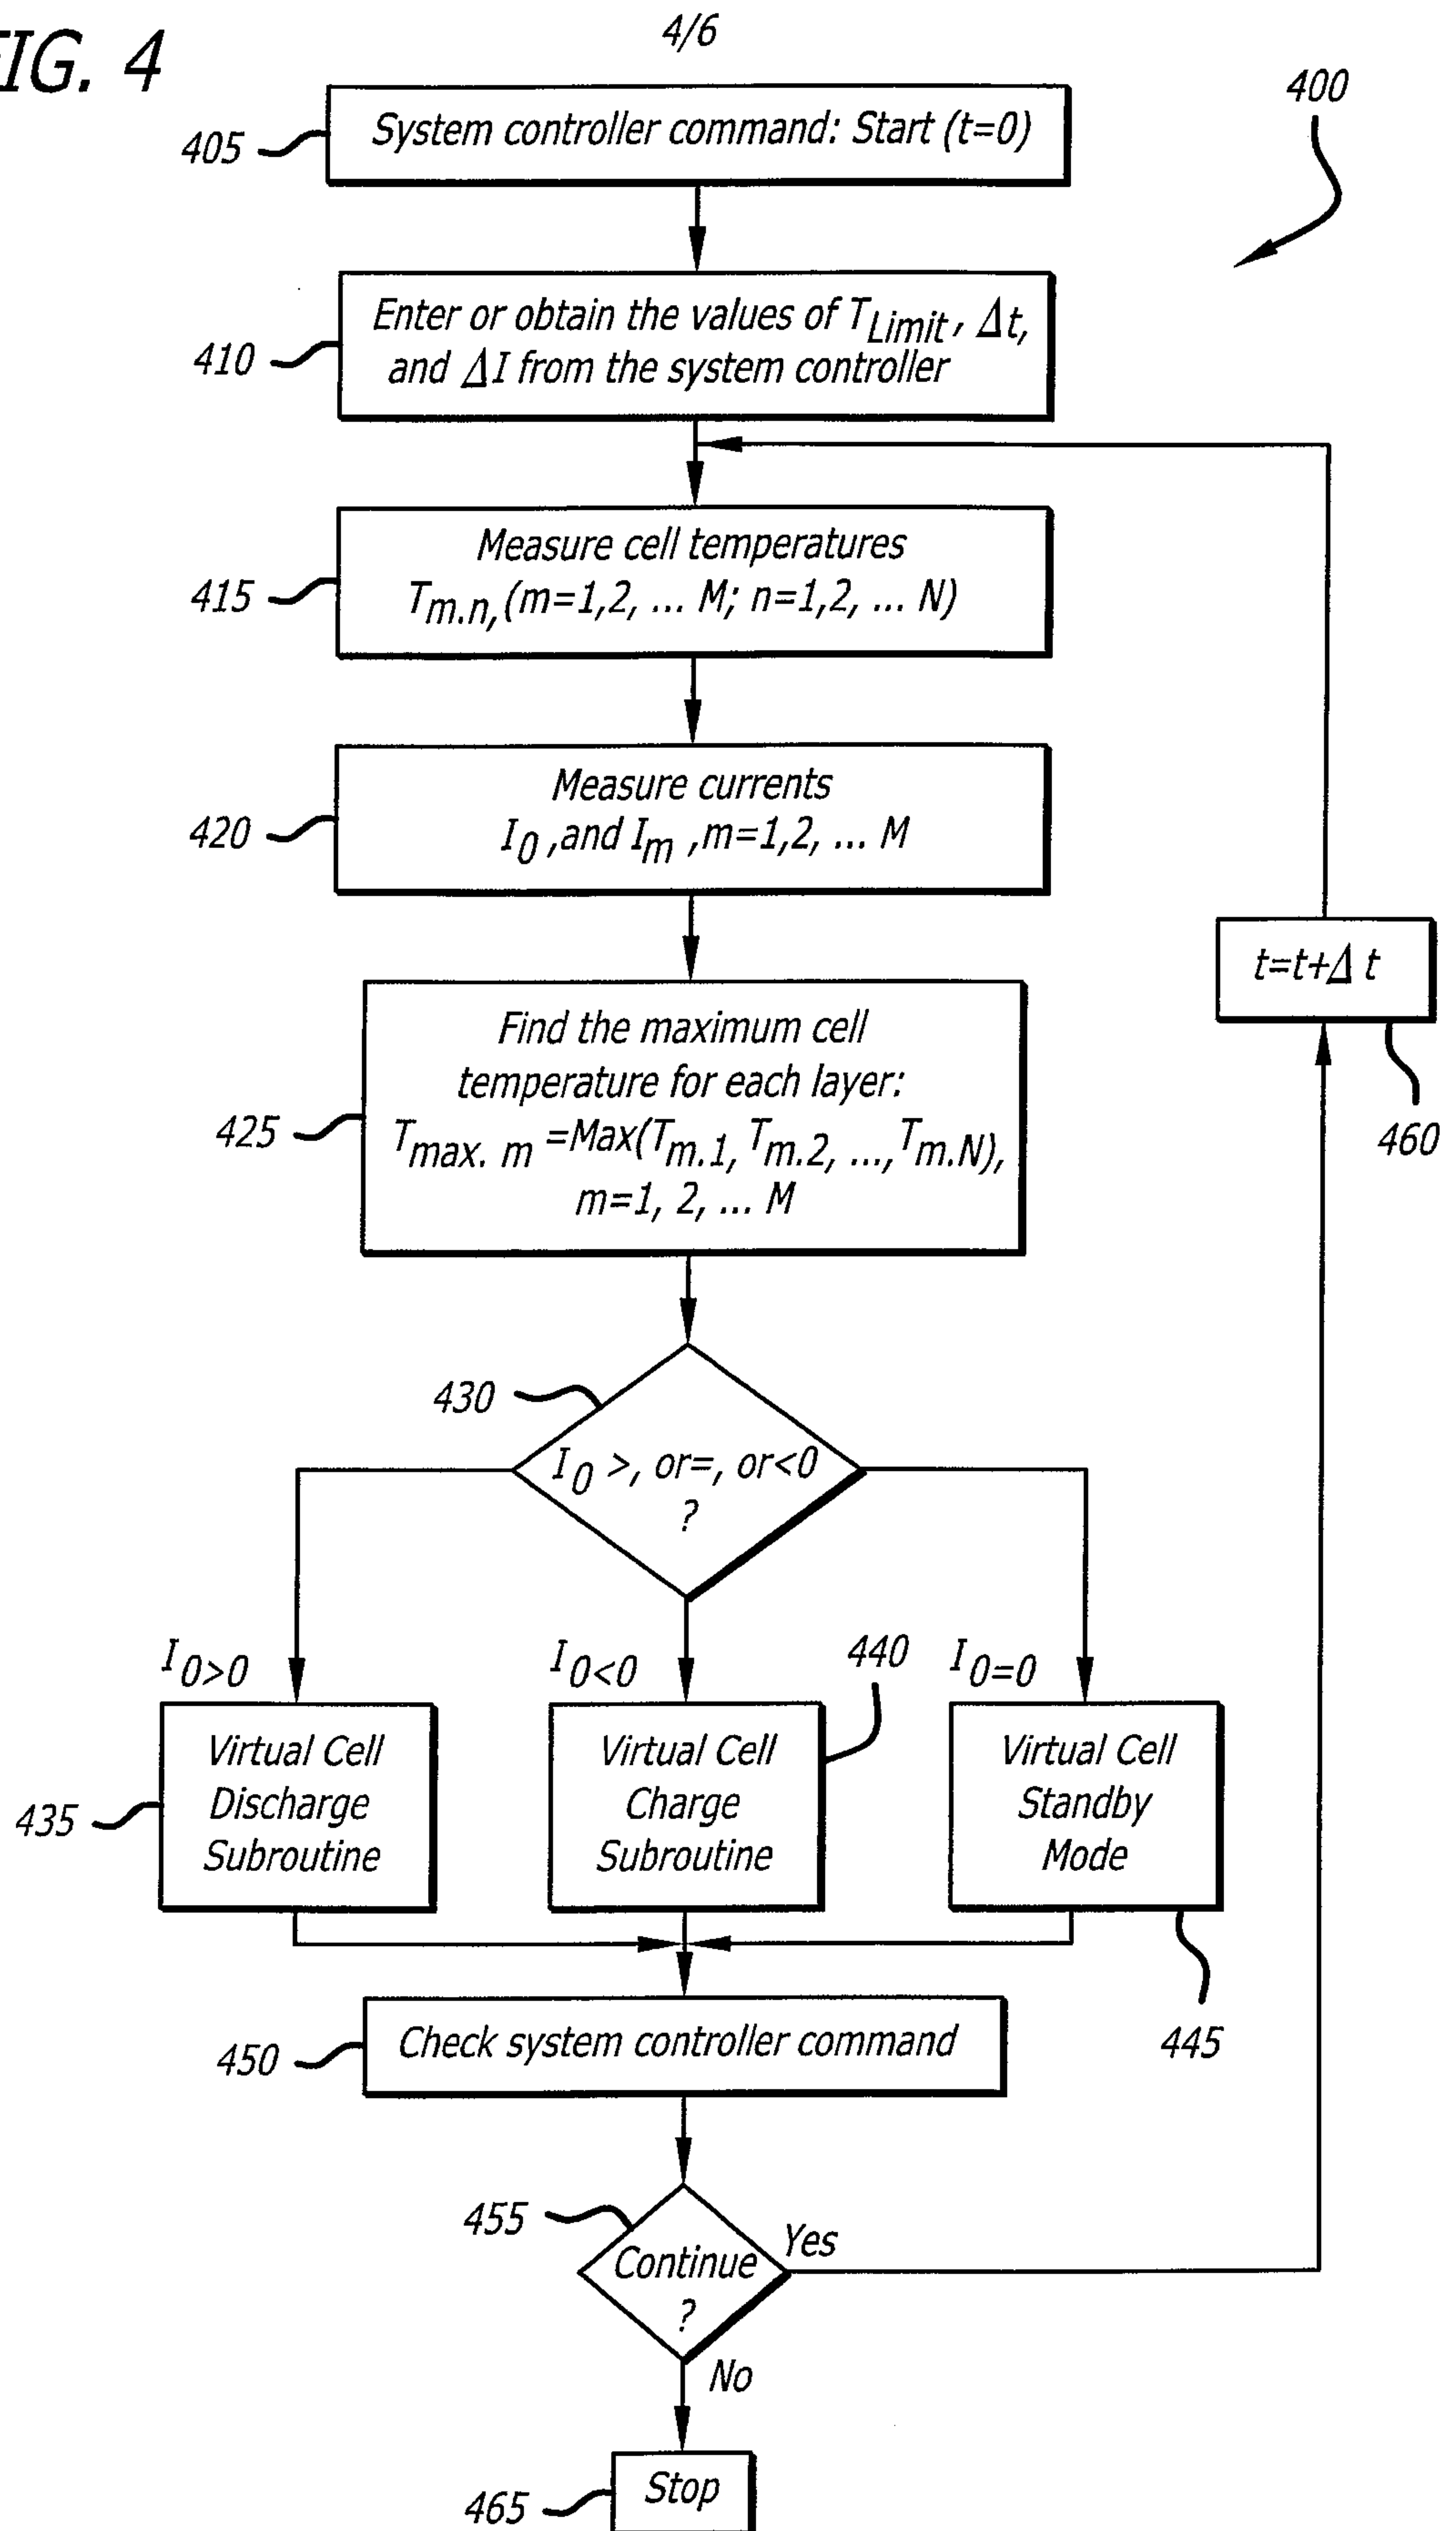

5/6

FIG. 5

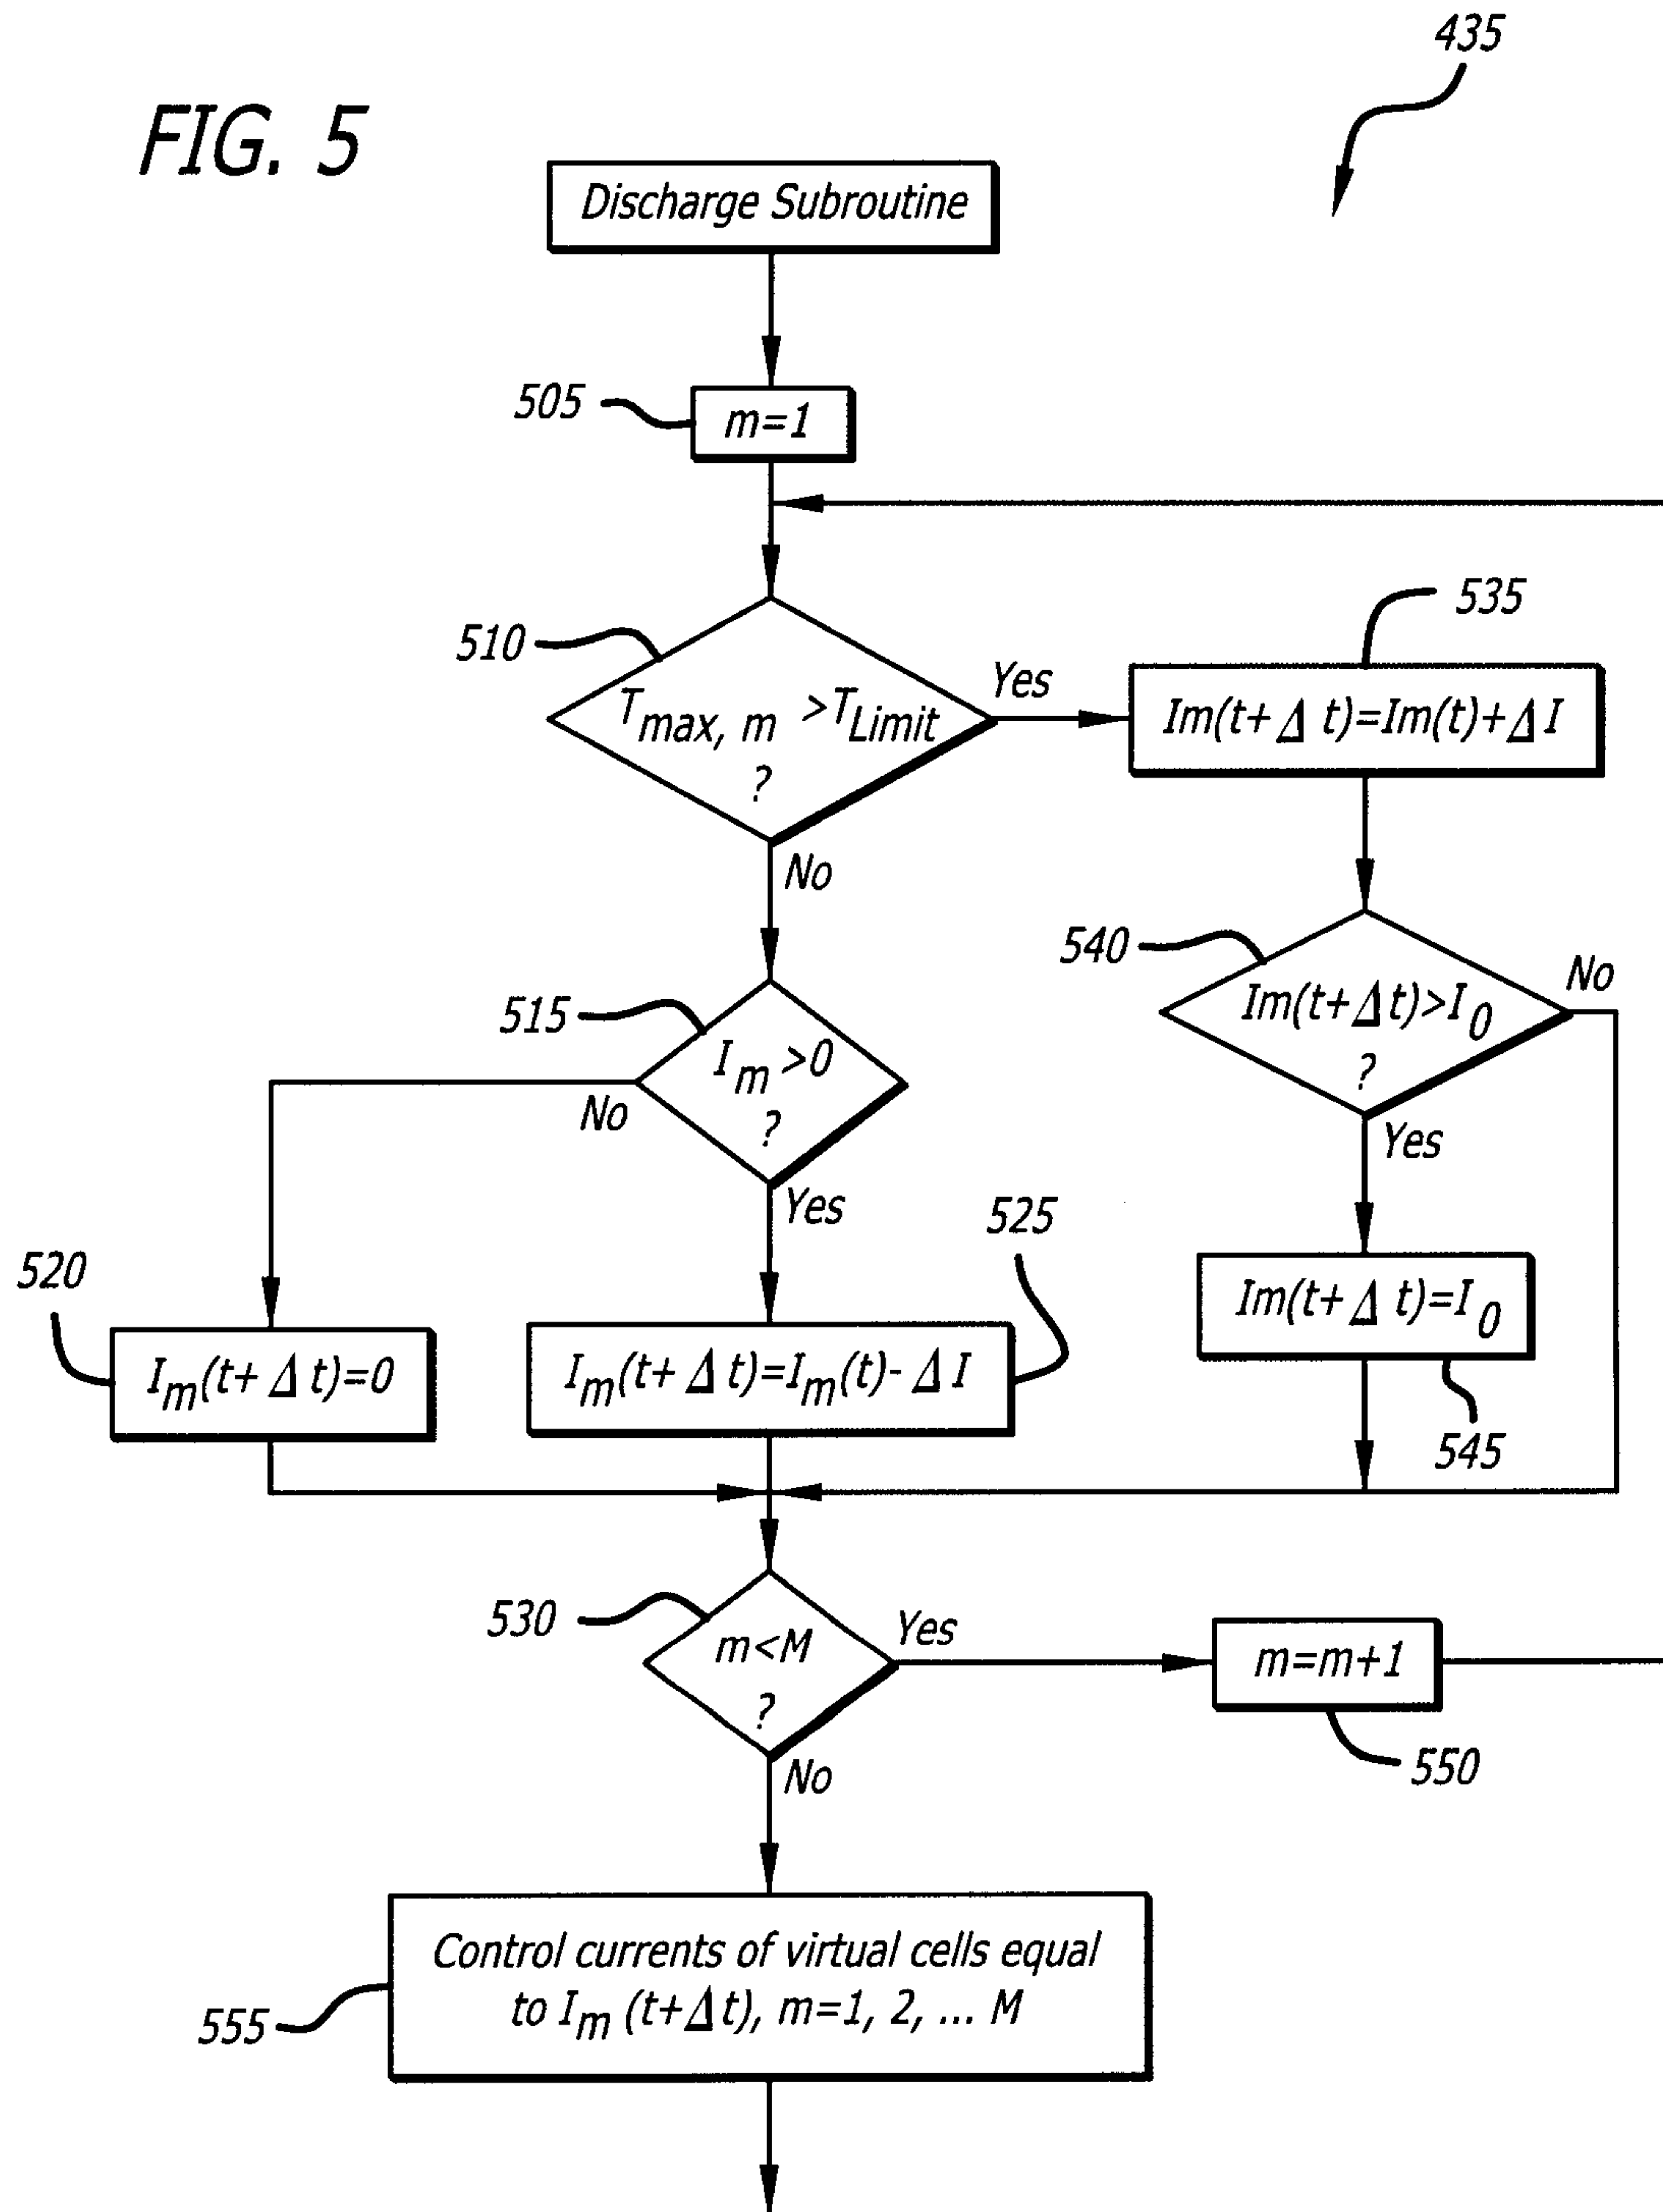

6/6

FIG. 6

