




(86) Date de dépôt PCT/PCT Filing Date: 2005/05/11
(87) Date publication PCT/PCT Publication Date: 2005/11/17
(45) Date de délivrance/Issue Date: 2012/11/13
(85) Entrée phase nationale/National Entry: 2006/11/08
(86) N° demande PCT/PCT Application No.: CA 2005/000715
(87) N° publication PCT/PCT Publication No.: 2005/107554
(30) Priorités/Priorities: 2004/05/12 (US10/843,321);
2004/09/09 (US10/936,699)

(51) Cl.Int./Int.Cl. *A47L 5/38* (2006.01),
A47L 9/28 (2006.01)
(72) Inventeur/Inventor:
CUNNINGHAM, J. VERN, CA
(73) Propriétaire/Owner:
CUBE INVESTMENTS LIMITED, CA
(74) Agent: RIDOUT & MAYBEE LLP

(54) Titre : SOUS-SYSTEME DE COMMANDE D'UN SYSTEME CENTRAL DE NETTOYAGE PAR ASPIRATION
(54) Title: CENTRAL VACUUM CLEANING SYSTEM CONTROL SUBSYSTEMS

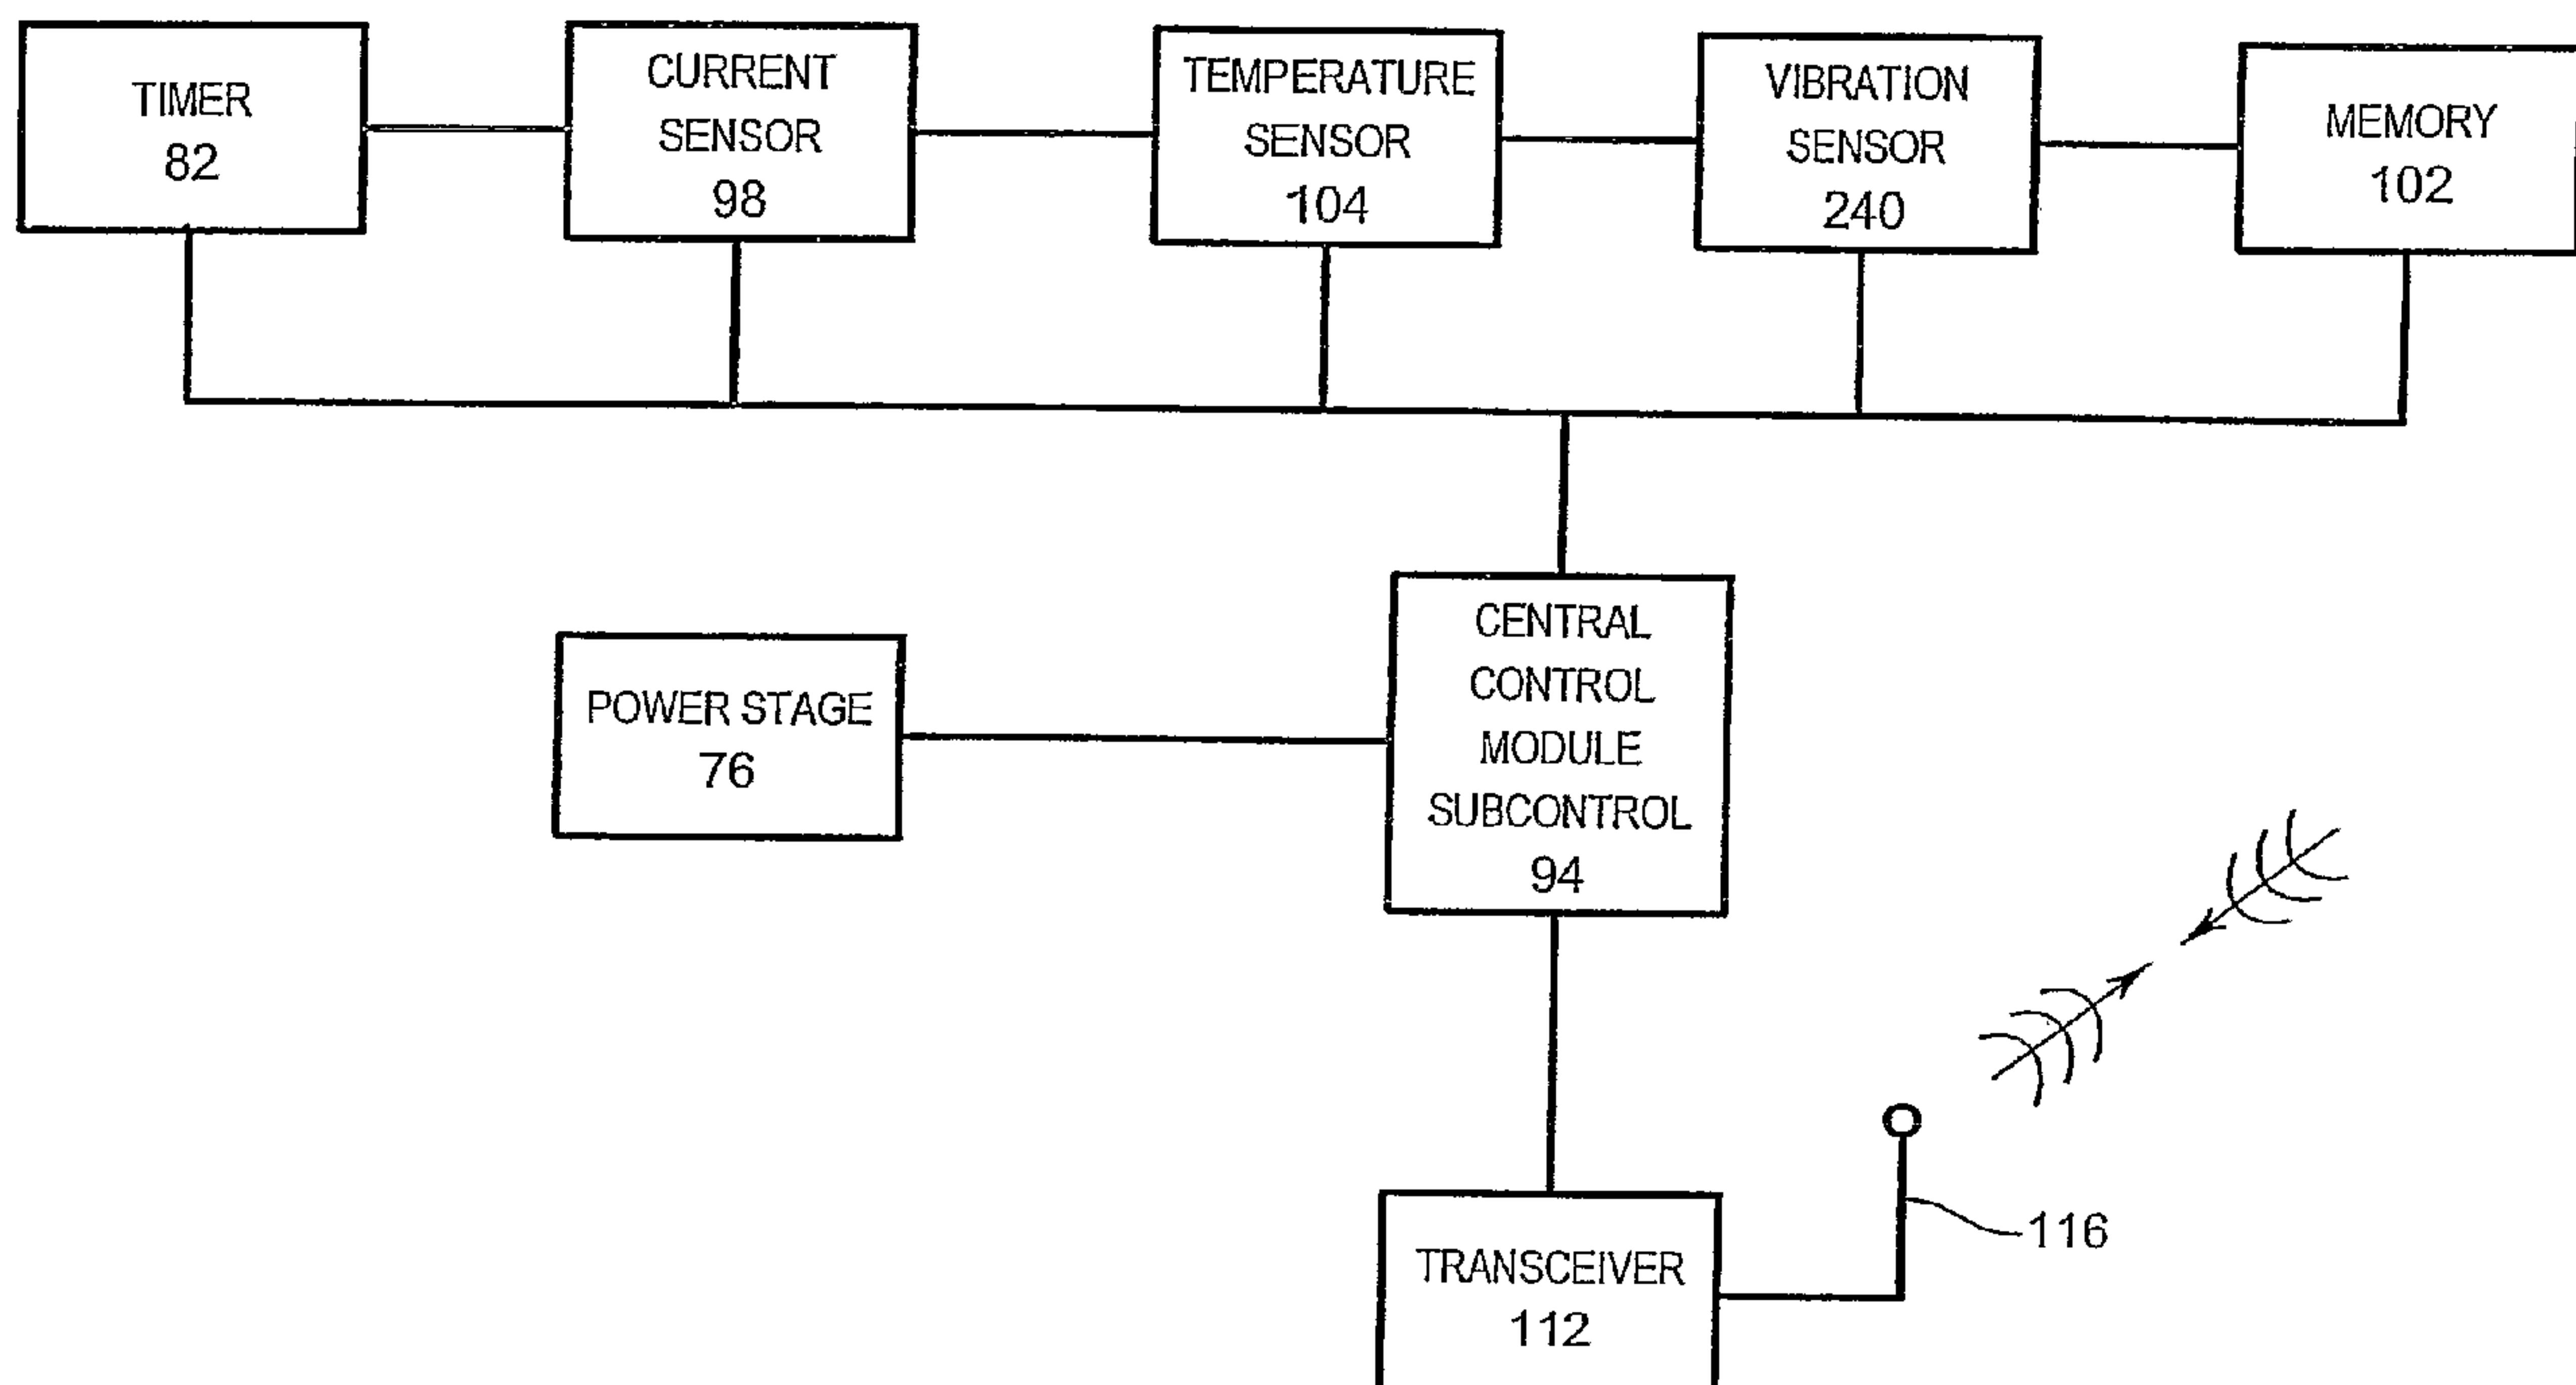

(57) **Abrégé/Abstract:**

A central vacuum cleaning system control subsystem for use in a central vacuum cleaning system having a motor includes a central vacuum unit control module with a receiver for wirelessly receiving command signals, and a power stage for controlling the motor in accordance with command signals received through the receiver. The control module is stable in high ambient temperature. Current flowing to the motor is sensed, and motor overcurrent and undercurrent conditions are determined. The control module determines when the motor is in an overcurrent condition. Power stage has a triac for controlling power to the motor. The control module also has a microprocessor that compares the current sensed against a normal operating current to determine overcurrent condition. Power to motor ceases when overcurrent condition exists. A generator is powered by air flow in a cleaning system for production of electrical energy.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
17 November 2005 (17.11.2005)

PCT

(10) International Publication Number
WO 2005/107554 A1

(51) International Patent Classification⁷: **A47L 5/38**, 9/28

(21) International Application Number:
PCT/CA2005/000715

(22) International Filing Date: 11 May 2005 (11.05.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/843,321 12 May 2004 (12.05.2004) US
10/936,699 9 September 2004 (09.09.2004) US

(71) Applicant (for all designated States except US): **CUBE INVESTMENTS LIMITED** [CA/CA]; 420 Industrial Parkway South, Aurora, ON L4G 3V7 (CA).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **CUNNINGHAM, J. Vern** [CA/CA]; 62 Haskell Crescent, Aurora, ON M4P 1V2 (CA).

(74) Agent: **WILKES, Robert H.**; 133 Lowther Ave., Toronto, Ontario M5R 1E4 (CA).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to the identity of the inventor (Rule 4.17(i)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE,

[Continued on next page]

(54) Title: CENTRAL VACUUM CLEANING SYSTEM CONTROL SUBSYSTEMS

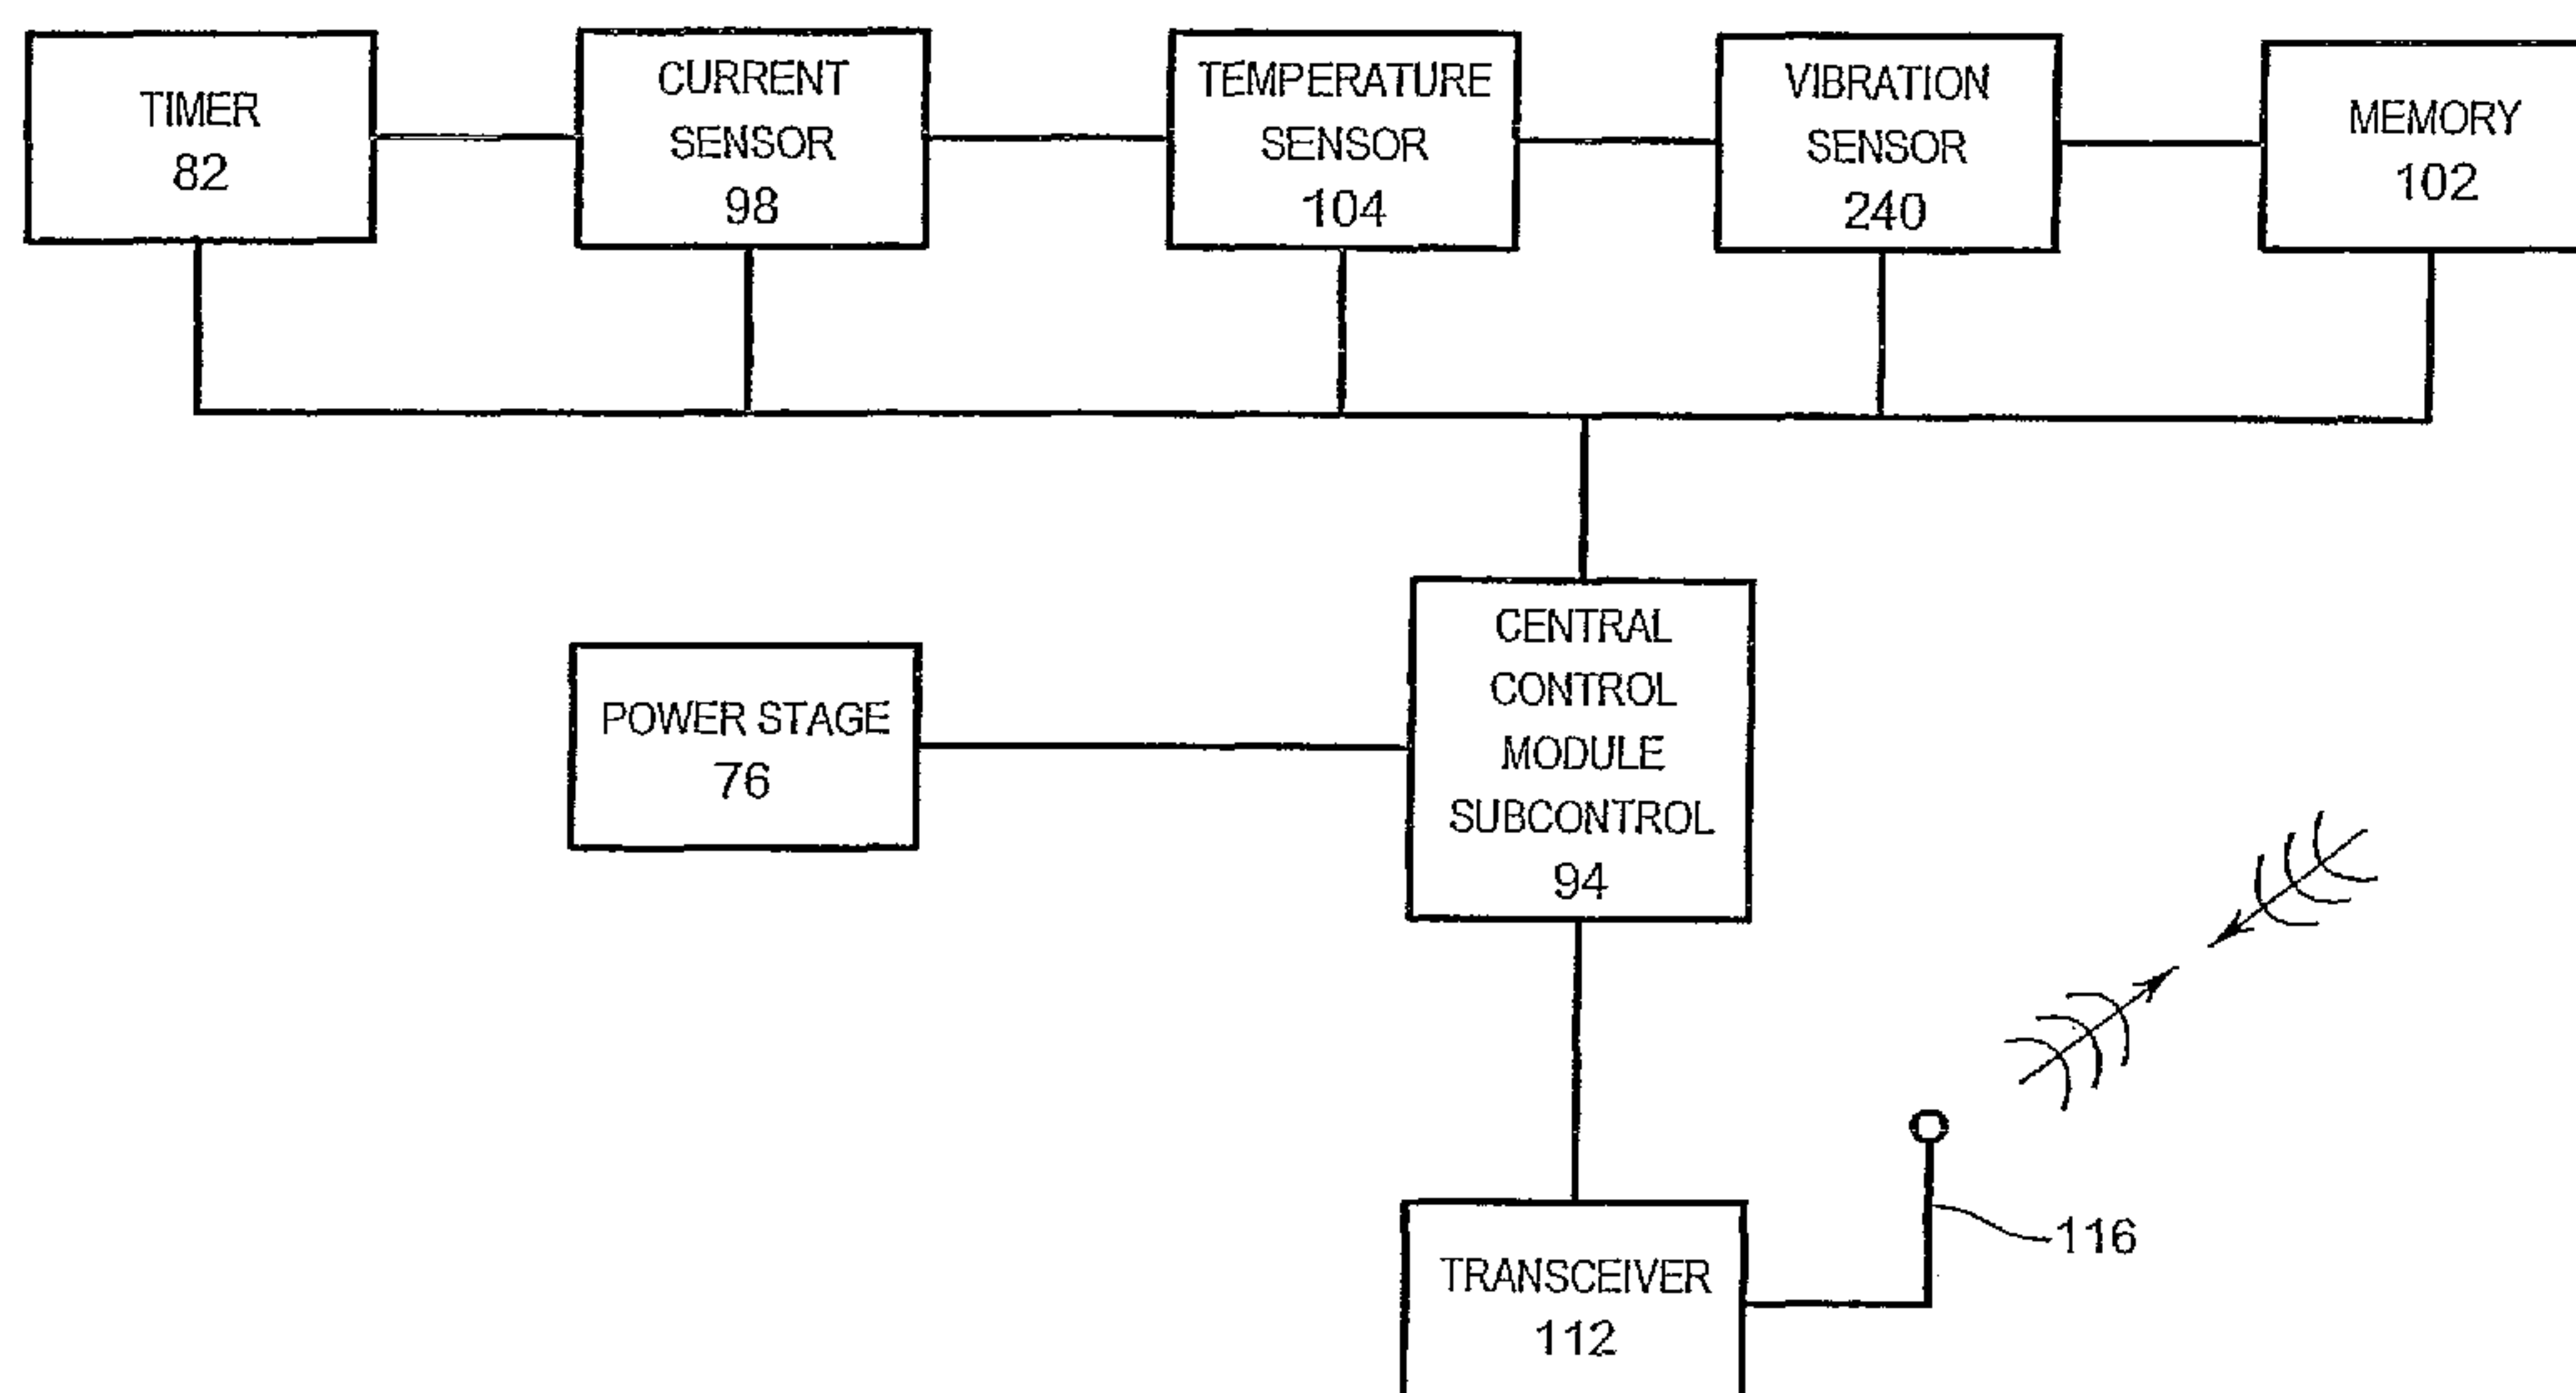

(57) Abstract: A central vacuum cleaning system control subsystem for use in a central vacuum cleaning system having a motor includes a central vacuum unit control module with a receiver for wirelessly receiving command signals, and a power stage for controlling the motor in accordance with command signals received through the receiver. The control module is stable in high ambient temperature. Current flowing to the motor is sensed, and motor overcurrent and undercurrent conditions are determined. The control module determines when the motor is in an overcurrent condition. Power stage has a triac for controlling power to the motor. The control module also has a microprocessor that compares the current sensed against a normal operating current to determine overcurrent condition. Power to motor ceases when overcurrent condition exists. A generator is powered by air flow in a cleaning system for production of electrical energy.

WO 2005/107554 A1



DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations
- of inventorship (Rule 4.17(iv)) for US only

Published:

- with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Central Vacuum Cleaning System Control Subsystems

TECHNICAL FIELD

The invention relates to central vacuum cleaning systems. More particularly, it relates to control subsystems for central vacuum cleaning systems.

BACKGROUND ART

Many modern buildings have central vacuum cleaning systems. These systems have a suction motor to create a vacuum in a series of pipes through the building. A user of the system connects a flexible hose to one of the pipes. The hose has a handle for the user to grasp. The handle is further connected to one or more cleaning accessories.

The motor is housed in a motor housing that typically forms part of a central vacuum unit, often referred to as a "canister". The canister also has a receptacle portion for receiving dust and other particles picked up through the cleaning accessories and transported by the vacuum through the hose and pipes.

The canister is usually placed in a central location that is easily accessible for emptying the receptacle. The motor is typically powered by line voltage that is controlled by a motor control circuit in the motor housing.

Low voltage wires typically run beside, or form part of, the pipes and hose between the canister and the handle. This permits the user to control the motor by sending low voltage signals from the handle to the motor control circuit. In order to receive the low voltage signals, an opening is provided in the motor housing through which the low voltage wires can be connected to the motor control circuit.

Installation of the low voltage wires can involve a great deal of effort, particularly when the

system is being installed in an existing building. It is known to use a hand held radio frequency remote control to control a central vacuum unit. It is known to transmit control signals through existing power lines in a building. Add-on remote control units for turning on and off a central vacuum unit are also known.

- 5 Improvements to, or alternatives for, existing central vacuum cleaning systems and central vacuum cleaning system control subsystems are desirable.

DISCLOSURE OF THE INVENTION

In a first aspect embodiments provide a central vacuum cleaning system. The system has a line power input, a vacuum unit comprising a dirt collection unit, at least one dirty air intake conduit
 10 defining an airflow path to the vacuum unit and terminating in the dirt collection unit, a vacuum motor adapted to generate a working airflow from the dirty air intake conduit to the dirt collection unit, and a programmable control unit comprising a power conditioning module and adapted to be programmed with a control program that controls provision of the power conditioning module to provide power from the line power input to drive the vacuum motor,
 15 and wherein the dirt collection unit, and the vacuum motor are located in the vacuum unit and the programmable control unit is operatively connected to the vacuum motor.

The power conditioning module may be controlled by the programmable control unit to deliver power to the vacuum motor. The programmable control unit may be located in the vacuum unit. The control program may be stored in a memory structure in the programmable control
 20 unit. The programmable control unit may comprise a memory structure and the programmable control unit may be adapted to record operational data relating to operation of the central vacuum cleaner system in the memory structure. The operational data may comprise measured motor current levels.

The programmable control unit may further comprise a service tool interface. The service tool
 25 interface may comprise an interface selected from the group consisting of a connector, a wireless interface and combinations thereof. The service tool interface may comprise an interface comprising a wireless interface.

The programmable control unit may further be adapted to execute a power shut off if at least one error condition is detected from the group consisting of a detected locked motor rotor, a
 30 detected current level exceeding a predetermined threshold, a detected temperature exceeding a predetermined threshold, a period of continuous vacuum motor operation exceeding a predetermined threshold, and combinations thereof.

The central vacuum cleaning system may further comprise a remote user interface in communication with the programmable control unit and adapted to permit a user of the system to restart the central vacuum cleaner system after a power shut off event. The user interface in communication with the programmable control unit may output status information during
 5 operation of the central vacuum cleaning system based on the operating condition of the vacuum motor. The dirt collection unit, and the vacuum motor may be located in the vacuum unit and the programmable control unit is operatively connected to the vacuum motor.

The programmable control unit may comprise a microprocessor-based printed circuit board (PCB).

10 The user interface may be adapted to receive user inputs.

The programmable control unit further may comprise a current sensor operatively connected to sense current drawn by the motor, and the user interface output status information based on the operating condition of the motor is further based on the current drawn by the motor sensed by the current sensor.

15 The user interface may comprise an indicator panel with one or more status indicators.

The programmable control unit may further be adapted to output status information comprising one or more error conditions selected from the group consisting of a detected locked motor rotor, a detected current level exceeding a predetermined threshold, a detected temperature exceeding a predetermined threshold, a period of continuous vacuum motor operation
 20 exceeding a predetermined threshold, and combinations thereof.

The error condition may be a detected locked motor rotor, a detected current level exceeding a predetermined threshold, a detected temperature exceeding a predetermined threshold and/or a period of continuous vacuum motor operation exceeding a predetermined threshold.

25 The programmable control unit may further be adapted to determine the error condition based on current drawn by the motor.

The user interface may be located at a remote station apart from the vacuum source and the handle. The user interface may comprise an LCD screen and/or a multiple colour light source. The multiple colour light source may comprise multiple single colour LED light sources and/or a multi-colour LED.

30

The control unit is further adapted to vary the power provided to the vacuum motor so as to vary the working airflow generated by the vacuum motor. The control unit may further be adapted to vary the power provided to the vacuum motor so as to vary the working airflow generated by the vacuum motor, and wherein the control unit may vary the working airflow generated by the vacuum motor in response to user input from the user interface. The control unit may vary the power provided to the vacuum motor by phase control. The power provided to the vacuum motor may be varied with a triac.

The programmable control unit further may further comprise an autodialer to communicate information about the central vacuum cleaning system with a remote location. The programmable control unit may be configured to communicate information with the remote location in response to a predetermined condition. The programmable control unit may be configured to communicate information to the remote location in response to an inquiry from the remote location.

The central vacuum cleaning system may comprise a display means at a location remote from the vacuum unit, input means, and duplex communication means to provide control signals from the input means to the programmable control unit and to receive at the remote location from the programmable control unit a plurality of messages regarding the status of the system, such information to drive the display means for communication with an operator.

The duplex communications means may comprise low voltage wires between the display means and the programmable control unit. The duplex communications means may comprise low voltage wires between the input means and the programmable control unit. The duplex communications means may comprise a RF wireless receiver at the remote location and a RF wireless transmitter through which the programmable control unit transmits the messages. The duplex communications means may comprise a RF wireless transmitter through which the input means transmits control signals and a RF wireless receiver through which the programmable control unit receives the control signals.

The input means and the display means may be located on the handle, and the duplex communications means may comprise an RF wireless receiver and RF wireless transmitter in the handle, and a RF wireless transmitter and RF wireless receiver through which the motor control circuit transmits the messages.

The central vacuum cleaning system may comprise a display means to provide a plurality of different messages to a user regarding the status of the system, wherein the display means may be driven by the programmable control unit to provide the messages to the user.

The central vacuum cleaning system may comprise valves to which a flexible hose can be connected, a handle to be held by an operator, the hose terminating at the handle, and a cleaning attachment connected to the handle, wherein the at least one dirty air intake conduit may be operatively connected to the valves such the working airflow is generated by a vacuum created by the vacuum source through the attachment, the handle, the hose, a valve connected to the hose, and the conduit to the dirt collection unit.

10 In a second aspect embodiments provide a method of operating a central vacuum cleaning system. The method comprises controlling, using a programmable control unit having a power conditioning module, provision of power from a line power input to drive a vacuum motor in a vacuum unit to generate a working airflow from a dirty air intake conduit to a dirt collection unit in the vacuum unit, and outputting status information based on at least one operating
15 condition of the vacuum motor to a user interface in communication with the programmable control unit during operation of the central vacuum cleaning system.

The method of operating a central vacuum cleaning system may further comprise receiving user inputs to the programmable control unit, and wherein controlling using the programmable control unit to control provision of power may further comprise controlling based on the
20 received user inputs.

The method of operating a central vacuum cleaning system may further comprise sensing the current drawn by the vacuum motor, and wherein outputting status information based on at least one operating condition of the vacuum motor further comprises outputting such status information further based on the sensed current drawn by the vacuum motor.

25 Outputting status information based on at least one operating condition of the vacuum motor further may comprise outputting such status information comprising an error condition selected from the group consisting of a detected locked motor rotor, a detected current level exceeding a predetermined threshold, a detected temperature exceeding a predetermined threshold, a period of continuous vacuum motor operation exceeding a predetermined threshold, and combinations
30 thereof.

The method of operating a central vacuum cleaning system may further comprise generating the working airflow through valves operatively connected to the dirty air intake conduit, a handle to

be held by an operator, a flexible hose connected to a valve and terminating at the handle, and a cleaning attachment connected to the handle.

The programmable control unit may further be adapted to output status information comprising an error condition of a detected undercurrent level.

- 5 In a third aspect embodiments provide a method of operating a central vacuum cleaning system. The method comprises controlling, using a programmable control unit having a power conditioning module, provision of power from a line power input to drive a vacuum motor in a vacuum unit to generate a working airflow from a dirty air intake conduit to a dirt collection unit in the vacuum unit, and providing input control signals to the motor control circuit and
10 receiving at a location remote to the vacuum unit a plurality of messages from the motor control circuit regarding the status of the system, and displaying messages regarding the status of the system to a user based on the received messages from the motor control circuit.

In other aspects the invention provides methods of carrying out, components for, and systems using the other aspects of the invention as described above, and still further aspects based on the
15 detailed description herein.

BRIEF DESCRIPTION OF THE DRAWINGS

For a better understanding of the present invention and to show more clearly how it may be carried into effect, reference will now be made, by way of example, to the accompanying drawings that show the preferred embodiment of the present invention and in which:

- 20 FIG. 1 is a schematic diagram of a central vacuum cleaning system control subsystem in accordance with the preferred embodiment of the present invention;

FIG. 2 is a side view of a central vacuum cleaning system hose handle for use with the subsystem of FIG. 1;

- FIG. 3 is a side view of an alternate central vacuum cleaning system hose handle for use with
25 the subsystem of FIG. 1;

FIG. 4 is a plan view of the handle of FIG 3;

FIG. 5 is a schematic diagram of a power stage for use in the subsystem of FIG. 1;

FIG. 6 is a schematic diagram of an alternate power stage for use in the subsystem of FIG. 1;

FIG. 7 is a block diagram of a central transmitter submodule for use in the subsystem of FIG. 1;

FIG. 8 is a block diagram of a central receive submodule for use in the subsystem of FIG. 1;

FIG. 9 is a block diagram of a central transceiver submodule for use in the subsystem of FIG. 1;

FIG. 10 is a block diagram of a central timer submodule for use in the subsystem of FIG. 1;

5 FIG. 11 is a block diagram of a central operating condition submodule for use in the subsystem of FIG. 1;

FIG. 12 is a block diagram of a central operating condition sensors for use in the central operating condition submodule of FIG. 11;

10 FIG. 13 is a block diagram of a remote transceiver submodule for use in the subsystem of FIG. 1;

FIG. 14 is a detailed block diagram of a central control submodule for use in the subsystem of FIG. 1;

FIG. 15 is a side cross-section of a building incorporating a central vacuum cleaning system using an embodiment of the subsystem of FIG. 1;

15 FIG. 16 is a cut-away perspective view of a vacuum source for use in the cleaning system of FIG. 15 incorporating an embodiment of the subsystem of FIG. 15;

FIG. 17 is a cross-section of a hose handle utilizing a battery charging device in accordance with an embodiment of the present invention;

FIG. 18 is a cut-away partial perspective view of an alternate vacuum source for use in the

cleaning system of FIG. 15 incorporating an embodiment of the subsystem of FIG. 15, including an air powered generator in accordance with an embodiment of the present invention;

FIG. 19 is a cut-away partial perspective view of an alternate vacuum source for use in the cleaning system of FIG. 15 incorporating an embodiment of the subsystem of FIG. 15, including an air powered generator in accordance with an alternate embodiment of the present invention; and

FIG. 20 is a perspective of a portion of a building incorporating remote station in accordance with an accordance with an embodiment of the present invention.

MODE(S) FOR CARRYING OUT THE INVENTION

Referring to FIG. 1, a central vacuum cleaning system control subsystem 1 has a central control module 3 and a remote control module 5.

The central control module 3 controls power from a power source 7 to a motor 9, and by doing so the central control module 3 controls the operation of the motor 9. The power source 7 is typically line voltage, for example, 120V or 240V, 60Hz AC in North America or 230V, 50 Hz AC in Europe.

The remote control module 5 is connected to a user input/output interface 13. The remote control module 5 receives input from a user 11 through the interface 13. User input may be as simple as a request for a change of state of the motor 9 where the interface 13 would be a toggle switch 13.

The remote control module 5 is a wireless transmitter. It encodes the input received from the user for wireless transmission to the central control module 3 as indicated by the arcs 15. The central control module 3 is a wireless receiver. It receives the wireless transmission from the remote control module 5, decodes it and controls the motor 9 accordingly. For example, if the user requests the motor 9 to change state then if the central control module 3 is providing power from the source 7 to the motor 9 then the central control module 3 will cease doing so. If the central control module 3 is not providing power from the source 7 to the motor 9 then it will provide power.

The central control module 3 is also a wireless transmitter. The central control module 3 senses the operating condition of the motor 9, encodes a message related to the condition and wirelessly transmits the message to the remote control module 5 as indicated by the arcs 17. The message is received by the remote control module 5, decoded, and provided to the user through the interface 13.

Referring to FIG. 2, a hose handle 20 incorporates the interface 13 as a display means 21 and switch 23. A toggle switch 23 is shown in the FIGS.; however, various types of switches, such as for example a momentary switch, not shown, could be used. The display means 21 may take the form of one or more lights, such as LEDs and/or an LCD screen with icons. Alternatively, or in addition, the display means may have a speaker or buzzer to provide sound output to the user by way of voice or an alarm. A transducer may be used to create sounds. This provides bi-directional communication between the central control module 3 and the remote control module 5, and thereby provides bidirectional communication between the user 11 and the motor 9 as will be discussed further herein.

In a preferred embodiment, the central control module 3 is able to provide more complex control of the motor 9 beyond simply turning it on and off. For example, the central control module 3 may be able to adjust the speed at which the motor 9 operates. There are many different techniques for adjusting motor 9 speed, some of which are dependent on the type of motor 9.

For example, existing central vacuum cleaning systems typically use a universal motor 9. The speed of a universal motor 9 can be controlled by reducing the voltage applied to the motor 9. DC motors 9 have also been described for use as vacuum motors 9, see for example, co-pending PCT Patent Application No. PCT/CA03/00382 filed 12 March 2003, published 18 September 2003 as WO03075733A1. The speed of a DC motor 9 can be adjusted by adjusting the voltage for a series wound motor 9, or by controlling the excitation on the armature of a shunt wound motor 9.

Where the central control module 3 has the ability to control motor 9 speed then it may be desirable to provide for a "soft start". This can be done by starting the motor 9 at a slower desired speed and working up to a higher speed. This can increase the longevity of the motor 9, particularly for universal motors 9 where starting can result in a high inrush current that has a cumulative detrimental effect on motor 9 windings over time. Soft start control can be configured as an internal setting of the central control module 3 without requiring external user input.

The user 11 can be permitted to adjust the speed of the motor 9 on demand by requesting such an adjustment through the user input/output interface 13. This can be done by providing additional user inputs at the interface 13, for example more switches 25, 27, or it may be more

effectively done by interpreting the signals from the user 11 through a lesser number of inputs, for example switch 23 only. For example, the switch 23 can be actuated to signal a particular request. A series of switch 23 actuations may signal a request for a decrease motor 9 speed another series of switch 23 actuations may signal a request for an increase in motor 9 speed. Another signal would indicate on and another off.

An easier interface 13 for the user 11 would include two switches 23, 25. Repeated actuation of one switch 23 signals a request for an increase in speed, while repeated actuation of the other switch 25 signals a request for a decrease in speed. A single actuation of one switch 23 could indicate a request to turn the motor 9 on, while a single actuation of the other switch 25 could indicate a request to turn the motor 9 off. For example, each request for a decrease in speed could result in a 10% reduction to a maximum of a 50% reduction. Rather than incrementally increasing speed, the user could be required to request the motor 9 to be turned off and then on through the interface 13. This could reset the speed to 100%.

More switches or input devices, not shown, could be added as desired. Referring to FIGS. 3 and 4, an alternative interface 13 might be a touch screen 30 that could incorporate both a display and input device. The touch screen could display various icons or text representing messages from the central control module 3 regarding the operating condition of the motor 9. Icons or text could also be provided to allow the user 11 to send messages to the central control module 3 by touching the icons or text.

Many power stages can be used to decrease (and to increase) the voltage to the motor 9. Referring to FIG 5, the preferred embodiment of a power stage 38 (shown in dashed lines) is to use a solid-state controller, such as a triac 40. A triac 40 can be easily controlled using other solid-state components such as, for example, a microprocessor or a microcontroller, not shown in FIG. 5, but an example will be later described. The triac 40 can be driven by a gate signal 42 (for example, from the microprocessor or microcontroller) that is phase shifted depending on the effective voltage desired. This is known as a phase-angle drive. At a minimum it requires only a gate driving signal 42 and a single additional component: the triac 40.

In this description the term "solid-state" will be used to describe components that have no moving parts. Solid-state components can be integrated circuits, such as microprocessor, or discrete components such as a single capacitor or resistor.

Referring to FIG. 6, a more complex power stage 50 (shown in dashed lines) may be used to control the voltage from voltage source inputs 52 seen by the motor 9 using, for example, an input rectifier 54, a power switch (transistor) 56 and a diode 58. This uses a Pulse Width

Modulation gate drive signal 59 to adjust the effective voltage seen by the motor 9 to be varied. This is known as a chopper drive. It is still a solid-state device without mechanical components, such as those mechanical components that are used in some relays and circuit breakers that are typically found in existing central vacuum units. .

The central control module 3 also has a number of submodules that operate based on a variety of sensed conditions. Referring to FIG. 7, central transmit submodule 60 has a transmit (Tx) subcontrol 61, a wireless transmitter 62 and an antenna 64. The Tx subcontrol 61 encodes messages to be transmitted wirelessly by transmitter 62 through the antenna 64.

Referring to FIG. 8, a central receive submodule 66 has a receiver (Rx) subcontrol 67, wireless receiver 68 and an antenna 70. The Rx subcontrol 67 decodes messages received by the receiver 68 through the antenna 70. The antenna 64 and 70 may be one in the same component if desired, and designed for, by the designer in a manner that would be evident to those skilled in the art. If the

Referring to FIG. 9, the central transmit submodule 60 and central receive submodule 66 may be replaced by a central transceiver submodule 72 having a transmit/receive (Tx/Rx) subcontrol 74, a transceiver 76 and an antenna 78. The submodule 72 encodes and decodes, transmits and receives messages through antenna 78 in a manner similar to the central transmit submodule 60 and the central receive submodule 66, combined.

The wireless transceiver 76 combines a transmitter and receiver in a single component. Among other benefits, the use of an integrated transceiver 76 can reduce complexity, power consumption and size. Also, transceiver for unlicensed short distance communication typically utilize higher frequencies for less interference and more effective communication.

This description will be made primarily with reference to a central transceiver submodule, such as submodule 72. It is to be understood that discrete transmit submodules, such as submodule 60, and discrete receive submodules, such as submodule 66, could be used as necessary for a particular application, if desired.

Referring to FIG. 10, the central control module 3 has a timer submodule 80 with a timer 82, a timer subcontrol 84 and a power stage 86. The timer 82 commences timing on the instruction of the subcontrol 84 when the power stage 86 powers on the motor 9. If the timer 82 times more than a predetermined amount of time then the timer subcontrol 84 instructs the power stage 86 to stop providing power to the motor 9. For example, if the motor 9 has been running for 30 minutes then the timer submodule 80 shuts off the motor 9. This safeguards against

inadvertent operation of the motor 9. If a user 11 wishes to continue use then the user 11 simply activates the motor 9 through the interface 13, and the timer submodule 80 starts timing again.

The timer submodule 80 is also connected to the central transceiver submodule 72 for transmission of messages to the remote control module 5.

Referring to FIG. 11, the central control module 3 has an operating condition submodule 90 with one or more operating condition sensors 92, an operating condition subcontrol 94 and a power stage 96. The operating condition 92 senses various operating conditions of the motor 9 under the control of the operating condition subcontrol 94. According to the sensed operating conditions, the operating condition subcontrol 94 controls the power stage 96 by, for example, providing gate drive signals. The operating condition submodule 90 is also connected to the central transceiver submodule 72 for transmission of messages to the remote control module 5.

Thus, the central control module 3 senses an operating condition of the motor 9, compares it to a normal operating condition of the motor 9 (examples of which will be described), determines if the motor 9 is operating significantly outside a normal operating condition, and performs an action if the motor 9 is operating outside the normal operating condition. Examples of various sensors will be described herein; also, an example microprocessor embodiment for comparing, determining and performing will be described. An example of a performer for performing an action is the subcontrol 94 described above that controls the power stage 96 after determination. In this case, the subcontrol 94 carries out the comparison and determination, and performs the action. Other example performances of actions will be described herein.

Referring to FIG. 12, one of the operating condition sensors 92 may be a current sensor 98 for sensing the motor 9 operating current. If there is an overcurrent condition then the central control module 3 will disconnect power from the motor 9 by having the operating condition subcontrol 94 instruct the power stage to stop providing power 96 to the motor 9. Overcurrent might be determined by a current that is more than a given amount above the normal operating current of the motor 9. In the preferred embodiment an overcurrent condition is a current of more than 100% above (twice) the normal operating current where such current is present for over 3 seconds. Such a condition is indicative of something jammed in an impeller or other suction creating device, not shown, attached to the motor 9, and the motor 9 is working to overcome the obstruction. The actual thresholds used will depend on the particular specifications for the motor 9 used in any particular application. After an overcurrent condition occurs, it is best to require disconnection of a source of power from the central control module

3 before the motor 9 can be restarted. This is a safety feature. An overcurrent condition can require maintenance. If it occurs repeatedly then the user will likely make a call for service rather than repeatedly disconnect and re-connect the power source.

Referring to FIG. 11, in order to provide specifications on which a threshold can be based the central control module 3 can have a non-volatile memory 102 in which the specifications can be stored. The specifications can be sensed during normal operating condition of the motor 9 and stored. Such condition may be represented by the current drawn by the motor 9. This can easily be sensed by the operating condition sensor 92 under control of the operating condition subcontrol 94.

The normal operating condition of the motor 9 could also be input directly by the user 11 at the interface 13 and transmitted from the remote control module 5 for reception at the transceiver 72, decoding by the transceiver subcontrol 74 and storage in memory 102. The memory 102 is a rewriteable device such as, for example, an EEPROM, EPROM or flash memory device. Alternatively, the normal operating condition can be pre-configured in memory 102 by an installer, or at the time of manufacture. If the normal operating conditions are input at the time of manufacture or installation then a write once memory device, such as a PROM, could be used, if desired.

As the central control module 3 may be used with many different motors 9, and the design specifications and operating environment of each motor 9 may change from time, it is preferable simply to allow the central control module 3 to sense automatically (i.e. without requiring data to be input by a user 11, manufacturer or installer) the normal operating condition when the central control module 3 is installed.

The central control module 3 will need to be configured to ignore any inrush current each time the motor 9 is turned on if the inrush current would exceed the threshold amount and duration. A soft-start configuration as described previously can be used to reduce inrush current. The soft start can be implemented through motor 9 control using, for example, one of the power stages 38, 50.

The current sensor 98 may be a current sensing transformer, current sensing resistor or other similar or alternative device in line with, or integrated into, the power stage (for example, 38, 50) or elsewhere in the central control module 3.

The central control module 3 operating condition submodule 90 can also sense an undercurrent condition of the motor 9. This typically signifies a blockage in an air inlet to the motor 9. Such

a blockage stops air flow, resulting in free spinning of the motor 9 and a reduction in load on the motor 9. If this condition persists for longer than a predetermined period then the central control module 3 can automatically disconnect power to the motor 9. Also or alternatively, notice could be provided to the user 11. As an example, the predetermined period could be set for approximately 15 minutes. The period should be long enough to allow the user to remove typical blockages, while not so long as to continue operation on an ongoing basis in an underperforming condition.

Referring again to FIG. 12, the operating condition sensors 92 may also include a temperature sensor 104 that monitors the temperature around the motor 9. An over temperature condition can be detected in comparison to normal operating temperature stored in memory 102. The central control module 3 under control of the operating condition submodule 90 ceases to provide power to the motor 9 when an over temperature condition occurs. To again use the motor 9, a source of power to the vacuum source 205 of FIGS. 15 and 16 must be disconnected (for example by unplugging the power to the vacuum source 205) from the central control module 3 by the user 11, and reconnected. Additionally, the overtemperature condition must have cleared. Again, this is a safety feature. Repeated overtemperature conditions may indicate that maintenance is required.

The memory 102 may also store the normal operating temperature (or other representation on which a threshold may be based) input, for example, in the manner described for the normal operating current, except possibly using the temperature sensor 104 to sense normal operating temperature.

An accelerometer or other vibration or motion sensor 106 can be incorporated into the central control module 3 to sense for vibration. Unusual ongoing vibrations can be an indication that the balance of the motor 9 is off, and the motor 9 may be starting to fail. The normal and current conditions can be sensed with the normal condition being stored in memory 102 for future comparison.

The central control module 3 can be used in association with an autodialer to provide information about the cleaning system to a remote location through telephone lines. Contact could be made as a result of a sensed condition or the passage of time. The central control module 3 could also receive a remote call for diagnostic purposes. Referring to FIG. 13, remote control module 5 incorporates a remote transceiver submodule 110 similar to that of the central transceiver submodule 72, including a remote transceiver 112, remote transceiver subcontrol 114, and antenna 116. The operation of the remote transceiver submodule 110 and central

transceiver submodule 72 are similar and will not be repeated. It is to be noted that the functions of the remote transceiver submodule 110 could be replaced by a separate transmitter submodule and/or receiver submodule, not shown.

In the preferred embodiment, the transceiver submodules 72, 110 of central control module 3 and remote control module 5, respectively, are matched for transmission and reception of signals over a distance of approximately 150 ft. through typical residential obstacles and building materials. The design distance is a matter of choice, governed by applicable legal requirements such as might apply to signal strength and frequency. A digitally modulated radio frequency (r.f.) carrier of 433.92 MHz is suitable as it meets current North American and European requirements for r.f. control systems.

Alternatively, r.f. transmissions can operate in spread-spectrum mode. This could include frequency hopping spread spectrum or direct-sequence spread spectrum (DSS). These techniques enable operation at higher r.f. power levels than single frequency operation by distributing the power over a number of different frequency channels. In this case, the carrier frequency could be in the 850-950 MHz or 2.4 GHz bands to comply with legal requirements in North America and Europe. In this case, design for a minimum distance of approximately 300 ft. between central control module 3 and remote control module 5 is preferred.

Other r.f. transmission techniques and frequencies could be used as desired for particular applications.

A microprocessor can be used as the transceiver subcontrol 114 in the remote control module 5 to provide the digital encoding of r.f. carrier with message data, and to decode messages received from the central control module 3. Other devices such as a microcontroller or discrete components could be used to perform these functions.

Wireless communication provides a significant advantage. Wired low voltage signals require a step down transformer from line voltage to low voltage, such as a class II safety transformer. Wireless communication obviates the need for low voltage signals and the class II transformer for that purpose.

The central control module 3 can be powered using a drop down resistor or capacitor from the

power source 9. A non-class II transformer can be used in the event that larger power is required as wireless communication does not require the use of a class II transformer. It may still be desired to use a class II transformer in order to allow a manufacturer to provide an option to communicate via low voltage wires connected between the central control module 3 and the remote control module 5. The selection between wired and wireless communication can be made at the time of manufacture, or the manufacturer can leave this selection up to the installer. If the selection is made by the manufacturer than separate different central control modules and remote control modules can be made for wired and wireless configurations.

It is to be understood that wireless communication is not required for all of the functions described herein. In fact, for many functions it is not necessary to have communication between the user 11 and the central vacuum source 205, except to turn the motor 9 on and off. The other functions can operate without user intervention; however, this is not the preferred embodiment.

In order to meet regulatory requirements a circuit breaker is typically used to limit current. The circuit breaker uses a bimetallic strip. The bimetallic strip is sensitive to ambient temperature and results in nuisance tripping of the circuit breaker when operated in high ambient temperatures. By using a current sensing resistor or transformer as the current sensor 98 to sense an overcurrent condition, a microprocessor can be used as the operating condition subcontrol 94 to turn off a triac in a power stage, or activate a relay in a power stage, to control current to the motor 9 to shutdown the motor 9. This protects the motor 9. In some cases, a triac can fail in such a way that current would not be shut off to the motor 9. It may be preferable to include a redundant overcurrent protection device for otherwise catastrophic failure, such as a trace on a printed circuit board for the central control module 3 of a size to act as a fuse on the load (motor 9) side, opening in the event of a sustained overcurrent condition and preventing current from flowing to the motor 9. Other redundant overcurrent protection devices could be used.

Referring to FIG. 14, the various submodules of the central control module 3 can be combined. In combining the submodules, the various subcontrols can also be combined into a single central control subcontrol 160 which can utilize a single microprocessor, microcontroller or combination

of discrete components, to perform the functions described herein for each of the submodules. The memory 102 can be part of the microprocessor or microcontroller, or it may itself be a discrete component. Preferably, the central control subcontrol is a microprocessor with integrated memory 102. The entire timer submodule may be part of the microprocessor, or it may be a combination of the microprocessor and a few discrete components to set the proper timing for the timer. Alternatively, the timer may comprise components discrete from the microprocessor.

The various subcontrols, microprocessor and microcontroller are programmed to perform the

functions described herein. The programs are contained in a non-volatile memory, such as memory 102, or an internal memory within the subcontrol, microprocessor or microcontroller.

Referring to FIG. 15, a central vacuum cleaning system (indicated generally at 201) incorporates a control subsystem 1 in the form of central control module 3 and remote control module 5 as will be further described. The system 201 is installed in a building 203. The building 203 is shown as a residence; however, the system 201 could be installed in other buildings, such as commercial or industrial buildings.

The system 201 has a vacuum source 205 in a central location. The source 205 is connected through pipes 207 or other conduits in walls, floors or ceilings of the building 203. Alternatively, the pipes 207 may be exposed. The pipes 207 terminate at valves 209 to which a flexible hose 211 may be connected. The hose 211 terminates in a handle 213 that is held by user 11. Various cleaning attachments, such as a carpet brush 216, are connected to the handle 213.

Control signals, such as ON/OFF, from the user 11 are provided through a switch 218 (or switches 218 or some other interface 13 in the handle 213. More sophisticated systems 201 may utilize the control signals for many other purposes, such as duplex communications that allow the receipt of information at the handle 213. Such information could be used to drive LEDs or other display means 219 (as described previously for the interface 13) for communication with the user 11. When the user 11 turns on the system 201, dirt is drawn by a vacuum created by the vacuum source 205 through the attachment 216, handle 213, hose 211, and pipes 207.

Referring to FIG. 16, the vacuum source 205 has a motor 9 (FIG. 1) within a motor housing 221. Extending from the motor housing 221 is, typically, a receptacle 223 for receiving the dirt. Also within the motor housing 221 is a motor control circuit 225 embodying central control module 3 of FIG. 1. In the preferred embodiment, the motor housing 221 also acts as a motor control housing 221. Accordingly, the motor housing 221 will be referred to as a motor control housing herein, unless the context requires otherwise. It is to be understood that the motor housing and motor control housing could be separate from one another.

Preferably, the central control module 3 (including its transceiver 74) is placed within the motor control housing 221. Alternatively, the central control module 3 could be distributed with the transceiver 74 portion outside the motor housing 221 to avoid interference and signal attenuation.

The motor control circuit 225 is typically laid out on a printed circuit board 233, including all of the components to implement the functions of the central control module 3. Multiple printed circuit boards or separately mounted components may be used as desired.

The motor control circuit 225 can be mounted in many different ways, for example on mounting screws or posts, not shown, inside or outside the motor control housing. It may be preferable to mount the motor control circuit 225 in the cooling air inlet passage or outtake (exhaust) of the motor 9 to provide cooling for the circuit 225. Any power stage of the circuit 225, in particular, may benefit from such cooling.

Although the preferred embodiment is being described with reference to a motor control circuit 225 for mounting inside a motor housing 221, as mentioned previously, the circuit 225 need not be mounted inside the motor housing 221. For example, the circuit 225 could be mounted within a control box, not shown, outside the housing 221 with wires fed back into the housing 221 for operation of the motor 9. This might be done for additional isolation of the control circuit 225 from the motor 9. For example, it might be helpful to avoid electromagnetic interference from the motor 9. The control box would be an alternate form of motor control housing 221. As mentioned previously, for this reason, the motor housing 221 is being referred to as a motor control housing 221 in this description, unless the context requires otherwise.

In the preferred embodiment, the central control module 3 also has means for communication with the user 11. In the preferred embodiment, display means 75 takes the form of an LED, not shown, within a translucent mounting post 227. The motor control circuit 225 has optional wired and wireless communication paths. Accordingly, the pointing post accepts connections from low voltage wires as described in the United States Patent Application referenced in the Cross-Reference to Related Applications section hereof. As an alternative display example, the LED could extend through the housing 221 for direct viewing.

LEDs are a preferred choice as LEDs are long lasting, small, inexpensive, and low power devices. Higher power LEDs, LEDs of different colours, multi-colour LEDs, and LEDs of different shapes and sizes may all be used. Standard LED packages such as a T-1 or T-1 $\frac{3}{4}$ can be used. These tend to be the least expensive. This allows for LEDs of more than 3000 mcd, for example 3200 mcd and 4500 mcd in green. These are examples only and many other sizes and configurations can be used. For example, a multi-colour LED could be used to provide many possible signalling combinations, such as a red/yellow LED that can provide red solid, red

flashing, yellow solid, yellow flashing, orange solid, and orange flashing. Also, single colour LEDs can be chosen from a wide variety of colours, including green, yellow, red, white

and blue, among others.

The messages provided to the user 11 by the LEDs might include, for example, 1) informing the user that electrical power is present and the system 1 has no apparent problems (LED GREEN), 2) air flow is obstructed, check for obstructions, including in the pipes 207, in the flexible hose 211 or the filter medium, or the dust receptacle 223 is full and should be emptied (LED YELLOW), 3) a sensor indicates that service to the system 201 is needed, for example, an overcurrent condition shutdown that may indicate a problem such as bearing failure (LED flashes RED), and 4) a certain amount of time has passed indicating that service to the system 201 is needed, for example: service to the motor is required, i.e. change the brushes (LED flashes YELLOW). These are samples of the types of messages that might be conveyed to the user. Many other messages could be conveyed as desired by designers of motor control circuit 225 using other colours or flashing patterns.

Referring to FIG. 17, in a manner similar to that described for the central control module 3, the remote control module 5 is mounted in a handle, for example handle 29, typically on a printed circuit board 240. It is to be noted that other handles, such as for example handles 20, 213 could be used. The printed circuit board 240 and other components of the central control module 3 could be fully encapsulated with simply a couple of wires 242 extending for connection to a power source 244. Messages are provided to the user 11 in the manner described previously herein. The messages provided to the user 11 include, for example, those previously described for the central control module 3.

The remote control module 5 is preferably battery 244 powered; however, it may also be powered from line voltage where it is available, using a drop down resistor and capacitor. Many vacuum hoses 217 have line voltage as it is used to power hose attachments 216, such as a power carpet brush. The battery 244 could be a rechargeable battery 244. Batteries 244 provide energy for limited durations. This duration for a rechargeable battery 244 is typically far shorter than that for a non-rechargeable battery 244. In order to avoid having to frequently change the battery 244, the battery 244 could be a rechargeable battery 244 that is recharged by using a generator 246 powered from vacuum air (arrows 247) flowing through the handle 29 to produce electrical energy. The generator could be powered by an impeller 249 that extends into vacuum air path 248. The impeller 249 would turn, causing the generator 246 to produce current for recharging the battery 244. The generator 246 would typically produce alternating current that would require an AC/DC converter and/or other battery charging circuitry 250 for charging the battery 244. The voltage may need to be stepped-up in order to provide sufficient

voltage for charging the battery 244. Many designs for such converters, including step-up converters, are readily available and could be used for this purpose.

To avoid damage to the impeller 249 from passing dust particles, a separate impeller air path 252 can be provided for the impeller 249. The impeller air path 252 extends from the vacuum air path 248 through the handle 29 to allow ambient air 254 to be drawn in through the impeller air path 252 to the vacuum air path 248. The motion of the ambient air 254 flowing through impeller air path 252 causes the impeller 249 to turn. The motion of the impeller 249 then powers the generator 246. As an example, the impeller air path 252 could be a one-quarter inch hole. It is desirable to have a wide input power range, for example, 90-260 volts AC for worldwide use. The use of a 16 Amp 400 Volt triac in the central control module 3 will work with most commercially available motors used in residential central vacuum cleaning applications worldwide. If a relay is used to control the motor 9 then a different relay will likely be required for different voltages, amperages and regulatory requirements. The drop down circuits for powering the central control module 3 are preferably adapted to utilize this wide range of voltages as well using well known power conversion techniques. As described previously, for universal use with motors 9 having different, and perhaps unknown specifications, the central control module 3 can sense normal operating conditions and store them in memory. This process can be thought of as a learn mode for the control subsystem 1. During initial operation of the central control module 3, the module can sense the operating conditions of the motor 9. These can be stored in non-volatile memory 102 for the microprocessor 160. The stored operating conditions can then be used for a baseline against which the central control module 3 can compare when in use. In addition to motor 9 normal operating current, the stored conditions may include, for example, such conditions as vacuum pressure and ambient temperature. Ambient temperature varies from building to building, and this may affect what is considered to be "overtemperature". Vacuum pressure may be sensed in many different ways, for example, surface mount pressure sensors are becoming widely available.

Referring to FIG. 18, low voltage electrical components, such as central control module 3, could be similarly powered by a rechargeable battery 260 charged from a generator 262 having an impeller 264 placed in an exhaust air path 266 in central vacuum canister 268. The impeller 264 turns with the motion of air 270 flowing through the central cleaning system, for example, in the canister 268 from an inlet 272 to an outlet 274 over bag 275. Air flow is generated by suction motor 276. It is desirable, although not necessary, to place the impeller in the exhaust air path 266 as the air is typically filtered of dust particles 277 by a filter 278 after dust

separator 280 and prior to motor 276. The filter reduces wear on the motor 276. Similarly, it reduces wear on the impeller 264.

Referring to FIG. 19, for flexibility, for example in retrofit applications or as optional features, the central control module 3 and ancillary components, including battery 260 and generator 262, could be placed outside the canister 268. The impeller 264 could form part of a pipe insert 282 inserted after outlet 274 in the exhaust air piping 284. The insert 282 allows exhaust air to flow through, while placing the impeller 264 in the exhaust air path 270.

Optionally, the central control module 3 could connect to existing low voltage connectors 286 on the canister 286 to provide signals to an existing control unit 288 controlling the motor 276. Controlling motor 276 through an existing control unit 288 may limit available features and functions of the central control unit 3. Advantageously, for retrofit applications, the central control unit 3 would not require access to line voltage; however, the central control unit may not have access to the input current of the motor 276, preventing use of features related thereto.

Low voltage units that do not connect to line voltage would not require certification in most jurisdictions, or such requirements would be less strict.

It is to be noted that the use of a generator powered by air flowing through a cleaning system is not limited to central vacuum cleaning systems. For example, portable upright or canister vacuum cleaners may benefit from a generator powered by air flow for driving electrical devices within the cleaner. This may include a remote control module and central control module, such as those described herein that communicate between a handle and motor of the cleaner.

Referring to FIG. 20, a remote station 280 having a display 282, such as an LCD screen with or without touch screen functions, could be placed within a building 290 to receive status information for the cleaning system 201. The remote station 280 could be mounted to a wall or elsewhere within the building 290, or it could be portable. The remote station 280 could communicate wirelessly with the motor control 3 in the same manner as the remote control module 5 in the handle 213. The remote station 280 may allow for two-way communication and, in this way, the remote station 280 can duplicate, replace or augment some or all of the functions of the remote control module 5. The screen of the remote station 280 could be larger than that of the remote control module 5.

The remote station 280 could also access other automated functions in the building 290. In this way, the need for multiple remote control screens in a building 290 could be reduced.

Communication between the remote station 280 and the central control module 3 can be through an intermediary transceiver, such as an x10 control module adapted to wirelessly receive signals from and transmit signals to the central control module 3 and to correspondingly transmit signals to the remote station 280 and receive signals from the remote station 280.

The transmission to and reception from the remote station 280 by the intermediary transceiver may be wireless or wired. For example, power line communication could be used, or network cabling. The remote station 280 could be a personal or other computer, or a dedicated device, such as an x10 compatible control panel.

It will be understood by those skilled in the art that this description is made with reference to the preferred embodiment and that it is possible to make other embodiments employing the principles of the invention which fall within its spirit and scope as defined by the following claims.

I claim:

1. A central vacuum cleaning system comprising:
 - a) a line power input;
 - b) a vacuum unit comprising a dirt collection unit;
 - 5 c) at least one dirty air intake conduit defining an airflow path to the vacuum unit and terminating in the dirt collection unit;
 - d) a vacuum motor adapted to generate a working airflow from the dirty air intake conduit to the dirt collection unit; and
 - e) a programmable control unit comprising a power conditioning module and adapted to be

10 programmed with a control program that controls provision of the power conditioning module to provide power from the line power input to drive the vacuum motor, and
 - f) a user interface in communication with the programmable control unit to output status information during operation of the central vacuum cleaning system based on an operating condition of the vacuum motor selected from the group consisting of:

15 temperature, vibration and current, and

wherein the dirt collection unit, and the vacuum motor are located in the vacuum unit and the programmable control unit is operatively connected to the vacuum motor.
2. The central vacuum cleaning system according to claim 1, wherein the power conditioning

20 module is controlled by the programmable control unit to deliver power to the vacuum motor.
3. The central vacuum cleaning system according to any one of claims 1 or 2, wherein the programmable control unit is located in the vacuum unit

25
4. The central vacuum cleaning system according to any one of claims 1 to 3, wherein the control program is stored in a memory structure in the programmable control unit.

5. The central vacuum cleaning system according to any one of claims 1 to 4, wherein the programmable control unit comprises a memory structure and the programmable control unit is adapted to record operational data relating to operation of the central vacuum cleaner system in the memory structure.
- 5
6. The central vacuum cleaning system according to claim 5, wherein the operational data comprises measured motor current levels.
7. The central vacuum cleaning system according to any one of claims 1 to 6, wherein the programmable control unit further comprises a service tool interface.
- 10
8. The central vacuum cleaning system according to claim 7, wherein the service tool interface comprises an interface selected from the group consisting of a connector, a wireless interface and combinations thereof.
- 15
9. The central vacuum cleaning system according to claim 7, wherein the service tool interface comprises an interface comprising a wireless interface.
10. The central vacuum cleaning system according to any one of claims 1 to 9, wherein the programmable control unit is further adapted to execute a power shut off if at least one error condition is detected from the group consisting of a detected locked motor rotor, a detected current level exceeding a predetermined threshold, a detected temperature exceeding a predetermined threshold, a period of continuous vacuum motor operation exceeding a predetermined threshold, and combinations thereof.
- 20
11. The central vacuum cleaning system according to any one of claims 1 to 10, further comprising a remote user interface in communication with the programmable control unit and adapted to permit a user of the system to restart the central vacuum cleaner system after a power shut off event.
- 25
- 30

12. The central vacuum cleaning system according to claim 1, wherein the programmable control unit comprises a microprocessor-based printed circuit board (PCB).
- 5 13. The central vacuum cleaning system according to any one of claims 1 to 12, wherein the user interface is adapted to receive user inputs.
14. The central vacuum cleaning system according to any one of claims 1 to 13 wherein the programmable control unit further comprises a current sensor operatively connected to
10 sense current drawn by the motor, and the user interface output status information based on the operating condition of the motor is further based on the current drawn by the motor sensed by the current sensor.
15. The central vacuum cleaning system according to any one of claims 1 to 14, wherein the
15 user interface comprises an indicator panel with one or more status indicators.
16. The central vacuum cleaning system according to any one of claims 1 to 15, wherein the programmable control unit is further adapted to output status information comprising one or more error conditions selected from the group consisting of a detected locked motor
20 rotor, a detected current level exceeding a predetermined threshold, a detected temperature exceeding a predetermined threshold, a period of continuous vacuum motor operation exceeding a predetermined threshold, and combinations thereof.
17. The central vacuum cleaning system according to claim 16, wherein the error condition is a
25 detected locked motor rotor.
18. The central vacuum cleaning system according to claim 16, wherein the error condition is a detected current level exceeding a predetermined threshold.
- 30 19. The central vacuum cleaning system according to claim 16, wherein the error condition is a detected temperature exceeding a predetermined threshold.

20. The central vacuum cleaning system according to claim 16, wherein the error condition is a period of continuous vacuum motor operation exceeding a predetermined threshold.
- 5 21. The central vacuum cleaning system according to any one of claims 1 to 20, wherein the programmable control unit is further adapted to output status information comprising an error condition of a detected undercurrent level.
22. The central vacuum cleaner system according to any one of claims 10, 16 to 18, and 20 to
10 21, wherein the programmable control unit is further adapted to determine the error condition based on current drawn by the motor.
23. The system of claims 1 to 22 wherein the user interface is located on a hose handle.
- 15 24. The system of any one of claims 1 to 22 wherein the user interface is located at a remote station apart from the vacuum source and a vacuum handle.
25. The system of claims 1 to 24 wherein the user interface comprises an LCD screen.
- 20 26. The system of claims 1 to 25 wherein the user interface comprises a multiple colour light source.
27. The system of claim 26 wherein the multiple colour light source comprises multiple single colour LED light sources.
- 25 28. The system of claim 26 wherein the multiple colour light source comprises a multi-colour LED.
29. The central vacuum cleaning system according to any one of claims 1 to 28, wherein the

programmable control unit is further adapted to control provision of the power conditioning module to vary the power provided to the vacuum motor so as to vary the working airflow generated by the vacuum motor.

- 5 30. The central vacuum cleaning system of any one of claims 1 to 28, wherein the
programmable control unit is further adapted to control provision of the power conditioning
module to vary the power provided to the vacuum motor so as to vary the working airflow
generated by the vacuum motor, and wherein the programmable control unit is adapted to
vary the working airflow generated by the vacuum motor in response to user input from the
10 user interface.
31. The central vacuum cleaning system according to any one of claims 29 to 30, wherein the
programmable control unit is adapted to vary the working air flow by varying the operating
speed of the vacuum motor.
- 15 32. The central vacuum cleaning system according to any one of claims 29 to 31, wherein the
programmable control unit is adapted to vary the power by varying the voltage seen by the
motor.
- 20 33. The central vacuum cleaning system of any one of claims 29-32, wherein the
programmable control unit varies the power provided to the vacuum motor by phase
control.
34. The central vacuum cleaning system according to of any one of claims 29 to 33, wherein
25 the power conditioning module comprises a triac and the power provided to the vacuum
motor is varied by controlling the triac.
35. The central vacuum cleaning system according to any one of claims 1 to 34, wherein the
programmable control unit further comprises an autodialer to communicate information
30 about the central vacuum cleaning system with a remote location.
36. The central vacuum cleaning system according to claim 35, wherein the programmable

control unit is configured to communicate information with the remote location in response to a predetermined condition.

5 37. The central vacuum cleaning system according to claim 35, wherein the programmable control unit is configured to communicate information to the remote location in response to an inquiry from the remote location.

38. The system of any one of claims 1 to 34 wherein the user interface further comprises:

display means at a location remote from the vacuum unit, and

10 input means, and

the system further comprises duplex communication means to provide control signals from the input means to the programmable control unit and to receive at the remote location from the programmable control unit a plurality of messages regarding the status of the system, such information to drive the display means for communication with an
15 operator.

39. The system of claim 38 wherein the duplex communications means comprises low voltage wires between the display means and the programmable control unit.

20 40. The system according to any one of claims 38 to 39 wherein the duplex communications means comprises low voltage wires between the input means and the programmable control unit.

25 41. The system of claim 38 wherein the duplex communications means comprises a RF wireless receiver at the remote location through which the user interface receives the messages and a RF wireless transmitter through which the programmable control unit transmits the messages.

42. The system according to any one of claims 38, 39 and 41 wherein the duplex communications means comprises a RF wireless transmitter through which the input means transmits control signals and a RF wireless receiver through which the programmable control unit receives the control signals.
- 5
43. The system of claim 38 wherein the input means and the display means are located on the handle, and the duplex communications means comprises an RF wireless receiver and RF wireless transmitter in the handle for transmitting control signals and receiving the messages, and a RF wireless transmitter and RF wireless receiver through which the programmable control unit transmits the messages and receives the control signals.
- 10
44. The system of any one of claims 1 to 14 wherein the user interface further comprising:
- display means adapted to provide a plurality of different messages to a user regarding the status of the system,
- 15 wherein the display means is driven by messages from the programmable control unit to provide the messages to the user.
45. The central vacuum cleaning system according to any one of claims 1 to 44 comprising:
- valves to which a flexible hose can be connected,
- a handle to be held by an operator, the hose terminating at the handle, and
- 20 a cleaning attachment connected to the handle,
- wherein the at least one dirty air intake conduit is operatively connected to the valves such the working airflow is generated by a vacuum created by the vacuum source through the attachment, the handle, the hose, a valve connected to the hose, and the conduit to the dirt collection unit.
- 25 46. A method of operating a central vacuum cleaning system comprising:
- a) controlling, using a programmable control unit having a power conditioning module, provision of power from a line power input to drive a vacuum motor in a vacuum unit to generate a working airflow from a dirty air intake conduit to a dirt collection unit in the

vacuum unit, and

- b) outputting status information based on at least one operating condition of the vacuum motor. to a user interface in communication with the programmable control unit during operation of the central vacuum cleaning system, wherein the at least one operating condition of the vacuum motor is selected from the group consisting of: temperature, vibration, and current.

47. The method of claim 46 further comprising: receiving user inputs to the programmable control unit, and wherein controlling using the programmable control unit to control provision of power further comprises controlling based on the received user inputs.

48. The method of any one of claims 46 and 47 further comprising: sensing the current drawn by the vacuum motor, and wherein outputting status information based on at least one operating condition of the vacuum motor further comprises outputting such status information further based on the sensed current drawn by the vacuum motor.

49. The method of any one of claims 46 to 48 wherein outputting status information based on at least one operating condition of the vacuum motor further comprises outputting such status information comprising an error condition selected from the group consisting of a detected locked motor rotor, a detected current level exceeding a predetermined threshold, a detected temperature exceeding a predetermined threshold, a period of continuous vacuum motor operation exceeding a predetermined threshold, and combinations thereof.

50. The method of any one of claims 46 to 49 further comprising generating the working airflow through valves operatively connected to the dirty air intake conduit, a handle to be held by an operator, a flexible hose connected to a valve and terminating at the handle, a cleaning attachment connected to the handle.


51. A method of operating a central vacuum cleaning system comprising:
a) controlling, using a programmable control unit having a power conditioning module,



provision of power from a line power input to drive a vacuum motor in a vacuum unit to generate a working airflow from a dirty air intake conduit to a dirt collection unit in the vacuum unit, and



5 b) providing input control signals to the programmable control unit and receiving at a location remote to the vacuum unit a plurality of messages from the programmable control unit regarding the status of the system based on at least one operating condition of the vacuum motor, wherein the at least one operating condition of the vacuum motor is selected from the group consisting of: temperature, vibration, and current and


10 c) displaying messages regarding the status of the system to a user based on the received messages from the programmable control unit.

1/11

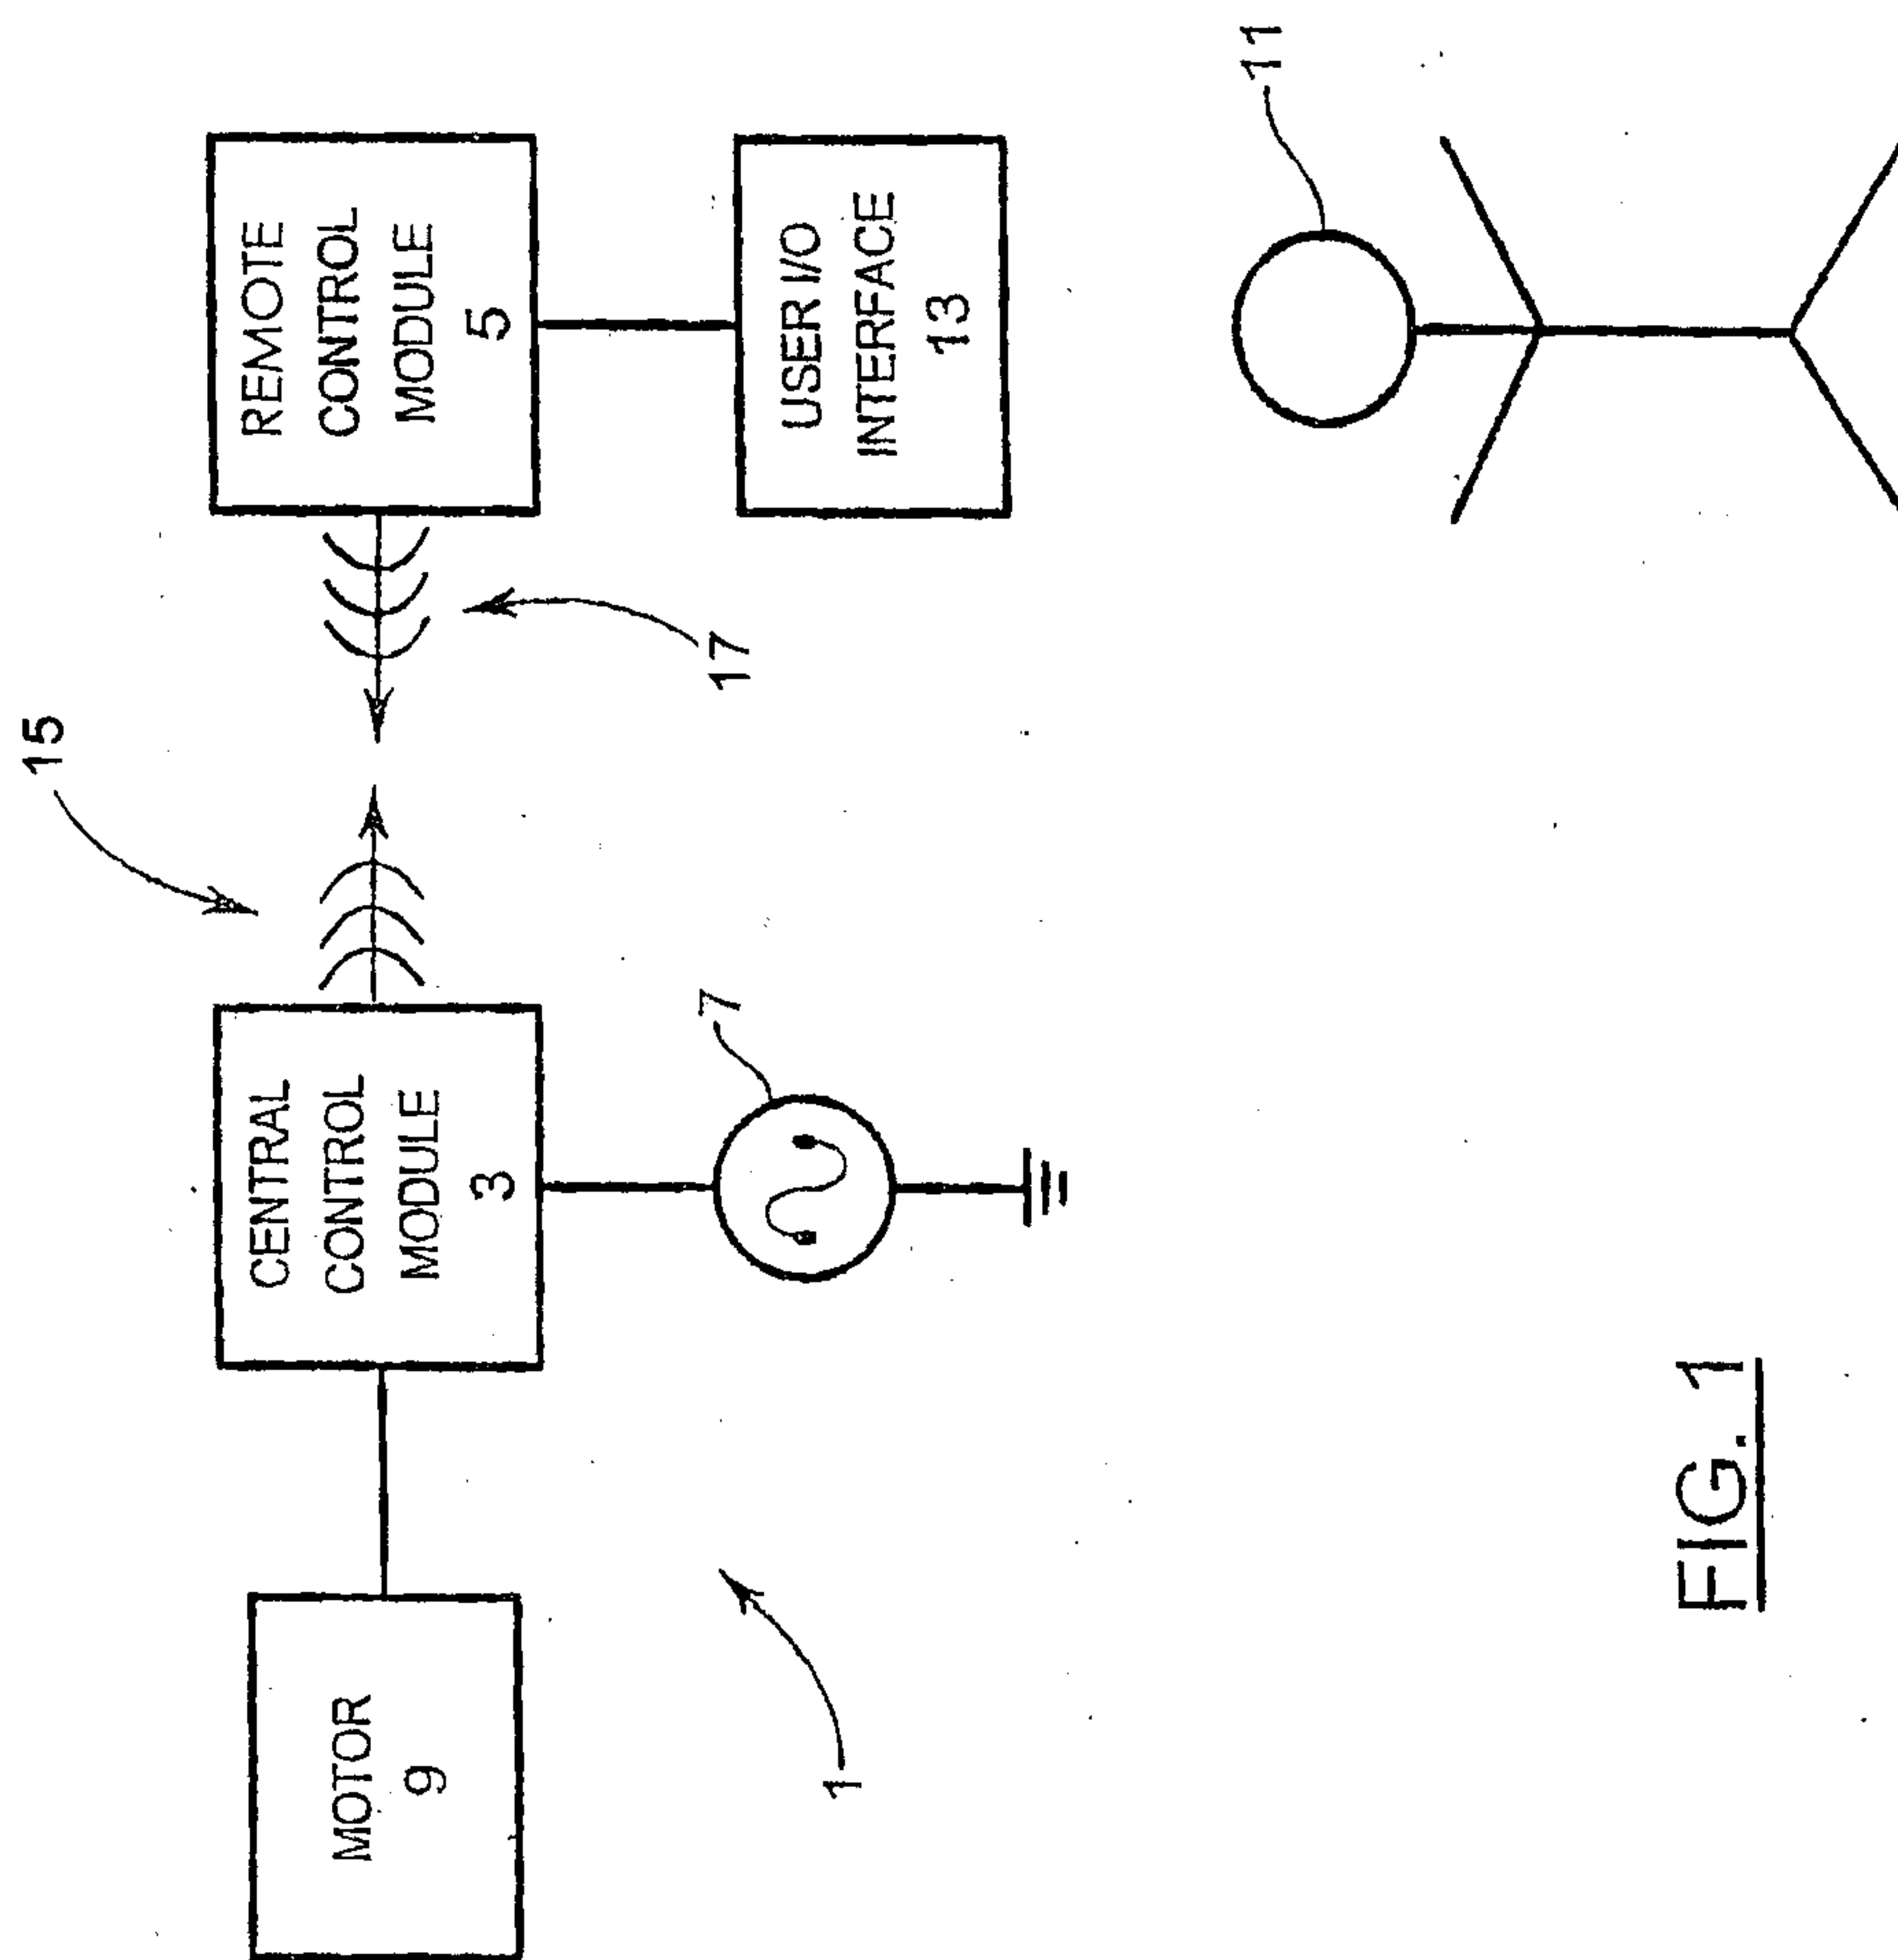FIG. 1

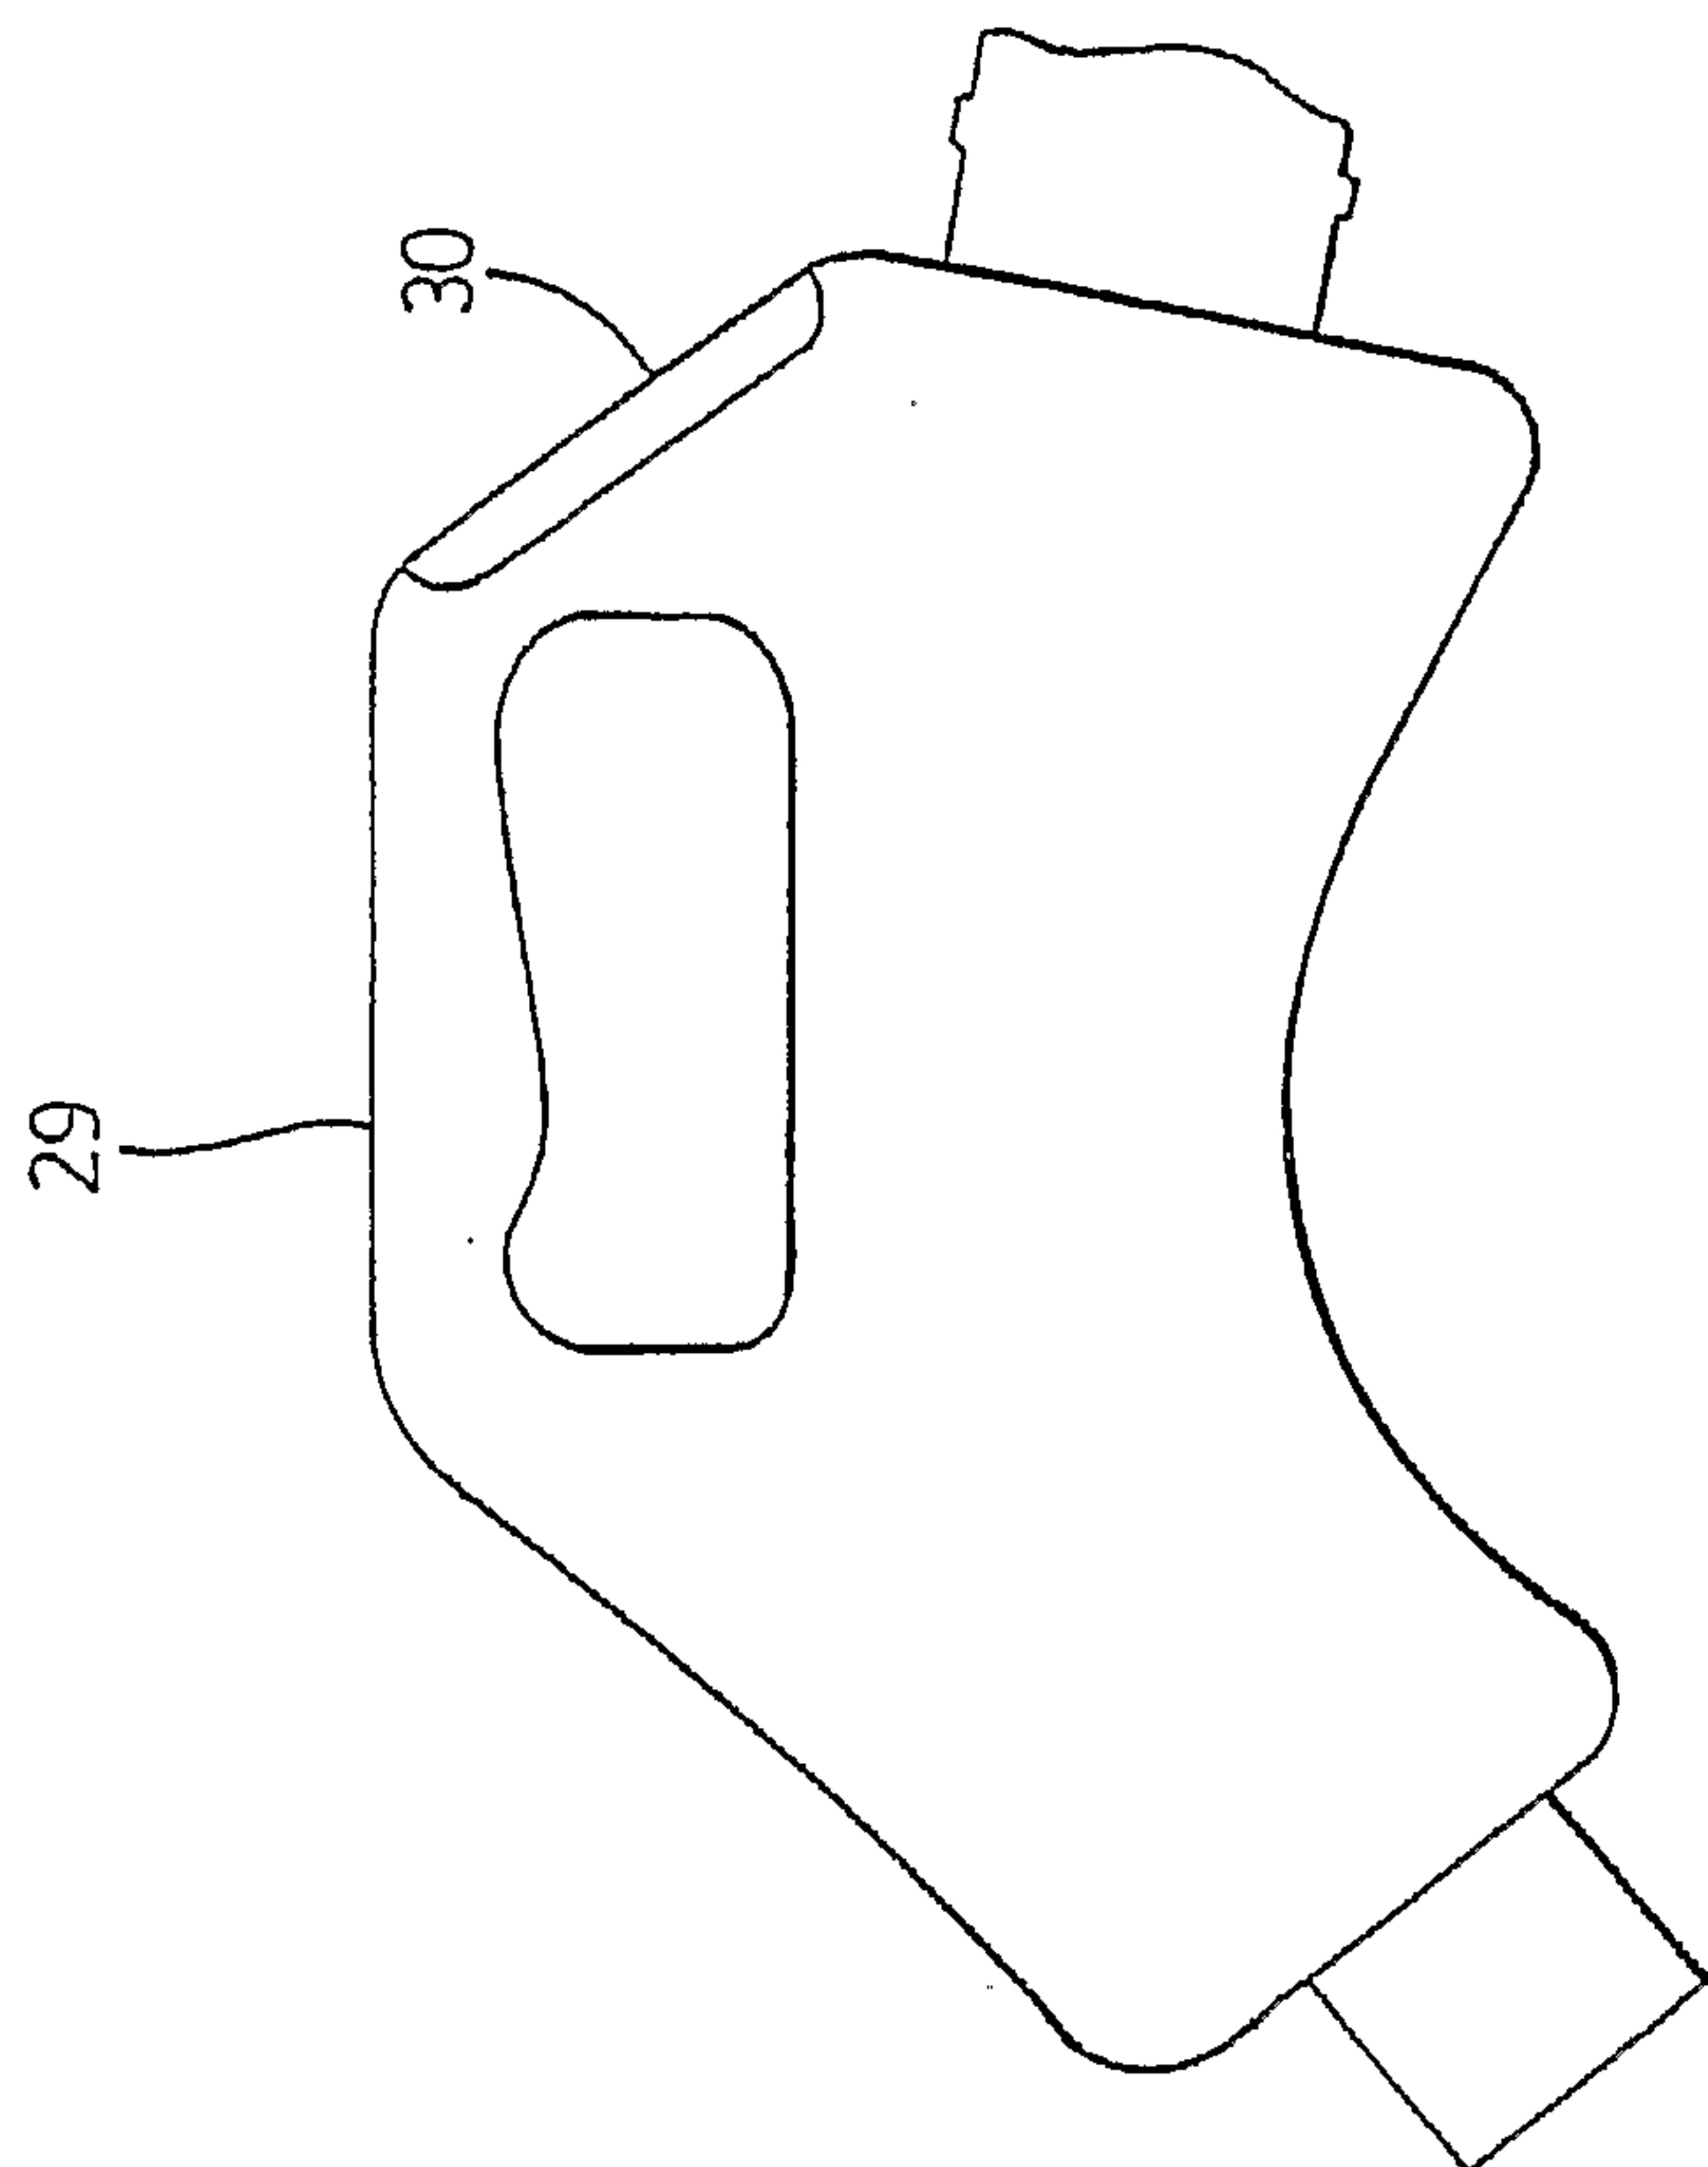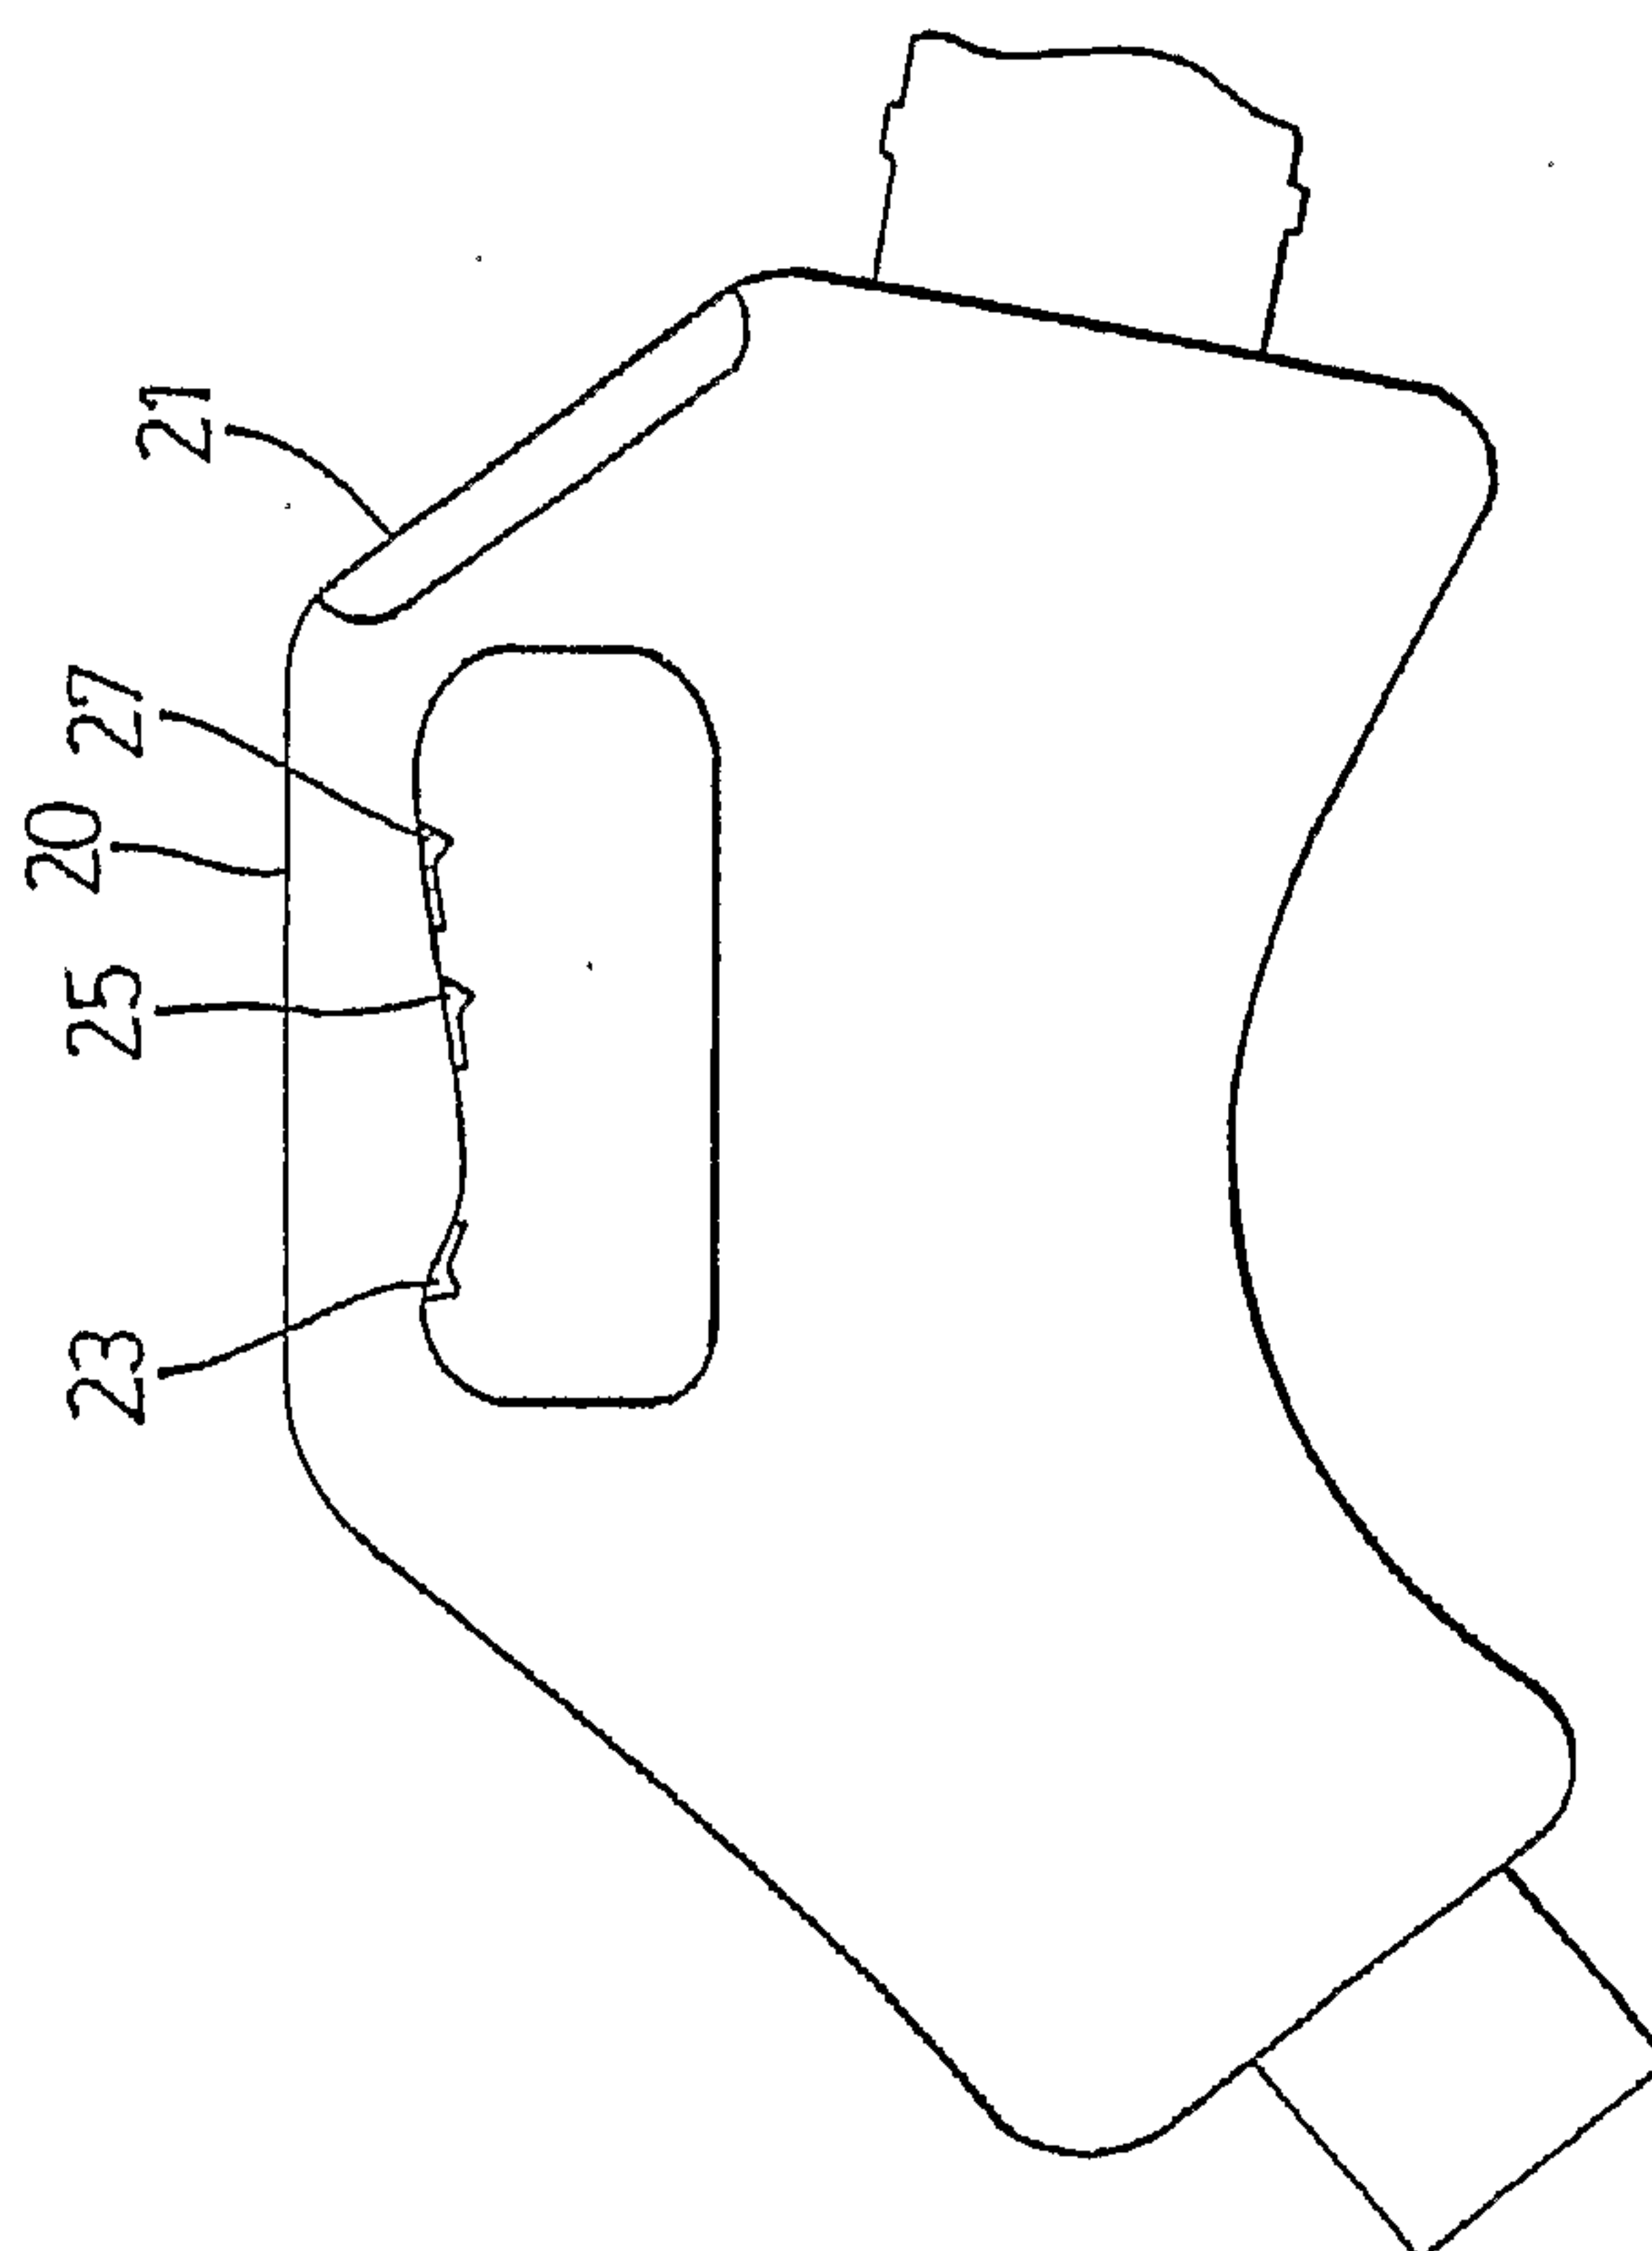FIG. 3FIG. 2

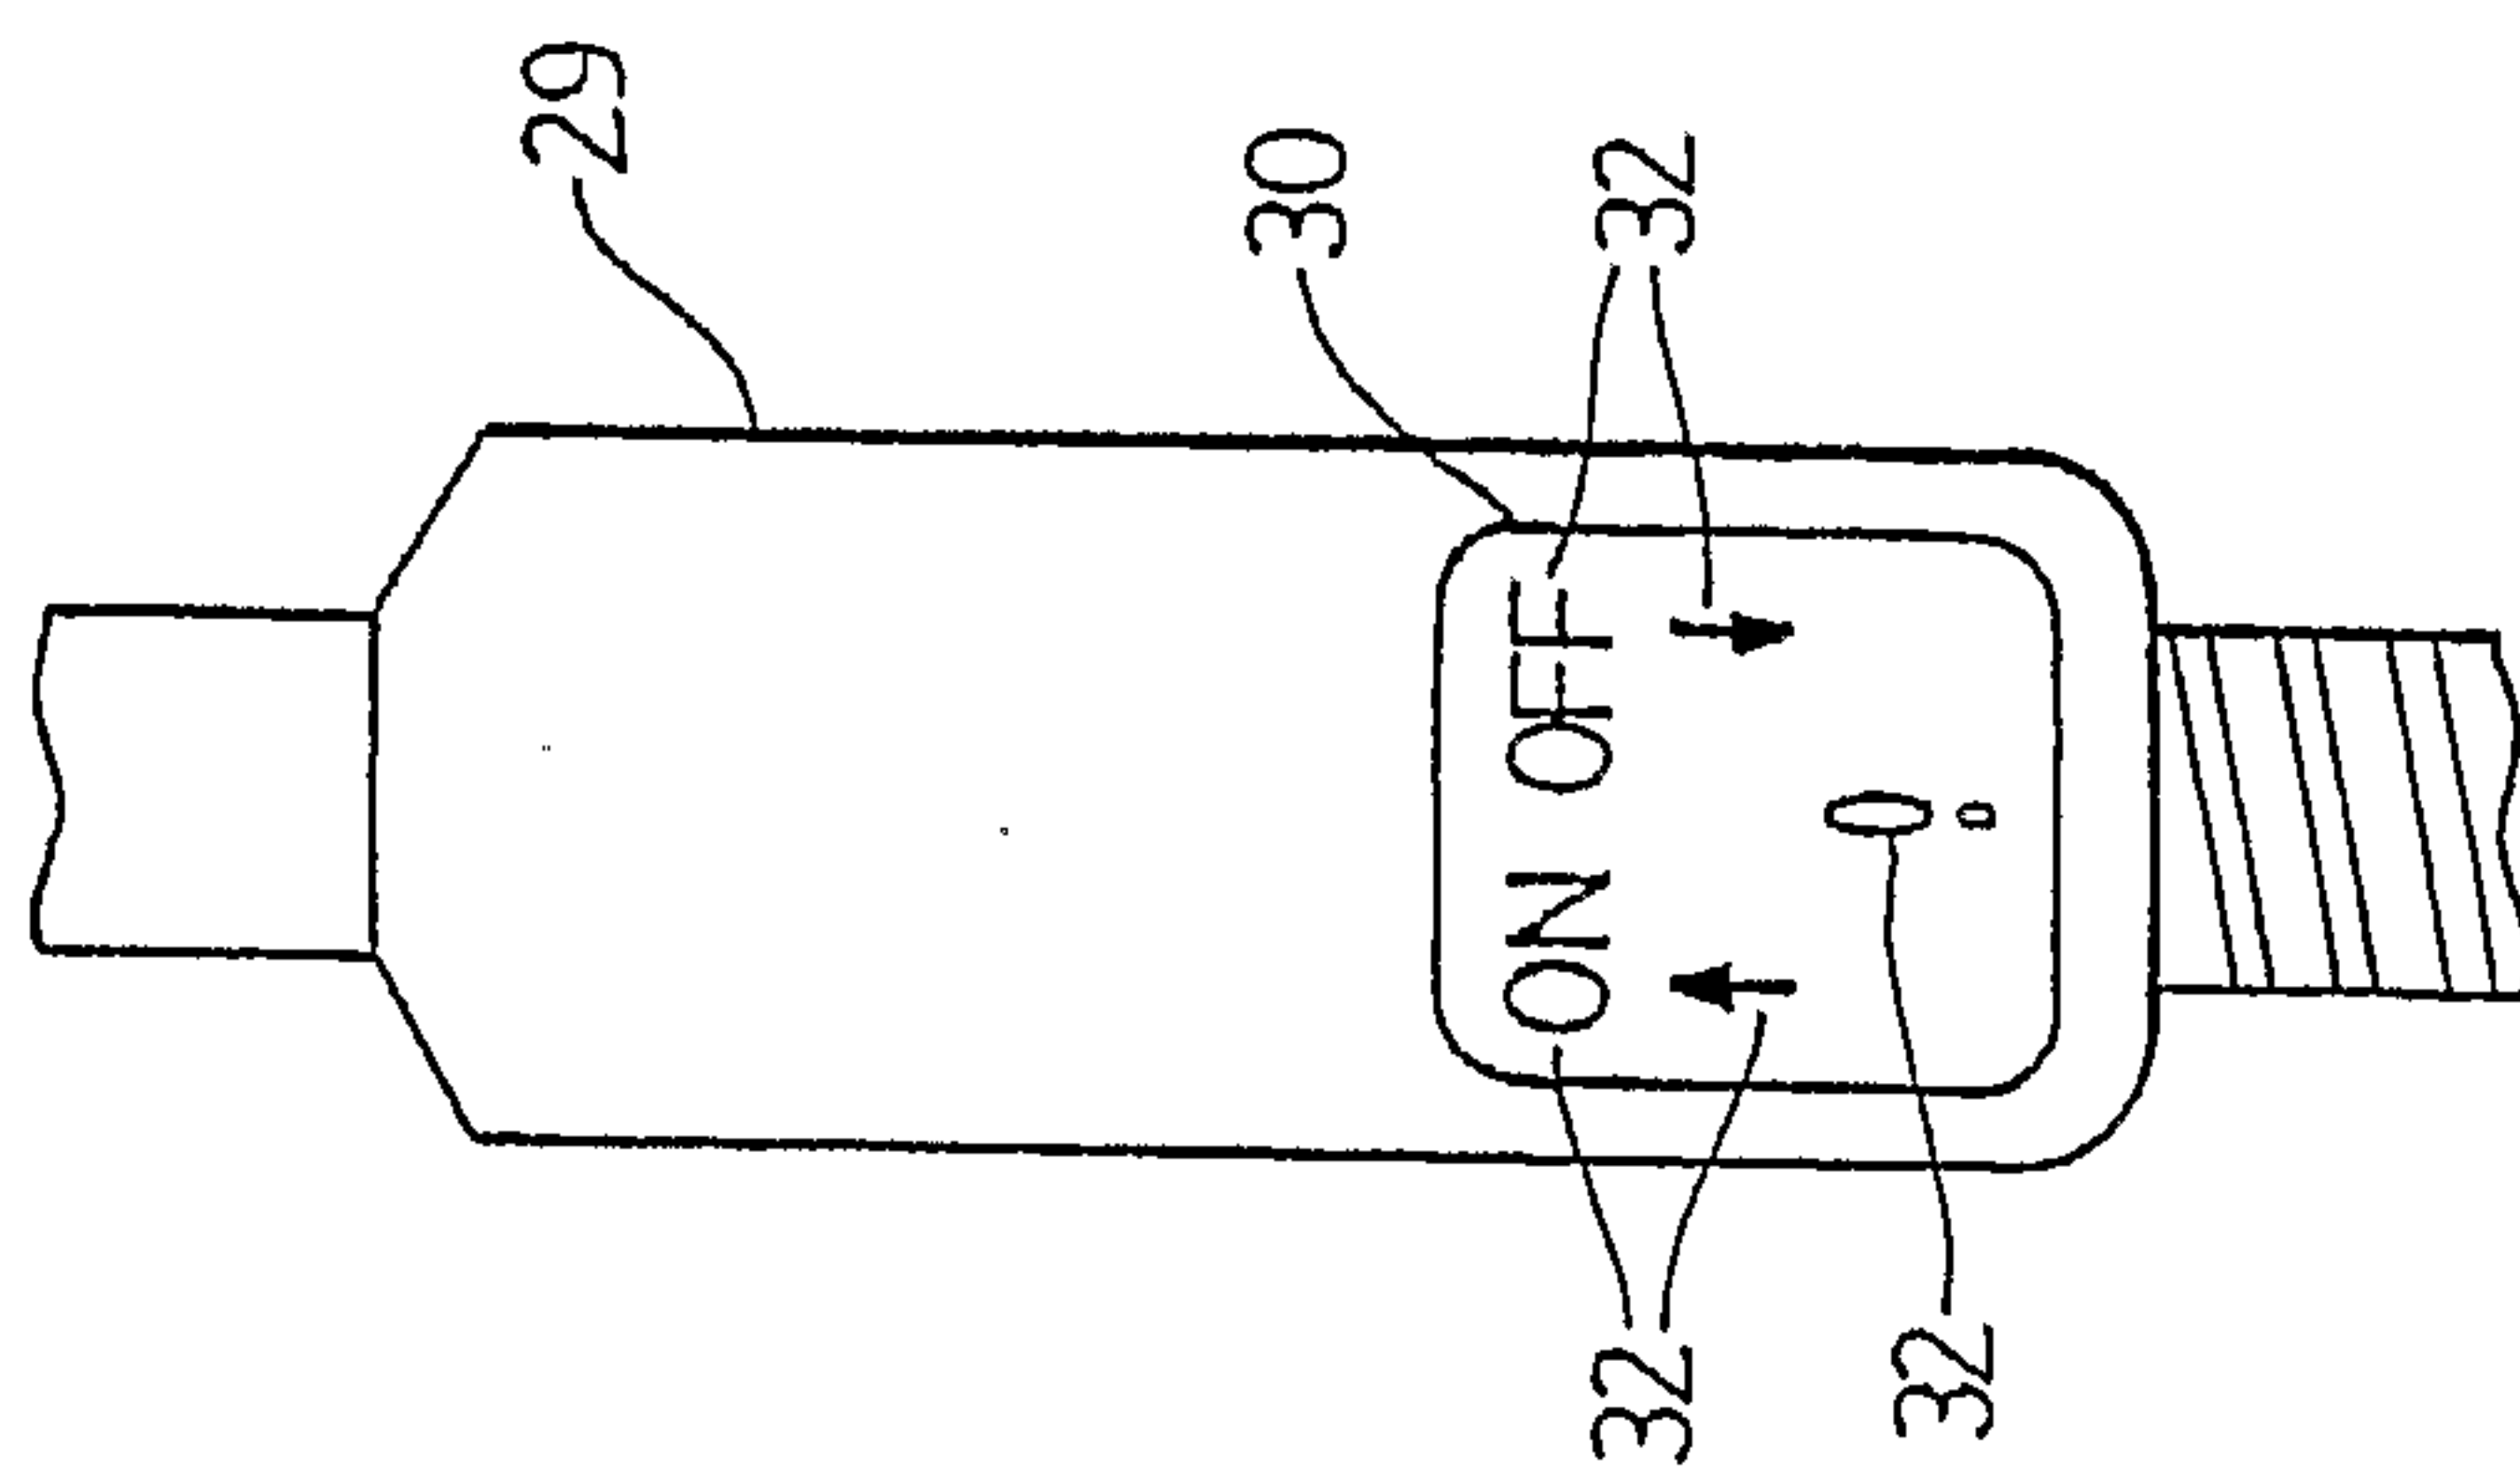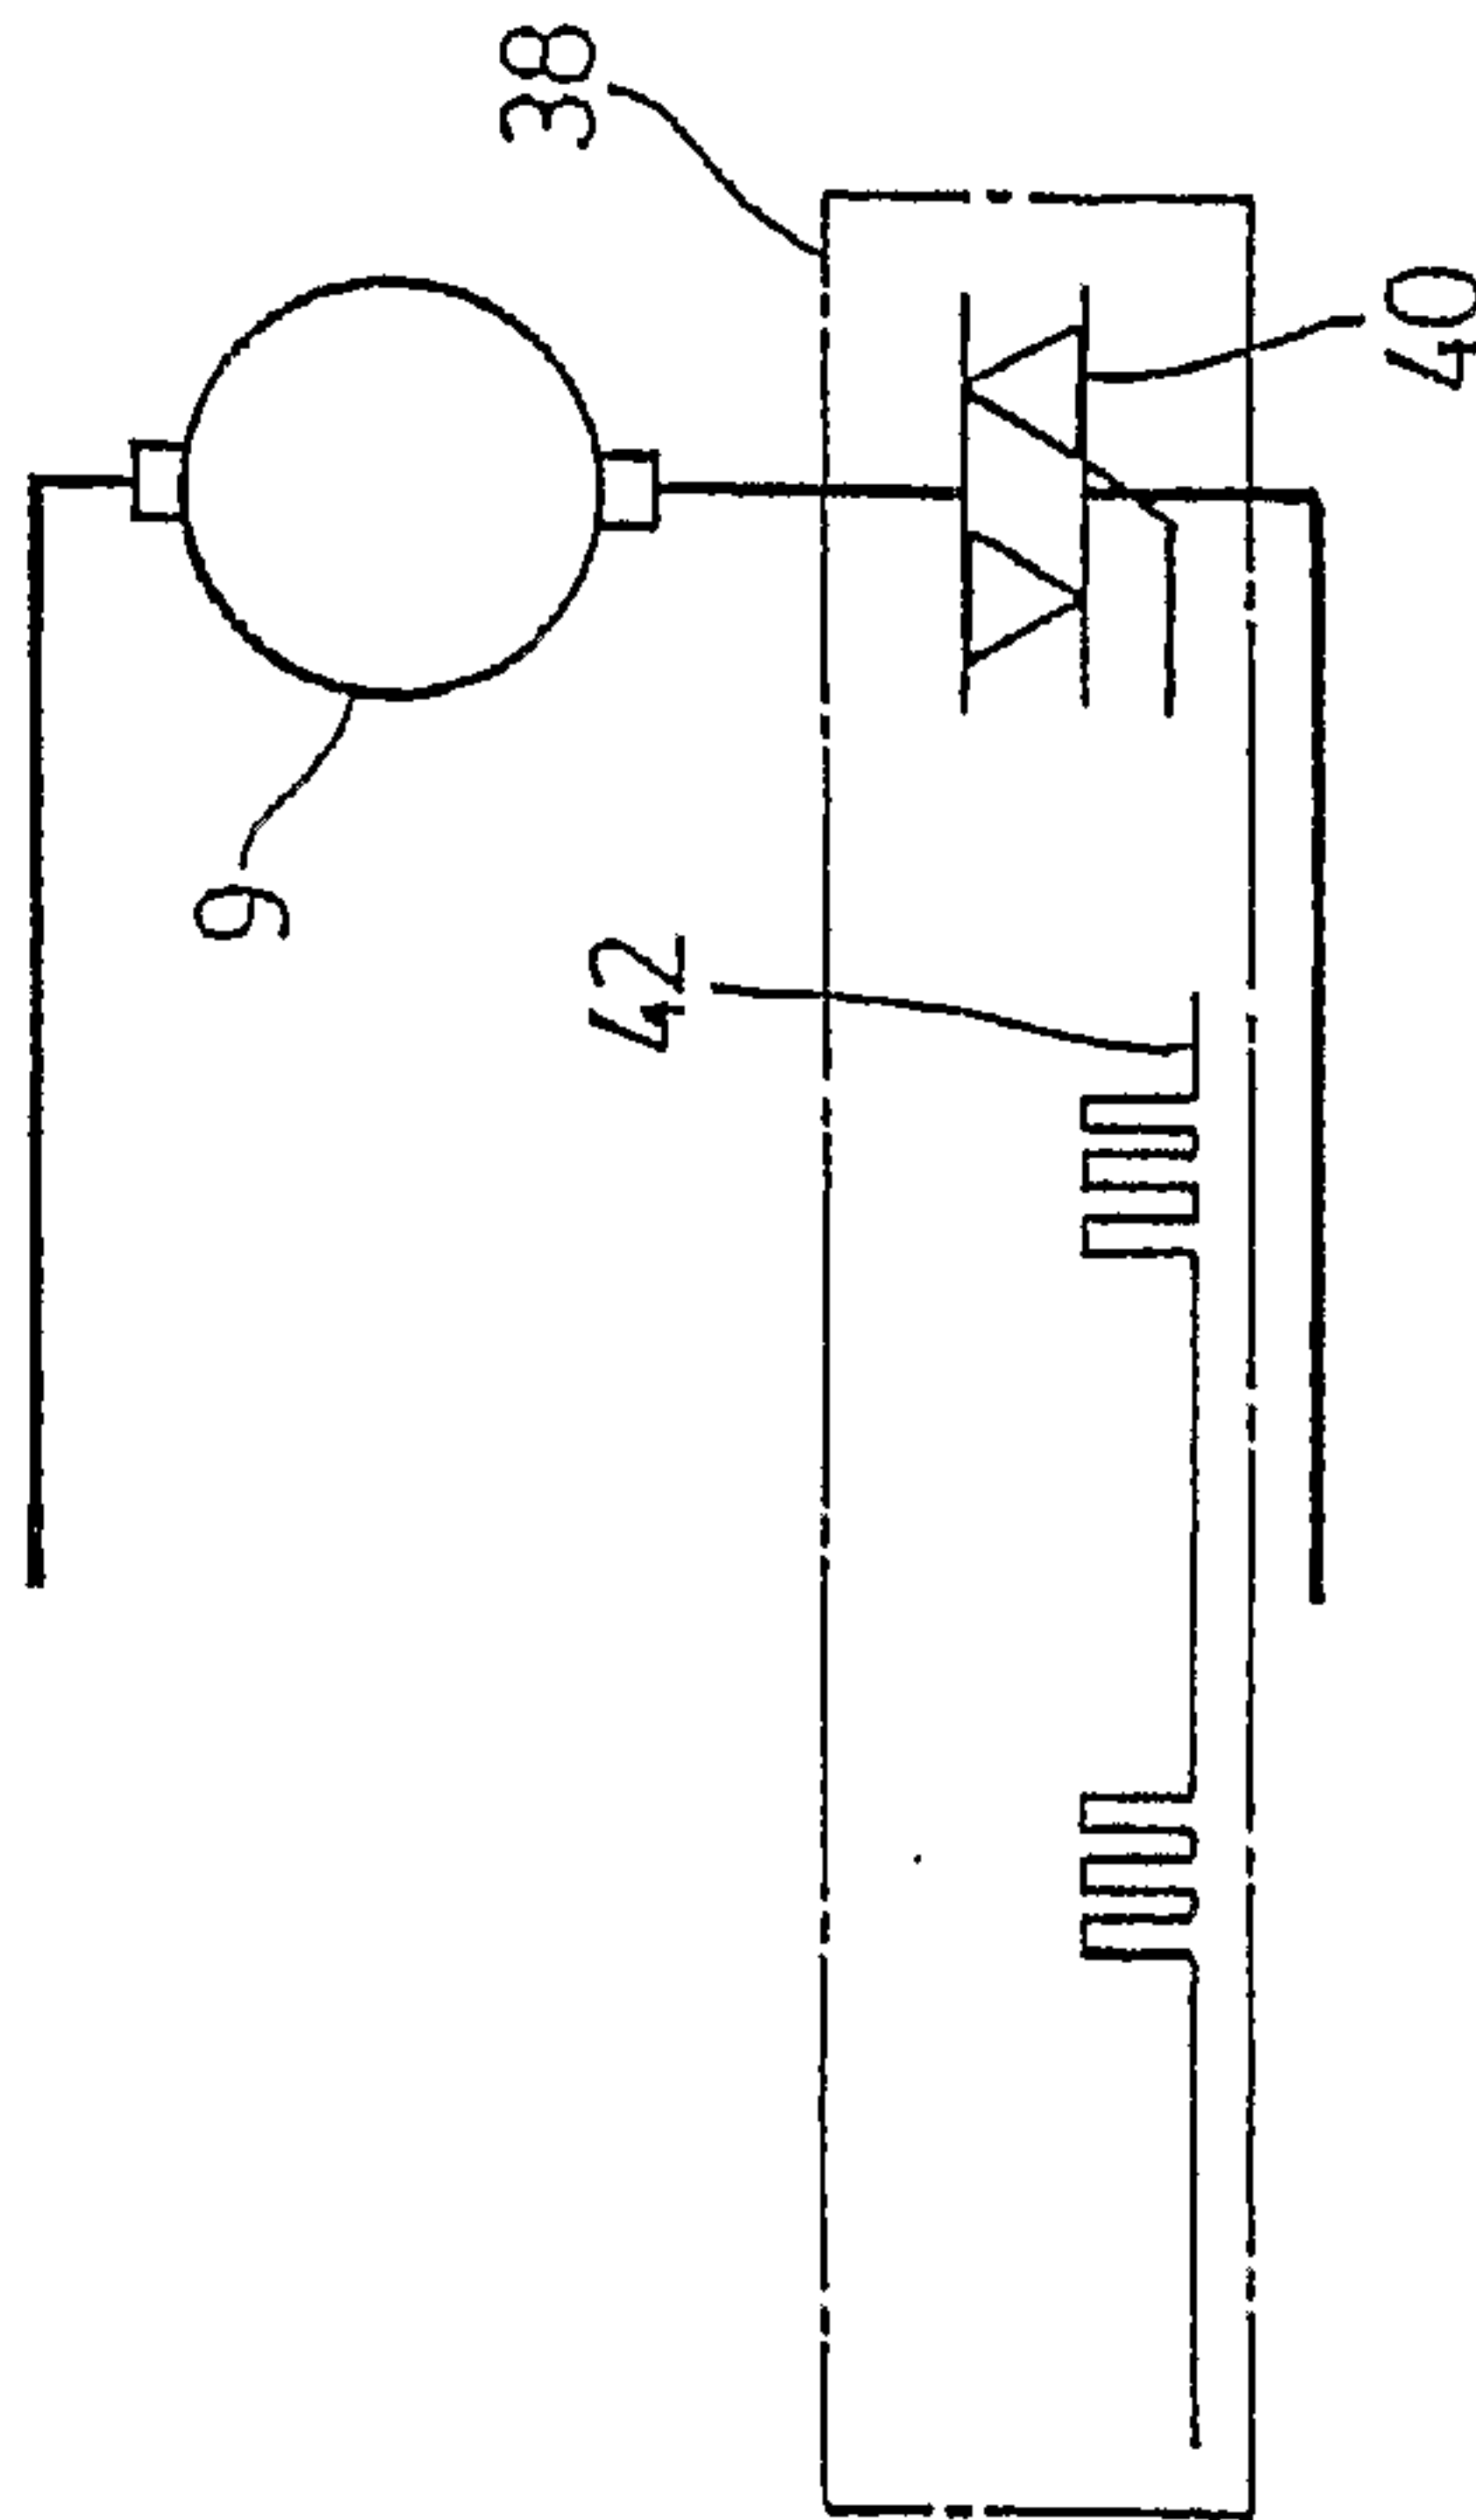FIG. 4FIG. 5

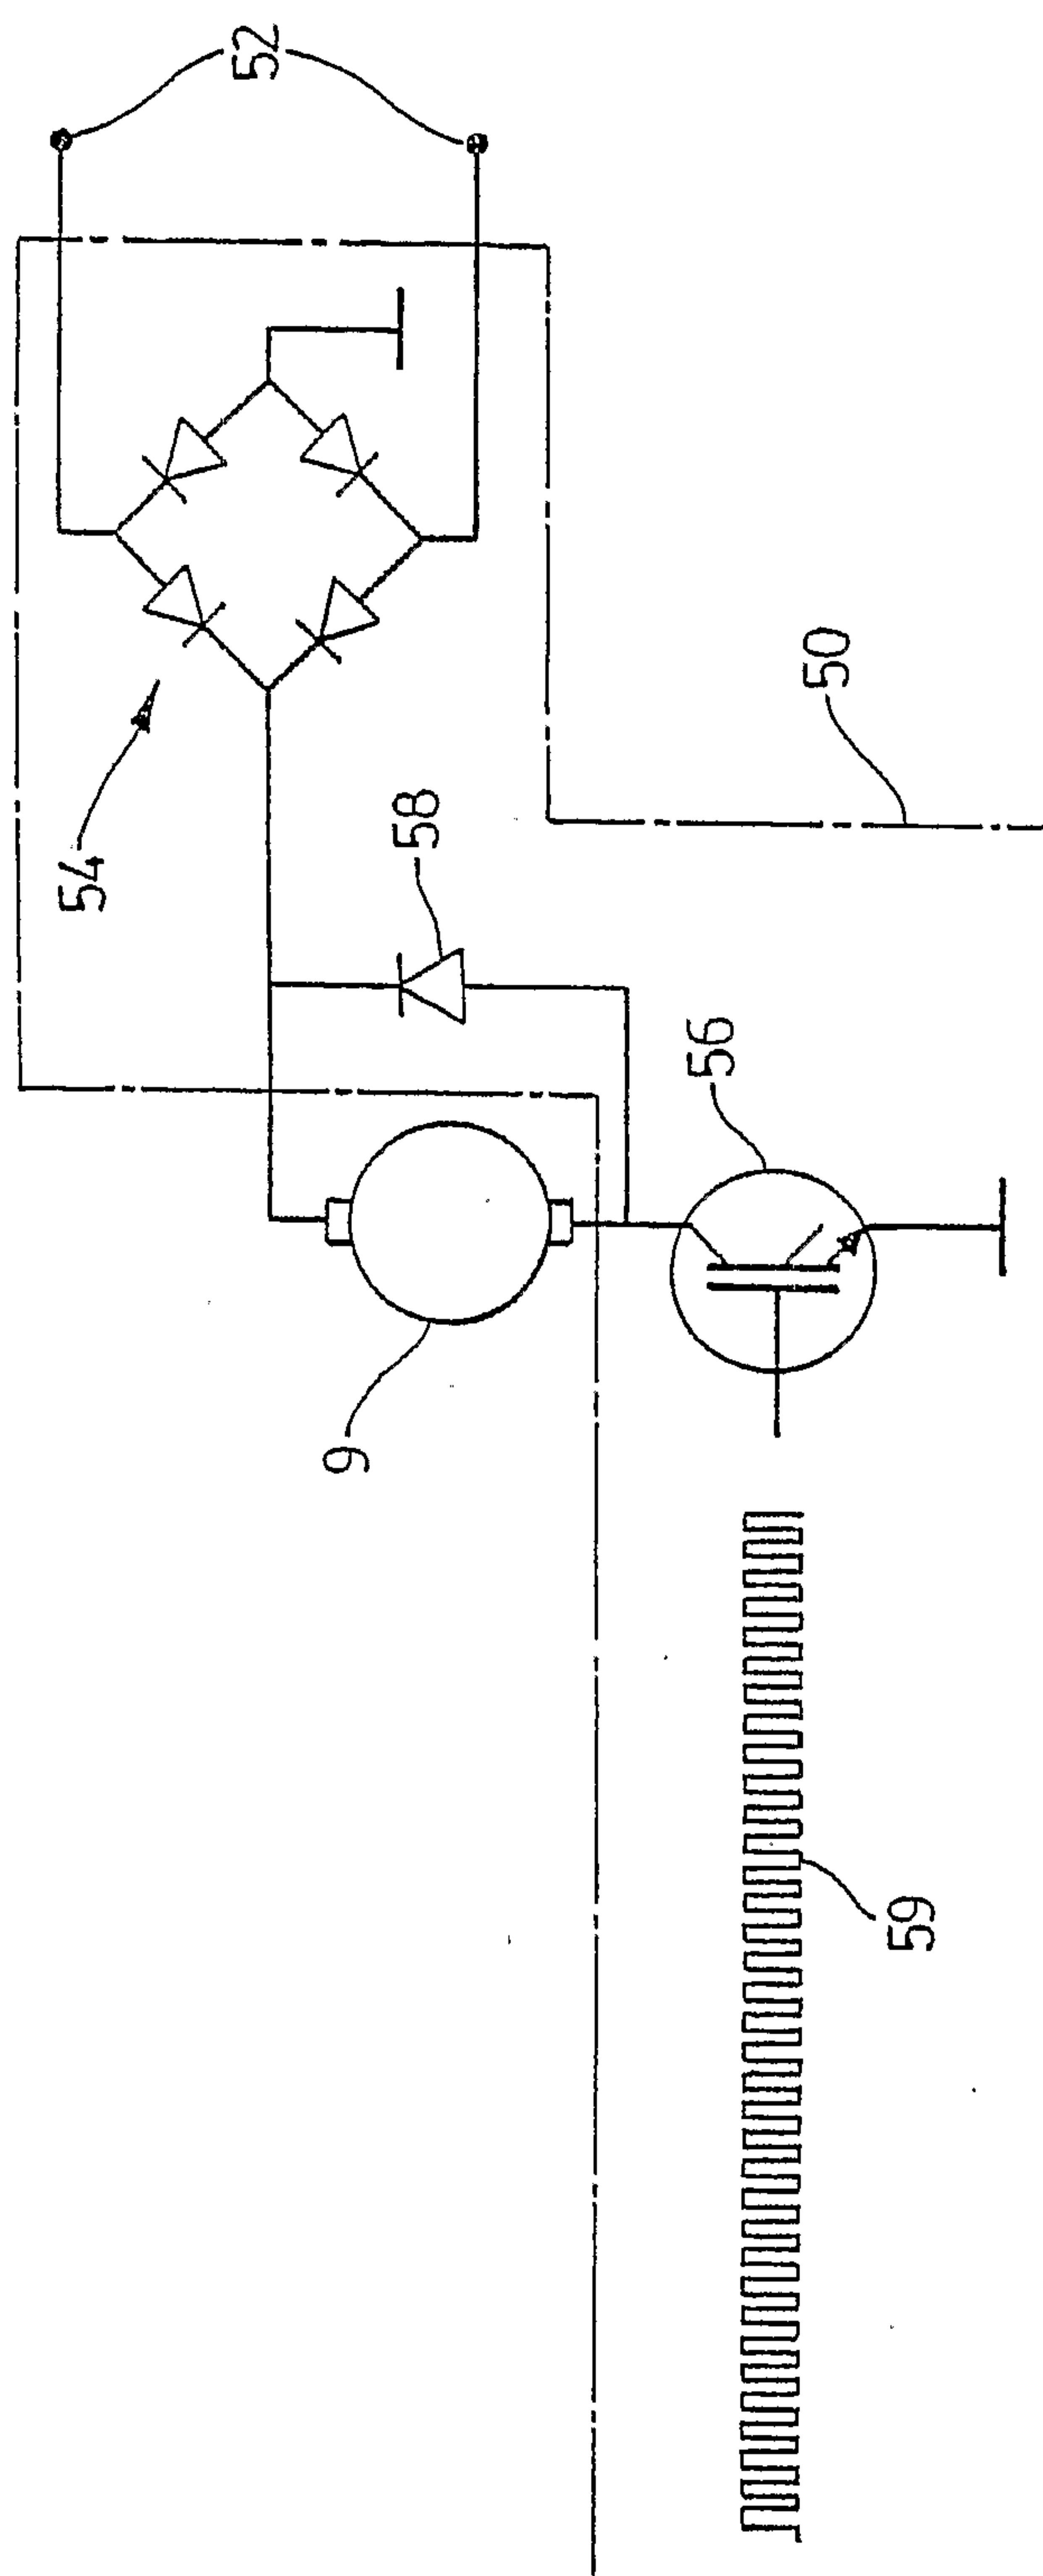FIG. 6

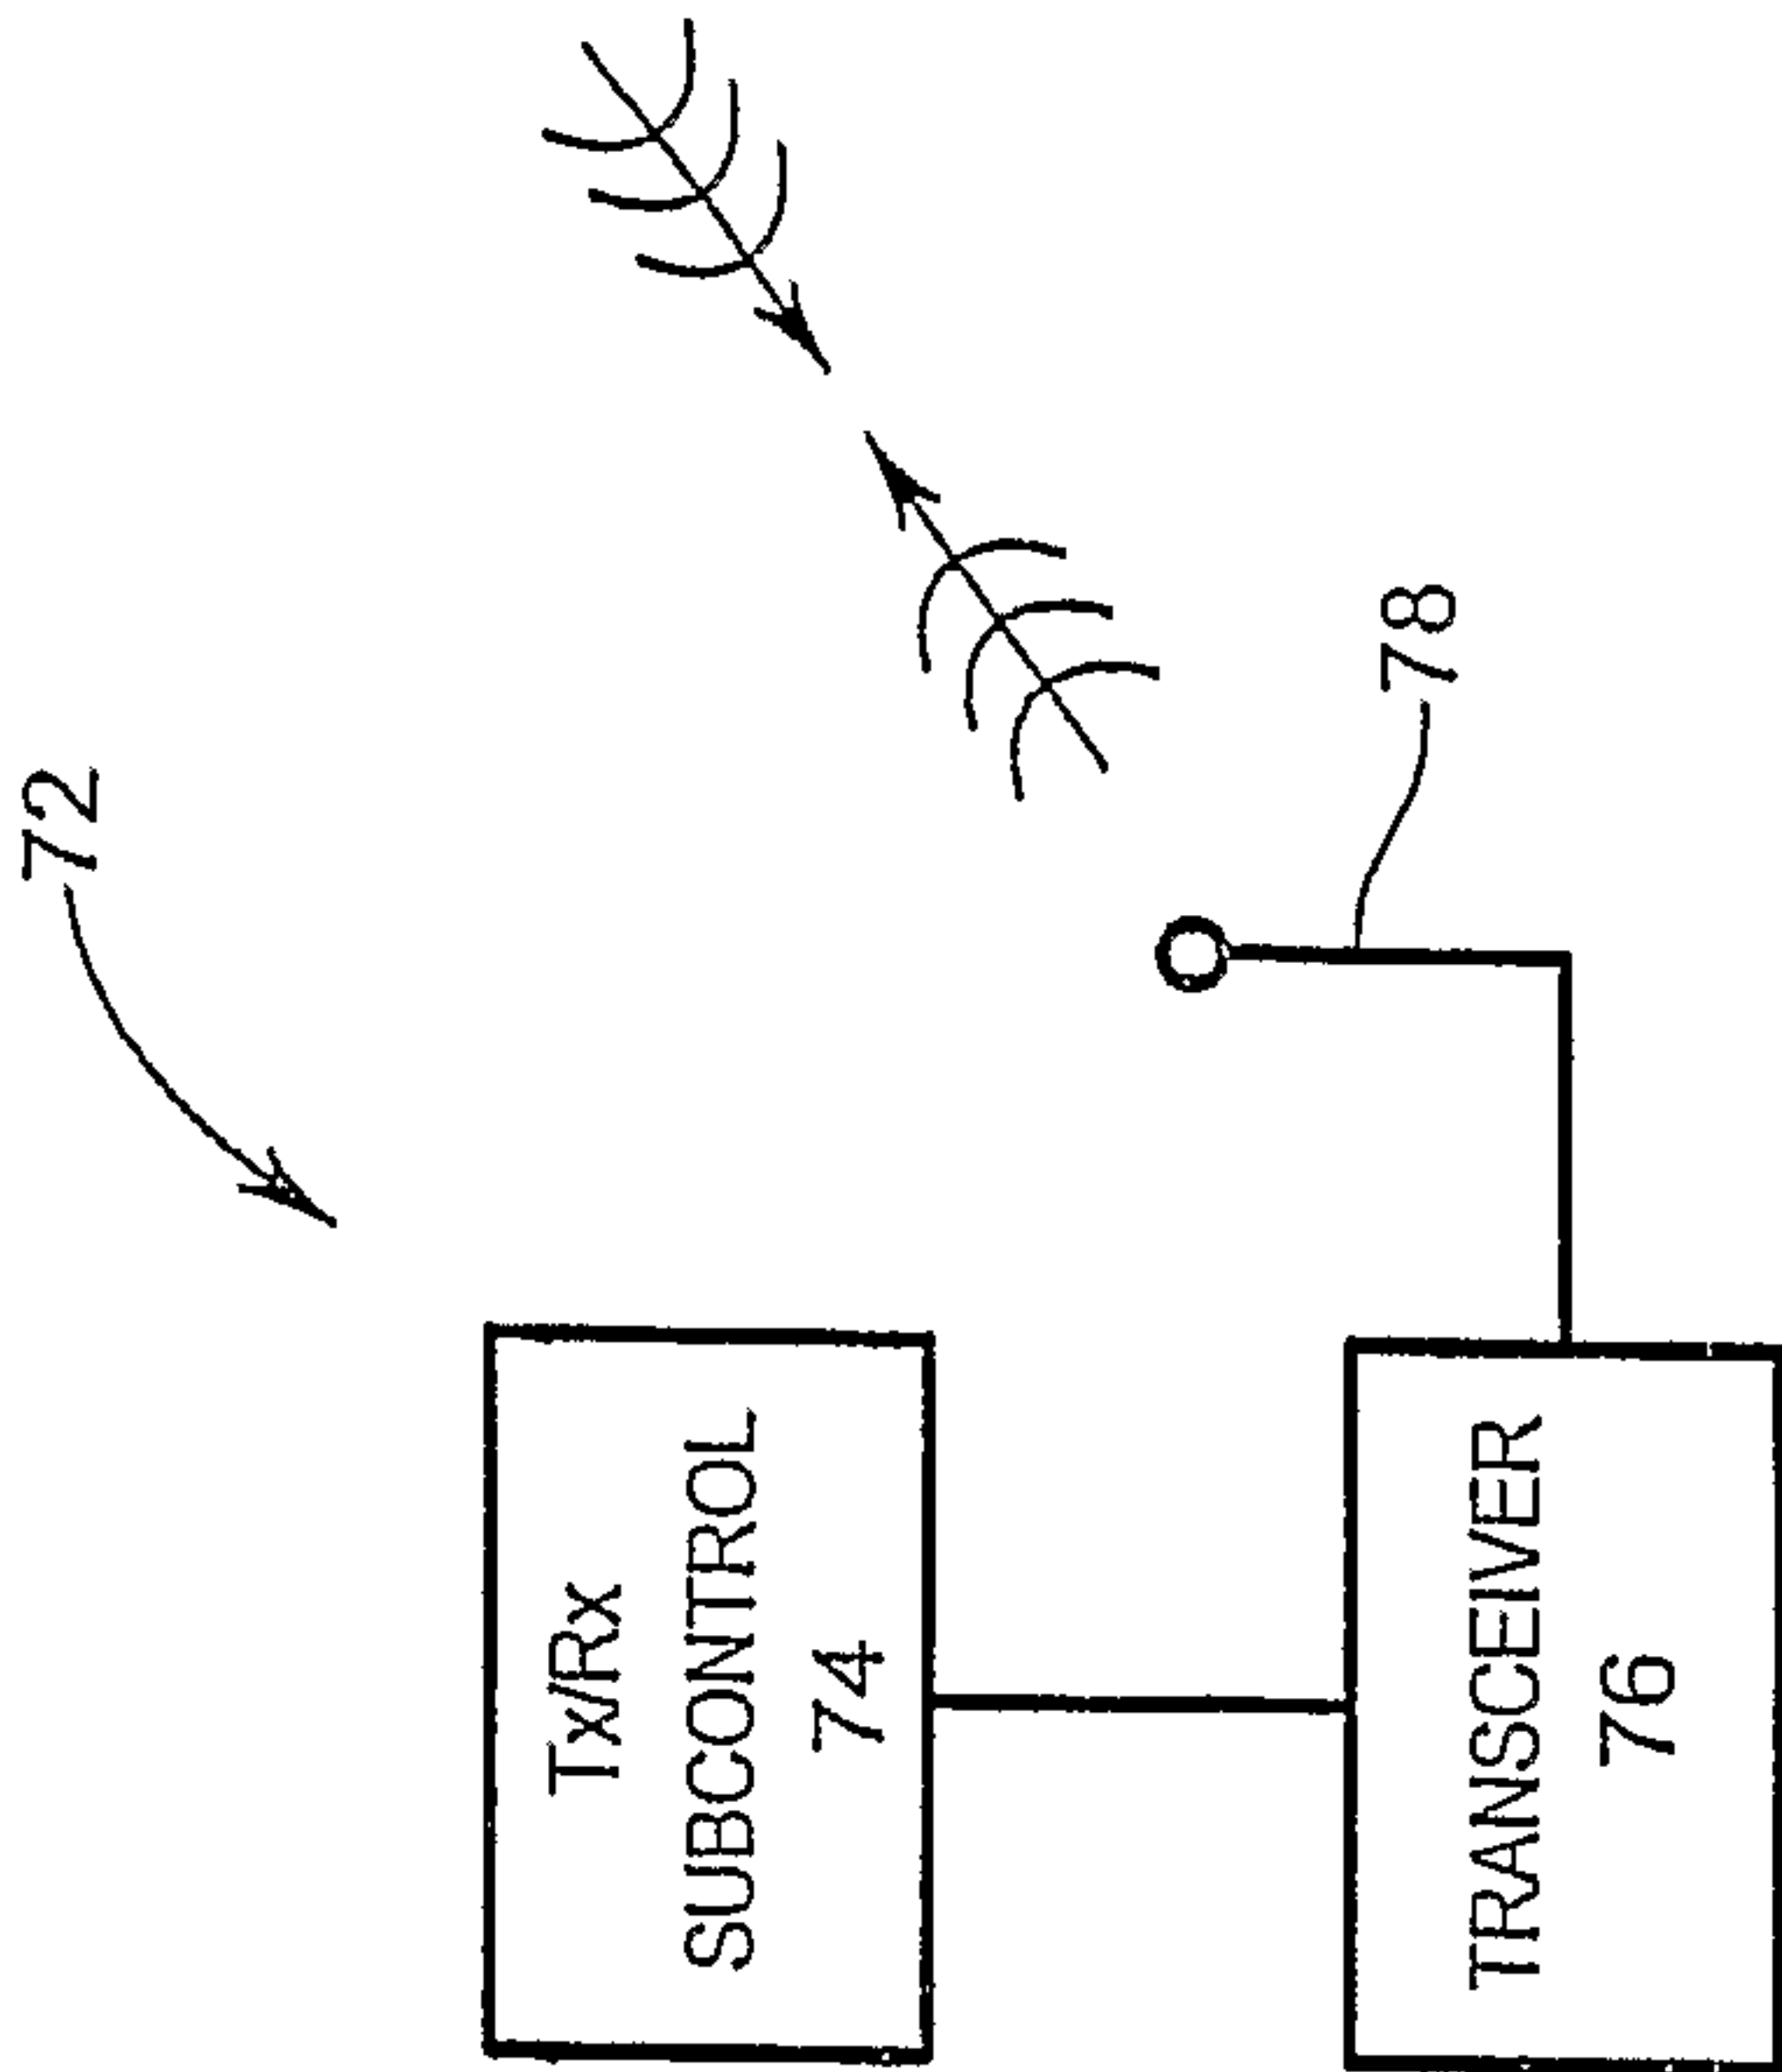


FIG. 9

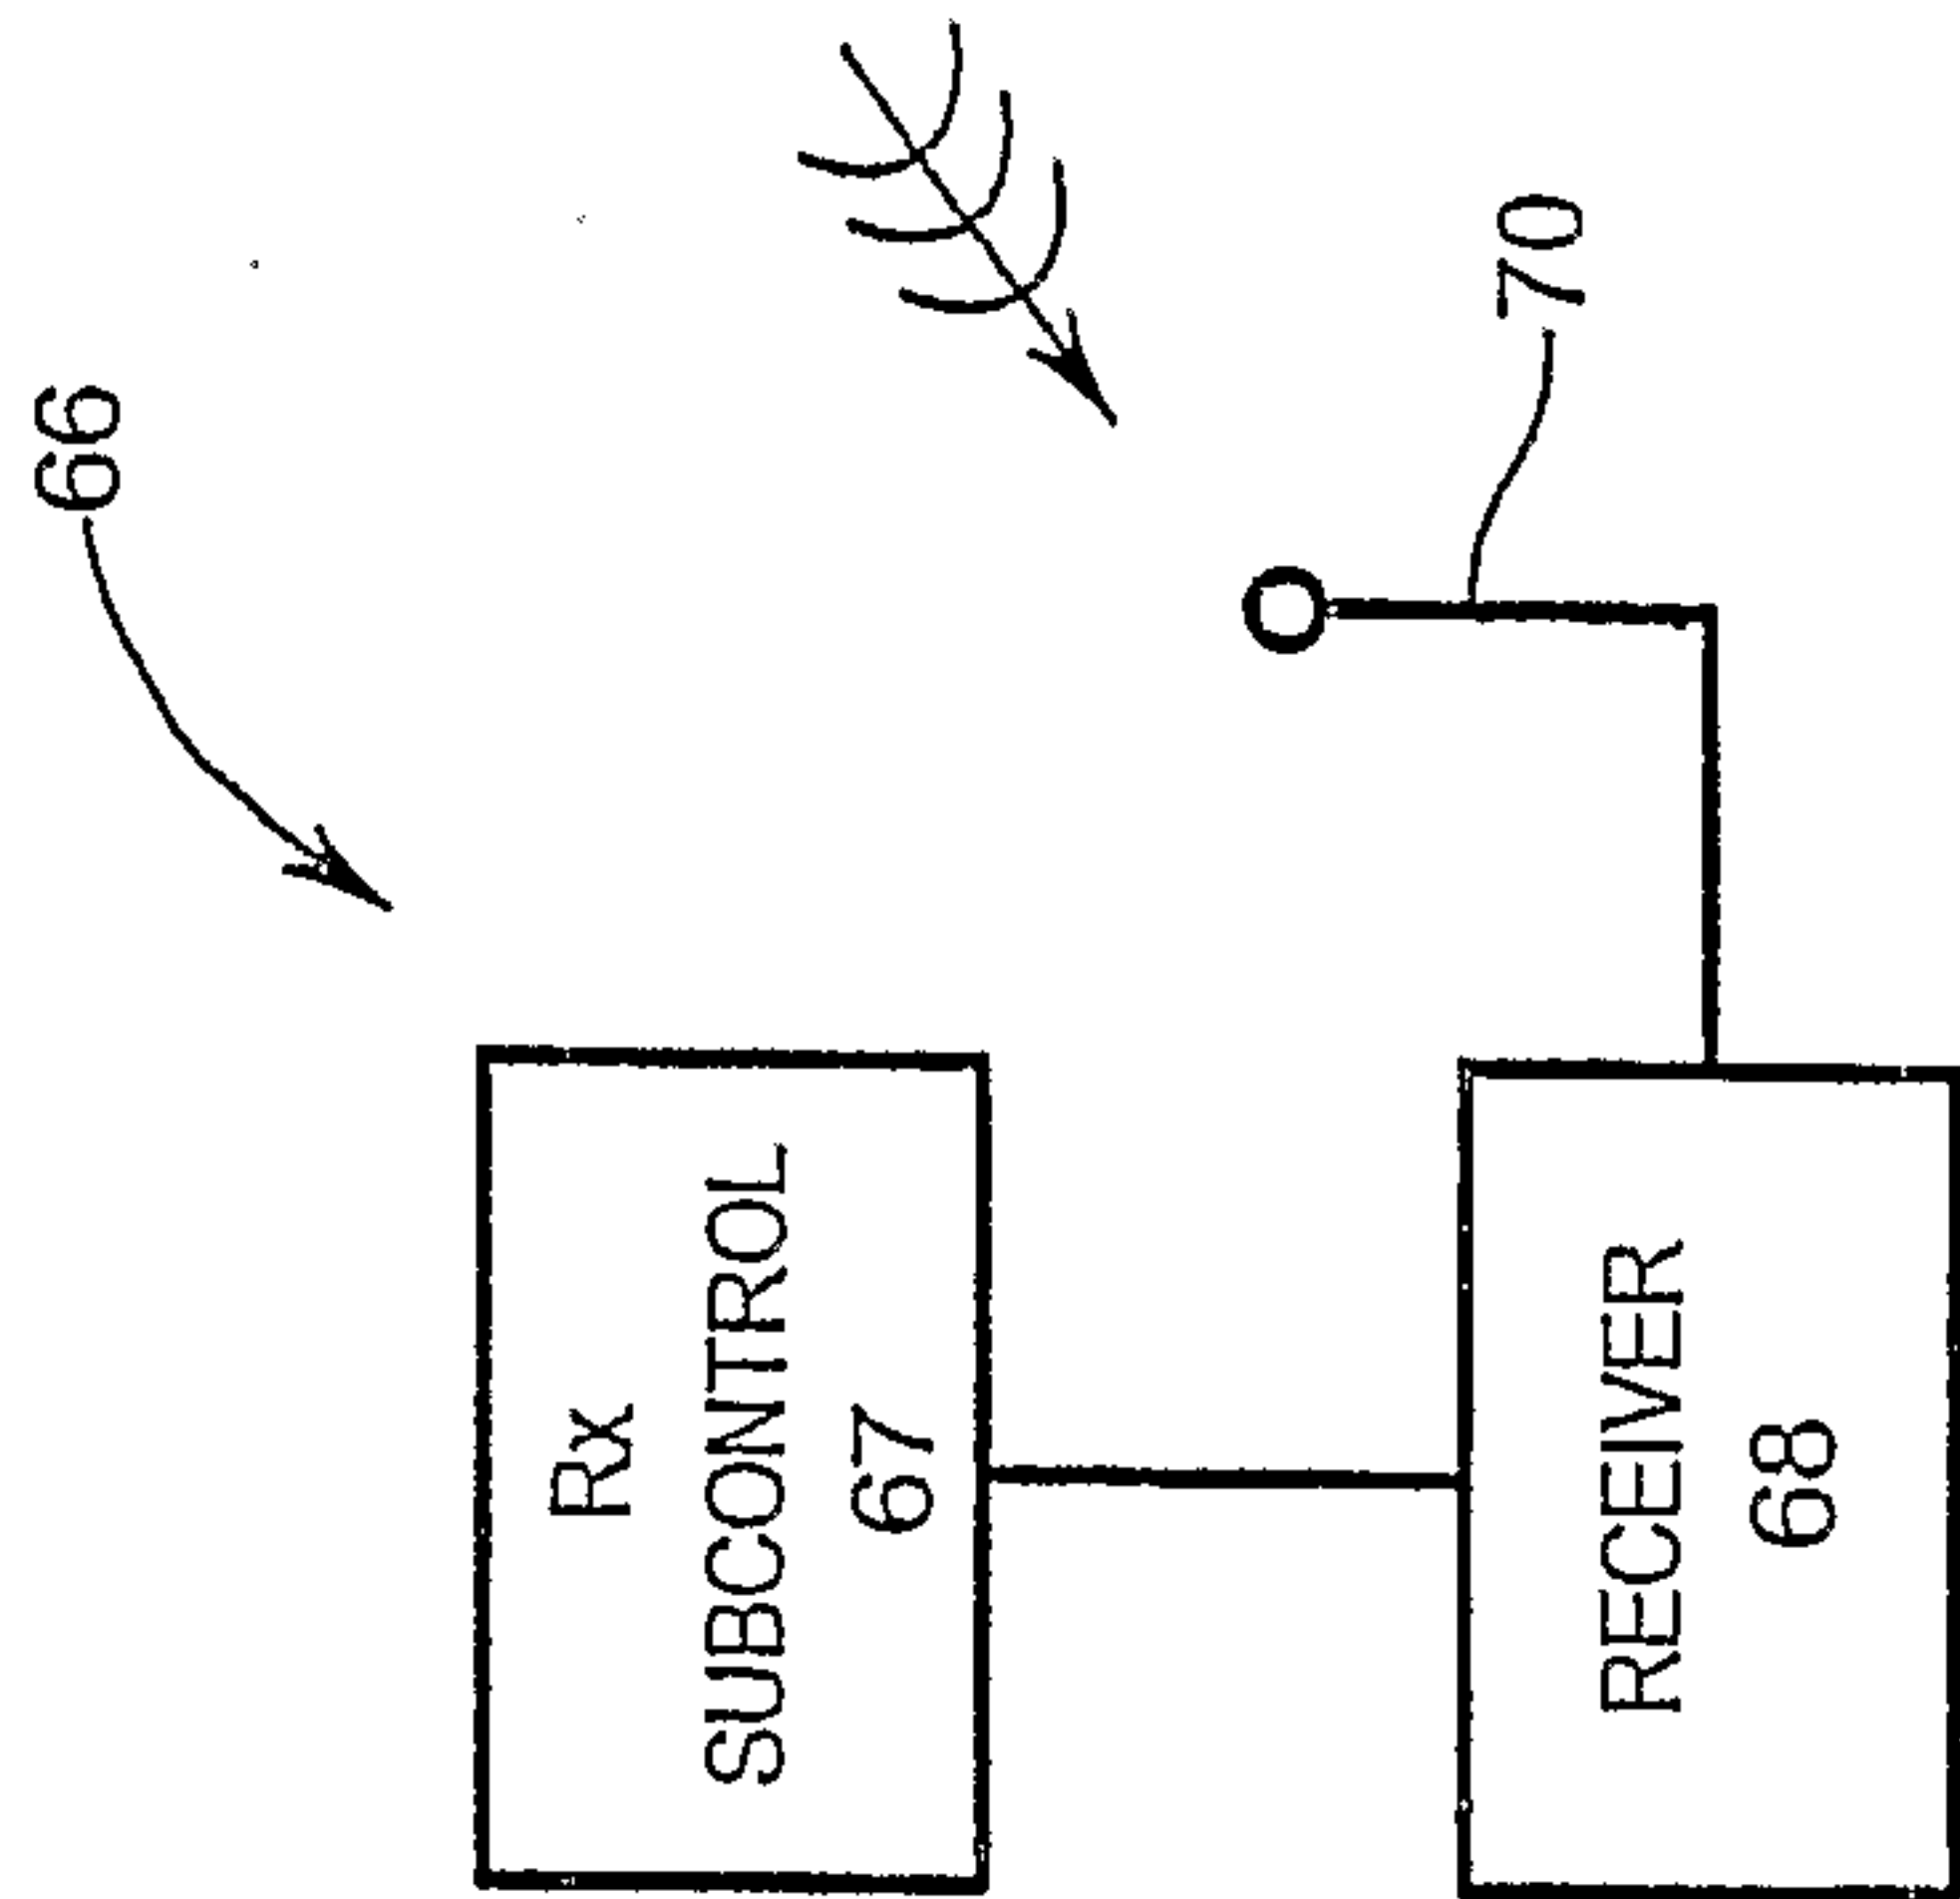


FIG. 8

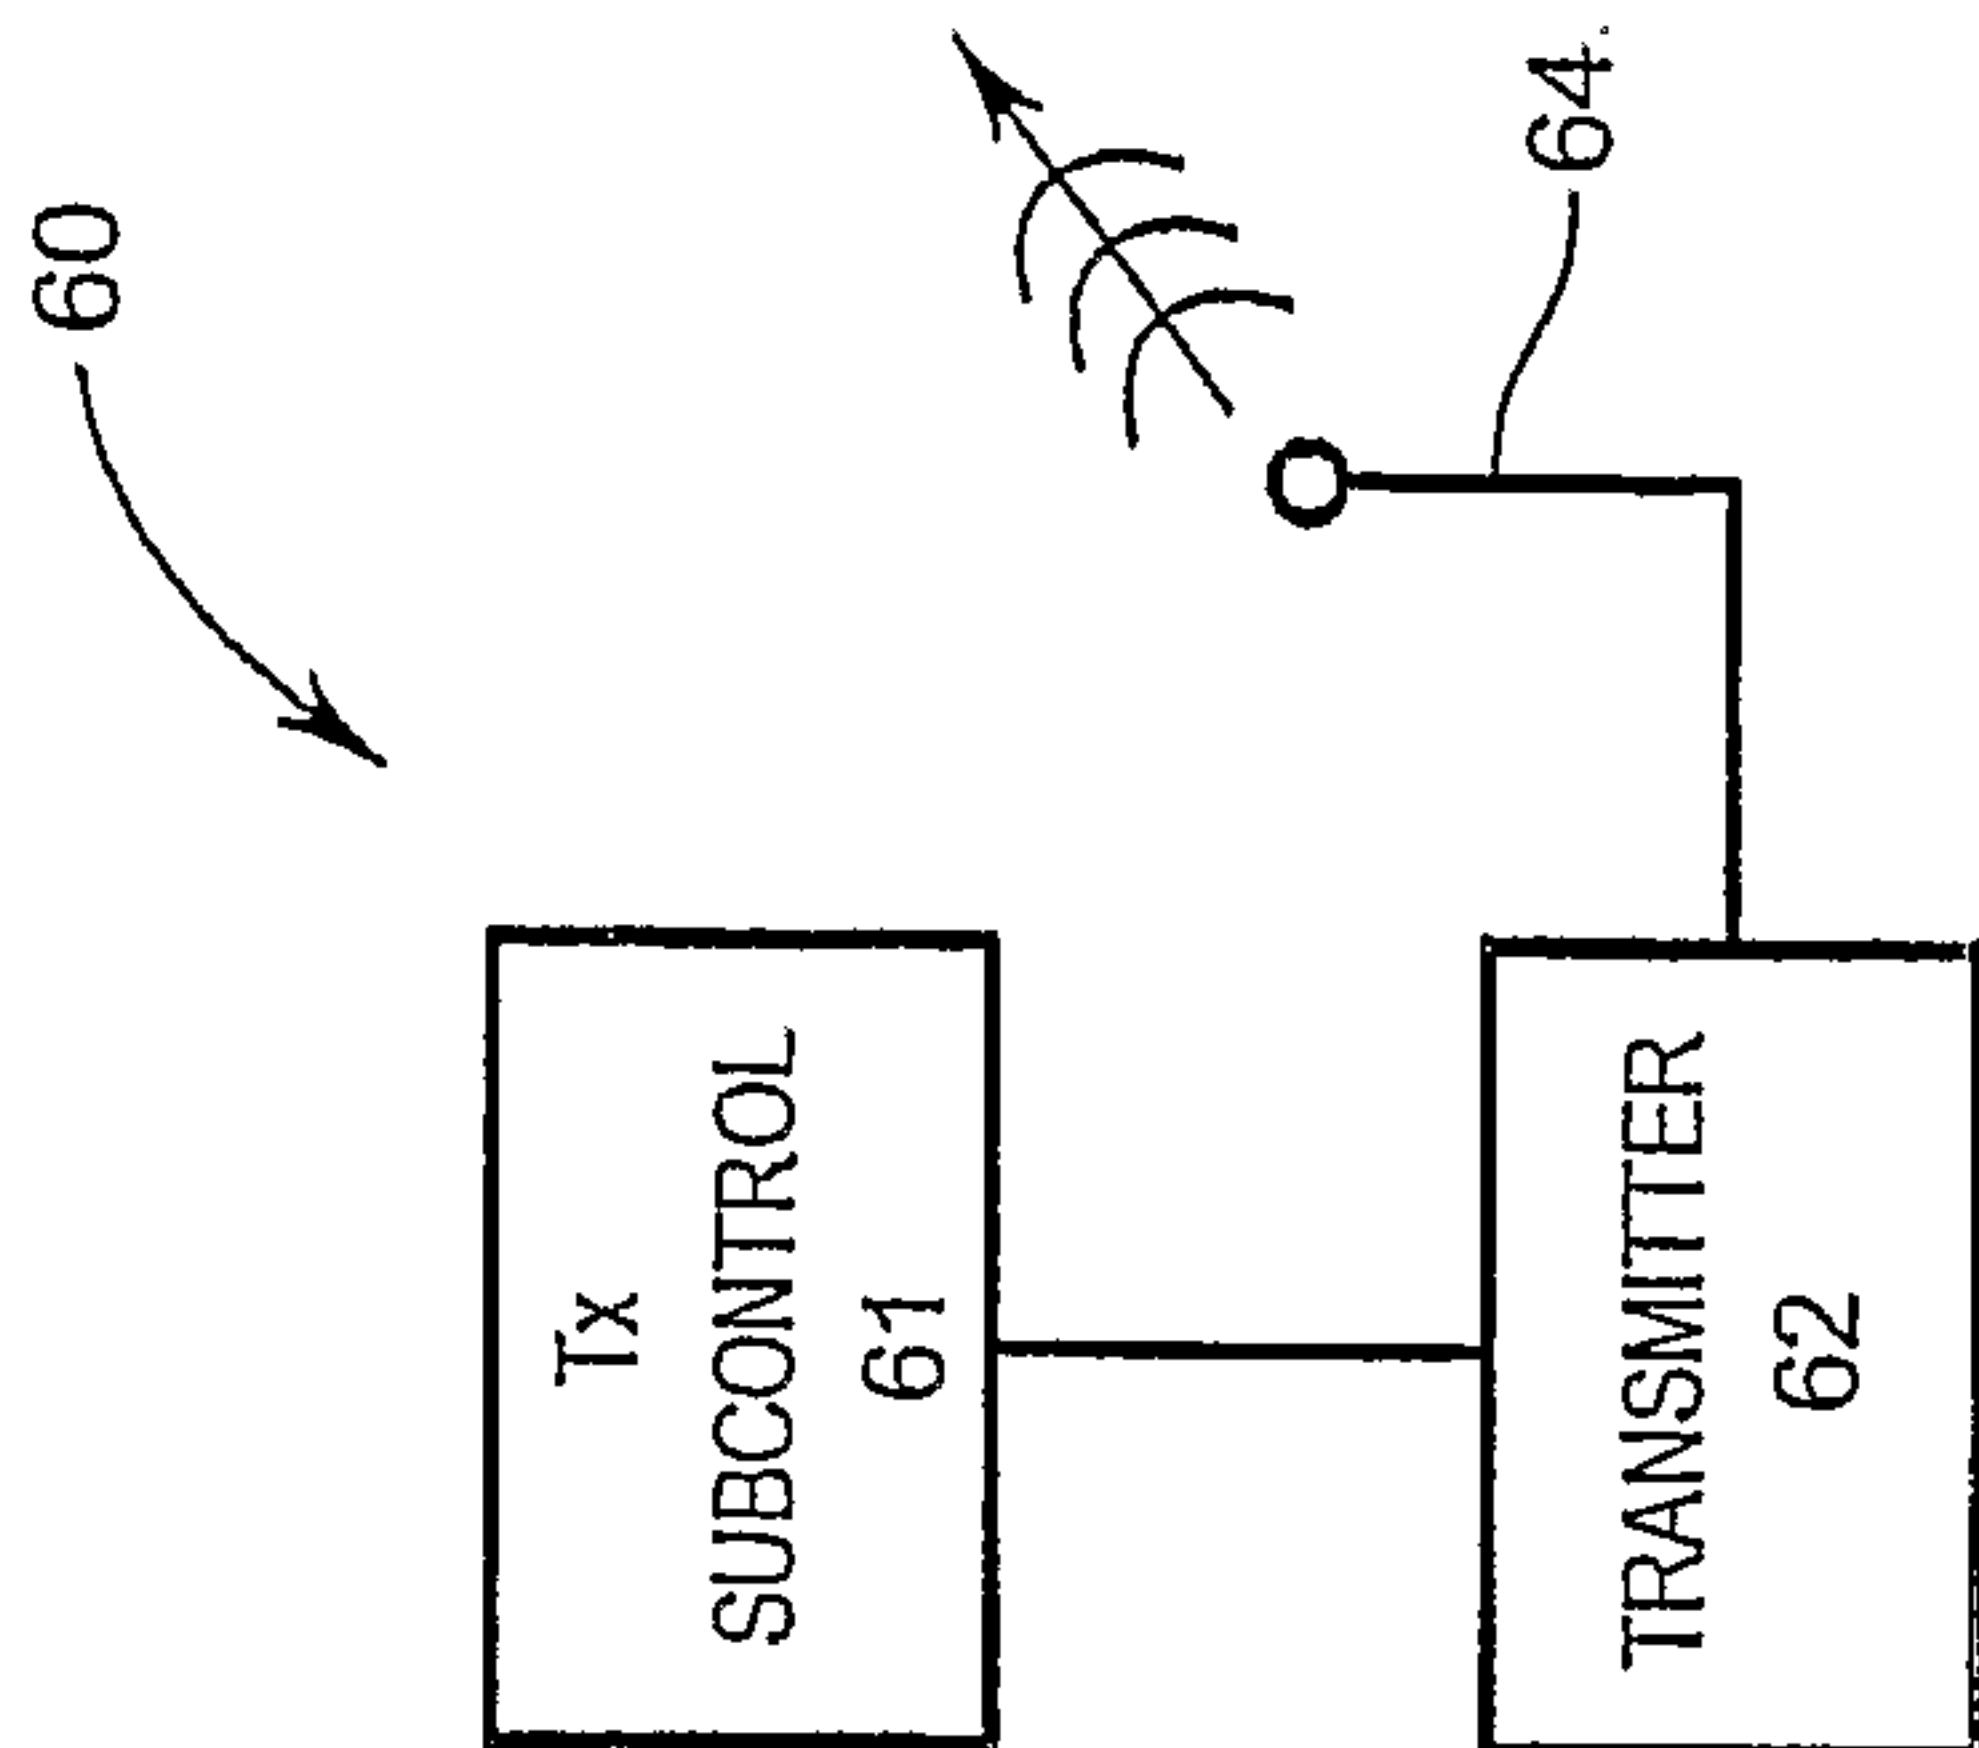
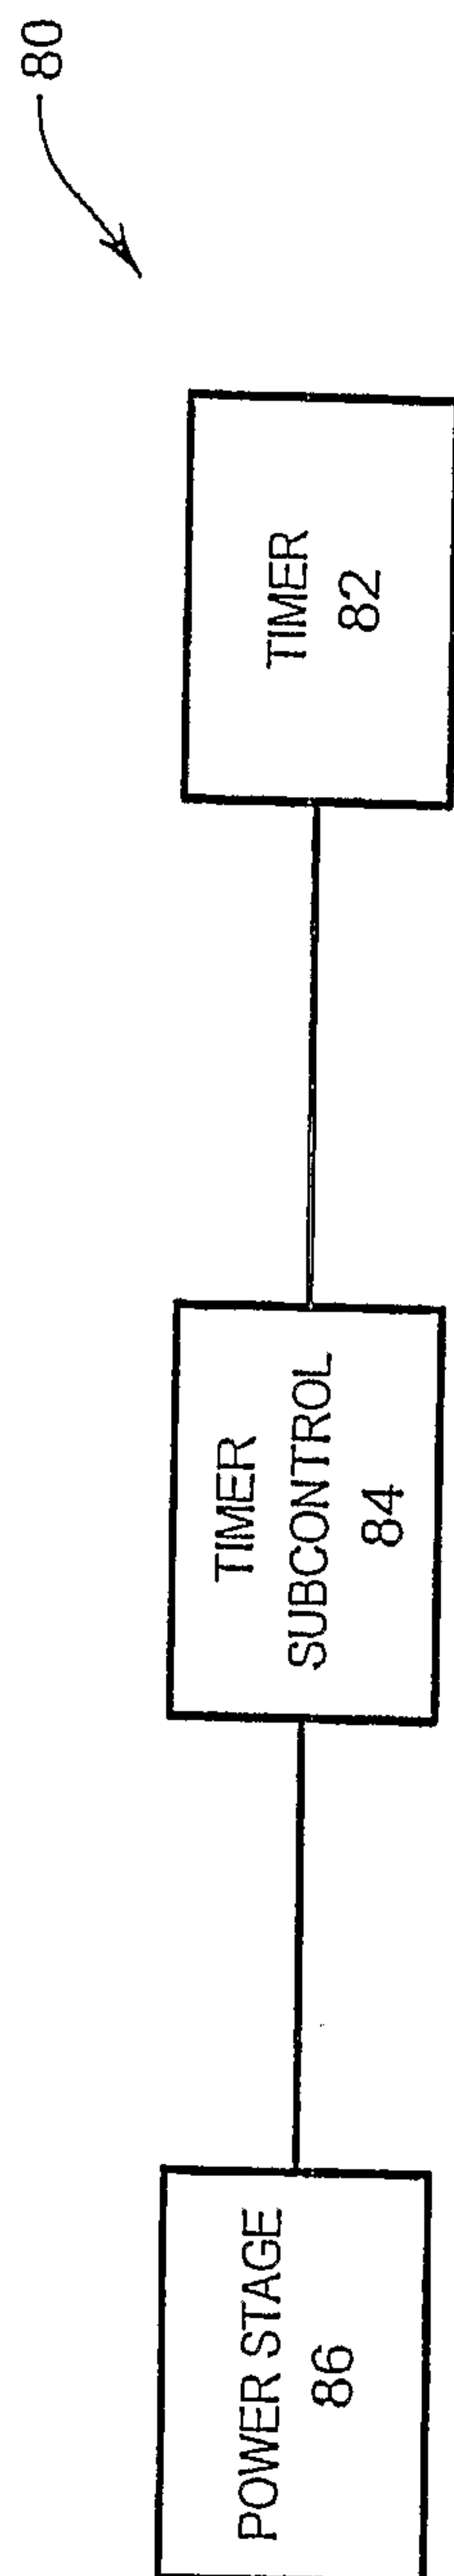
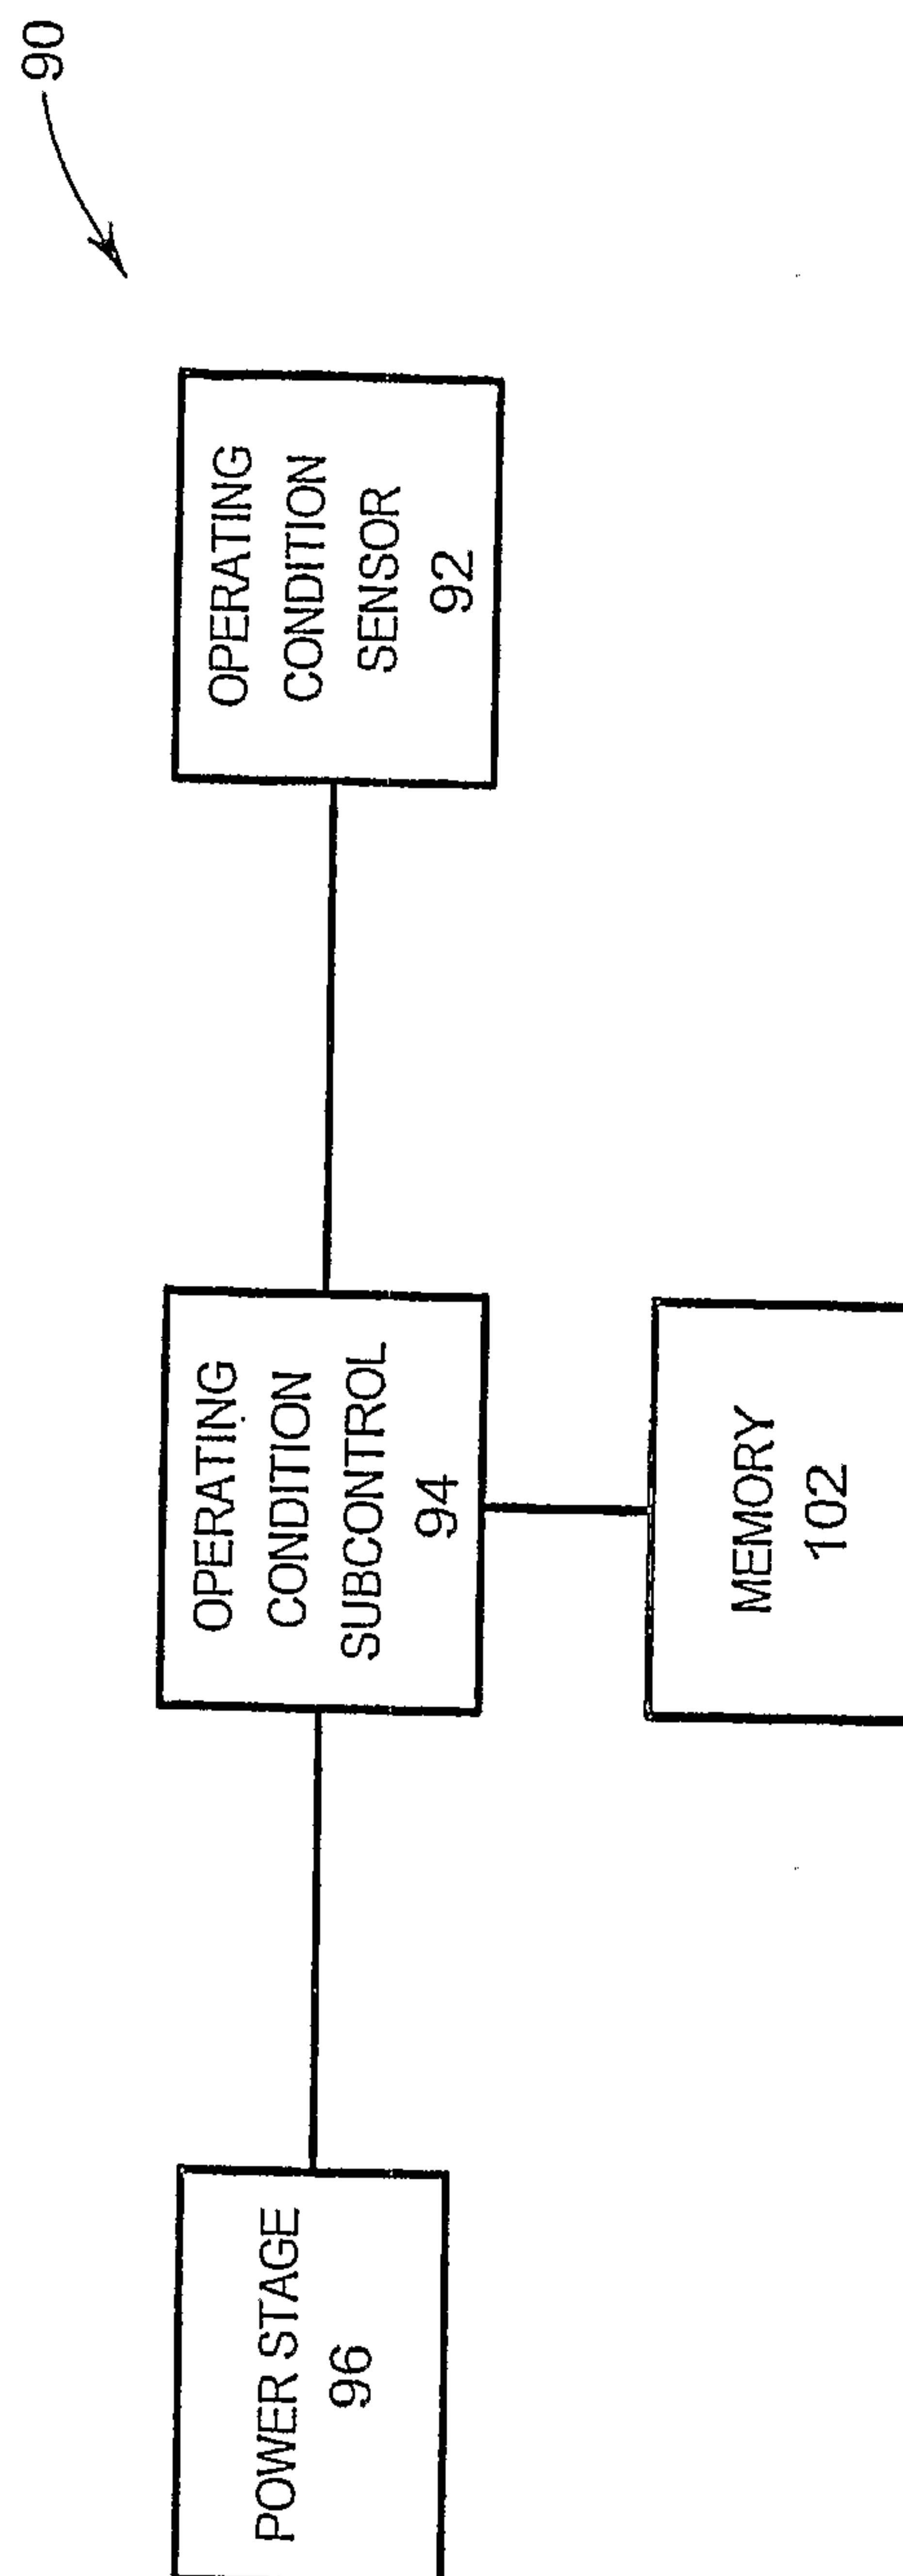
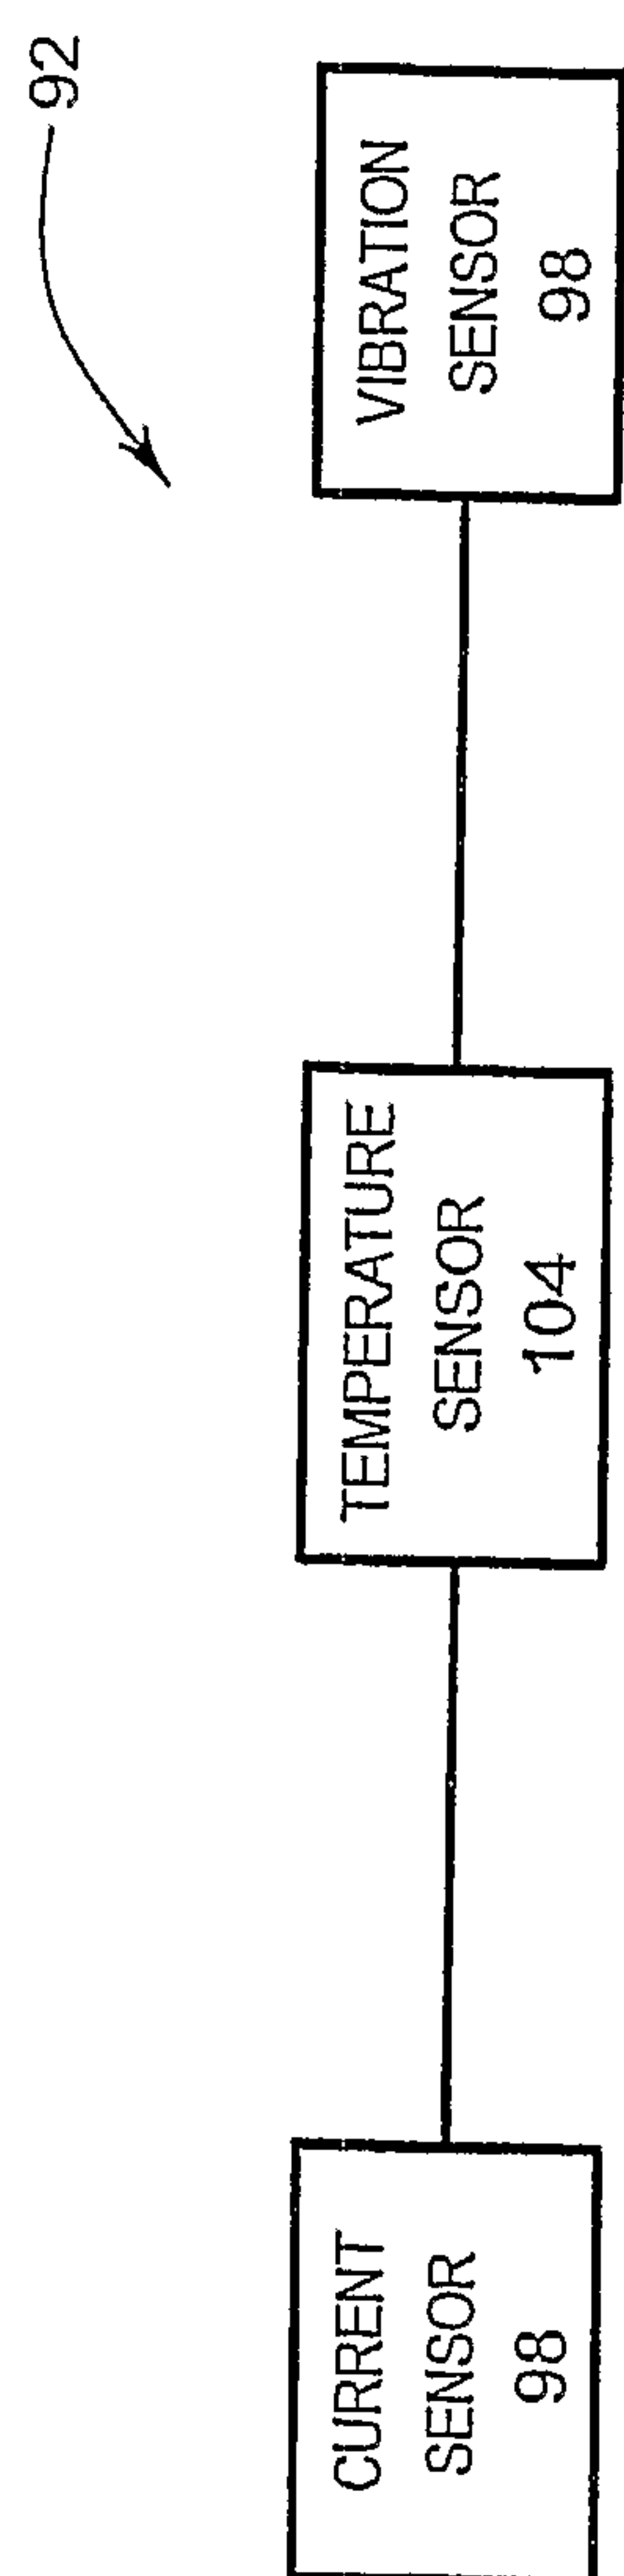
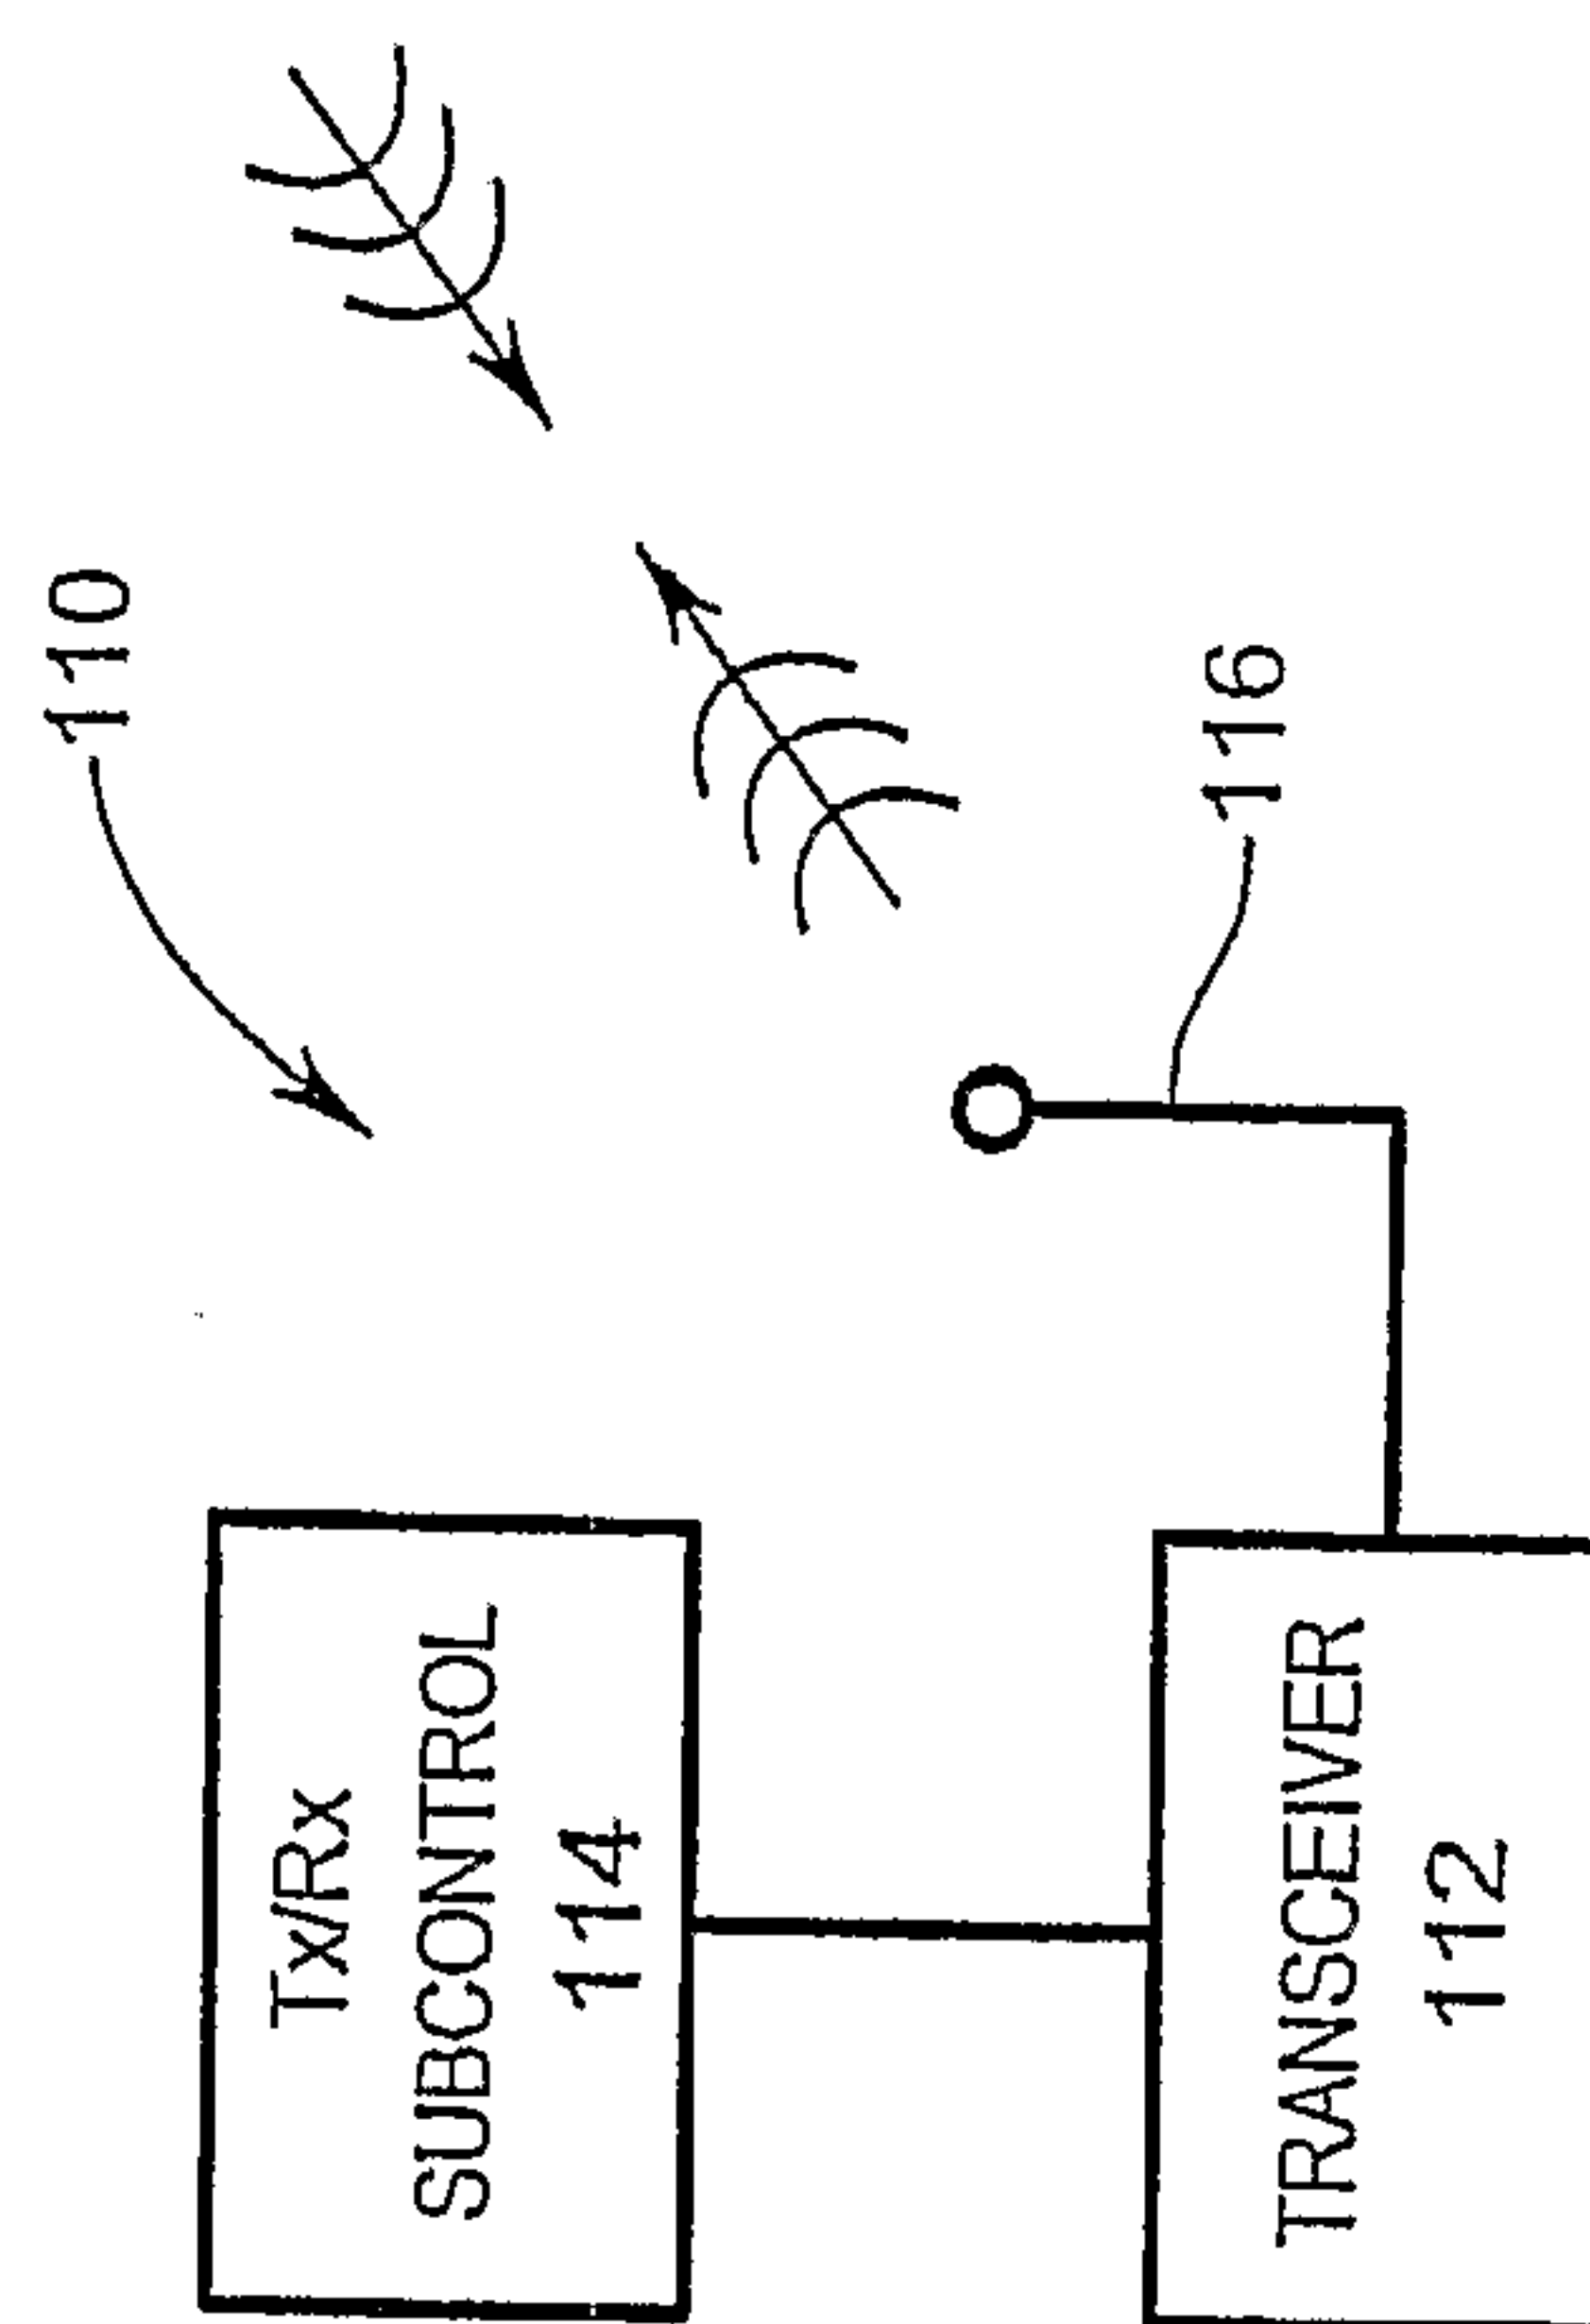
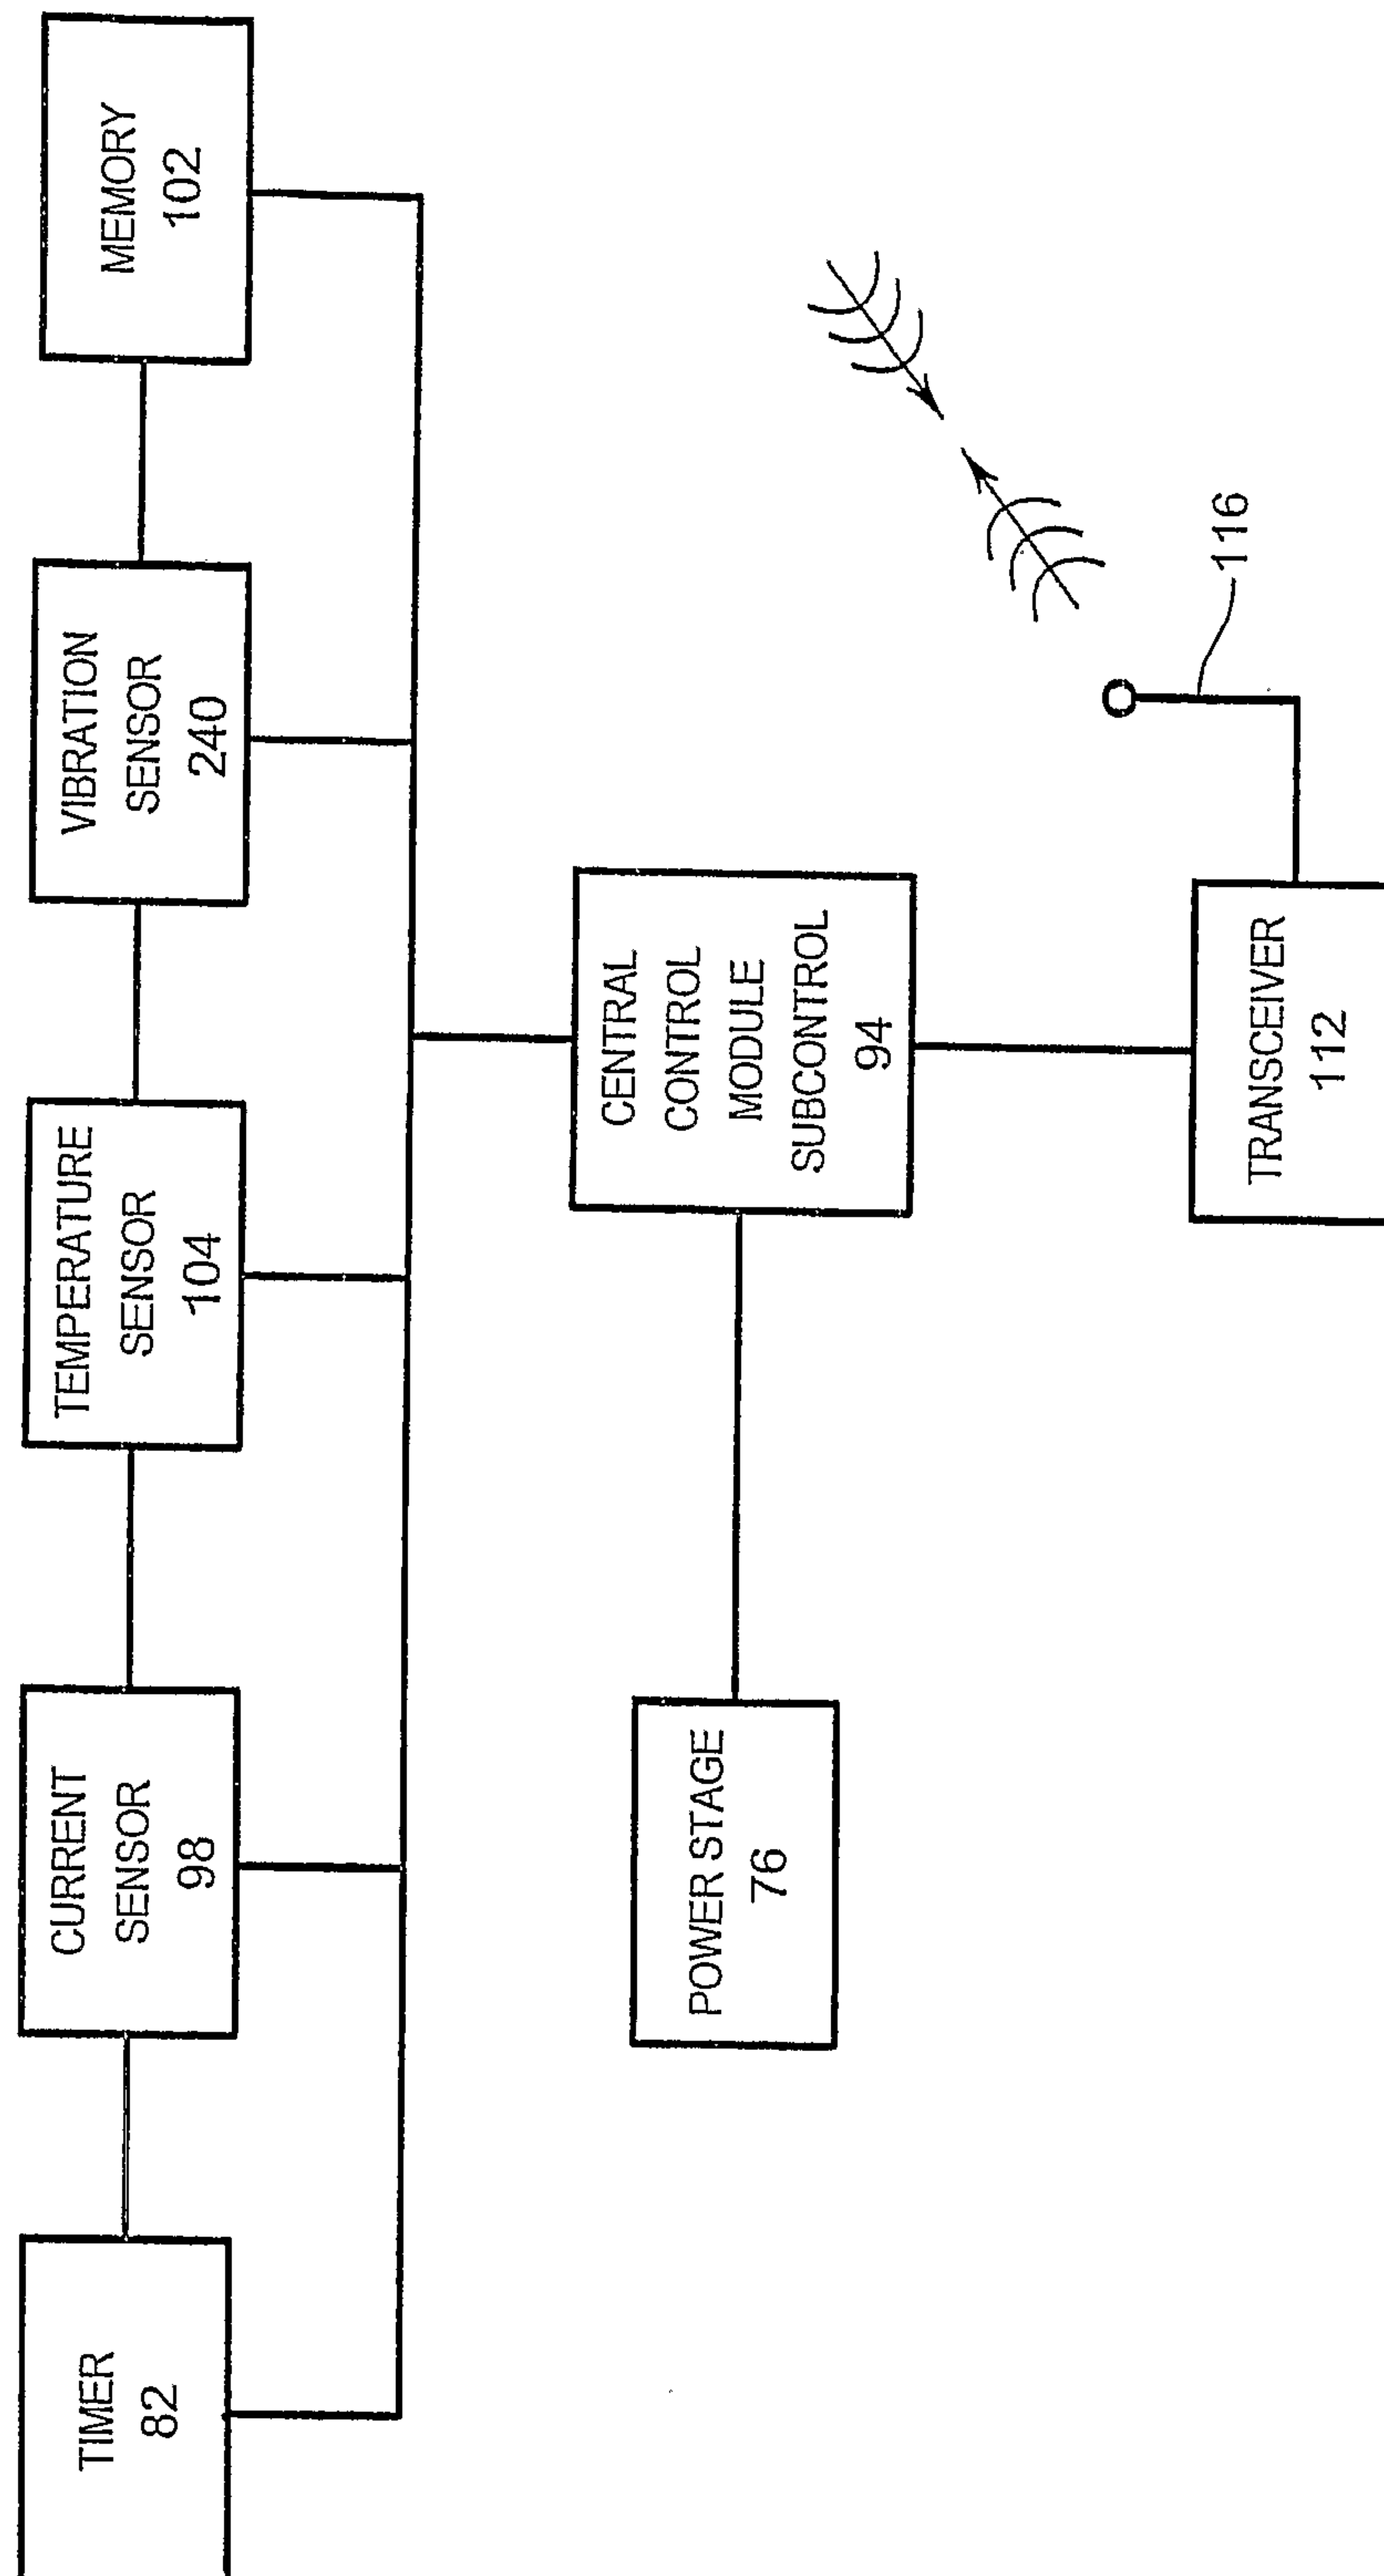


FIG. 7

FIG. 10FIG. 11

FIG. 12FIG. 13

FIG. 14

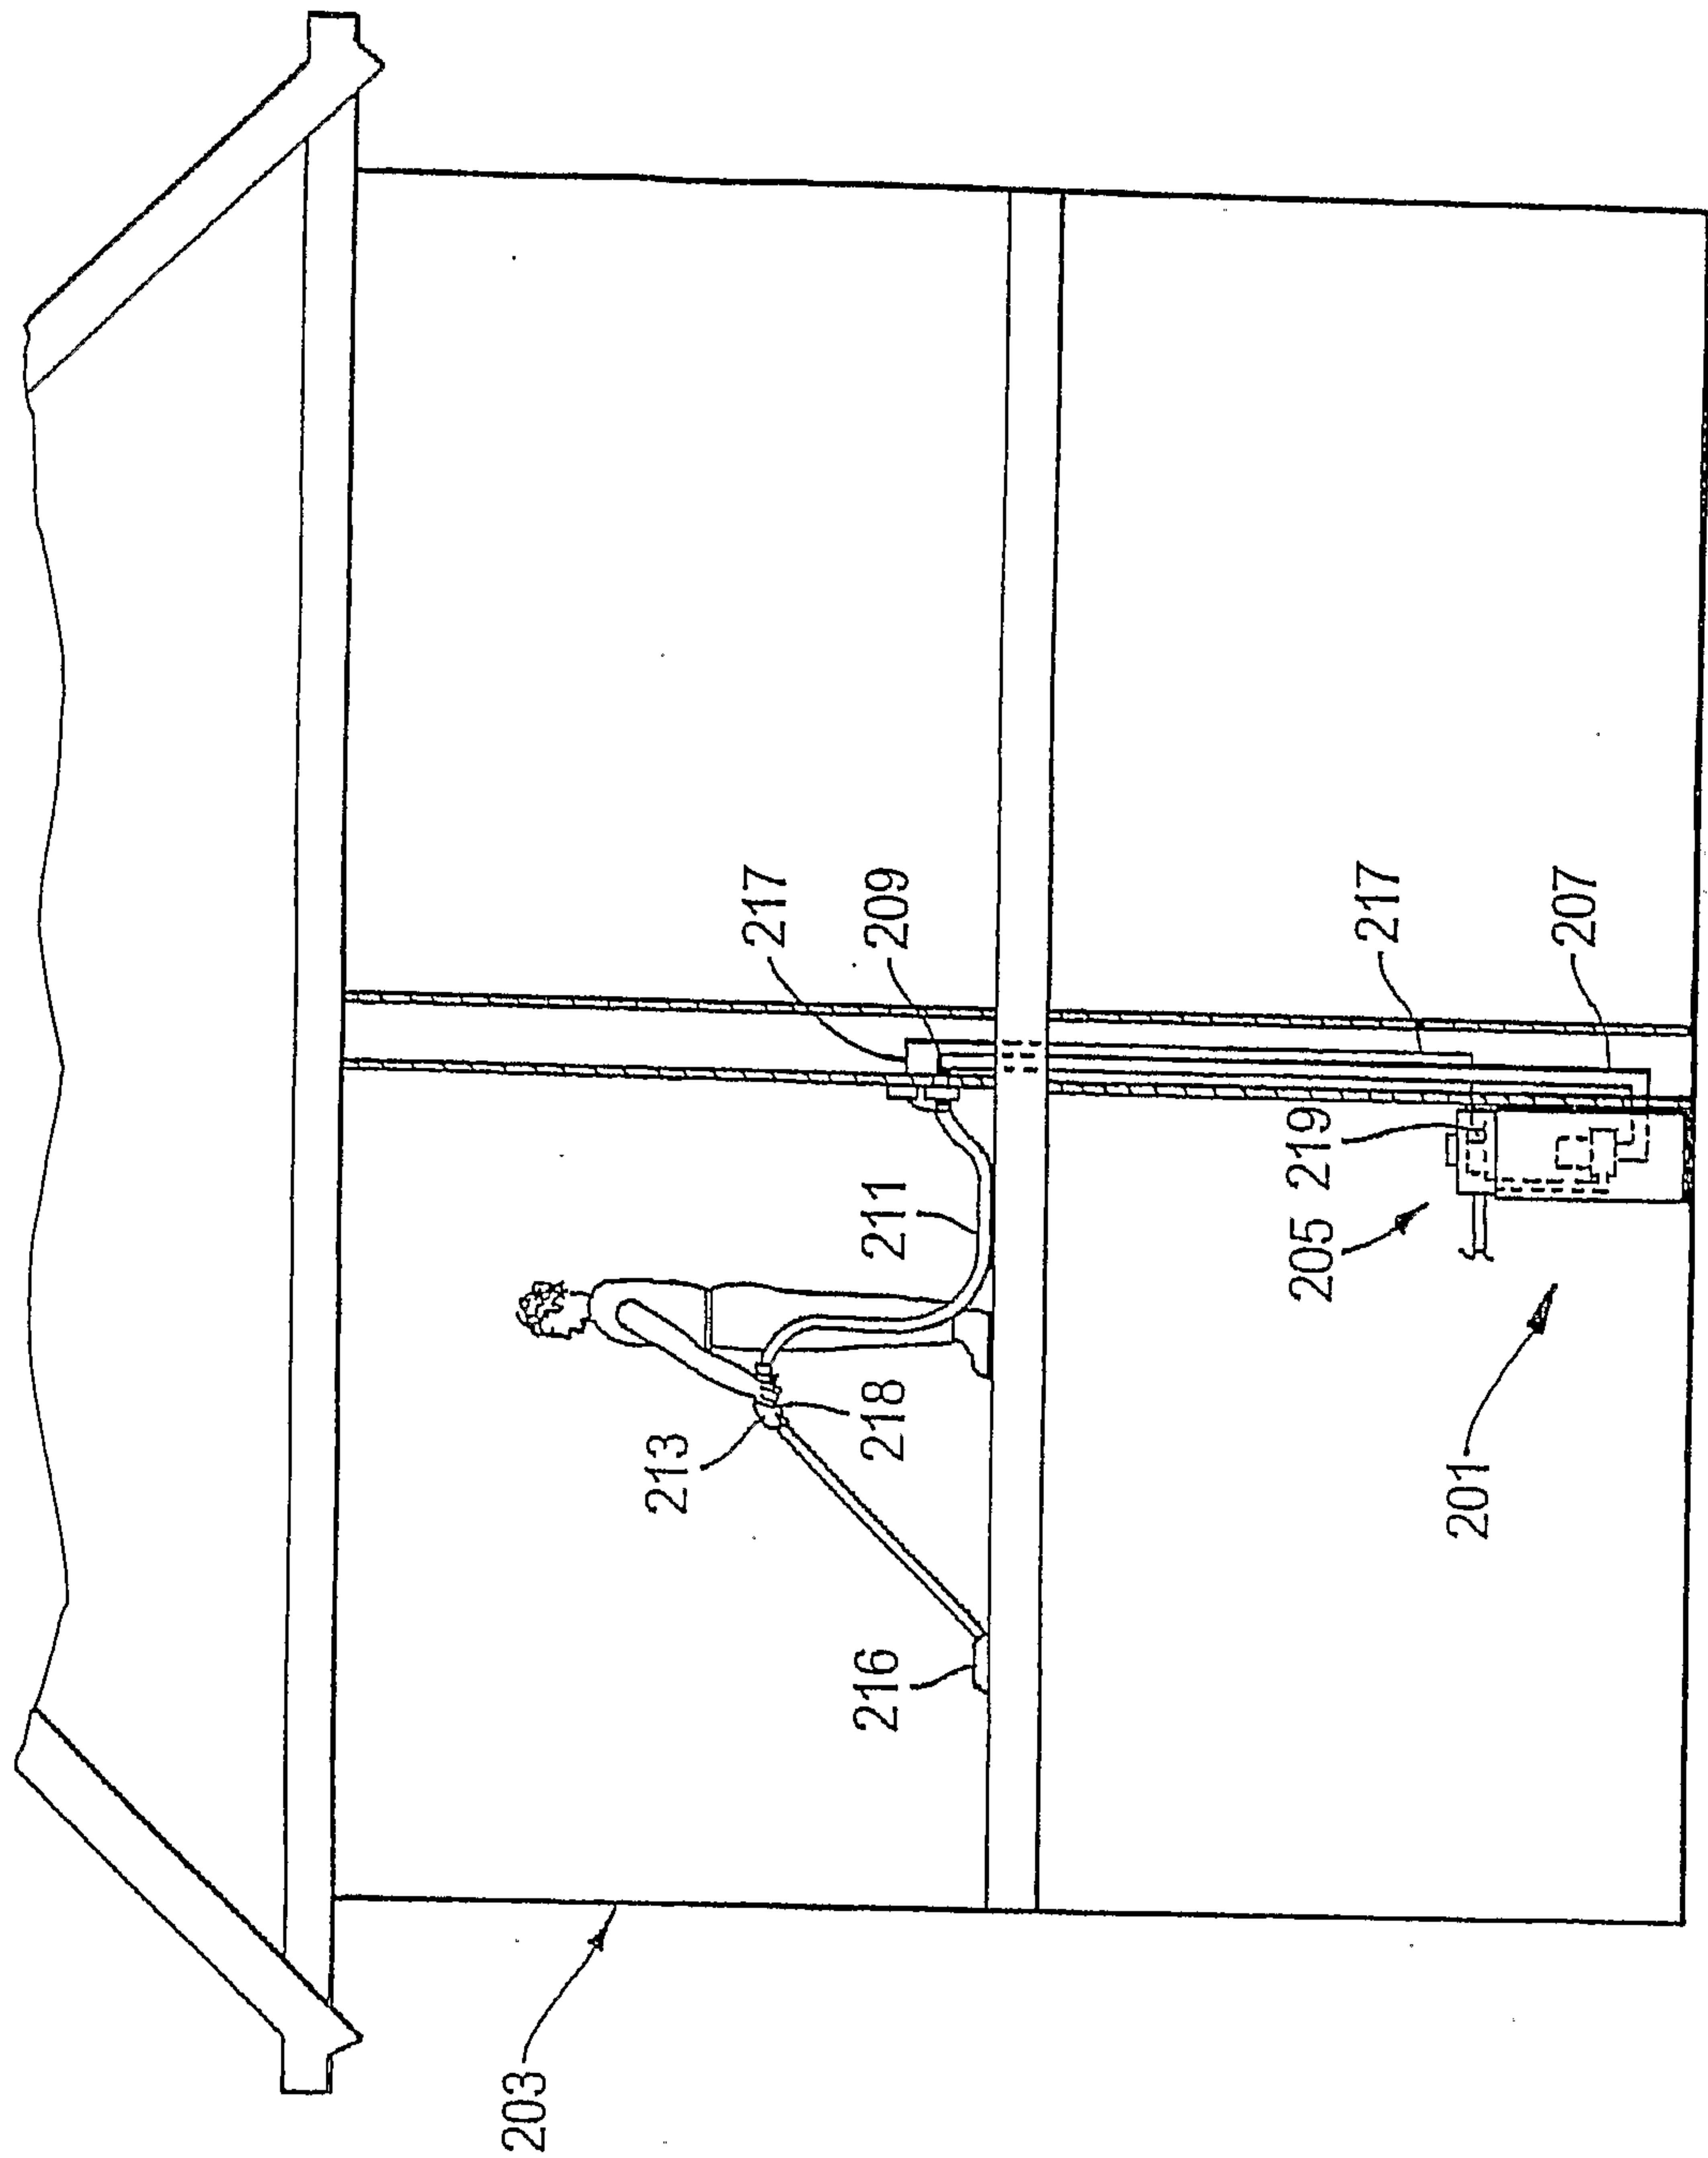
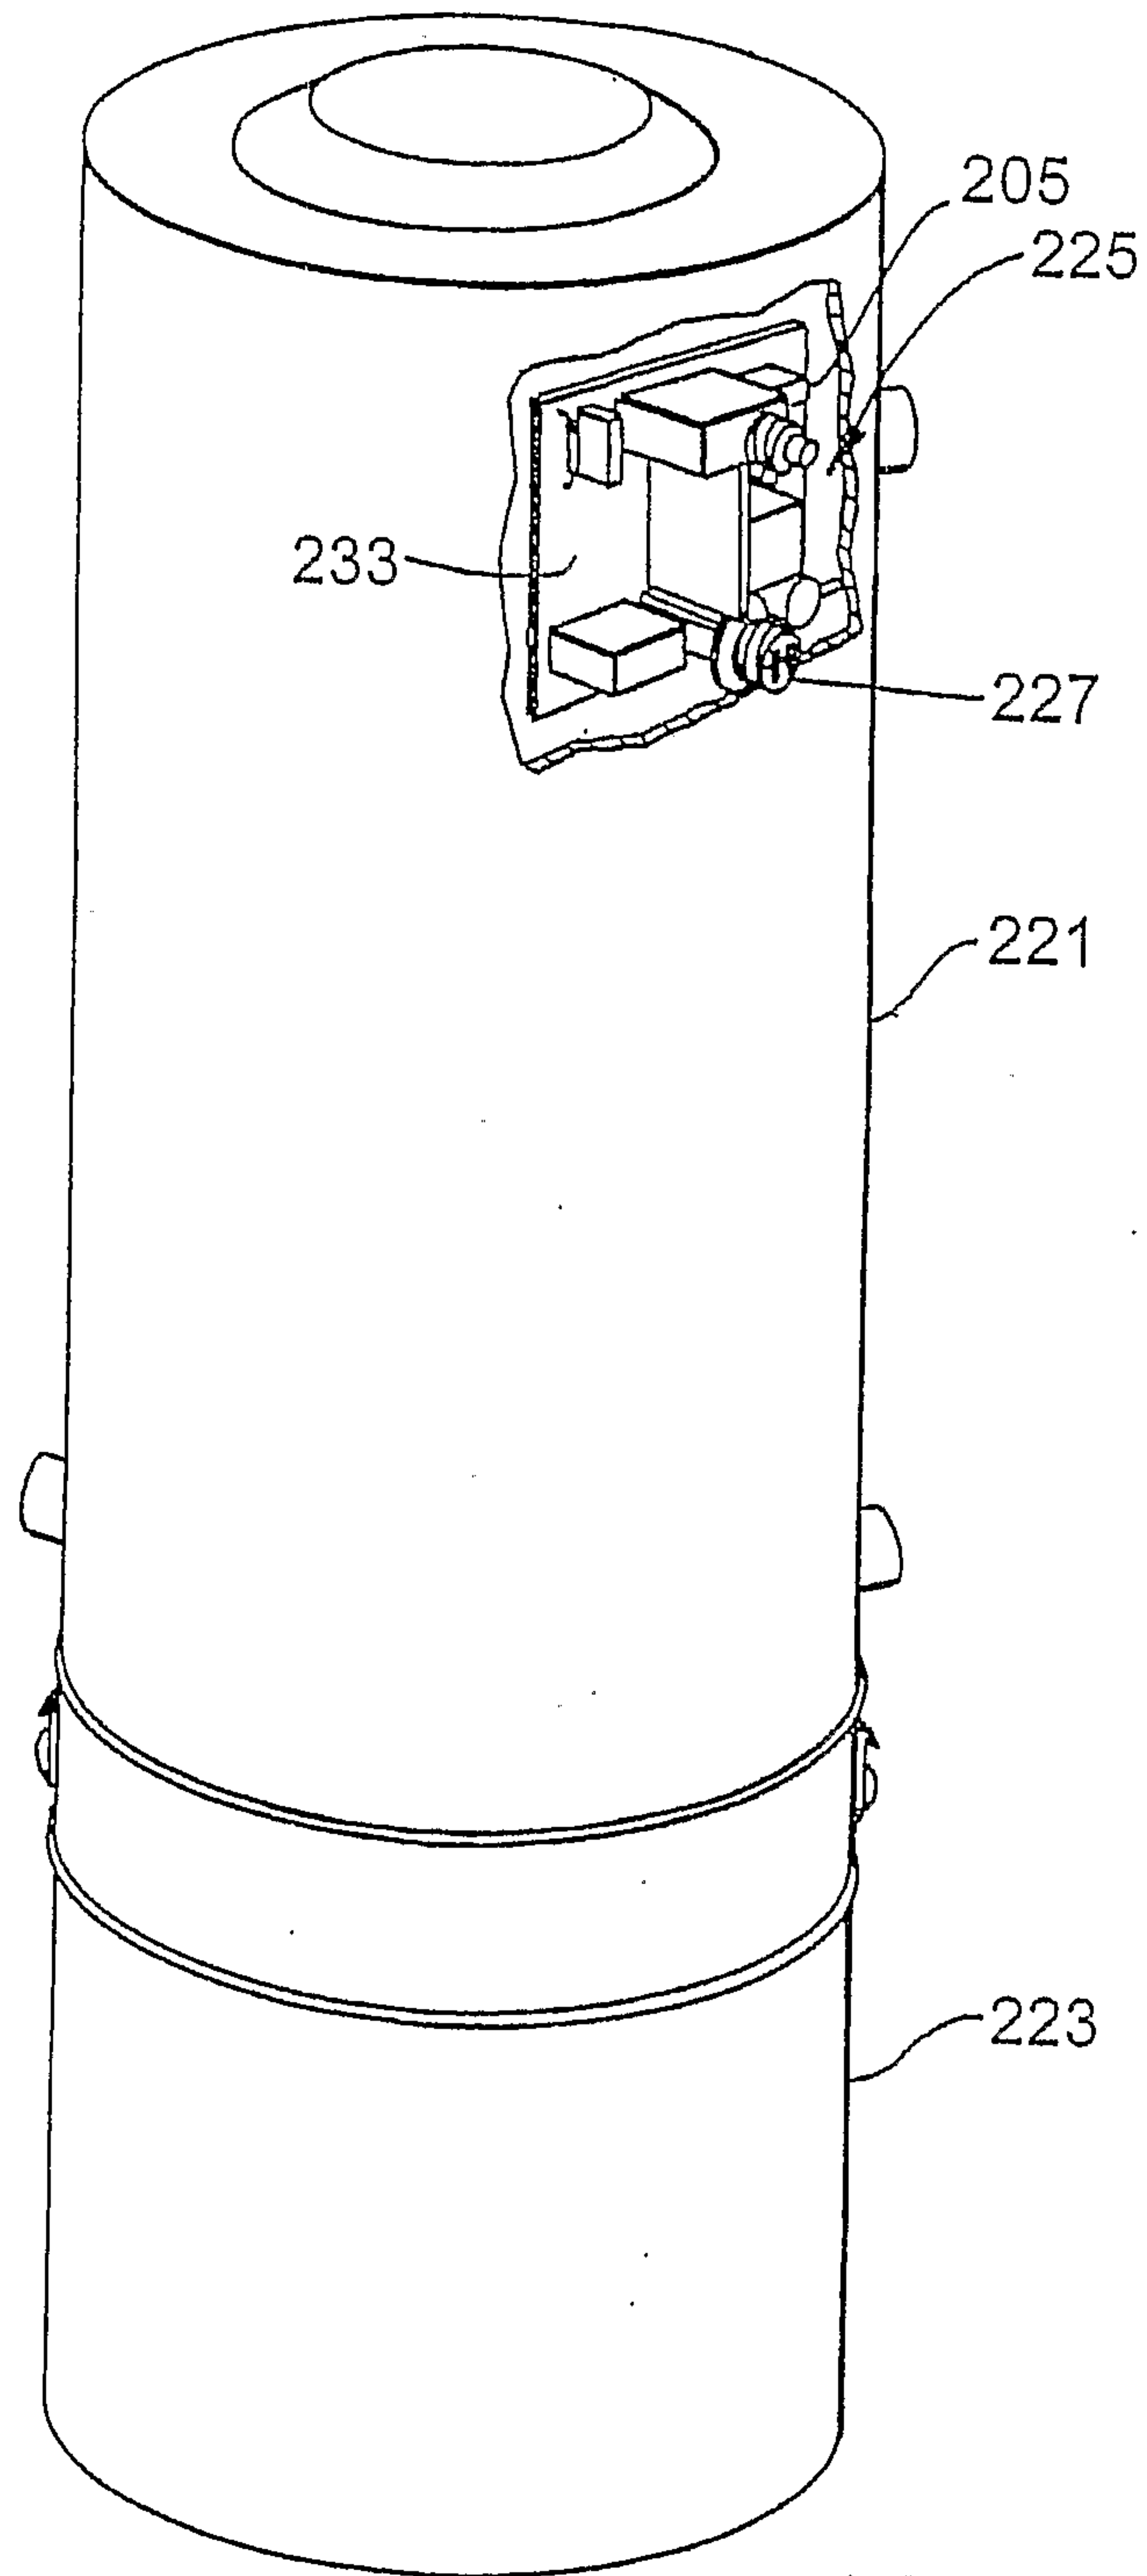


FIG. 15

FIG. 16

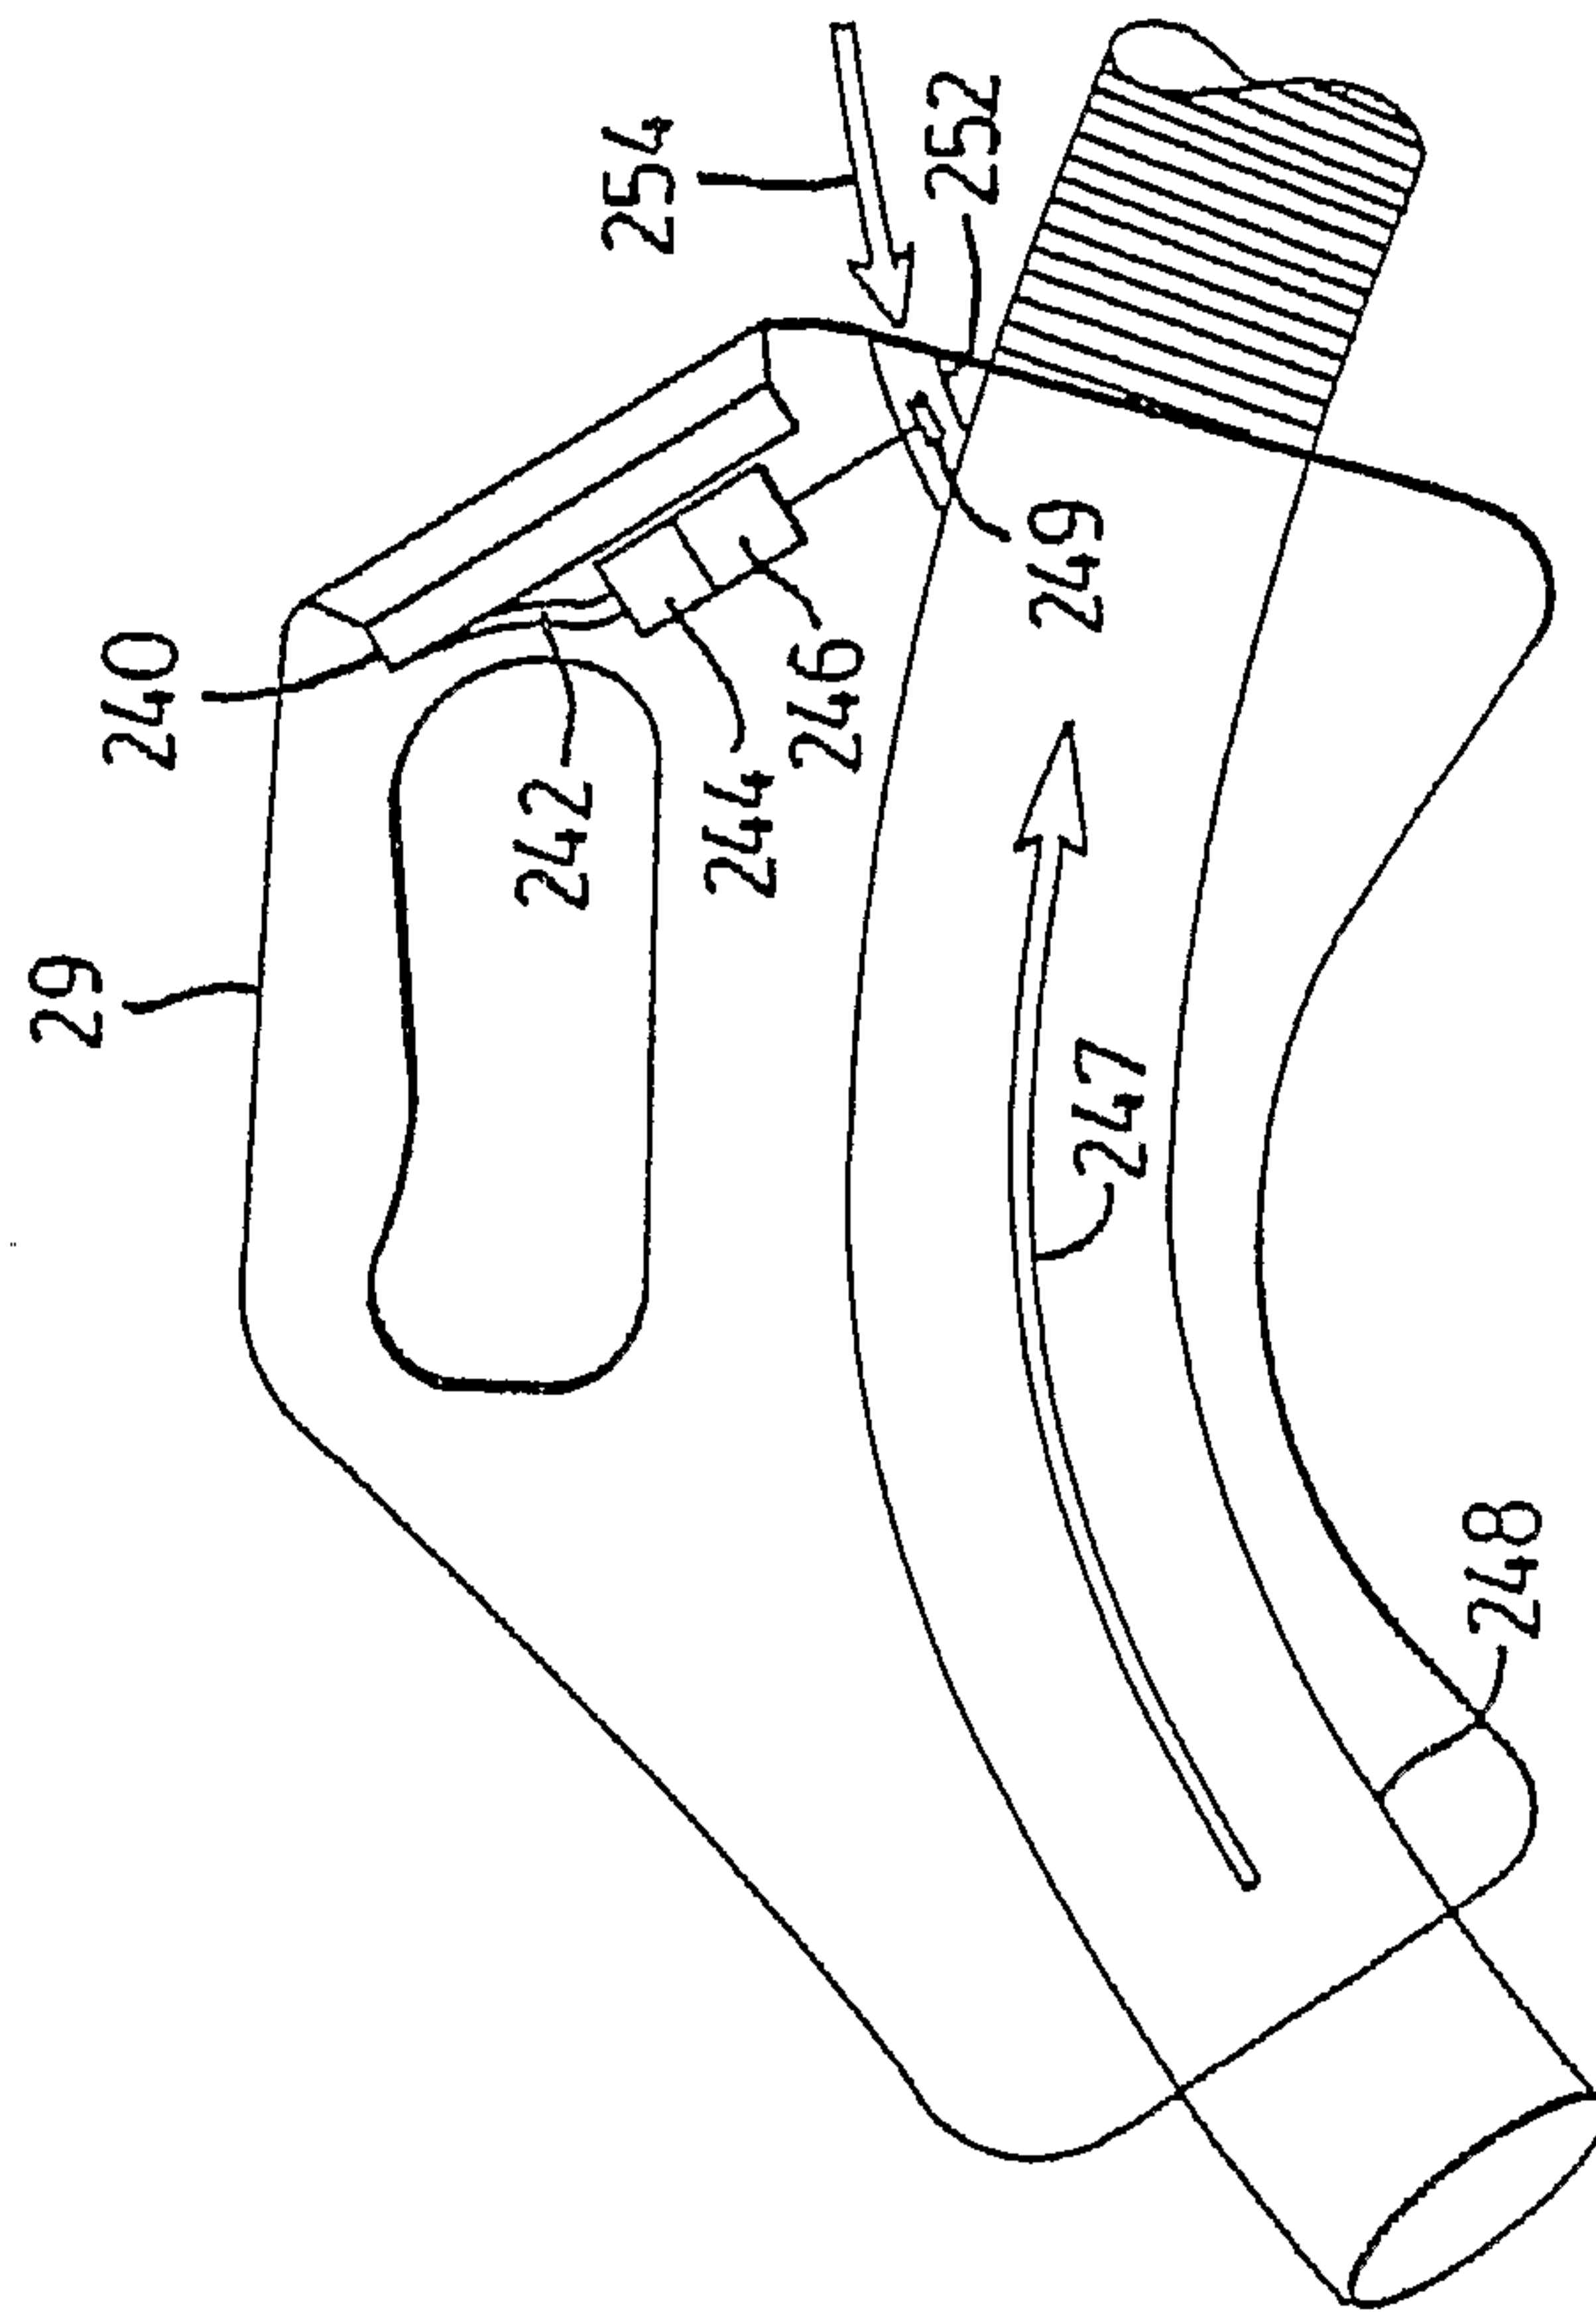


FIG. 17



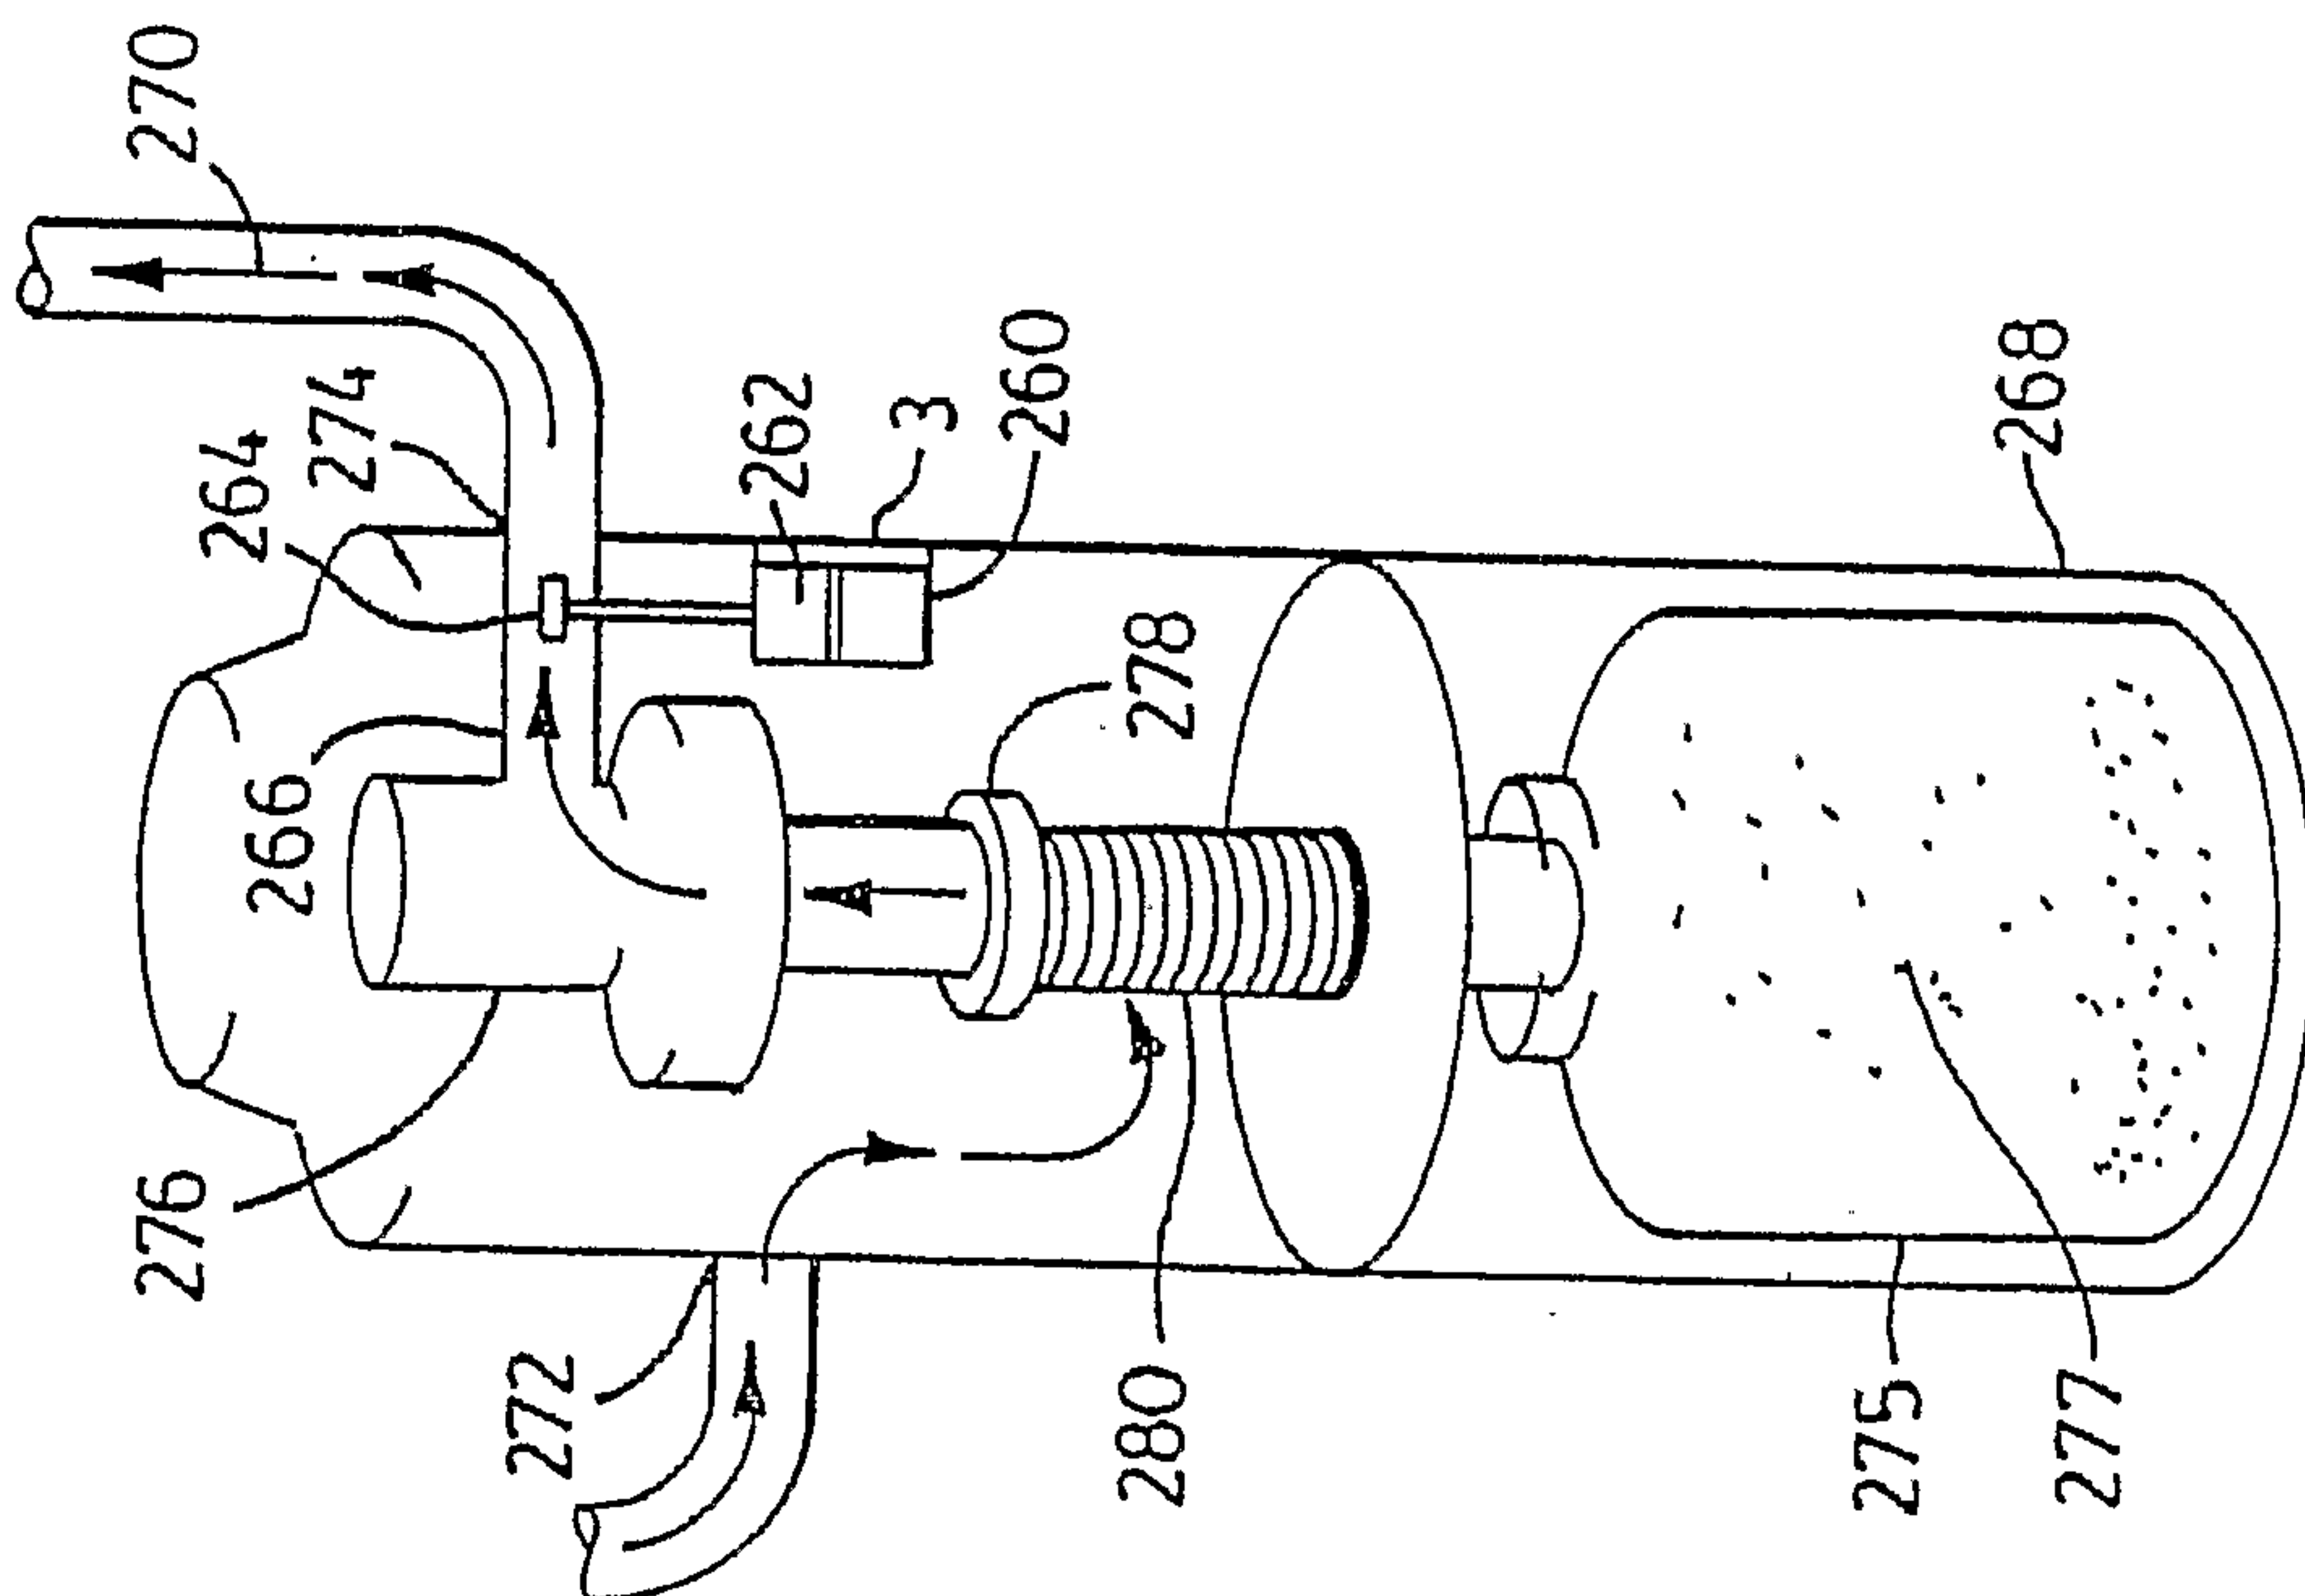


FIG. 18

12/12

FIG. 19FIG. 20

SUBSTITUTE SHEET (RULE 26)

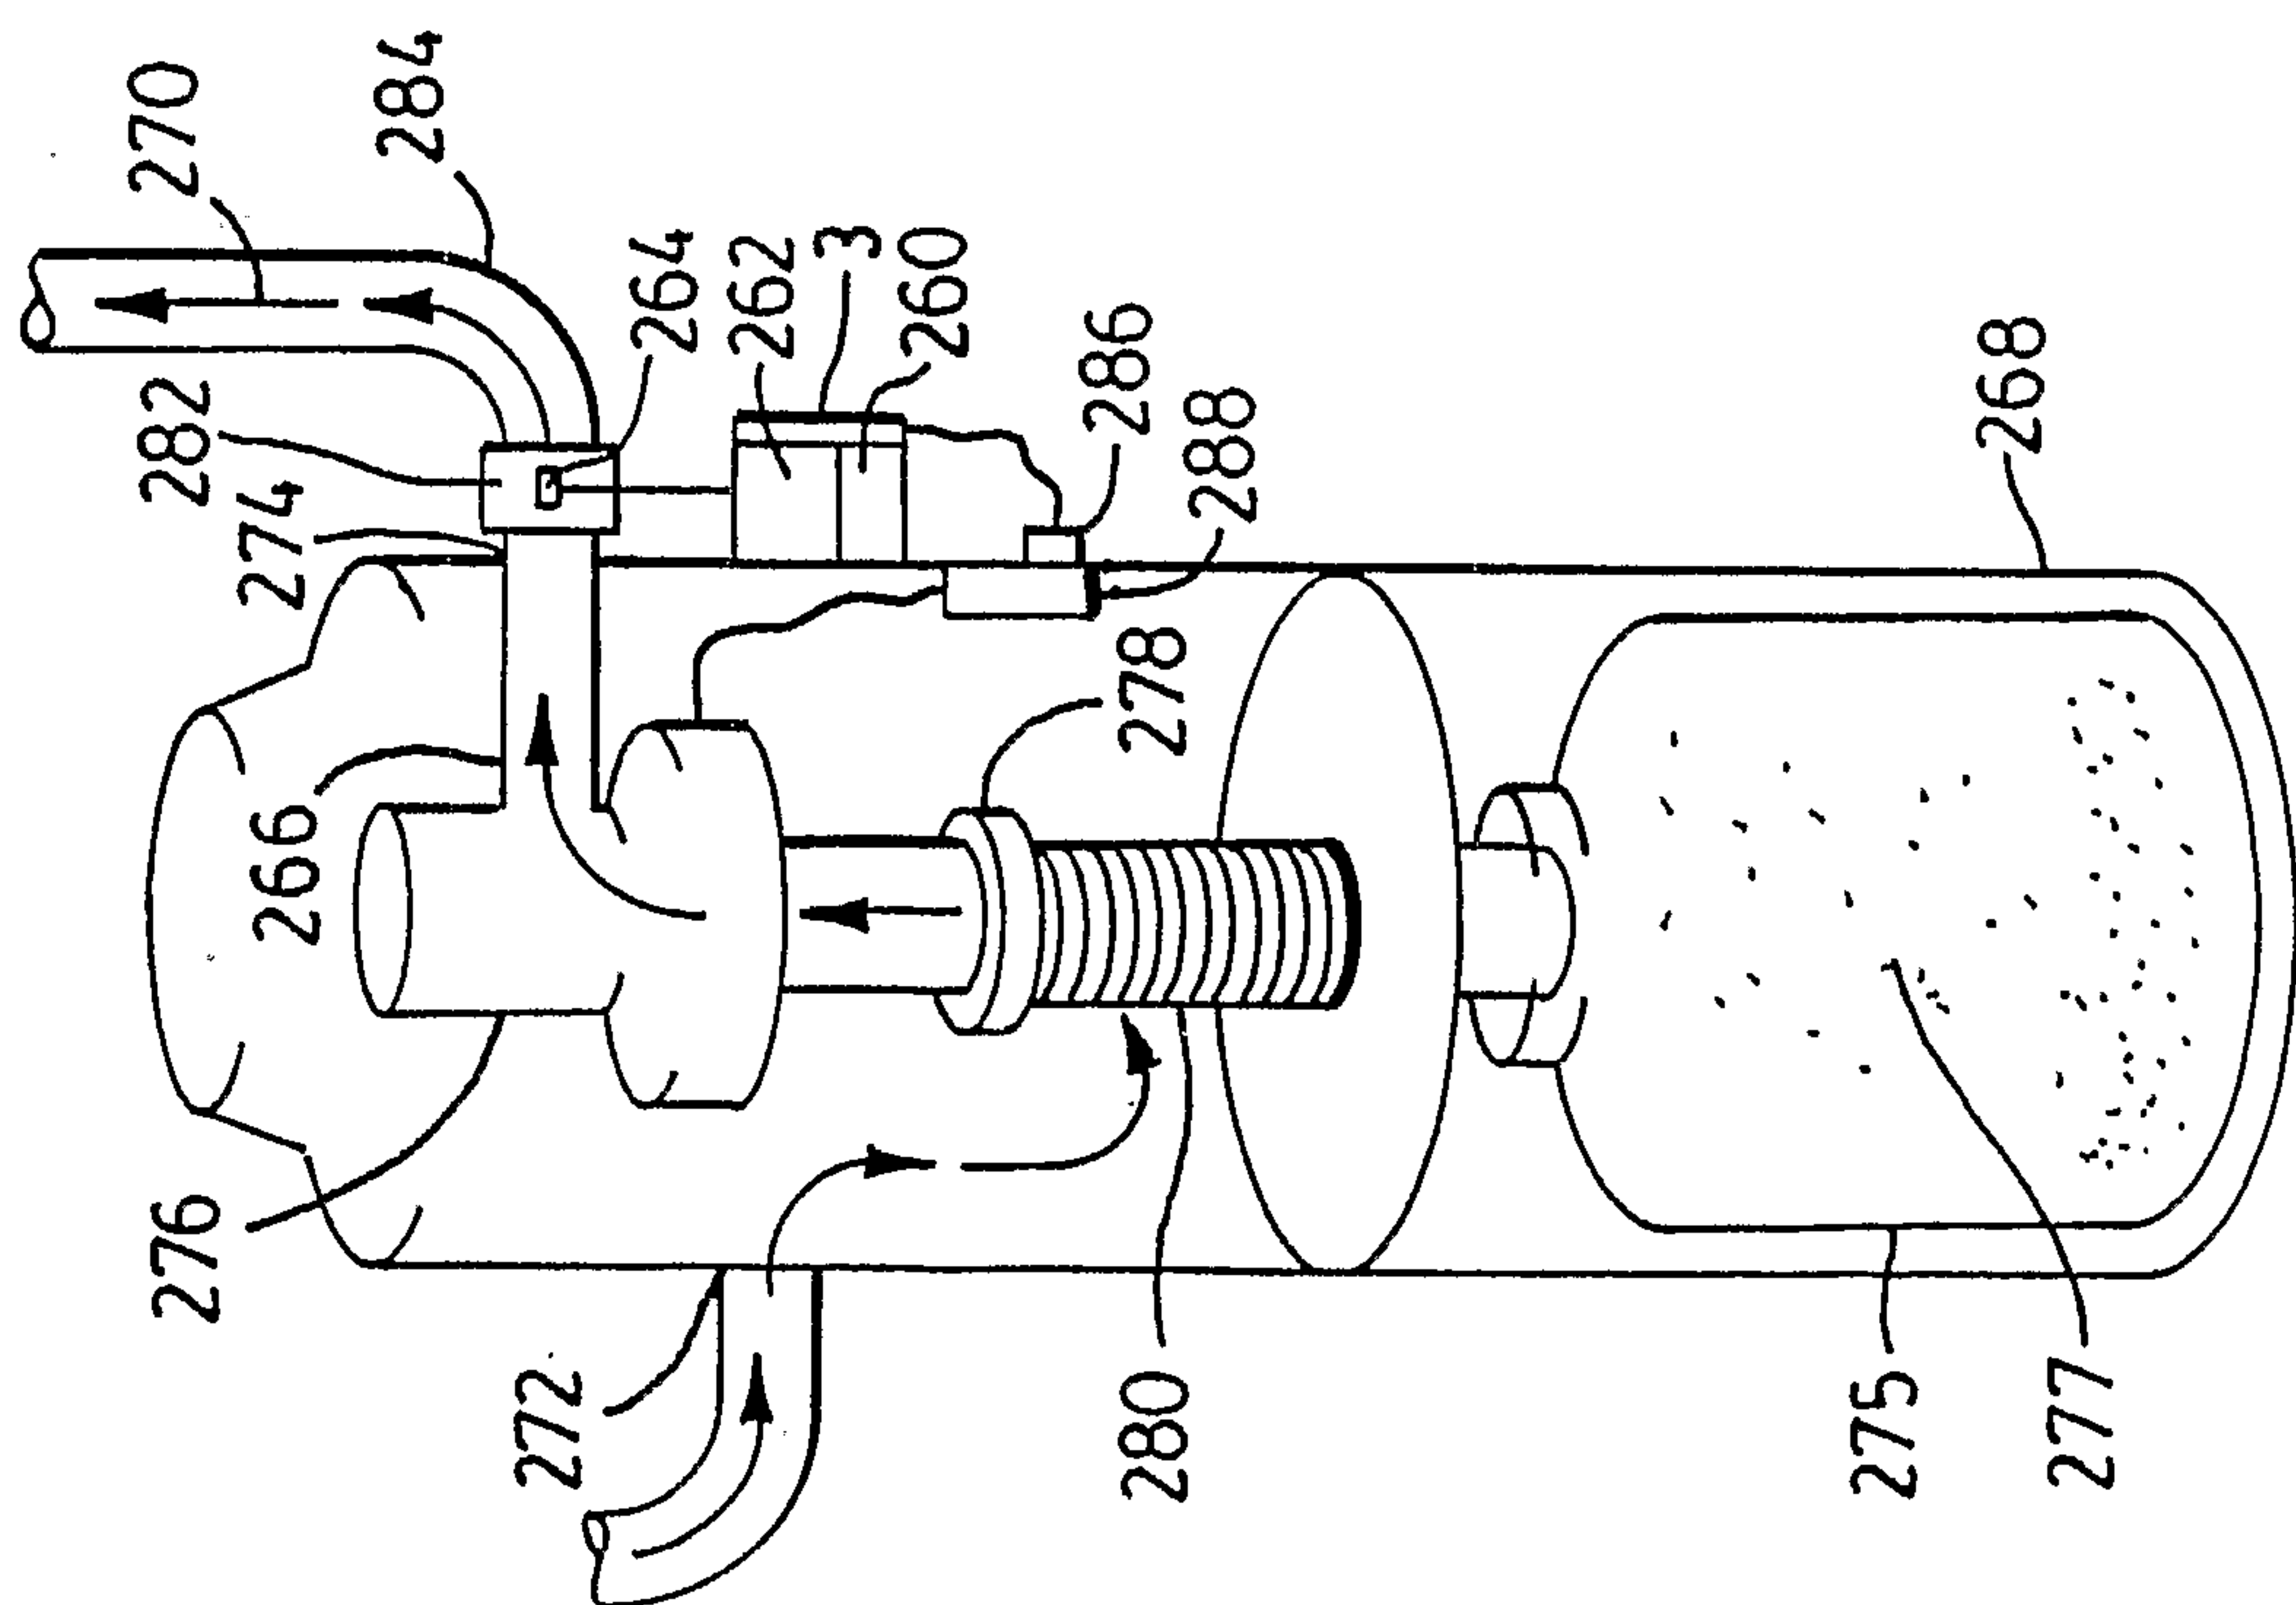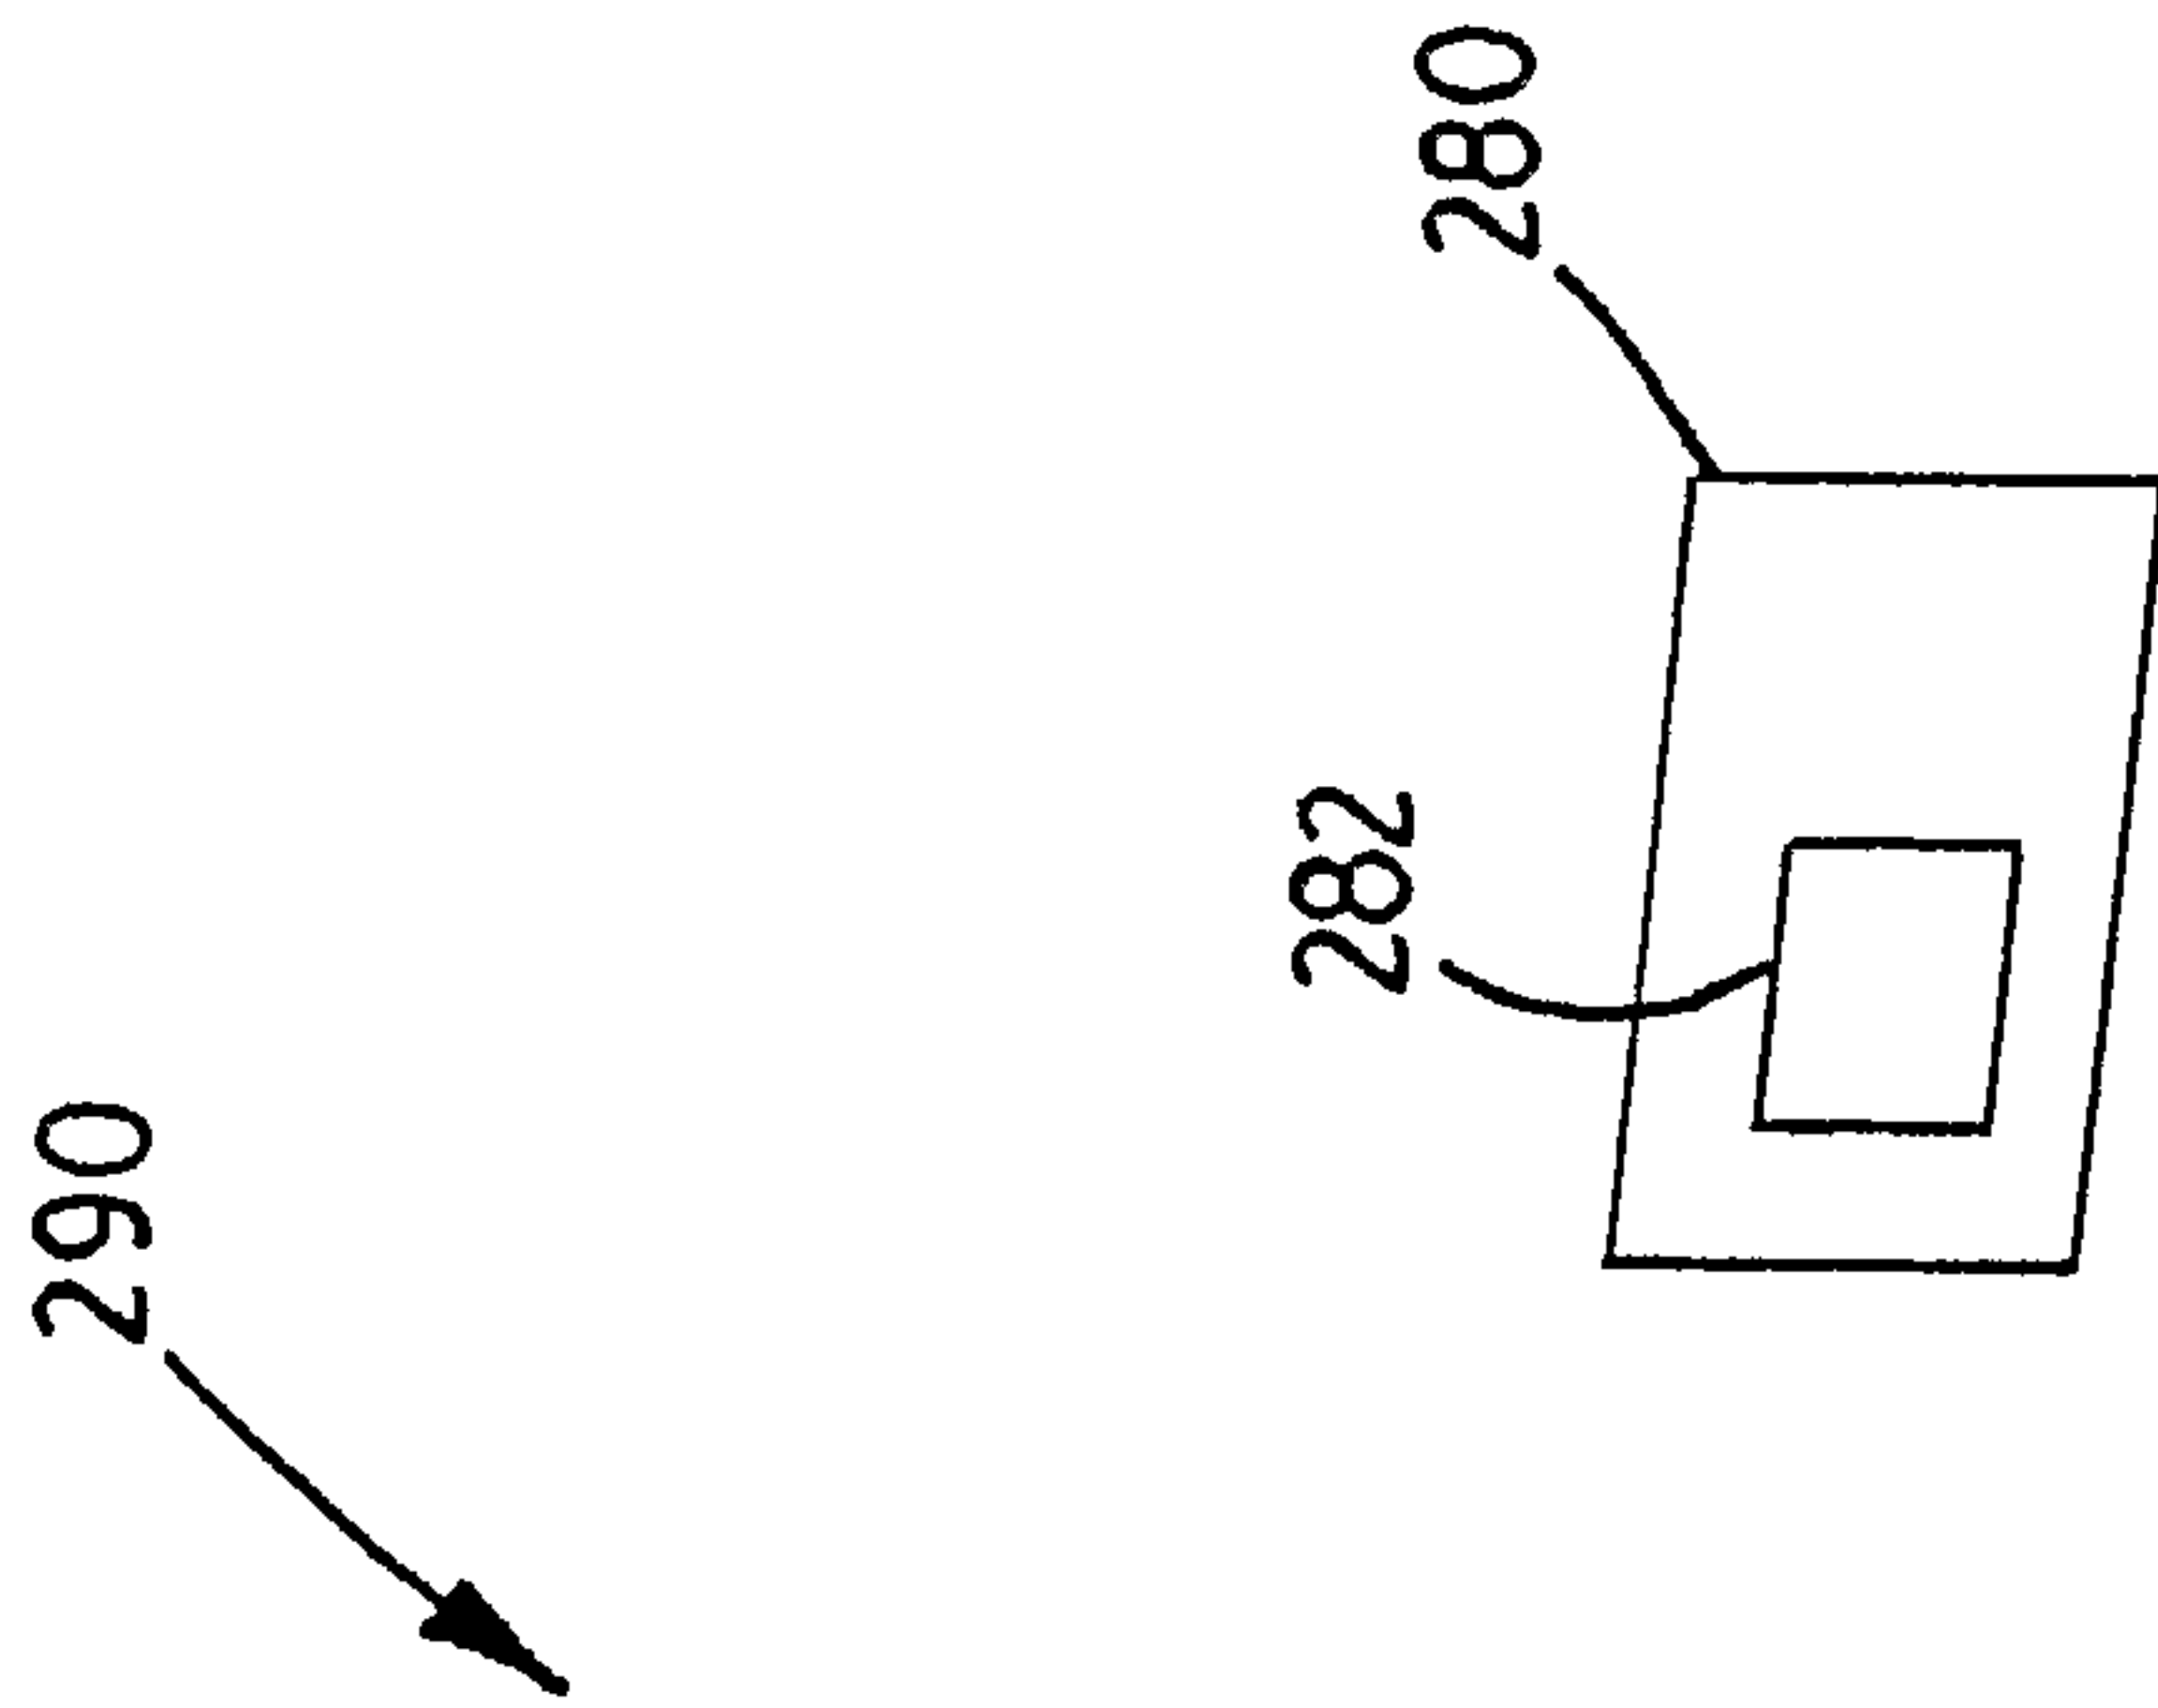