




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

| | | |
|---|--|---|
| (51) International Patent Classification ⁶ : G03F 7/20, 7/207, G02B 26/06 // G03F 1/00, H01L 21/027 | A1 | (11) International Publication Number: WO 99/45436 (43) International Publication Date: 10 September 1999 (10.09.99) |
| (21) International Application Number: PCT/SE99/00292 (22) International Filing Date: 2 March 1999 (02.03.99) (30) Priority Data: 9800665-3 2 March 1998 (02.03.98) SE (71) Applicant (for all designated States except US): MICRONIC LASER SYSTEMS AB [SE/SE]; P.O. Box 3141, S-183 03 Täby (SE). (72) Inventor; and (75) Inventor/Applicant (for US only): SANDSTRÖM, Torbjörn [SE/SE]; Banvägen 56, S-435 43 Pixbo (SE). (74) Agent: AWAPATENT AB; P.O. Box 11394, S-404 28 Göteborg (SE). | (81) Designated States: AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i> | |

(54) Title: IMPROVED PATTERN GENERATOR FOR AVOIDING STITCHING ERRORS

(57) Abstract

The present invention relates to an apparatus for creating a pattern on a workpiece, such as a photomask, a semiconductor wafer, an electronic interconnect device, a printed circuit board, a display panel, a microoptical device or a printing plate, whereby a pattern with less visible edges is created. The apparatus comprises a source for emitting light pulses, a spatial modulator (SLM) having several pixels, a projection system, an electronic data delivery system, and a precision mechanical system moving

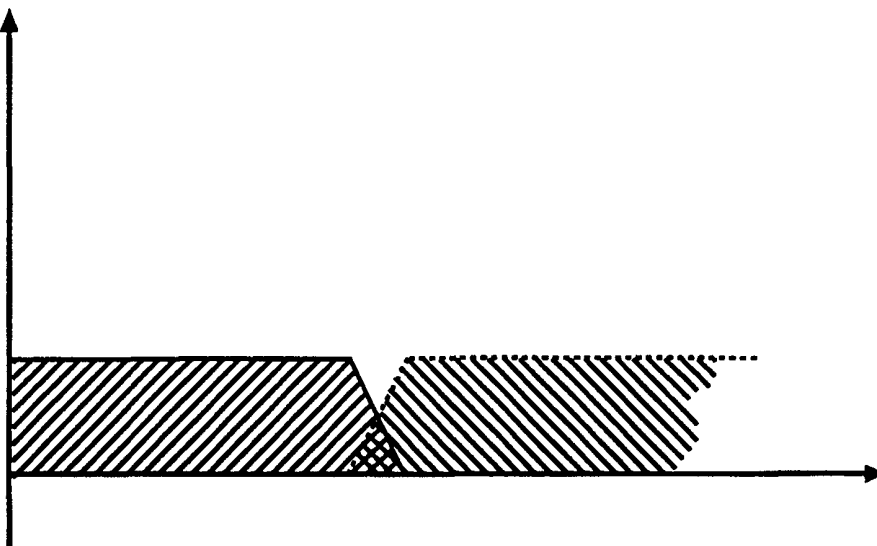

said workpiece relative to said projection system. Further, it comprises an electronic control system coordinating the workpiece, the modulator and light sources, so that a large pattern is stitched together from the partial images created by the sequence of radiation pulses, where adjacent images being stitched together are overlapping at the common boundary, and the overlapping images have essentially the same pattern in the overlap region and a reduced light intensity.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

| | | | | | | | |
|-----------|--------------------------|-----------|--|-----------|--|-----------|--------------------------|
| AL | Albania | ES | Spain | LS | Lesotho | SI | Slovenia |
| AM | Armenia | FI | Finland | LT | Lithuania | SK | Slovakia |
| AT | Austria | FR | France | LU | Luxembourg | SN | Senegal |
| AU | Australia | GA | Gabon | LV | Latvia | SZ | Swaziland |
| AZ | Azerbaijan | GB | United Kingdom | MC | Monaco | TD | Chad |
| BA | Bosnia and Herzegovina | GE | Georgia | MD | Republic of Moldova | TG | Togo |
| BB | Barbados | GH | Ghana | MG | Madagascar | TJ | Tajikistan |
| BE | Belgium | GN | Guinea | MK | The former Yugoslav Republic of Macedonia | TM | Turkmenistan |
| BF | Burkina Faso | GR | Greece | | | TR | Turkey |
| BG | Bulgaria | HU | Hungary | ML | Mali | TT | Trinidad and Tobago |
| BJ | Benin | IE | Ireland | MN | Mongolia | UA | Ukraine |
| BR | Brazil | IL | Israel | MR | Mauritania | UG | Uganda |
| BY | Belarus | IS | Iceland | MW | Malawi | US | United States of America |
| CA | Canada | IT | Italy | MX | Mexico | UZ | Uzbekistan |
| CF | Central African Republic | JP | Japan | NE | Niger | VN | Viet Nam |
| CG | Congo | KE | Kenya | NL | Netherlands | YU | Yugoslavia |
| CH | Switzerland | KG | Kyrgyzstan | NO | Norway | ZW | Zimbabwe |
| CI | Côte d'Ivoire | KP | Democratic People's Republic of Korea | NZ | New Zealand | | |
| CM | Cameroon | | | PL | Poland | | |
| CN | China | KR | Republic of Korea | PT | Portugal | | |
| CU | Cuba | KZ | Kazakistan | RO | Romania | | |
| CZ | Czech Republic | LC | Saint Lucia | RU | Russian Federation | | |
| DE | Germany | LI | Liechtenstein | SD | Sudan | | |
| DK | Denmark | LK | Sri Lanka | SE | Sweden | | |
| EE | Estonia | LR | Liberia | SG | Singapore | | |

IMPROVED PATTERN GENERATOR FOR AVOIDING STITCHING
ERRORS

Field of the invention

The present invention relates to printing of patterns with extremely high precision on photosensitive surfaces, such as photomasks for semiconductor devices and displays. It also relates to direct writing of semiconductor device patterns, display panels, integrated optical devices and electronic interconnect structures. Furthermore, it can have applications to other types of precision printing such as security printing. The term printing should be understood in a broad sense, meaning exposure of photoresist and photographic emulsion, but also the action of light on other light sensitive media such as dry-process paper, by ablation or chemical processes activated by light or heat. Light is not limited to mean visible light, but a wide range of wavelengths from infrared (IR) to extreme UV. Of special importance is the ultraviolet range from 370 nm (UV) through deep ultraviolet (DUV), vacuum ultraviolet (VUV) and extreme ultraviolet (EUV) down to a few nanometers wavelength. EUV is in this application defined as the range from 100 nm and down as far as the radiation is possible to treat as light. A typical wavelength for EUV is 13 nm. IR is defined as 780 nm up to about 20 μm .

In a different sense the invention relates to the art and science of spatial light modulators and projection displays and printers using such modulators. In particular it improves the grey-scale properties, the image stability through focus and image uniformity and the data processing for such modulators by application of analog modulation technique. The most important use of the analog modulation is to generate an image in a high-

contrast material such as photoresist with an address grid, i.e. the increment by which the position of an edge in the pattern is specified, that is much finer than the grid created by the pixels of the spatial light
5 modulator.

Background of the invention

It is known in the current art to build precision pattern generators using projection of micromirror
10 spatial light modulators (SLMs) of the micromirror type (Nelson 1988, Kück 1990). To use an SLM in a pattern generator has a number of advantages compared to the more wide-spread method of using scanning laser spots: the SLM is a massively parallel device and the number of pixels
15 that can be written per second is extremely high. The optical system is also simpler in the sense that the illumination of the SLM is non-critical, while in a laser scanner the entire beam path has to be built with high precision. Compared to some types of scanners, in
20 particular electrooptic and acoustooptic ones, the micromirror SLM can be used at shorter wavelengths since it is a purely reflective device.

In both references cited above the spatial modulator uses only on-off modulation at each pixel. The input data
25 is converted to a pixel map with one bit depth, i.e. with the values 0 and 1 in each pixel. The conversion can be done effectively using graphic processors or custom logic with area fill instructions.

In a previous application by the same inventor
30 Sandström (Sandström et. al. 1990), the ability to use an intermediate exposure value at the boundary of a pattern element to fine-adjust the position of the element's edge in the image created by a laser scanner was described.

It is also known in the art to create a grey-scale
35 image, preferably for projection display of video images and for printing, with an SLM by variation of the time a

pixel is turned on or by printing the same pixel several times with the pixel turned on a varying number of times. The present invention devices a system for direct grey-scale generation with a spatial light modulator, with a
5 special view to the generation of ultra-precision patterns. Important aspects in the preferred embodiments, are uniformity of the image from pixel to pixel and independence of exact placement of a feature relative to the pixels of the SLM and stability when focus is
10 changed, either with intention or inadvertently.

Specifically, there are problems with the prior art related to stitching errors. When using SLM a lot of pattern fields have to be stitched together to create the whole pattern, and with the previously known equipment
15 the user can not avoid stitching boundaries being placed in sensitive parts of the pattern. Further, reproduction with partially coherent light, which is used in the invention, is a non-linear process. Therefore it is impossible even in theory to stitch together a critical
20 pattern without artifacts at the boundary.

Summary of the invention

It is therefore an object of the present invention to provide an apparatus for creating patterns, whereby
25 the problem with stitching errors is reduced.

This object is achieved with an apparatus according to the appended claims.

The apparatus according to the invention comprises a source of light pulses with energy content in the
30 wavelength range from EUV to IR,

a spatial modulator having multitude of modulating elements, illuminated by said radiation pulses

a projection system creating for a radiation pulse an image of the modulator on the workpiece,

35 an electronic data delivery system accepting a digital description of the pattern to be written, extracting a sequence of partial patterns from the

digital pattern description, converting said partial patterns to modulator voltages, and feeding said voltages to the modulator,

5 a precision mechanical system moving said workpiece relative to said projection system

an electronic control system coordinating the movement of the workpiece, the feeding of the voltages to the modulator and the pulses of radiation , so that a large pattern is stitched together from the partial
10 images created by the sequence of radiation pulses

where at least two adjacent images being stitched together are overlapping at the common boundary, the overlapping images have essentially the same pattern in the overlap region and a reduced light intensity.

15 Hereby, the overlapping smoothes the edges between the fields, and distributes the errors over a larger area.

Brief description of the drawings

20 Figure 1 shows a printer in prior art. The SLM consists of micromirrors that deflect the light from the lens pupil.

Figure 2 shows a number of pixel designs with the upper four pixels in an off state and the remaining five
25 pixels turned on.

Figure 3 shows an array of pixels moving up and down like pistons, thereby creating a phase difference. This is how an edge can be fine-positioned with a phase-type SLM.

30 Figure 4 shows a schematic comparison between an SLM with deflecting mirrors and an SLM with deforming mirrors.

Figure 5 shows a flow diagram of a method for translating and feeding data to the SLM.

35 Figure 6 shows a preferred embodiment of a pattern generator according to the invention.

Figure 7 shows examples of correction of edge errors according to the invention.

Description of the invention

5 The basis for understanding the invention is the generic arrangement in Figure 1 which shows a generic projection printer with an SLM. Spatial light modulators based on reflection come in two varieties, the deflection type (Nelson) and the phase type (Kück). The difference
10 between them may in a particular case with micromirrors seem small, but the phase SLM extinguishes the beam in the specular direction by destructive interference, while a pixel in a deflection SLM deflects the specular beam geometrically to one side so that it misses the aperture
15 of the imaging lens as shown in figure 1. For ultra-precise printing as performed in the current invention the phase-modulating system as described by Kück 1990 is superior to the deflecting type. First, it has better contrast since all parts of the surface, also hinges and
20 support posts, take part in the destructive interference and total extinction can be achieved. Second, a system that works by deflecting the light to the side is difficult to make symmetrical around the optical axis at intermediate deflection angles, creating a risk of
25 feature instability when focus is changed. In the preferred embodiments the phase type is used, but if one accepts or designs around the asymmetry of the deflection type it could also be used. This is illustrated schematically in fig 4. In the first figure, 4a, a non-
30 deflected micromirror 401 is illuminated, and the reflected light is not directed towards the aperture 402, and, hence, the light does not reach the substrate 403. In fig 4b, on the other hand, the mirror is fully deflected, and all the reflected light are directed
35 towards the aperture. In an intermediate position only part of the reflected light will reach the substrate, which is shown in fig 4c. However, in this case the light

is not symmetrical around the optical axis for the lens 404, and there is an oblique incidence on the substrate. Hereby the distance between the lens and the substrate area becomes very critical, and small changes, such as
5 the one being indicated by the dashed position for area, causes significant displacements of the features on the substrate. A way to solve this problem is indicated by the fig 4d-f. Here, a first exposure is made with a first deflection angle for the micromirror, and thereafter a
10 second exposure, preferably with the same light dose, is made for a second deflection angle, being complementary to the first angle. Hereby, the combination of the first and second exposure is symmetrical around the optical axis for the lens. Another way to solve the problem is to
15 use deforming mirror 401', such as is shown in fig 4g, whereby the reflected light is evenly distributed over aperture. This last figure could schematically represent two cases, a phase type SLM (described below) or a deflection SLM, where light is reflected from different
20 parts of the mirror.

The phase SLM can be built either with micromachined mirrors, so called micromirrors, or with a continuous mirror surface on a supporting substrate that is possible to deform using an electronic signal. In Kück 1990 a
25 viscoelastic layer controlled by an electrostatic field is used, but it is equally possible, especially for very short wavelengths where deformations of the order of a few nanometer are sufficient, to use a piezoelectric solid disk that is deformed by electric field or another
30 electrically, magnetically or thermally controlled reflecting surface. For the remainder of this application an electrostatically controlled micromirror matrix (one- or two-dimensional) is assumed, although other arrangements as described above are possible, such as
35 transmissive or reflecting SLMs relying on LCD crystals or electrooptical materials as their modulation

mechanism, or micromechanical SLMs using piezoelectric or electrostrictive actuation.

The invention preferably uses a micromirror where the phase modulation is variable to obtain a variable amount of light reaching the pupil of the projection lens. Figure 2 shows some multi-element mirrors. The tilts of the various parts of the mirrors are unimportant. In fact one element by itself would direct the light toward the lens while another would direct it outside of the pupil. The correct way to understand the function is to look at the complex amplitude reaching the center of the pupil from each infinitesimal area element of the mirror and integrate the amplitude over the mirror. With a suitable shape of the mirror it is possible to find a deformation where the complex amplitudes add up to almost zero, corresponding to no light reaching the pupil. This is the off-state of the micromirror, while a relaxed state where the mirror surface is flat and the complex amplitudes add in phase is the on-state. Between the on and off-states the amount of light in the specular direction is a continuous but non-linear function of the deformation.

The pattern to be written is normally a binary pattern, such as a photomask pattern in chrome on a glass substrate. In this context binary means that there are no intermediate areas: a certain point on the photomask surface is either dark (covered with chrome) or clear (no chrome). The pattern is exposed in photoresist by the projected image from the SLM and the photoresist is developed. Modern resists have high contrast, meaning that a small percentage change in exposure makes the difference between full removal of the resist in the developer and hardly any removal at all. Therefore the photoresist has an edge that is normally almost perpendicular to the substrate surface, even though the aerial image has a gradual transition between light and dark. The chrome etching does further increase the

contrast, so that the resulting image is perfectly binary: either opaque or clear with no intermediate areas.

The input data is in a digital format describing the geometry of the pattern to be written on the surface. The input data is often given in a very small address unit, e.g. 1 nanometer, while setting pixels in the SLM to either on or off gives a much coarser pattern. If a pixel on the SLM is projected to a $0.1 \mu\text{m}$ pixel in the image, a line can only have a width that is an integer number of pixels ($n * 0.1 \mu\text{m}$ where n is an integer). An address grid of $0.1 \mu\text{m}$ was enough until recently, but the advent of so called optical proximity correction OPC makes a grid of 1 - 5 nanometers desirable. In OPC the size of features in the mask are modified slightly to compensate for predicted optical image errors when the mask is used. As an example, when a mask with four parallel lines $0.8 \mu\text{m}$ wide is printed in a modern 4X reduction stepper (a projection printer for semiconductor wafers) they will in a typical case print as lines 0.187 , 0.200 , 0.200 , and $0.187 \mu\text{m}$ wide although they were intended to have the same width. This can be predicted by simulation of the image formation and the user of the mask may use OPC to compensate in the mask. therefore he wants the first and last line in the mask to be $4 * 0.213 = 0.852 \mu\text{m}$ instead of $0.800 \mu\text{m}$. With an address grid of $0.1 \mu\text{m}$ he cannot make the correction, but with 5 nm address grid or finer such correction are possible.

In figure 5 the method for providing data for the SLM is shown in a flow diagram. The first step, S1, is to divide the pattern data for the pattern to be written into separate pattern fields. The pattern data is preferably received in digital form. Thereafter, in step S2, the fields are rasterised, and thereby assigned different exposure values. These values are then corrected for nonlinear response, step S3, and pixel-to-

pixel variations, step S4. Finally, the pixel values are converted to drive signals and forwarded to the SLM.

The invention preferably uses intermediate values between the off-state and on-state to create a fine address grid, e.g. 1/15, 1/25, 1/50, of the size of a pixel. A printed feature consists of pixels in the on state, but along the edge it has pixels set to intermediate values. This is done by driving the pixels with other voltages than the on and off voltages. Since there are several cascaded non-linear effects (the position of the edge versus exposure at the pixels at the boundary, the exposure vs. the deformation, and the deformation vs. the electric field) a non-linear transformation from the input data to the electric field is needed. Furthermore this transformation is calibrated empirically at regular time intervals.

Figure 3 shows an array of pixels moving up and down like pistons, thereby creating a phase difference. The figure shows how the pixels are controlled to create the reflectivity in the inset. The bright areas have pixels with 0 phase, while dark areas are created by pixels with alternating +90 and -90 degree phase. The oblique boundaries between bright and dark areas are created by intermediate values of phase. This is how an edge can be fine-positioned with a phase-type SLM. However, other types of SLM with intermediate values could be used in the same manner. The imaging properties with the phase SLM driven into intermediate values are complex and it is far from obvious that the edge will be moved in figure 3. However, it has been shown by extensive theoretical calculations and experiments by the inventor, that the described effect is real.

The design of the phase-type SLM

A cloverleaf mirror design as used in prior art is possible to drive to intermediate states between on and off states. However, when the integrated complex

amplitude is plotted as a function of deflection, it is seen that it never goes to zero completely but circles around zero, therefore having a non-zero minimum reflectivity with a varying phase angle. A thorough
5 analysis of an image with some pixels set to intermediate states shows that the position of the edges in the final image are not stable through focus if the integrated phase angle of the edge pixels is not zero. In a preferred embodiment of the invention a new type of
10 pixels with pivoting elements is used. When the elements pivots one end moves toward the light source and the other end away from it thereby keeping the average phase close to zero. Furthermore the cloverleaf design has a problem of built-in stress created during the
15 fabrication. This stress tends to give a partial deformation without an applied electric field. The built-in deformation is not perfectly the same in every pixel since it depends on imperfections during the manufacturing. In the cloverleaf design this difference
20 from pixel to pixel creates a first-order variation of reflectivity. With pixel cells built from pivoting elements the same effect occurs, but gives a second-order effect. Therefore the uniformity is better in the projected image.

25

Image enhancements.

There is a third advantage with a pivoting design: the cloverleaf does not reach full extinction, but a pivoting cell can more easily be given a geometry that
30 gives full extinction, or even goes through zero and comes back to a small non-zero reflection, but with reversed phase. With better extinction there is greater freedom to print overlapping exposures, designing for a small negative value gives better linearity close to
35 extinction. Printing with a weak exposure, approximately 5%, in the dark areas, but with reversed phase can give an increased edge sharpness of 15 - 30 % and the ability

to print smaller features with a given lens. This is an analog to so called attenuating phase-shifting masks that are used in the semiconductor industry. A related method of increasing the edge acuity is to set the pixels that are inside a feature a lower value and those near the edge a higher value. This gives a new type of image enhancement not possible with current projection of patterns from masks or by the use of projectors following Nelson and Kück. The combination of a non-zero negative amplitude in the background and an increased exposure along the edges need not conflict with the creation of a fine address grid by driving edge pixels to intermediate values, since the effects are additive or at least computable. When the pixels are substantially smaller than the feature to be printed there exists a combination of pixel values that creates all effects simultaneously. To find them requires more computation than the generation of a fine address grid alone, but in some applications of the invention the ability to print smaller features can have a high value that pays for the extra effort.

In the case of a continuous mirror on a viscoelastic layer there is an inherent balancing of the average phase to zero. Simulations have shown that the driving to intermediate values for fine positioning of feature edges work also for the continuous mirror. The non-linearities are smaller than with micromirrors. But for the method to work well the minimum feature has to be larger than with micromirrors, i.e. have a larger number of addressed pixels per resolved feature element is needed. Consequences are a larger SLM device and that for given pattern the amount of data is larger. Therefore the micromirrors have been chosen in a first and second embodiment.

In the invention a pixel with rotation-symmetrical deformation (at least two-fold symmetry, in a preferred embodiment four-fold symmetry) is used for two reasons:

to give a symmetrical illumination of the pupil of the projection lens and to make the image insensitive to rotations. The latter is important for printing a random logic pattern on a semiconductor wafer. If there is an x-y asymmetry the transistors laid-out along the x axis will have a different delay from those along the y axis and the circuit may malfunction or can only be used at a lower clock-speed. The two requirements of image invariance through focus and symmetry between x and y makes it very important to create and maintain symmetries in the optical system. Symmetry can be either inherent or it can be created by deliberate balancing of asymmetric properties, such as using multiple exposures with complementary asymmetric properties. However, since multiple exposures lead to reduced through-put inherent symmetrical layouts are strongly favoured.

Preferred embodiments

A first preferred embodiment is a deep-UV pattern generator for photomasks using an SLM of 2048 x 512 micromirrors. The light source is an KrF excimer laser with a pulsed output at 248 nanometers, pulse lengths of approximately 10 ns and a repetition rate of 500 Hz. The SLM has an aluminum surface that reflects more than 90% of the light. The SLM is illuminated by the laser through a beam-scrambling illuminator and the reflected light is directed to the projection lens and further to the photosensitive surface. The incident beam from the illuminator and the exiting beam to the lens are separated by a semitransparent beamsplitter mirror. Preferably the mirror is polarisation-selective and the illuminator uses polarised light, the polarisation direction of which is switched by a quarter-wave plate in front of the SLM. For x and y symmetry at high NA the image must be symmetrically polarised and a second quarter-wave plate between the beamsplitter and the

projection lens creates a circularly polarised image. A simpler arrangement when the laser pulse energy allows it is to use a non-polarising beamsplitter. The quarter-wave plate after the second pass through the beamsplitter is still advantageous, since it makes the design of the beam-splitting coating less sensitive. The simplest arrangement of all is to use an oblique incidence at the SLM so that the beams from the illuminator and to the projection lens are geometrically separated, as in figure 1.

The micromirror pixels are $20 \times 20 \mu\text{m}$ and the projection lens has a reduction of 200X, making one pixel on the SLM correspond to $0.1 \mu\text{m}$ in the image. The lens is a monochromatic DUV lens with an NA of 0.8, giving a point spread function of $0.17 \mu\text{m}$ FWHM. The minimum lines that can be written with good quality are $0.25 \mu\text{m}$.

The workpiece, e.g. a photomask, is moved with an interferometer-controlled stage under the lens and the interferometer logic signals to the laser to produce a flash. Since the flash is only 10 ns the movement of the stage is frozen during the exposure and an image of the SLM is printed, $204.8 \times 51.2 \mu\text{m}$ large. 2 milliseconds later the stage has moved $51.2 \mu\text{m}$, a new flash is shot and a new image of the SLM is printed edge to edge with the first one. Between the exposures the data input system has loaded a new image into the SLM, so that a larger pattern is composed of the stitched flashes. When a full column has been written the stage advances in the perpendicular direction and a new row is started. Any size of pattern can be written in this way, although the first preferred embodiment typically writes patterns that are $125 \times 125 \text{ mm}$. To write this size of pattern takes 50 minutes plus the time for movement between consecutive columns.

Each pixel can be controlled to 25 levels (plus zero) thereby interpolating the pixel of $0.1 \mu\text{m}$ into 25 increments of 4 nanometers each. The data conversion

takes the geometrical specification of the pattern and translates it to a map with pixels set to on, off or intermediate reflection. The datapath must supply the SLM with $2048 * 512 * 500$ words of data per second, in practice 524 Mbytes of pixel data per second. In a preferred embodiment the writable area is maximally $230 * 230$ mm, giving up to $230 / 0.0512 = 4500$ flashes maximum in a column and the column is written in $4500 / 500 = 9$ seconds. The amount of pixel data needed in one column is $9 * 524 = 4800$ Mb. To reduce the amount of transferred and buffered data a compressed format is used, similar to the one in Sandström et al. 90, but with the difference that a pixel map is compressed instead of segments with a length and a value. A viable alternative is to create a pixel map immediately and use commercially available hardware processors for compression and decompression to reduce the amount of data to be transferred and buffered. Even with compression the amount of data in a full mask makes it highly impractical to store pre-fractured data on disk, but the pixel data has to be produced when it is used. An array of processors rasterise the image in parallel into the compressed format and transfer the compressed data to an expander circuit feeding the SLM with pixel data. In the preferred embodiment the processors rasterise different parts of the image and buffer the result before transmitting them to the input buffer of the expander circuit.

A second preferred embodiment

In a second preferred embodiment the laser is an ArF excimer laser with 193 nm wavelength and 500 Hz pulse frequency. The SLM has $3072 * 1024$ pixels of $20 * 20$ μm and the lens has a reduction of 333X giving a projected pixel of 0.06 μm . There are 60 intermediate values and the address grid is 1 nanometer. The point spread function is 0.13 μm and the minimum line 0.2 μm . The data

flow is 1572 Mbytes/s and the data in one column 230 mm long is 11.8 Gb.

A third preferred embodiment is identical with the second one except that the matrix of pixels is rotated 45
5 degrees and the pixel grid is 84 μm , giving a projected pixel spacing along x and y of 0.06 μm . The laser is an ArF excimer laser and the lens the reduction of 240. Because of the rotated matrix the density of pixels in the matrix is less and the data volume is half of the
10 previous embodiment but with the same address resolution.

Laser flash to flash variations

The excimer laser has two unwanted properties, flash-to-flash energy variations of 5% and flash-to-flash
15 time jitter of 100 ns. In the preferred embodiments both are compensated in the same way. A first exposure is made of the entire pattern with 90% power. The actual flash energy and time position for each flash is recorded. A second exposure is made with nominally 10 % exposure and
20 with the analog modulation used to make the second exposure 5 - 15% depending on the actual value of the first one. Likewise a deliberate time offset in the second exposure can compensate for the time jitter of the first one. The second exposure can fully compensate the
25 errors in the first, but will itself give new errors of the same type. Since it is only on average 10% of the total exposure both errors are effectively reduced by a factor of ten. In practice the laser has a time
uncertainty that is much larger than 100 ns, since the
30 light pulse comes after a delay from the trigger pulse and this delay varies by a couple of microseconds from one time to another. Within a short time span the delay is more stable. Therefore the delay is measured continuously and the last delay values, suitably
35 filtered, are used to predict the next pulse delay and to position the trigger pulse.

It is possible to make corrections for stage imperfections in the same way, namely if the stage errors are recorded and the stage is driven with a compensating movement in the second exposure. Any placement errors that can be measured can in principle be corrected in this way, partially or fully. It is necessary to have a fast servo to drive the stage to the computed points during the second exposure. In prior art it is known to mount the SLM itself on a stage with small stroke and short response time and use it for fine positioning of the image. Another equally useful scheme is to use a mirror with piezoelectric control in the optical system between the SLM and the image surface, the choice between the two is made from practical considerations. It is also possible to add a position offset to the data in an exposure field, and thereby move the image laterally.

The second exposure is preferably done with an attenuating filter between the laser and the SLM so that the full dynamic range of the SLM can be used within the range 0 - 15 % of the nominal exposure. With intermediate levels it is possible to adjust the exposure in steps of $15\% * 1/25 = 0.6\%$.

The response varies slightly from pixel to pixel due to manufacturing imperfections and, potentially, also from ageing. The result is an unwanted inhomogeneity in the image. Where image requirements are very high it may be necessary to correct every pixel by multiplication with the pixels inverse responsivity which is stored in a lookup memory. Even better is the application of a polynomial with two, three or more terms for each pixel. This can be done in hardware in the logic that drives the SLM.

In a more complex preferred embodiment several corrections are combined into the second corrective exposure: the flash to flash variation, flash time jitter, and also the known differences in the response between the pixels. As long as the corrections are small,

i.e. a few percent in each they will add approximately linearly, therefore the corrections can be simply added before they are applied to the SLM. The sum is multiplied with the value desired exposure dose in that pixel.

5

Alternative illumination sources

The excimer laser has a limited pulse repetition frequency (prf) of 500 - 1000 Hz depending on the wavelength and type of the laser. This gives large fields with stitching edges in both x and y. In two other preferred embodiments the SLM is illuminated with a pulsed laser with much higher prf, e.g. a Q-switched upconverted solid state laser, and with a continuous laser source scanned over the surface of the SLM, so that one part of the SLM is reloaded with new data while another part is printed. In both cases the coherence properties of the lasers are different from the excimer laser and a more extensive beam-scrambling and coherence control is needed, e.g. multiple parallel light paths with different pathlengths. In some implementations of the invention the light output from a flash lamp is sufficient and can be used as the light source. Advantages are low cost and good coherence properties.

In the preferred embodiment with scanning illumination two issues are resolved: the pulse to pulse variation in time and energy, since the scanning is done under full control preferably using an electrooptic scanner such as acousto-optic or electrooptic, and many continuous lasers have less power fluctuation than pulsed lasers. Furthermore the use of continuous lasers gives a different selection of wavelengths and continuous lasers are less dangerous to the eye than pulsed lasers. Most important, however, is the possibility of reaching much higher data rates with a matrix with only a few lines since the scanning is non-critical and can be done with 100 kHz repetition rate or higher. Scanning the

illumination beam is also a way of creating a very uniform illumination, which is otherwise difficult.

In some embodiments it is possible, and feasible, to use a flash lamp as the illumination source.

5

EUV

Light sources for EUV are based on radiation from a particle accelerator, a magnetic plasma pinch machine or the heating of a small drop of matter to extreme
10 temperatures with a high-power laser pulse. In either case the radiation is pulsed. The EUV radiation propagates only in vacuum and can only be focused by reflective optics. A typical pattern generator using an SLM has a small exposure field a modest requirement of
15 optical power. The design of the optical system is therefore relaxed compared to that of an EUV stepper, making it possible to use more mirrors and go to higher NA than in a stepper. It is anticipated that a high-NA lens will have a ring-shaped exposure field and it is
20 fully possible to adapt the shape of the SLM to such a field. With a wavelength of 13 nm and an NA of 0.25 it is possible to expose lines that are only 25 nm wide, and, using image enhancement as described below, even below 20 nm. No other known writing technology can match this
25 resolution and at the same time the writing speed that is made possible by the parallel character of an SLM.

Edge overlap

Since a two-dimensional field is printed for each
30 flash and the fields are stitched together edge to edge to edge the stitching is very critical. A displacement of only a few nanometers of one field will create pattern errors along that edge that are visible and potentially detrimental to the function of an electronic circuit
35 produced from the mask. An effective way of reducing the unwanted stitching effects is to print the same pattern in several passes but with a displacement of the

stitching boundaries between the passes. If the pattern is printed four times the stitching error will occur in four positions, but with only a fourth of the magnitude. In a preferred embodiment of the current invention the ability to create intermediate exposures is used together with an overlap band between the fields. The values are computed during the rasterisation, although it could also be done during the expansion of the compressed data. Edge overlap reduces the stitching errors with much less throughput penalty than multipass printing.

According to the invention at least two adjacent images being stitched together has overlapping at the common boundary, whereby the overlapping images have essentially the same pattern in the overlap region and a reduced light intensity, so that an invisible edge is created. The exposure in the overlap areas could be constant, or have a gradual transition from one image to the adjacent one. The exposure in the overlap areas could also be adjustable.

The reduced intensity in the overlap areas could be provided by for example a transmission mask or a mirror with a varying reflectivity across its area, in the optical path. This mask could further have an open area and graded transmission along the edge, thereby and placed so that an unsharp image of it is created at the workpiece. The mask is preferably placed between the light source and the spatial modulator, or between the spatial modulator and the workpiece. Furthermore, the mask could be a second spatial modulator, either transmissive or reflective, and preferably an analog spatial modulator. The main spatial light modulator could also be provided with a reduced static light efficiency or preferably in those areas which will be overlapping in the pattern on the workpiece, thereby creating a reduced exposure in those areas. This could be accomplished by means of an additional coating on the spatial modulator in the overlap areas that reduce the light efficiency,

or, when the spatial modulator is an analog modulator, by the analog function of the modulator. The reduced exposure is then preferably controlled by the data fed to the analog spatial modulator, and said reduced exposure data is most preferably added to the pattern data during the conversion from the input description to pixel data suitable for the spatial modulator, or in a separate step, e.g. using custom-logic or a graphic processor.

In figure 7a is shown an example of conventional writing, i.e. without overlap. Different shading indicates separately written pattern fields, and in figure 7b is shown schematically and exaggerated how the pattern placement varies between the different fields. Specifically a line is shown, extending over several pattern fields, where edge error has occurred between the fields. In figure 7c is shown the same pattern, but with an overlap between the fields in accordance with the invention. This overlap is stepwise, as is indicated by the illumination curve in figure 7d. Hereby the edge errors are divided in sequential steps, and the errors are smoothed out, and are hence less visible. In a further improvement of the method, the steps are not placed at fixed positions but placed depending on the pattern. In particular the steps are placed away from feature edges and small critical features. In figure 7e and f linear overlap transitions between the fields are used instead, making the error linearly distributed over the overlap area.

Modified illumination

In the first preferred embodiment the illumination of the SLM is done by an excimer laser and a light scrambler such as a fly-eye lens array to create an illumination that resembles that from a circular self-luminous surface in the pupil plane of the illuminator. In order to increase the resolution when printing with a specific projection system it is possible to use a modified illumination. In the most simple cases pupil

filters are introduced in the pupil plane of the illuminator, e.g. with a quadrupole-shaped or annular transmission area. In a more complex case the same field is printed several times. Several parameters can be made to vary between the exposures, such as focus in the image plane, illumination pattern, data applied to the SLM and pupil filter in the pupil plane of the projection optics. In particular the synchronised variation of the illumination and a pupil filter can give an increased resolution, most notably if the pupil has and a sector-shaped transmitting area and the illumination is aligned so that the non-diffracted light intercepts an absorbing stop near the apex of the sector

15 Linearisation of the response

For linearisation of the transfer function from data to edge placement here are essentially three ways to go:

- taking the non-linearity into account in the data conversion unit and generating an 8 bit (example) pixel values in the data conversion unit and use DACs with the same resolution to drive the SLM.
- to generate digital values with fewer values, e.g. 5 bits or up to 32 values, and translate them to an 8 bit value in a look-up table (LUT) and then feed the 8 bit values to the DACs.
- to use a 5 bit value and semiconductor switches to select a DC voltage that is generated by one or several high-resolution DACs.

In either case it is possible to measure an empirical calibration function such that the response on the plate is linearised, when said function being applied at respectively the data conversion unit, the LUT or in the DC voltages.

Which linearization scheme to use depends on the data rate, the precision requirements and also on the available circuit technology that may change over time. At the present time the data conversion unit is a

bottleneck and therefore it is not a preferred solution to linearise in the data conversion unit, neither to generate 8-bit pixel values. High-speed DACs are expensive and power-hungry and the most appropriate solution is to generate DC voltages and use switches. It is then possible to use even higher resolution than 8 bits.

Description of a preferred pattern generator

10 Referring to figure 6, a pattern generator comprises an SLM 601 with individual and multi-value pixel addressing, an illumination source 602, an illumination beam scrambling device 603, an imaging optical system 604, a fine positioning substrate stage 605 with an
15 interferometer position control system 606 and a hardware and software data handling system 607 for the SLM. For proper functionality and ease of operation it also contains a surrounding climate chamber with temperature control, a substrate loading system, software for timing
20 of stage movement and exposure laser triggering to achieve optimum pattern placement accuracy and a software user interface.

The illumination in the pattern generator is done with a KrF excimer laser giving a 10-20 nanoseconds long
25 light flash in the UV region at 248 nanometer wavelength with a bandwidth corresponding to the natural linewidth of an excimer laser. In order to avoid pattern distortion on the substrate, the light from the excimer laser is uniformly distributed over the SLM surface and the light
30 has a short enough coherence length not to produce laser speckle on the substrate. A beam scrambler is used to achieve these two aims. It divides the beam from the excimer laser in several beam paths with different path length and then add them together in order to reduce the
35 spatial coherence length. The beam scrambler also has a beam homogenizer consisting of a lens system containing a set of fly-eye lenses that distributes the light from

each point in the laser beam from the excimer laser uniformly over the SLM surface giving a "top-hat" light distribution.

The light from the SLM is relayed and imaged down to
5 the substrate on the substrate stage. This is done using
a Schlieren optical system described by Kück. A lens l_1
with the focal width f_1 is placed at the distance f_1 from
the SLM. Another lens l_2 with the focal length f_2 is
placed at the distance $2 \times f_1 + f_2$ from the SLM. The
10 substrate is then at a distance $2 \times f_1 + 2 \times f_2$ from the
SLM. At the distance $2 \times f_1$ from the SLM there is an
aperture 608 which size determines the numerical aperture
(NA) of the system and thereby the minimum pattern
feature size that can be written on the substrate. In
15 order to correct for imperfections in the optical system
and the substrate flatness there is also a focal system
that dynamically positions the lens l_2 in the z direction
with a position span of 50 micrometers to achieve optimal
focal properties. The lens system is also wavelength
20 corrected for the illuminating wavelength of 248
nanometers and has a bandwidth tolerance of the
illuminating light of at least ± 1 nanometer. The
illuminating light is reflected into the imaging optical
system using a beamsplitter 609 that is positioned
25 immediately above the lens l_1 . For a demagnification
factor of 250 and an NA of 0.62 it is possible to expose
pattern features with a size down to 0.2 micrometers with
a good pattern quality. With 32 gray levels from each
SLM-pixel the minimum gridsize is 2 nanometers.

30 The pattern generator has a fine positioning
substrate stage with an interferometer position control
system. It consists of a moveable air bearing xy table
605 made of zerodur for minimum thermal expansion. A
servo system with an interferometer position feedback
35 measuring system 606 controls the stage positioning in
each direction. In one direction, y, the servo system
keeps the stage in fixed position and in the other

direction, x, the stage moves with continuous speed. The interferometer position measuring system is used in the x-direction to trigger the exposure laser flashes to give uniform position between each image of the SLM on the substrate. When a full row of SLM images are exposed on the substrate the stage moves back to the original position in the x direction and moves one SLM image increment in the y direction to expose another row of SLM images on the substrate. This procedure is repeated until the entire substrate is exposed.

The SLM images overlaps with a number of pixels in both the x and y direction and the exposure data pattern is locally modified in the overlap pixels to compensate for the increased number of exposures that result in such overlap areas.

Variations in pulse to pulse intensity from the excimer laser is compensated by using two-pass exposure of the pattern where the first pass is done using a nominal 90% intensity of the correct intensity. In the first pass, the actual intensity in each laser flash is measured and stored. In the second pass, the correct intensity for each SLM image exposure is then used based on the measured intensity values from the first pass. In this way it is possible to reduce the influence from pulse to pulse intensity variations from the excimer laser by one order of magnitude.

The functionality of the SLM is described extensively elsewhere in this text. It has 2048 x 256 pixels with pixel size of 16 micrometers and it is possible to address all pixels within 1 millisecond. The SLM is rigidly mounted in a fine stage. This fine stage is moveable 100 microns in the x and y directions with accuracy better than 100 nanometers between each flash exposure. The fine positioning of the SLM is used to correct for position inaccuracy of the substrate positioning stage to further reduce pattern-stitching errors. In addition to the x-y positioning, there is also

a rotational possibility of the SLM stage in order to expose a pattern on a substrate with an angle other than the one specified by the substrate stage coordinate system. The purpose for such rotation is to create the possibility of incorporating substrate alignment feasibility for substrates with an already existing pattern where additional features shall be added. It is possible to measure the exact position of the substrate on the stage after loading it using an off line optical channel and a CCD camera to determine the system coordinates for a number of alignment marks existing on the substrate. During exposure, the stage position is then corrected in the x- and y-directions based on the measured positions of the alignment marks. Rotational alignment is achieved by using the stage servo system to follow the rotated coordinate system and also rotating the SLM fine stage as described.

An arbitrary data pattern of an arbitrary format is transformed into a compressed rasterized pixel map with 32 (5 bit) gray levels per pixel in a pattern rasterizer 610. Since the grayscale steps of an exposed pixel is not linear in response to the voltage applied to the pixel electrode, the input data is linearized in a pixel linearizer 611 so that the 32 gray levels correspond to a uniform increase in exposure dose for each successive level. This is done using 8-bit digital to analog converters (DAC) 612 where each gray level from the pixel map selects a voltage from the DAC's according to a previously empirically calibrated linearization function. An additional offset in the choice of analog level from the DAC's is made using a lookup table where each value corresponds to an SLM pixel and each such value corrects for anomalies of the corresponding pixel. The calibration values in the lookup table are generated using an empirical calibration procedure where a series of test patterns are sent to the SLM and the resulting exposed patterns are measured and used for individual pixel

correction. This means that each gray level in the pixel map selects an analog voltage generating a pixel deformation for every corresponding SLM pixel to give the correct exposure dose.

5

References

Nelson 1988: US patent US 5,148,157

Kück 1990: European patent EP 0 610 183

10 Sandström et al. 1990: European patent EP 0 467 076

15

CLAIMS

1. An apparatus for creating a pattern on
a workpiece, such as a photomask, a semiconductor wafer,
5 an electronic interconnect device, a printed circuit
board, a display panel, a microoptical device or a
printing plate, whereby a pattern with less visible
edges is created, comprising
- 10 a source for emitting electromagnetic radiation with
energy content in the wavelength range from EUV to IR,
 - a spatial modulator having multitude of modulating
elements, illuminated by said radiation,
 - a projection system creating an image of the
modulator on the workpiece,
 - 15 an electronic data delivery system accepting a
digital description of the pattern to be written,
extracting a sequence of partial patterns from the
digital pattern description, converting said partial
patterns to modulator signals, and feeding said signals
20 to the modulator,
 - a precision mechanical system moving said workpiece
relative to said projection system,
 - an electronic control system coordinating the
movement of the workpiece, the feeding of the signals to
25 the modulator and the emitted radiation, so that a large
pattern is stitched together from the partial images
created by the sequence of partial patterns,
where at least two adjacent images being stitched
together are overlapping at the common boundary, and the
30 overlapping images have essentially the same pattern in
the overlap region and a reduced light intensity.
2. An apparatus according to claim 1, with the
exposure in the overlap areas being stepwise constant
3. An apparatus according to claim 1 or 2, with the
35 exposure in the overlap areas having a gradual transition
from one image to the adjacent one

4. An apparatus according any of the claims 1-3, with the exposure in the overlap areas being adjustable.

5. An apparatus according any of the claims 1-3, with the boundaries of the overlap areas being
5 adjustable.

6. An apparatus according to claim 5, with the boundaries in the overlap areas being placed to avoid edges and critical features.

7. An apparatus according to any of the claims 1-6,
10 with a data processing and delivery system that breaks the input pattern description into exposure fields, one field corresponding to one light pulse, and where adjacent fields have an overlap at the common boundary.

8. An apparatus according to any of the claims 1-7,
15 with a mask, for example a transmission mask or a mirror with a varying reflectivity across its area, in the optical path to generate the reduced exposure in the overlap region.

9. An apparatus according to claim 8, with the mask
20 having an open area and graded transmission along the edge.

10. An apparatus according to claim 8, the mask having a clear area at the center and a sharp edge around the clear area, said mask being placed so that an unsharp
25 image of it is created at the workpiece.

11. An apparatus according to claim 8, with the mask placed between the light source and the spatial modulator

12. An apparatus according to claim 8, with the mask placed between the spatial modulator and the workpiece

30 13. An apparatus according to claim 8, with the mask being a second spatial modulator.

14. An apparatus according to claim 9, with the mask being an analog spatial modulator.

15. An apparatus according to any of the claims 1-7,
35 with the reduced exposure created by the same spatial light modulator that creates the pattern.

16. An apparatus according to claim 15, with the spatial light modulator having a reduced static light efficiency in those areas which will be overlapping in the pattern on the workpiece, thereby creating a reduced exposure in those areas.

17. An apparatus according to claim 15, with an additional coating on the spatial modulator in the overlap areas that reduce the light efficiency.

18. An apparatus according to claim 15, with the spatial modulator being an analog modulator and said reduced exposure is created by the analog function of the modulator.

19. An apparatus according to claim 18, with the reduced exposure being controlled by the data fed to the analog spatial modulator

20. An apparatus according to claim 18, with the reduced exposure being controlled by the data fed to the analog spatial modulator, and said reduced exposure data is added to the pattern data during the conversion from the input description to pixel data suitable for the spatial modulator.

21. An apparatus according to claim 18, with the reduced exposure being controlled by the data fed to the analog spatial modulator, and said reduced exposure data is added to the pattern data by a special hardware unit.

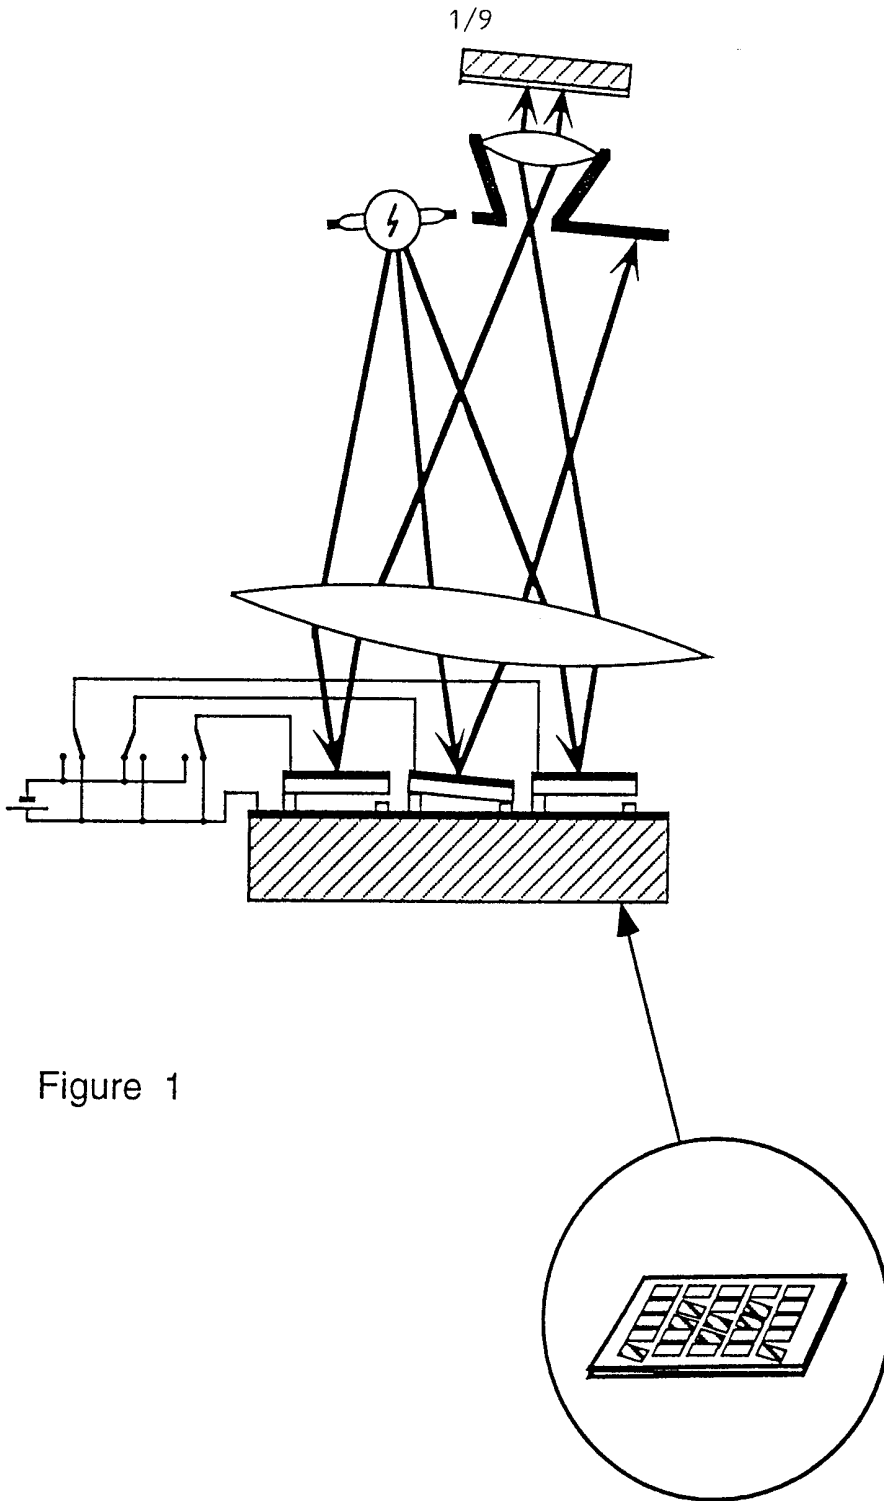


Figure 1

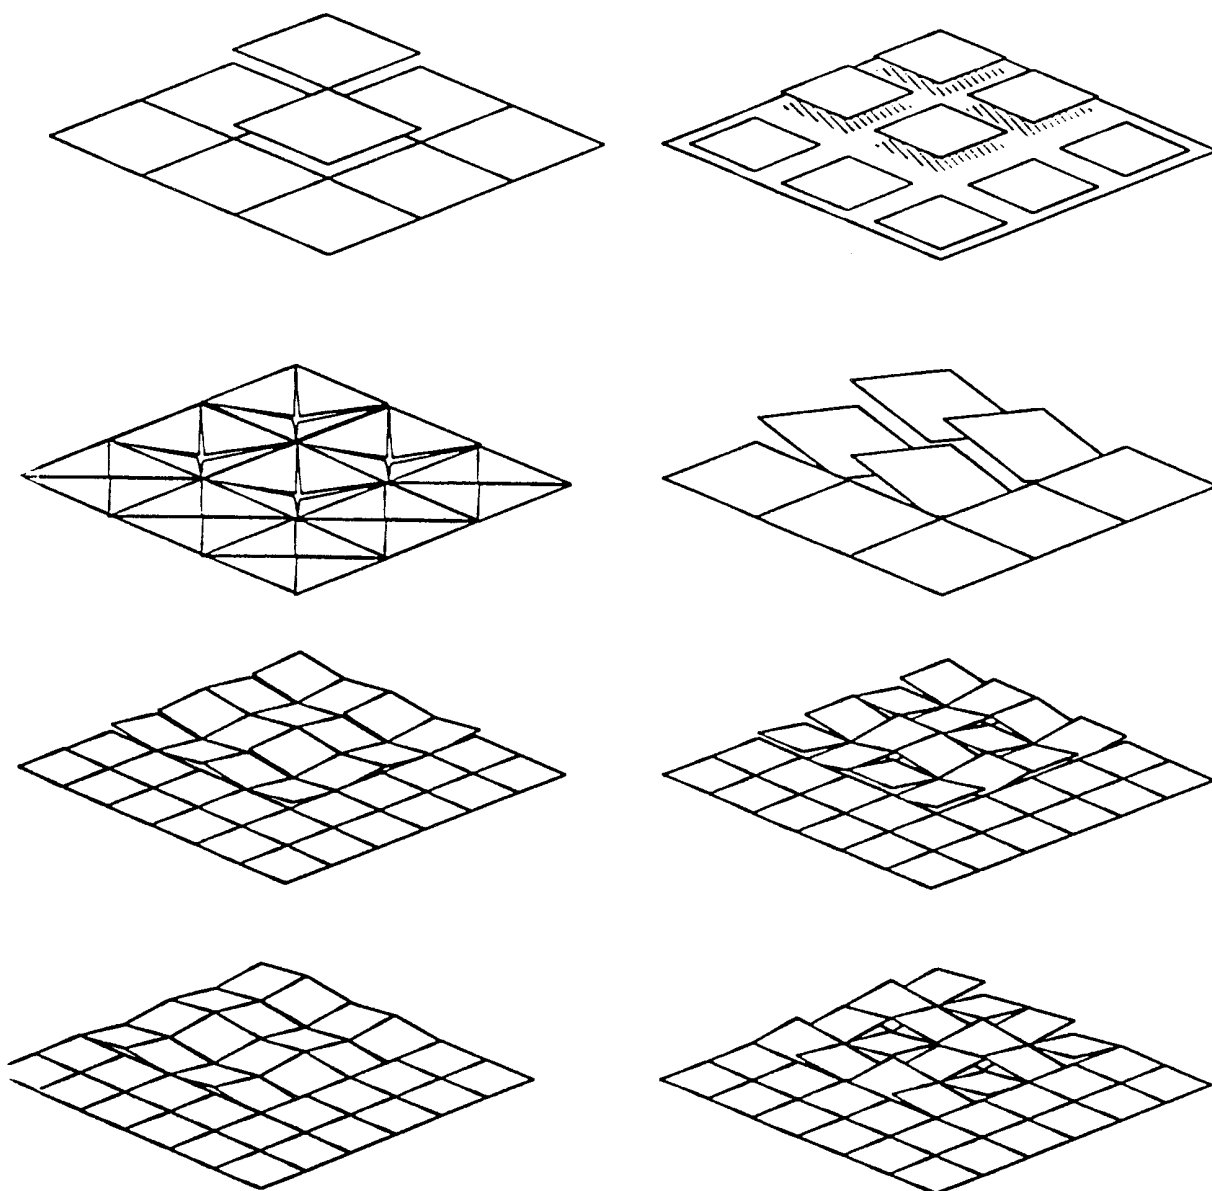


Figure 2

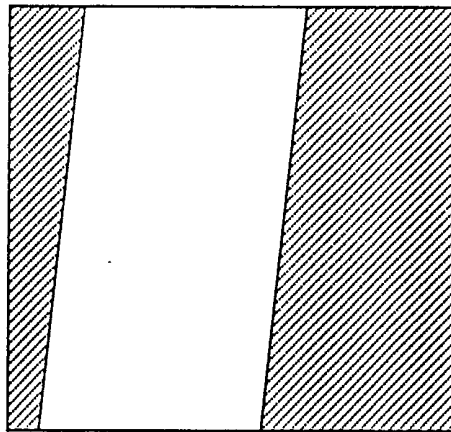
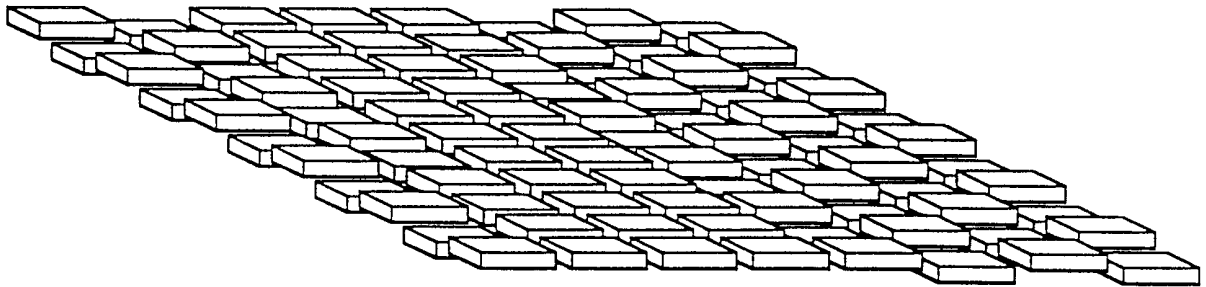


Fig 3

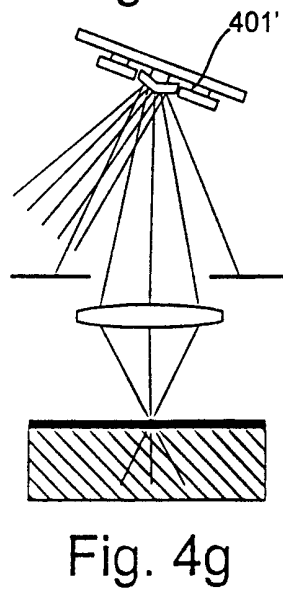
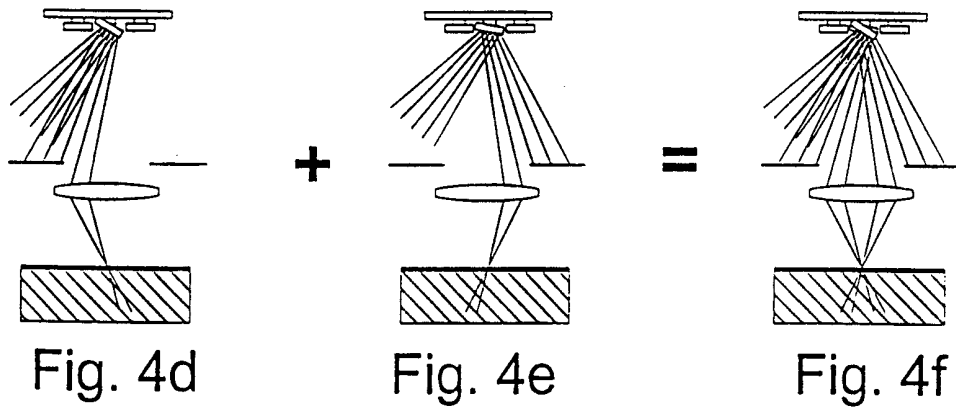
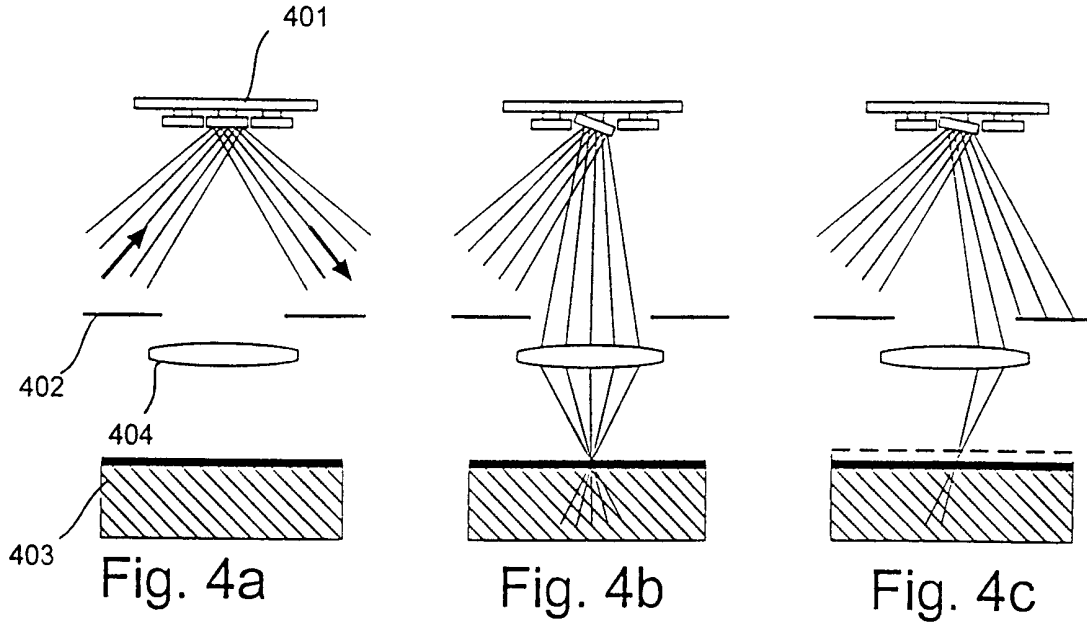


Fig. 4

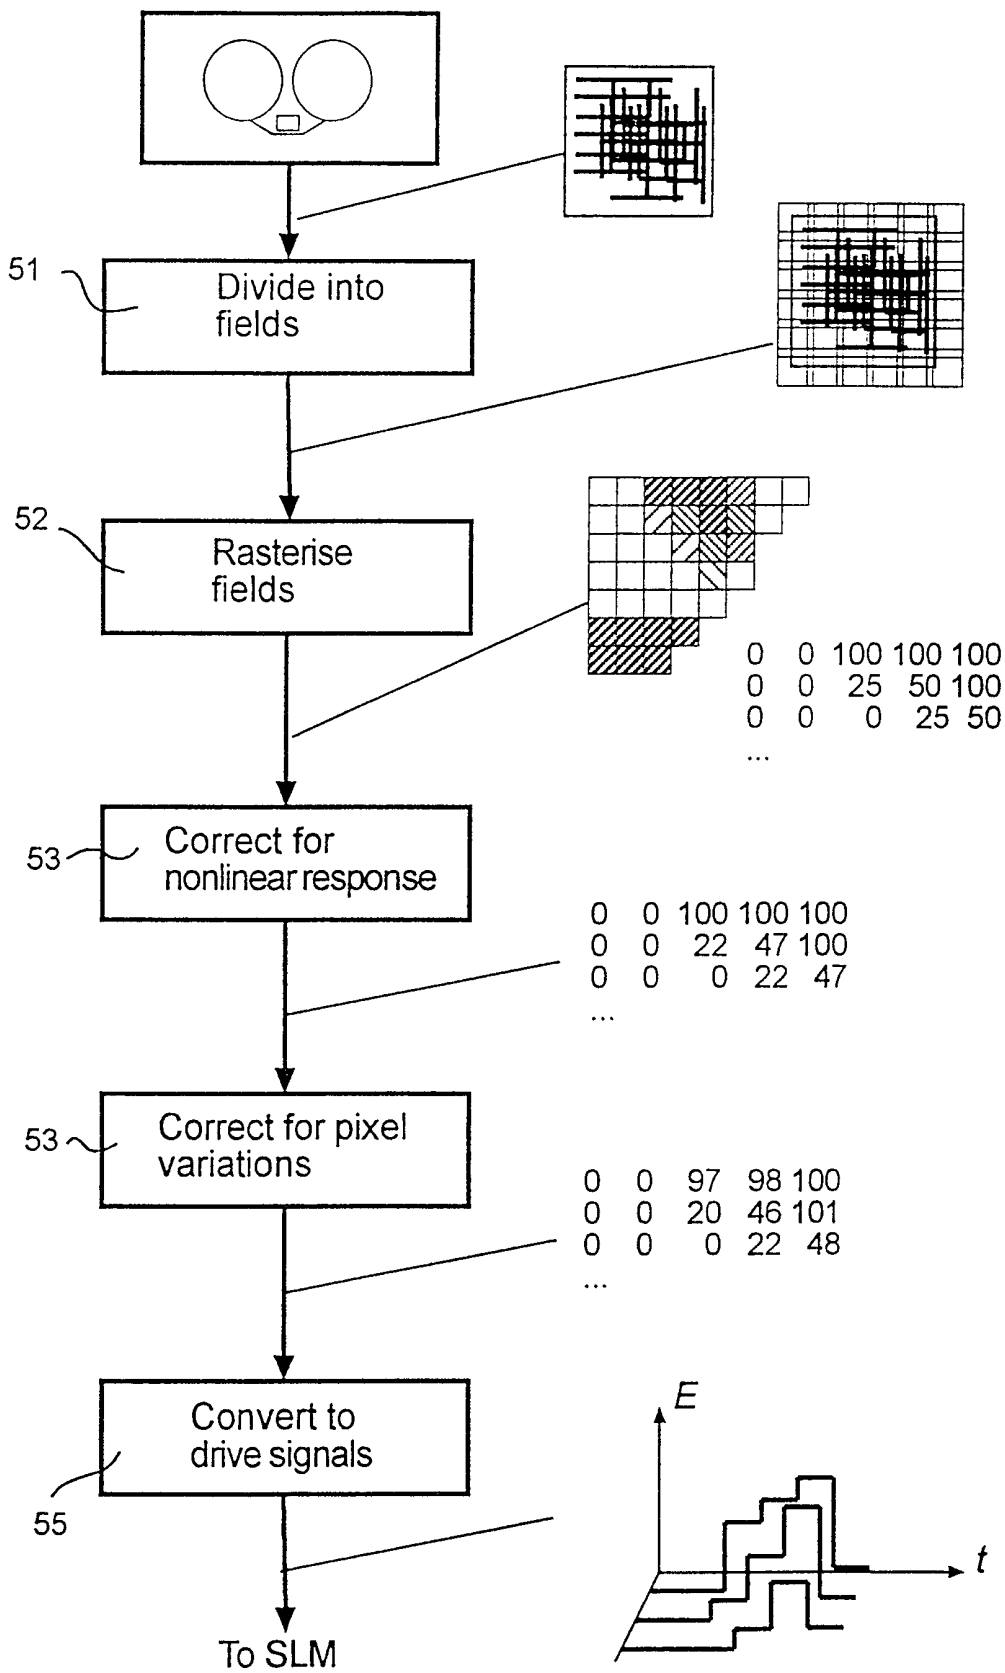


Fig. 5

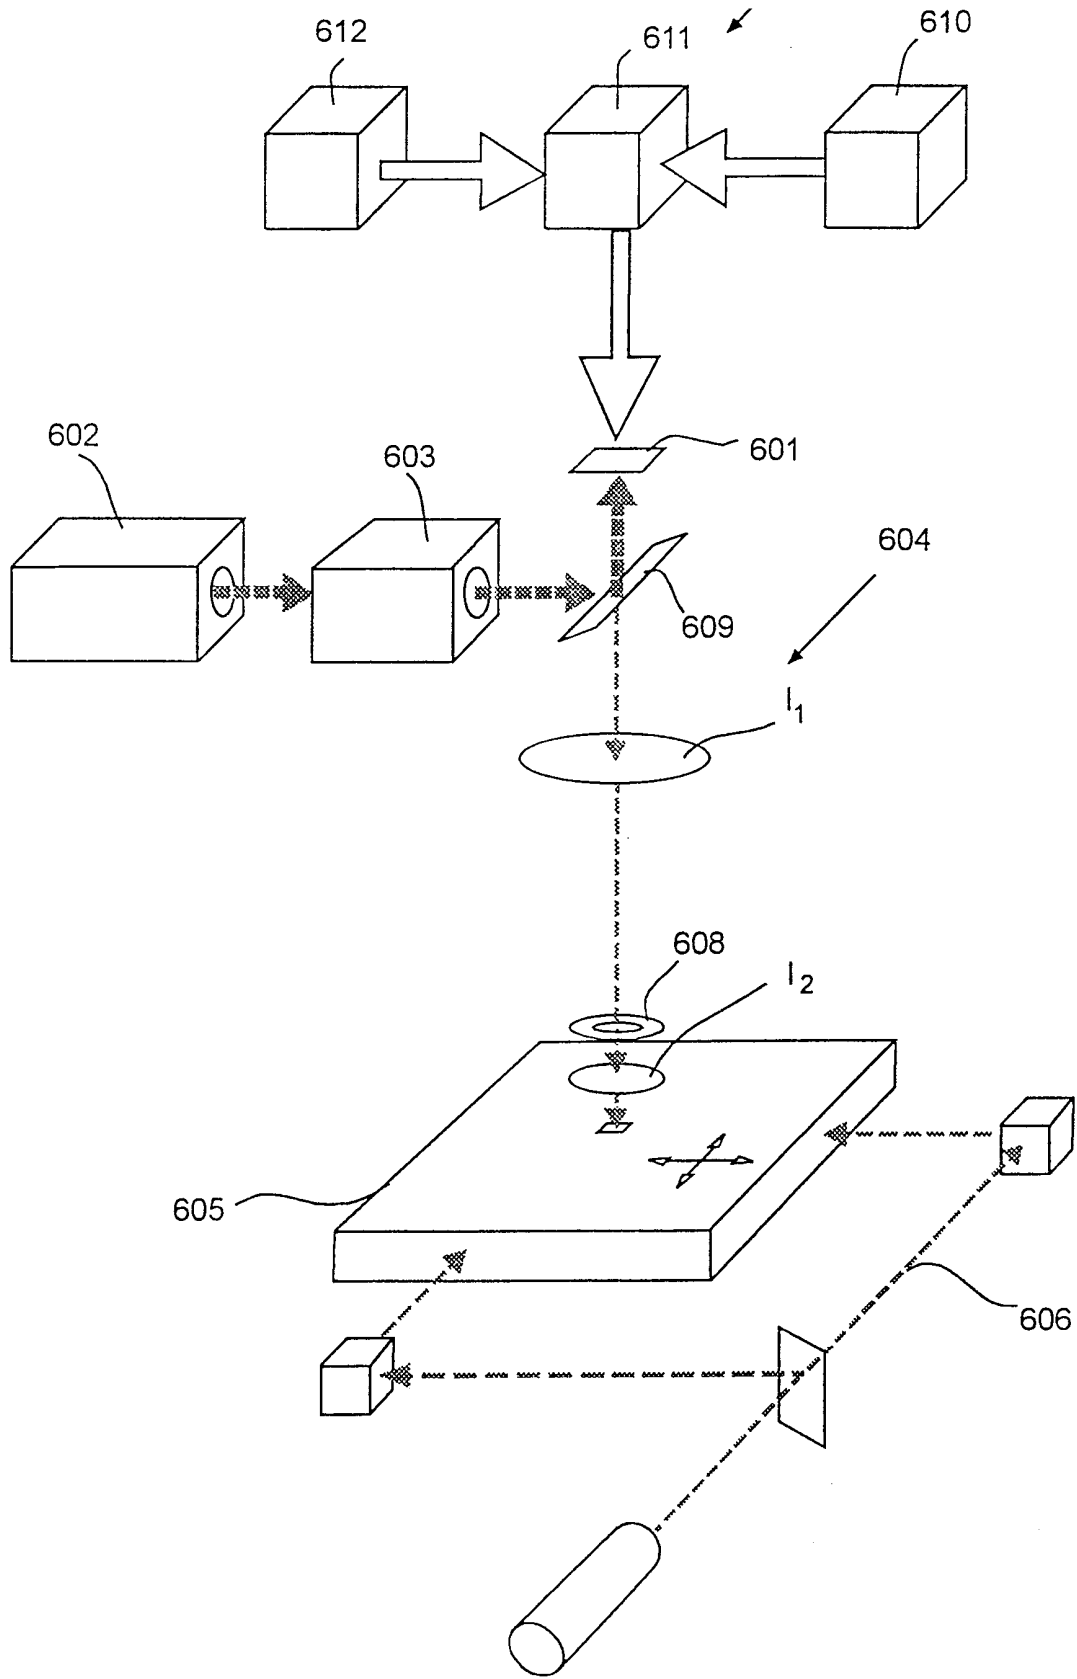


Fig. 6

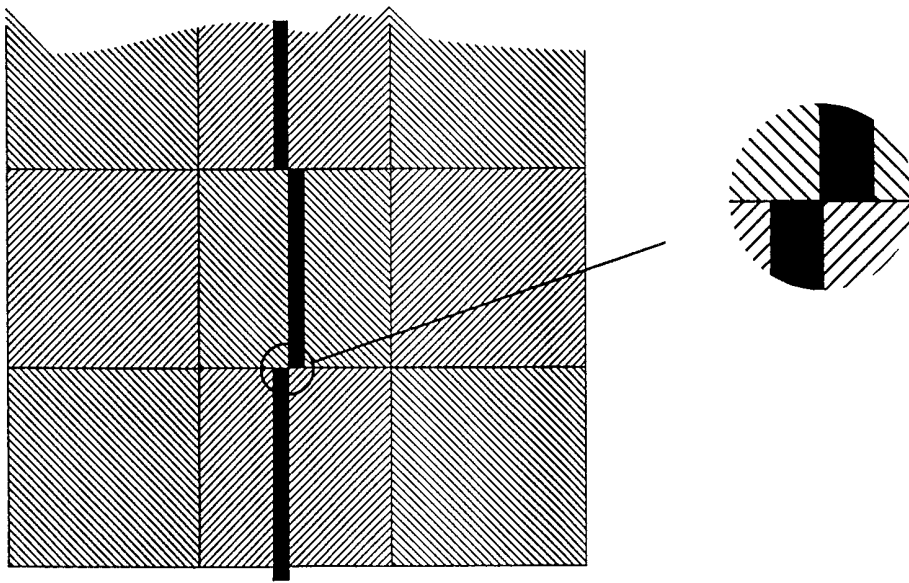


Fig. 7a

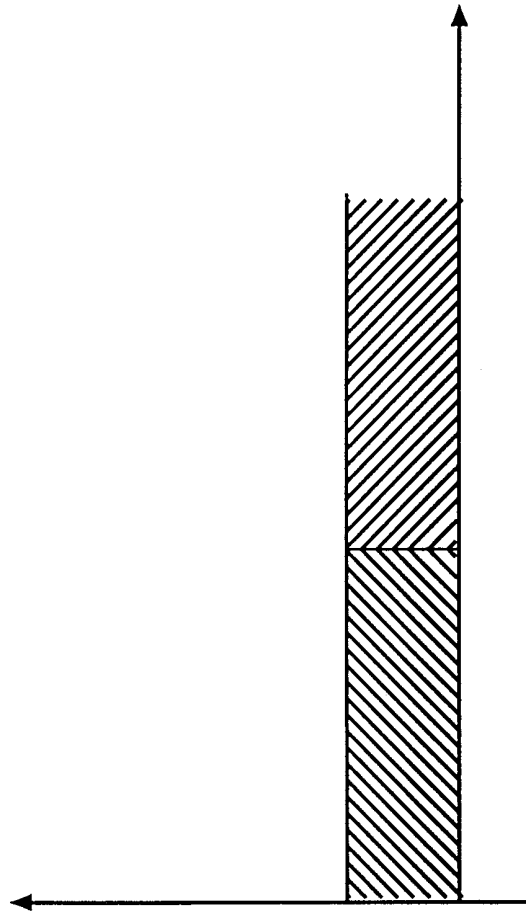


Fig. 7b

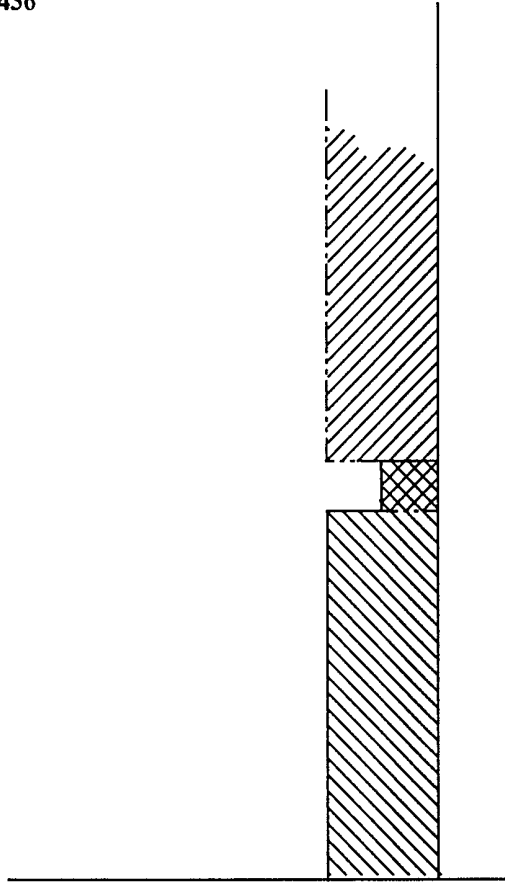


Fig. 7d


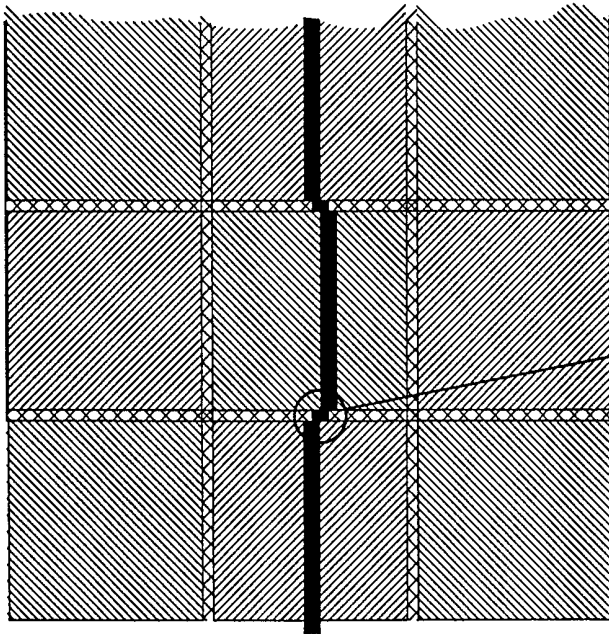


Fig. 7c

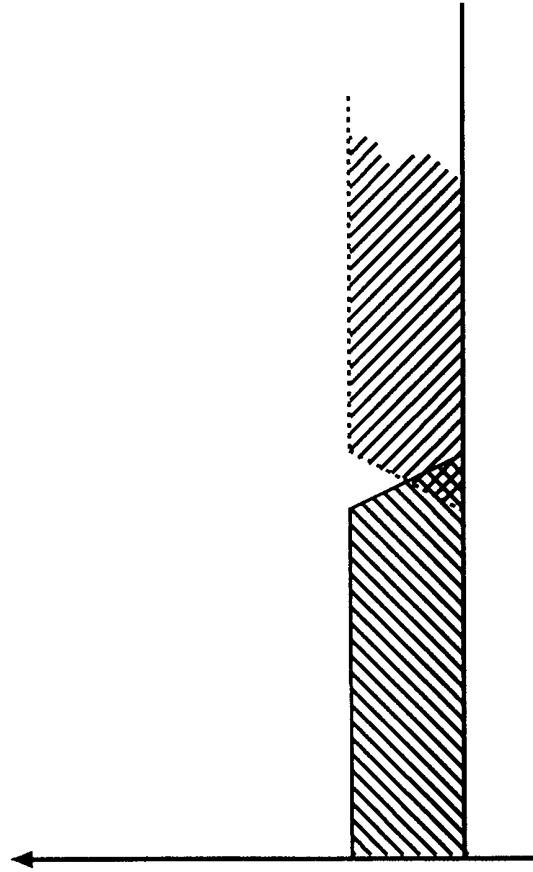


Fig. 7f

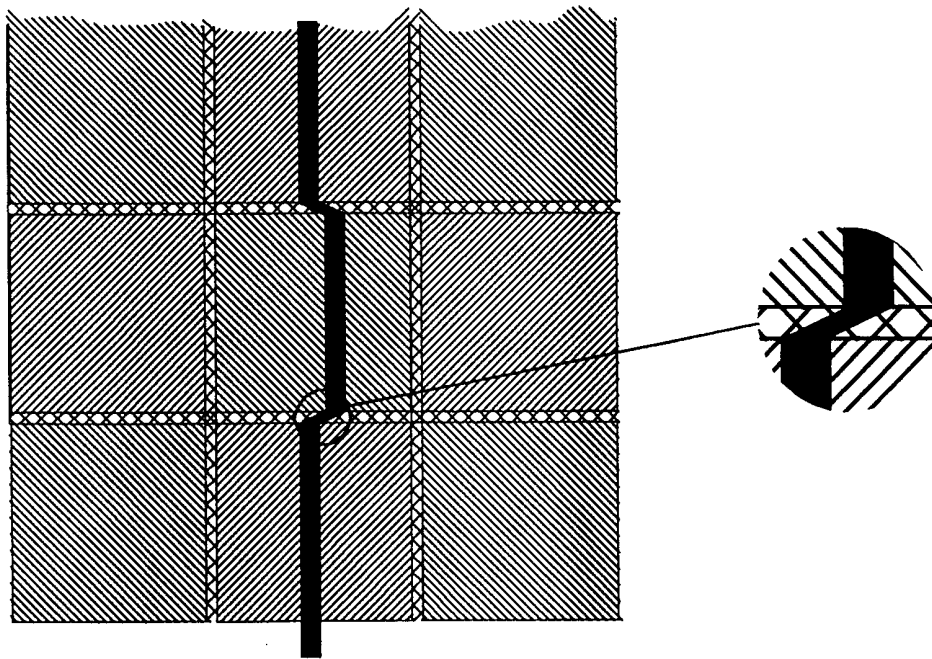


Fig. 7e

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 99/00292

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: G03F 7/20, G03F 7/207, G02B 26/06 // G03F 1/00, H01L 21/027

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: G02B, G03F, H01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

QUESTEL: EDOC, WPIL, JAPIO, DIALOG: DIALINDEX

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|-----------|---|-----------------------|
| X | WO 9804950 A1 (ANVIK CORPORATION), 5 February 1998 (05.02.98), page 9, line 3 - line 29; page 16, line 35 - page 17, line 3, figures 1,7 -- ----- | 1,2 |

 Further documents are listed in the continuation of Box C.
 See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

9 June 1999

Date of mailing of the international search report

29 -06- 1999

Name and mailing address of the ISA /

Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Bengt Christensson
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT
Information on patent family members

03/05/99

International application No.
PCT/SE 99/00292

| Patent document cited in search report | Publication date | Patent family member(s) | Publication date |
|---|---------------------|----------------------------|---------------------|
| WO 9804950 A1 | 05/02/98 | NONE | |
