

INSTRUCTIONS

(n) If Convention application insert "Convention"

APPLICATION ACCEPTED AND AMENDMENTS

ALLOWED 14.5.90

AUSTRALIA

Patents Act

(a) Convention

599840

(b) Delete one

APPLICATION FOR A STANDARD/~~PETTY~~ (b) PATENT

(c) Insert FULL name(s) of applicant(s)

I/We (c) COMPAX CORP.

(d) Insert FULL address(es) of applicant(s)

of (d) 33-61 54th Street, Woodside, New York 11377, U.S.A.

(e) Delete one

hereby apply for the grant of a (c) Standard/~~Petty~~ Patent for an invention entitled

(f) Insert TITLE of invention

(f) METHOD AND APPARATUS FOR COMPRESSIVE SHRINKAGE OF TUBULAR KNITTED FABRICS AND THE LIKE

(g) Insert "complete" OR "provisional" OR "petty patent"

which is described in the accompanying (g) complete specification.

(Note: The following applies only to Convention applications)

Details of basic application(s)

(h) Insert number, country and filing date for EACH basic application

(h)	Application No.	Country	Filing Date
	107,953	United States	10/13/87

Address for Service:

PHILLIPS ORMONDE AND FITZPATRICK
Patent and Trade Mark Attorneys
367 Collins Street
Melbourne, Australia 3000


(i) Insert DATE of signing

Dated (i) September 28, 1988

(j) Signature of applicant(s) (For body corporate see headnote*)

(j) COMPAX CORP.

(k) Corporate seal if any



By Richard P. Bruce
Richard P. Bruce, Jr., President

Note: No legalization or other witness required

10/3564

1(CORPORATE SEAL)

PHILLIPS ORMONDE AND FITZPATRICK
Patent and Trade Mark Attorneys
367 Collins Street
Melbourne, Australia

STUART TAYLOR

AUSTRALIA

Patents Act

DECLARATION FOR A PATENT APPLICATION

▼ INSTRUCTIONS

- (a) Insert "Convention" if applicable
(b) Insert FULL name(s) of applicant(s)

In support of the (a) Convention application made by COMPAX CORP.
(b)

- (c) Insert "of addition" if applicable
(d) Insert TITLE of invention

(hereinafter called "applicant(s) for a patent (c) for an invention entitled (d) METHOD AND APPARATUS FOR COMPRESSIVE SHRINKAGE OF TUBULAR KNITTED FABRICS AND THE LIKE

- (e) Insert FULL name(s) AND address(es) of declarant(s) (See headnote*)

~~I/We~~ (e) Richard P. Bruce, Jr., President
COMPAX CORP.
33-61 54th Street
Woodside, New York 11377, United States of America

do solemnly and sincerely declare as follows:

1. ~~I am/We are the applicant(s).~~
~~(or, in the case of an application by a body corporate)~~
1. I am/~~We are~~ authorized to make this declaration on behalf of the applicant(s).
2. ~~I am/We are the actual inventor(s) of the invention.~~
~~(or, where the applicant(s) is/are not the actual inventor(s))~~
2. (i) William D. Milligan, 4000 Wesley Chapel Road, Matthews, NC, 28105, U.S.A. and Andrew P. Cecere, 61 North Montague Street, Valley Stream, NY, U.S.A.

- (f) Insert FULL name(s) AND address(es) of actual inventor(s)

- (g) Recite how applicant(s) derive(s) title from actual inventor(s) (See headnote**)

is/are the actual inventor(s) of the invention and the facts upon which the applicant(s) is/~~are~~ entitled to make the application are as follows:

- (g) Applicant is the assignee of the invention from the actual inventors.

(Note: Paragraphs 3 and 4 apply only to Convention applications)

- (h) Insert country, filing date, and basic applicant(s) for the/or EACH basic application

3. The basic application(s) for patent or similar protection on which the application is based is/~~are~~ identified by country, filing date, and basic applicant(s) as follows:
(h) United States, October 13, 1987, William D. Milligan and Andrew P. Cecere

4. The basic application(s) referred to in paragraph 3 hereof was/~~were~~ the first application(s) made in a Convention country in respect of the invention the subject of the application.

- (k) Insert PLACE of signing

Declared at (k) Woodside, New York, USA

- (l) Insert DATE of signing

Dated (l) September 28, 1988

- (m) Signature(s) of declarant(s)

(m) COMPAX CORP.

By Richard P. Bruce, Jr.
Richard P. Bruce, Jr., President

Note: No legalization or other witness required

To: The Commissioner of Patents

(12) PATENT ABRIDGMENT (11) Document No. AU-B-23740/88
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 599840

(54) Title
SHRINKING TUBULAR KNITTED FABRICS

International Patent Classification(s)
(51)⁴ D06C 021/00

(21) Application No. : 23740/88

(22) Application Date : 13.10.88

(30) Priority Data

(31) Number	(32) Date	(33) Country
107953	13.10.87	US UNITED STATES OF AMERICA

(43) Publication Date : 13.04.89

(44) Publication Date of Accepted Application : 26.07.90

(71) Applicant(s)
COMPAX CORP.

(72) Inventor(s)
WILLIAM D. MILLIGAN; ANDREW P. CECERE

(74) Attorney or Agent
PHILLIPS,ORMONDE & FITZPATRICK

(57) Claim

1. Compressive pre-shrinking apparatus for knitted fabrics and the like comprising (a) a fabric feeding roller, (b) an entry-side fabric confining shoe generally conforming to a surface portion of said feeding roller and defining therewith a confined entry path for the controlled advancement of fabric by said feeding roller, (c) means for adjustably relatively positioning said entry-side confining shoe and fabric feeding roller to bear with limited controlled pressure upon fabric confined in said entry path, (d) a fabric retarding roller mounted for rotation closely adjacent and parallel to said feeding roller, (e) the axes of said feeding and retarding rollers defining a reference plane passing through the region at which said feeding and retarding rollers most closely approach each other, (f) an exit-side confining shoe conforming to a

(11) AU-B-23740/88
(10) 599840

-2-

surface portion of said retarding roller and defining therewith an exit path for the controlled discharge of fabric by said retarding roller, (g) means for adjustably relatively positioning said exit-side confining shoe and said retarding roller to bear with limited controlled pressure upon fabric confined in said exit path, (h) said confining shoes having blade-like extensions projecting between said rollers and meeting in the general region of the plane containing the axes of said rollers, and (i) means comprising confronting surfaces of said blade-like extensions forming a confinement zone for the confined and controlled passage of said fabric during its transit from said entry path to said exit path.

AUSTRALIA

599840

Patent Act

C O M P L E T E S P E C I F I C A T I O N

(ORIGINAL)

Class

Int. Class

Application Number:

Lodged:


Complete Specification Lodged:

Accepted:

Published:

Priority:

Related Art:

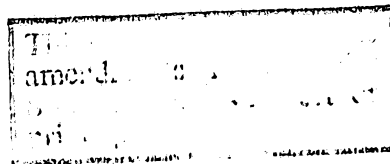

APPLICANT'S REF: 169-001AU

Name(s) of Applicant(s): COMPAX CORP.

Address(es) of Applicant(s):
33-61 54th Street
Woodside, New York 11377
United States of America

Address for Service is: PHILLIPS ORMONDE & FITZPATRICK
Patent and Trade Mark Attorneys
367 Collins Street
MELBOURNE, Australia 3000

Complete Specification for the invention entitled:

METHOD AND APPARATUS FOR COMPRESSIVE SHRINKAGE OF TUBULAR KNITTED FABRICS
AND THE LIKE

The following statement is a full description of this invention, including
the best method of performing it known to applicant(s):

**METHOD AND APPARATUS FOR COMPRESSIVE
SHRINKAGE OF TUBULAR KNITTED FABRICS AND THE LIKE**

Background and Summary of the Invention

The invention is directed to improve methods and
5 apparatus for the compressive shrinkage of fabrics. The
invention is applicable to particular advantage to the
treatment of tubular knitted fabrics, but is not to be
considered as limited thereto, as the principles of the
invention are useful to advantage in connection with the
10 processing of open width fabrics of both knitted and
non-knitted construction.

In the processing of knitted fabrics, particularly
tubular knitted fabrics, one of the widely utilized and
commercially successful procedures for compressive shrink-
15 age treatment is reflected in the Eugene Cohn, et al.
United States Patents No. 3,015,145, 3,015,146 and 3,083,4-
35. These procedures involve one or, more typically, two
compressive shrinking stations, each comprising an opposed
pair of rollers and a feeding and confining shoe. Incoming
20 fabric is passed between a feeding roller and a confining
shoe, causing the fabric to be advanced at a predetermined
speed in a relatively positive manner. The second roller,
referred to as a retarding roller, forms a nip with the
feeding roller, such that fabric, after it exits from the
25 confining shoe, is engaged under pressure simultaneously
between the feeding and retarding rollers. The retarding
roller, which is driven at a surface speed controllably

slower than the surface speed of the feeding roller, retards the advance of the fabric, so that controlled lengthwise compression of the fabric takes place in a short compressive shrinking zone formed between the roller nip and the terminating edge of the fabric confining shoe. The shoe and/or rollers desirably are heated, such that the emerging fabric retains a substantial portion, at least, of the compressive shrinkage imparted thereto in the compressive shrinkage zone.

Even though the above described compressive shrinking techniques have been extremely successful commercially, there are certain inherent limitations thereto which result from the fact that the fabric is being acted upon simultaneously, at the same point but on opposite sides, by rollers operating at different speeds. The opposite sides of the fabric are thus necessarily treated slightly differently. In addition, the inherent slippage of at least the feeding roller relative to the fabric surface at the roller nip sometimes imparts an undesirable surface appearance to certain types of fabrics, such as by lightening darker shades of outerwear fabric, for example, or imparting a shine to underwear fabrics. This can be disconcerting particularly with respect to the processing of tubular fabrics, where the "opposite" sides of the fabric during processing are in fact the same surface of the fabric - namely the outside surface - in the finished garment.

For most applications, the tendency of a single compressive shrinking station of the above described type to have an asymmetrical effect on opposite sides of the fabric is accommodated by providing for dual station
5 machines, with one compressive shrinking station being reversely oriented with respect to the other. This provides acceptable results for some fabrics, for example, but still has shortcomings with respect to highly sensitive fabrics, such as dark shades of outerwear fabrics.

10 In accordance with the present invention, improved equipment and techniques are provided for the mechanical compressive shrinkage of fabrics, particularly but not necessarily tubular knitted fabrics, which enable the many important advantages of the differential roller processing
15 technique to be employed yet which significantly minimizes or eliminates certain inherent limitations in the existing procedures. More specifically, the method and apparatus of the invention utilize opposed feeding and retarding rollers, driven respectively at higher and lower surface
20 speeds, for feeding and retarding fabric. However, in contrast to the equipment of the above described patented construction, the respective feeding and retarding rollers are separated by a distance significantly greater than the thickness of the fabric being processed, so that the fabric
25 cannot be engaged simultaneously on opposite sides by the respective rollers. A fabric confining shoe (entry shoe) is associated with the feeding roller, and a separate

confining shoe (exit shoe) is associated with the retarding roller. The extremities of these respective entry and exit shoes form between them a defined confinement zone. The fabric is decelerated and longitudinally compressed at the
5 entrance to the zone speed, and confined and guided for a controlled dwell time during its passage through the zone.

To particular advantage, the opposed extremities of the respective confining shoes are located substantially at the point of maximum convergence of the respective feeding
10 and retarding rollers and are disposed at a substantial angle, such as 45 degrees, to the surface of the feeding roller. Accordingly, as the fabric exits the discharge end of the entry shoe, it is abruptly diverted by the leading end of the exit shoe and is guided into the confinement
15 zone, defined between the two shoes. Upon exiting the confinement zone, the fabric is immediately contacted by the outer surface of the retarding roller, travelling at a controllably slower surface speed than the feeding roller.

Significantly, although the feeding and retarding
20 rollers are operated at controllably different surface speeds, the rollers do not act simultaneously upon opposite surfaces of the fabric at the same point, so that it is not necessary for the roller surfaces to have any significant slippage with respect to the fabric surfaces. As a result,
25 it is possible under the present invention to impart the high degree of mechanical compressive shrinkage, required by many knitted fabrics, in a single station machine.

To advantage, fabric passing through the confinement zone is confined under only minimum pressures, in the thickness direction. This is accomplished by providing for a precision, on-the-fly adjustment mechanism for movably
5 positioning one of the shoes, preferably the entry shoe, for limited motion about a pivot axis. This accommodates variation in the thickness of the confining zone during normal operations of the apparatus. The confining pressures acting on the fabric in the zone are maintained at a
10 level sufficient to avoid crimping of the longitudinally compressed fabric, but typically not significantly greater than that.

In one of its particularly preferred embodiments, apparatus of the invention has substantial compatibility,
15 structurally, with the equipment heretofore marketed under the above mentioned United States patents, and with respect to which there is a substantial installed base of equipment. The apparatus of the invention is capable of being incorporated by a relatively simple retrofit into the
20 existing installed equipment, utilizing much of the existing mechanism, resulting in significant upgrading in performance of the equipment for at least certain types of fabrics.

For a more complete understanding of the above and
25 other features and advantages of the invention, reference should be made to the following description of a preferred embodiment and to the accompanying drawings.

Description of the Drawings

Fig. 1 is a perspective view of a complete range incorporating the compressive shrinkage apparatus of the invention, intended particularly for the mechanical compressive shrinkage of tubular knitted fabric.

Fig. 2 is a highly enlarged, cross sectional view of the compressive shrinkage station of the apparatus of Fig. 1, showing the respective feeding and retarding rollers and the respective entry and exit confining shoes.

Fig. 3 is a representational side elevational view of a portion of the apparatus of Fig. 1, showing particularly structural details of the compressive shrinkage station.

Fig. 4 is a fragmentary perspective view, showing portions of the entry and exit confining shoes and details of the mounting means for the exit confining shoe.

Fig. 5 is a fragmentary front elevational view showing details of the exit and entry confining shoes.

Fig. 6 is a cross sectional view as taken generally on line 6-6 of Fig. 5.

Fig. 7 is a simplified schematic representation of a drive control system for the apparatus of Fig. 1.

Description of a Preferred Embodiment

Referring now to the drawings, and initially to Fig. 1, the reference numeral 10 designates in a general way a processing range for treating tubular knitted fabric. Unprocessed fabric 11 from a supply source (not shown) such as a pallet or truck, is passed upwardly over a rotatable

bow 12, which spreads the fabric to a generally flat, two layer form. The fabric is then passed under a first tension bar 13 and over a second tension bar 14. The tension bars 13, 14 are separated by spacers 15, and are
 5 mounted on frame members 16 for controlled rotational positioning. The tension bars serve to apply a very light tension to the fabric, sufficient to flatten and control it, but typically insufficient to elongate it to any significant degree.

10 In the illustrated range, fabric is directed around a guide roller 17 (Fig. 7), over a driven, variable speed control roller 17a, around a floating dancer roll 17b and then through a series of flattening rolls 20. The control roller 17a provides the means for drawing the unprocessed
 15 fabric 11 over the bow 12 and through the tension bars 13, 14. The speed of the roller 17a is controlled by the dancer roll 17b with reference to the operating speed of other components of the range, as will be further explained.

20 Downstream of the control roller 17a is a propeller-spreader station, generally designated by the numeral 18. By way of example but not of limitation, the propeller-spreader apparatus may be of the type illustrated in the Frezza United States Patent No. 4,103,402, the
 25 disclosure of which is incorporated herein by reference.

The spreader apparatus includes an internal spreader frame (not shown) which is received internally of the

fabric tube. The spreader frame is supported horizontally
 by means of grooved edge drive rolls 19, which are adjust-
 able laterally to the width of the spreader frame and which
 are driven externally by the machine motive system. The
 5 spreader frame assembly, which is in itself well known and
 widely utilized in the trade, extends from a series of
 flattening rolls 20, at its upstream extremity, through a
 pair of steam boxes 21, 22 on the downstream side of the
 edge drive rolls 19, substantially to the entry or feeding
 10 roll (to be described) of a compressive shrinkage station
 23.

In accordance with known techniques, the incoming
 fabric may be slightly overfed onto the downstream section
 of the spreader frame (i.e., downstream of the edge drive
 15 rolls 19) so as to be effectively relaxed in a lengthwise
 direction and set to a predetermined, uniform width. In
 this condition, the fabric is subjected to steam when
 passing between the steam boxes 21, 22, which serves to
 moisten and lubricate the fibers of the material and
 20 accommodate relaxation and adjustment of the stitches, in
 preparation for the primary compressive shrinkage treat-
 ment.

Immediately upon discharge from the spreader frame
 section 18, the fabric enters the compressive shrinkage
 25 station 23 where, in the manner to be more fully described,
 it is compressed in a lengthwise direction in a controlla-
 ble amount which typically is a function of the inherent

residual shrinkage of the incoming fabric. In the case of tubular knitted fabrics, this may well be on the order of 15-25%, for example. The longitudinally compressed fabric, now designated by the reference number 24, is advanced to
5 a gathering station 25 which, in the illustrated range, is a roll-up mechanism. By way of example, the roll-up apparatus may be of the general type shown in the Eugene Cohn et al. U.S. Patent No. 3,606,186 and/or the Samuel Cohn et al. U.S. Patent No. 2,736,098, the disclosures of
10 which are incorporated herein by reference. The fabric, passing to the roll-up device 25, is kept under minimum tension, sufficient only for adequate control of the fabric during the winding of the roll 26.

Alternatively, the fabric may be directed to a folder
15 apparatus such as, for example, of the type disclosed in the Frezza U.S. Patent No. 4,053,151.

The drive mechanisms for the range of Fig. 1 are illustrated schematically in Fig. 7. Individually speed controlled drive arrangements are provided for the gather-
20 ing station 25, the compressive shrinkage station 23, the spreader-propeller station 18 and the entry roll 17a. These may be in the form of individually controllable variable speed motors for each of these major sections of the range, or the system may be driven by a primary, speed
25 controllable drive motor 31 in conjunction with variable speed mechanical drives for effecting desired speed control. Typically, one of the stations, such as the compres-

sive shrinkage station 23, is a "master" station, driven by a motor 31 and with respect to which the operating speeds of the other stations are automatically slaved. For example, the driven entry roller 17a, the edge drive rolls 19, and the wind up device 25 are respectively driven from the master drive motor 31 through adjustable variable speed mechanisms 17c, 19a and 25a. The variable speed mechanism 17c is controlled by the dancer roll 17b, so as to maintain a constant fabric supply to the propeller-spreader apparatus 18. Under the described arrangement, if the compressive shrinkage station 23 were increased in speed 10%, the speeds of all stations of the range automatically would increase by an equivalent amount. If the speed of the roll-up station 25 were changed, on the other hand, it would be increased or decreased relatively to the speed of the compressive shrinkage station 23, and the other stations would be unaffected. These techniques are, of course, well known in the art.

With reference now to Figs. 2-7, illustrating details of the novel compressive shrinkage station of the invention, the apparatus includes a skeletal frame structure 27 (Fig. 3) on which are mounted bearing supports 28, at opposite sides of the machine, carrying bearing blocks 29. The bearing blocks 29 rotatably journal a feeding roller 30. In the illustrated arrangement, the feeding roller 30 may be mounted on a fixed axis on the machine frame 27 for

controlled rotation by means of a variable speed master drive 31 (Fig. 7).

Cooperating with the feeding roller 30 is a retarding roller 32. This is journaled on opposite sides by means of bearing blocks 33 carried by opposite side members 34 of a pivot frame, mounted in the machine frame 27 for pivoting about the axis of a drive shaft 35. The frame members 34 are connected to the rod ends 36 of fluid actuators 37 anchored at 38 in each side of the machine frame. Desirably, the fluid actuators 37 are one-way actuators, being spring urged to extend the actuating rods 36 toward the left in Fig. 3 and being actuatable, under regulated fluid pressure to retract the actuator rods and thereby draw the retarding roller 32 toward the feeding roller 30.

A variable speed mechanical drive 39 (Fig. 7), operated from the master drive 31, serves to drive the retarding roller 32 at a controllably lesser surface speed than the surface speed of the feeding roller 30. The drive 39 may operate a sprocket 40 (Fig. 3) and through a chain or belt 41 a further sprocket 42 mounted on the shaft 35 about which the roller mounting frame 34 is pivoted. A further chain or belt drive (not illustrated) connects the shaft 35 to the retarding roller 32, enabling the retarding roller to be controllably driven in any pivoted position of the frame 34.

In the illustrated and preferred embodiment of the invention, the feed roller 30 may have an overall diameter

of approximately five inches. The roller is of hollow construction, having a relatively heavy outer steel cylindrical wall 43 of approximately one and one quarter inches in thickness. Desirably, this is roughened on the exterior surface for enhanced gripping of the incoming fabric 11. The feed roller cooperates with a confining shoe assembly 44, hereinafter referred to as the shoe, which comprises a main shoe body 45 and a zone-forming blade 46. The shoe body 45 and blade 46 form, in effect, a single shoe assembly provided with smooth cylindrical inner surface portions 47, 48. These cylindrical surface portions are of just slightly larger diameter than that of the feeding roller 30 (e.g., about 0.04 inch on a five inch nominal roll diameter), and the center of the cylindrical surface 47-48 may be located slightly offset (to the right in Fig. 2) from the center of the roller, providing a gradually tapered confining slot 49 for guiding and confining the incoming fabric 11 over a substantial arcuate portion of the feed roller 30 (i.e. about 90 degrees) to the discharge end of the shoe assembly.

To particular advantage, the mounting arrangement for the entry shoe assembly 44 may be substantially in accordance with the Edmund A. Diggle, Jr. U.S. Patent No. 3,973, 303, the disclosure of which is incorporated herein by reference. That mechanism includes a pair of upwardly extending brackets 50 mounted for limited rotation on the end shafts 51 of the feed roller 30. These brackets are

connected by way of a swivel coupler 52 to a vertically adjustable rod 53 controllably positionable by the machine operator, as through a hand wheel 54 (see Fig. 1). With limited vertical adjustment of the rods 53, the supports 50
 5 may be caused to pivot slightly in a clockwise or counterclockwise direction about the axis of the shaft 51, providing a high precision adjustment of the position of the entry shoe.

L-shaped brackets 55 are pivotally mounted at ^{axis} 56 on
 10 the upwardly projecting brackets 50, and are controllably pivotable relative to the upstanding brackets by means of single-acting air cylinders 57 at each side. When deactivated, the actuators 57 are spring urged in a retracting direction, to pivot the L-shaped supports 55 in a clockwise
 15 direction as viewed in Fig. 3. Under regulated air pressure, the operating rods 58 of the actuators are extended, pivoting the supports 55 in a counterclockwise direction.

Mounted on the supports 55 by means of a pivot bearing 59 at each end, is the entry shoe assembly 44. The shoe
 20 assembly includes tilt adjustment lugs 60 at each side, which project through windows 61 in the support members 55, being adjustably positioned within such windows by means of adjusting bolts 62, 63.

To understand the operation of the mounting bracket
 25 assembly for the entry shoe, assume that the shoe assembly 44 is in an initial position as shown in Fig. 2. By adjusting the bolts 62, 63, the entire shoe assembly 44 may



be tilted about the axis of the pivot bearing 59 as necessary to adjust the configuration of the gradually converging confinement space 49. The entire assembly may be pivoted circumferentially about the axis of the feed roller 30, by vertical adjustment of the shafts 53, causing the upright brackets 50 to pivot about the roller shaft. This provides for a fine adjustment of the positioning of the lower extremity of the feeding shoe assembly and thus the thickness of the confinement zone. Bodily retraction of the entire feeding shoe assembly from the region of the roller nip, between the feeding and retarding rollers 30, 32 is accomplished by deactivating the air actuators 57, pivoting the L-shaped supports 55 clockwise about the axis 56. This may be done to open up the working area of the compressive shrinking station, to facilitate initial threading of a length of fabric into the machine.

Significantly to the invention, the zone-forming blade 46 does not taper gradually to a fine point, as is the case in the existing mechanical compressive shrinkage equipment of the type described in the before mentioned Eugene Cohn et al. patents. Rather, the zone-forming blade has a substantial thickness at its lower extremity. In a typical machine, for the processing of a wide range of tubular knitted fabrics in widths of up to fifty inches, the blade thickness at its extremity may be approximately 0.12 inch. Also significantly, the bottom surface 66 of the zone-forming blade extends downward and away from the surface of the

feed roller 32 at a relatively abrupt angle, in the illustrated apparatus at a nominal angle of about 45 degrees. This angled surface 66 forms one side of a confinement zone, as will be more fully described.

5 The zone-forming blade 46 typically is secured to the body 45 of the entry shoe by means of a plurality of bolts 67, spaced across the width of the blade (see Figs. 5 and 6). The shoe body 45 itself may comprise a plurality of shoe segments, individually adjustable with respect to a
10 mounting beam 68, to enable precision final adjustment of the zone-forming blade 46.

Mounted directly below the entry shoe 44 is an exit shoe assembly 69 comprising a shoe body 70 and a zone-forming blade 71. The blade 71, as the blade 46, is formed
15 with front and back arcuate surfaces 72, 73 confronting surface portions of the respective feeding and retarding rollers 30, 32. At least the back arcuate surface 73 approximately conforms to the surface contours of the retarding roller ³²~~73~~ over an arc of, say, 15-20 degrees, so
20 as to form a gradually divergent exit path 89 for fabric being conveyed by the retarding roller. For example, the surface 73 may have a radius of about ^{2.5 inches}~~2.50~~, for cooperation with a retarding roller 32 having an outside diameter of approximately ^{4.92 inches}~~2.46~~, with the center of radius of the
25 surface 73 being located slightly to the left of the roll axis, as viewed in Fig. 2, to provide for the slightly



divergent contours of the exit path, which are somewhat exaggerated in Fig. 2.

As is evident in Figs. 2 and 6, the configuration of the upper end of the zone-forming blade 71 is complementary to the lower configuration of the upper blade 46. The thickness of the blade extremity 74 is substantially identical (i.e. approximately 0.12 inch in the example), and the upper zone-forming surface 75 is disposed at the same angle as the surface 66.

10 In the illustrated machine, adapted particularly for retrofit installation, precision mounting of the retarding shoe assembly 69 is provided by means of a large, heavy angle member 76, which is rigidly secured at each end to mounting brackets 77. The angle members may be provided
15 with welded caps 78 at each end, which are secured to the brackets 77 by bolts 78a. The body portion 70 of the retarding shoe is rigidly welded to the upper leg 79 of the angle member, as shown in Fig. 6, and is provided with a recess 80 for the reception of the zone-forming blade 71.
20 Precision adjustment of the blade is achieved by providing a large plurality of mounting bolts 81, received in vertically elongated slots 82 in the blade member. A plurality of adjusting bolts 83 extend upwardly through the shoe body 70 to engage the bottom surface of the blade 71. In a
25 typical fifty inch machine, the tightening bolts 81 may be spaced apart approximately 2.6 inches, for example, while the vertical adjustment bolts 83 may be spaced about 5.2

inches apart, one for each pair of tightening bolts. This arrangement enables a high degree of precision to be achieved in alignment of the lower zone-forming blade 71 with respect to the upper zone-forming blade 46, for
 5 precision definition of the treating zone, defined by the respective upper and lower blade surfaces 66, 75.

In the illustrated apparatus, the angle bar assembly is pivoted on the machine frame 27 by a shaft 84 carried by the machine frame by means of a mounting block 85 at each
 10 side, which is an integral part of bearing support 28. This is a convenient mounting, as the shaft 84 and block 85 are already provided on the existing installed base of commercial machines and can be used conveniently for retrofit of such machines to incorporate the improvements
 15 of the present invention.

The location of the pivot shaft 84, with respect to the distributed weight of the angle member 76 and mounting brackets 77 is such that the assembly tends to pivot by gravity in a clockwise direction, as viewed in Fig. 6,
 20 tending to pivot the lower zone-forming blade 71 toward the feeding ^{roller} ~~shoe~~ 30. This movement is adjustably limited to maintain a predetermined minimum spacing between the front arcuate surface 72 of the blade and the surface of the feeding roller 30. Such adjustment may be provided by the
 25 use of shims (not shown) at the end extremities of the feed roller to limit closing movement of the blade 71, or by means such as adjusting bolts 86 engageable with the



mounting brackets 77, as shown in Fig. 6. Desirably, pivoting movement of the blade mounting in the opposite or counterclockwise direction may be unrestricted within limits to facilitate clearing the machine. For this
5 purpose, the outer ends of the bracket 77 may be provided with elongated slots 87 in which are received limiting pins 87a. Pivoting action of the bracket 77 is free within the limits of the elongated slot 87, subject to the positioning of the adjusting bolts 86 and/or limiting shims, and also,
10 of course, limited by the presence of the retarding roller 32.

For the initial setup of the equipment, the zone-forming blades 46, 71 are positioned such that their angular surface extremities 66, 75 are located substantially at the
15 point of maximum convergence of the rollers, i.e. substantially on a plane including both roller axes. The acutely angled tip 88 of the lower blade 71 is spaced very close to, but not in contact with the outer surface of the feeding roller 30. By adjustment of the vertical rods 53,
20 the upper blade 46 is positioned with respect to the lower blade such that the zone-forming surfaces 66, 75 are spaced slightly apart and may be slightly divergent. The arcuate surface 48 of the upper blade 46 is spaced slightly from the surface of the feeding roller, and this may be assured
25 by the provision of shims or spacing rings at the end extremities of the feeding roller, or by other limit adjustments, as will be appreciated. The upper fluid

actuators 57 are charged with air under limited pressure typically in the range of slightly above zero up to above five psi, acting on pistons of about twenty square inches. The closing force available from the actuators 57, in an example fifty inch machine, is thus desirably about 200 pounds or less, which results in an applied force of a few pounds per lineal inch.

Unprocessed fabric 11, in flat form and at uniform width, enters the confined passage 49 and is advanced therethrough under very limited confining pressure, by reason of the roughened surface of the feeding roller. The fabric, either in two-layer form in the case of tubular knitted fabric, or in a single layer in the case of other fabrics, is advanced through the passage 49 at the surface speed of the feed roller 30.

Upon reaching the lower extremity of the arcuate surface 48, the fabric is abruptly diverted by the blade surface 75 into a confinement zone formed between the surfaces 66, 75, which may be divergently related by a small amount (e.g., less than one degree).

Fabric traverses the confinement zone, which in the illustrated apparatus may have a length of about 0.17 inch, until it engages the outer surface of the retarding roller 32. Thereupon it is abruptly diverted into the confined passage 89 formed between the arcuate confining surface 73 of the exit shoe assembly and the outer surface of the retarding roller. When the fabric enters the upper extrem-

ity of the confined retarding passage 89, it immediately assumes the surface speed of the retarding roller 32, which is controlled, by the variable speed mechanism 39, to be variably slower than the surface speed of the feeding
5 roller 30, perhaps by as much as 15-25% in the case of some fabrics, less perhaps with others, according to the requirements of a particular fabric construction. Under steady state conditions, the change in speed of the fabric, from the feeding speed ~~of~~^{to} the retarding speed, occurs
10 principally at the entrance of the confinement zone defined by the surfaces 66, 75. Immediately thereafter, the fabric has a predetermined dwell time in the confinement zone, during which it is exposed to heat and confinement.

In the process of the invention, it is desired to
15 operate with a minimum confining pressure in the thickness direction in the confinement zone. However, a complete absence of confining pressure and/or too little confining pressure can cause fabric to take on a "creped" appearance, rather than a smooth but compressively shrunk condition.
20 Initially, therefore, the thickness of the confinement zone is adjusted (by the handwheel 54 and rods 53) to be slightly greater than optimum, to induce some degree of creping, and the condition of the processed fabric is observed. As long as any creping is observed, the thickness of the
25 confinement zone is gradually decreased by manipulation of the handwheel until the creping just disappears.



In the illustrated apparatus, the surface of the retarding roll is formed with a layer 91 of elastomeric material, which typically may be about one quarter inch thick. It may, however, be formed of metal with a rough-
5 ened surface. The retarding roll is drawn toward the confining surface 73 with a limited amount of pressure, exerted by the fluid actuators 37, under controlled pressure via a variable pressure regulator 92. The net applied force need be sufficient only to establish effective
10 frictional contact with the fabric discharged from the confinement zone so as to achieve positive gripping action on the fabric. Experience indicates that minimal contact pressures are required for this purpose, as in the case of the contact pressures necessary with respect to the feeding
15 shoe assembly with respect to the feeding roller. If necessary or desirable, adjustable limit stops (not shown) may be provided to limit the closing movement of the retarding roller toward the confining surface 73 of the lower blade. In a normal operating configuration, the
20 feeding and retarding rolls are separated by a distance just slightly greater than the thickness of the zone-forming blades 46, 71, as is evident in Fig. 2.

In the processing of most fabrics, the incoming fabric is relatively warm and moist from the application of steam
25 at the steam boxes 20, 21. In addition, means advantageously are provided for heating of at least the feeding roller 30 and the feeding shoe assembly 44. In accordance

with features of the existing, prior equipment, the entry shoe assembly 44 may advantageously be heated by means of an electric heater associated with the shoe body 45. The feeding roller 30 is heated internally by means of steam or
5 heated oil, for example. Desirably, provisions are made for controlling the heating media to provide for different temperatures between the feeding roller 30 and the feeding shoe assembly 44.

Remarkable and surprising results have been achieved
10 with the method and apparatus of the invention. Among other things, fabrics that heretofore were compressively treated in two stations can now be treated in a single station, and even more effectively than heretofore. In this respect, while there exist in the prior art types of
15 equipment that process tubular knitted fabric in a single station, most such machines and processes known to the applicant are very limited in their capacity to impart preshrinkage control. The method and apparatus of the heretofore known Eugene Cohn et al. patents have been
20 outstandingly unique in their ability to impart high degrees of compressive shrinkage, i.e., 25% and above. In such cases, however, it has been appropriate to utilize two station machines in an effort to equalize opposite side surface appearance, and even then, there have been limita-
25 tions with respect to certain types of sensitive fabrics. With the present method and apparatus, by contrast, it is possible to impart 25% and more compressive shrinkage in a

single station machine, with a highly acceptable level of opposite side surface appearance. This represents a remarkable advance over procedures now available to the industry.

5 A very significant aspect of the invention, of course, is the fact that an angular confinement zone separates the respective feeding and retarding rollers by a short distance significantly greater than the thickness of the fabric. As a result, the feeding and retarding rolls do
10 not simultaneously contact the fabric at the same point on opposite sides with surfaces travelling at different speeds. Nor is the fabric subjected to wrenching reversals of direction during the compressive shrinkage procedure. The fabric is advanced through the feeding zone with a
15 minimum of confining pressure and abrasion, passes through the confining zone with virtually symmetrical conditions on its opposite surfaces, and is engaged thereafter in a retarding zone in which there is effectively no slippage of the fabric even though it is confined by minimum pressures.

20 The lack of slippage of the fabric against the feeding and retarding rollers in the procedure of the invention is evidenced by the fact that the retained compressive shrinkage bears a direct and close relationship to the speed differential between the respective rollers. In other
25 words; a roller speed differential of 25% results in processed fabric having an imparted compressive shrinkage of 25% in normal operations.

Another surprising and highly beneficial result of the new method and apparatus is derived from the fact that the finished, compressively shrunk fabric typically is of the same thickness after treatment as before. On a conventional two station compactor, the treated fabric may be 15% to 25% thinner in some cases, because of the necessity to compress the fabric substantially in the thickness direction during processing. With the procedure and apparatus of the present invention, the fabric is treated very gently throughout, as evidenced by the greater finished thickness. This enables significantly superior results to be derived in the treatment of sensitive fabrics, for example.

The method and apparatus of the invention are uniquely well suited for processing of tubular knitted fabrics in a single station machine, because there is a minimum of differential action between opposite surfaces of the fabric being processed in two-layer form. There is thus an absolute minimum of opportunity for two-sidedness to occur in the fabric. Although it is of course necessary in the apparatus of the invention for fabric to slide along the confining surfaces of the feeding and retarding shoes, it is possible with the apparatus of the present invention to maintain contact pressures at extremely low levels, so that even sensitive fabrics are processed delicately and with minimum degradation of the finished appearance sought by the customer.

An included benefit of being able to process fabric in a single station and using low contact pressures is significantly lower power requirements. The floor-space occupied by the equipment is also significantly reduced by elimination of need for a second stage of compressive shrinkage.

In the specifically illustrated apparatus, the compressive treatment zone is disposed at an angle of 45 degrees to the adjacent roller surfaces. The maximum and minimum limits of such angle have not been fully determined, although it is believed are the basis of investigations that the angle should not be less than about 30 degrees nor more than about 60 degrees with respect to the adjacent surface of the feed roller.

The method and apparatus of the invention are of course applicable to fabrics other than tubular knitted fabrics, and would be applicable to open width knitted fabrics, for example, various compressible gauze materials and the like. The method and apparatus of the invention are also suitable for so-called "wet compacting", where fabric is dyed or otherwise treated with a processing liquid, extracted to a level of 75%-80% moisture, for example, and then subjected to compressive shrinkage treatment. With some prior art apparatus, this has been difficult because the relatively high pressures required to be applied to the fabric resulted in unwanted extraction of liquids at the compressive shrinkage treatment station. With the process and apparatus of the present invention,

the unusually low contact pressures required to carry out the process greatly minimize or eliminate altogether unwanted extraction of treating liquid during the compressive treatment phase.

5 It should be understood, of course, that the specific forms of the invention herein illustrated and described are intended to be representative only, as certain changes may be made therein without departing from the clear teachings of the disclosure. Accordingly, reference should be made
10 to the following appended claims in determining the full scope of the invention.

The claims defining the invention are as follows:

1 1. Compressive pre-shrinking apparatus for knitted
2 fabrics and the like comprising (a) a fabric feeding
3 roller, (b) an entry-side fabric confining shoe generally
4 conforming to a surface portion of said feeding roller and
5 defining therewith a confined entry path for the controlled
6 advancement of fabric by said feeding roller, (c) means for
7 adjustably relatively positioning said entry-side confining
8 shoe and fabric feeding roller to bear with limited
9 controlled pressure upon fabric confined in said entry
10 path, (d) a fabric retarding roller mounted for rotation
11 closely adjacent and parallel to said feeding roller, (e)
12 the axes of said feeding and retarding rollers defining a
13 reference plane passing through the region at which said
14 feeding and retarding rollers most closely approach each
15 other, (f) an exit-side confining shoe conforming to a
16 surface portion of said retarding roller and defining
17 therewith an exit path for the controlled discharge of
18 fabric by said retarding roller, (g) means for adjustably
19 relatively positioning said exit-side confining shoe and
20 said retarding roller to bear with limited controlled
21 pressure upon fabric confined in said exit path, (h) said
22 confining shoes having blade-like extensions projecting
23 between said rollers and meeting in the general region of
24 the plane containing the axes of said rollers, and (i)
25 means comprising confronting surfaces of said blade-like
26 extensions forming a confinement zone for the confined and

27 controlled passage of said fabric during its transit from
28 said entry path to said exit path.

1 2. Compressive pre-shrinking apparatus according to Claim
2 1, further characterized by (a) said compressive shrinkage
3 zone being disposed at an angle of about 45 degrees to the
4 surface of said feeding roller.

1 3. Compressive pre-shrinking apparatus according to Claim
2 2, further characterized by (a) one of said confining shoes
3 being mounted for limited pivoting movement about the axis
4 of its cooperating roller whereby the thickness of said
5 confinement zone may be controllably increased or
6 decreased.

1 4. Compressive pre-shrinking apparatus according to Claim
2 1, further characterized by (a) said means for adjustably
3 relatively positioning said confining shoes and said
4 rollers comprising fluid actuator means and adjustable
5 pressure regulating means therefor.

1 5. Compressive pre-shrinking apparatus according to Claim
2 1, further characterized by (a) adjustable positioning
3 means for controllably moving said blade-like extensions
4 relatively toward or away from each other, whereby the
5 thickness of said confinement zone is maintained at a
6 thickness to avoid crimping of said fabric during passage
7 thereof through said zone.

1 6. Compressive pre-shrinking apparatus according to Claim
2 1, further characterized by (a) separate means being
3 provided for heating said feeding roller and said
4 entry-side confining shoe.

1 7. Compressive pre-shrinking apparatus according to Claim
2 1, further characterized by (a) said feeding roller being
3 of metal construction and having a roughened outer surface
4 for effectively positive gripping of said fabric.

1 8. Compressive pre-shrinking apparatus according to Claim
2 7, further characterized by (a) said retarding roller
3 having a resilient outer surface.

1 9. The process of imparting lengthwise compressive
2 shrinkage to tubular knitted fabrics and the like using the
3 apparatus of Claim 1, which comprises (a) delivering the
4 fabric in flat form and in moist condition, (b) advancing
5 said fabric in a controlled manner by contacting one
6 surface of said fabric with a controllably driven feeding
7 roller surface while closely confining the opposite surface
8 of said fabric, under limited controlled pressure, (c)
9 abruptly discontinuing the confining of said fabric and
10 diverting said fabric away from said roller surface at a
11 sharp angle, (d) guiding and confining said fabric through
12 a confinement zone of greater length than the thickness of
13 the fabric, (e) immediately thereafter engaging and


14 supporting the opposite surface of said fabric by the
15 surface of a controllably driven retarding roller moving at
16 a surface speed slower than that of the feeding roller, (f)
17 the surface of said retarding roller at the point of
18 initial contact with said fabric being disposed at a large
19 angle with respect to the fabric confined in said
20 confinement zone, (g) confining said fabric against the
21 surface of said retarding roller under limited controlled
22 pressure, and (h) maintaining sufficient controlled
23 confining pressure upon the opposite surfaces of said
24 fabric in said confinement zone to avoid crimping of said
25 fabric in said zone.

1 10. The process of Claim 9, further characterized by (a)
2 imparting heat to said fabric during said advancing
3 operation, and (b) said heating being imparted controllably
4 and from opposite sides of the fabric.

1 11. The process of Claim 9, further characterized by (a)
2 said fabric being guided through said confinement zone at
3 an angle of about 45 degrees to the adjacent surface of the
4 feeding roller and for a distance of about 0.17 inch.

1 12. The process of Claim 11, further characterized by (a)
2 said fabric comprising a tubular knitted fabric, and (b)
3 said tubular knitted fabric being delivered by being
4 laterally distended to predetermined uniform width and,
5 while held at such width, steamed.

DATED: 12th October, 1988
PHILLIPS ORMONDE & FITZPATRICK
Attorneys for:
COMPAX CORP.



23 740 88

FIG. I.

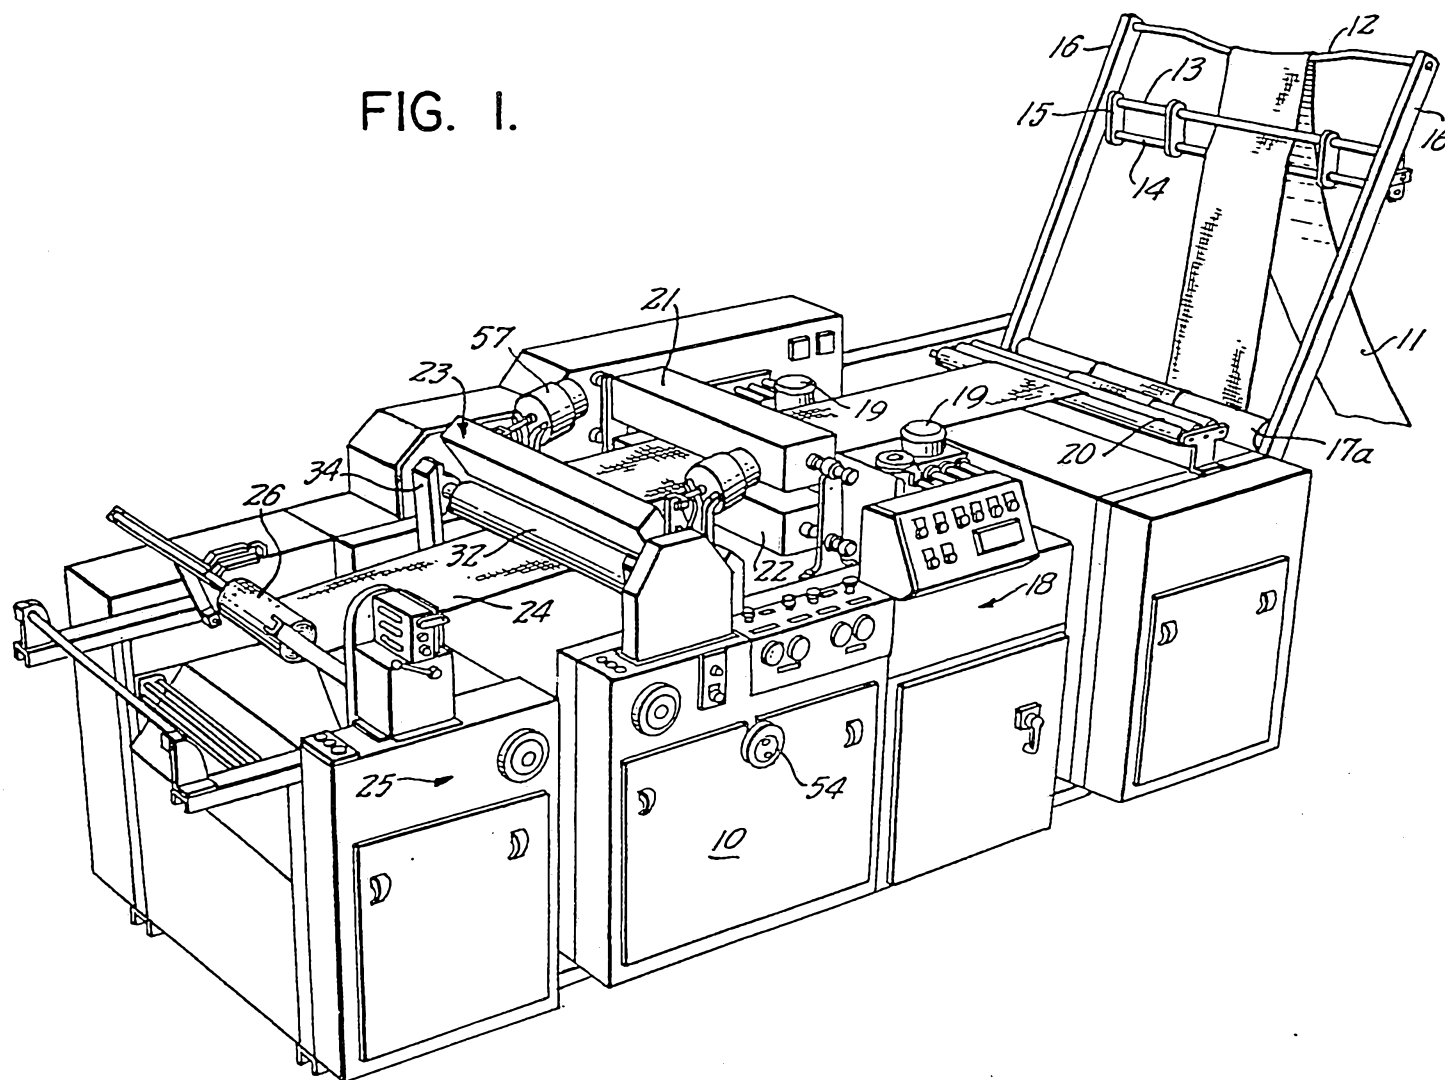


FIG. 2.

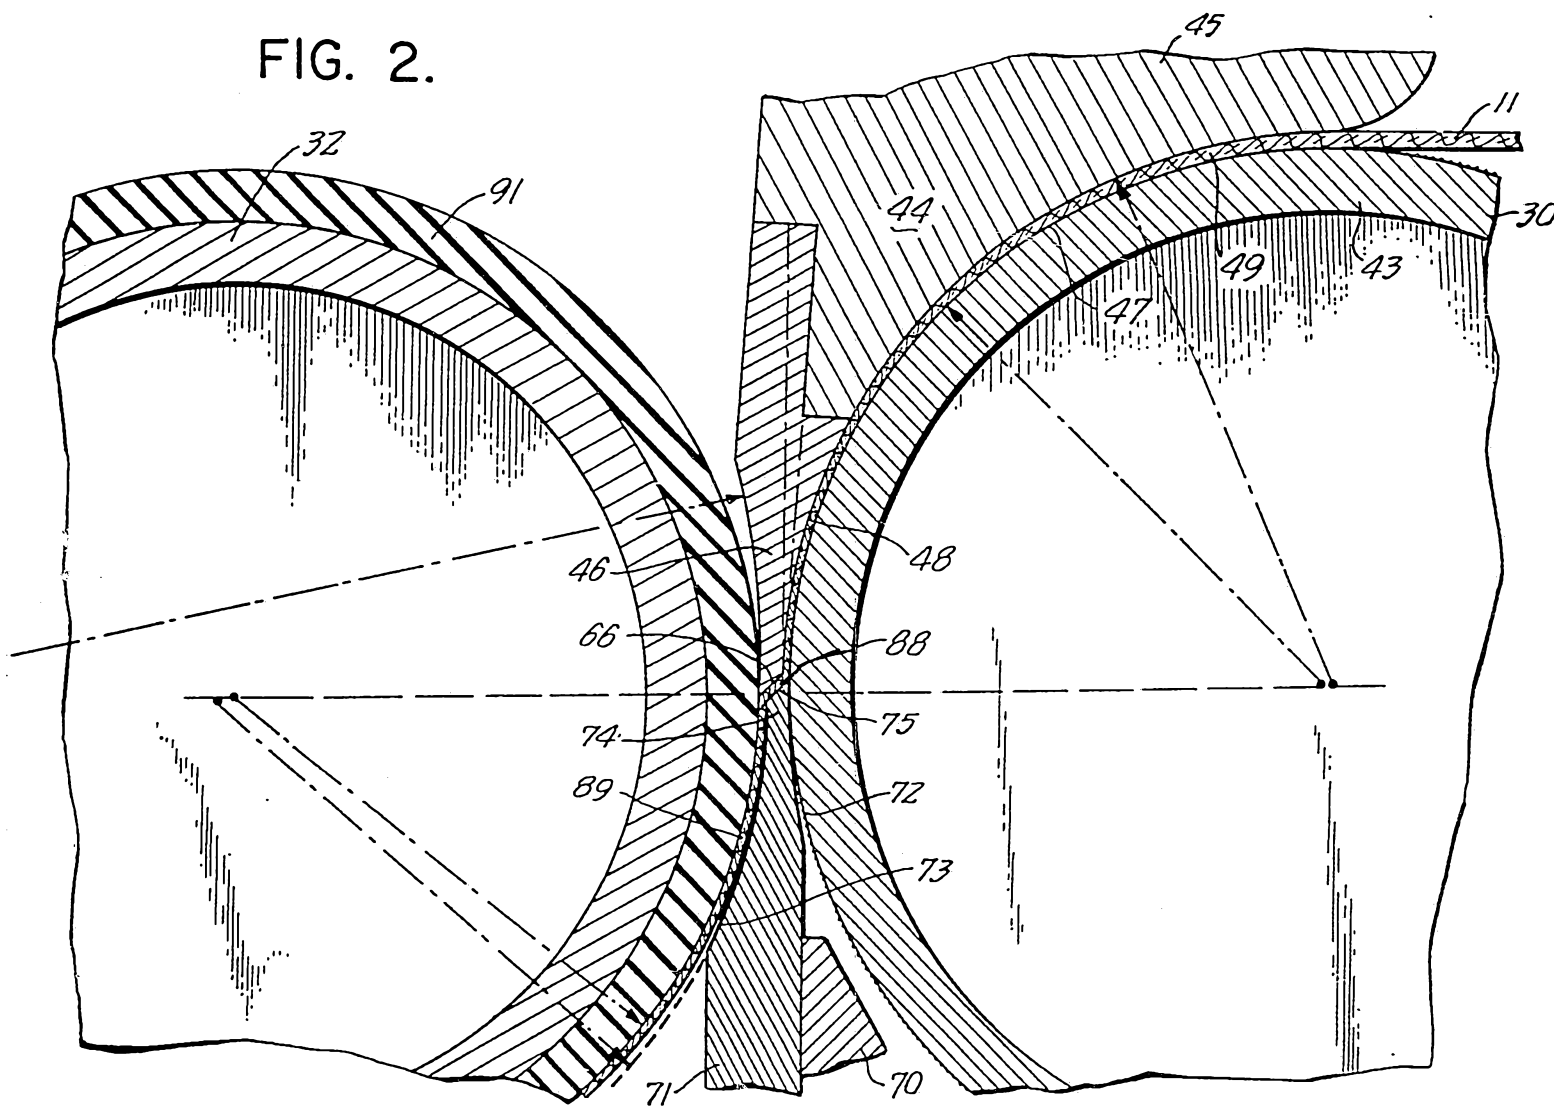


FIG. 3.

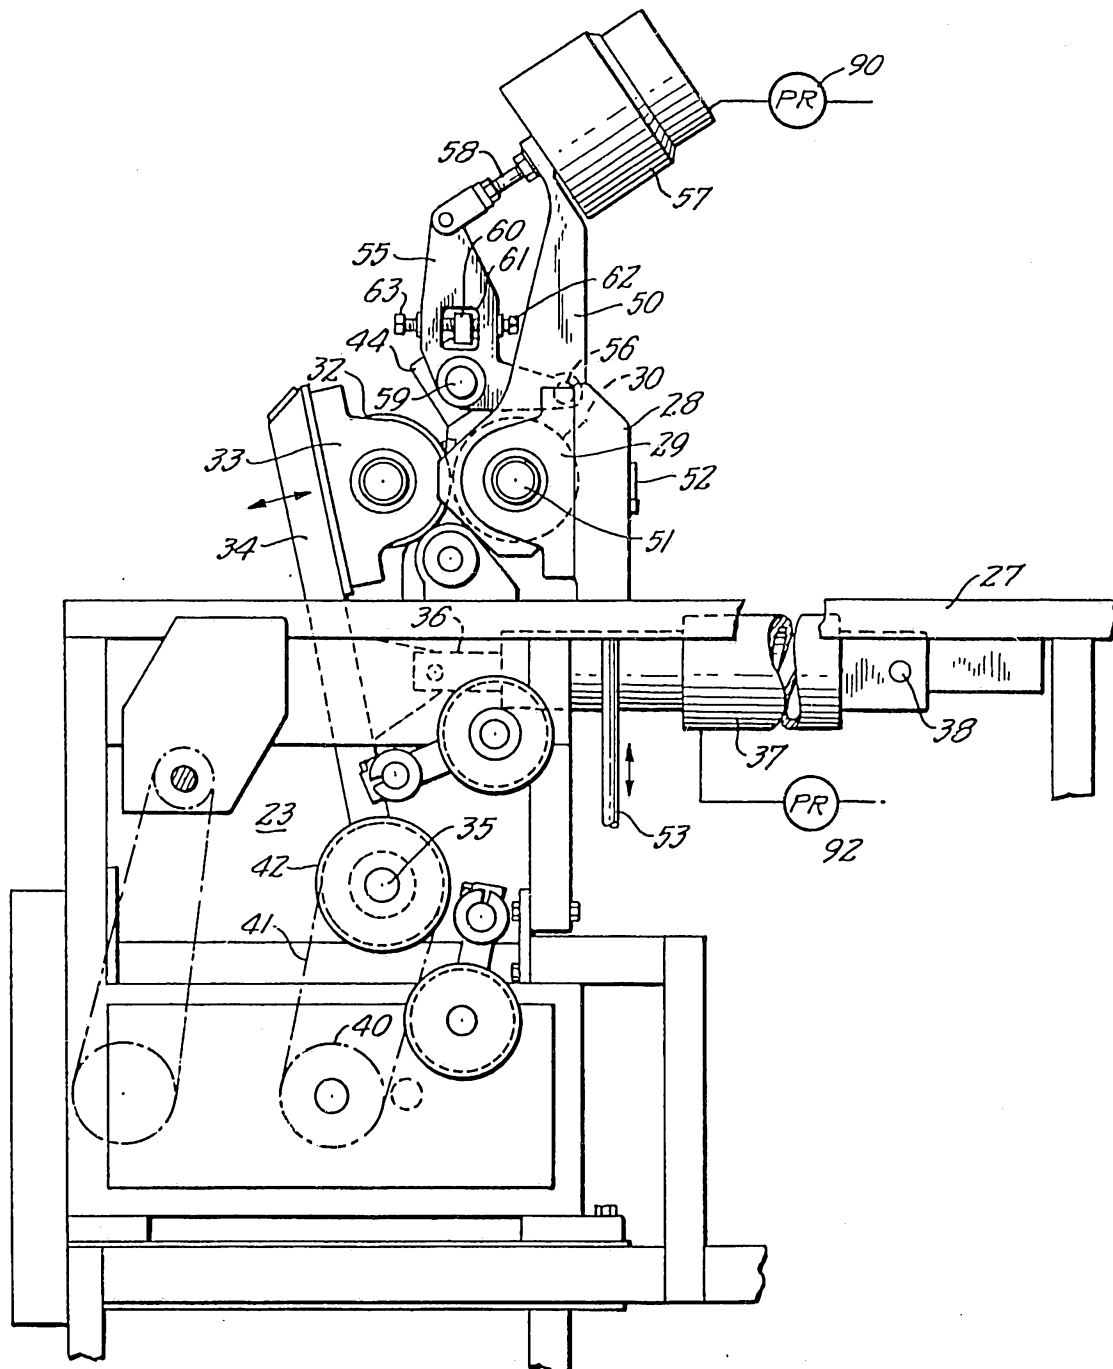


FIG. 5.

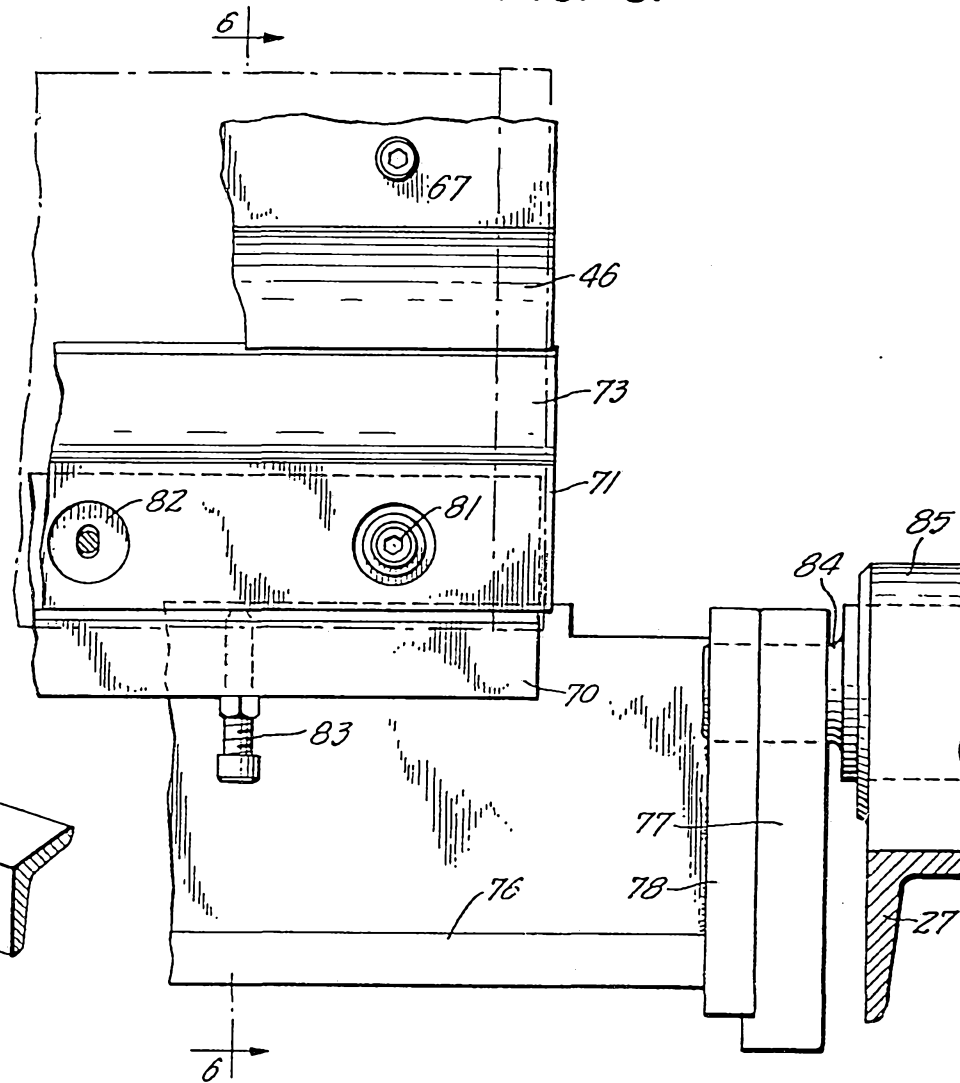
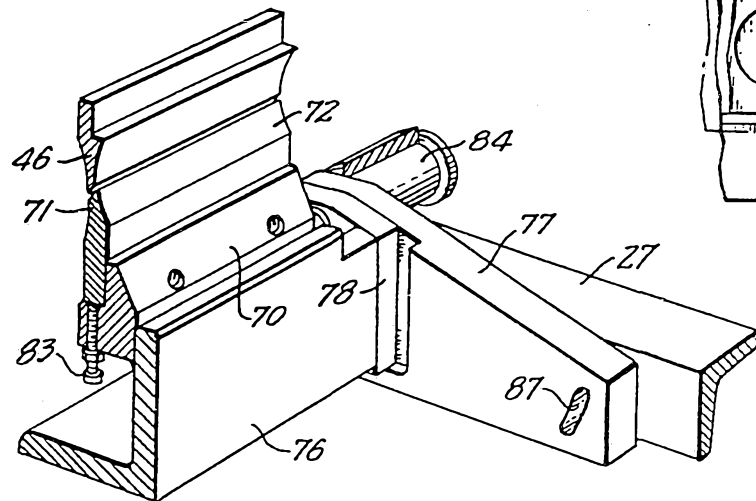


FIG. 4.



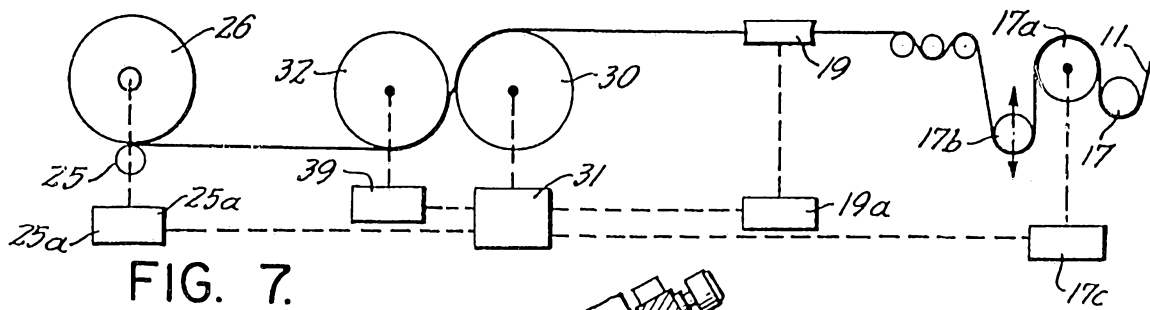


FIG. 7.

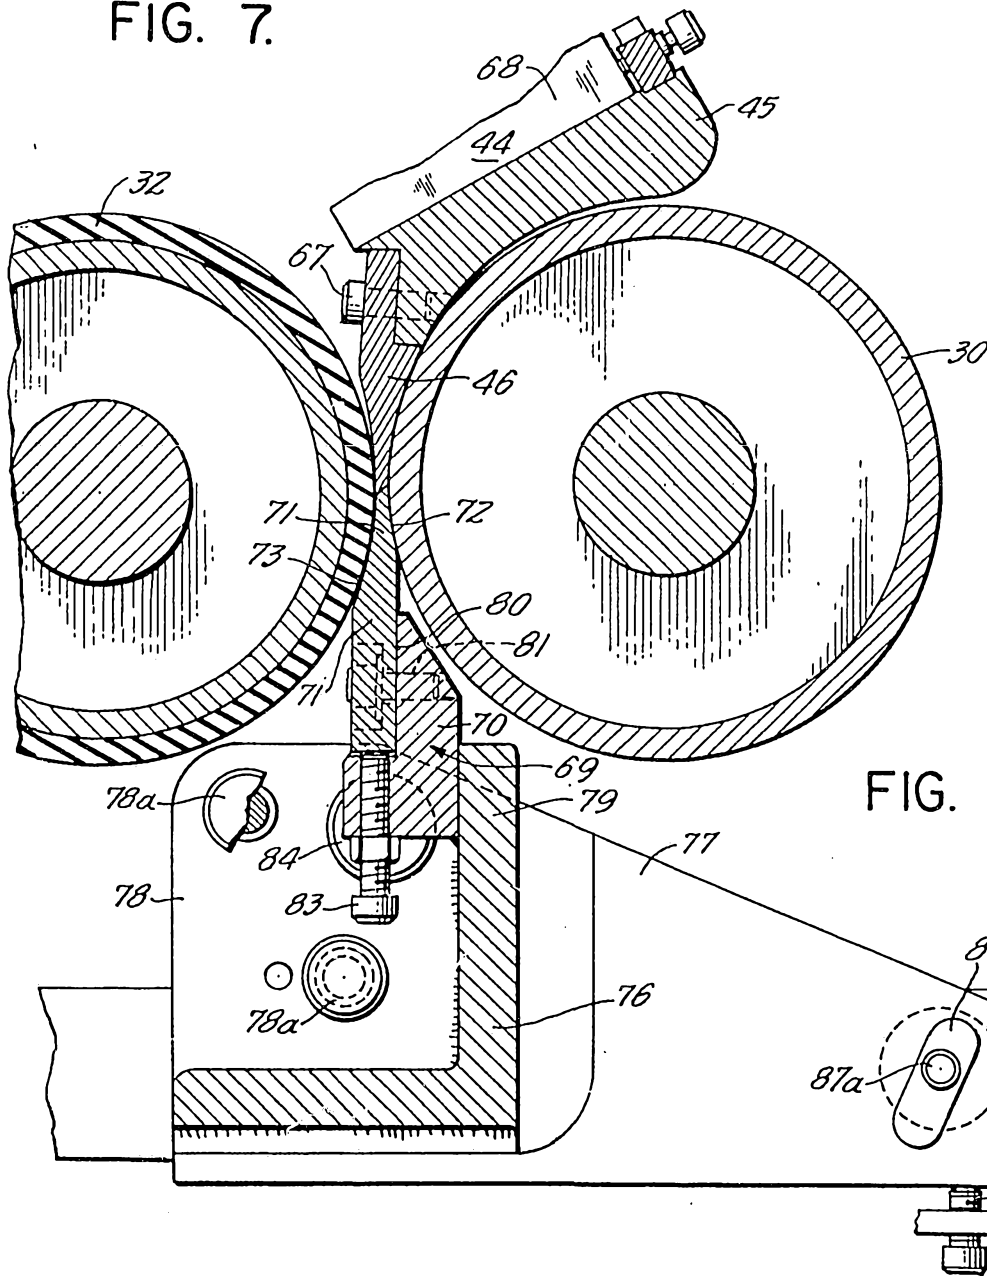


FIG. 6.