

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
2 April 2009 (02.04.2009)

PCT

(10) International Publication Number
WO 2009/041880 A1

- (51) International Patent Classification:
H04W 68/02 (2009.01) *H04W 52/02* (2009.01)
- (21) International Application Number:
PCT/SE2008/050541
- (22) International Filing Date: 12 May 2008 (12.05.2008)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/975,533 27 September 2007 (27.09.2007) US
- (63) Related by continuation (CON) or continuation-in-part (CIP) to earlier application:
US 60/975,533 (CON)
Filed on 27 September 2007 (27.09.2007)
- (71) Applicant (for all designated States except US): TELEFONAKTIEBOLAGET L M ERICSSON (PUBL)
[SE/SE]; S-164 83 Stockholm (SE).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): MÜLLER, Walter

[SE/SE]; Huginvägen 7, S-194 62 Upplands Väsby (SE).
MILDH, Gunnar [SE/SE]; Turebergs Allé 7, S-191 62 Sollentuna (SE). **DAHLMAN, Erik** [SE/SE]; Tackjärnsvägen 12, S-168 68 Bromma (SE). **VUKAJLOVIC, Vera** [SE/SE]; Frejgatan 45, S-113 49 Stockholm (SE).

(74) Agent: **HASSELGREN, Joakim**; Ericsson AB, Patent Unit LTE, S-164 80 Stockholm (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

[Continued on next page]

(54) Title: PAGING IN A RADIO ACCESS NETWORK, SUCH AS AN E-UTRAN

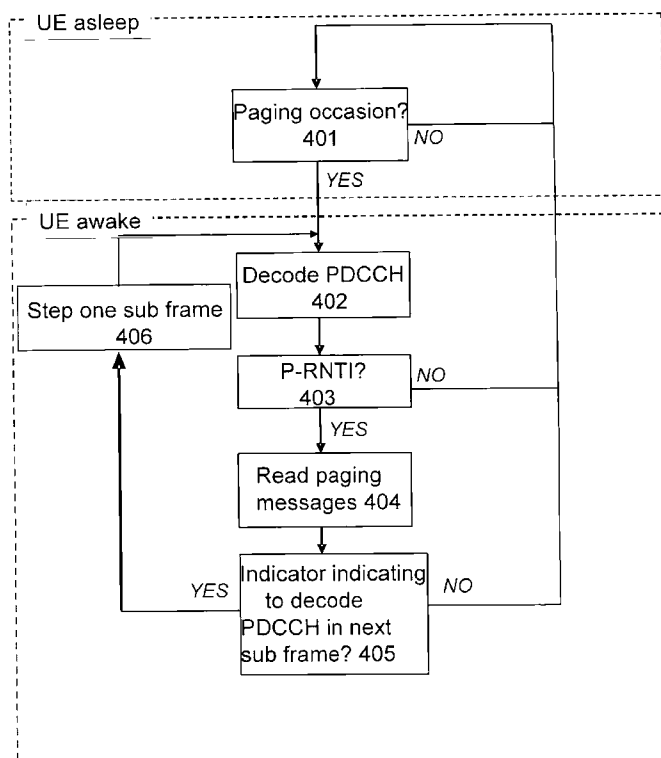


Fig. 4

(57) Abstract: The present invention relates to methods and arrangements of a network node and a UE of a radio access network supporting discontinuous reception, offering a solution that is based on the idea to use more than one sub frame for transmitting paging messages when needed. An indicator in a sub frame with paging messages indicates to the receiving UE if the subsequent sub frame should be read as well.



ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL,
NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG,
CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report*

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Paging in a radio access network, such as an E-UTRAN

TECHNICAL FIELD

5 The present invention relates to methods and arrangements in a wireless communication system, in particular to methods and arrangements for paging user equipments applying discontinuous reception (DRX).

BACKGROUND

10 The Universal Mobile Telecommunication System (UMTS) is one of the third generation mobile communication technologies designed to succeed GSM. 3GPP Long Term Evolution (LTE) is a project within the 3rd Generation Partnership Project (3GPP) to improve the UMTS standard to cope with future
15 requirements in terms of improved services such as higher data rates, improved efficiency, lowered costs etc. UMTS Terrestrial Radio Access Network (UTRAN) is the radio network of a UMTS system and evolved UTRAN (E-UTRAN) is the radio network of a LTE system. The radio base station in E-
20 UTRAN is called evolved NodeB (eNB).

An E-UTRAN typically comprises user equipments (UE) 150 wirelessly connected to radio base stations 130a-c as illustrated in figure 1. The radio base stations 130a-c are directly connected to the core network (CN) 100. In
25 addition, the radio base stations are also connected to each other. In contrast, in an UTRAN the radio base stations are connected to the CN via a Radio Network Controller (RNC), wherein each RNC controls the connected radio base stations.

Discontinuous reception (DRX) is a method used in wireless communication systems, e.g. LTE, to enable a reduced power consumption of the UE. In idle mode e.g., the UE and the network are coordinated in terms of having the same information about how and in what phases the data transfer happens. This means that during the other phases (when no data transfer happens) the UE receiver functionality can be switched off and can thus enter a low power state, hereinafter called sleep mode. Figure 2 illustrates that the UE receiver only wakes up during short regularly occurring periods (once in each DRX cycle 202) known as paging occasions 201 to receive a sub frame. During these paging occasions the UE checks for paging messages in the sub frame.

Figure 3 illustrates the basic downlink sub frame structure as defined in E-UTRAN. Each sub frame 300 of length 1 ms consists of two parts: A control part 301 during which Physical Downlink Control Channels (PDCCH) are transmitted, and a data part 302 during which Downlink Shared Channel (DL-SCH) are transmitted. Each PDCCH typically carries control information to a single UE when it is in active mode. This control information informs the UE how to receive and decode corresponding information on the Downlink Shared Channel (DL-SCH). What UE the PDCCH is directed to is indicated by a Radio Network Temporary Identifier (RNTI) included in the PDCCH.

The sub frame structure with its control and data fields is also assumed to be used for paging, but one difference is that a sub frame comprising paging messages can be directed to more than one UE. The time between paging occasions, i.e. the sleep-mode or DRX cycle, typically spans a large number of sub frames, e.g. 320 sub frames or a multiple of 320 sub frames. When a UE wakes up, it first receives and decodes the control part of the sub frame. If one of the PDCCHs in

the control part includes an identifier indicating that the data part of the sub frame includes one or multiple paging messages, the UE proceeds to receive and decode the DL-SCH in the data part to find out if one of the paging messages was directed to this specific UE. The identifier in the control part can be described as a specific RNTI, which can be referred to as a Paging RNTI (P-RNTI). The P-RNTI is thus just an indication to all UEs addressed at that paging occasion that there are paging messages to read, but it does not say anything about to which UEs the paging messages are directed. If the UE determines that no paging message in the data part was directed to it, it can return to sleep mode again. If no P-RNTI is present in the control part of the sub frame, the UE can return to sleep mode immediately after decoding the control part, i.e. the UE does not need to read the data part of the sub frame.

Paging is capacity demanding for the system, as paging messages need to reach all UEs in a cell. The transmission of paging messages cannot be adapted for a specific UE as it is addressed to all UEs that listen for paging at the same paging occasion, and in the worst of cases UEs can be close to the cell border and thus far away from the radio base station (e.g. the eNB in E-UTRAN). To be sure to reach all UEs the transmit power needs to be set to a maximum (the level needed to reach UEs at the cell border), which means a low data rate and affects the number of paging messages that can be carried by one sub frame. The bigger the cell is, the more capacity demanding is the paging and the less amount of UEs can be paged in one sub frame.

If several UEs wake up from there sleep mode at the same time, i.e. if their paging occasions coincide, there might be a need to transmit multiple paging messages to the different UEs in the same sub frame. However, especially in

case of narrowband transmissions with limited data rates on the Downlink Shared Channel (DL-SCH), it may not be possible to include all these paging messages within the data part of a single sub frame. This situation is hereafter referred to
5 as overflow. An overflow situation is handled by waiting for the next paging occasion to transmit the rest of the paging messages. Overflow thus implies a delay in the paging.

To minimize the delay for paging, a network operator can adapt the DRX cycle. With a shorter DRX cycle the delay at
10 overflow will be shorter, as the time to the next paging occasion is shorter. Another aspect is that a shorter DRX cycle will give more paging occasions per time unit which leads to fewer paging messages per paging occasion and thus a lower risk for overflow. The disadvantage of shorter DRX
15 cycles is an increased UE power consumption as the UE has to wake up for paging more often.

SUMMARY

The object of the present invention is to achieve methods and arrangements that obviate at least some of the above
20 disadvantages and improve the paging performance without significantly affecting the UE power consumption.

This is achieved by a solution that is based on the idea to use more than one sub frame for transmitting the paging messages. An indicator in a sub frame with paging messages
25 indicates to the receiving UE if the subsequent sub frame should be read as well.

Thus in accordance with a first aspect of the present invention, a method for paging for a radio access network providing communication services to at least one user
30 equipment is provided. The network and the user equipment

support discontinuous reception, and a sub frame used for paging messages comprises a control part and a data part. The method comprises the steps of transmitting paging messages in the data part of a first sub frame, and when the
5 data rate of the first sub frame is not high enough for transmitting all the paging messages, a further paging message is transmitted in the data part of a sub frame subsequent to the first sub frame. The method further comprises the step of indicating by an indicator in the
10 first sub frame if the control part of the sub frame subsequent to the first sub frame should be decoded or not.

In accordance with a second aspect of the present invention, a method for paging for a UE of a radio access network is provided. The user equipment and the network support
15 discontinuous reception, and a sub frame used for paging messages comprises a control part and a data part. The method comprises the steps of receiving a first sub frame comprising paging messages in the data part and an indicator indicating if the control part of a sub frame subsequent to
20 the first sub frame should be decoded or not, and decoding the indicator. The method further comprises the step of receiving and decoding the control part of the sub frame subsequent to the first sub frame if the indicator indicates so. On the other hand if the indicator indicates that the
25 control part of the sub frame subsequent to the first sub frame should not be decoded, then the UE goes to sleep mode.

In accordance with a third aspect of the present invention, a network node of a radio access network, such as an eNB, providing communication services to at least one user
30 equipment is provided. The network and the user equipment support discontinuous reception, and a sub frame used for paging messages comprises a control part and a data part. The network node comprises means for transmitting paging

messages in the data part of a first sub frame. It also comprises means for transmitting a further paging message in the data part of a sub frame subsequent to the first sub frame, which is done if the data rate of the first sub frame is not high enough for transmitting all the paging messages. The network node further comprises means for indicating by an indicator in the first sub frame if the control part of the sub frame subsequent to the first sub frame should be decoded or not.

10 In accordance with a fourth aspect of the present invention, a UE of a radio access network is provided. The UE and the network support discontinuous reception and a sub frame used for paging consists of a control part and a data part. The UE comprises means for receiving a first sub frame
15 comprising paging messages in the data part and an indicator indicating if the control part of a sub frame subsequent to the first sub frame should be decoded or not, and means for decoding the indicator. It further comprises means for receiving and decoding the control part of the sub frame
20 subsequent to the first sub frame, which is done when the indicator indicates that the control part of the sub frame subsequent to the first sub frame should be decoded. It also comprises means for going to sleep mode, which is done when the indicator indicates that the control part of the sub
25 frame subsequent to the first sub frame should not be decoded.

An advantage of embodiments of the present invention is that they allow for a dynamic extension of the paging capacity and thus eliminates the overflow problem with no, or very
30 little, impact on the UE power consumption.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 illustrates a wireless communication system wherein the present invention may be implemented.

Figure 2 illustrates a "sleep mode" (DRX) cycle with paging occasions for a user equipment according to prior art.

- 5 Figure 3 illustrates the basic downlink sub frame structure in E-UTRAN according to prior art.

Figure 4 is a flowchart illustrating the paging method of a UE in E-UTRAN according to one embodiment of the present invention.

- 10 Figure 5 and 6 are flowcharts illustrating the methods for paging of the present invention.

Figure 7 illustrates schematically the arrangements according to embodiments of the present invention.

DETAILED DESCRIPTION

- 15 In the following, the invention will be described in more detail with reference to certain embodiments and to accompanying drawings. For purposes of explanation and not limitation, specific details are set forth, such as particular architectures, scenarios, techniques, etc., in
20 order to provide a thorough understanding of the present invention. However, it will be apparent to one skilled in the art that the present invention may be practised in other embodiments that depart from these specific details.

- 25 The 3GPP E-UTRAN system is used as an exemplary radio access network where the present invention is applied. However, the

invention can be applied to any radio access network that has similar characteristics e.g. in terms of paging and DRX.

Moreover, those skilled in the art will appreciate that the functions and means explained herein below may be
5 implemented using software functioning in conjunction with a programmed microprocessor or general purpose computer, and/or using an application specific integrated circuit (ASIC). It will also be appreciated that while the current invention is primarily described in the form of methods and
10 devices, the invention may also be embodied in a computer program product as well as a system comprising a computer processor and a memory coupled to the processor, wherein the memory is encoded with one or more programs that may perform the functions disclosed herein.

15 The present invention relates to paging in a radio access network, such as an E-UTRAN as illustrated in figure 1, providing communication services to one or more UEs, where the system and the UEs support DRX. Conventionally, paging messages can only be transmitted during one single sub frame
20 at the paging occasions. Sometimes the data rate of one single sub frame is not enough for sending all the paging messages needed. A so called overflow situation occurs. In a conventional solution such an overflow situation is handled by waiting for the next paging occasion to transmit the rest
25 of the paging messages. This will thus give an delay at overflow of one DRX cycle (one DRX cycle is 320 sub frames or a multiple of 320 sub frames, i.e. 320 ms, 640 ms, 1280 ms, etc.) in the paging of certain UEs. In the present invention the idea is instead to make it possible for the
30 eNB to transmit paging messages during more than one sub frame when this is needed (i.e. in the sub frame of the paging occasion and in subsequent sub frames as well), and to use an indicator to indicate if further paging messages

should be checked for in the subsequent sub frames. This will thus give a much shorter delay at overflow of typically one sub frame only (i.e. 1 ms), and the delay is thus not at all coupled to the length of the DRX cycle.

5 The time period during which a UE is awake for the paging occasion is longer than just the time period needed to receive and decode one sub frame, as the actual powering up and down of the UE takes time and as there are also other measurements done at the same time. This means that the time
10 needed to read a second sub frame subsequent to the first sub frame of a paging occasion is relatively short, in comparison with the total time that the UE is awake for the paging occasion. When also taking into consideration that this only occurs in an overflow situation, the extra power
15 consumption in the UE in the present invention can be considered to be very limited.

Another aspect of the power consumption of the UE in relation to the present invention is that, as the overflow situation is handled in such a way that the delay at
20 overflow does not depend on the DRX cycle, it will be possible for the operator to prolong the DRX cycle without risking to prolong paging delays. A longer DRX cycle will lead to lower UE power consumption for all UEs. An alternative to prolonging the DRX cycle and saving UE power
25 is to keep the same DRX cycle and instead focus on minimising the number of lost pages (defined as paging messages that cannot be decoded by the addressed UE for transmission quality reasons). A short DRX cycle will generally enable a more robust coding of the paging
30 messages, as there will be less paging messages per paging occasion, and this will in turn give less problems with lost pages.

Figure 4 illustrates the paging method in a UE in E-UTRAN according to one embodiment of the invention. A UE in sleep mode (UE asleep) wakes up 401/YES to receive the sub frame corresponding to the paging occasion. In such sub frames the UE first receives and decodes the PDCCHs 402 within the control part of the sub frame. If no decoded PDCCH includes a P-RNTI 403/NO, the UE returns back to the sleep mode. If a decoded PDCCH includes a P-RNTI 403/YES, the user equipment reads 404 the corresponding paging message(s) on the DL-SCH in the data part of the sub frame. The data part of the sub frame is thus only read if there is a P-RNTI in the control part. The steps described above, denoted 401-404, correspond to a conventional paging method, in which the UE goes back to sleep after the step denoted 404 of figure 4. The following steps, denoted 405-406, are the ones added according to embodiments of the present invention, and they start with a check of the indicator. If the decoded PDCCH includes an indicator indicating that the PDCCH of the next sub frame shall not be decoded 405/NO, the UE returns to sleep mode and waits for the next paging occasion. This is thus the case when all paging messages could fit into one single sub frame. If, however, the decoded PDCCH includes an indicator indicating that the PDCCH of the control part of the next sub frame shall be decoded 405/YES, the user equipment steps one sub frame 406 and reads the PDCCH of the next sub frame 401. This is thus the case of an overflow situation, when an extension of the paging capacity is needed. The loop visualised in figure 4 can then continue until the paging messages have all been transmitted. As a last step, the decoded PDCCH will include an indicator indicating that the PDCCH of the next sub frame shall not be decoded, and the UE can go to sleep mode.

More specifically and with reference to figure 5, the present invention relates to a method for paging for a radio access network supporting discontinuous reception, using sub

frames for the paging which consist of a control part and a data part. The method according to one embodiment comprises the steps:

5 501. Transmit paging messages in the data part of a first sub frame.

502. Transmit a further paging message in the data part of a sub frame subsequent to the first sub frame, if the data rate of the first sub frame is not high enough for transmitting all the paging messages (overflow situation).

10 503. Indicate by an indicator in the first sub frame if the control part of the sub frame subsequent to the first sub frame should be decoded or not.

In step 503, the indicator only indicates if the control part of the subsequent sub frame should be read, as there is
15 an indicator - the P-RNTI - in the control part that in turn indicates if the data part comprises paging messages or not, as described above with reference to **figure 4**.

Furthermore the present invention relates to a method for
20 paging for a UE of a radio access network supporting discontinuous reception, using sub frames for the paging which consist of a control part and a data part. The method according to one embodiment is illustrated in the flowchart of **figure 6** and comprises the steps:

25 601. Receive a first sub frame comprising paging messages in the data part and an indicator indicating if the control part of a sub frame subsequent to the first sub frame should be decoded or not.

602. Decode the indicator.

30 603. Receive and decode the control part of the sub frame subsequent to the first sub frame if the indicator indicates that said control part should be decoded.

604. Go to sleep mode if the indicator indicates that the control part of the sub frame subsequent to the first sub
35 frame should not be decoded.

Furthermore, figure 7 illustrates a part of a radio access network shown in figure 1 comprising, by means of example, one UE 701 connected to a eNB 702. Schematically illustrated in figure 7 and according to one embodiment, the arrangement

5 in the eNB 702 comprises means for transmitting 702a paging messages in the data part of a first sub frame, and means for transmitting 702b a further paging message in the data part of a sub frame subsequent when needed, i.e. when the data rate of the first sub frame is not high enough for

10 transmitting all the paging messages. It also comprises means for indicating 702c by an indicator in the first sub frame if the control part of the sub frame subsequent to the first sub frame should be decoded or not. Also illustrated in figure 7 is the arrangement in the UE 701, which

15 comprises means for receiving 701a a first sub frame comprising paging messages in the data part and an indicator indicating if the control part of a sub frame subsequent to the first sub frame should be decoded or not, means for decoding 701b said indicator, means for receiving and

20 decoding 701c the control part of the subsequent sub frame, and means for going to sleep mode 701d.

The indicator, indicating if the control part of a sub frame subsequent to the first sub frame should be decoded or not,

25 can be defined in different ways. According to one embodiment, the indicator is contained in the control part of the sub frame. It may comprise a direct indication e.g. a single explicit bit (or more than one bit) indicating if the control part of the subsequent sub frame should be decoded

30 or if the UE should go to sleep.

A special case of this embodiment is to use the existing P-RNTI as the indicator. This implies that a P-RNTI in the control part of a sub frame explicitly means that the data part of the current sub frame comprises paging messages and

should be decoded, and implicitly means that the control part of the subsequent sub frame should be decoded. This also implies that the control part of the sub frame subsequent to a sub frame comprising paging messages will
5 always be read, either this is needed or not. In this case it is when decoding the control part of the subsequent sub frame that it will be known if the data part of the subsequent sub frame contains paging messages or not. If the subsequent sub frame comprises paging messages, the control
10 part of that subsequent sub frame will also include a P-RNTI, and the control part of yet another subsequent sub frame will be read. The advantage of such an embodiment is that there is no need to define a new specific indicator.

Another variant to this embodiment is to define an
15 alternative P-RNTI, here called Paging Continuation RNTI = PC-RNTI, as the indicator. Such an indicator would explicitly indicate the presence of paging messages in the data part of the current sub frame (which is the same function as the conventional P-RNTI) but will also
20 explicitly indicate that the next sub frame contains a continuation of the paging messages. The advantage of using PC-RNTI as indicator rather than P-RNTI as described above, is that it avoids the unnecessary reading of the control part of one last sub frame which does not contain any paging
25 messages.

According to yet another embodiment, the indicator is contained in the data part of the sub frame rather than in the control part. With this embodiment the advantage is that the indicator can be defined wherever suitable in the data
30 part.

It should be noted that even if the terms eNB, PDCCH and P-RNTI is used, the present invention is applicable to all

radio base stations having a similar functionality as the eNB in the E-UTRAN. Thus the present invention is not limited to E-UTRAN but can be used in any radio access network having a similar architecture and paging method.

- 5 The above described embodiments of the invention are intended to be examples only. Alterations, modification, and variations may be effected to particular embodiments by those skilled in the art without departing from the scope of the invention, which is defined by the accompanying claims.

CLAIMS

1. A method for paging for a radio access network providing communication services to at least one user equipment, wherein the network and the user equipment support discontinuous reception, and wherein a sub frame (300) used for paging messages comprises a control part (301) and a data part (302), said method comprising the steps of:
 - transmitting (501) paging messages in the data part of a first sub frame,
 - transmitting (502) a further paging message in the data part of a sub frame subsequent to the first sub frame, when the data rate of the first sub frame is not high enough for transmitting all paging messages, and
 - indicating (503) by an indicator in the first sub frame if the control part of the sub frame subsequent to the first sub frame should be decoded or not.
2. The method according to claim 1, wherein the indicator comprises at least one bit of the control part.
3. The method according to claim 2, wherein the indicator is the paging radio network temporary identifier, P-RNTI.
4. The method according to claim 2, wherein the indicator is an alternative P-RNTI, identifying that both the first sub frame and the subsequent sub frame comprise paging messages.
5. The method according to claim 1, wherein the indicator comprises at least one bit of the data part.
6. A method for paging for a user equipment of a radio access network, wherein the user equipment and the network support discontinuous reception, and wherein a sub frame

(300) used for paging messages comprises a control part (301) and a data part (302), said method comprising the steps of:

- receiving (601) a first sub frame comprising paging
5 messages in the data part and an indicator indicating if the control part of a sub frame subsequent to the first sub frame should be decoded or not,
- decoding (602) the indicator,
- receiving and decoding (603) the control part of the sub
10 frame subsequent to the first sub frame, when the indicator indicates that the control part of the sub frame subsequent to the first sub frame should be decoded, and
- going to sleep mode (604), when the indicator indicates
15 that the control part of the sub frame subsequent to the first sub frame should not be decoded.

7. The method according to claim 6, wherein the indicator comprises at least one bit of the control part.

20 8. The method according to claim 7, wherein the indicator is the paging radio network temporary identifier, P-RNTI.

9. The method according to claim 7, wherein the indicator
25 is an alternative P-RNTI, identifying that both the first sub frame and the subsequent sub frame comprise paging messages.

10. The method according to claim 6, wherein the indicator
30 comprises at least one bit of the data part.

11. A network node (702) of a radio access network
providing communication services to at least one user
equipment, wherein the network and the user equipment
support discontinuous reception, and wherein a sub frame
35 (300) used for paging messages comprises a control part

(301) and a data part (302), said network node characterised by:

- means for transmitting (702a) paging messages in the data part of a first sub frame, and
- 5 - means for transmitting (702b) a further paging message in the data part of a sub frame subsequent to the first sub frame, when the data rate of the first sub frame is not high enough for transmitting all paging messages, and
- means for indicating (702c) by an indicator (703) in the
10 first sub frame if the control part of the sub frame subsequent to the first sub frame should be decoded or not.

12. The network node according to claim 11, wherein the
15 indicator (703) comprises at least one bit of the control part.

13. The network node according to claim 12, wherein the
indicator (703) is the paging radio network temporary
20 identifier, P-RNTI.

14. The network node according to claim 12, wherein the
indicator (703) is an alternative P-RNTI, identifying that
both the first sub frame and the subsequent sub frame
25 comprise paging messages.

15. The network node according to claim 11, wherein the
indicator (703) comprises at least one bit of the data
part.

30

16. A user equipment (701) of a radio access network,
wherein the user equipment and the network support
discontinuous reception, and wherein a sub frame (300)
used for paging messages comprises a control part (301)
and a data part (302), said user equipment characterised
35 by:

- means for receiving (701a) a first sub frame comprising paging messages in the data part and an indicator (703) indicating if the control part of a sub frame subsequent to the first sub frame should be decoded or not,
 - 5 - means for decoding (701b) the indicator (703),
 - means for receiving and decoding (701c) the control part of the sub frame subsequent to the first sub frame, when the indicator (703) indicates that the control part of the sub frame subsequent to the first sub frame should be
 - 10 decoded, and
 - means for going to sleep mode (701d), when the indicator (703) indicates that the control part of the sub frame subsequent to the first sub frame should not be decoded.
- 15 17. The user equipment according to claim 16, wherein the indicator (703) comprises at least one bit of the control part.
18. The user equipment according to claim 17, wherein the
- 20 indicator (703) is the paging radio network temporary identifier, P-RNTI.
19. The user equipment according to claim 17, wherein the indicator (703) is an alternative P-RNTI, identifying that
- 25 both the first sub frame and the subsequent sub frame comprise paging messages.
20. The user equipment according to claim 16, wherein the indicator (703) comprises at least one bit of the data
- 30 part.

1/5

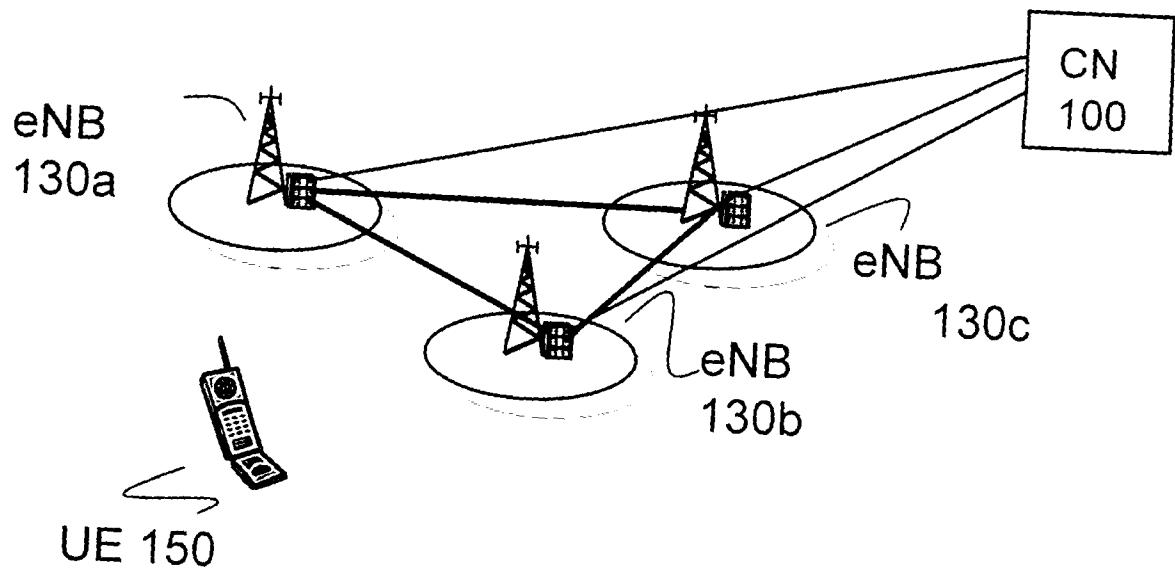


Fig. 1

2/5

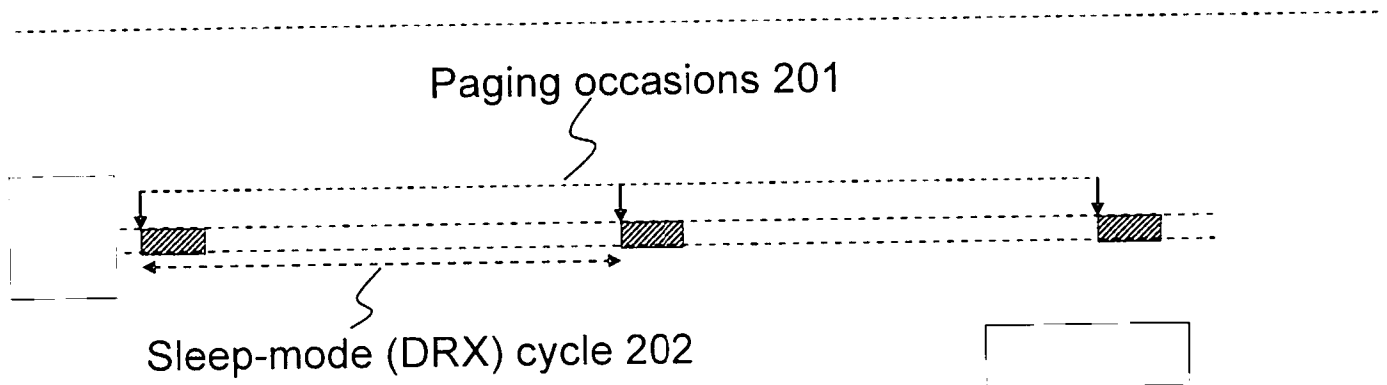


Fig. 2

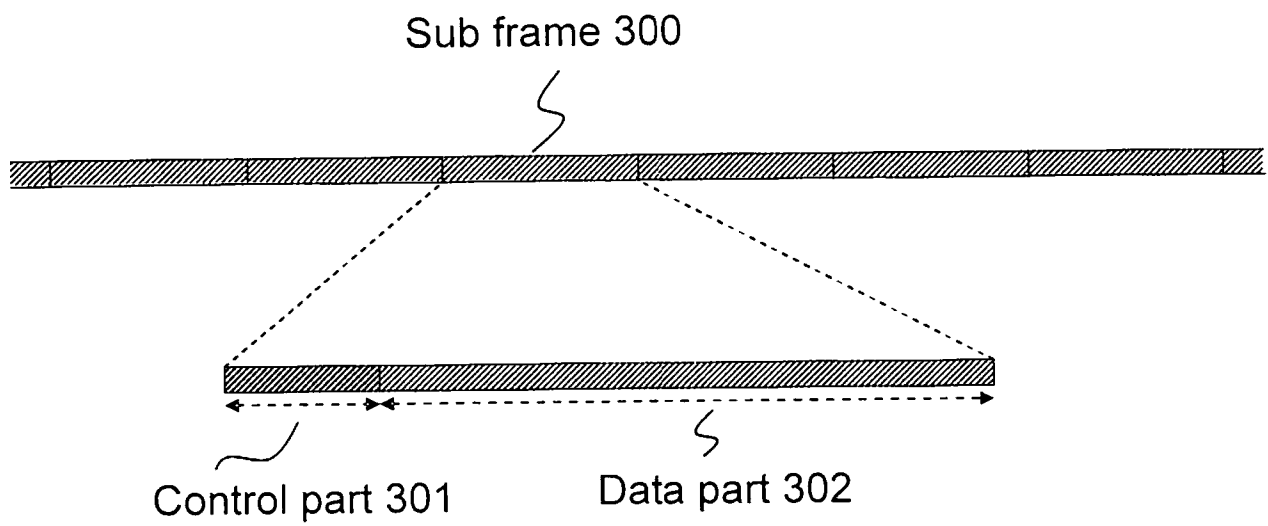


Fig. 3

3/5

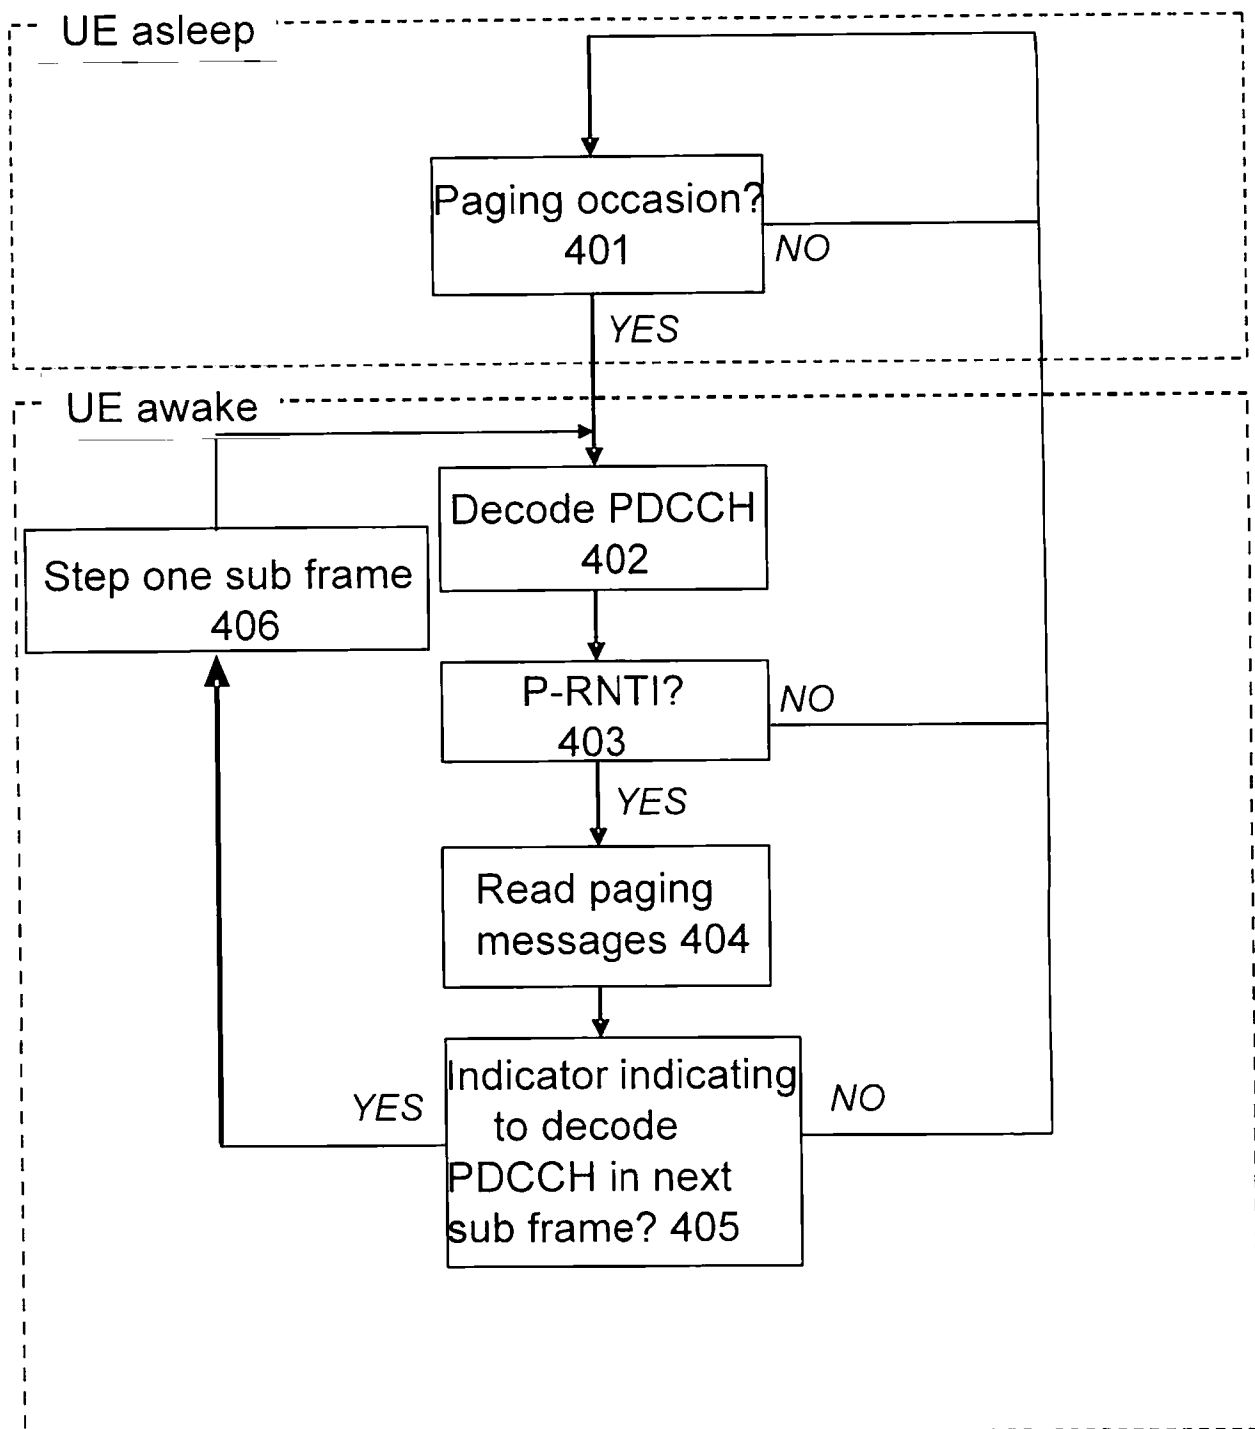


Fig. 4

4/5

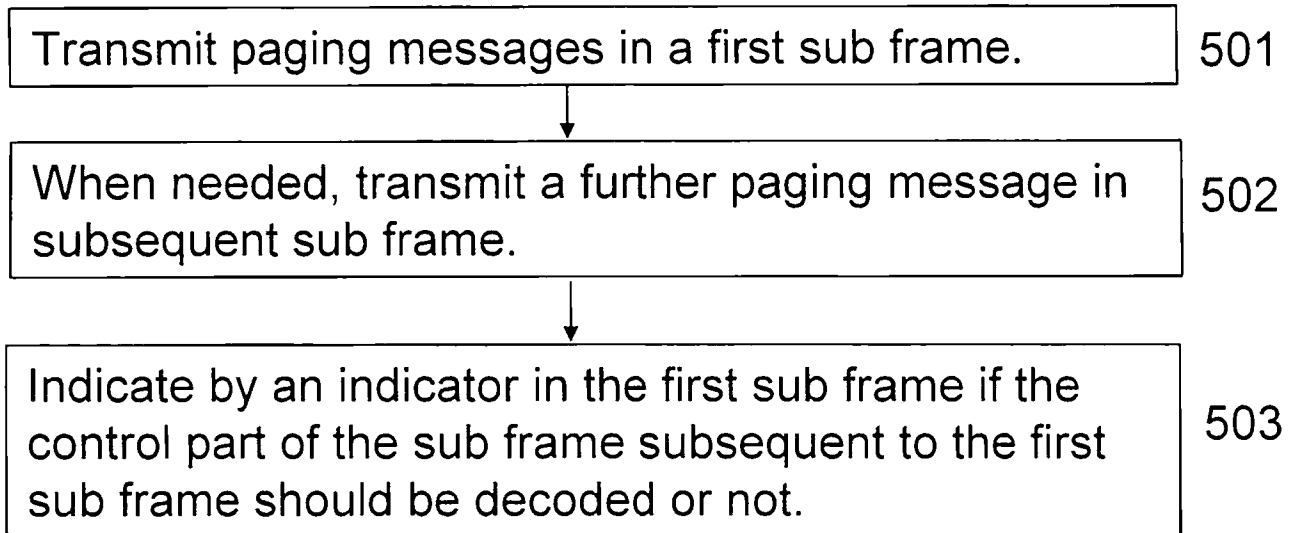


Fig. 5

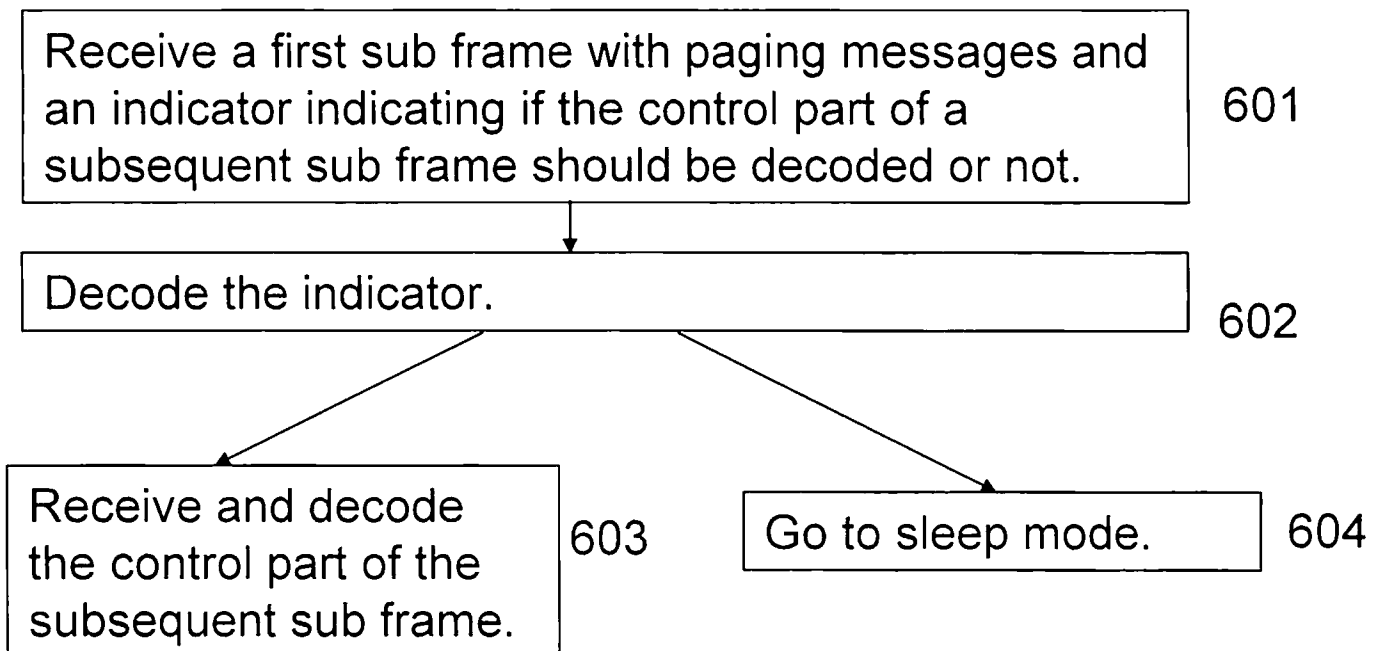


Fig. 6

5/5

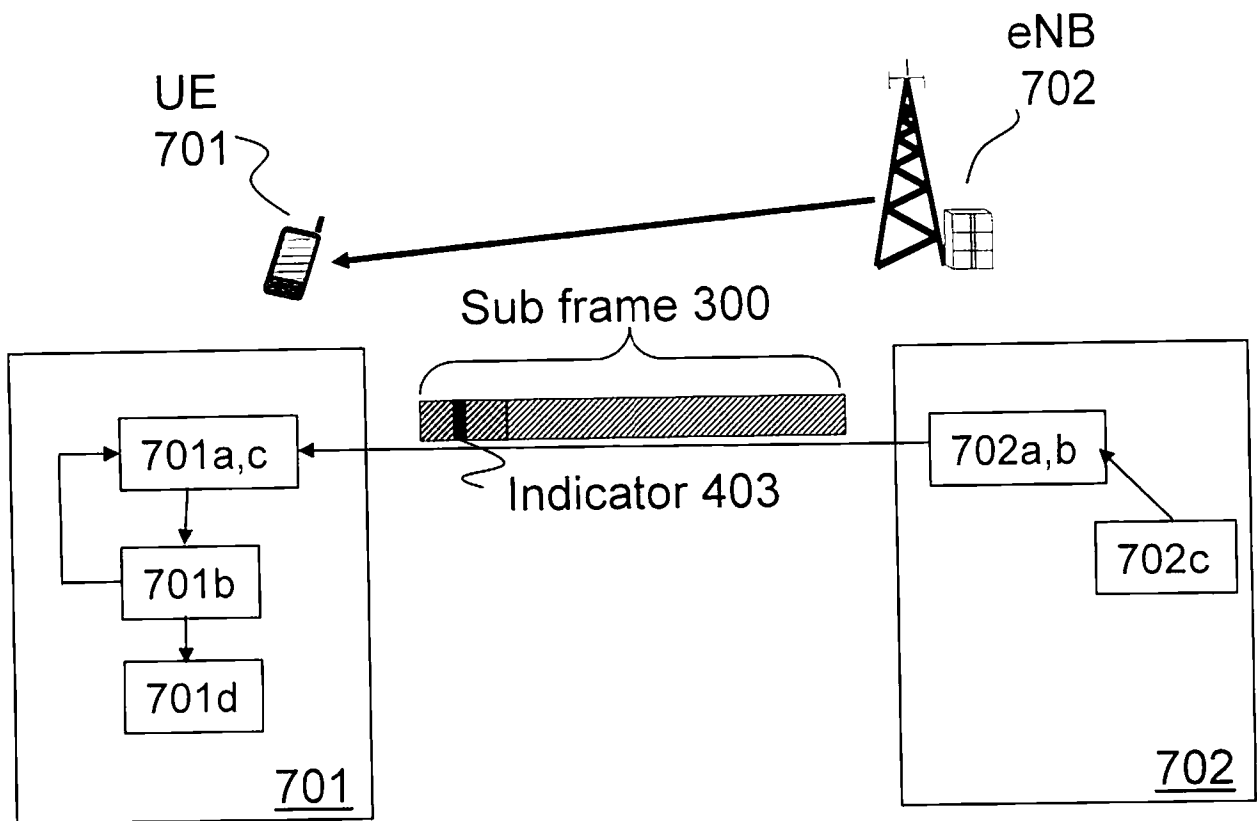


Fig. 7

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE2008/050541

A. CLASSIFICATION OF SUBJECT MATTER

IPC: see extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: H04W

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ, INTERNET

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	LG Electronics: 'R2-071926, Transmission of LTE paging' 3GPP TSG-RAN WG2#58, Kobe, Japan, 7-11 May 2007 Retrieved from the Internet: http://www.3gpp1.org/ftp/tsg_ran/WG2_RL2/TSGR2_58/Documents/ , p. 1-3; see the whole document --	1-20
A	WO 2007078172 A2 (LG ELECTRONICS INC.), 12 July 2007 (12.07.2007), page 1, line 10 - page 4, line 10; page 8, line 17 - line 26, figures 4-5, abstract --	1-20
A	US 20050181731 A1 (ASGHAR ET AL), 18 August 2005 (18.08.2005), paragraph [0031] --	1-20

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

22 December 2008

Date of mailing of the international search report

14 -01- 2009

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Anders Edlund/PR
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE2008/050541

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	IPWireless, NextWave Wireless: 'R2-073187, Paging group indication' 3GPP TSG RAN WG2#59, Athens, Greece, 20-24 June 2007, Retrieved from the Internet: http://www.3gpp.org/ftp/tsg_ran/WG2_RL2/TSGR2_59/Docs/, p. 1-3; see the whole document --	1-20
A	Qualcomm Europe: 'R2-060994, Paging Procedure' 3GPP TSG-RAN WG2 meeting #52, Athens, Greece, 27-31 March 2006 Retrieved from the Internet: http://www.3gpp.org/ftp/Specs/html-info/TDocExMtg--R2-52--25516.htm, p. 1; see the whole document --	1-20
A	Siemens: 'R2-062818, Adaptive DRX Setting for LTE paging' 3GPP TSG-RAN WG2#55, Seoul, Korea, 9-13 October 2006, Retrieved from the Internet: http://www.3gpp1.net/ftp/tsg_ran/WG2_RL2/TSGR2_55/Documents/; see the whole document --	1-20
PX	Ericsson: 'R2-074202, Paging in LTE' 3GPP TSG-RAN2 Meeting #59bis, Shanghai, China, 8-12 October 2007, Retrieved from the Internet: http://www.3gpp.org/ftp/tsg_ran/WG2_RL2/TSGR2_59bis/Docs/, p. 1-3; see the whole document -- -----	1-20

International patent classification (IPC)**H04W 68/02** (2009.01)**H04W 52/02** (2009.01)**Download your patent documents at www.prv.se**

The cited patent documents can be downloaded at www.prv.se by following the links:

- In English/Searches and advisory services/Cited documents (service in English) or
- e-tjänster/anförda dokument(service in Swedish).

Use the application number as username.

The password is **NGDQFTYEKN**.

Paper copies can be ordered at a cost of 50 SEK per copy from PRV InterPat (telephone number 08-782 28 85).

Cited literature, if any, will be enclosed in paper form.

INTERNATIONAL SEARCH REPORT

Information on patent family members

01/11/2008

International application No.

PCT/SE2008/050541

WO	2007078172	A2	12/07/2007	EP	1969893	A	17/09/2008
				AU	2007203852	A	12/07/2007
				AU	2007203861	A	12/07/2007
				EP	1969738	A	17/09/2008
				EP	1969739	A	17/09/2008
				EP	1969753	A	17/09/2008
				EP	1969784	A	17/09/2008
				EP	1969879	A	17/09/2008
				EP	1969892	A	17/09/2008
				EP	1972081	A	24/09/2008
				EP	1980062	A	15/10/2008
				EP	1985037	A	29/10/2008
				KR	20070073571	A	10/07/2007
				KR	20070073577	A	10/07/2007
				KR	20070073578	A	10/07/2007
				KR	20070073588	A	10/07/2007
				KR	20070073608	A	10/07/2007
				KR	20070073627	A	10/07/2007
				KR	20070073635	A	10/07/2007
				KR	20070076374	A	24/07/2007
				KR	20070076375	A	24/07/2007
				WO	2007078051	A	12/07/2007
				WO	2007078142	A	12/07/2007
				WO	2007078155	A	12/07/2007
				WO	2007078156	A	12/07/2007
				WO	2007078164	A	12/07/2007
				WO	2007078165	A	12/07/2007
				WO	2007078171	A	12/07/2007
				WO	2007078173	A	12/07/2007
				WO	2007078174	A	12/07/2007
				EP	1949566	A	30/07/2008
				KR	20080058464	A	25/06/2008
				US	20080267126	A	30/10/2008
				WO	2007052972	A	10/05/2007
				WO	2007108630	A	27/09/2007
				EP	1987606	A	05/11/2008
				EP	1987607	A	05/11/2008
				KR	20070095755	A	01/10/2007
				KR	20070107560	A	07/11/2007
				US	20070191019	A	16/08/2007
				US	20070191020	A	16/08/2007
				WO	2007091823	A	16/08/2007
				WO	2007091824	A	16/08/2007
				WO	2007108655	A	27/09/2007
				WO	2007126192	A	08/11/2007

US 20050181731 A1 18/08/2005

US 7386030 B

10/06/2008