



HU000028444T2

(19) **HU****MAGYARORSZÁG**
Szellemi Tulajdon Nemzeti Hivatala(11) Lajstromszám: **E 028 444**(13) **T2****EURÓPAI SZABADALOM**
SZÖVEGÉNEK FORDÍTÁSA(21) Magyar ügyszám: **E 14 176957**(51) Int. Cl.: **H04B 7/06**

(2006.01)

(22) A bejelentés napja: **2007. 08. 16.**

(96) Az európai bejelentés bejelentési száma:

EP 20070176957

(97) Az európai bejelentés közzétételi adatai:

EP 2854304 A1 **2015. 04. 01.**

(97) Az európai szabadalom megadásának meghirdetési adatai:

EP 2854304 B1 **2016. 02. 03.**

(30) Elsőbbségi adatok:

838677 P **2006. 08. 18.** **US**

(72) Feltalálók(k):

Blanz, Josef J., San Diego, CA California 92121-1714
(US)**Fernandez-Corbaton, Ivan Jesus, San Diego, CA**
California 92121-1714 (US)

(73) Jogosult(ak):

Qualcomm Incorporated, San Diego, CA
92121-1714 (US)

(74) Képviselő:

Danubia Szabadalmi és Jogi Iroda Kft.,
Budapest(54) **Előkódolási vezérlési jelzés (PCI) és csatornaminőség jelzés (CQI) visszacsatolása egy vezeték nélküli kommunikációs rendszerben**

Az európai szabadalom ellen, megadásának az Európai Szabadalmi Közlönyben való meghirdetésétől számított kilenc hónapon belül, felszólalást lehet benyújtani az Európai Szabadalmi Hivatalnál. (Európai Szabadalmi Egyezmény 99. cikk(1))

A fordítást a szabadalmas az 1995. évi XXXIII. törvény 84/H. §-a szerint nyújtotta be. A fordítás tartalmi helyességét a Szellemi Tulajdon Nemzeti Hivatala nem vizsgálta.



(11) **EP 2 854 304 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
03.02.2016 Bulletin 2016/05

(51) Int Cl.:
H04B 7/06 (2006.01)

(21) Application number: **14176957.0**

(22) Date of filing: **16.08.2007**

(54) **Feedback of precoding control indication (PCI) and channel quality indication (CQI) in a wireless communication system**

Rückkopplung von Vorcodierungssteuerungsanzeige (PCI) und Kanalqualitätsanzeige (CQI) in einem drahtlosen Kommunikationssystem

Retour d'informations d'indication de commande de précodage (PCI) et indication de qualité de canal (CQI) dans un système de communication sans fil

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU LV MC MT NL PL PT RO SE
SI SK TR**

(30) Priority: **18.08.2006 US 838677 P**

(43) Date of publication of application:
01.04.2015 Bulletin 2015/14

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
07814155.3 / 2 052 468

(73) Proprietor: **Qualcomm Incorporated
San Diego, CA 92121-1714 (US)**

(72) Inventors:
• **Blanz, Josef J.**
San Diego, CA California 92121-1714 (US)
• **Fernandez-Corbaton, Ivan Jesus**
San Diego, CA California 92121-1714 (US)

(74) Representative: **Catesby, Olivia Joanne et al
Tomkins & Co.**
**5 Dartmouth Road
Dublin 6 (IE)**

(56) References cited:
EP-A- 1 274 178 EP-A- 1 655 871
EP-A- 1 655 874 US-A1- 2006 133 521

EP 2 854 304 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description**BACKGROUND****I. Field**

[0001] The present disclosure relates generally to communication, and more specifically to techniques for sending feedback information in a wireless communication system.

II. Background

[0002] In a wireless communication system, a transmitter may utilize multiple (T) transmit antennas for data transmission to a receiver equipped with multiple (R) receive antennas. The multiple transmit and receive antennas form a multiple-input multiple-output (MIMO) channel that may be used to increase throughput and/or improve reliability. For example, the transmitter may transmit up to T data streams simultaneously from the T transmit antennas to improve throughput. Alternatively, the transmitter may transmit a single data stream from all T transmit antennas to improve reception by the receiver. Each data stream may carry one transport block or packet of data in a given transmission time interval (TTI). Hence, the terms "data stream" and "transport block" may be used interchangeably.

[0003] Good performance (e.g., high throughput) may be achieved by precoding one or more data streams with a precoding matrix selected based on the response of the MIMO channel from the transmitter to the receiver. Precoding may also be referred to as beamforming, spatial mapping, etc. The receiver may evaluate different possible precoding matrices and select a precoding matrix as well as the number of data streams to send such that the best performance can be achieved. The receiver may also determine a signal-to-interference-and-noise ratio (SINR) for each possible data stream and select a data rate for the data stream based on the SINR. The receiver may send feedback information that may include the selected precoding matrix, the data rate for each data stream, etc. The transmitter may process one or more data streams in accordance with the feedback information and send the data stream(s) to the receiver. EP 1 655 871 discloses a method and system for generating and processing feedback information.

[0004] The feedback information may improve data transmission performance. However, valuable radio resources are consumed to send the feedback information. There is therefore a need in the art for techniques to efficiently send the feedback information.

SUMMARY

[0005] Techniques for efficiently sending feedback information in a wireless communication system are described herein. The feedback information may comprise precoding control indication (PCI), rank, channel quality indication (CQI), etc., or any combination thereof.

[0006] In one design of sending feedback information, PCI, rank and CQI for data transmission from a transmitter to a receiver may be determined, e.g., by evaluating different hypotheses and selecting the PCI, rank and CQI of the hypothesis with the best performance. A report may be formed based on the selected PCI, rank and CQI. The rank may indicate the number of transport blocks to send in parallel for the data transmission. The PCI may comprise a precoding matrix or vector to use for precoding at least one transport block to send for the data transmission. The CQI may comprise at least one CQI value for the at least one transport block. Each CQI value may be associated with parameters for processing a transport block, e.g., transport block size, coding and modulation scheme, number of channelization codes, etc. The rank and CQI may be combined based on a mapping. For example, the CQI may comprise one CQI value and fall within a first range of values (e.g., from 0 to 30) if one transport block is preferred by the receiver. The CQI may comprise two CQI values and fall within a second range of values (e.g., from 31 to 255) if two transport blocks are preferred.

[0007] In one design of sending data transmission, a report comprising PCI, rank and CQI may be received by a transmitter. The number of transport blocks to send for the data transmission may be determined based on one of multiple ranges of values within which the CQI falls. At least one transport block may be processed (e.g., encoded and modulated) based on at least one CQI value from the CQI and may be further precoded based on a precoding matrix or vector from the PCI.

[0008] Various aspects and features of the disclosure are described in further detail below.

BRIEF DESCRIPTION OF THE DRAWINGS

[0009]

FIG. 1 shows a wireless communication system.

FIG. 2 shows a block diagram of a Node B and a UE.
 FIG. 3 shows a timing diagram for a set of physical channels.
 FIG. 4 shows a design of mapping two CQI values to a CQI combination.
 FIG. 5 shows a design of sending the PCI, rank and CQI on an HS-DPCCH.
 FIG. 6 shows a design of sending the PCI and rank on an uplink DPCCH.
 FIG. 7 shows a design of a process for sending feedback information.
 FIG. 8 shows a design of a process for sending data transmission.

DETAILED DESCRIPTION

[0010] The techniques described herein may be used for various wireless communication systems such as Code Division Multiple Access (CDMA) systems, Time Division Multiple Access (TDMA) systems, Frequency Division Multiple Access (FDMA) systems, Orthogonal FDMA (OFDMA) systems, Single-Carrier FDMA (SC-FDMA) systems, etc. The terms "system" and "network" are often used interchangeably. A CDMA system may implement a radio technology such as Universal Terrestrial Radio Access (UTRA), cdma2000, etc. UTRA includes Wideband-CDMA (which covers W-CDMA, UMTS-FDD) and Time Division Synchronous CDMA (TD-SCDMA) (which covers UMTS-TDD, low chip rate UMTS-TDD, and high chip rate UMTS-TDD). cdma2000 covers IS-2000, IS-95 and IS-856 standards. A TDMA system may implement a radio technology such as Global System for Mobile Communications (GSM). An OFDMA system may implement a radio technology such as Evolved UTRA (E-UTRA), Ultra Mobile Broadband (UMB), IEEE 802.20, IEEE 802.16 (WiMAX), Flash-OFDM®, etc. UTRA and E-UTRA are part of Universal Mobile Telecommunication System (UMTS). Long Term Evolution (LTE) is an upcoming release of UMTS that utilizes E-UTRA. UTRA, E-UTRA, UMTS, LTE and GSM are described in documents from an organization named "3rd Generation Partnership Project" (3GPP). cdma2000 is described in documents from an organization named "3rd Generation Partnership Project 2" (3GPP2). These various radio technologies and standards are known in the art. For clarity, certain aspects of the techniques are described below for UMTS, and 3GPP terminology is used in much of the description below.

[0011] FIG. 1 shows a wireless communication system 100 with multiple Node Bs 110 and user equipments (UEs) 120. System 100 may also be referred to as a Universal Terrestrial Radio Access Network (UTRAN) in 3GPP. A Node B is generally a fixed station that communicates with the UEs and may also be referred to as an evolved Node B (eNode B), a base station, an access point, etc. Each Node B 110 provides communication coverage for a particular geographic area and supports communication for the UEs located within the coverage area. A system controller 130 couples to Node Bs 110 and provides coordination and control for these Node Bs. System controller 130 may be a single network entity or a collection of network entities.

[0012] UEs 120 may be dispersed throughout the system, and each UE may be stationary or mobile. A UE may also be referred to as a mobile station, a terminal, an access terminal, a subscriber unit, a station, etc. A UE may be a cellular phone, a personal digital assistant (PDA), a wireless device, a handheld device, a wireless modem, a laptop computer, etc.

[0013] FIG. 2 shows a block diagram of a design of one Node B 110 and one UE 120. Node B 110 is equipped with multiple (T) antennas 220a through 220t that may be used for data transmission on the downlink and data reception on the uplink. UE 120 is equipped with multiple (R) antennas 252a through 252r that may be used for data transmission on the uplink and data reception on the downlink. Each antenna may be a physical antenna, a virtual antenna comprising an antenna array and an appropriate beamforming device, an antenna array with a fixed weighting network, etc. A MIMO transmission may be sent from the T transmit antennas at Node B 110 to the R receive antennas at UE 120.

[0014] At Node B 110, a transmit (TX) data and signaling processor 212 may receive data from a data source (not shown) for all scheduled UEs. Processor 212 may process (e.g., format, encode, interleave, and symbol map) the data for each UE and provide data symbols, which are modulation symbols for data. Processor 212 may also process signaling and provides signaling symbols, which are modulation symbols for signaling. A spatial mapper 214 may precode the data symbols for each UE based on a precoding matrix or vector selected by/for that UE and provide output symbols. In general, a matrix may have a single column or multiple columns. A CDMA modulator (Mod) 216 may perform CDMA processing on the output symbols and signaling symbols and may provide T output chip streams to T transmitters (TMTR) 218a through 218t. Each transmitter 218 may process (e.g., convert to analog, filter, amplify, and frequency upconvert) its output chip stream and generate a downlink signal. T downlink signals from T transmitters 218a through 218t may be sent via T antennas 220a through 220t, respectively.

[0015] At UE 120, R antennas 252a through 252r may receive the downlink signals from Node B 110 and provide R received signals to R receivers (RCVR) 254a through 254r, respectively. Each receiver 254 may process (e.g., filter, amplify, frequency downconvert, and digitize) its received signal and provide samples to a channel processor 268 and an equalizer/CDMA demodulator (Demod) 260. Processor 268 may derive coefficients for a front-end filter/equalizer and coefficients for one or more combiner matrices. Unit 260 may perform equalization with the front-end filter and CDMA demodulation and may provide filtered symbols. A MIMO detector 262 may combine the filtered symbols across spatial dimension and provide detected symbols, which are estimates of the data symbols and signaling symbols sent to UE

120. A receive (RX) data processor 264 may process (e.g., symbol demap, deinterleave, and decode) the detected symbols and provide decoded data and signaling. In general, the processing by equalizer/CDMA demodulator 260, MIMO detector 262, and RX data processor 264 is complementary to the processing by CDMA modulator 216, spatial mapper 214, and TX data and signaling processor 212, respectively, at Node B 110.

[0016] Channel processor 268 may estimate the response of the wireless channel from Node B 110 to UE 120. Processor 268 and/or 270 may process the channel estimate to obtain feedback information, which may comprise the information shown in Table 1.

Table 1

Info	Description
PCI	Convey a specific precoding matrix or vector to use for precoding one or more transport blocks.
Rank	Indicate the number of transport blocks to send in parallel.
CQI	Convey processing parameters for each transport block.

[0017] Processor 268 and/or 270 may jointly determine the PCI, rank and CQI for downlink data transmission based on the channel estimate. For example, processor 268 and/or 270 may evaluate different possible precoding matrices that can be used for data transmission and different combinations of columns in each precoding matrix. Each column of a precoding matrix may be used for precoding/spatial mapping to send one transport block from all T antennas 220a through 220t. Processor 268 and/or 270 may select a precoding matrix as well as one or more specific columns of the selected precoding matrix that can provide the best performance. Performance may be quantified by throughput and/or some other metric. The PCI may convey the selected precoding matrix, the selected column(s) of the selected precoding matrix, etc. The CQI may convey the coding and modulation scheme to use for each transport block, the data rate or transport format for each transport block, the SINR of each transport block, etc. Processor 268 and/or 270 may provide feedback information, which may include the PCI, rank and CQI.

[0018] The feedback information and data to send on the uplink may be processed by a TX data and signaling processor 280, further processed by a CDMA modulator 282, and conditioned by transmitters 254a through 254r to generate R uplink signals, which may be transmitted via antennas 252a through 252r, respectively. The number of transmit antennas at UE 120 may be the same as or different from the number of receive antennas, e.g., UE 120 may transmit the feedback information using one antenna and receive data using two antennas. At Node B 110, the uplink signals from UE 120 may be received by antennas 220a through 220t, conditioned by receivers 218a through 218t, filtered by an equalizer/CDMA demodulator 240, detected by a MIMO detector 242, and processed by an RX data and signaling processor 244 to recover the feedback information and data sent by UE 120.

[0019] Controllers/processors 230 and 270 may direct the operation at Node B 110 and UE 120, respectively. Memories 232 and 272 may store program codes and data for Node B 110 and UE 120, respectively. A scheduler 234 may schedule UEs for downlink and/or uplink transmission, e.g., based on the feedback information received from the UEs.

[0020] In UMTS, data for a UE may be processed as one or more transport channels at a higher layer. The transport channels may carry data for one or more services, e.g., voice, video, packet data, etc. The transport channels may be mapped to physical channels at a physical layer. The physical channels may be channelized with different channelization codes and may thus be orthogonal to one another in the code domain.

[0021] 3GPP Release 5 and later supports High-Speed Downlink Packet Access (HSDPA), which is a set of channels and procedures that enable high-speed packet data transmission on the downlink. For HSDPA, a Node B may send data on a High Speed Downlink Shared Channel (HS-DSCH), which is a downlink transport channel that is shared by all UEs in both time and code. The HS-DSCH may carry data for one or more UEs in each TTI. For HSDPA, a 10 millisecond (ms) frame is partitioned into five 2-ms subframes, each subframe includes three slots, and each slot has a duration of 0.667 ms. A TTI is equal to one subframe for HSDPA and is the smallest unit of time in which a UE may be scheduled and served. The sharing of the HS-DSCH may be dynamic and may change from TTI to TTI.

[0022] Table 2 lists some downlink and uplink physical channels in UMTS and provides a short description for each physical channel.

Table 2

Link	Channel	Channel Name	Description
Downlink	HS-PDSCH	High Speed Physical Downlink Shared Channel	Carry data sent on the HS-DSCH for different UEs.
Downlink	HS-SCCH	Shared Control Channel for HS-DSCH	Carry signaling for the HS-PDSCH.

(continued)

Link	Channel	Channel Name	Description
Uplink	HS-DPCCH	Dedicated Physical Control Channel for HS-DSCH	Carry feedback for downlink transmission in HSDPA.
Uplink	DPDCH	Dedicated Physical Data Channel	Carry data sent by a UE to a Node B on the uplink.
Uplink	DPCCH	Dedicated Physical Control Channel	Carry control information sent by the UE to the Node B.

[0023] FIG. 3 shows a timing diagram for the physical channels in Table 2. For HSDPA, a Node B may serve one or more UEs in each TTI. The Node B sends signaling for each scheduled UE on the HS-SCCH and sends data on the HS-PDSCH two slots later. The Node B may use a configurable number of 128-chip channelization codes for the HS-SCCH and may use up to fifteen 16-chip channelization codes for the HS-PDSCH(s). Each UE that might receive data on the HS-PDSCH may process a number of HS-SCCH(s) in each TTI to determine whether signaling has been sent for that UE. Each UE that is scheduled in a given TTI may process the HS-PDSCH to recover data sent to that UE. Each scheduled UE may send either an acknowledgement (ACK) on the HS-DPCCH if a transport block is decoded correctly or a negative acknowledgement (NACK) otherwise. Each UE may also send feedback information to the Node B on the HS-DPCCH and/or uplink DPCCH, as described below.

[0024] FIG. 3 also shows timing offsets between the uplink DPCCH, the HS-PDSCH, and the HS-DPCCH at the UE. The HS-PDSCH starts two slots after the HS-SCCH. The HS-DPCCH starts approximately 7.5 slots from the end of the corresponding transmission on the HS-PDSCH and also $mx256$ chips after the start of a corresponding uplink DPCH subframe. The HS-DPCCH may be asynchronous to the uplink DPCCH but is aligned to a 256-chip raster so that the uplink transmit signals on different code channels remain orthogonal.

[0025] Node B 110 may perform precoding/spatial mapping for each HS-PDSCH channelization code c in each symbol period s , as follows:

$$\underline{d}_c(s) = \underline{B}_c \underline{b}_c(s), \quad \text{Eq (1)}$$

where $\underline{b}_c(s)$ is a vector with up to T data symbols to send with channelization code c in symbol period s ,

$\underline{B}_c$ is a precoding matrix or vector for channelization code c , and

$\underline{d}_c(s)$ is a vector with T output symbols to send with channelization code c in symbol period s via the T transmit antennas.

[0026] Various precoding/spatial mapping schemes may be supported such as double-transmit adaptive array (D-TxAA), space-time transmit diversity (STTD), closed loop transmit diversity (CLTD), per antenna rate control (PARC), code reuse Bell Labs layered space-time (CRBLAST), etc. For D-TxAA, one transport block may be sent from two antennas using a 2×1 precoding vector, or two transport blocks may be sent from two antennas using a 2×2 precoding matrix. For STTD, one transport block may be sent from two transmit antennas, with each data symbol being sent from both antennas in two symbol periods to achieve time and spatial diversity. For CLTD, one transport block may be sent from two transmit antennas, with the phase of one antenna being adjusted to improve reception by the UE. For PARC, up to T transport blocks may be sent from up to T transmit antennas, one transport block per antenna. For CRBLAST, one transport block may be sent from up to T transmit antennas. For both PARC and CRBLAST, precoding matrix $\underline{B}_c$ may be an identity matrix $\underline{I}$ containing ones along the diagonal and zeros elsewhere. Other spatial mapping schemes may also be supported. For clarity, the following description assumes the use of D-TxAA, and feedback information is generated and sent for D-TxAA.

[0027] In general, any number of precoding matrices may be supported for D-TxAA. In one design, two precoding matrices are supported and defined as follows:

$$\underline{W}_1 = \frac{1}{\sqrt{2}} \cdot \begin{bmatrix} 1 & 1 \\ e^{j\pi/4} & e^{j5\pi/4} \end{bmatrix} \quad \text{and} \quad \underline{W}_2 = \frac{1}{\sqrt{2}} \cdot \begin{bmatrix} 1 & 1 \\ e^{j3\pi/4} & e^{j7\pi/4} \end{bmatrix}. \quad \text{Eq (2)}$$

[0028] The two columns of each precoding matrix are orthogonal to one another, and each column has unit power.

[0029] Four precoding vectors may be defined based on precoding matrices $\underline{\mathbf{W}}_1$ and $\underline{\mathbf{W}}_2$ and may be given as:

$$\underline{\mathbf{w}}_0 = a \cdot \begin{bmatrix} 1 \\ e^{j\pi/4} \end{bmatrix}, \quad \underline{\mathbf{w}}_1 = a \cdot \begin{bmatrix} 1 \\ e^{-j\pi/4} \end{bmatrix}, \quad \underline{\mathbf{w}}_2 = a \cdot \begin{bmatrix} 1 \\ e^{j3\pi/4} \end{bmatrix} \quad \text{and} \quad \underline{\mathbf{w}}_3 = a \cdot \begin{bmatrix} 1 \\ e^{-j3\pi/4} \end{bmatrix}, \quad \text{Eq (3)}$$

where $\underline{\mathbf{w}}_0$ and $\underline{\mathbf{w}}_3$ are precoding vectors corresponding to the first and second columns, respectively, of precoding matrix $\underline{\mathbf{W}}_1$, or $\underline{\mathbf{W}}_1 = [\underline{\mathbf{w}}_0 \ \underline{\mathbf{w}}_3]$, $\underline{\mathbf{w}}_1$ and $\underline{\mathbf{w}}_2$ are precoding vectors corresponding to the second and first columns, respectively, of precoding matrix $\underline{\mathbf{W}}_2$, or $\underline{\mathbf{W}}_2 = [\underline{\mathbf{w}}_2 \ \underline{\mathbf{w}}_1]$, and $a = 1/\sqrt{2}$.

[0030] Since the first element of each precoding vector has a common value of $a = 1/\sqrt{2}$, the four precoding vectors in equation (3) may be defined based on the values of the second element, which may be given as:

$$w_0 = \frac{1+j}{2}, \quad w_1 = \frac{1-j}{2}, \quad w_2 = \frac{-1+j}{2} \quad \text{and} \quad w_3 = \frac{-1-j}{2}, \quad \text{Eq (4)}$$

where w_0 , w_1 , w_2 and w_3 are the second element of precoding vectors $\underline{\mathbf{w}}_0$, $\underline{\mathbf{w}}_1$, $\underline{\mathbf{w}}_2$ and $\underline{\mathbf{w}}_3$, respectively.

[0031] The UE may periodically determine the precoding matrix or vector that can provide the best performance for downlink data transmission to the UE. For example, in each TTI, the UE may estimate the response of the wireless channel from the Node B to the UE. The UE may then evaluate the performance of different hypotheses corresponding to different possible precoding matrices and vectors. For example, the UE may determine the overall throughput for transmission of (1) two transport blocks using $\underline{\mathbf{W}}_1$, (2) two transport blocks using $\underline{\mathbf{W}}_2$, (3) one transport block using $\underline{\mathbf{w}}_0$, (4) one transport block using $\underline{\mathbf{w}}_1$, (5) one transport block using $\underline{\mathbf{w}}_2$, (6) one transport block using $\underline{\mathbf{w}}_3$, etc. As part of the throughput computation for each hypothesis, the UE may determine the SINR of each transport block based on the precoding matrix or vector for that hypothesis.

[0032] The UE may support successive interference cancellation (SIC) and may recover multiple transport blocks using SIC. For SIC, the UE may process the received samples to recover a first (or master) transport block, estimate the interference due to the recovered transport block, subtract the estimated interference from the received samples, and recover a second transport block in the same manner. The first transport block observes interference from the second transport block and may thus achieve lower SINR. The second transport block may observe little interference from the first transport block, if the interference cancellation was effective, and may achieve higher SINR.

[0033] If the UE supports SIC, then the UE may determine overall throughput for transmission of two transport blocks using $\underline{\mathbf{W}}_1$ with (i) the transport block sent with the first column of $\underline{\mathbf{W}}_1$ recovered first and (ii) the transport block sent with the second column of $\underline{\mathbf{W}}_1$ recovered first. The UE may also determine overall throughput for transmission of two transport blocks using $\underline{\mathbf{W}}_2$ with (i) the transport block sent with the first column of $\underline{\mathbf{W}}_2$ recovered first and (ii) the transport block sent with the second column of $\underline{\mathbf{W}}_2$ recovered first.

[0034] The UE may select the precoding matrix or vector that can provide the best performance among all hypotheses evaluated. The UE may then determine PCI, which may convey the selected precoding matrix or vector. The UE may determine the rank for the best hypothesis, which may indicate the number of transport blocks to send in parallel. The UE may also determine a CQI value for each transport block, which may convey processing parameters for the transport block. The UE may send the PCI, rank and CQI as feedback information to the Node B.

[0035] In one design, the PCI conveys the selected precoding matrix and may be sent with one PCI bit defined as shown in Table 3.

Table 3

PCI value	Selected precoding matrix
0	$\underline{\mathbf{W}}_1$
1	$\underline{\mathbf{W}}_2$

[0036] In another design, the PCI conveys the selected precoding matrix and which column of the selected precoding matrix to use if sending one transport block. In this design, the PCI and rank may be sent with three PCI bits defined as shown in Table 4.

Table 4

PCI value	Selected precoding matrix	Number of transport blocks	Selected column for single transport block
0	$\underline{\mathbf{W}}_1$	1	1 (or $\underline{\mathbf{w}}_0$)
1	$\underline{\mathbf{W}}_1$	1	2 (or $\underline{\mathbf{w}}_3$)
2	$\underline{\mathbf{W}}_2$	1	1 (or $\underline{\mathbf{w}}_2$)
3	$\underline{\mathbf{W}}_2$	1	2 (or $\underline{\mathbf{w}}_1$)
4	$\underline{\mathbf{W}}_1$	2	N/A
5	$\underline{\mathbf{W}}_2$	2	N/A

[0037] In yet another design, the PCI conveys the selected precoding matrix, which column of the selected precoding matrix to use if sending one transport block, and which transport block will be decoded first (which is called the master transport block) if the UE supports SIC. In this design, the PCI and rank may be sent with three PCI bits defined as shown in Table 5. PCI values 011 and 111 may be used by SIC-capable UEs.

Table 5

PCI value			Selected precoding matrix	Number of transport blocks	Selected column for single transport block	Index of master transport block for SIC capable UE
PCI ₂	PCI ₁	PCI ₀				
0	0	0	$\underline{\mathbf{W}}_1$	1	1	N/A
0	0	1	$\underline{\mathbf{W}}_1$	2	N/A	1
0	1	0	$\underline{\mathbf{W}}_1$	1	2	N/A
0	1	1	$\underline{\mathbf{W}}_1$	2	N/A	2
1	0	0	$\underline{\mathbf{W}}_2$	1	1	N/A
1	0	1	$\underline{\mathbf{W}}_2$	2	N/A	1
1	1	0	$\underline{\mathbf{W}}_2$	1	2	N/A
1	1	1	$\underline{\mathbf{W}}_2$	2	N/A	2

[0038] In general, the PCI may comprise any information that can convey a specific precoding matrix or vector to use for data transmission. In the designs described above, the PCI may convey the selected precoding matrix and the selected column of this matrix if only one transport block is sent. In another design, the PCI may convey one or more specific precoding vectors to use for one or more transport blocks, and additional precoding vectors to use for additional transport blocks, if any, may be determined based on the signaled precoding vector(s). For example, in the design shown in equations (2) and (3), the PCI may convey a specific precoding vector to use for one transport block. If two transport blocks are selected or preferred by the UE, then the precoding vector to use for the second transport block may be the complement of the signaled precoding vector, with both vectors being from the same precoding matrix. For example, a 2-bit PCI value may convey precoding vector $\underline{\mathbf{w}}_1$ for one transport block. If two transport block are selected or preferred, then the complementary precoding vector $\underline{\mathbf{w}}_2$ may be used for the second transport block, with both $\underline{\mathbf{w}}_1$ and $\underline{\mathbf{w}}_2$ being from $\underline{\mathbf{W}}_2$. In general, the number of bits to use for the PCI may be reduced by exploiting the structure of the precoding matrices, so that some precoding information may be sent explicitly while other precoding information may be sent implicitly or inferred from the signaled precoding information.

[0039] The PCI may also include other information such as information on the UE capabilities. The UE may convey its capabilities, such as the specific UE MIMO receiver architecture, to the UTRAN during call setup. For example, a flag in the UE capabilities may be set to indicate that the UE supports SIC. The Node B scheduler may use the information on the UE capabilities to schedule UEs for transmission and to allocate resources to the scheduled UEs. As an example, the Node B scheduler may allocate the same code resources to a given UE for both transport blocks, and the UE may effectively perform interference cancellation for the second transport block if the UE supports SIC. If the Node B scheduler knows which of the two transport blocks will be recovered first and potentially cancelled from the received signals before recovering the second transport block, then the scheduler may choose to mix two UEs in a Spatial Division Multiple Access (SDMA) manner by using only the PCI and CQI for the transport block that will be recovered first. The transport

block that would be decoded first in case of a SIC-capable UE is the one for which the preferred primary precoding vector and the associated CQI are signaled. The Node B scheduler may use only the information in the PCI/CQI reports for the preferred primary transport blocks from different UEs for SDMA if the Node B scheduler wants to schedule a transport block of one UE in parallel with a transport block for another UE.

[0040] The UE may send CQI for one or more transport blocks, and the Node B may process each transport block based on the CQI sent by the UE. The CQI may be provided in various manners.

[0041] In one design, a CQI value may be provided for each transport block and may be used to process the transport block at the Node B. In this design, one CQI value may be provided if one transport block is preferred by the UE, and two CQI values may be provided if two transport blocks are preferred. The one or two CQI values may be sent with the associated PCI in the same TTI. Alternatively, two CQI values for two transport blocks may be sent in a time division multiplexed (TDM) manner over two TTIs, one CQI value in each TTI. The PCI that is associated with the set of TDMed CQI values together with these CQI values form one PCI/CQI report at a lower rate than without time division multiplexing. Each CQI value may have a sufficient number of bits of resolution to achieve the desired granularity. The same granularity may be used for each CQI value. Alternatively, different granularities may be used for the CQI values for different numbers of transport blocks. For example, a 5-bit CQI value may be provided for one transport block, and two 4-bit CQI values may be provided for two transport blocks. Computer simulation indicates a negligible loss of 0 to 2 percents in sector throughput when using 4-bit CQI values instead of 5-bit CQI values for two transport blocks.

[0042] The CQI may be combined with the PCI and/or rank. Different amounts of CQI information may be sent depending on whether one or two transport blocks are preferred by the UE. By combining the CQI with the PCI and/or rank, fewer total number of bits may be needed for the feedback information. Furthermore, this combining of PCI, rank and CQI may have the advantage that all the information on the associated PCI, rank and CQI that the Node B scheduler uses to effectively allocate resources to UEs are available simultaneously. If these components of the feedback are received at different times and/or at different update rates, then the Node B scheduler may lack information that would be needed for good scheduling. For instance, it may not be helpful if the Node B scheduler obtains an update of the PCI and rank but does not know the supported transport block sizes for this particular PCI and rank combination.

[0043] In one design, the PCI, rank and CQI are combined into a single PCI/CQI report, which may also be referred to as composite PCI and CQI bits. Table 6 shows a design of a 10-bit PCI/CQI report for the PCI given in Table 5. In this design, the most significant bit (MSB) is a precoding matrix (PM) selector bit that indicates which precoding matrix is selected. The PM bit is equal to '0' when $\mathbf{W}_1$ is selected and equal to '1' when $\mathbf{W}_2$ is selected. The PM bit is equal to the PCI_2 bit in Table 5. The next MSB is a column index (CI) bit that indicates (i) which column of the selected precoding matrix to use when a single transport block is preferred or (ii) which transport block is the master transport block when two transport blocks are preferred. The CI bit is equal to the PCI_1 bit in Table 5. The remaining eight bits convey the CQI for one or two transport blocks. There are 256 possible values for each PM and CI combination, with the first 32 values being used to convey one CQI value for one transport block, and the remaining 224 values being used to convey two CQI values for two transport blocks. A logical OR of the third through fifth MSBs is equal to '0' for one transport block and equal to '1' for two transport blocks, and is thus equal to the PCI_0 bit in Table 5.

Table 6

Index	PM	CI	CQI Values								Used For
0	0	0	0	0	0	0	0	0	0	0	32 CQI levels for single transport block with column #1 of precoding matrix #1
1	0	0	0	0	0	0	0	0	0	1	
:											
31	0	0	0	0	0	1	1	1	1	1	224 CQI combinations for two transport blocks with precoding matrix #1 and master #1
32	0	0	0	0	1	0	0	0	0	0	
33	0	0	0	0	1	0	0	0	0	1	
:											32 CQI levels for single transport block with column #2 of precoding matrix #1
255	0	0	1	1	1	1	1	1	1	1	
256	0	1	0	0	0	0	0	0	0	0	
257	0	1	0	0	0	0	0	0	0	1	32 CQI levels for single transport block with column #2 of precoding matrix #1
:											
287	0	1	0	0	0	1	1	1	1	1	

(continued)

	Index	PM	CI	CQI Values							Used For	
5	288	0	1	0	0	1	0	0	0	0	224 CQI combinations for two transport blocks with precoding matrix #1 and master #2	
	289	0	1	0	0	1	0	0	0	0		1
	⋮											
511	0	1	1	1	1	1	1	1	1	1		
10	512	1	0	0	0	0	0	0	0	0	32 CQI levels for single transport block with column #1 of precoding matrix #2	
	513	1	0	0	0	0	0	0	0	0		1
	⋮											
543	1	0	0	0	0	1	1	1	1	1		
15	544	1	0	0	0	1	0	0	0	0	224 CQI combinations for two transport blocks with precoding matrix #2 and master #1	
	545	1	0	0	0	1	0	0	0	0		1
	⋮											
767	1	0	1	1	1	1	1	1	1	1		
20	768	1	1	0	0	0	0	0	0	0	32 CQI levels for single transport block with column #2 of precoding matrix #2	
	769	1	1	0	0	0	0	0	0	0		1
	⋮											
799	1	1	0	0	0	1	1	1	1	1		
25	800	1	1	0	0	1	0	0	0	0	224 CQI combinations for two transport blocks with precoding matrix #2 and master #2	
	801	1	1	0	0	1	0	0	0	0		1
	⋮											
1023	1	1	1	1	1	1	1	1	1	1		
30												

[0044] In the design shown in Table 6, the two MSBs of the PCI/CQI report convey the PCI, and the eight least significant bits (LSBs) of the PCI/CQI report convey the rank and CQI. An 8-bit composite value for the LSB portion of the PCI/CQI report has an overall range of 0 to 255. The lower range of 0 to 31 is used for one transport block (or rank = 1), and the upper range of 32 to 255 is used for two transport blocks (or rank = 2). One 5-bit CQI value may be sent when one transport block is preferred by the UE, and two 4-bit CQI values may be sent when two transport blocks are preferred. Since the upper range has only 224 possible values for two 4-bit CQI values, 32 out of 256 possible CQI combinations are not supported. The 32 CQI combinations that are least likely to occur may be eliminated.

[0045] FIG. 4 shows a design of eliminating 32 CQI combinations for two 4-bit CQI values. The horizontal axis shows the 16 possible CQI levels for transport block #1, and the vertical axis shows the 16 possible CQI levels for transport block #2. When two transport blocks are preferred by the UE, the channel qualities of the two transport blocks are normally not totally uncorrelated. Hence, it may be unlikely to have CQI combinations with extreme asymmetry for the two transport blocks, e.g., very low CQI level for one transport block and very high CQI level for the other transport block. FIG. 4 shows 32 asymmetric CQI combinations with shading that may be eliminated.

[0046] If the measured CQI values for the two transport blocks map to one of the eliminated CQI combinations, then the larger of the two CQI values may be reduced until the resultant CQI values map to an allowed CQI combination. In the example shown in FIG. 4, if the measured CQI values map to one of the eliminated CQI combinations in the upper left corner, then the CQI value of transport block #2 may be reduced until an allowed CQI combination is obtained. If the measured CQI values map to one of the eliminated CQI combinations in the lower right corner, then the CQI value of transport block #1 may be reduced until an allowed CQI combination is obtained.

[0047] Table 7 shows another design of a 10-bit PCI/CQI report for the PCI given in Table 4. In this design, one 5-bit CQI value is sent when one transport block is preferred. One 5-bit CQI value and one 4-bit CQI value are sent when two transport blocks are preferred, with the 5-bit CQI value being used for the better transport block. Since there are 448 possible values for two transport blocks, 64 out of 512 possible CQI combinations are not supported. The 64 CQI combinations that are least likely to occur may be eliminated.

Table 7

	Index	PCI/CQI Values										Used For
5	0	0	0	0	0	0	0	0	0	0	32 CQI levels for single transport block with precoding vector $\underline{w}_0$	
	⋮											
	31	0	0	0	0	0	0	1	1	1		1
10	32	0	0	0	0	1	0	0	0	0	0	32 CQI levels for single transport block with precoding vector $\underline{w}_3$
	⋮											
	63	0	0	0	0	0	1	1	1	1	1	
15	64	0	0	0	1	0	0	0	0	0	0	32 CQI levels for single transport block with precoding vector $\underline{w}_2$
	⋮											
	95	0	0	0	1	0	1	1	1	1	1	
20	96	0	0	0	1	1	0	0	0	0	0	32 CQI levels for single transport block with precoding vector $\underline{w}_1$
	⋮											
	127	0	0	0	1	1	1	1	1	1	1	
25	128	0	0	1	0	0	0	0	0	0	0	448 CQI combinations for two transport blocks with precoding matrix $\underline{w}_1$
	⋮											
	575	1	0	0	0	1	1	1	1	1	1	
30	576	1	0	0	1	0	0	0	0	0	0	448 CQI combinations for two transport blocks with precoding matrix $\underline{w}_2$
	⋮											
	1023	1	1	1	1	1	1	1	1	1	1	

[0048] Table 8 shows yet another design of a 10-bit PCI/CQI report for 2-bit PCI and 8-bit CQI and rank. In this design, a 2-bit PCI value may indicate one of four possible precoding vectors, e.g., as shown in Table 6 and equations (3) and (4). An 8-bit composite value may indicate the CQI and rank, e.g., as shown in Table 6.

Table 8

	Index	PCI Values		CQI Values								Used For
40	0	0	0	0	0	0	0	0	0	0	0	CQI levels for single transport block with precoding vector $\underline{\mathbf{w}}_0$
	⋮											
	30	0	0	0	0	0	1	1	1	1	0	
45	31	0	0	0	0	0	1	1	1	1	1	225 CQI combinations for two transport blocks with vectors $\underline{\mathbf{w}}_0$ and $\underline{\mathbf{w}}_3$
	⋮											
	255	0	0	1	1	1	1	1	1	1	1	
50	256	0	1	0	0	0	0	0	0	0	0	31 CQI levels for single transport block with precoding vector $\underline{\mathbf{w}}_1$
	⋮											
	286	0	1	0	0	0	1	1	1	1	0	
55	287	0	1	0	0	0	1	1	1	1	1	225 CQI combinations for two transport blocks with vectors $\underline{\mathbf{w}}_1$ and $\underline{\mathbf{w}}_2$
	⋮											
	511	0	1	1	1	1	1	1	1	1	1	

(continued)

Index	PCI Values		CQI Values								Used For
5	512	1	0	0	0	0	0	0	0	0	31 CQI levels for single transport block with precoding vector $\mathbf{w}_2$
	542	1	0	0	0	0	1	1	1	1	
10	543	1	0	0	0	0	1	1	1	1	225 CQI combinations for two transport blocks with vectors $\mathbf{w}_2$ and $\mathbf{w}_1$
	767	1	0	1	1	1	1	1	1	1	
15	768	1	1	0	0	0	0	0	0	0	31 CQI levels for single transport block with precoding vector $\mathbf{w}_3$
	798	1	1	0	0	0	1	1	1	1	
20	799	1	1	0	0	0	1	1	1	1	225 CQI combinations for two transport blocks with vectors $\mathbf{w}_3$ and $\mathbf{w}_0$
	1023	1	1	1	1	1	1	1	1	1	

[0049] In the design shown in Table 8, the 8-bit composite value has an overall range of 0 to 255, which may be partitioned into (i) a lower range of 0 to 30 for one transport block (or rank = 1) and (ii) an upper range of 31 to 255 for two transport blocks (or rank = 2). The upper range includes 225 values, which may be used to support 15 levels for each of two CQI values. If one transport block is preferred, then one CQI value within a range of 0 to 30 may be determined and provided as the 8-bit composite value. If two transport blocks are preferred, then one CQI value within a range of 0 to 14 may be determined for each transport block, and the two CQI values may be provided as the 8-bit composite value. The 8-bit composite value may be given as:

$$CQI_c = \begin{cases} CQI_s & \text{for one transport block} \\ 15 \times CQI_1 + CQI_2 + 31 & \text{for two transport blocks} \end{cases} \quad \text{Eq (5)}$$

where CQI_s is a CQI value within {0...30} for one transport block,
 CQI_1 and CQI_2 are CQI values within {0...14} for two transport blocks, and
 CQI_c is the 8-bit composite value for one or two transport blocks.

[0050] In general, the PCI, rank and CQI may be combined in various manners. Tables 6 to 8 give three examples in which the PCI, rank and CQI are combined into a 10-bit PCI/CQI report. The number of bits to use for the PCI/CQI report may be dependent on various factors such as the number of supported precoding matrices, the maximum number of transport blocks, the number of levels for the CQI value for each transport block, UE capability (e.g., SIC), etc. The PCI, rank and CQI may be mapped to a PCI/CQI report based on any mapping, with three example mappings shown in Tables 6 to 8.

[0051] The PCI, rank and CQI may be sent by the UE in various manners. Several schemes for sending the PCI, rank and CQI are described below.

[0052] FIG. 5 shows a design of sending the PCI, rank and CQI on the HS-DPCCH. In each TTI, ACK/NACK information may be sent in the first slot of the TTI, and the PCI, rank and CQI may be sent in the second and third slots of the TTI. In each TTI, one ACK/NACK bit for one transport block or two ACK/NACK bits for two transport blocks may be channel encoded to obtain 10 code bits. The 10 code bits for ACK/NACK may be spread and mapped to the first slot of the TTI.

[0053] In the design shown in FIG. 5, a PCI/CQI report may comprise ten composite PCI and CQI bits and may be generated, e.g., as shown in Table 6, 7 or 8. In another design, the PCI, rank and CQI may be sent separately, e.g., with three bits used for the PCI and rank, and seven bits used for the CQI. In any case, the ten bits for the PCI/CQI report may be channel encoded with a (20, 10) block code to obtain a codeword of 20 code bits. The (20, 10) block code may be a sub-code of a second order Reed-Muller code and may be defined in similar manner as a (20, 5) code used in 3GPP Release 6 for the CQI sent on the HS-DPCCH. The 20 code bits for the PCI/CQI report may be spread and

mapped to the second and third slots of the TTI.

[0054] In general, a total of X bits may be sent on the HS-DPCCH for the PCI, rank and CQI, where X may be any integer value. The X bits may be for a combined PCI/CQI report, e.g., as shown in Table 6, 7 or 8. Alternatively, the X bits may include M bits for the PCI and N bits for the CQI and rank. A $(20, X)$ block code may be used to encode the X total bits for the PCI, rank and CQI to obtain 20 code bits. For example, 12 total bits may be sent with a $(20, 12)$ block code and may support 32 CQI levels for one transport block and 992 CQI combinations for two transport blocks based on the PCI/CQI mapping in Table 6. As another example, 11 total bits may be sent with a $(20, 11)$ block code and may support (i) 32 CQI levels for each transport block based on the PCI/CQI mapping in Table 7 or (ii) 3 bits for PCI and rank and a 4-bit CQI value for each transport block with separate PCI/rank and CQI. The transmit power of the HS-DPCCH may be set to achieve the desired decoding performance for the X bits sent for the PCI, rank and CQI.

[0055] If BPSK is used for the HS-DPCCH, as defined in 3GPP Release 6, then 20 code bits may be sent in two slots. If QPSK is used for the HS-DPCCH, then 40 code bits may be sent in two slots. A $(40, X)$ block code may then be used to encode X bits for PCI, rank and CQI into 40 code bits, which may be sent in two slots using QPSK. The use of QPSK for the HS-DPCCH may improve performance in some scenarios.

[0056] In general, a trade-off may be made between transmit power of the HS-DPCCH and granularity of the CQI. More transmit power may be used for the HS-DPCCH in order to achieve the same CQI granularity for both one and two transport blocks. If transmit power on the uplink is a concern, then the UE may be configured to send CQI reports at a slower rate, which may then result in slower link adaptation speed.

[0057] In another design, the PCI and rank are sent on the uplink DPCCH and the CQI is sent on the HS-DPCCH. Referring back to FIG. 3, the uplink DPCCH carries a pilot field, a transport format combination indicator (TFCI) field, a feedback information (FBI) field, and a transmit power control (TPC) field. The FBI field may be 0 or 1 bit in length. The FBI is originally defined to carry information on the selection of beamforming weights for CLTD. The FBI may be used to send the PCI and rank.

[0058] FIG. 6 shows one design of sending the PCI and possibly the rank on the uplink DPCCH. The PCI and rank should be sent on the uplink DPCCH at approximately the same time that the associated CQI is sent on the HS-DPCCH. The HS-DPCCH may not be aligned with the uplink DPCCH at slot boundary. Nevertheless, a given TTI will cover one CQI transmission on the HS-DPCCH and three FBI bits in three slots on the uplink DPCCH.

[0059] In one design, the three FBI bits in one TTI are used to convey the selection of precoding matrix $\mathbf{W}_1$ or $\mathbf{W}_2$, as shown in Table 3. In this design, the three FBI bits may carry one information bit to indicate $\mathbf{W}_1$ or $\mathbf{W}_2$, and a $(3,1)$ block code may be used for the information bit to improve reliability. For example, the information bit may be repeated three times and sent as three FBI bits. Information on whether one or two transport blocks are preferred (i.e., the rank), which column of the selected precoding matrix to use for one transport block, and how the CQI values are mapped to the different columns of the selected precoding matrix may be provided with the CQI sent on the HS-DPCCH.

[0060] In another design, the three FBI bits in one TTI are used to convey three PCI bits, which may be defined as shown in Table 4 or 5. The FBI bits may be sent at sufficient power level in order to achieve the desired reliability for the PCI bits.

[0061] Various designs for reporting the PCI, rank and CQI have been described above. To reduce impact to existing 3GPP Release 6, the PCI, rank and CQI may be combined into one X -bit PCI/CQI report, which may be encoded using a $(20, X)$ block code and sent in two slots on the HS-DPCCH using BPSK. X may be equal to 10 for the designs shown in Tables 6, 7 and 8 and may be equal to other values for other designs.

[0062] Combining and sending the PCI, rank and CQI in one PCI/CQI report may provide certain advantages. First, the PCI, rank and CQI would be available together and may be used for scheduling decisions on data transmission. Second, combining the PCI, rank and CQI may allow a variable number of CQI values for a variable number of transport blocks to be sent in each TTI with the same X -bit report size. The same CQI reporting delay may also be achieved regardless of whether one or two transport blocks are preferred by the UE. Keep the reporting delay for CQI as small as possible may allow for better tracking of changes in the channel conditions.

[0063] FIG. 7 shows a design of a process 700 for sending feedback information. PCI for data transmission from a transmitter (e.g., a Node B) to a receiver (e.g., a UE) may be determined (block 712). CQI for the data transmission may also be determined (block 714). A rank indicative of the number of transport blocks to send in parallel for the data transmission may also be determined (block 716). The PCI, rank and CQI may be determined by evaluating different hypotheses and using the PCI, rank and CQI of the hypothesis with the best performance. A report may be formed based on the PCI, rank and CQI (block 718) and may be sent to the transmitter (block 720).

[0064] The PCI may comprise a precoding matrix or a precoding vector to use for the data transmission. The PCI may also comprise at least one precoding vector for at least one transport block to send (or preferred) for the data transmission, and additional precoding vector(s) for additional transport block(s), if sent, may be determined based on the at least one precoding vector conveyed by the PCI. For example, the PCI may comprise a primary precoding vector for a primary transport block. A secondary precoding vector for a secondary transport block, if sent, may be determined based on the primary precoding vector.

[0065] The CQI may comprise at least one CQI value for at least one transport block to send for the data transmission. The rank and CQI may be combined based on a mapping comprising multiple ranges of values, with each range of values corresponding to a different number of transport blocks. The CQI may comprise one CQI value and may be within a first range of values (e.g., from 0 to 30) if one transport block is preferred by the receiver. The CQI may comprise two CQI values and may be within a second range of values (e.g., from 31 to 255) if two transport blocks are preferred.

[0066] The PCI, rank and CQI may also be combined based on a mapping comprising a plurality of ranges of values corresponding to a plurality of values for the PCI. Each range of values may comprise multiple subranges of values corresponding to different numbers of transport blocks, e.g., as shown in Table 6. The plurality of ranges may comprise (i) at least two ranges of a first size (e.g., 32 CQI levels) corresponding to at least two PCI values for one transport block and (ii) at least one range of a second size (e.g., 448 CQI combinations) corresponding to at least one PCI value for multiple transport blocks, e.g., as shown in Table 7. The PCI, rank and CQI may also be combined in other manners or sent separately.

[0067] For block 720, the report may be encoded with a forward error correction (FEC) code to obtain a coded report, which may be sent on the HS-DPCCH. For example, the report may be encoded with a block code to obtain a codeword, which may be sent on the HS-DPCCH, as shown in FIG. 5. The PCI may also be sent on the uplink DPCCH, and the CQI and rank may be sent on the HS-DPCCH, e.g., as shown in FIG. 6.

[0068] FIG. 8 shows a design of a process 800 for sending data transmission. A report comprising PCI, rank and CQI may be received by a transmitter, e.g., a Node B (block 812). The number of transport blocks preferred for the data transmission may be determined based on one of multiple ranges of values within which the CQI falls (block 814). The multiple ranges may comprise first and second ranges. One CQI value for one transport block may be obtained if the CQI falls within the first range. Two CQI values for two transport blocks may be obtained if the CQI falls within the second range. At least one transport block may be processed based on the CQI (block 816). For example, each transport block may be processed based on a coding and modulation scheme determined by the CQI value for that transport block. The at least one transport block may be precoded based on the PCI (block 818). The PCI may comprise a precoding matrix or a precoding vector. The at least one transport block may then be precoded based on the precoding matrix or vector from the PCI. The PCI may also comprise a primary precoding vector, and a primary transport block may be precoded based on the primary precoding vector. If more than one transport block is sent, then a secondary transport block may be precoded based on a secondary precoding vector associated with the primary precoding vector.

[0069] Those of skill in the art would understand that information and signals may be represented using any of a variety of different technologies and techniques. For example, data, instructions, commands, information, signals, bits, symbols, and chips that may be referenced throughout the above description may be represented by voltages, currents, electro-magnetic waves, magnetic fields or particles, optical fields or particles, or any combination thereof.

[0070] Those of skill would further appreciate that the various illustrative logical blocks, modules, circuits, and algorithm steps described in connection with the disclosure herein may be implemented as electronic hardware, computer software, or combinations of both. To clearly illustrate this interchangeability of hardware and software, various illustrative components, blocks, modules, circuits, and steps have been described above generally in terms of their functionality. Whether such functionality is implemented as hardware or software depends upon the particular application and design constraints imposed on the overall system. Skilled artisans may implement the described functionality in varying ways for each particular application, but such implementation decisions should not be interpreted as causing a departure from the scope of the present disclosure.

[0071] The various illustrative logical blocks, modules, and circuits described in connection with the disclosure herein may be implemented or performed with a general-purpose processor, a digital signal processor (DSP), an application specific integrated circuit (ASIC), a field programmable gate array (FPGA) or other programmable logic device, discrete gate or transistor logic, discrete hardware components, or any combination thereof designed to perform the functions described herein. A general-purpose processor may be a microprocessor, but in the alternative, the processor may be any conventional processor, controller, microcontroller, or state machine. A processor may also be implemented as a combination of computing devices, e.g., a combination of a DSP and a microprocessor, a plurality of microprocessors, one or more microprocessors in conjunction with a DSP core, or any other such configuration.

[0072] The steps of a method or algorithm described in connection with the disclosure herein may be embodied directly in hardware, in a software module executed by a processor, or in a combination of the two. A software module may reside in RAM memory, flash memory, ROM memory, EPROM memory, EEPROM memory, registers, hard disk, a removable disk, a CD-ROM, or any other form of storage medium known in the art. An exemplary storage medium is coupled to the processor such that the processor can read information from, and write information to, the storage medium. In the alternative, the storage medium may be integral to the processor. The processor and the storage medium may reside in an ASIC. The ASIC may reside in a user terminal. In the alternative, the processor and the storage medium may reside as discrete components in a user terminal.

[0073] The previous description of the disclosure is provided to enable any person skilled in the art to make or use the disclosure. Various modifications to the disclosure will be readily apparent to those skilled in the art, and the generic

principles defined herein may be applied to other variations without departing from the spirit or scope of the disclosure. Thus, the disclosure is not intended to be limited to the examples and designs described herein but is to be accorded the widest scope consistent with the principles and novel features disclosed herein.

5

Claims

1. A method comprising:

10

determining precoding control indication, PCI, for data transmission from a transmitter (110) to a receiver (120);
determining channel quality indication, CQI, for the data transmission, wherein the determining the CQI for the data transmission comprises:

15

determining one CQI value for one transport block when one transport block is used for the data transmission,
and
determining two CQI values for two transport blocks when two transport blocks are used for the data transmission;

20

forming a report based on the PCI and the CQI;
sending the report to the transmitter (110); and **characterized by** relating the size and number of the CQI to a rank for the data transmission.

2. The method of claim 1, wherein the determining the CQI further comprises:

25

forming the CQI to comprise the one CQI value for the one transport block or the two CQI values for the two transport blocks, the CQI being within a first range of values for one CQI value and within a second range of values for two CQI values.

3. The method of claim 1, further comprising:

30

determining a rank indicative of the number of transport blocks to send for the data transmission; and
combining the rank and the CQI based on a mapping comprising multiple ranges of values, each range of values corresponding to a different number of transport blocks, and wherein the report is formed based on the combined rank and CQI.

35

4. The method of claim 1, further comprising:

40

encoding the report with a forward error correction, FEC, code to obtain a coded report; and
sending the coded report on a Dedicated Physical Control Channel for HS-DSCH, HS-DPCCH.

5. The method of claim 1, further comprising:

45

encoding the report with a block code to obtain a codeword; and
sending the codeword on a Dedicated Physical Control Channel for HS-DSCH, HS-DPCCH.

6. An apparatus comprising:

50

means (230) for determining precoding control indication, PCI, for data transmission from a transmitter (110) to a receiver (120);
means (230) for determining channel quality indication, CQI, for the data transmission, wherein the means for determining the CQI for the data transmission comprises:

55

means (230) for determining one CQI value for one transport block when one transport block is used for the data transmission, and
means (230) for determining two CQI values for two transport blocks when two transport blocks are used for the data transmission;

means (230) for forming a report based on the PCI and the CQI;

means (230) for sending the report to the transmitter (110); and **characterized in that** the size and number of the CQI are related to a rank for the data transmission.

7. The apparatus of claim 6, wherein the means for determining the CQI further comprises:

means for forming the CQI to comprise the one CQI value for the one transport block or the two CQI values for the two transport blocks, the CQI being within a first range of values for one CQI value and within a second range of values for two CQI values.

8. The apparatus of claim 6, further comprising:

means for determining a rank indicative of the number of transport blocks to send for the data transmission; and means for combining the rank and the CQI based on a mapping comprising multiple ranges of values, each range of values corresponding to a different number of transport blocks, and wherein the report is formed based on the combined rank and CQI.

9. The apparatus of claim 6, further comprising:

means for encoding the report with a forward error correction, FEC, code to obtain a coded report; and means for sending the coded report on a Dedicated Physical Control Channel for HS-DSCH, HS-DPCCH.

10. The apparatus of claim 6, further comprising:

means for encoding the report with a block code to obtain a codeword; and means for sending the codeword on a Dedicated Physical Control Channel for HS-DSCH, HS-DPCCH.

11. A method comprising:

receiving a report comprising precoding control indication, PCI, and channel quality indication, CQI; processing at least one transport block based on the CQI, wherein the processing the at least one transport block based on the CQI comprises:

obtaining one CQI value for one transport block when the CQI falls within a first range of value; and obtaining two CQI values for two transport blocks when the CQI falls within a second range of values;

precoding the at least one transport block based on the PCI; and **characterized by** a number and a size of the CQI being related to a rank of a data transmission.

12. The method of claim 11, wherein the processing the at least one transport block based on the CQI further comprises:

processing each transport block based on a coding and modulation scheme determined by a CQI value for the transport block.

13. The method of claim 11, wherein the precoding the at least one transport block based on the PCI comprises:

determining a precoding matrix or a precoding vector for the at least one transport block based on the PCI, and precoding the at least one transport block based on the precoding matrix or the precoding vector.

14. The method of claim 11, wherein the precoding the at least one transport block based on the PCI comprises:

determining a primary precoding vector based on the PCI, precoding a primary transport block based on the primary precoding vector, and precoding a secondary transport block based on a secondary precoding vector associated with the primary precoding vector.

15. An apparatus comprising:

means (270) for receiving a report comprising precoding control indication, PCI, and channel quality indication,

CQI;

means (270) for processing at least one transport block based on the CQI, wherein the means for processing the at least one transport block based on the CQI comprises:

5 means for obtaining one CQI value for one transport block when the CQI falls within a first range of value; and means for obtaining two CQI values for two transport blocks when the CQI falls within a second range of values;

10 means (270) for precoding the at least one transport block based on the PCI; and **characterized in that** a number and a size of the CQI are related to a rank of a data transmission.

Patentansprüche

15 1. Ein Verfahren, das Folgendes aufweist:

Bestimmen einer Vorcodierungssteueranzeige bzw. PCI (PCI = precoding control indication) für eine Daten-
sendung bzw. Datenübertragung von einem Sender (110) an einen Empfänger (120);

20 Bestimmen einer Kanalqualitätsanzeige bzw. CQI (CQI = channel quality indication) für die Datenübertragung, wobei das Bestimmen der CQI für die Datenübertragung Folgendes aufweist:

Bestimmen eines CQI-Wertes für einen Transportblock, wenn ein Transportblock für die Datenübertragung
genutzt wird, und

25 Bestimmen von zwei CQI-Werten für zwei Transportblöcke, wenn zwei Transportblöcke für die Datenüber-
tragung genutzt werden;

Bilden eines Berichts basierend auf der PCI und der CQI,

Senden des Berichts an den Sender (110); und das **gekennzeichnet ist durch** In-Beziehung-Setzen der
Größe und Anzahl der CQI zu einem Rang für die Datenübertragung.

30 2. Verfahren nach Anspruch 1, wobei das Bestimmen der CQI weiter Folgendes aufweist:

Bilden der CQI, so dass sie den einen CQI-Wert für den einen Transportblock oder die zwei CQI-Werte für die
zwei Transportblöcke aufweist, wobei die CQI innerhalb eines ersten Bereichs von Werten für einen CQI-Wert
ist und innerhalb eines zweiten Bereichs von Werten für zwei CQI-Werte ist.

35 3. Verfahren nach Anspruch 1, das weiter Folgendes aufweist:

Bestimmen eines Rangs, der die Anzahl von Transportblöcken, die für die Datenübertragung gesendet werden
sollen, anzeigt; und

40 Kombinieren des Rangs und der CQI basierend auf einer Zuordnung, die mehrere Bereiche von Werten aufweist,
wobei jeder Bereich von Werten einer unterschiedlichen Anzahl von Transportblöcken entspricht und wobei
der Bericht basierend auf dem kombinierten Rang und der CQI gebildet wird.

45 4. Verfahren nach Anspruch 1, das weiter Folgendes aufweist:

Codieren des Berichts mit einem Vorwärtsfehlerkorrekturcode bzw. FEC-Code (FEC = forward error correction)
zum Erlangen eines codierten Berichts; und

50 Senden des codierten Berichts auf einem dedizierten, physischen Steuerkanal für den HS-DSCH bzw. HS-
DPCCH (HS-DPCCH = Dedicated Physical Control Channel for HS-DSCH).

55 5. Verfahren nach Anspruch 1, das weiter Folgendes aufweist:

Codieren des Berichts mit einem Blockcode, um ein Codewort zu erlangen; und

Senden des Codeworts auf einem HS-DPCCH.

6. Eine Vorrichtung, die Folgendes aufweist:

Mittel (230) zum Bestimmen einer Vorcodierungssteueranzeige bzw. PCI (PCI = precoding control indication)

für eine Datensendung bzw. Datenübertragung von einem Sender (110) an einen Empfänger (120);
Mittel (230) zum Bestimmen einer Kanalqualitätsanzeige bzw. CQI (CQI = channel quality indication) für die
Datenübertragung, wobei die Mittel zum Bestimmen der CQI für die Datenübertragung Folgendes aufweisen:

5 Mittel (230) zum Bestimmen eines CQI-Wertes für einen Transportblock, wenn ein Transportblock für die
Datenübertragung genutzt wird, und Mittel (230) zum Bestimmen von zwei CQI-Werten für zwei Transport-
blöcke, wenn zwei Transportblöcke für die Datenübertragung genutzt werden Mittel (230) zum Bilden eines
Berichts basierend auf der PCI und der CQI,
10 Mittel (230) zum Senden des Berichts an den Sender (110); und die **dadurch gekennzeichnet ist, dass**
die Größe und die Anzahl der CQI in Beziehung stehen mit einem Rang für die Datenübertragung.

7. Vorrichtung nach Anspruch 6, wobei die Mittel zum Bestimmen der CQI weiter Folgendes aufweisen:

15 Mittel zum Bilden der CQI, so dass sie einen CQI-Wert für den einen Transportblock oder die zwei CQI-Werte
für die zwei Transportblöcke aufweist, wobei die CQI innerhalb eines ersten Bereichs von Werten für einen
CQI-Wert ist und innerhalb eines zweiten Bereichs von Werten für zwei CQI-Werte ist.

8. Vorrichtung nach Anspruch 6, die weiter Folgendes aufweist:

20 Mittel zum Bestimmen eines Rangs, der die Anzahl von Transportblöcken aufweist, die für die Datenübertragung
gesendet werden sollen; und
Mittel zum Kombinieren des Rangs und der CQI basierend auf einer Zuordnung, die mehrere Bereiche von
Werten aufweist, wobei jeder Bereich von Werten einer unterschiedlichen Anzahl von Transportblöcken ent-
spricht und wobei der Bericht basierend auf dem kombinierten Rang und der CQI gebildet wird.

25

9. Vorrichtung nach Anspruch 6, die weiter Folgendes aufweist:

Mittel zum Codieren des Berichts mit einem Vorwärtsfehlerkorrekturcode bzw. FEC-Code (FEC = forward error
correction) zum Erlangen eines codierten Berichts; und
30 Mittel zum Senden des codierten Berichts auf einem dedizierten, physischen Steuerkanal für den HS-DSCH
bzw. HS-DPCCH (HS-DPCCH = Dedicated Physical Control Channel for HS-DSCH).

10. Vorrichtung nach Anspruch 6, die weiter Folgendes aufweist:

35 Mittel zum Codieren des Berichts mit einem Blockcode, um ein Codewort zu erlangen; und
Mittel zum Senden des Codeworts auf einem HS-DPCCH.

11. Ein Verfahren, das Folgendes aufweist:

40 Empfangen eines Berichts, der eine Vorcodierungssteueranzeige bzw. PCI (PCI = precoding control indication)
und eine Kanalqualitätsanzeige bzw. CQI (CQI = channel quality indication) aufweist;
Verarbeiten wenigstens eines Transportblocks basierend auf der CQI, wobei die Verarbeitung des wenigstens
einen Transportblockes basierend auf der CQI Folgendes aufweist:

45 Erlangen eines CQI-Wertes für einen Transportblock, wenn die CQI in einen ersten Bereich von Werten
fällt; und
Erlangen von zwei CQI-Werten für zwei Transportblöcke, wenn die CQI in einen zweiten Bereich von Werten
fällt;
Vorcodieren des wenigstens einen Transportblockes basierend auf der PCI; und
50 das **dadurch gekennzeichnet ist, dass** eine Anzahl und eine Größe der CQI mit einem Rang einer Da-
tenübertragung in Beziehung stehen.

12. Verfahren nach Anspruch 11, wobei das Verarbeiten des wenigstens einen Transportblockes basierend auf der
CQI weiter Folgendes aufweist:

55

Verarbeiten jedes Transportblockes basierend auf einem Codierungs- und Modulationsschema, das durch
einen CQI-Wert für den Transportblock bestimmt wird.

13. Verfahren nach Anspruch 11, wobei die Vorcodierung des wenigstens einen Transportblockes basierend auf der PCI Folgendes aufweist:

5 Bestimmen einer Vorcodierungsmatrix oder eines Vorcodierungsvektors für den wenigstens einen Transportblock basierend auf der PCI, und
Vorcodieren des wenigstens einen Transportblockes basierend auf der Vorcodierungsmatrix oder dem Vorcodierungsvektor.

- 10 14. Verfahren nach Anspruch 11, wobei das Vorcodieren des wenigstens einen Transportblockes basierend auf der PCI Folgendes aufweist:

Bestimmen eines primären Vorcodierungsvektors basierend auf der PCI,
Vorcodieren eines primären Transportblockes basierend auf dem primären Vorcodierungsvektor, und
15 Vorcodieren eines sekundären Transportblockes basierend auf einem sekundären Vorcodierungsvektor, der mit dem primären Vorcodierungsvektor assoziiert ist.

15. Eine Vorrichtung, die Folgendes aufweist:

20 Mittel (270) zum Empfangen eines Berichts, der eine Vorcodierungssteueranzeige bzw. PCI (PCI = precoding control indication) und eine Kanalqualitätsanzeige bzw. CQI (CQI = channel quality indication) aufweist;
Mittel (270) zum Verarbeiten wenigstens eines Transportblocks basierend auf der CQI, wobei die Mittel zum Verarbeiten des wenigstens einen Transportblockes basierend auf der CQI Folgendes aufweisen:

25 Mittel zum Erlangen eines CQI-Wertes für einen Transportblock, wenn die CQI in einen ersten Bereich von Werten fällt; und
Mittel zum Erlangen von zwei CQI-Werten für zwei Transportblöcke, wenn die CQI in einen zweiten Bereich von Werten fällt;
Mittel (270) zum Vorcodieren des wenigstens einen Transportblockes basierend auf der PCI; und
30 die **dadurch gekennzeichnet ist, dass** eine Anzahl und eine Größe der CQI mit einem Rang einer Datenübertragung in Beziehung stehen.

Revendications

- 35 1. Procédé comprenant :

déterminer une indication de contrôle de précodage, PCI, pour une transmission de données à partir d'un émetteur (110) vers un récepteur (120) ;
40 déterminer une indication de qualité de canal, CQI, pour la transmission de données, la détermination de la CQI pour la transmission de données comprenant :

déterminer une valeur CQI pour un seul bloc de transport lorsqu'un seul bloc de transport est utilisé pour la transmission de données, et
45 déterminer deux valeurs de CQI pour deux blocs de transport lorsque deux blocs de transport sont utilisés pour la transmission de données ;

former un compte-rendu sur la base de la PCI et de la CQI ;
envoyer le compte-rendu à l'émetteur (110) ; et **caractérisé par** la mise en relation de la taille et du nombre de la CQI avec un rang pour la transmission de données.

50

2. Procédé selon la revendication 1, dans lequel la détermination de la CQI comprend en outre :

former la CQI de façon à comprendre la valeur CQI pour le bloc de transport ou les deux valeurs CQI pour les deux blocs de transport, la CQI étant dans une première plage de valeurs pour une seule valeur CQI et dans
55 une deuxième plage de valeurs pour deux valeurs CQI.

3. Procédé selon la revendication 1, comprenant en outre :

EP 2 854 304 B1

déterminer un rang indicatif du nombre de blocs de transport à envoyer pour la transmission de données ; et combiner le rang et la CQI sur la base d'un mappage comprenant plusieurs plages de valeurs, chaque plage de valeurs correspondant à un nombre différent de blocs de transport, et le compte-rendu étant formé sur la base du rang et de la CQI combinés.

5

4. Procédé selon la revendication 1, comprenant en outre :

coder le compte-rendu avec un code de correction d'erreur directe, FEC, pour obtenir un compte-rendu codé ; et envoyer le compte-rendu codé sur un Canal de Commande Physique Dédié pour HS-DSCH, HS-DPCCH.

10

5. Procédé selon la revendication 1, comprenant en outre :

coder le compte-rendu avec un code de bloc pour obtenir un mot de code ; et envoyer le mot de code sur un Canal de Commande Physique Dédié pour HS-DSCH, HS-DPCCH.

15

6. Dispositif comprenant :

des moyens (230) pour déterminer une indication de contrôle de précodage, PCI, pour une transmission de données à partir d'un émetteur (110) vers un récepteur (120) ;
des moyens (230) pour déterminer une indication de qualité de canal, CQI, pour la transmission de données, les moyens pour déterminer la CQI pour la transmission de données comprenant :

20

des moyens (230) pour déterminer une seule valeur CQI pour un seul bloc de transport lorsqu'un seul bloc de transport est utilisé pour la transmission de données, et
des moyens (230) pour déterminer deux valeurs de CQI pour deux blocs de transport lorsque deux blocs de transport sont utilisés pour la transmission de données ;

25

des moyens (230) pour former un compte-rendu sur la base de la PCI et de la CQI ;
des moyens (230) pour envoyer le compte-rendu à l'émetteur (110) ; et **caractérisé en ce que** la taille et le nombre de la CQI sont reliés à un rang pour la transmission de données.

30

7. Dispositif selon la revendication 6, dans lequel les moyens pour déterminer la CQI comprennent en outre :

des moyens pour former la CQI de façon à comprendre la valeur CQI pour le bloc de transport ou les deux valeurs CQI pour les deux blocs de transport, la CQI étant dans une première plage de valeurs pour une seule valeur CQI et étant dans une deuxième plage de valeurs pour deux valeurs CQI.

35

8. Dispositif selon la revendication 6, comprenant en outre :

des moyens pour déterminer un rang indicatif du nombre de blocs de transport à envoyer pour la transmission de données ; et
des moyens pour combiner le rang et la CQI sur la base d'un mappage comprenant plusieurs plages de valeurs, chaque plage de valeurs correspondant à un nombre différent de blocs de transport, et le compte-rendu étant formé sur la base du rang et de la CQI combinés.

45

9. Dispositif selon la revendication 6, comprenant en outre :

des moyens pour coder le compte-rendu avec un code de correction d'erreur directe, FEC, pour obtenir un compte-rendu codé ; et
des moyens pour envoyer le compte-rendu codé sur un Canal de Commande Physique Dédié pour HS-DSCH, HS-DPCCH.

50

10. Dispositif selon la revendication 6, comprenant en outre :

des moyens pour coder le compte-rendu avec un code de bloc pour obtenir un mot de code ; et
des moyens pour envoyer le mot de code sur un Canal de Commande Physique Dédié pour HS-DSCH, HS-DPCCH.

55

11. Procédé comprenant :

recevoir un compte-rendu comprenant une indication de contrôle de précodage, PCI, et une indication de qualité de canal, CQI ;

traiter au moins un bloc de transport sur la base de la CQI, le traitement dudit au moins un bloc de transport sur la base de la CQI comprenant :

obtenir une seule valeur CQI pour un seul bloc de transport lorsque la CQI tombe dans une première plage de valeurs ; et

obtenir deux valeurs CQI pour deux blocs de transport lorsque la CQI tombe dans une deuxième plage de valeurs ;

pré-coder ledit au moins un bloc de transport sur la base de la PCI ; et **caractérisé en ce que** le nombre et la taille de la CQI sont reliés à un rang d'une transmission de données.

12. Procédé selon la revendication 11, dans lequel le traitement dudit au moins un bloc de transport sur la base de la CQI comprend en outre :

traiter chaque bloc de transport sur la base d'un mode de codage et de modulation déterminé par une valeur CQI pour le bloc de transport.

13. Procédé selon la revendication 11, dans lequel le précodage dudit au moins un bloc de transport sur la base de la PCI comprend :

déterminer une matrice de précodage ou un vecteur de précodage pour ledit au moins un bloc de transport sur la base de la PCI, et

pré-coder ledit au moins un bloc de transport sur la base de la matrice de précodage ou du vecteur de précodage.

14. Procédé selon la revendication 11, dans lequel le précodage dudit au moins un bloc de transport sur la base de la PCI comprend :

déterminer un vecteur de précodage primaire sur la base de la PCI,

pré-coder un bloc de transport primaire sur la base du vecteur de précodage primaire, et

pré-coder un bloc de transport secondaire sur la base d'un vecteur de précodage secondaire associé au vecteur de précodage primaire.

15. Dispositif comprenant :


des moyens (270) pour recevoir un compte-rendu comprenant une indication de contrôle de précodage, PCI, et une indication de qualité de canal, CQI ;

des moyens (270) pour traiter au moins un bloc de transport sur la base de la CQI, les moyens pour traiter ledit au moins un bloc de transport sur la base de la CQI comprenant :

des moyens pour obtenir une seule valeur CQI pour un seul bloc de transport lorsque la CQI tombe dans une première plage de valeurs ; et

des moyens pour obtenir deux valeurs CQI pour deux blocs de transport lorsque la CQI tombe dans une deuxième plage de valeurs ;

des moyens (270) pour pré-coder ledit au moins un bloc de transport sur la base de la PCI ; et **caractérisé en ce que** le nombre et la taille de la CQI sont reliés à un rang d'une transmission de données.

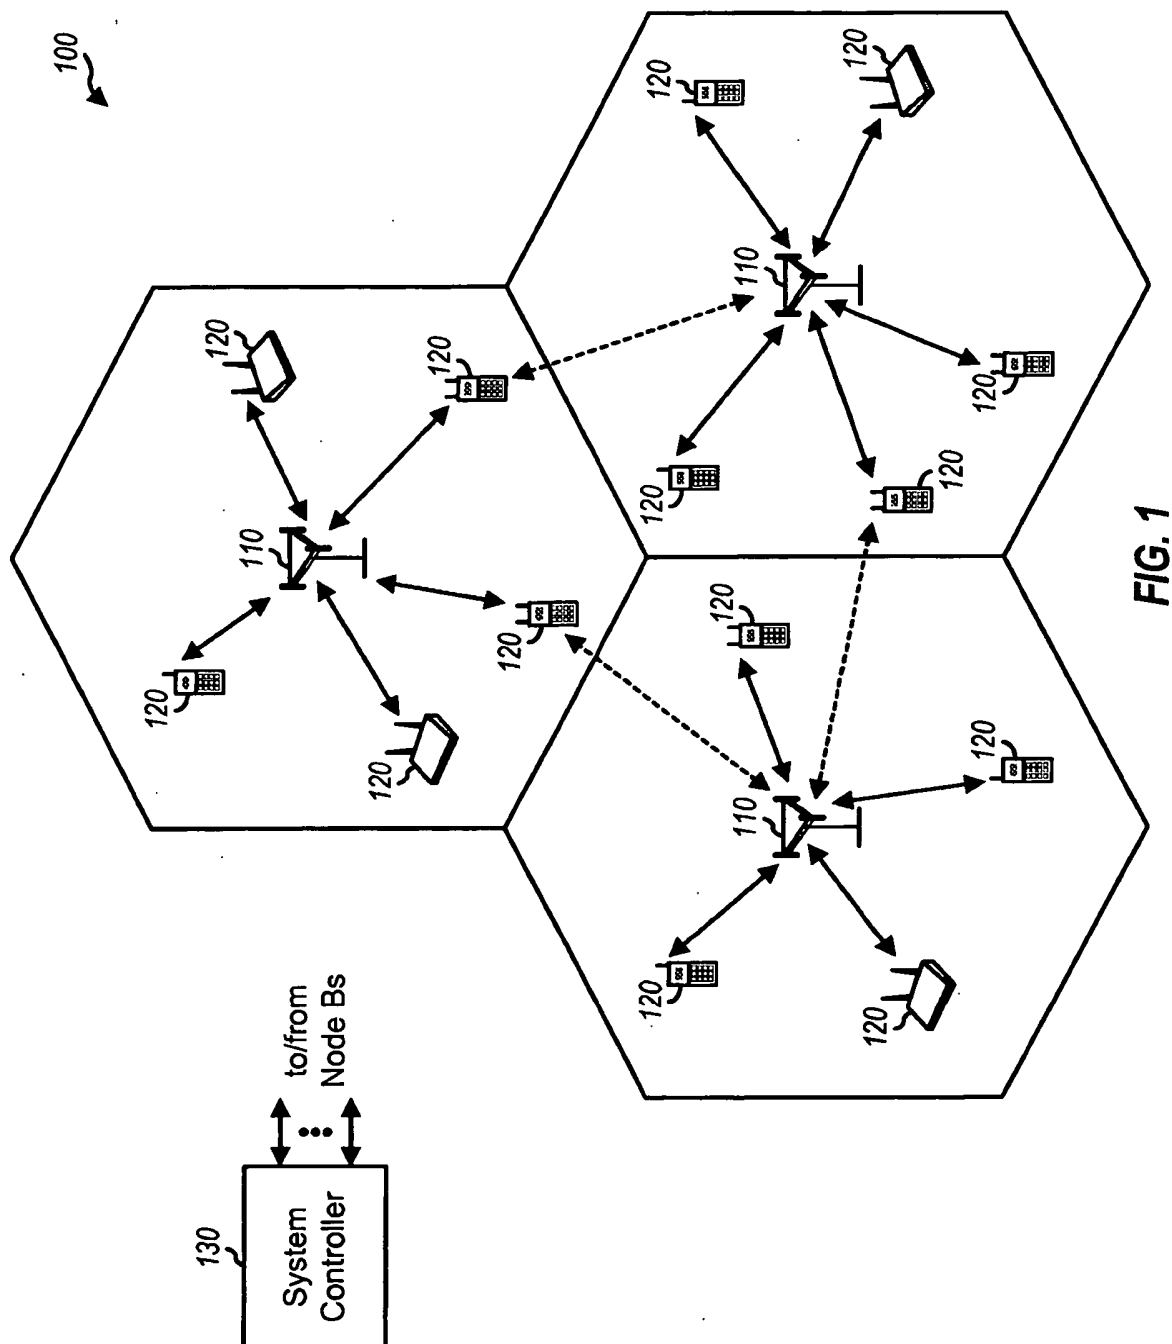

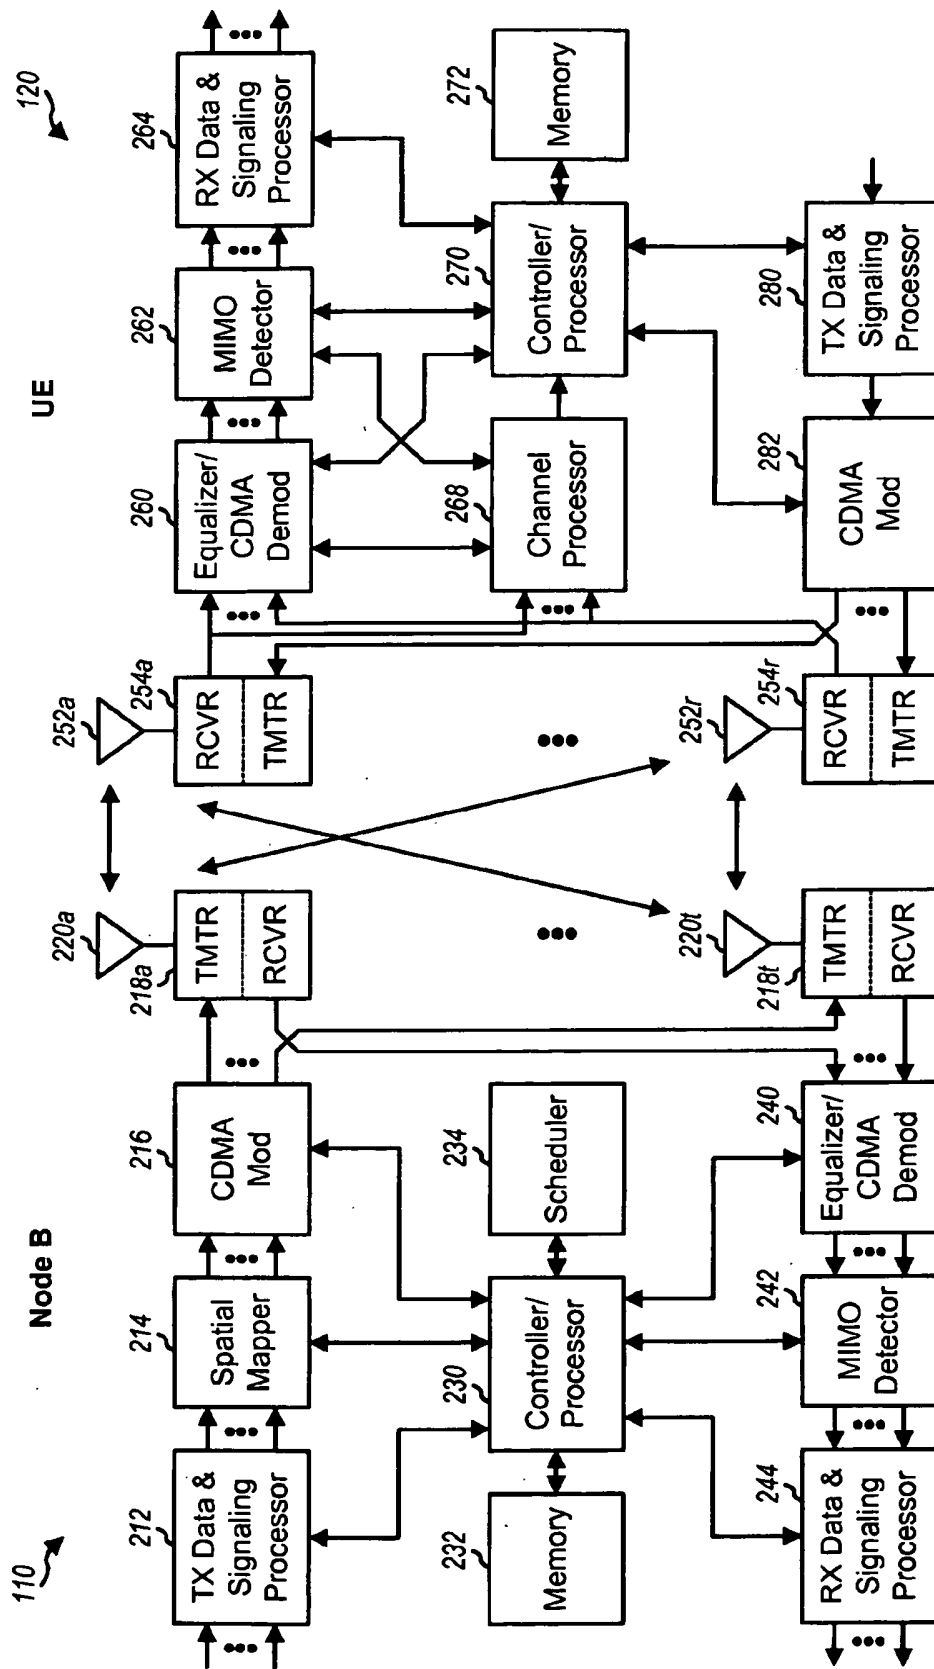


FIG. 2

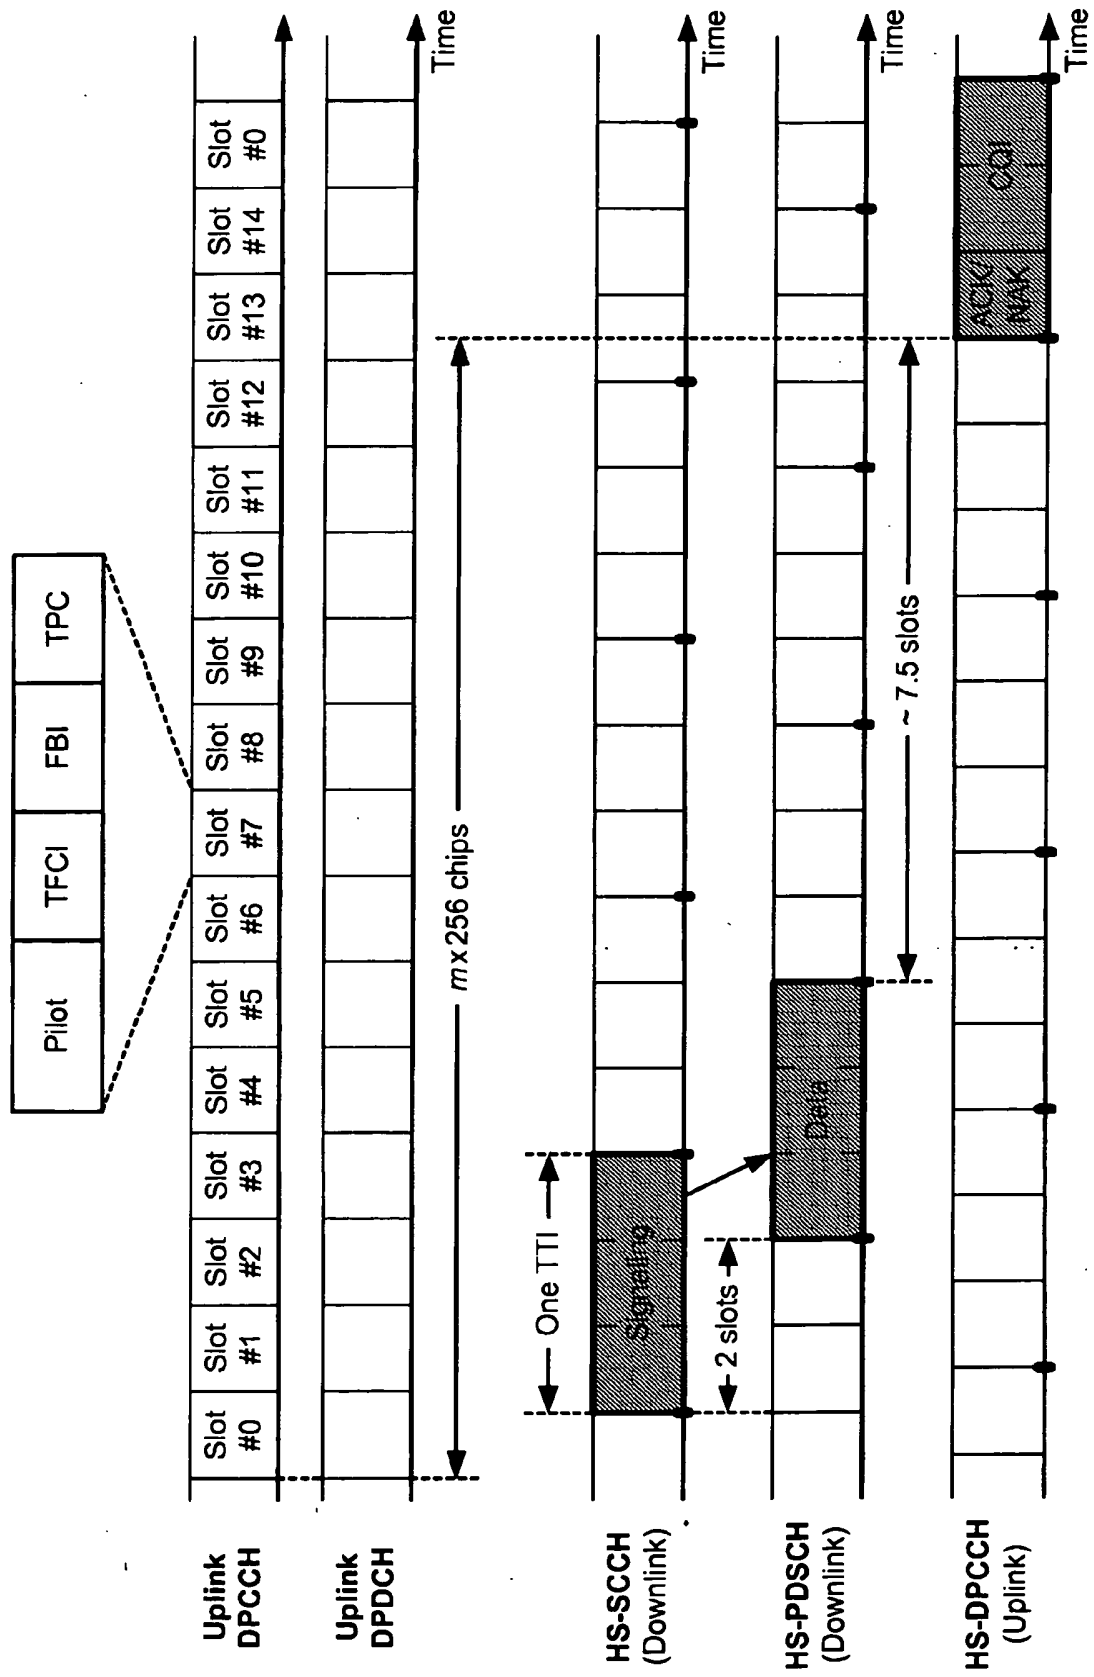


FIG. 3

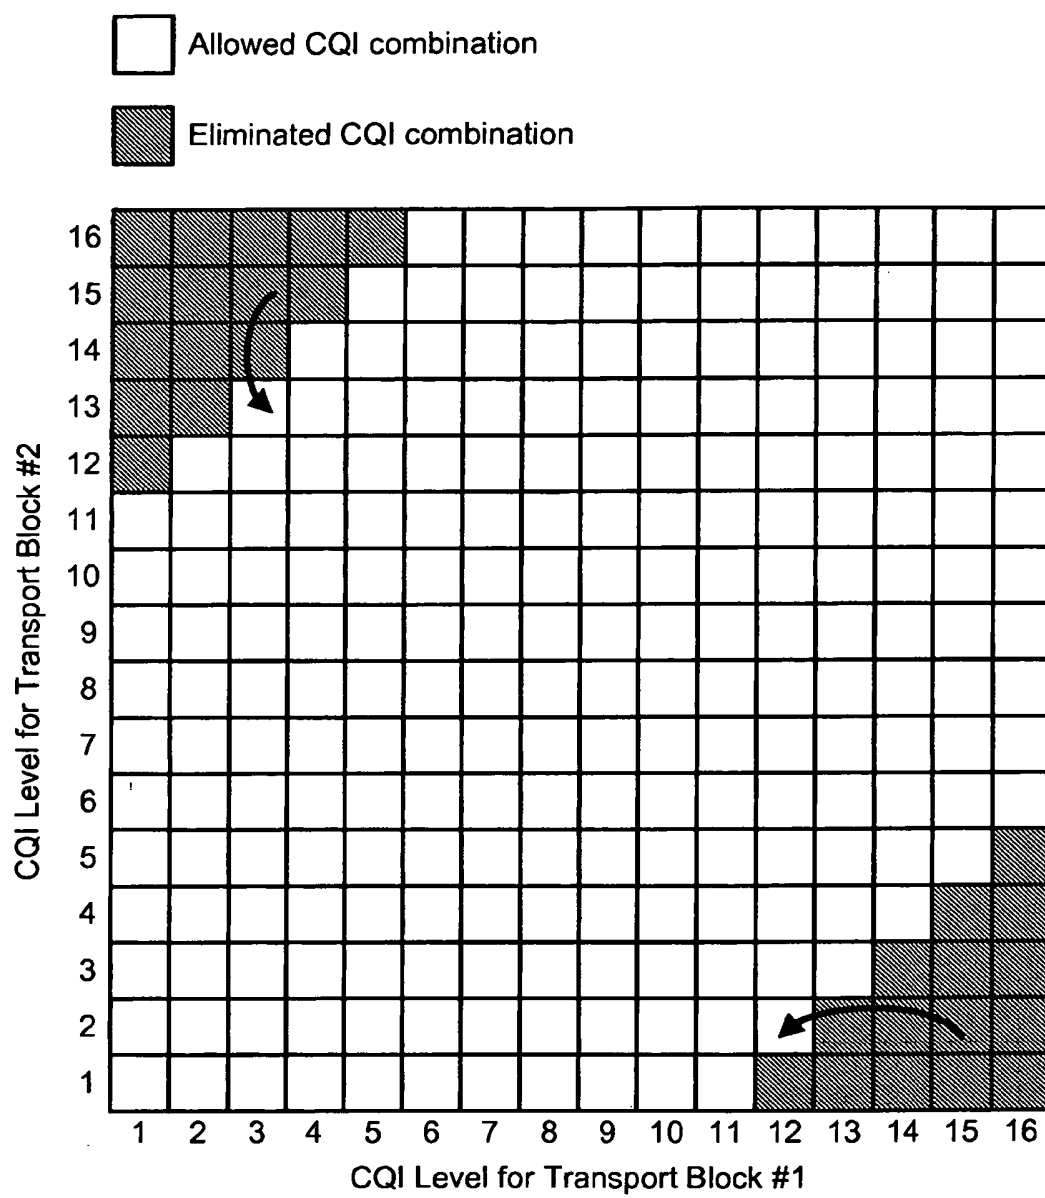


FIG. 4

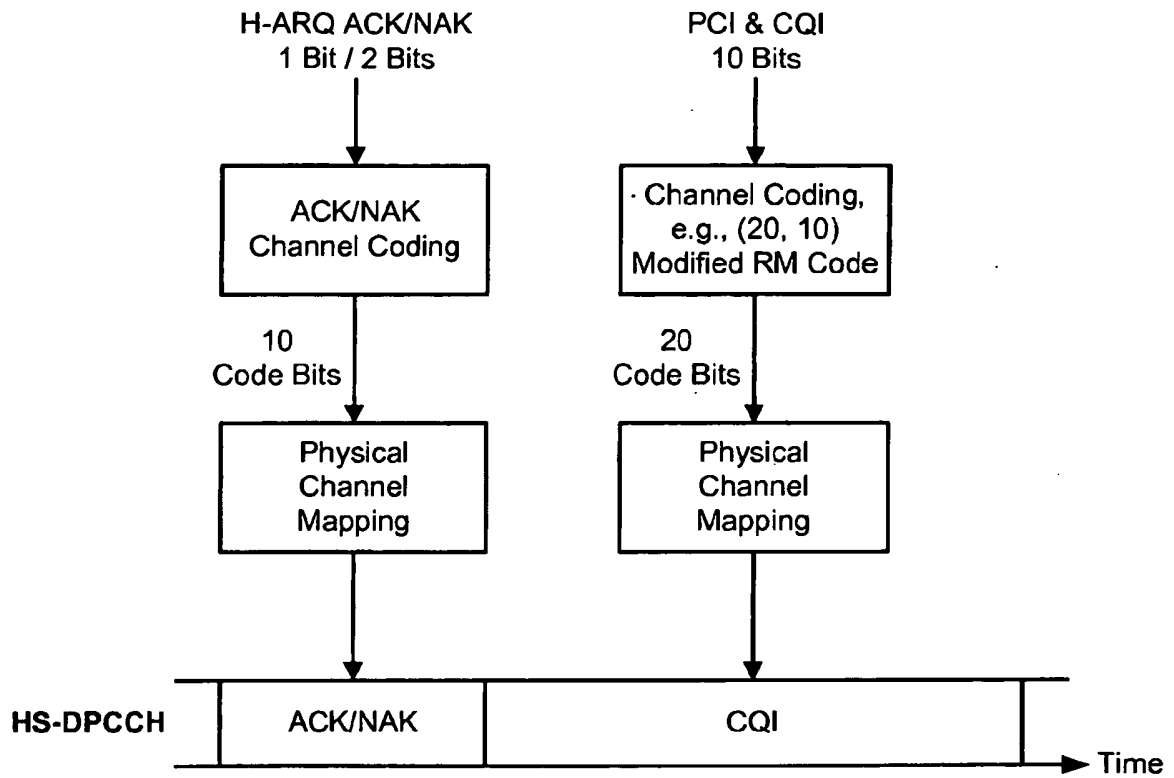


FIG. 5

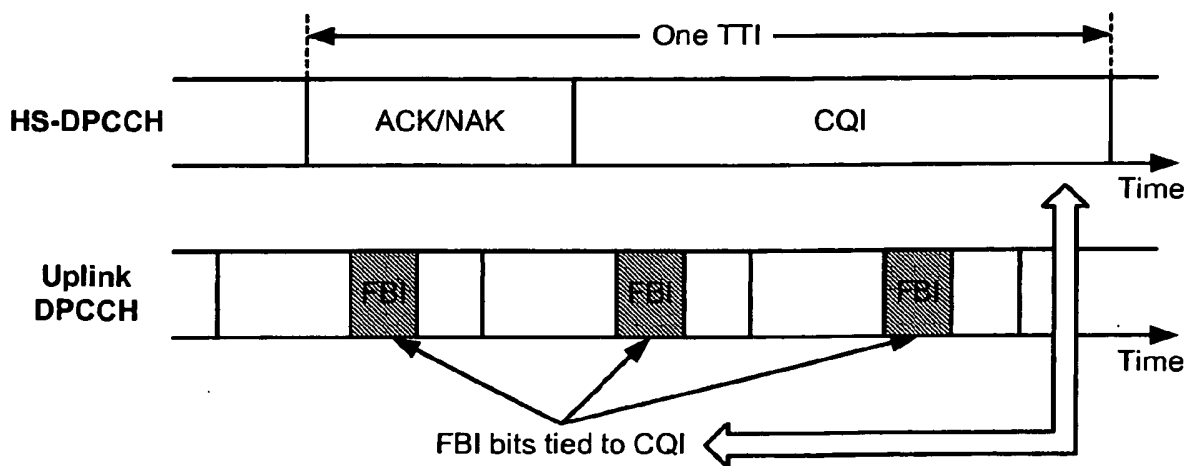
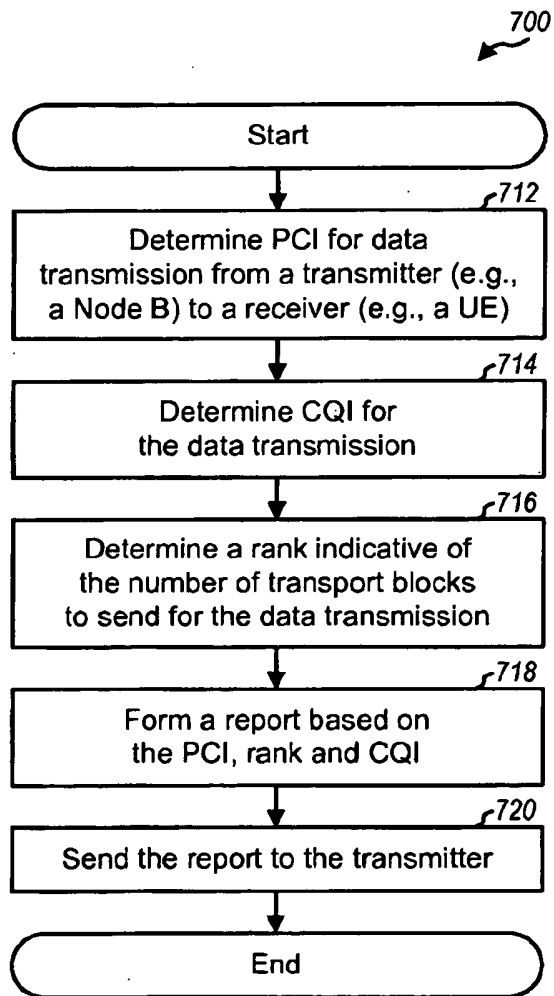
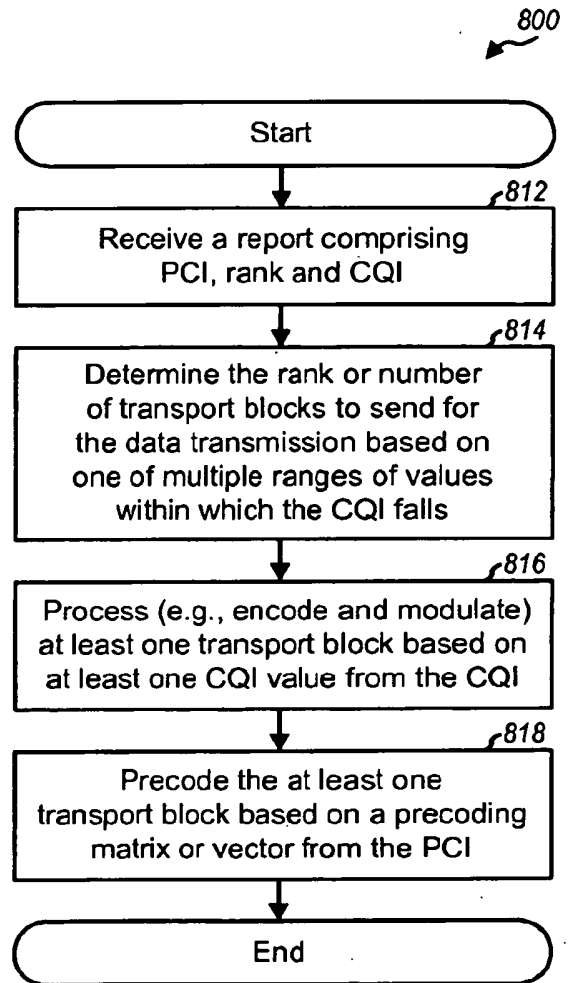


FIG. 6

**FIG. 7****FIG. 8**

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 1655871 A [0003]

Előkódolási vezérlési jelzés (PCI) és csatornaminőség jelzés (CQI) visszacsatolása egy vezeték nélküli kommunikációs rendszerben

Szabadalmi igénypontok

1. Eljárás, amely tartalmazza:

előkódolási vezérlési jelzés, PCI, meghatározását adatok egy adótól (110) egy vevőhöz (120) továbbítására;

csatornaminőség jelzés, CQI, meghatározását az adatátvitelhez, ahol a CQI meghatározása az adatátvitelhez magában foglalja:

egy CQI érték meghatározását egy szállítási blokkhoz, ha egy szállítási blokkot használunk az adatátvitelhez, és

két CQI érték meghatározását két szállítási blokkhoz, ha két szállítási blokkot használunk az adatátvitelhez;

egy jelentés létrehozását a PCI és a CQI alapján;

a jelentés adóhoz (110) küldését; *azzal jellemezve*, hogy a CQI méretét és számát egy adatátviteli sorrendhez viszonyítjuk.

2. Az 1. igénypont szerinti eljárás, ahol a CQI meghatározása magában foglalja továbbá:

a CQI kialakítását ahhoz, hogy tartalmazza az egyetlen CQI értéket az egy szállítási blokkhoz, vagy a két CQI értéket a két szállítási blokkhoz, ahol a CQI egy első értéktartományon belül helyezkedik el egy CQI értékre vonatkozóan, és egy második értéktartományon belül helyezkedik el két CQI értékre vonatkozóan.

3. Az 1. igénypont szerinti eljárás, amely tartalmazza továbbá:

az adatátvitelhez egy a küldendő szállítási blokkok számát jelző sorrend meghatározását; és

egy több értéktartományt tartalmazó leképezés alapján a sorrend és a CQI kombinálását, ahol minden egyes értéktartomány különböző számú szállítási blokkhoz tartozik, és ahol a jelentés a kombinált sorrend és CQI alapján van kialakítva.

4. Az 1. igénypont szerinti eljárás, amely tartalmazza továbbá:

a jelentés kódolását egy előrementes hibakorrekciós, FEC, kóddal, egy kódolt jelentés létrehozásához; és

a kódolt jelentés küldését egy dedikált fizikai vezérlőcsatornán HS-DSCH-hoz, HS-DPCCH-hoz.

5. Az 1. igénypont szerinti eljárás, amely tartalmazza továbbá:

a jelentés kódolását egy blokk kóddal, egy kódszó létrehozásához; és

a kódszó küldését egy dedikált fizikai vezérlőcsatornán HS-DSCH-hoz, HS-DPCCH-hoz.

6. Berendezés, amely tartalmaz:

eszközt (230) előkódolási vezérlési jelzés, PCI, meghatározására egy adótól (110) egy vevőhöz (120) történő adatátvitel céljára;

eszközt (230) csatornaminőség jelzés, CQI, meghatározására az adatátvitelhez, ahol az adatátvitelhez a CQI-t meghatározó eszköz tartalmaz:

eszközt (230) egy CQI érték meghatározására egy szállítási blokkhoz, ha egy szállítási blokkot használunk az adatátvitelhez, és

eszközt (230) két CQI érték meghatározására két szállítási blokkhoz, ha két szállítási blokkot használunk az adatátvitelhez,

eszközt (230) egy jelentés létrehozására a PCI és a CQI alapján;

eszközt (230) a jelentés adóhoz (110) küldésére; és *azzal jellemezve*, hogy a CQI mérete és száma egy adatátviteli sorrendhez viszonyított.

7. A 6. igénypont szerinti berendezés, ahol a CQI meghatározására szolgáló eszköz tartalmaz továbbá:

eszközt a CQI kialakítására, hogy az tartalmazzon egy CQI értéket az 1 szállítási blokkhoz, vagy a két CQI értéket a két szállítási blokkhoz, ahol a CQI egy első értéktartományon belül helyezkedik el egy CQI értékre vonatkozóan, és egy második értéktartományon belül helyezkedik el két CQI értékre vonatkozóan.

8. A 6. igénypont szerinti berendezés, amely tartalmaz továbbá:

eszközt egy az adatátvitel céljára küldendő szállítási blokkok számát jelző sorrend meghatározására; és

eszközt a sorrend és a CQI kombinálására, több értéktartományt tartalmazó leképezés alapján, ahol minden egyes értéktartomány különböző számú szállítási blokkhoz tartozik, és ahol a jelentés a kombinált sorrend és CQI alapján van kialakítva.

9. A 6. igénypont szerinti berendezés, amely tartalmaz továbbá:

eszközt a jelentés kódolására egy előrementés hibajavító, FEC, kóddal, kódolt jelentés előállítására; és

eszközt a kódolt jelentés küldésére egy dedikált fizikai vezérlőcsatornán HS-DSCH-hoz, HS-DPCCH-hoz.

10. A 6. igénypont szerinti berendezés, amely tartalmaz továbbá:

eszközt a jelentés kódolására egy blokk kóddal, egy kódszó előállítására; és

eszközt a kódszó küldésére egy dedikált fizikai vezérlőcsatornán HS-DSCH-hoz, HS-DPCCH-hoz.

11. Eljárás, amely tartalmazza:

egy előkódolási vezérlési jelzést, PCI, és csatornaminőség jelzést, CQI., tartalmazó jelentés vételét;

legalább egy számítási blokk feldolgozását a CQI alapján, ahol a legalább egy szállítási blokk CQI alapján történő feldolgozása magában foglalja:

egy CQI érték megismerését egy szállítási blokkhoz, ha a CQI egy első értéktartományon belülré esik; és

két CQI érték megismerését két szállítási blokkhoz, ha a CQI egy második értéktartományon belülré esik;

a legalább egy szállítási blokk feldolgozását a PCI-n belül; és *azzal jellemezve*, hogy a CQI számát és méretét egy adatátvitel sorrendjéhez viszonyítjuk.

12. A 11. igénypont szerinti eljárás, ahol a legalább egy szállítási blokk feldolgozása a CQI alapján tartalmazza továbbá:

minden egyes szállítási blokk feldolgozását egy olyan kódolási és modulációs séma alapján, amelyet a szállítási blokkhoz tartozó CQI érték határozott meg.

13. A 11. igénypont szerinti eljárás, ahol a legalább egy szállítási blokk feldolgozása a PCI alapján tartalmazza:

egy előkódolási mátrix vagy egy előkódolási vektor meghatározását a legalább egy szállítási blokk számára a PCI alapján, és a legalább egy szállítási blokk előkódolását az előkódolási mátrix vagy az előkódolási vektor alapján.

14. A 11. igénypont szerinti eljárás, ahol a legalább egy szállítási blokk PCI alapján történő előkódolása tartalmazza:

a PCI alapján egy elsődleges előkódolási vektor meghatározását,

egy elsődleges szállítási blokk előkódolását az elsődleges előkódolási vektor alapján, és

egy másodlagos szállítási blokk előkódolását egy az elsődleges előkódolási vektorral társított másodlagos előkódolási vektor alapján.

15. Berendezés, amely tartalmaz:

eszközt (270) előkódolási vezérlési jelzést (PCI) és csatornaminőség jelzést (CQI) tartalmazó jelentés vételére;

eszközt (270) legalább egy szállítási blokk CQI alapján történő feldolgozására, ahol a legalább egy szállítási blokk CQI alapján történő feldolgozására szolgáló eszközt tartalmaz:

eszközt egy CQI érték megkapására egy szállítási blokkhoz, ha a CQI egy első értéktartományon belülre esik; és

eszközt két CQI érték megkapására két szállítási blokkhoz, ha a CQI egy második értéktartományon belülre esik;

eszközt (270) a legalább egy szállítási blokk előkódolására a PCI alapján; és *azzal jellemezve*, hogy a CQI száma és mérete egy adatátvitel sorrendjéhez viszonyított.