



US011759039B1

(12) **United States Patent**
Cintron

(10) **Patent No.:** **US 11,759,039 B1**
(45) **Date of Patent:** **Sep. 19, 2023**

- (54) **ADJUSTABLE PORTABLE CUP HOLDER**
- (71) Applicant: **Jacqueline Cintron**, Eielson Air Force Base, AK (US)
- (72) Inventor: **Jacqueline Cintron**, Eielson Air Force Base, AK (US)
- (*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 170 days.
- (21) Appl. No.: **17/149,036**
- (22) Filed: **Jan. 14, 2021**
- (51) **Int. Cl.**
A47G 23/00 (2006.01)
A47G 23/02 (2006.01)
- (52) **U.S. Cl.**
CPC *A47G 23/0225* (2013.01); *A47G 23/0241* (2013.01); *A47G 23/0266* (2013.01)
- (58) **Field of Classification Search**
None
See application file for complete search history.

5,533,638	A *	7/1996	Robbins, III	B65D 43/0212	220/660
D378,334	S	3/1997	Legere		
5,720,516	A *	2/1998	Young	A47C 7/68	297/188.14
6,412,741	B1 *	7/2002	Olivero	A47G 23/0225	248/311.2
6,666,329	B1	12/2003	Charbonneau		
8,556,099	B2 *	10/2013	Perlman	B65D 11/1873	206/217
8,777,307	B2	7/2014	Nelson et al.		
9,016,491	B2	4/2015	Blum et al.		
9,109,744	B1	8/2015	Guerrero		
9,205,954	B2	12/2015	Huang et al.		
9,706,831	B2	7/2017	Wu et al.		
9,751,660	B2 *	9/2017	Jasin	F41H 3/00	
10,045,645	B2	8/2018	Kim		
10,336,499	B2	7/2019	Wambolt		
10,393,564	B1 *	8/2019	Dabney	G01F 19/00	
D871,151	S *	12/2019	Hudson	D7/532	
2006/0220327	A1 *	10/2006	Russell	F16J 15/121	277/611

* cited by examiner

Primary Examiner — Steven M Marsh

(74) Attorney, Agent, or Firm — CRAMER PATENT & DESIGN, PLLC; Aaron R. Cramer



(57) **ABSTRACT**

The adjustable portable cup holder may comprise a top ring, a bottom ring, a plurality of intermediate rings, and an attachment band. The adjustable portable cup holder may be coupled to a mounting point and may be operable to hold a beverage container. The adjustable portable cup holder may collapse for storage and expand for use. The attachment band may adjust to fit the mounting point. As non-limiting examples, the beverage container may be a beverage cup, a water bottle, or a beverage can. As non-limiting examples, the mounting point may be a beach chair, a stroller, or a grocery cart.

5 Claims, 10 Drawing Sheets

(56) **References Cited**
U.S. PATENT DOCUMENTS

1,093,873	A *	4/1914	Mitchell	B65D 21/086	220/8
1,264,040	A *	4/1918	Fackler	B65D 21/086	220/8
2,438,434	A *	3/1948	Friedman	B65D 41/26	206/217
3,285,459	A *	11/1966	Gahm	A61J 7/0046	206/218
5,384,138	A *	1/1995	Robbins, III	B65D 1/40	220/666
5,474,272	A	12/1995	Thompson et al.		

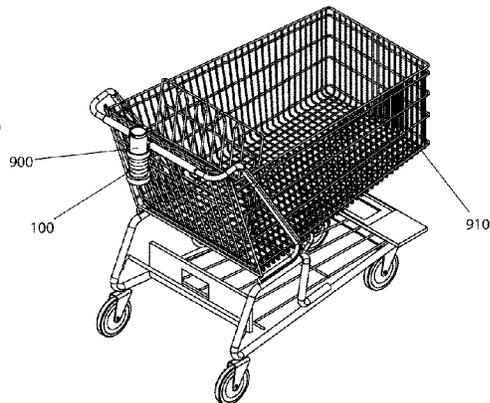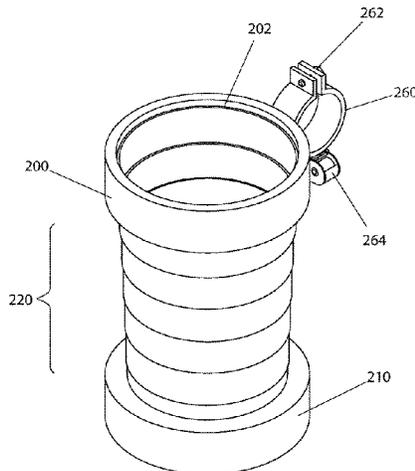

100

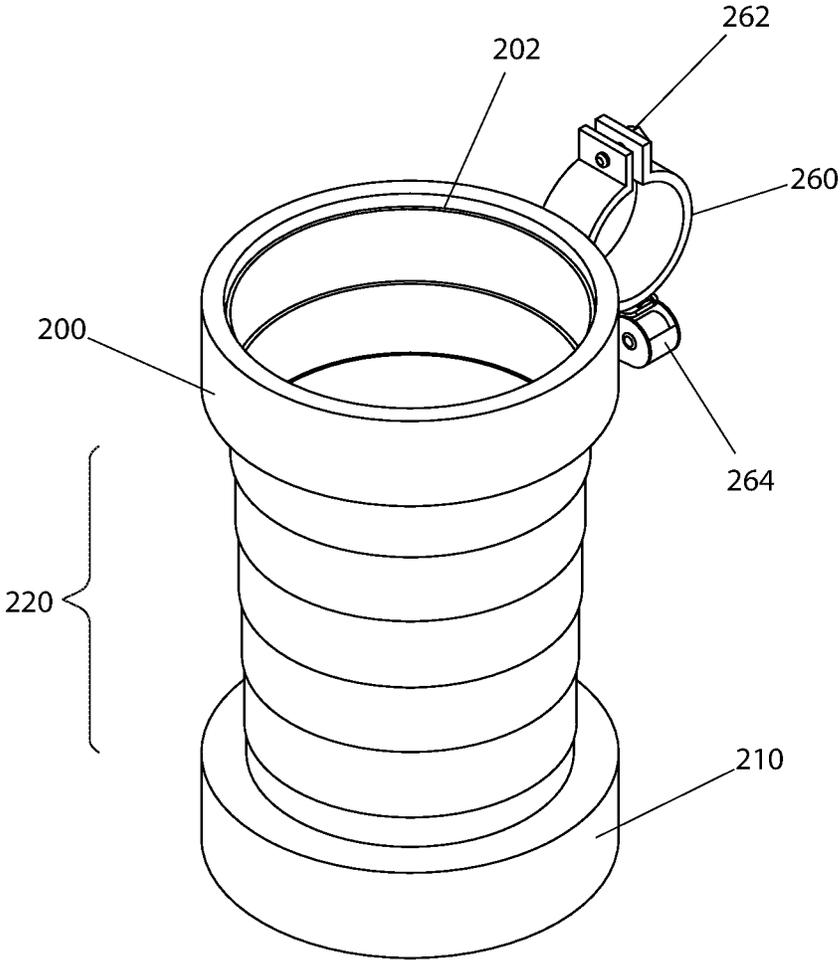


Fig. 1

100

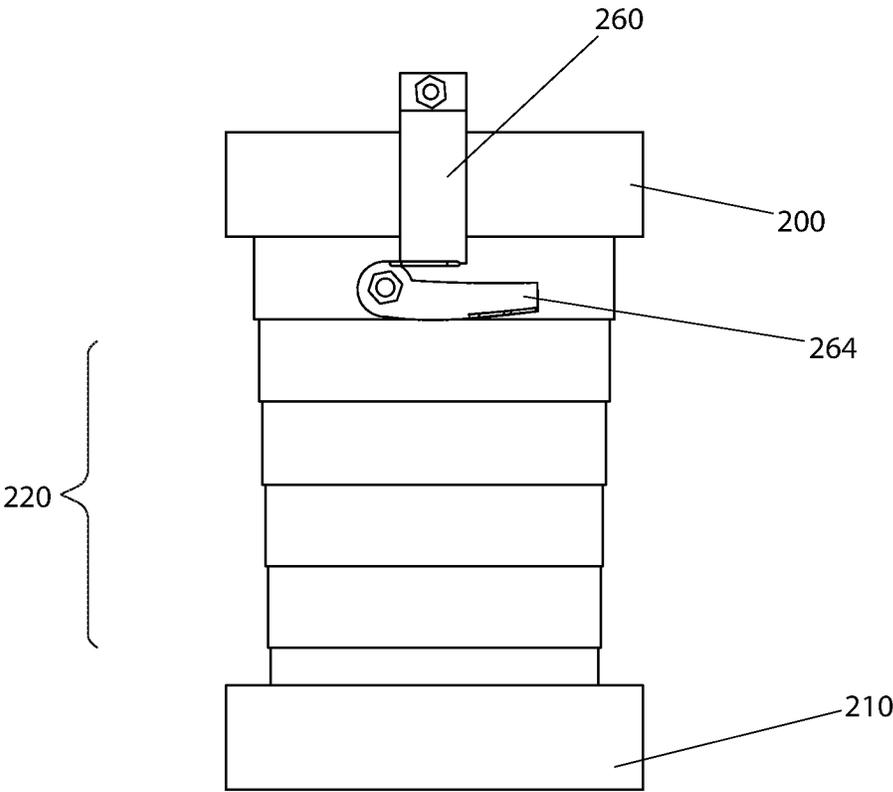


Fig. 2

100

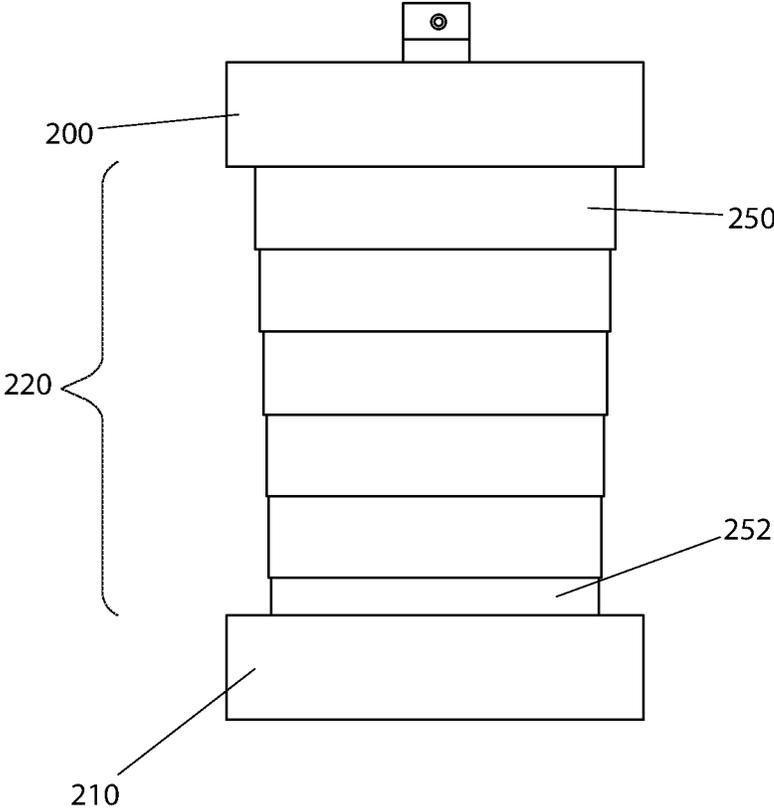


Fig. 3

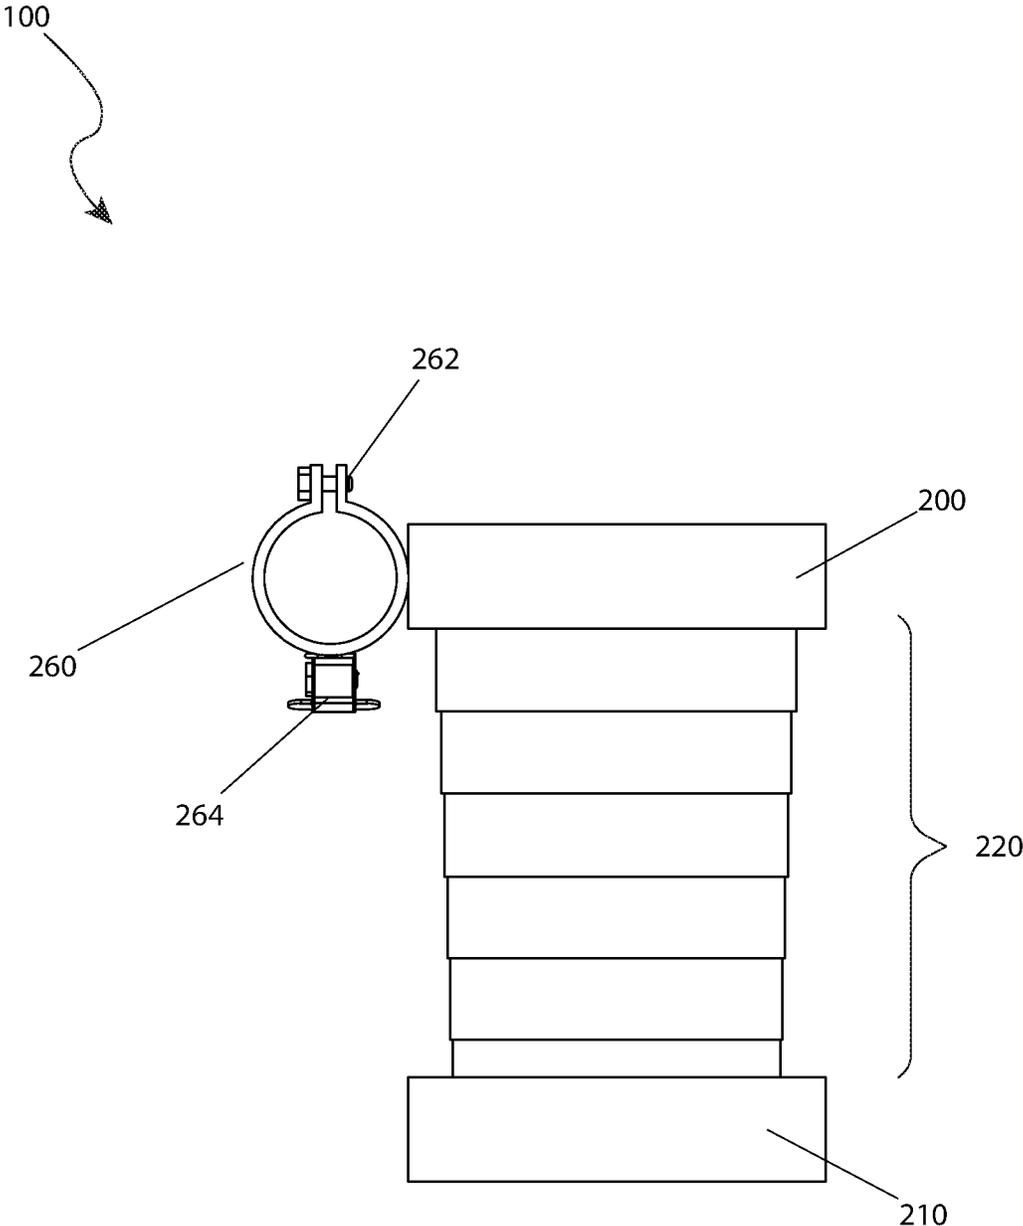


Fig. 4

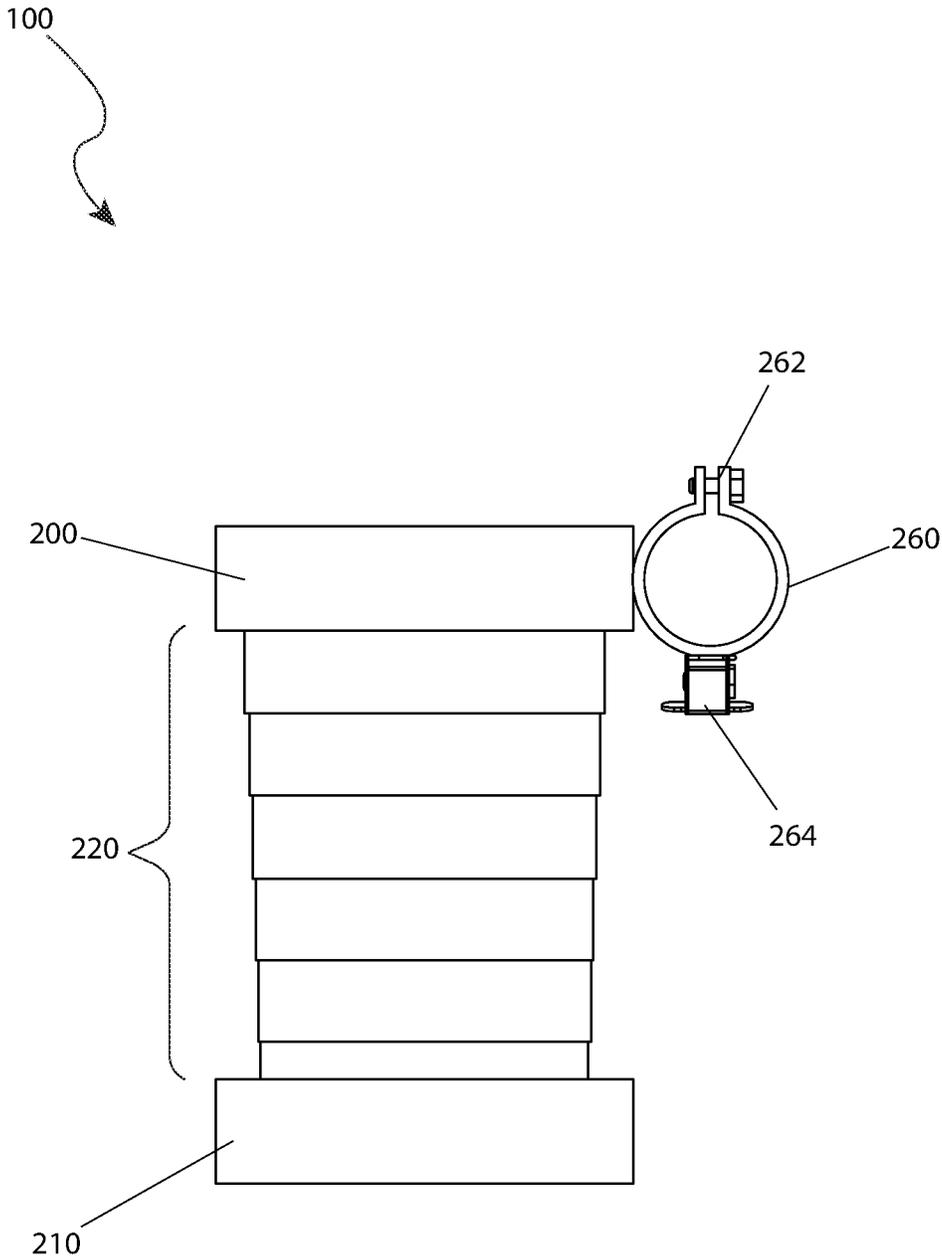


Fig. 5

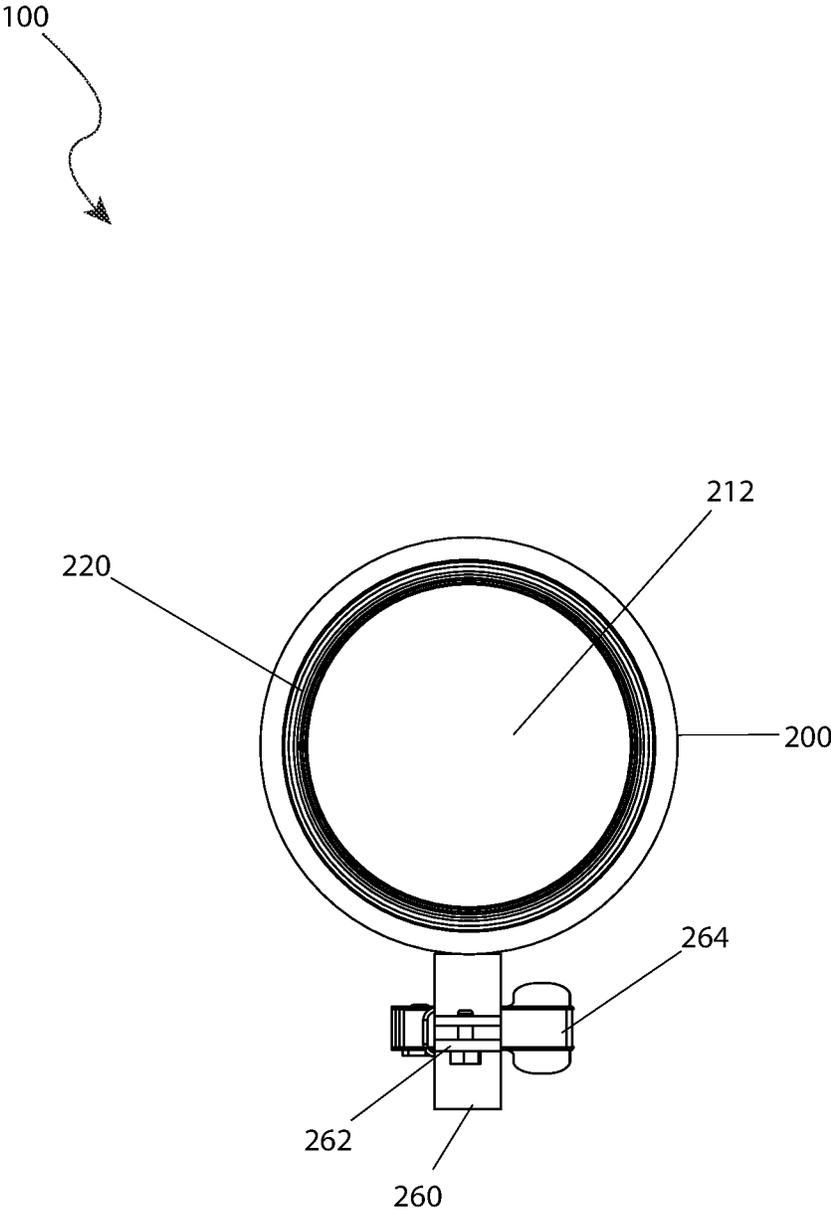


Fig. 6

100

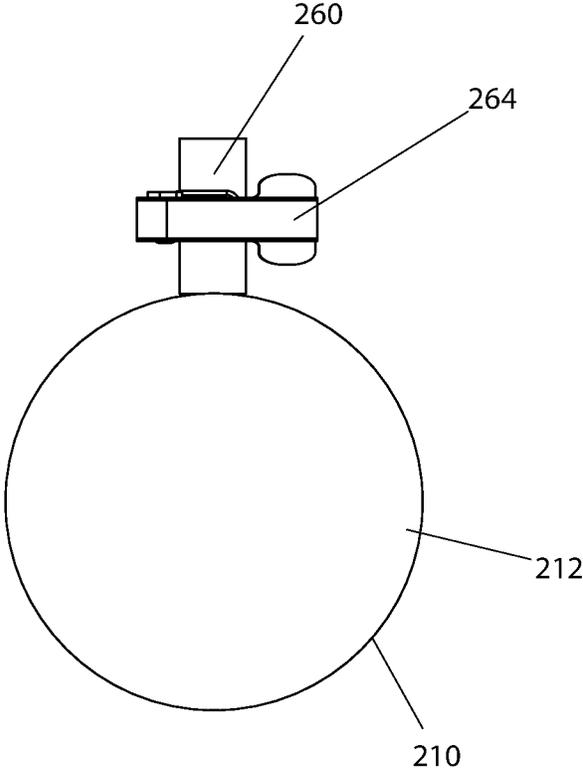



Fig. 7

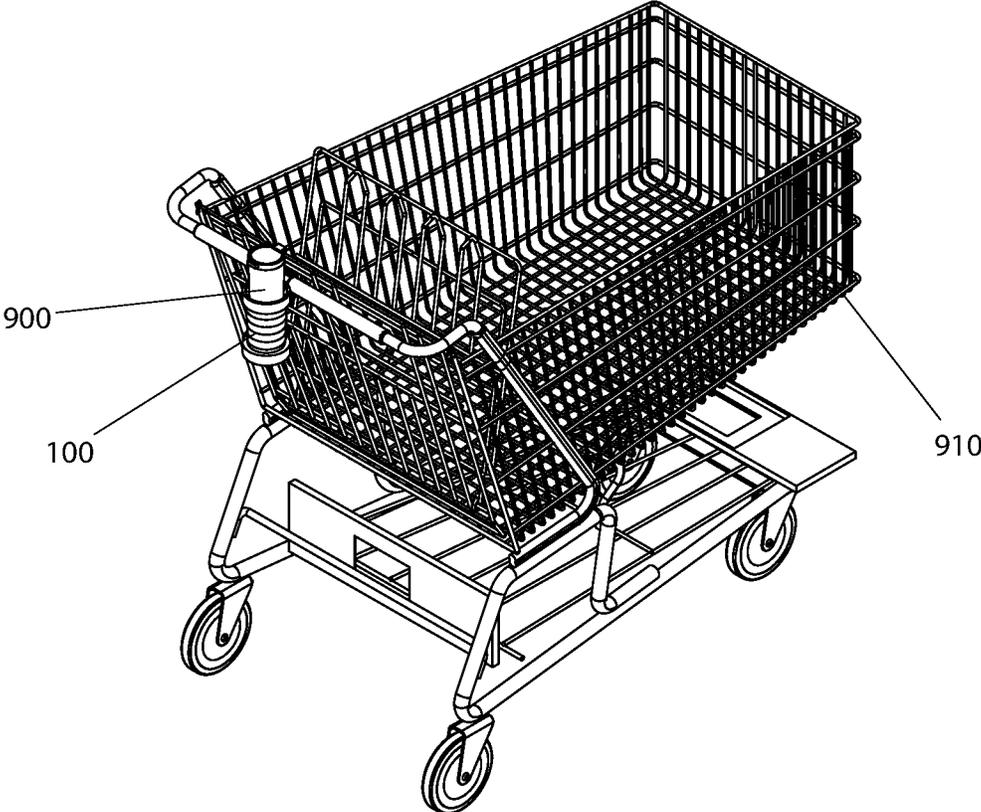


Fig. 8

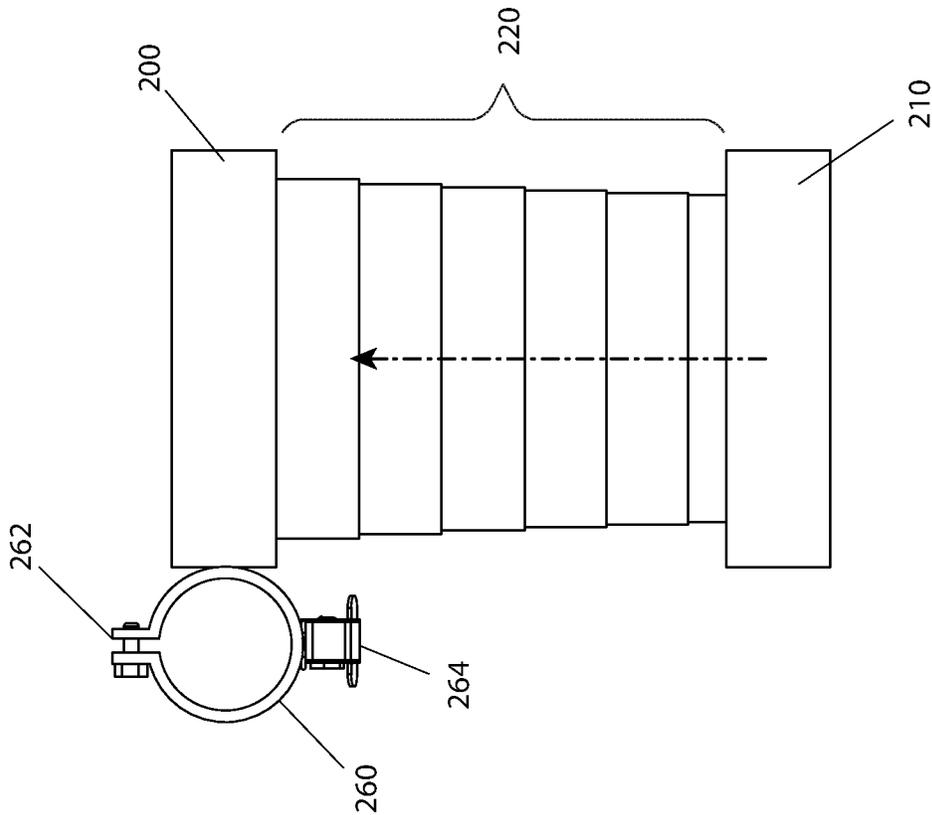


Fig. 9A

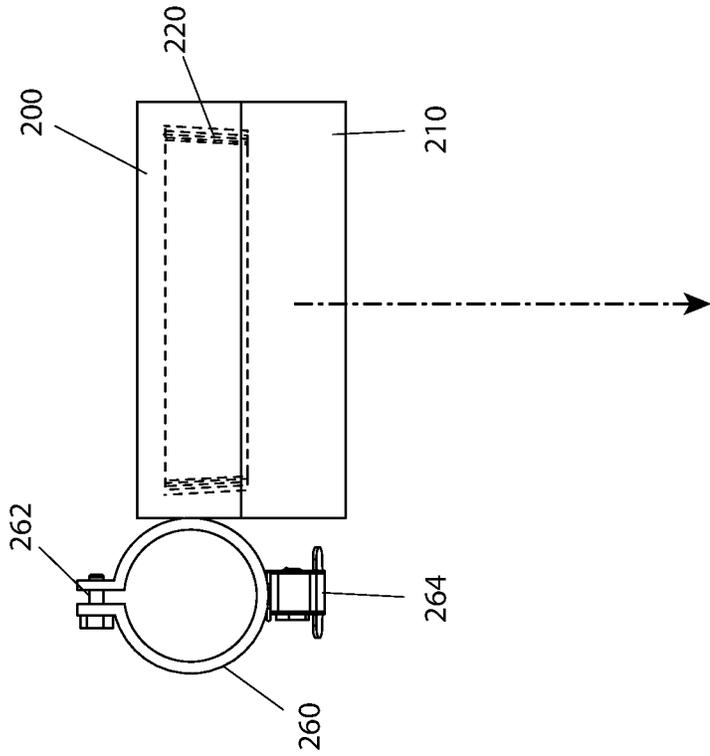


Fig. 9B

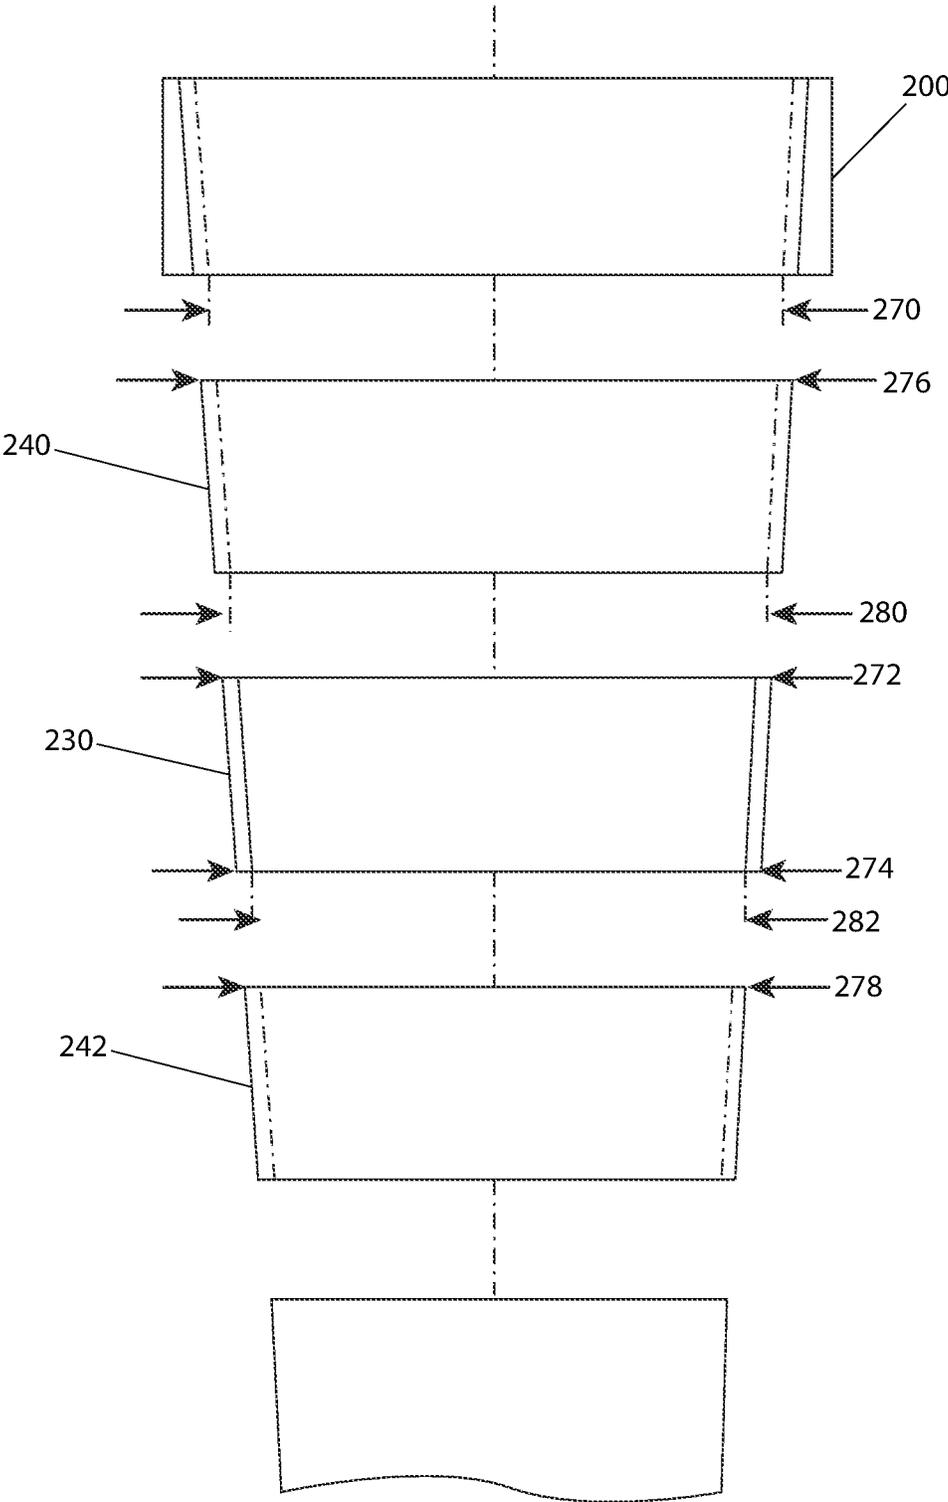


Fig. 10

1

ADJUSTABLE PORTABLE CUP HOLDER

RELATED APPLICATIONS

Not applicable.

FIELD OF THE INVENTION

The present invention relates generally to a cup holder and more specifically to an adjustable and portable cup holder.

BACKGROUND OF THE INVENTION

Whether it be a morning cup of coffee, a glass of water or a fitness drink during exercise, staying properly hydrated is an important and daily task. In fact, most people seldom leave their house without carrying a cup of coffee, thermos, or water bottle.

This being the case, many automobiles, strollers, and exercise equipment devices are manufactured having a pre-existing cup holder. These cup holders are often handy and generally work well. However, a shared public cup holder may not always be as clean as one would prefer. Additionally, given the current pandemic, having a clean cup holder is more important than ever. Therefore, the need exists for a cup holder that is portable, individualized, and cleanable. The adjustable portable cup holder fulfills this need in a manner that is safe and cost effective.

SUMMARY OF THE INVENTION

The inventor has recognized the aforementioned, inherent problems and lack in the art and observed that there is a need for an adjustable portable cup holder which has a top ring which in turn has a top, a bottom, and a top aperture. The top aperture is vertically oriented within the top ring and the top aperture includes a top and a bottom. The adjustable portable cup holder also has bottom ring which has a bottom surface, a plurality of intermediate rings which have a plurality of annular bands that are interposed between the top ring and the bottom ring, and an attachment band adjusted to fit a mounting point of a beverage container. The attachment band is coupled to the top ring and the attachment band includes an adjustment gap which is operable to adjust an inside diameter of the attachment band.

The top aperture may include a plurality of sloped internal walls. The top of the top aperture may be wider than the bottom of the top aperture. The bottom of the top aperture may be at least as large as an outside diameter of the beverage container such that the beverage container passes through the top ring when inserted into the top ring from the top of the top ring. The top ring may become immovable when the attachment band is coupled to the mounting point. The collapsing and expanding of the adjustable portable cup holder may be achieved by pushing and pulling the bottom ring.

The bottom ring may include the bottom surface which may prevent the beverage container from passing through the bottom ring. The intermediate ring may have a plurality of decreasing diameters with a highest intermediate ring being larger than a lowest intermediate ring. The intermediate ring may be vertically tapered. The intermediate rings may slidably couple to each other and collapse to a height of one of the individual intermediate rings when each of the individual intermediate rings slide up into the ring immediately above it. The attachment band may include a release

2

clip. The adjustable portable cup holder may be coupled to the mounting point by operating the release clip to open the attachment band, passing the attachment band around an armature of the mounting point. The release clip may close the attachment band. The beverage container may be inserted into the top aperture of the top ring and the beverage container's weight pushes the bottom ring down.

The bottom ring pulls the intermediate rings causing the adjustable portable cup holder to expand until the adjustable portable cup holder supports the beverage container. The beverage container may be removed from the adjustable portable cup holder when the bottom ring is pushed towards the top ring to collapse the adjustable portable cup holder and the attachment band is decoupled from the mounting point. The mounting point may be selected from the group consisting of a beach chair, a stroller, or a grocery cart. The beverage container may be selected from the group consisting of a beverage cup, a water bottle, or a beverage can. The adjustable portable cup holder may be coupled to the mounting point and is operable to hold the beverage container. The adjustable portable cup holder may collapse for ease of storage and expands when ready for use.

BRIEF DESCRIPTION OF THE DRAWINGS

The advantages and features of the present invention will become better understood with reference to the following more detailed description and claims taken in conjunction with the accompanying drawings, in which like elements are identified with like symbols, and in which:

FIG. 1 is an isometric view of an adjustable portable cup holder, according to an embodiment of the present invention.

FIG. 2 is a rear view of an adjustable portable cup holder, according to an embodiment of the present invention.

FIG. 3 is a front view of an adjustable portable cup holder, according to an embodiment of the present invention.

FIG. 4 is a left side view of an adjustable portable cup holder, according to an embodiment of the present invention.

FIG. 5 is a right-side view of an adjustable portable cup holder, according to an embodiment of the present invention.

FIG. 6 is a top view of an adjustable portable cup holder, according to an embodiment of the present invention.

FIG. 7 is a bottom view of an adjustable portable cup holder, according to an embodiment of the present invention.

FIG. 8 is an in-use view of an adjustable portable cup holder, according to an embodiment of the present invention illustrating the adjustable portable cup holder coupled to a mounting point (the handle of a grocery cart).

FIG. 9A is a detail view of an adjustable portable cup holder, according to an embodiment of the present invention illustrating an expanded adjustable portable cup holder and showing a collapsing forced applied.

FIG. 9B is a detail view of an adjustable portable cup holder, according to an embodiment of the present invention illustrating a collapsed adjustable portable cup holder and showing an expanding forced applied.

FIG. 10 is an exploded view of an adjustable portable cup holder, according to an embodiment of the present invention illustrating the stack up of the top ring, an individual intermediate ring, the ring immediately above, the ring immediately below, and various diameters of intermediate rings.

DESCRIPTIVE KEY

100 adjustable portable cup holder

200 top ring

202 top aperture
 210 bottom ring
 212 bottom surface
 220 plurality of intermediate rings
 230 individual intermediate ring
 240 ring immediately above
 242 ring immediately below
 250 highest intermediate ring
 252 lowest intermediate ring
 260 attachment band
 262 adjustment gap
 264 release clip
 270 first diameter
 272 second diameter
 274 third diameter
 276 fourth diameter
 278 fifth diameter
 280 sixth diameter
 282 seventh diameter
 900 beverage container
 910 mounting point

DESCRIPTION OF THE INVENTION

The present invention is directed to an adjustable portable cup holder (herein described as the “invention”) **100**. The invention **100** may comprise a top ring **200**, a bottom ring **210**, a plurality of intermediate rings **220**, and an attachment band **260**. FIG. **8** is an in-use view of an adjustable portable cup holder, according to an embodiment of the present invention illustrating the adjustable portable cup holder coupled to a mounting point (the handle of a grocery cart). The invention **100** may be coupled to a mounting point **910** and may be operable to hold a beverage container **900**. The invention **100** may collapse for storage and expand for use. The attachment band **260** may adjust to fit the mounting point **910**. As non-limiting examples, the beverage container **900** may be a beverage cup, a water bottle, or a beverage can. As non-limiting examples, the mounting point **910** may be a beach chair, a stroller, or a grocery cart. FIG. **8** shows the invention **100** coupled to the grocery cart.

The top ring **200** may be an annular collar surrounding the top of the invention **100**. The top ring **200** may comprise a top aperture **202** that is vertically oriented within the top ring **200**. The top aperture **202** may comprise sloped internal walls such that the top of the top aperture **202** is wider than the bottom of the top aperture **202**. A first diameter **270** measured as the inside diameter at the bottom of the top aperture **202** may be at least as large as the outside diameter of the beverage container **900** such that the beverage container **900** may pass through the top ring **200** when inserted into the top ring **200** from the top of the top ring **200**.

FIG. **6** is a top view of an adjustable portable cup holder, according to an embodiment of the present invention. The bottom ring **210** may comprise a bottom surface **212**. The bottom ring **210** may be an annular collar surrounding the bottom of the invention **100**. FIG. **7** is a bottom view of an adjustable portable cup holder, according to an embodiment of the present invention. The beverage container **900** may pass into the bottom ring **210** from the top. The bottom ring **210** may comprise the bottom surface **212** which may prevent the beverage container **900** from passing through the bottom ring **210**.

FIG. **3** is a front view of an adjustable portable cup holder, according to an embodiment of the present invention. The plurality of intermediate rings **220** may be a plurality of annular bands that may be interposed between the top ring

200 and the bottom ring **210**. The plurality of intermediate rings **220** may be of decreasing diameters with a highest intermediate ring **250** being larger than a lowest intermediate ring **252**.

An individual intermediate ring **230** selected from the plurality of intermediate rings **220** may be vertically tapered such that a second diameter **272** measured as the outside diameter at the top of the individual intermediate ring **230** may be wider than a third diameter **274** measured as the outside diameter at the bottom of the individual intermediate ring **230**. The second diameter **272** may be narrower than a fourth diameter **276** measured as the outside diameter at the top of a ring immediately above **240** and wider than a fifth diameter **278** measured as the outside diameter at the top of a ring immediately below **242**. The second diameter **272** of the individual intermediate ring **230** may be wider than a sixth diameter **280** measured as the inside diameter at the bottom of the ring immediately above **240** so that the individual intermediate ring **230** does not fall through the ring immediately above **240**. A seventh diameter **282** measured as the inside diameter at the bottom of the individual intermediate ring **230** may be narrower than the fifth diameter **278** of the ring immediately below **242** so that the ring immediately below **242** does not fall through the individual intermediate ring **230**.

The plurality of intermediate rings **220** may slidably couple to each other and may collapse to the height of one (1) of the individual intermediate rings **230** when each of the individual intermediate rings **230** slides up into the ring immediately above **240**. The individual intermediate ring **230** may expand when each of the individual intermediate rings **230** slides down out of the ring immediately above **240** to the point where the top of the individual intermediate ring **230** cannot pass through the bottom of the ring immediately above **240**.

FIG. **10** is an exploded view illustrating the relationship between some of the plurality of intermediate rings **220** and their diameters as described above. Note that to stack the plurality of intermediate rings **220** for use, each of the plurality of intermediate rings **220** must be inserted into the ring immediately above **240** from the top of the ring immediately above **240** because the relative diameters prevent the lower rings from passing through the upper rings. (FIG. **10** is not drawn to scale).

The top of the highest intermediate ring **250** may slidably couple to the top ring **200** such that the highest intermediate ring **250** may slide into the top ring **200** when the invention **100** is collapsed and may slide out of the bottom of the top ring **200** when the invention **100** is expanded. The bottom of the lowest intermediate ring **252** may be coupled to the bottom ring **210**. The top ring **200** and the bottom ring **210** may extend outward from the intermediate rings **220**.

The invention **100** may collapse when opposing forces are applied to the top of the top ring **200** and to the bottom of the bottom ring **210** such that the bottom ring **210** is pushed towards the top ring **200**. As the bottom ring **210** is pushed upwards, each of the individual intermediate rings **230** may move up into the ring immediately above **240** or into the top ring **200** until the bottom ring **210** contacts the top ring **200**. In some embodiments, the invention **100** may be the height of the top ring **200** plus the height of the bottom ring **210** when collapsed. The invention **100** may expand when opposing forces are applied to the top of the top ring **200** and to the bottom of the bottom ring **210** such that the bottom ring **210** is pulled away from the top ring **200**. As the bottom ring **210** is pulled downwards, each of the individual intermediate rings **230** may move out of the ring immediately

5

above **240** or out of the top ring **200** until none of the individual intermediate rings **230** may move further.

FIG. **1** is an isometric view of an adjustable portable cup holder, according to an embodiment of the present invention. The attachment band **260** may be coupled to the top ring **200**. The attachment band **260** may be operable to detachably couple the invention **100** to the mounting point **910**. FIG. **5** is a right-side view of an adjustable portable cup holder, according to an embodiment of the present invention. The attachment band **260** may comprise an adjustment gap **262** which may be operable to adjust the inside diameter of the attachment band **260**. The attachment band **260** may further comprise a release clip **264**. FIG. **4** is a left side view of an adjustable portable cup holder, according to an embodiment of the present invention. The release clip **264** may be operable to open the attachment band **260** such that the attachment band **260** may pass around an armature of the mounting point **910** when installed or removing the invention **100**.

Note that the top ring **200** becomes immovable when the attachment band **260** is coupled to the mounting point **910** and therefore collapsing and expanding the invention **100** may be achieved by pushing and pulling the bottom ring **210** alone. FIG. **9A** illustrates the invention **100** when expanded and shows the direction that the force is applied to the bottom ring **210** to collapse the invention **100**. FIG. **9B** illustrates the invention **100** when collapsed and shows the direction that the force is applied to the bottom ring **210** to expand the invention **100**.

FIG. **2** is a rear view of an adjustable portable cup holder, according to an embodiment of the present invention. In use, the invention **100** may be coupled to the mounting point **910** by operating the release clip **264** to open the attachment band **260**, passing the attachment band **260** around an armature of the mounting point **910**, and closing the attachment band **260** using the release clip **264**. The beverage container **900** may be inserted into the top aperture **202** of the top ring **200** and the weight of the beverage container **900** may push the bottom ring **210** down. As the bottom ring **210** moves down, the bottom ring **210** may pull the plurality of intermediate rings **220** causing the invention **100** to expand until the invention **100** supports the beverage container **900**. The beverage container **900** may be removed from the invention **100** and reinserted as desired by a user. When no longer needed, the beverage container **900** may be removed from the invention **100**, the bottom ring **210** may be pushed towards the top ring **200** to collapse the invention **100**, and the attachment band **260** may be decoupled from the mounting point **910** by reversing the steps to couple the attachment band **260**.

The exact specifications, materials used, and method of use of the invention **100** may vary upon manufacturing. The foregoing descriptions of specific embodiments of the present invention have been presented for purposes of illustration and description. They are not intended to be exhaustive or to limit the invention to the precise forms disclosed, and obviously many modifications and variations are possible in light of the above teaching. The embodiments were chosen and described in order to best explain the principles of the invention and its practical application, to thereby enable others skilled in the art to best utilize the invention and various embodiments with various modifications as are suited to the particular use contemplated.

6

The invention claimed is:

1. An adjustable portable cup holder, comprising:
 - a top ring having a top, a bottom, and a top aperture, the top aperture is vertically oriented within the top ring and the top aperture includes a top and a bottom;
 - a bottom ring having a bottom surface;
 - a plurality of intermediate rings having a plurality of annular bands that are interposed between the top ring and the bottom ring; and
 - an attachment band adjusted to fit a mounting point of a beverage container, the attachment band is coupled to the top ring and the attachment band includes an adjustment gap which is operable to adjust an inside diameter of the attachment band;
 wherein the intermediate rings have a plurality of decreasing diameters with a highest intermediate ring being larger than a lowest intermediate ring;
 - wherein the intermediate rings are vertically tapered;
 - wherein the intermediate rings slidably couple to each other and collapse to a height of one of the individual intermediate rings when each of the individual intermediate rings slide up into the ring immediately above it;
 - wherein the bottom ring pulls the intermediate rings causing the adjustable portable cup holder to expand until the adjustable portable cup holder supports the beverage container wherein the top aperture includes a plurality of sloped internal walls;
 - wherein the top of the top aperture is wider than the bottom of the top aperture;
 - wherein the bottom of the top aperture is at least as large as an outside diameter of the beverage container such that the beverage container passes through the top ring when inserted into the top ring from the top of the top ring;
 - wherein the top ring becomes immovable when the attachment band is coupled to the mounting point;
 - wherein collapsing and expanding the adjustable portable cup holder is achieved by pushing and pulling the bottom ring;
 - wherein the bottom ring includes the bottom surface which prevents the beverage container from passing through the bottom ring;
 - wherein the attachment band includes a release clip;
 - wherein the adjustable portable cup holder is coupled to the mounting point by operating the release clip to open the attachment band, passing the attachment band around an armature of the mounting point;
 - wherein the release clip closes the attachment band;
 - wherein the beverage container is inserted into the top aperture of the top ring and the beverage container's weight pushes the bottom ring down; and,
 - wherein the beverage container is removed from the adjustable portable cup holder when the bottom ring is pushed towards the top ring to collapse the adjustable portable cup holder and the attachment band is decoupled from the mounting point.
2. The adjustable portable cup holder, according to claim 1, wherein the mounting point is selected from the group consisting of a beach chair, a stroller, or a grocery cart.
3. The adjustable portable cup holder, according to claim 1, wherein the beverage container is selected from the group consisting of a beverage cup, a water bottle, or a beverage can.
4. The adjustable portable cup holder, according to claim 1, wherein the adjustable portable cup holder is coupled to the mounting point and is operable to hold the beverage container.

5. The adjustable portable cup holder, according to claim 1, wherein the adjustable portable cup holder collapses for ease of storage and expands when ready for use.

* * * * *