




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁷ : H04L 12/28, H04Q 7/36</p>	<p>A1</p>	<p>(11) International Publication Number: WO 00/42737 (43) International Publication Date: 20 July 2000 (20.07.00)</p>
<p>(21) International Application Number: PCT/EP00/00074 (22) International Filing Date: 7 January 2000 (07.01.00) (30) Priority Data: 9900593.6 13 January 1999 (13.01.99) GB (71) Applicant: KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL). (72) Inventor: BAKER, Matthew, P., J.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). (74) Agent: MOODY, Colin, J.; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).</p>		<p>(81) Designated States: JP, KR, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>

(54) Title: A WIRELESS LOCAL AREA NETWORK(LAN) AND A METHOD OF OPERATING THE LAN

(57) Abstract

A wireless local area network(LAN) comprises a primary station(PS) having a radio transceiving means and a plurality of secondary stations(SS) each secondary station having radio transceiving means. The primary station operates in accordance with a time division protocol comprising a plurality of concatenated frames. A predetermined number of the concatenated frames comprise a superframe which further includes a time slot(HiRBS). In response to the transmission of a system wide clock cycle synchronisation signal the primary station initiates the transmission of a superframe and a secondary station(HN) wishing to join the LAN but unable to communicate directly with the primary station transmits a signal burst in the time slot for reception by a secondary station(FN) which is in range of the primary station, the secondary station(FN) acting as a relay station for the out-of-range secondary station(HN) during its registration with the LAN. The time slot(HiRBS) may be located in front of the first frame or within the first frame of the superframe.

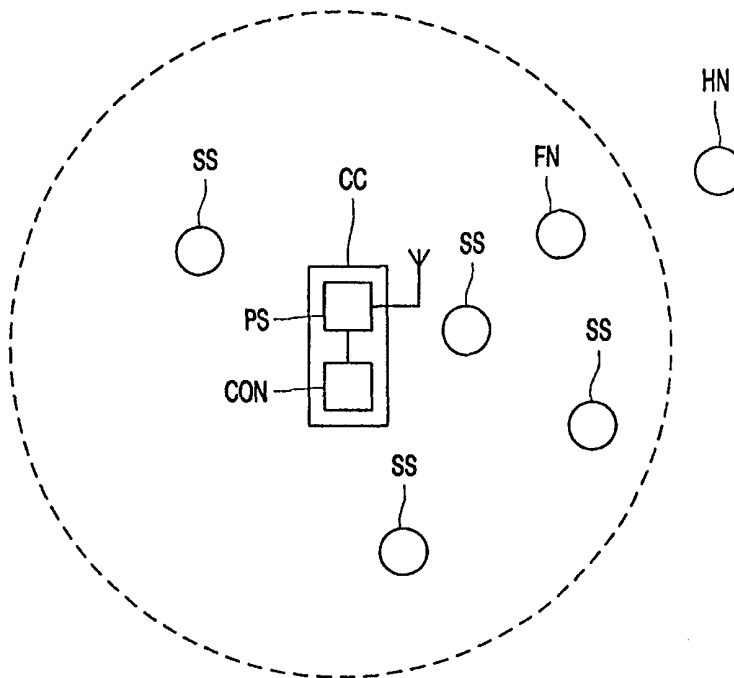

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakistan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

DESCRIPTION

A WIRELESS LOCAL AREA NETWORK(LAN) AND A METHOD OF OPERATING THE LAN

5 Technical Field

The present invention relates to a wireless local area network(LAN) and to a method of operating the LAN. The LAN may be of any suitable type having particular, but not exclusive, application in short range applications such as may be found in domestic and office environments.

10 Background Art

A typical LAN may comprise central controller consisting of a controller and a primary station having radio transceiving means, the transmitting range of the primary station defining the radio coverage area of the LAN, and a plurality of secondary stations located in the coverage area and registered with
15 central controller. Each secondary station comprises a radio transceiver. Communication between the primary station and the secondary stations in the LAN is done on a time division duplex basis. However provision is made in the time division protocol for duplex transmission between secondary stations without having to use the primary station. Depending on the environment there
20 may be 2 or more LANs with overlapping coverage areas and also it is possible for a secondary station to be able to roam and to want to seek registration with a LAN although out-of-range with the primary station of that LAN. However because the roaming secondary station is out-of-range it is unable to receive the downlink transmissions from the primary station and in
25 consequence it is unable to determine the framing structure of these transmissions.

 Disclosure of Invention

An object of the present invention is to enable an out-of-range secondary station to register with the central controller of a LAN it wishes to
30 join.

 According to one aspect of the present invention there is provided a method of operating a local area network(LAN) comprising a primary station

having a radio transceiving means and a plurality of secondary stations, each secondary station having radio transceiving means, characterised by periodically transmitting wide area control signals, by the primary station initiating transmission of a signal a time interval after the wide area control signal, and by a secondary station which is out-of-range with the primary station and wishing to join the LAN transmitting a signal burst in said predetermined interval.

The present invention provides a method of operating a local area network(LAN) comprising a primary station having a radio transceiving means and a plurality of secondary stations, each having radio transceiving means, characterised in that the primary station operates in accordance with a time division protocol comprising a plurality of concatenated frames, in that a predetermined number of the concatenated frames comprise a superframe, in that a wide area control signal is transmitted, in that a predetermined interval after the wide area control signal the primary station initiates the transmission of a superframe, and in that a secondary station unable to communicate directly with the primary station transmits a signal burst during at least a portion of the predetermined interval for reception by at least one of the secondary stations which is in range of the primary station, said at least one of the secondary stations acting as a relay station for the said secondary station.

The present invention also provides a method of operating a local area network (LAN) comprising a primary station having a radio transceiving means and a plurality of secondary stations, each secondary station having radio transceiving means, characterised by periodically transmitting wide area control signals, by the primary station initiating transmission of a signal after the wide area control signal, the signal comprising a superframe consisting of a plurality of TDMA frames together with a time slot, and a secondary station which is out-of-range with the primary station and wishing to join the LAN transmitting a signal burst in said time slot.

The present invention further provides a method of operating a local area network(LAN) comprising a primary station having a radio transceiving means and a plurality of secondary stations, each secondary station having

radio transceiving means, characterised in that the primary station operates in accordance with a time division protocol comprising a plurality of concatenated frames, in that a predetermined number of the concatenated frames comprise a superframe which further includes a time slot, in that a wide area control signal is transmitted, and in that the primary station initiates the transmission of a superframe, wherein a secondary station wishing to join the LAN but unable to communicate directly with the primary station transmits a signal burst in said time slot for reception by at least one of the secondary stations which is in range of the primary station, said at least one of the secondary stations acting as a relay station for the said secondary station.

According to a second aspect of the present invention there is provided a local area network(LAN) comprising a central controller including a primary station having radio transceiving means, a plurality of secondary stations, each secondary station having radio transceiving means, means for transmitting a wide area control signal, the primary station responsive to receipt of the wide area control signal transmitting a message comprising a time slot concatenated with a plurality of frames, said time slot enabling a secondary station which is out of range of the primary station to transmit a signal burst.

By means of the present invention the out-of-range secondary station is able to be synchronised with the stations of the LAN and be able to register with the central controller of the LAN using an already registered secondary station as a relay station.

Brief Description of Drawings

The present invention will now be described, by way of example, with reference to the accompanying drawings, wherein:

Figure 1 is a diagram of 3 overlapping LANs and a plurality of transmitters for propagating clock synchronisation signals,

Figure 2 illustrates a typical frame structure used in a time division protocol for use in a LAN,

Figure 3 is a diagram of a single LAN and serves to facilitate an understanding of the method in accordance with the present invention,

Figure 4 is a timing diagram illustrating a modified time division protocol;

Figure 5 is a timing diagram illustrating two or more LANs sharing the same channel, and

Figure 6 illustrates the various control messages associated with the registration of a hidden node(HN).

5 In the drawings the same reference numerals have been used to identify corresponding features.

Modes for Carrying Out the Invention

Referring to Figure 1, three LANs, LAN 1, LAN 2 and LAN 3, are shown. Each LAN comprises a central controller CC formed by a primary station PS
10 consisting of radio transceiving means and an associated controller CON. The geographical extent of the LAN is determined by the radio coverage area of the transmitter of the primary station PS. Within the coverage area are located secondary stations SS which comprise transceiving means, a controller and an
15 end user apparatus which in a domestic environment may for example be a TV, VCR or a personal computer. The output power of the secondary station's transmitter is comparable with that of the primary station so the a secondary station can communicate from wherever it is within the LAN.

In operation each primary station PS may operate on a different frequency or may operate at different times on the same frequency so that
20 there is no interference between adjacent LANs. Communication between a primary station PS and its secondary stations is in accordance with a time division protocol based on a sequence of concatenated frames termed a superframe. Figure 2 shows two typical frames F1, F2 which comprise three main fields BCH, RACH and OD(other data). The field BCH comprises a base
25 station channel consisting of synchronising signals and other timing information which a secondary station requires to determine the location of the RACH field which may be of variable length. The RACH field constitutes a random access channel and fulfils three main functions: (a) downlink transmissions such as an ALOHA message or responses to ALOHA
30 messages, (b) uplink transmissions from secondary stations such as an ALOHA message or responses to the ALOHA message and establishing uplink communication links, and (c) secondary station to secondary station

communications within the LAN. The field OD relates to the exchange of data. If a secondary station registered with a central controller switches-on it has to receive the BCH field in order to synchronise itself and to determine the location of the RACH field. Once synchronised then it is able to receive the RACH field and participate in the various modes of operation mentioned above.

Reverting to Figure 1, there is shown one method of propagating a wide area control message, such as a clock cycle synchronisation area, over a large geographical area encompassing a plurality of LANs. The basic principle is based on a master clock CLO transmitting a clock signal. This signal is received by a first group of clock transceivers CL1 which are arranged to re-transmit the clock signals at a known time interval T after the master clock CLO transmitted the original signal. A second group of clock transceivers CL2 receive the clock signal from the first group and re-transmit the clock signal at the same known interval T after the first group CL1 transmitted its clock signal. The sequence is repeated by the third and subsequent groups as required. The total time between each re-transmission, termed radio distance class RDC, comprises the sum of the time to transmit the clock time signal and the known time interval T . Thus by the master clock CLO and each of the groups of clocks CL1, CL2 and so on including their RDC in their transmission or otherwise knowing their RDC, a primary station and a secondary station can determine the start of the master clock transmission and can synchronise its clock accordingly. The transmission of successive clock signals occupies a period of time termed a clock cycle synchronisation area CCSA(see Figure 4).

Referring to Figure 3 which shows a single LAN the geographical extent of which is shown by the broken line circle. A secondary station, termed a hidden node HN, is outside the coverage area of the LAN and wishes to register with the central controller CC. However as it is out-of-range of the primary station's transmitter it cannot hear the BCH information which gives the location of the RACH field which is normally used to enable new secondary stations to register in a LAN, consequently it cannot register.

The method in accordance with the present invention will permit the hidden node HN to join the LAN through the intermediary of an in-range secondary station, termed a forwarding node FN, located within the LAN and therefore is able to receive transmission from its primary station. This can be effected by making use of the clock cycle synchronisation area CCSA or other suitable wide area control message which is transmitted once every superframe, normally at the start of the superframe, and provides a timing reference to all the stations. The timing of the superframe shown in Figure 2 is modified by adding a time slot (or time interval) in the time domain between the end of the CCSA and the start of the superframe proper. This is shown in Figure 4 and the additional time slot or time interval is termed a hidden request burst slot HiRBS. The duration of HiRBS is of the order of one symbol.

A new HN wishing to join an existing wireless LAN determines the timing of the HiRBS from the CCSA. The HN sends a 1 symbol burst in the HiRBS. The primary station PC will not receive the HiRBS since HN is out-of-range. However if a forwarding node FN, which is in-range of the primary station PS, hears the HiRBS, it will respond during the RACH period of the respective frame with a RACH_notify message which starts with a predefined identifiable sequence and includes information giving the timing relationship between the RACH and the CCSA. The HN listens for the RACH_notify messages to determine the timing of the RACH so that it can use the RACH for the next stage of registration with the FN. It is possible for several secondary stations to hear the HiRBS message and act as FNs but in the event the HN selects the best FN for establishing its link with the primary station. The HN sends registration information to the selected FN which is forwarded by the FN in the next RACH period to effect registration of HN with the central controller.

Figure 5 illustrates an arrangement in which two or more LANs operate on the same frequency channel. The central controllers transmit their respective superframes which may be of unequal length as shown by LAN 1's superframe comprising frames F1 to F4 and LAN 2's superframe comprising frames F1 and F2. The timing of the respective transmissions is related to the

commencement of the transmission of the CCSA, for example LAN 1's superframe begins at a predetermined time T1 after the start of the CCSA and LAN 2's superframe begins at a predetermined time T2 after the start of the CCSA. The HiRBS time slot is provided in a common time period, conveniently immediately following the CCSA, to enable any HN to transmit a signal burst which is detected by FN in a nearby LAN. Registration then proceeds as described previously.

Figure 6 shows an example of the signalling between the HN, FN and the central controller CC to effect registration of the HN.

The sequence comprises messages 10 to 24 which are summarised below:

Message 10	HN sends HiRBS burst
Message 12	FN sends RACH_notify
Message 14	HN sends registration request in the next RACH
Message 16	FN requests a time slot from the CC
Message 18	CC grants the time slot
Message 20	FN forwards HN's registration request
Message 22	CC grants HN's registration request
Message 24	FN forwards the granted registration request to HN.

Other signalling by the HN is relayed to and from the CC by the FN.

Although the hidden request burst slot HiRBS has been described as being located at the beginning of the superframe it may be located at another point in the superframe, such as between BCH and RACH of the first frame or at the beginning of the first RACH field, which is at a fixed time interval from the beginning of the CCSA and can be programmed into the secondary stations.

The provision of the HiRBS has the benefit that the minimum of available bandwidth has to be devoted to allowing out-of-range secondary stations (or hidden nodes) to register with a LAN, which bandwidth may not be used if there are no hidden nodes.

From reading the present disclosure, other modifications will be apparent to persons skilled in the art. Such modifications may involve other

features which are already known in the design, manufacture and use of wireless local area networks and component parts thereof and which may be used instead of or in addition to features already described herein.

Industrial Applicability

- 5 Base station controlled wireless local area networks.

CLAIMS

1. A method of operating a local area network(LAN) comprising a primary station having a radio transceiving means and a plurality of secondary stations, each secondary station having radio transceiving means, characterised by periodically transmitting wide area control signals, by the primary station initiating transmission of a signal a time interval after the wide area control signal, and by a secondary station which is out-of-range with the primary station and wishing to join the LAN transmitting a signal burst in said predetermined interval.

2. A method as claimed in claim 1, characterised in that a secondary station in the LAN receiving the signal burst acts as a relay station between the primary station and the out-of-range secondary station.

3. A method of operating a local area network(LAN) comprising a primary station having a radio transceiving means and a plurality of secondary stations, each having radio transceiving means, characterised in that the primary station operates in accordance with a time division protocol comprising a plurality of concatenated frames, in that a predetermined number of the concatenated frames comprise a superframe, in that a wide area control signal is transmitted, in that a predetermined interval after the wide area control signal the primary station initiates the transmission of a superframe, and in that a secondary station unable to communicate directly with the primary station transmits a signal burst during at least a portion of the predetermined interval for reception by at least one of the secondary stations which is in range of the primary station, said at least one of the secondary stations acting as a relay station for the said secondary station.

30

4. A method of operating a local area network(LAN) comprising a primary station having a radio transceiving means and a plurality of secondary

stations, each secondary station having radio transceiving means, characterised by periodically transmitting wide area control signals, by the primary station initiating transmission of a signal after the wide area control signal, the signal comprising a superframe consisting of a plurality of TDMA
5 frames together with a time slot, and a secondary station which is out-of-range with the primary station and wishing to join the LAN transmitting a signal burst in said time slot.

5. A method as claimed in claim 4, characterised in that a
10 secondary station in the LAN receiving the signal burst acts as a relay station between the primary station and the out-of-range secondary station.

6. A method of operating a local area network(LAN) comprising a primary station having a radio transceiving means and a plurality of secondary
15 stations, each secondary station having radio transceiving means, characterised in that the primary station operates in accordance with a time division protocol comprising a plurality of concatenated frames, in that a predetermined number of the concatenated frames comprise a superframe which further includes a time slot, in that a wide area control signal is
20 transmitted, and in that the primary station initiates the transmission of a superframe, wherein a secondary station wishing to join the LAN but unable to communicate directly with the primary station transmits a signal burst in said time slot for reception by at least one of the secondary stations which is in range of the primary station, said at least one of the secondary stations acting
25 as a relay station for the said secondary station.

7. A local area network(LAN) comprising a central controller including a primary station having radio transceiving means, a plurality of secondary stations, each secondary station having radio transceiving means,
30 means for transmitting a wide area control signal, the primary station responsive to receipt of the wide area control signal transmitting a message comprising a time slot concatenated with a plurality of frames, said time slot

enabling a secondary station which is out of range of the primary station to transmit a signal burst.

8. A LAN as claimed in claim 7, characterised in that one of the
5 secondary stations of the LAN acts as a radio relay station for the out-of-range secondary station.

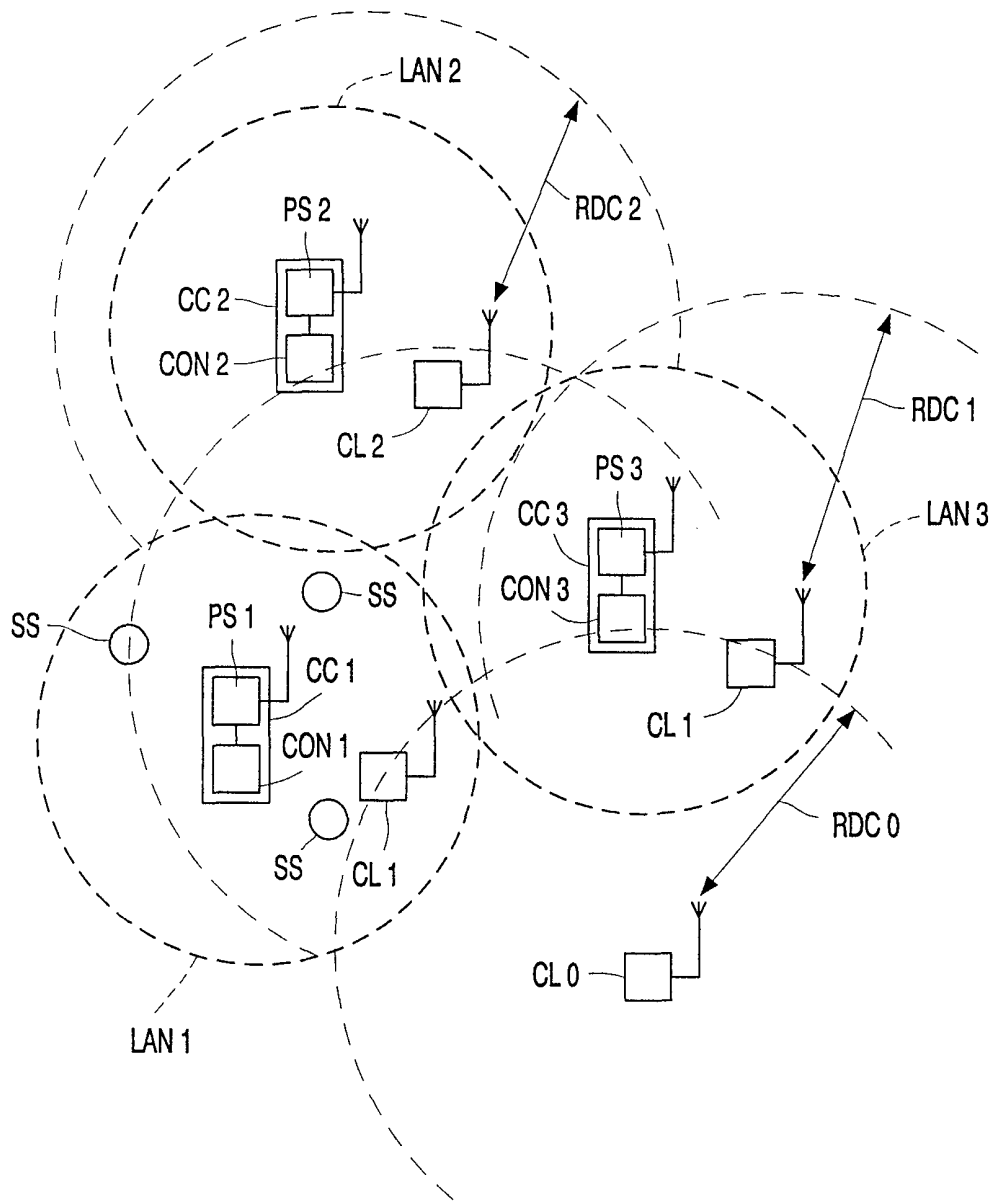


FIG. 1

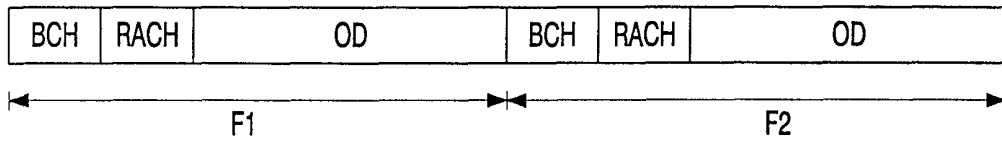


FIG. 2

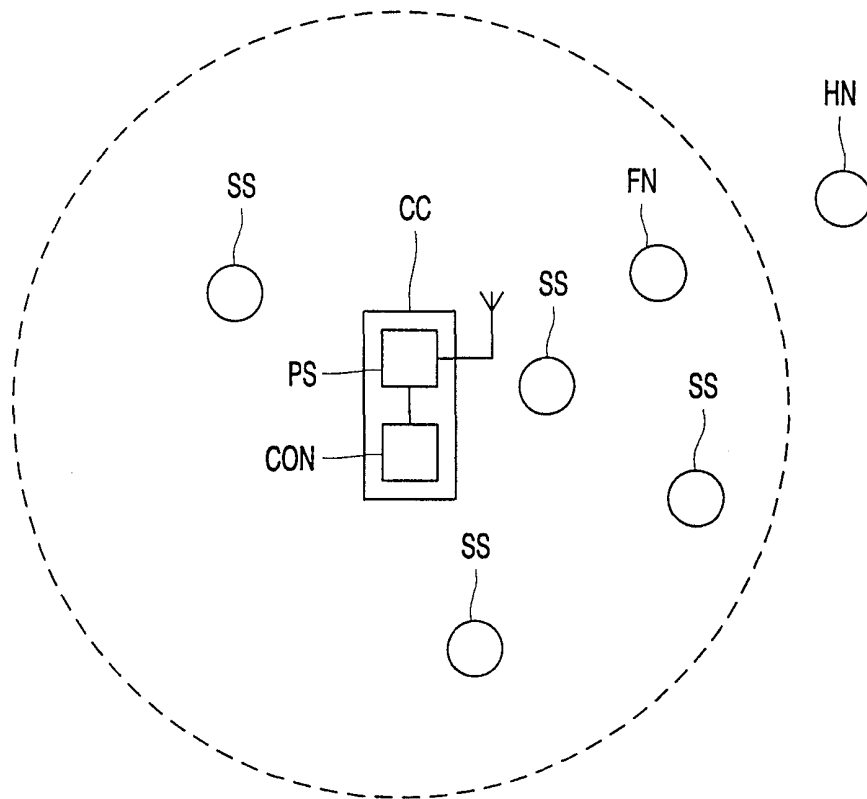


FIG. 3

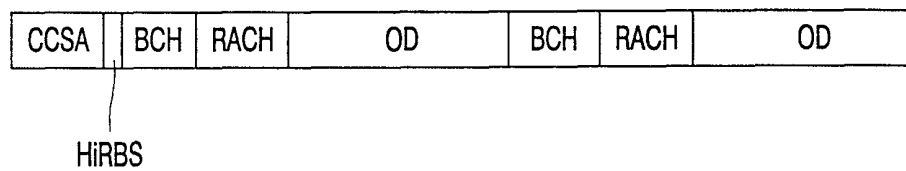


FIG. 4

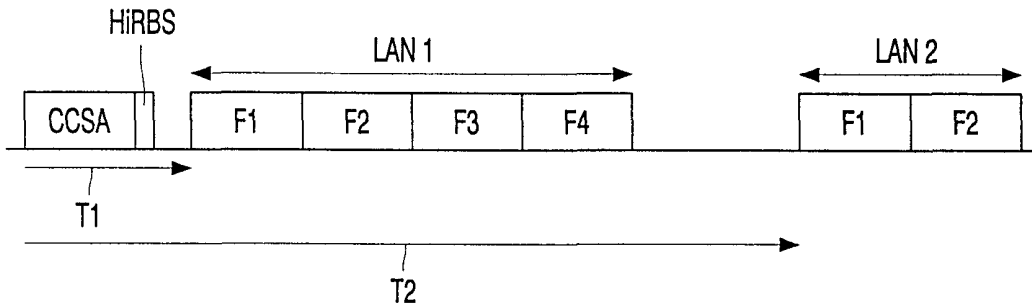


FIG. 5

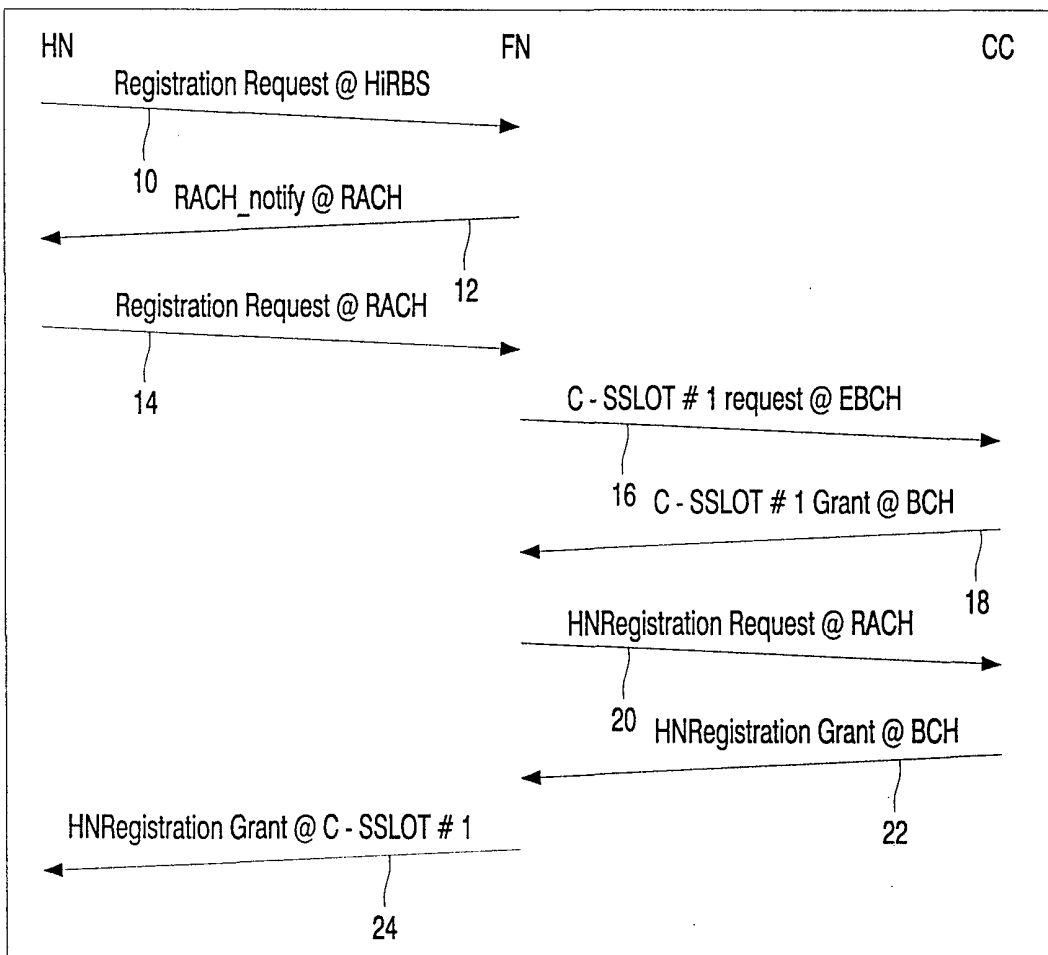


FIG. 6

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP 00/00074

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04L12/28 H04Q7/36

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 H04L H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 633 876 A (DINKINS GILBERT M) 27 May 1997 (1997-05-27) column 1, line 20 - line 40 figure 1	1-8
A	"PACKET RELAY SYSTEM FOR WIRELESS LAN" IBM TECHNICAL DISCLOSURE BULLETIN, US, IBM CORP. NEW YORK, vol. 39, no. 2, 1 February 1996 (1996-02-01), pages 133-135, XP000559848 ISSN: 0018-8689 the whole document	1-8

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

25 May 2000

Date of mailing of the international search report

07/06/2000

Name and mailing address of the ISA
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Blanco Cardona, P

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 00/00074

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 2 253 972 A (MOTOROLA INC) 23 September 1992 (1992-09-23) abstract page 4, line 24 -page 5, line 26 page 10, line 6 - line 10 -----	1-8
A	EP 0 583 058 A (NCR INT INC) 16 February 1994 (1994-02-16) abstract page 2, line 45 -page 3, line 1 -----	1-8
A	US 5 553 076 A (BEHTASH SAMAN ET AL) 3 September 1996 (1996-09-03) abstract column 2, line 41 - line 55 column 9, line 43 -column 10, line 11 claim 1 -----	1-8

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 00/00074

Patent document cited in search report	A	Publication date	Patent family member(s)	Publication date
US 5633876	A	27-05-1997	US 5388101 A	07-02-1995
			AU 673889 B	28-11-1996
			AU 5895894 A	24-05-1994
			BR 9307433 A	31-08-1999
			CA 2147837 A	11-05-1994
			CN 1090444 A	03-08-1994
			CZ 9501069 A	13-03-1996
			EP 0666010 A	09-08-1995
			FI 951960 A	25-04-1995
			HU 71648 A, B	29-01-1996
			IL 107399 A	15-04-1997
			IL 118601 A	06-12-1998
			JP 8503582 T	16-04-1996
			MX 9306558 A	31-01-1995
			PL 308533 A	21-08-1995
			PL 172843 B	31-12-1997
			PL 172850 B	31-12-1997
			WO 9410803 A	11-05-1994
			US 5481546 A	02-01-1996
			US 5737363 A	07-04-1998
			US 5790936 A	04-08-1998
			US 5592491 A	07-01-1997
			US 5751693 A	12-05-1998
			US 5678172 A	14-10-1997
			US 5854793 A	29-12-1998
			ZA 9307728 A	13-05-1994
<hr/>				
GB 2253972	A	23-09-1992	NONE	
<hr/>				
EP 0583058	A	16-02-1994	JP 6104895 A	15-04-1994
			US 5390165 A	14-02-1995
<hr/>				
US 5553076	A	03-09-1996	AU 2383695 A	29-11-1995
			WO 9530291 A	09-11-1995
<hr/>				