

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
25 June 2009 (25.06.2009)

PCT

(10) International Publication Number
WO 2009/079167 A1

(51) International Patent Classification:
H04B 10/04 (2006.01)

(74) Agent: **PALMIERI, Joseph**; Verizon Legal Department,
Patent Management Group, 1515 North Court House Road,
Suite 500, Arlington, Virginia 22201 (US).

(21) International Application Number:
PCT/US2008/084514

(22) International Filing Date:
24 November 2008 (24.11.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/956,764 14 December 2007 (14.12.2007) US

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(71) Applicant (for all designated States except US): **VERIZON SERVICES ORGANIZATION INC.** [US/US]; 600 Hidden Ridge, Irving, Texas 75038 (US).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL,

(72) Inventor: **CHEN, David Z.**; 4005 Brittany Way, Richardson, Texas 75082 (US).

[Continued on next page]

(54) Title: HIGH PERFORMANCE GIGABIT PASSIVE OPTICAL NETWORK

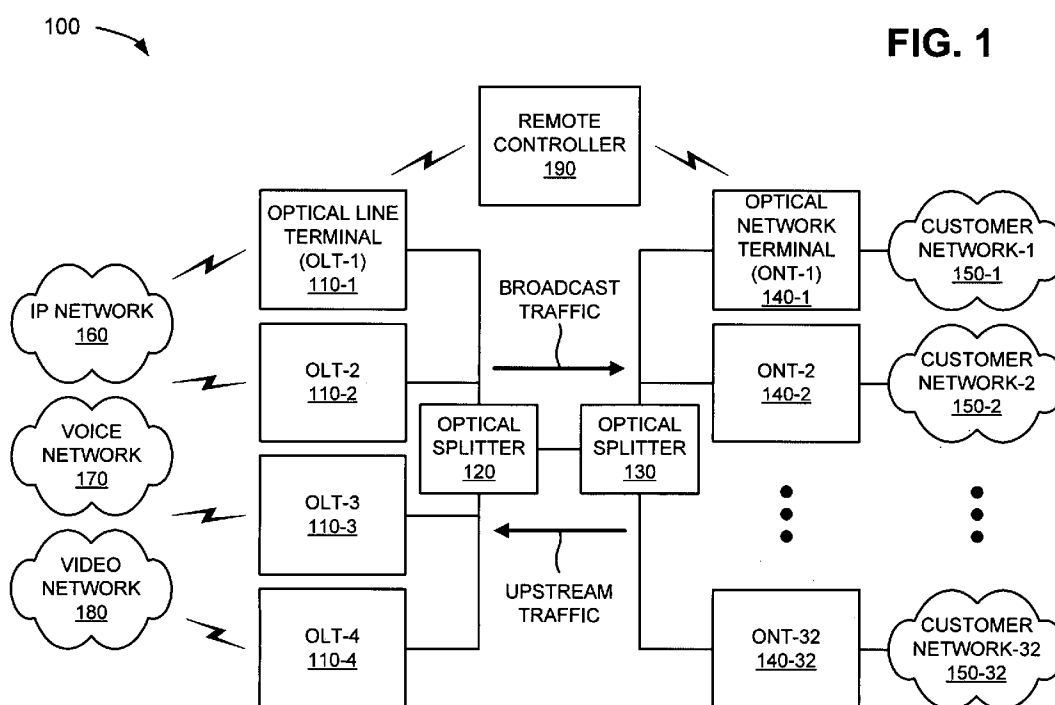

(57) Abstract: A system includes an optical line terminal (OLT) that includes an OLT transmitter. The OLT transmitter includes one or more fixed wavelength optical sources that generate an optical signal at a first wavelength, and an optical waveguide that transmits the optical signal at the first wavelength in an optical network.

WO 2009/079167 A1



NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG,
CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report*

HIGH PERFORMANCE GIGABIT PASSIVE OPTICAL NETWORK

BACKGROUND

A passive optical network (PON) is a point-to-multipoint, fiber to premises network architecture in which optical splitters are used to enable a single optical fiber to serve multiple premises (e.g., customers or end users). A PON may include an optical line termination and an optical network termination or terminal (ONT) interconnected by a passive optical distribution network (ODN). One or more optical line terminations may be located at a service provider's central office. One or more ONTs may be located at customers' premises. An optical line termination may include one or more optical line terminals (OLTs or PON-LTs) that communicate with a unique set of ONTs, and there may be a one-to-many relationship between an OLT and the ONTs. Downstream or broadcast traffic (e.g., optical signals) may be broadcast from an OLT to all associated ONTs. The downstream or broadcast traffic may be addressed to specific ONTs and unaddressed ONTs may ignore the traffic, and encryption may be used to prevent eavesdropping. Upstream traffic (e.g., optical signals) may be sent from the ONTs to an associated OLT, and the optical line termination may combine the upstream traffic from all of its OLTs using a multiple access protocol.

A gigabit PON (G-PON) is a PON that supports higher traffic rates, enhanced security, and Layer 2 protocols. Downstream or broadcast traffic in a G-PON may be broadcast from each OLT to ONTs associated with the OLT at a data rate of "2.5" gigabits per second (G/s or Gbps). Upstream traffic may be sent from each ONT to the OLT at a data rate of "1.25" G/s. A G-PON may provide different services (e.g., video (e.g., television), data (e.g., high-speed Internet access), and/or voice (e.g., telephone) services) over a single optical connection with each ONT.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is an exemplary diagram of a network in which systems and methods described herein may be implemented;

Fig. 2 illustrates exemplary components of a remote controller of the network depicted in Fig. 1;

Fig. 3 depicts a diagram of a portion of the network depicted in Fig. 1, and exemplary components of an optical line terminal and an optical network terminal of the network;

Fig. 4 illustrates a diagram of exemplary components of a transmitter of the optical line terminal depicted in Fig. 3;

Fig. 5 depicts a diagram of exemplary components of a receiver of the optical line terminal illustrated in Fig. 3;

Fig. 6 illustrates a diagram of exemplary components of a fixed wavelength optical filter set of the receiver depicted in Fig. 5;

Fig. 7 depicts a diagram of exemplary components of a receiver of the optical network terminal illustrated in Fig. 3;

5 Fig. 8 illustrates a diagram of exemplary components of a fixed wavelength optical filter set of the receiver depicted in Fig. 7;

Fig. 9 depicts a diagram of exemplary components of a transmitter of the optical network terminal illustrated in Fig. 3;

10 Fig. 10 is an exemplary diagram of another network in which systems and methods described herein may be implemented;

Fig. 11 illustrates a diagram of an optical signal booster that may be provided in the transmitters and/or receivers of the optical line terminal and/or the optical network terminal depicted in Fig. 3; and

15 Figs. 12-15 depict flow charts of exemplary processes according to implementations described herein.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

The following detailed description refers to the accompanying drawings. The same reference numbers in different drawings may identify the same or similar elements. Also, the following detailed description does not limit the invention.

20 Currently, most of the new proposed architectures for advanced passive optical networks utilize expensive components. For example, the new proposed passive optical networks depend on wavelength division multiplexing (WDM), which requires use of expensive array waveguide gratings (which may be used as optical multiplexers and/or de-multiplexers), optical interleavers (e.g., three-port passive fiber-optic devices that are used to combine two sets
25 of dense WDM channels into a composite signal stream), optical multiplexers, optical de-multiplexers, optical isolators, tunable optical sources (e.g., lasers), tunable filters, etc. Some conventional high cost optical sources and/or tunable filters may include “C band” or “L band” tunable optical sources and/or tunable filters having a tunable range of at least about “30” to “45” nanometers.

30 Implementations described herein may provide one or more inexpensive fixed wavelength (or fixed frequency) optical sources and/or one or more inexpensive, dynamically-activated fixed wavelength (or fixed frequency) optical filters in an optical network (e.g., a G-PON) that includes one or more optical line terminations (e.g., at a central office) and one or more optical network terminals (ONTs) (e.g., at end users’ premises). Each optical line

termination may include one or more optical line terminals (OLTs) that may communicate with associated ONTs. For example, in one implementation, the systems and/or methods may provide a fixed wavelength optical source and a group of fixed wavelength optical filters in an optical network. The systems and/or methods may generate an optical signal having a specified wavelength (e.g., the fixed wavelength), and may select one of the group of fixed wavelength optical filters based on the wavelength of the optical signal. The systems and/or methods may receive the optical signal with the selected fixed wavelength optical filter.

Fig. 1 is an exemplary diagram of a network 100 in which systems and methods described herein may be implemented. As illustrated, network 100 may include one or more optical line terminals (OLTs) 110-1, 110-2, 110-3, and 110-4 (collectively referred to as "OLTs 110" or individually as "OLT 110"), optical splitters 120 and 130, one or more optical network terminals (ONTs) 140-1, 140-2, ..., 140-32 (collectively referred to as "ONTs 140" or individually as "ONT 140"), one or more customer networks 150-1, 150-2, ..., 150-32 (collectively referred to as "customer networks 150" or individually as "customer network 150") associated with corresponding ONTs 140, an Internet Protocol (IP) network 160, a voice network 170, a video network 180, and/or a remote controller 190. Four OLTs, two optical splitters, thirty-two ONTs, a single remote controller, and multiple networks have been illustrated in Fig. 1 for simplicity. In practice, there may be more or less OLTs, optical splitters, ONTs, remote controllers, and/or networks. Also, in some instances, one of OLTs 110 may perform one or more functions performed by another one of OLTs 110. In one implementation, OLTs 110, optical splitters 120 and 130, and ONTs 140 may form a G-PON. In other implementations, OLTs 110, optical splitters 120 and 130, and ONTs 140 may form other types of PONs (e.g., a broadband PON (B-PON), an Ethernet PON (E-PON), etc.).

OLTs 110 may reside in an optical line termination provided at a central office (e.g., of a service provider), and each OLT 110 may include a device that terminates a PON, and provides an interface between the PON and other networks (e.g., IP network 160, voice network 170, video network 180, etc.). In one implementation, each OLT 110 may provide Ethernet aggregation capabilities and/or link aggregation on ports for additional capacity and/or traffic protection. OLTs 110 may receive information (e.g., from IP network 160, voice network 170, video network 180, etc.), and/or may send the information as broadcast or downstream traffic (e.g., optical signals) to ONTs 140. OLTs 110 may manage upstream traffic provided by ONTs 140 by informing ONTs 140 when they can and/or cannot transmit upstream traffic. Further details of OLTs 110 are provided below in connection with Figs. 3-6.

Optical splitter 120 may include an optical device (e.g., a 1:4, six decibel (dB) optical

splitter provided in optical line termination) that splits an optical signal (e.g., upstream traffic provided by ONTs 140) into four optical signals (e.g., multiple paths of optical signals). For example, in one implementation, optical splitter 120 may receive a single optical signal (e.g., upstream traffic) from optical splitter 130, may split the optical signal into four optical signals, and may provide the four optical signals to one or more of OLTs 110. In other implementations, optical splitter 120 may receive one to four optical signals (e.g., downstream traffic) from one or OLTs 110 (e.g., one from each OLT 110), and may pass the four optical signals as a single optical signal to optical splitter 130.

Optical splitter 130 may include an optical device (e.g., a 1:32, sixteen dB optical splitter) that splits an optical signal (e.g., broadcast or downstream traffic provided by OLTs 110) into thirty-two optical signals. For example, in one implementation, optical splitter 130 may receive a single optical signal (e.g., broadcast or downstream traffic) from optical splitter 120, may split the optical signal into thirty-two optical signals, and may provide the thirty-two optical signals to one or more of ONTs 140. In other implementations, optical splitter 130 may receive one to thirty-two optical signals (e.g., upstream traffic) from ONTs 140 (e.g., one from each ONT 140), and may pass the one or more optical signals as a single optical signal to optical splitter 120.

ONTs 140 may reside at customers' premises and each ONT 140 may include a device that terminates a PON, and provides an interface between the PON and the customer's premises (e.g., customer networks 150, etc.). In one implementation, each ONT 140 may provide multiple service interfaces for the customer (e.g., it may provide an interface for telephony (i.e., voice) services, an interface for Ethernet (i.e., data) services, an interface for television (i.e., video) services, etc.). ONTs 140 may receive information (e.g., from customer network 150, etc.), and/or may send the information as upstream traffic (e.g., optical signals) to OLTs 110. ONTs 140 may receive downstream traffic (e.g., from IP network 160, voice network 170, video network 180, etc.) provided by OLTs 110, and/or may send the downstream traffic to devices provided in customer network 150. Further details of ONTs 140 are provided below in connection with Figs. 3 and 7-9.

Each of customer networks 150 may include a local area network (LAN), a wide area network (WAN), or a combination of networks that provide data, voice, and/or television services to the customer or end user. In one implementation, each of customer networks 150 may include a network interconnecting one or more devices providing data services (e.g., personal computers, workstations, laptops, etc.), one or more devices providing voice services (e.g., telephones), and/or one or more devices providing video services (e.g., televisions, set-top

boxes, etc.).

IP network 160 may include a LAN, a WAN, a metropolitan area network (MAN), an intranet, the Internet, or a combination of networks that provide data services. In one implementation, IP network 160 may include the Internet, and/or a network that provides access to the Internet.

Voice network 170 may include a Public Land Mobile Network (PLMN), a telephone network, such as the Public Switched Telephone Network (PSTN) or a cellular telephone network, or a combination of networks that provide voice services (e.g., telephony services). In one implementation, voice network 170 may include a Synchronous Optical Network (SONET)-based network, the PSTN network, a voice media gateway, etc.

Video network 180 may include a LAN, a MAN, a WAN, the Internet, an intranet, a PSTN, or a combination of networks that provide video (e.g., television) services. In one implementation, video network 180 may include one or more content servers that provide television programming, video content (e.g., movies, on-demand services, live television, etc.), etc. to a set-top box and a television monitor, one or more video encoders, etc.

Remote controller 190 may include one or more server entities, or other types of computation or communication devices, that gather, process, search, and/or provide information in a manner described herein. In one implementation, remote controller 190 may determine bandwidth demand for upstream and/or broadcast traffic between OLTs 110 and ONTs 140, and/or may dynamically adjust OLTs 110 and/or ONTs 140 to balance traffic in network 100 based on the determined bandwidth demand. Remote controller 190 may also dynamically adjust OLTs 110 and/or ONTs 140 to protect the traffic in network 100, and/or to increase bandwidth for the traffic based on the determined bandwidth demand. Remote controller 190 may be provided in a central office, in optical line terminations, etc. In other implementations, remote controller 190 may adjust optical filters provided in OLTs 110 and/or ONTs 140 to turn on and/or off optical signals of particular wavelengths at a user location, may switch on wavelengths for additional bandwidth, may switch on or off wavelengths to control user access to video channels (e.g., premium packages, etc.), etc.

The arrangement described above with respect to network 100 may enable omission of components typically used in optical networks. For example, in one implementation, network 100 may omit expensive equipment, such as optical array waveguide gratings, optical interleavers, optical multiplexers, optical de-multiplexers, optical isolators, tunable optical sources, tunable filters, etc. Omission of such components may reduce the cost and/or complexity of network 100. The arrangement of network 100 may also make use of existing

optical power splitters (e.g., optical splitters 120 and 130), and may simplify network upgrades (e.g., to ten, forty, and one-hundred Gbps passive optical networks). Furthermore, the arrangement of network 100 may eliminate optical isolation so that broadcast and upstream traffic may be provided on a single optical fiber (e.g., a receiving filter (not shown) may block any unwanted wavelength and interference from opposite direction traffic).

Fig. 2 is an exemplary diagram of a device 200 that may correspond to remote controller 190. As illustrated, device 200 may include a bus 210, processing logic 220, a main memory 230, a read-only memory (ROM) 240, a storage device 250, an input device 260, an output device 270, and/or a communication interface 280. Bus 210 may include a path that permits communication among the components of device 200.

Processing logic 220 may include a central processing unit (CPU), a microprocessor, a field programmable gate array (FPGA), an application specific integrated circuit (ASIC), a micro electrical mechanical switch (MEMS), a general purpose graphical processing unit (GPGPU), an optical processor, a reduced instruction processor, or other type of processing logic that may interpret and execute instructions. Main memory 230 may include a random access memory (RAM) or another type of dynamic storage device that may store information and instructions for execution by processing logic 220. ROM 240 may include a ROM device or another type of static storage device that may store static information and/or instructions for use by processing logic 220. Storage device 250 may include a magnetic and/or optical recording medium and its corresponding drive.

Input device 260 may include a mechanism that permits an operator to input information to device 200, such as a keyboard, a mouse, a pen, a microphone, voice recognition and/or biometric mechanisms, etc. Output device 270 may include a mechanism that outputs information to the operator, including a display, a printer, a speaker, etc. Communication interface 280 may include any transceiver-like mechanism that enables device 200 to communicate with other devices and/or systems. For example, communication interface 280 may include mechanisms for communicating with another device or system via a network, such as network 170.

As described herein, device 200 may perform certain operations in response to processing logic 220 executing software instructions contained in a computer-readable medium, such as main memory 230. A computer-readable medium may be defined as a physical or logical memory device. The software instructions may be read into main memory 230 from another computer-readable medium, such as storage device 250, or from another device via communication interface 280. The software instructions contained in main memory 230 may

cause processing logic 220 to perform processes described herein. Alternatively, hardwired circuitry may be used in place of or in combination with software instructions to implement processes described herein. Thus, implementations described herein are not limited to any specific combination of hardware circuitry and software.

5 Although Fig. 2 shows exemplary components of device 200, in other implementations, device 200 may contain fewer, different, or additional components than depicted in Fig. 2. In still other implementations, one or more components of device 200 may perform one or more other tasks described as being performed by one or more other components of device 200.

10 Fig. 3 depicts a diagram of a portion 300 of network 100, and exemplary components of OLT 110 and ONT 140. As illustrated, network portion 300 may include a single OLT 110, optical splitters 120 and 130, a single ONT 140, and remote controller 190, as described above in connection with Fig. 1. As further shown in Fig. 3, OLT 110 may include a transmitter 310, a receiver 320, and processing logic 330, and ONT 140 may include a receiver 340, a transmitter
15 350, and processing logic 360.

Transmitter 310 may include a device capable of transmitting optical signals (e.g., broadcast or downstream traffic). In one implementation, transmitter 310 may include a device capable of transmitting optical signals at various wavelengths. Further details of transmitter 310 are provided below in connection with Fig. 4.

20 Receiver 320 may include a device capable of receiving optical signals (e.g., upstream traffic). In one implementation, receiver 320 may include a device capable of receiving optical signals at various wavelengths. Further details of receiver 320 are provided below in connection with Figs. 5 and 6.

Processing logic 330 may include a CPU, a microprocessor, a FPGA, an ASIC, a
25 MEMS, a GPGPU, an optical processor, a reduced instruction processor, or other type of processing logic that may interpret and execute instructions. In one implementation, processing logic 330 may interact with remote controller 190 (e.g., processing logic 220) to control functions of OLT 110 (e.g., to control functions of transmitter 310 and/or receiver 320).

Receiver 340 may include a device capable of receiving optical signals (e.g.,
30 broadcast traffic). In one implementation, receiver 340 may include a device capable of receiving optical signals at various wavelengths. Further details of receiver 340 are provided below in connection with Figs. 7 and 8.

Transmitter 350 may include a device capable of transmitting optical signals (e.g., upstream traffic). In one implementation, transmitter 310 may include a device capable of

transmitting optical signals at various wavelengths. Further details of transmitter 350 are provided below in connection with Fig. 9.

Processing logic 360 may include a CPU, a microprocessor, a FPGA, an ASIC, a MEMS, a GPGPU, an optical processor, a reduced instruction processor, or other type of processing logic that may interpret and execute instructions. In one implementation, processing logic 360 may interact with remote controller 190 (e.g., processing logic 220) to control functions of ONT 140 (e.g., to control functions of receiver 340 and/or transmitter 350).

Although Fig. 3 shows exemplary components of network portion 300, in other implementations, network portion 300 may contain fewer, different, or additional components than depicted in Fig. 3. In still other implementations, one or more components of network portion 300 may perform one or more other tasks described as being performed by one or more other components of network portion 300.

Fig. 4 illustrates a diagram of exemplary components of transmitter 310 of OLT 110. As illustrated, transmitter 310 may include one or more fixed wavelength optical sources 400-1, 400-2, 400-3, and 400-4 (collectively referred to as “fixed wavelength optical sources 400” or individually as “fixed wavelength optical source 400”), and an optical waveguide 410.

Each of fixed wavelength optical sources 400 may include a device capable of generating optical signals. For example, in one implementation, fixed wavelength optical source 400 may include a low cost, fixed wavelength (or fixed frequency) laser. In one exemplary implementation, fixed wavelength optical source 400 may include a low cost laser having a narrow operation bandwidth (e.g., a range of about six to about eight nanometers separated at a few (e.g. two) nanometers) and being capable of being internally modulated to transmit more than zero Gbps to ten Gbps of data therein (e.g., and may be internally modulated to transmit ten Gbps or forty Gbps in the future). As further shown in Fig. 4, each fixed wavelength optical source 400 may generate an optical signal at a particular wavelength. For example, fixed wavelength optical source 400-1 may generate an optical signal at a first wavelength 420-1, fixed wavelength optical source 400-2 may generate an optical signal at a second wavelength 420-2, fixed wavelength optical source 400-3 may generate an optical signal at a third wavelength 420-3, and fixed wavelength optical source 400-4 may generate an optical signal at a fourth wavelength 420-4. First wavelength 420-1, second wavelength 420-2, third wavelength 420-3, and fourth wavelength 420-4 may include distinct wavelengths. Optical signals at first wavelength 420-1, second wavelength 420-2, third wavelength 420-3, and fourth wavelength 420-4 may be provided (e.g., by fixed wavelength optical sources 400) to optical waveguide 410.

Optical waveguide 410 may include a physical structure (e.g., an optical fiber, a rectangular waveguide, etc.) that may guide electromagnetic waves (e.g., optical signals) in the optical spectrum, and may be made from a variety of materials (e.g., a dielectric material with high permittivity, a photonic-crystal fiber, etc.). In one implementation, optical waveguide 410 may receive optical signals at first wavelength 420-1, second wavelength 420-2, third wavelength 420-3, and fourth wavelength 420-4 from fixed wavelength optical sources 400, and may provide the optical signals (e.g., as broadcast traffic 430) to optical splitter 120.

As further shown in Fig. 4, transmitter 310 need not include a filter(s) since each fixed wavelength optical source 400 may generate optical signals at a unique wavelength.

Alternatively, fixed wavelength optical sources 400 of transmitter 310 may be replaced with a single high-powered broadband laser source and a filter array that enables selection of multiple wavelengths.

Although Fig. 4 shows exemplary components of transmitter 310, in other implementations, transmitter 310 may contain fewer, different, or additional components than depicted in Fig. 4. In still other implementations, one or more components of transmitter 310 may perform one or more other tasks described as being performed by one or more other components of transmitter 310.

Fig. 5 illustrates a diagram of exemplary components of receiver 320 of OLT 110. As illustrated, receiver 320 may include one or more fixed wavelength optical filter sets 500-5, 500-6, 500-7, and 500-8 (collectively referred to as “fixed wavelength optical filter sets 500” or individually as “fixed wavelength optical filter set 500”), and an optical waveguide 510.

Each of fixed wavelength optical filter sets 500 may include a device capable of filtering optical signals. In one implementation, fixed wavelength optical filter set 500 may include an optical filter that selectively transmits or receives light having certain properties (e.g., a particular wavelength), while blocking the remainder of the light. As further shown in Fig. 5, each fixed wavelength optical filter set 500 may receive an optical signal at a particular wavelength. For example, fixed wavelength optical filter set 500-5 may receive an optical signal at a fifth wavelength 420-5, fixed wavelength optical filter set 500-6 may receive an optical signal at a sixth wavelength 420-6, fixed wavelength optical filter set 500-7 may receive an optical signal at a seventh wavelength 420-7, and fixed wavelength optical filter set 500-8 may receive an optical signal at an eighth wavelength 420-8. Fifth wavelength 420-5, sixth wavelength 420-6, seventh wavelength 420-7, and eighth wavelength 420-8 may include distinct wavelengths, and may be distinct from first wavelength 420-1, second wavelength 420-2, third wavelength 420-3, and fourth wavelength 420-4. Optical signals at fifth wavelength 420-5,

sixth wavelength 420-6, seventh wavelength 420-7, and eighth wavelength 420-8 may be received from optical waveguide 510.

Optical waveguide 510 may include a physical structure (e.g., an optical fiber, a rectangular waveguide, etc.) that may guide electromagnetic waves (e.g., optical signals) in the optical spectrum, and may be made from a variety of materials (e.g., a dielectric material with high permittivity, a photonic-crystal fiber, etc.). In one implementation, optical waveguide 510 may receive upstream traffic 520 from optical splitter 120, and may provide upstream traffic 520 as optical signals at fifth wavelength 420-5, sixth wavelength 420-6, seventh wavelength 420-7, and eighth wavelength 420-8 to fixed wavelength optical filter sets 500.

Although Fig. 5 shows exemplary components of receiver 320, in other implementations, receiver 320 may contain fewer, different, or additional components than depicted in Fig. 5. In still other implementations, one or more components of receiver 320 may perform one or more other tasks described as being performed by one or more other components of receiver 320.

Fig. 6 illustrates a diagram of exemplary components of fixed wavelength optical filter set 500-5 of receiver 320. As illustrated, fixed wavelength optical filter set 500-5 may include an optical receiver 600, one or more fixed wavelength optical filter elements 610-5, 610-6, 610-7, and 610-8 (collectively referred to as “fixed wavelength optical filter elements 610” or individually as “fixed wavelength optical filter element 610”), and a magnetic device 620.

Optical receiver 600 may include a device capable of receiving optical signals (upstream traffic 520), and processing the received signals. For example, optical receiver 600 may receive optical signals requesting video information (e.g., from video network 180), and may forward the optical signals to video network 180. In one implementation, optical receiver 600 may include a positive intrinsic negative (PIN) optical receiver.

Each of fixed wavelength optical filter elements 610 may include a device capable of filtering optical signals. In one implementation, fixed wavelength optical filter element 610 may include a low loss optical filter that selectively transmits or receives light having certain properties (e.g., a particular wavelength), while blocking the remainder of the light. For example, fixed wavelength optical filter element 610-5 may transmit optical signals at fifth wavelength 420-5 but may block optical signals at other wavelengths, fixed wavelength optical filter element 610-6 may transmit optical signals at sixth wavelength 420-6 but may block optical signals at other wavelengths, fixed wavelength optical filter element 610-7 may transmit optical signals at seventh wavelength 420-7 but may block optical signals at other wavelengths, and fixed wavelength optical filter element 610-8 may transmit optical signals at eighth

wavelength 420-8 but may block optical signals at other wavelengths. Each of fixed wavelength optical filter sets 500 may use fixed wavelength optical filter elements 610 to dynamically select which optical signal wavelength may be received by receiver 320.

5 Magnetic device 620 may include a device capable of physically moving fixed wavelength optical filter elements 610 so that they may be used in the respective fixed wavelength optical filter sets 500. In one implementation, magnetic device 620 may include an electromagnetic-based device (e.g., a solenoid actuator) in which a magnetic field may be produced by flow of an electric current, and may convert energy (e.g., the magnetic field) into linear motion. For example, magnetic device 620 may be activated (e.g., via processing logic
10 330), and may physically move one or more of fixed wavelength optical filter elements 610. Magnetic device 620 may quickly switch (e.g., within about 0.1 seconds) any of fixed wavelength optical filter elements 610.

As further shown in Fig. 6, fixed wavelength optical filter element 610-5 may be selected as the filter element for fixed wavelength optical filter set 500-5, and magnetic device
15 620 may position fixed wavelength optical filter element 610-5 in a position to receive optical signals at fifth wavelength 420-5. Fixed wavelength optical filter element 610-5 may be positioned adjacent to optical receiver 600 (e.g., by magnetic device 620), may receive the optical signal at fifth wavelength 420-5, and may provide the optical signal at fifth wavelength 420-5 to optical receiver 600. In one implementation, if fixed wavelength optical filter element
20 610-5, fixed wavelength optical filter element 610-6, fixed wavelength optical filter element 610-7, and fixed wavelength optical filter element 610-8 are positioned in front of optical receiver 600, all wavelengths of optical signals may be blocked from optical receiver 600.

Although Fig. 6 shows exemplary components of fixed wavelength optical filter set 500-5, in other implementations, fixed wavelength optical filter set 500-5 may contain fewer,
25 different, or additional components than depicted in Fig. 6. In still other implementations, one or more components of fixed wavelength optical filter set 500-5 may perform one or more other tasks described as being performed by one or more other components of fixed wavelength optical filter set 500-5. The other fixed wavelength optical filter sets 500 described herein may include an arrangement similar to the arrangement of components depicted in Fig. 6.

30 Fig. 7 illustrates a diagram of exemplary components of receiver 340 of ONT 140. As illustrated, receiver 340 may include one or more fixed wavelength optical filter sets 500-1, 500-2, 500-3, and 500-4 (collectively referred to as “fixed wavelength optical filter sets 500” or individually as “fixed wavelength optical filter set 500”), and an optical waveguide 700.

Each of fixed wavelength optical filter sets 500 may include a device capable of

filtering optical signals. In one implementation, fixed wavelength optical filter set 500 may include an optical filter that selectively transmits or receives light having certain properties (e.g., a particular wavelength), while blocking the remainder of the light. As further shown in Fig. 7, each fixed wavelength optical filter set 500 may receive an optical signal at a particular

5 wavelength. For example, fixed wavelength optical filter set 500-1 may receive an optical signal at first wavelength 420-1, fixed wavelength optical filter set 500-2 may receive an optical signal at second wavelength 420-2, fixed wavelength optical filter set 500-3 may receive an optical signal at third wavelength 420-3, and fixed wavelength optical filter set 500-4 may receive an optical signal at fourth wavelength 420-4. Optical signals at first wavelength 420-1,

10 second wavelength 420-2, third wavelength 420-3, and fourth wavelength 420-4 may be received from optical waveguide 700. Optical signals at first wavelength 420-1, second wavelength 420-2, third wavelength 420-3, and fourth wavelength 420-4 (e.g., provided by transmitter 310 of OLT 110) may correspond with the optical signals received by fixed wavelength optical filter sets 500 of receiver 340 of ONT 140.

15 Optical waveguide 700 may include a physical structure (e.g., an optical fiber, a rectangular waveguide, etc.) that may guide electromagnetic waves (e.g., optical signals) in the optical spectrum, and may be made from a variety of materials (e.g., a dielectric material with high permittivity, a photonic-crystal fiber, etc.). In one implementation, optical waveguide 700 may receive broadcast traffic 430 from optical splitter 130, and may provide broadcast traffic

20 430 as optical signals at first wavelength 420-1, second wavelength 420-2, third wavelength 420-3, and fourth wavelength 420-4 to fixed wavelength optical filter sets 500.

Although Fig. 7 shows exemplary components of receiver 340, in other implementations, receiver 340 may contain fewer, different, or additional components than depicted in Fig. 7. In still other implementations, one or more components of receiver 340 may

25 perform one or more other tasks described as being performed by one or more other components of receiver 340.

Fig. 8 illustrates a diagram of exemplary components of fixed wavelength optical filter set 500-1 of receiver 340. As illustrated, fixed wavelength optical filter set 500-1 may include optical receiver 600, one or more fixed wavelength optical filter elements 610-1, 610-2,

30 610-3, and 610-4 (collectively referred to as “fixed wavelength optical filter elements 610” or individually as “fixed wavelength optical filter element 610”), and magnetic device 620. Magnetic device 620 may include the features described above in connection with Fig. 6.

Optical receiver 600 may include a device capable of receiving optical signals (broadcast traffic 430), and processing the received signals. For example, optical receiver 600

may receive optical signals providing video information (e.g., from video network 180), and may forward the optical signals to a customer. In one implementation, optical receiver 600 may include a positive intrinsic negative (PIN) optical receiver.

Each of fixed wavelength optical filter elements 610 may include a device capable of filtering optical signals. In one implementation, fixed wavelength optical filter element 610 may include a low loss optical filter that selectively transmits or receives light having certain properties (e.g., a particular wavelength), while blocking the remainder of the light. For example, fixed wavelength optical filter element 610-1 may transmit optical signals at first wavelength 420-1 but may block optical signals at other wavelengths, fixed wavelength optical filter element 610-2 may transmit optical signals at second wavelength 420-2 but may block optical signals at other wavelengths, fixed wavelength optical filter element 610-3 may transmit optical signals at third wavelength 420-3 but may block optical signals at other wavelengths, and fixed wavelength optical filter element 610-4 may transmit optical signals at fourth wavelength 420-4 but may block optical signals at other wavelengths. Fixed wavelength optical filter sets 500 may use fixed wavelength optical filter elements 610 to dynamically select which optical signal wavelength may be received by receiver 340.

As further shown in Fig. 8, fixed wavelength optical filter element 610-1 may be selected as the filter element for fixed wavelength optical filter set 500-1, and magnetic device 620 may position fixed wavelength optical filter element 610-1 in a position to receive optical signals at first wavelength 420-1. Fixed wavelength optical filter element 610-1 may be positioned adjacent to optical receiver 600 (e.g., by magnetic device 620), may receive the optical signal at first wavelength 420-1, and may provide the optical signal at first wavelength 420-1 to optical receiver 600. In one implementation, if fixed wavelength optical filter element 610-1 fixed wavelength optical filter element 610-2, fixed wavelength optical filter element 610-3, and fixed wavelength optical filter element 610-4 are positioned in front of optical receiver 600, all wavelengths of optical signals may be blocked from optical receiver 600.

Although Fig. 8 shows exemplary components of fixed wavelength optical filter set 500-1, in other implementations, fixed wavelength optical filter set 500-1 may contain fewer, different, or additional components than depicted in Fig. 8. In still other implementations, one or more components of fixed wavelength optical filter set 500-1 may perform one or more other tasks described as being performed by one or more other components of fixed wavelength optical filter set 500-1. The other fixed wavelength optical filter sets 500 described herein may include an arrangement similar to the arrangement of components depicted in Fig. 8.

Fig. 9 illustrates a diagram of exemplary components of transmitter 350 of ONT 140.

As illustrated, transmitter 350 may include one or more fixed wavelength optical sources 400-5, 400-6, 400-7, and 400-8 (collectively referred to as “fixed wavelength optical sources 400” or individually as “fixed wavelength optical source 400”), and an optical waveguide 900.

Details of fixed wavelength optical sources 400 are provided above in connection with Fig. 4. Fixed wavelength optical source 400-5 may generate an optical signal at fifth wavelength 420-5, fixed wavelength optical source 400-6 may generate an optical signal at sixth wavelength 420-6, fixed wavelength optical source 400-7 may generate an optical signal at seventh wavelength 420-7, and fixed wavelength optical source 400-8 may generate an optical signal at eighth wavelength 420-8. Optical signals at fifth wavelength 420-5, sixth wavelength 420-6, seventh wavelength 420-7, and eighth wavelength 420-8 may be provided (e.g., by fixed wavelength optical sources 400) to optical waveguide 900. Optical signals at fifth wavelength 420-5, sixth wavelength 420-6, seventh wavelength 420-7, and eighth wavelength 420-8 may be received from optical waveguide 510 (e.g., provided by transmitter 350 of ONT 140) may correspond with the optical signals received by fixed wavelength optical filter sets 500 of receiver 320 of OLT 110.

Optical waveguide 900 may include a physical structure (e.g., an optical fiber, a rectangular waveguide, etc.) that may guide electromagnetic waves (e.g., optical signals) in the optical spectrum, and may be made from a variety of materials (e.g., a dielectric material with high permittivity, a photonic-crystal fiber, etc.). In one implementation, optical waveguide 900 may receive optical signals at fifth wavelength 420-5, sixth wavelength 420-6, seventh wavelength 420-7, and eighth wavelength 420-8 from fixed wavelength optical sources 400, and may provide the optical signals (e.g., as upstream traffic 520) to optical splitter 130.

As further shown in Fig. 9, transmitter 350 need not include a filter(s) since each fixed wavelength optical source 400 may generate optical signals at a unique wavelength. Alternatively, fixed wavelength optical sources 400 of transmitter 350 may be replaced with a single high-powered broadband laser source and a filter array that enables selection of multiple wavelengths.

Although Fig. 9 shows exemplary components of transmitter 350, in other implementations, transmitter 350 may contain fewer, different, or additional components than depicted in Fig. 9. In still other implementations, one or more components of transmitter 350 may perform one or more other tasks described as being performed by one or more other components of transmitter 350.

Fig. 10 is an exemplary diagram of another network 1000 in which systems and methods described herein may be implemented. As illustrated, network 1000 may include

optical line terminal (OLT) 110, optical splitter 130, one or more optical network terminals (ONTs) 140-1, 140-2, ..., 140-32, one or more customer networks 150-1, 150-2, ..., 150-32 associated with corresponding ONTs 140, and a single optical fiber 1010 connecting OLT 110 to optical splitter 130. A single OLT, a single optical splitter, thirty-two ONTs, and thirty-two customer networks have been illustrated in Fig. 1 for simplicity. In practice, there may be more OLTs and optical splitters, and/or more or less ONTs and/or customer networks. In one implementation, OLT 110, optical splitter 130, and ONTs 140 may form a G-PON. In other implementations, OLT 110, optical splitter 130, and ONTs 140 may form other types of PONs (e.g., a broadband PON (B-PON), an Ethernet PON (E-PON), etc.). OLT 110, optical splitter 130, ONTs 140, and customer networks 150 may include the features described above in connection with Fig. 1. Network 1000 may further include IP network 160, voice network 170, video network 180, and/or remote controller 190 (not shown).

Single optical fiber 1010 may include a connection, a coupling, a link, or other similar mechanism by which optical signals, which may be carried by one optical component, may be imparted to a communicating optical component. For example, single optical fiber 1010 may permit OLT 110 to optically communicate with optical splitter 130, and may permit optical signals to be transmitted to ONTs 140. "Optically communicating" devices may not necessarily be directly connected to one another and may be separated by intermediate optical components or devices. In one implementation, broadcast traffic and upstream traffic may be provided in single optical fiber 1010, which may eliminate a need for optical isolation. A receiving filter (not shown) may block any interference from opposite direction traffic (e.g., may block interference from upstream traffic in broadcast traffic, and vice versa). In order to avoid traffic collisions, traffic traveling in one direction may include one or more wavelengths that are different than one or more wavelengths of traffic traveling in the opposite direction.

Although Fig. 10 shows exemplary components of network 1000, in other implementations, network 1000 may contain fewer, different, or additional components than depicted in Fig. 10. In still other implementations, one or more components of network 1000 may perform one or more other tasks described as being performed by one or more other components of network 1000.

Fig. 11 illustrates a diagram of an optical signal booster 1100 that may be provided in the transmitters (e.g., transmitters 310 and 350) and/or receivers (e.g., receivers 320 and 340) of OLTs 110 and/or ONTs 140. Optical signal booster 1100 may be provided in the transmitters and/or receivers if an optical network (e.g., networks 100 and/or 1000) includes high order optical splitters and/or experience optical power losses. As illustrated, optical signal booster

1100 may include one or more fixed wavelength optical filters 1110-1, 1110-2, 1110-3, and 1110-4 (collectively referred to as “fixed wavelength optical filters 1110” or individually as “fixed wavelength optical filter 1110”), and one or more optical amplitude converters 1120-1, 1120-2, 1120-3, and 1130-4 (collectively referred to as “optical amplitude converters 1120” or individually as “optical amplitude converter 1120”).

Each of fixed wavelength optical filters 1110 may include a device capable of filtering optical signals. In one implementation, fixed wavelength optical filter 1110 may include an optical filter that selectively transmits or receives light having certain properties (e.g., a particular wavelength), while blocking the remainder of the light. As further shown in Fig. 11, each fixed wavelength optical filter 1110 may receive an optical signal at a particular wavelength. For example, optical signals at first wavelength 420-1 may be received by fixed wavelength optical filter 1110-1, optical signals at second wavelength 420-2 may be received by fixed wavelength optical filter 1110-2, optical signals at third wavelength 420-3 may be received by fixed wavelength optical filter 1110-3, and optical signals at fourth wavelength 420-4 may be received by fixed wavelength optical filter 1110-4. Fixed wavelength optical filters 1110 may provide optical signals at first wavelength 420-1, second wavelength 420-2, third wavelength 420-3, and fourth wavelength 420-4 to corresponding optical amplitude converters 1120.

Details of fixed wavelength optical filters 1110 may be similar to those features described above in connection with fixed wavelength optical filter elements 610 of Fig. 6.

Each of optical amplitude converters 1120 may include a device that converts an optical signal into an optical signal with greater amplitude (e.g., which may boost the optical signal strength). In one exemplary implementation, optical amplitude converter 1120 may include an optical-to-electrical-to-optical (OEO)-based device that converts an optical signal into an optical signal with a greater amplitude. For example, optical signals at first wavelength 420-1, second wavelength 420-2, third wavelength 420-3, and fourth wavelength 420-4 may be received by corresponding optical amplitude converters 1120 from corresponding fixed wavelength optical filters 1110. Optical amplitude converters 1120 may convert the received optical signals to optical signals with greater amplitudes, and may output the amplitude converted optical signals. For example, optical amplitude converter 1120-1 may output a first amplitude converted optical signal 1130-1, optical amplitude converter 1120-2 may output a second amplitude converted optical signal 1130-2, optical amplitude converter 1120-3 may output a third amplitude converted optical signal 1130-3, and optical amplitude converter 1120-4 may output a first amplitude converted optical signal 1130-4.

Alternatively, optical signal booster 1100 may include a semiconductor-based optical

amplifier capable of boosting optical signal strength.

Although Fig. 11 shows exemplary components of optical signal booster 1100, in other implementations, optical signal booster 1100 may contain fewer, different, or additional components than depicted in Fig. 11. In still other implementations, one or more components of optical signal booster 1100 may perform one or more other tasks described as being performed by one or more other components of optical signal booster 1100.

Fig. 12 depicts a flow chart of an exemplary process 1200 for providing one or more fixed wavelength optical sources and/or one or more dynamically-activated fixed wavelength optical filters in an optical network, according to implementations described herein. In one implementation, process 1200 may be performed by OLT 110 and/or ONT 140. In another implementation, some or all of process 1200 may be performed by another device or group of devices, including or excluding OLT 110 and/or ONT 140.

As illustrated in Fig. 12, process 1200 may begin with provision of a fixed wavelength optical source in an optical network (block 1210), and provision of a group of fixed wavelength optical filters in the optical network (block 1220). For example, in implementations described above in connection with Figs. 4 and 5, transmitter 310 of OLT 110 (which may be provided in an optical network, such as network 100) may include one or more fixed wavelength optical sources 400. Receiver 320 of OLT 110 may include one or more fixed wavelength optical filter sets 500.

As further shown in Fig. 12, an optical signal at a wavelength may be generated with the fixed wavelength optical source (block 1230), one of the group of fixed wavelength optical filters may be selected based on the wavelength of the optical signal (block 1240), and the optical signal may be received with the selected fixed wavelength optical filter (block 1250). For example, in implementations described above in connection with Figs. 4 and 6, each fixed wavelength optical source 400 may generate an optical signal at a particular wavelength. One of fixed wavelength optical filter elements 610 may be selected as the filter element for fixed wavelength optical filter set 500, and magnetic device 620 may position the selected fixed wavelength optical filter element 610 in a position to receive optical signals at a particular wavelength 420. Fixed wavelength optical filter element 610 may be positioned adjacent to optical receiver 600 (e.g., by magnetic device 620), may receive an optical signal at the particular wavelength 420, and may provide the optical signal at the particular wavelength 420 to optical receiver 600.

Figs. 13 and 14 depict a flow chart of an exemplary process 1300 for receiving an optical signal from an optical network with one or more dynamically-activated fixed wavelength

optical filters, according to implementations described herein. In one implementation, process 1300 may be performed by OLT 110 (e.g., by receiver 320) and/or ONT 140 (e.g., by receiver 340). In another implementation, some or all of process 1200 may be performed by another device or group of devices, including or excluding OLT 110 and/or ONT 140.

5 As illustrated in Fig. 13, process 1300 may begin with receipt of an optical signal at a wavelength from an optical network (block 1310), and selection of a fixed wavelength optical filter from a group of fixed wavelength optical filters based on the wavelength of the optical signal (block 1320). For example, in implementations described above in connection with Figs. 5 and 6, fixed wavelength optical filter set 500 of receiver 320 may receive an optical signal at a particular wavelength. One of fixed wavelength optical filter elements 610 may be selected as
10 the filter element for fixed wavelength optical filter set 500, and magnetic device 620 may position the selected fixed wavelength optical filter element 610 in a position to receive optical signals at a particular wavelength 420.

Returning to Fig. 13, the optical signal may be provided to an optical receiver via the
15 selected fixed wavelength optical filter (block 1330). For example, in implementations described above in connection with Fig. 6, fixed wavelength optical filter element 610 may be positioned adjacent to optical receiver 600 (e.g., by magnetic device 620), may receive the optical signal at the particular wavelength 420, and may provide the optical signal at the particular wavelength 420 to optical receiver 600.

20 Process block 1320 may include the process blocks illustrated in Fig. 14. As shown in Fig. 14, process block 1320 may include determining a fixed wavelength optical filter element with a wavelength that matches the wavelength of the optical signal (block 1400), initiating a magnetic device to move the determined fixed wavelength optical filter element (block 1410), and moving the determined fixed wavelength optical filter element in a position for receipt of
25 the optical signal (block 1420). For example, in implementations described above in connection with Fig. 6, fixed wavelength optical filter set 500 may determine (e.g., via processing logic 330) which of fixed wavelength optical filter elements 610 matches a received wavelength (e.g., fifth wavelength 420-5), and may initiate magnetic device 620 to move the determined fixed wavelength optical filter element (e.g., element 610-5). Magnetic device 620 may move fixed
30 wavelength optical filter element 610-5 in position for receiving optical signal at fifth wavelength 420-5.

Fig. 15 depicts a flow chart of an exemplary process 1500 for generating an optical signal at a particular wavelength in an optical network with a fixed wavelength optical source, according to implementations described herein. In one implementation, process 1500 may be

performed by OLT 110 (e.g., by transmitter 310) and/or ONT 140 (e.g., by transmitter 350). In another implementation, some or all of process 1200 may be performed by another device or group of devices, including or excluding OLT 110 and/or ONT 140.

As illustrated in Fig. 15, process 1500 may begin with a determination of a wavelength of an optical signal to transmit in an optical network (block 1510), and selection of a fixed wavelength optical source from a group of fixed wavelength optical sources based on the determined wavelength (block 1520). For example, in one implementation, remote controller 190 may determine a wavelength of an optical signal to transmit in network 100, and may select one of fixed wavelength optical sources 400 that is capable of generating the optical signal at the determined wavelength. For example, if the determined wavelength was first wavelength 420-1, remote controller may select fixed wavelength optical source 400-1 to generate the optical signal since it is capable generating optical signals at first wavelength 420-1.

As further shown in Fig. 15, the optical signal may be generated by the selected fixed wavelength optical source (block 1530). For example, in implementations described above in connection with Fig. 4, fixed wavelength optical source 420-1 may generate optical signals at first wavelength 420-1 and may provide the optical signals to optical splitter 120, via optical waveguide 410, for transmission through network 100.

Implementations described herein may provide one or more inexpensive fixed wavelength (or fixed frequency) optical sources and/or one or more inexpensive, dynamically-activated fixed wavelength (or fixed frequency) optical filters in an optical network that includes one or more optical line terminations (e.g., at a central office) and one or more optical network terminals (ONTs) (e.g., at end users' premises). Each optical line termination may include one or more optical line terminals (OLTs) that may communicate with associated ONTs. For example, in one implementation, the systems and/or methods may provide a fixed wavelength optical source and a group of fixed wavelength optical filters in an optical network. The systems and/or methods may generate an optical signal having a specified wavelength (e.g., the fixed wavelength), and may select one of the group of fixed wavelength optical filters based on the wavelength of the optical signal. The systems and/or methods may receive the optical signal with the selected fixed wavelength optical filter.

The foregoing description of implementations provides illustration and description, but is not intended to be exhaustive or to limit the invention to the precise form disclosed. Modifications and variations are possible in light of the above teachings or may be acquired from practice of the invention.

For example, while series of blocks have been described with regard to Figs. 12-15,

the order of the blocks may be modified in other implementations. Further, non-dependent blocks may be performed in parallel.

It will be apparent that embodiments, as described herein, may be implemented in many different forms of software, firmware, and hardware in the implementations illustrated in the figures. The actual software code or specialized control hardware used to implement
5 embodiments described herein is not limiting of the invention. Thus, the operation and behavior of the embodiments were described without reference to the specific software code--it being understood that one would be able to design software and control hardware to implement the embodiments based on the description herein.

10 Further, certain portions of the invention may be implemented as "logic" that performs one or more functions. This logic may include hardware, such as an application specific integrated circuit or a field programmable gate array, software, or a combination of hardware and software.

15 Even though particular combinations of features are recited in the claims and/or disclosed in the specification, these combinations are not intended to limit the invention. In fact, many of these features may be combined in ways not specifically recited in the claims and/or disclosed in the specification.

20 No element, act, or instruction used in the present application should be construed as critical or essential to the invention unless explicitly described as such. Also, as used herein, the article "a" is intended to include one or more items. Where only one item is intended, the term "one" or similar language is used. Further, the phrase "based on" is intended to mean "based, at least in part, on" unless explicitly stated otherwise.

WHAT IS CLAIMED IS:

1. A system comprising:

an optical line terminal (OLT) that includes:

an OLT transmitter comprising:

one or more fixed wavelength optical sources that generate an optical
5 signal at a first wavelength, and

an optical waveguide that transmits the optical signal at the first
wavelength in an optical network.

2. The system of claim 1, where the OLT further comprises processing logic
configured to:

determine a wavelength for the optical signal; and

select one of the one or more fixed wavelength optical sources based on the determined
5 wavelength.

3. The system of claim 1, where each of the one or more fixed wavelength optical
sources comprises a laser having a narrow operation bandwidth range of about six to about eight
nanometers separated at two nanometers and being internally modulated to transmit from more
than zero gigabits per second to about ten gigabits per second.

4. The system of claim 1, where each of the one or more fixed wavelength optical
sources produces an optical signal at a distinct wavelength.

5. The system of claim 1, where the OLT further comprises:

an OLT receiver comprising:

one or more fixed wavelength optical filters that receive an optical signal at a
second wavelength, and

5 an optical waveguide that receives the optical signal at the second wavelength
from the optical network and providing the optical signal at the second wavelength to at
least one of the one or more fixed wavelength optical filters.

6. The system of claim 5, where each of the one or more fixed wavelength optical
filters comprises:

a plurality of fixed wavelength optical filter elements that receive optical signals at a

plurality of wavelengths;

- 5 a magnetic-based device that moves one of the plurality of fixed wavelength optical filter elements to a position for receiving the optical signal at the second wavelength; and
 an optical receiver that receives the optical signal at the second wavelength from the moved one of the plurality of fixed wavelength optical filter elements.

7. The system of claim 6, where the OLT further comprises processing logic configured to:

 select one of the one or more fixed wavelength optical filters based on the second wavelength; and

- 5 provide the optical signal at the second wavelength to the optical receiver via the selected one of the one or more fixed wavelength optical filters.

8. The system of claim 6, where when selecting the one of the one or more fixed wavelength optical filters, the processing logic is further configured to:

 determine one of the plurality of fixed wavelength optical filter elements capable of receiving optical signals with a wavelength that matches the second wavelength;

- 5 initiate the magnetic-based device to move the determined one of the plurality of fixed wavelength optical filter elements to a position for receiving the optical signal at the second wavelength.

9. The system of claim 6, further comprising:

 a remote controller that adjusts wavelengths of upstream and downstream optical signals provided in the optical network by controlling one or more of the one or more fixed wavelength optical sources, the one or more fixed wavelength optical filters, and the plurality of fixed
5 wavelength optical filter elements.

10. The system of claim 5, where each of the one or more fixed wavelength optical filters comprises a low loss optical filter that selectively transmits or receives light having a particular wavelength, while blocking a remainder of the light.

11. A system comprising:

 an optical network terminal (ONT) that includes:

 an ONT transmitter comprising:

one or more fixed wavelength optical sources that generate an optical
5 signal at a first wavelength, and
an optical waveguide that transmit the optical signal at the first
wavelength in an optical network.

12. The system of claim 11, where the ONT further comprises processing logic
configured to:

determine a wavelength for the optical signal; and

5 select one of the one or more fixed wavelength optical sources based on the determined
wavelength.

13. The system of claim 11, where each of the one or more fixed wavelength optical
sources comprises a laser having a narrow operation bandwidth range of about six to about eight
nanometers separated at two nanometers and being internally modulated to transmit from more
than zero gigabits per second to about ten gigabits per second.

14. The system of claim 11, where each of the one or more fixed wavelength optical
sources produces an optical signal at a distinct wavelength.

15. The system of claim 11, where the ONT further comprises:
an ONT receiver comprising:

one or more fixed wavelength optical filters that receive an optical signal at a
second wavelength, and

5 an optical waveguide that receives the optical signal at the second wavelength
from the optical network and providing the optical signal at the second wavelength to at
least one of the one or more fixed wavelength optical filters.

16. The system of claim 15, where each of the one or more fixed wavelength optical
filters comprises:

a plurality of fixed wavelength optical filter elements that receive optical signals at a
plurality of wavelengths;

5 a magnetic-based device that moves one of the plurality of fixed wavelength optical filter
elements to a position for receiving the optical signal at the second wavelength; and

an optical receiver that receives the optical signal at the second wavelength from the

moved one of the plurality of fixed wavelength optical filter elements.

17. The system of claim 16, where the ONT further comprises processing logic configured to:

select one of the one or more fixed wavelength optical filters based on the second wavelength; and

5 provide the optical signal at the second wavelength to the optical receiver via the selected one of the one or more fixed wavelength optical filters.

18. The system of claim 16, where when selecting the one of the one or more fixed wavelength optical filters, the processing logic is further configured to:

determine one of the plurality of fixed wavelength optical filter elements capable of receiving optical signals with a wavelength that matches the second wavelength;

5 initiate the magnetic-based device to move the determined one of the plurality of fixed wavelength optical filter elements to a position for receiving the optical signal at the second wavelength.

19. The system of claim 16, further comprising:

a remote controller that adjusts wavelengths of upstream and downstream optical signals provided in the optical network by controlling one or more of the one or more fixed wavelength optical sources, the one or more fixed wavelength optical filters, and the plurality of fixed
5 wavelength optical filter elements.

20. The system of claim 15, where each of the one or more fixed wavelength optical filters comprises a low loss optical filter that selectively transmits or receives light having a particular wavelength, while blocking a remainder of the light.

21. The system of claim 15, where at least one of the ONT transmitter or the ONT receiver further comprises:

an optical signal booster that converts amplitudes of upstream and downstream optical signals provided in the optical network to reduce optical power loss.

22. The system of claim 15, where the system comprises a passive optical network.

23. A method, comprising:

providing a plurality of fixed wavelength optical sources in an optical network;

providing a plurality of fixed wavelength optical filters in the optical network;

generating an optical signal at a wavelength with one of the plurality of fixed wavelength

5 optical sources;

selecting one of the plurality of fixed wavelength optical filters based on the wavelength
of the optical signal; and

receiving the optical signal with the selected fixed wavelength optical filter.

24. The method of claim 23, further comprising:

determining a wavelength for the optical signal;

selecting one of the plurality of fixed wavelength optical sources based on the
determined wavelength; and

5 generating the optical signal with the determined wavelength with the selected fixed
wavelength optical source.


25. A device comprising:

means for generating an optical signal at a first wavelength;


means for transmitting the optical signal at the first wavelength in an optical network;

means for filtering an optical signal at a second wavelength; and

5 means for receiving the optical signal at the second wavelength from the optical network
and providing the optical signal at the second wavelength to the means for filtering the optical
signal at the second wavelength.

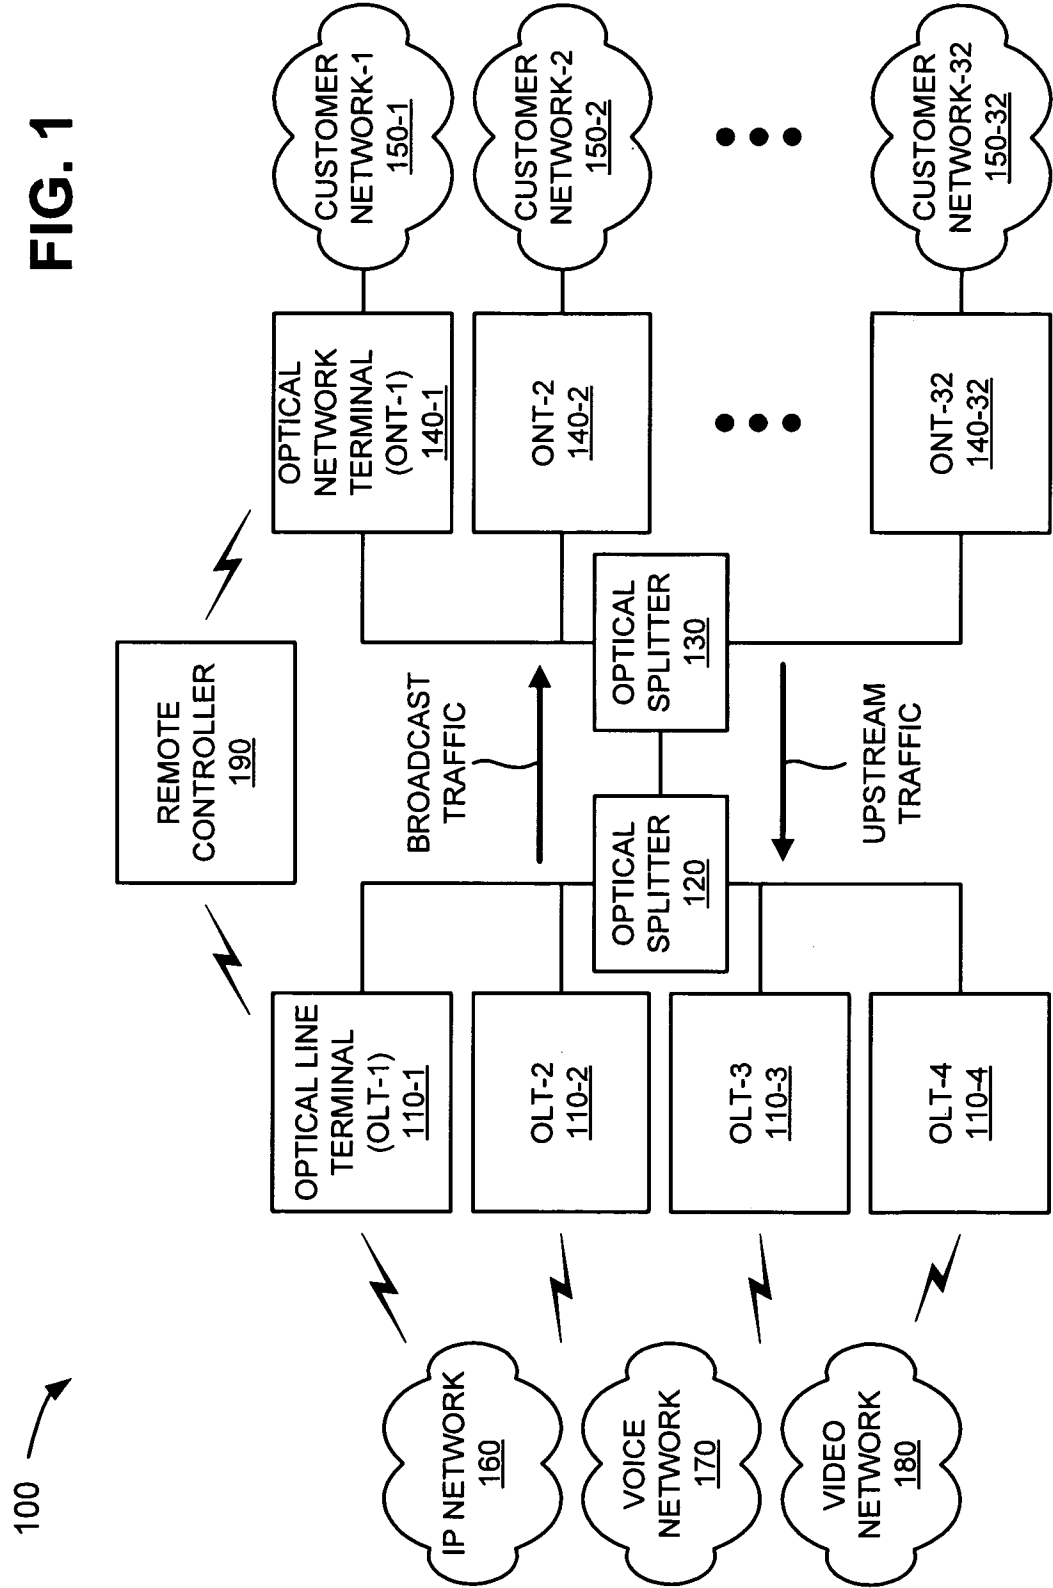

200 → **FIG. 2**

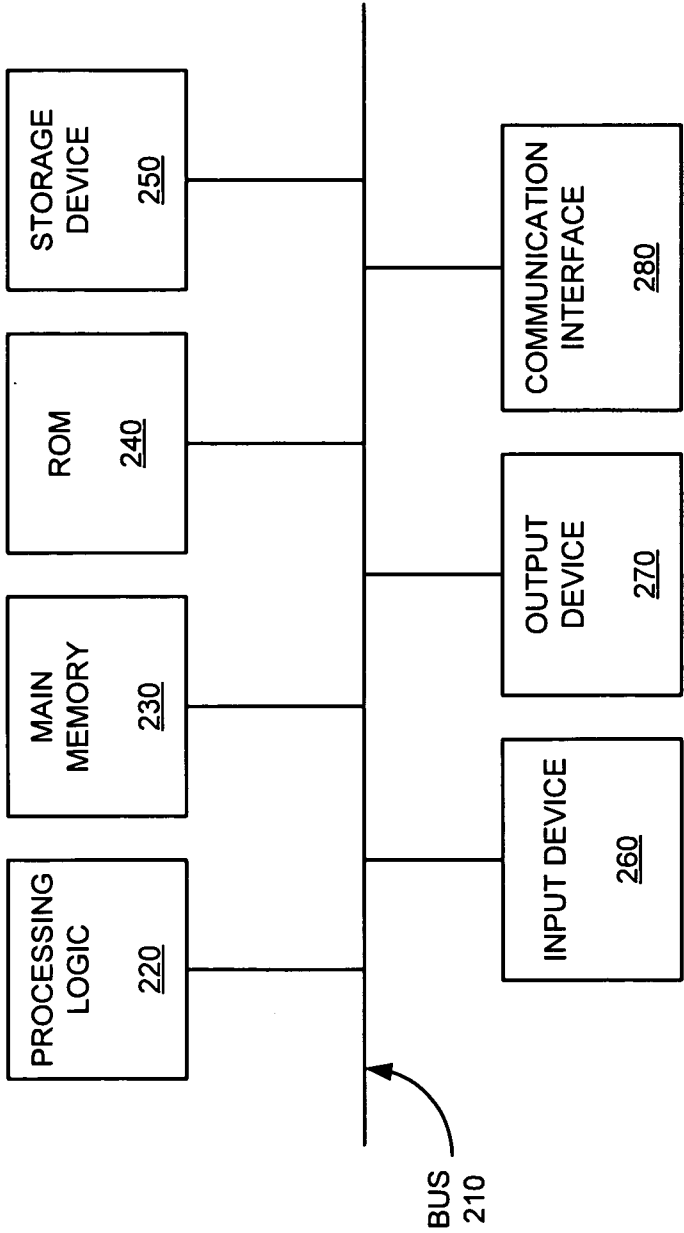

300 **FIG. 3**

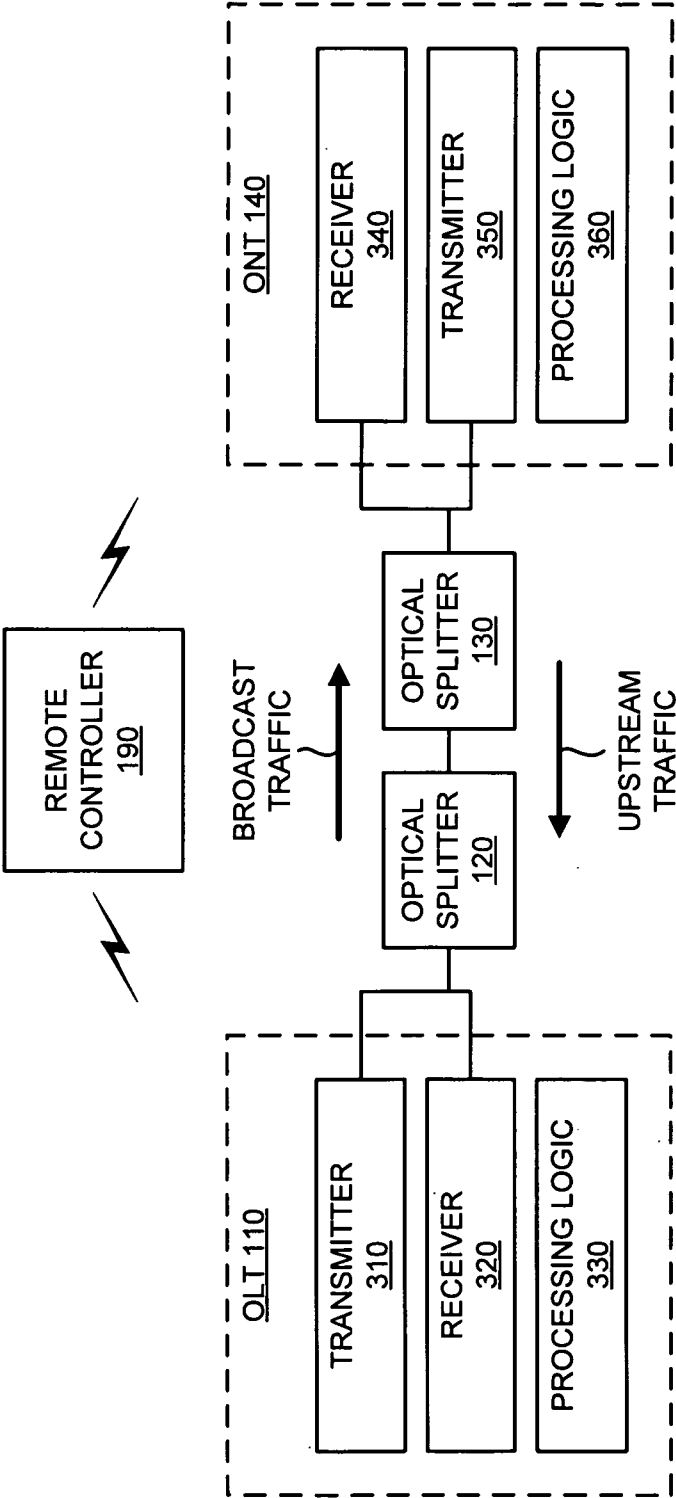


FIG. 4

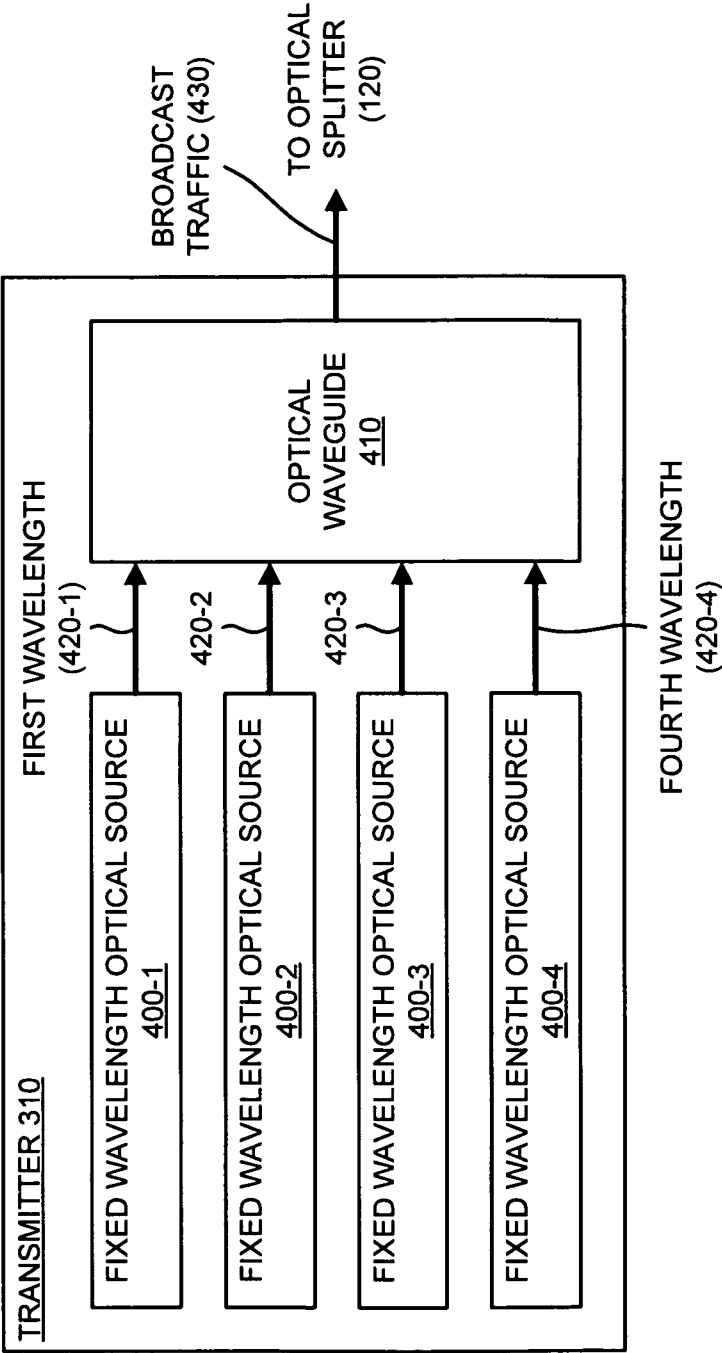


FIG. 5

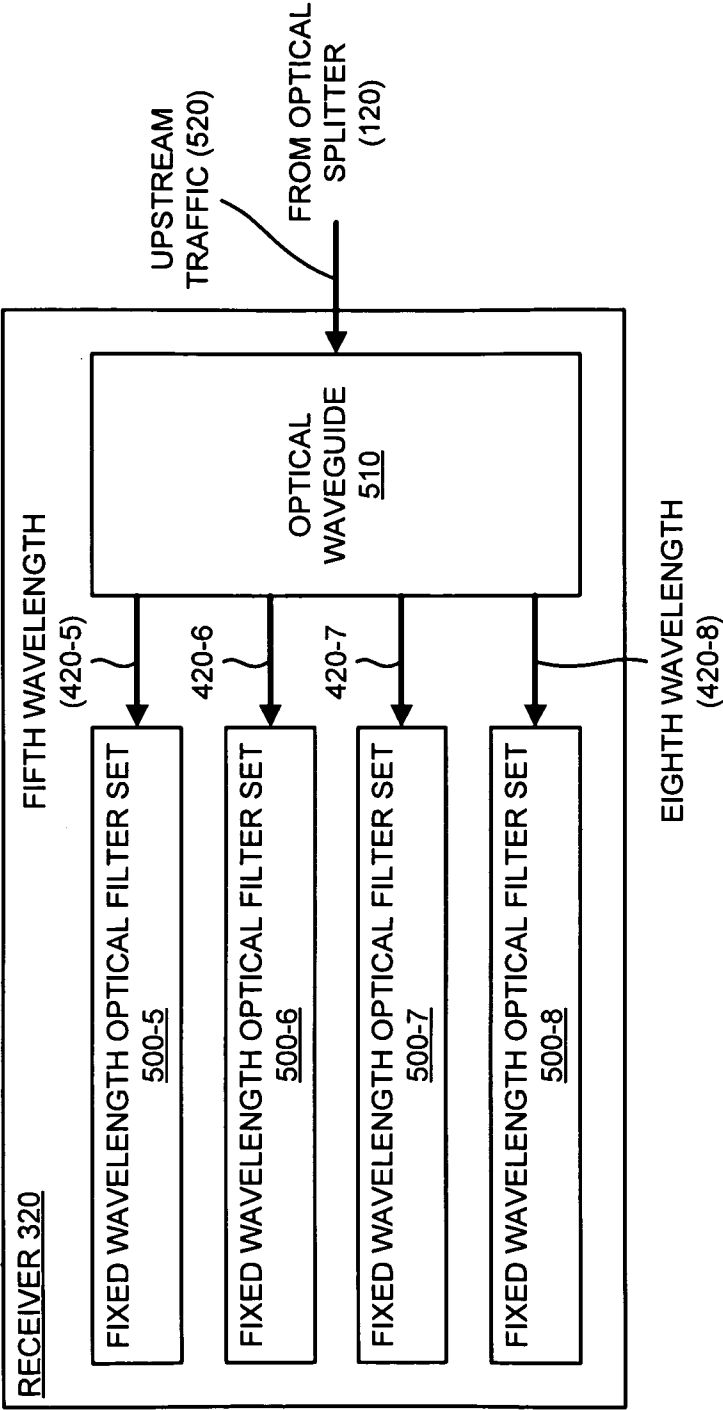


FIG. 6

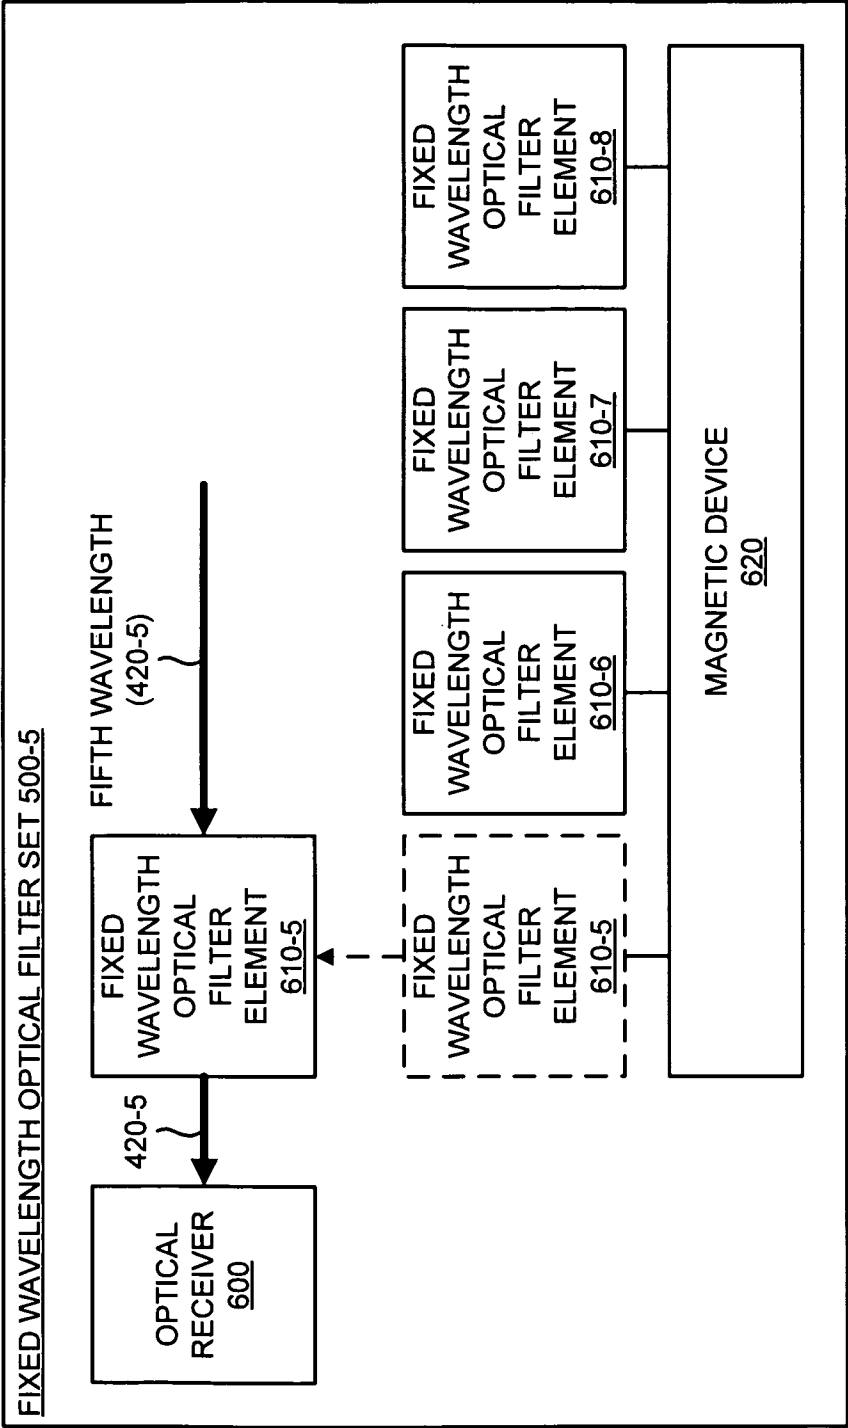


FIG. 7

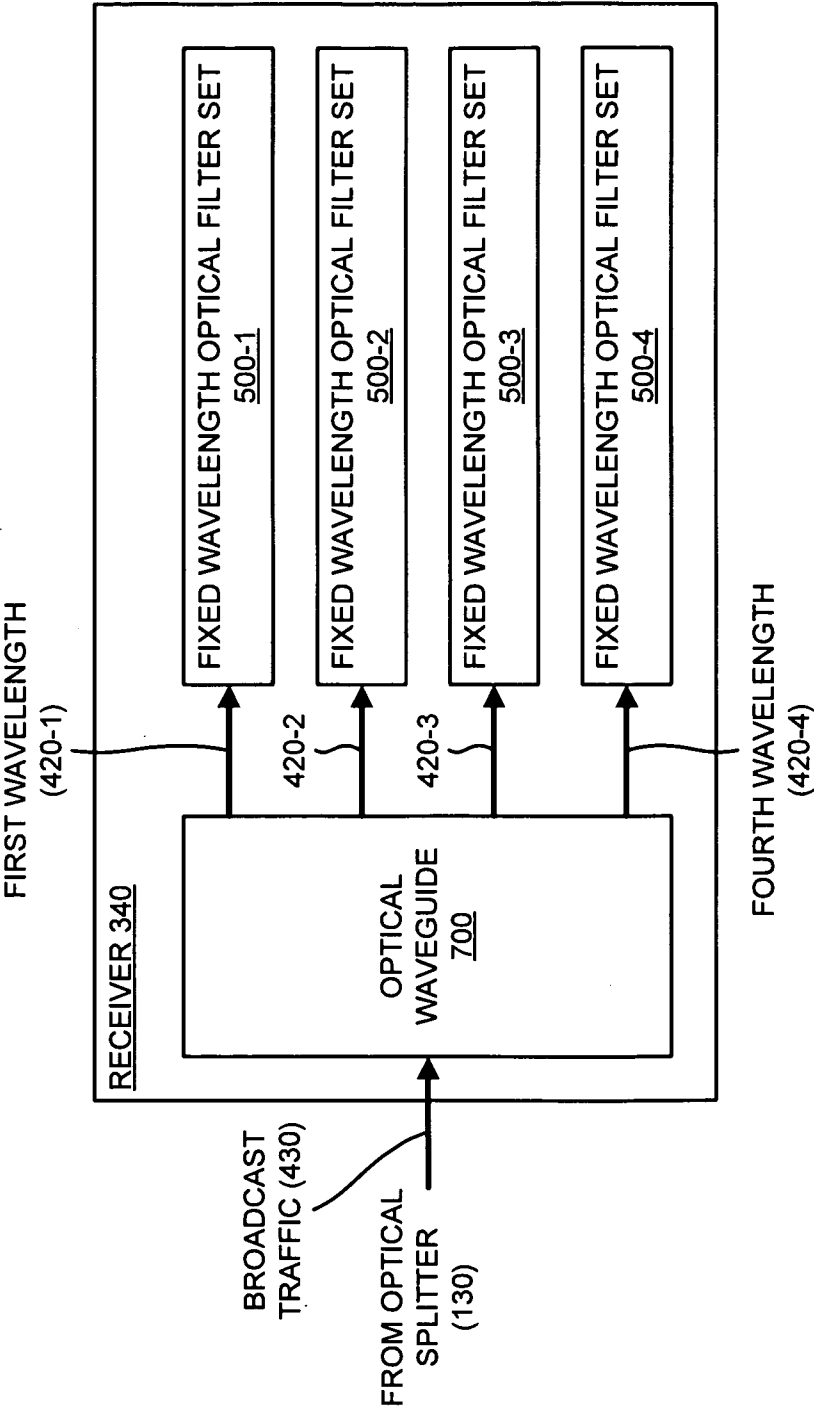


FIG. 8

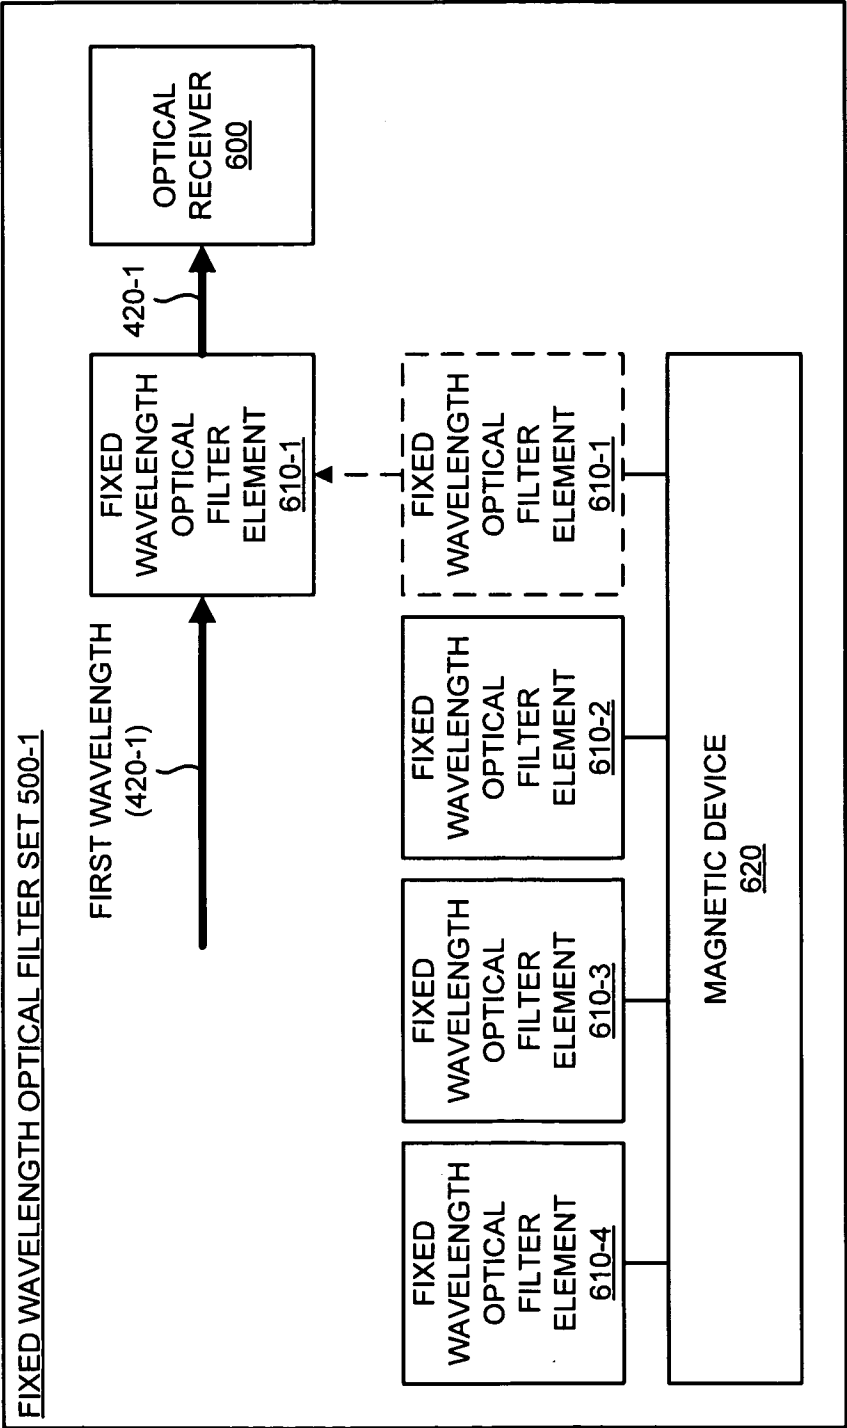


FIG. 9



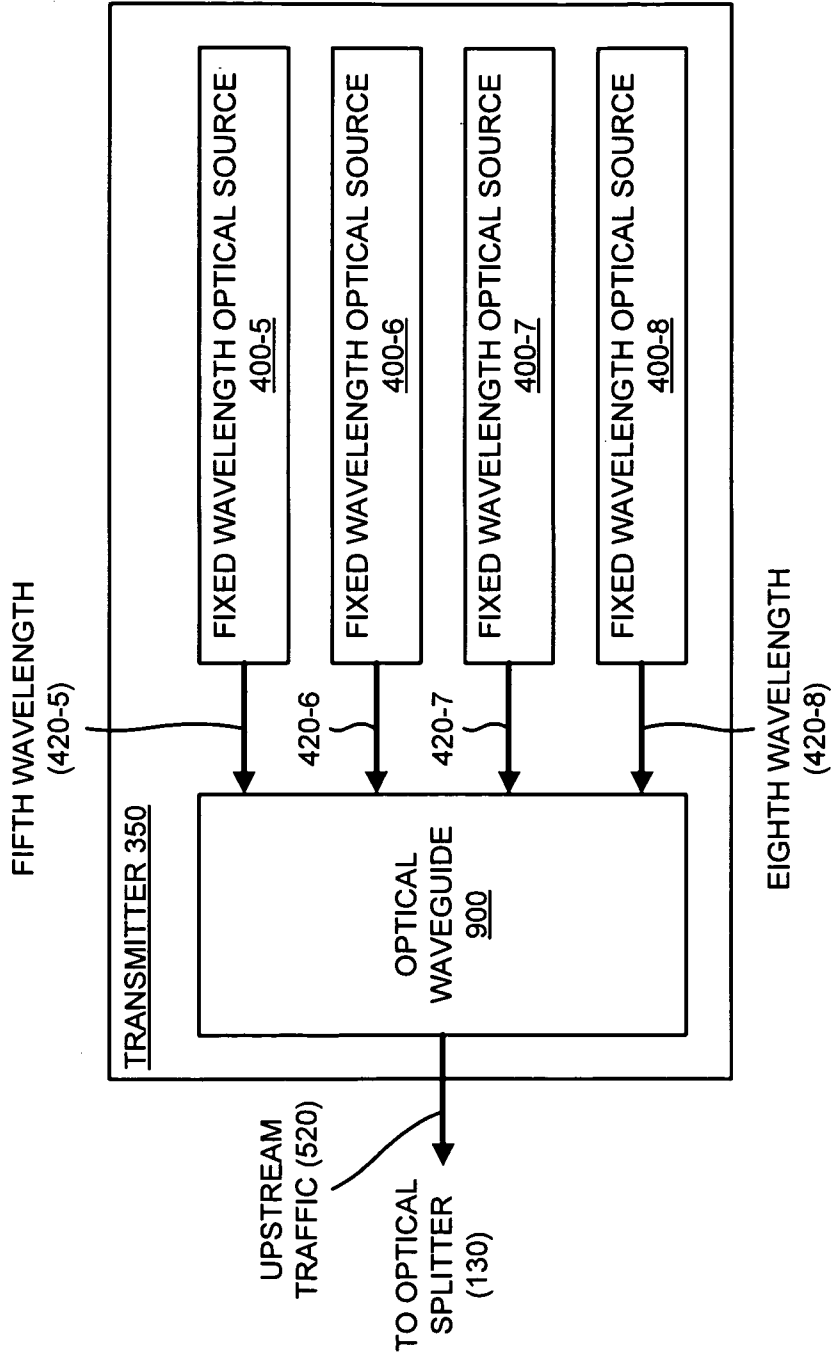


FIG. 10

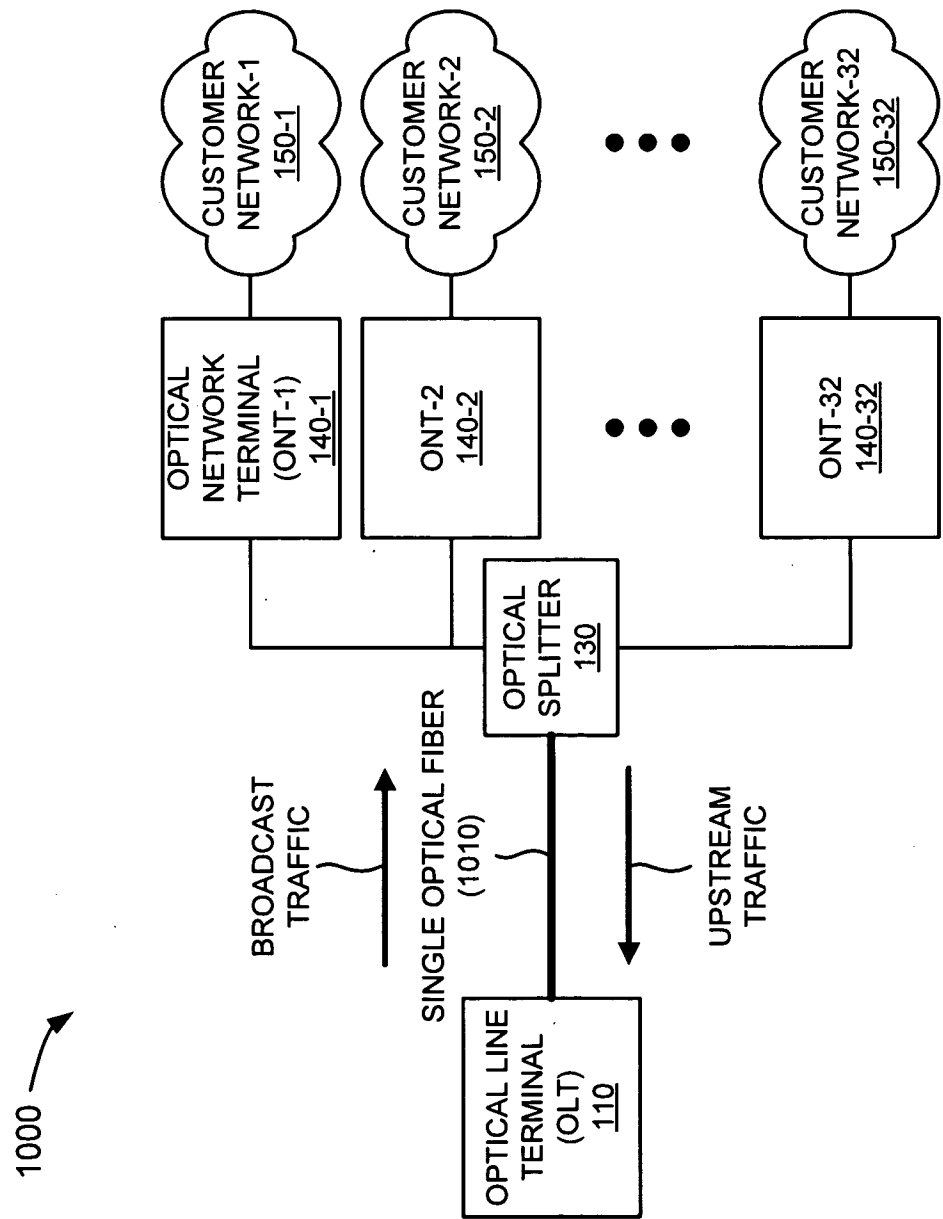

11/15

FIG. 11

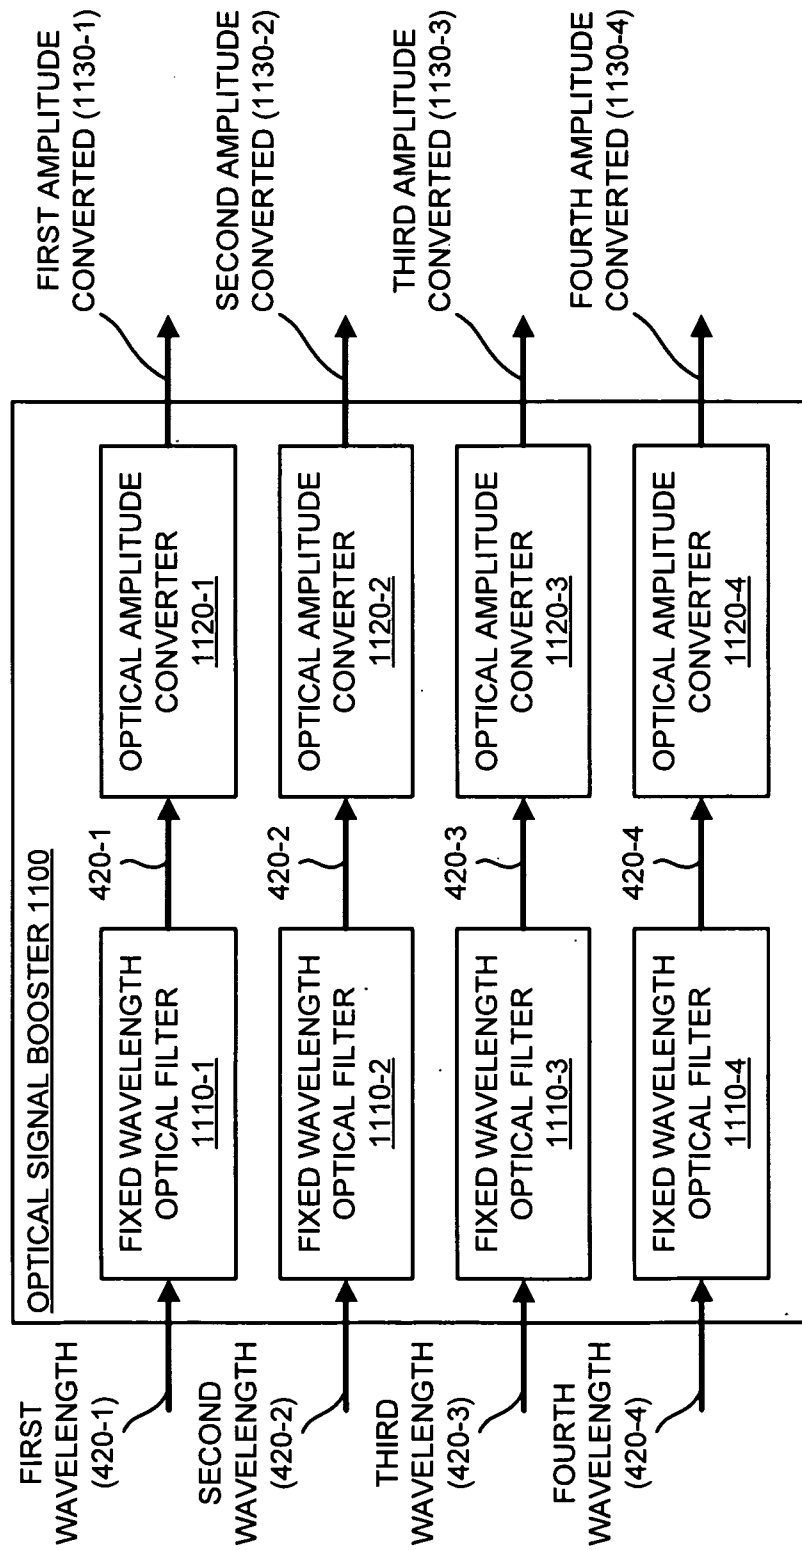

12/15

FIG. 12

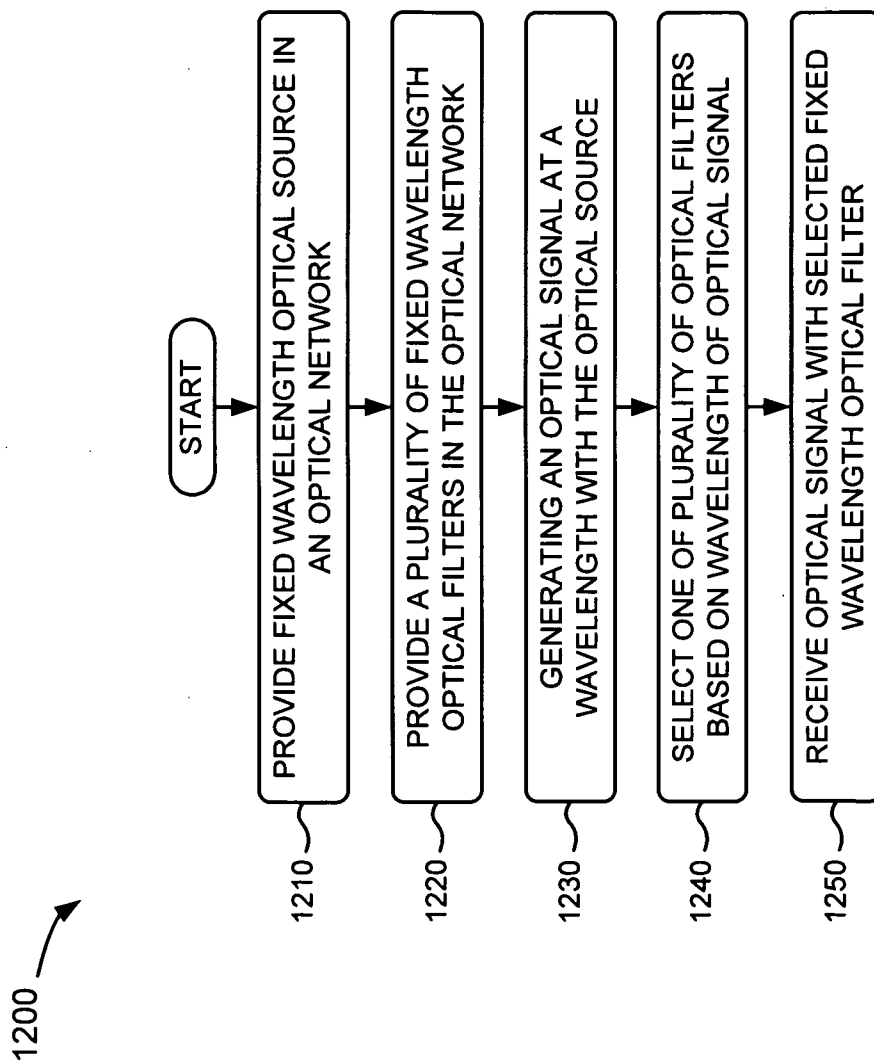


FIG. 13

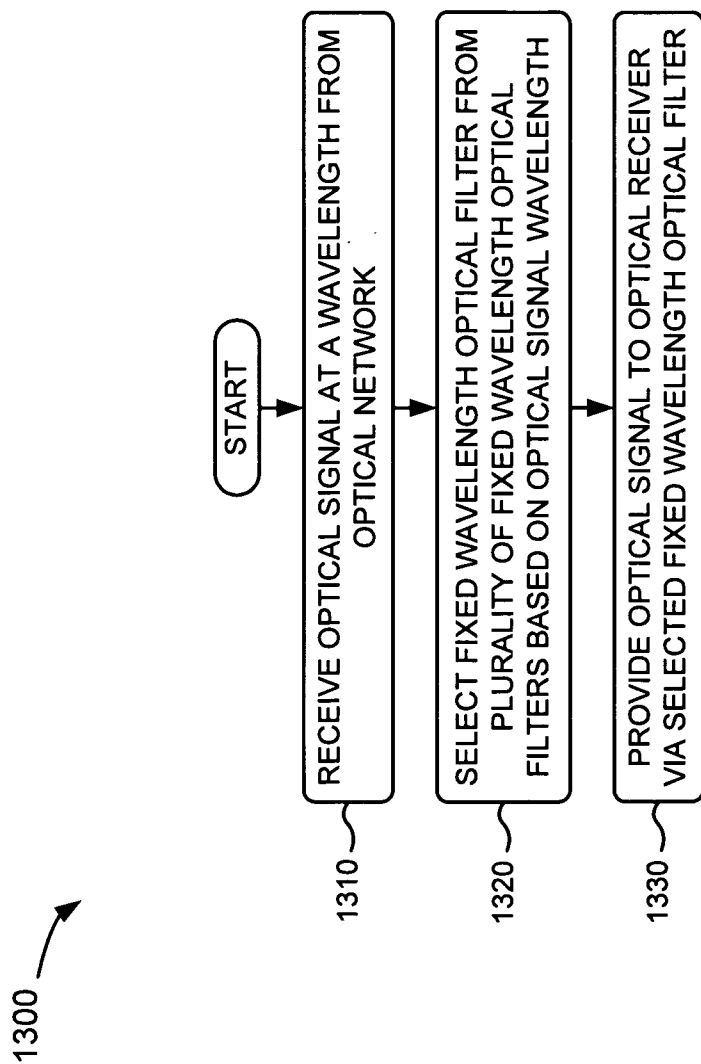


FIG. 14

1320


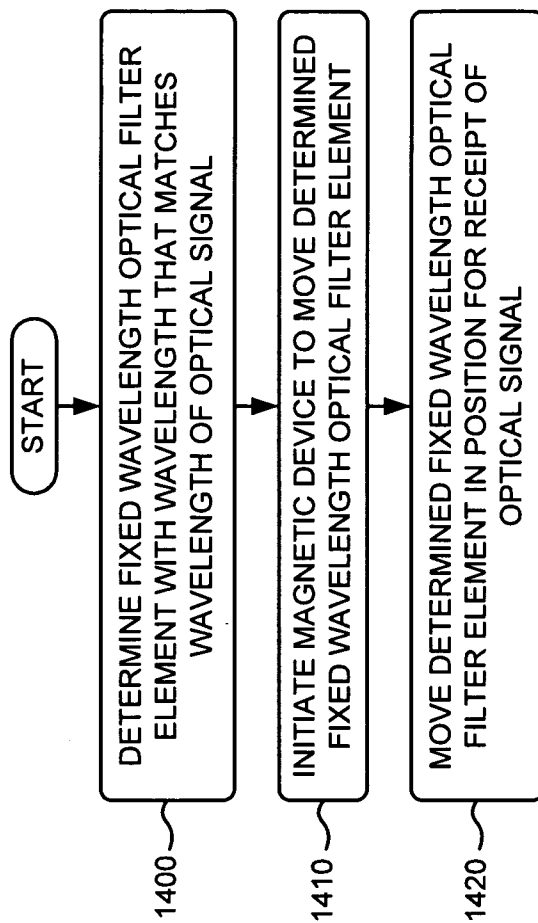


FIG. 15

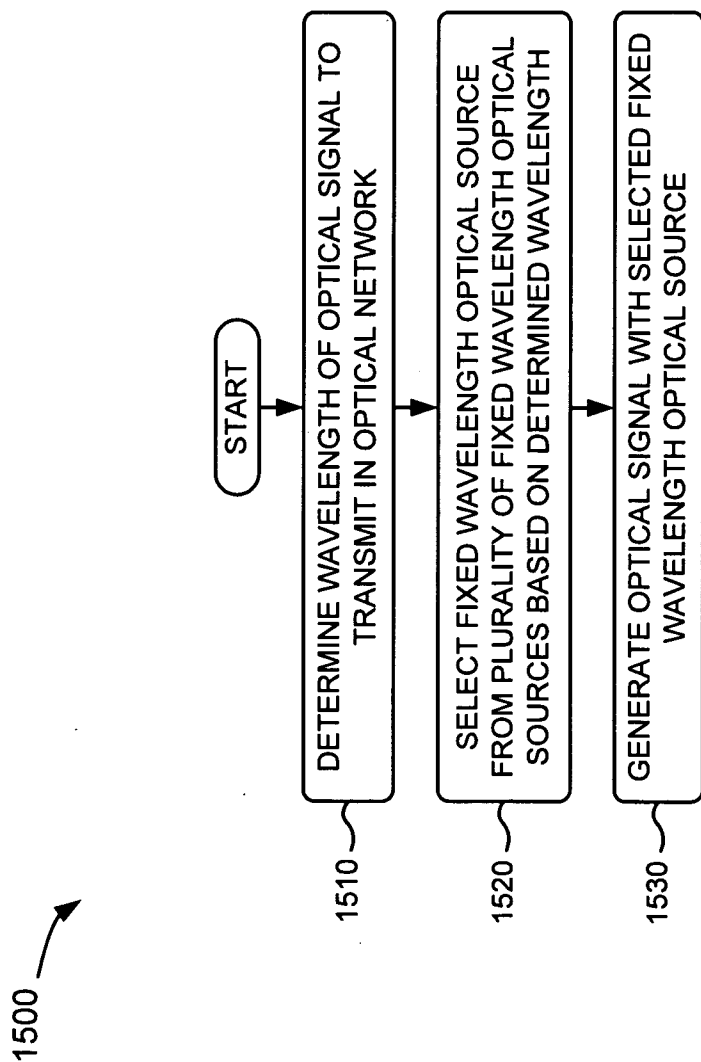

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 08/84514

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - H04B 10/04 (2009.01)

USPC - 398/183

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

USPC - 398/183

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
USPC - 398/140, 141, 142, 183 (see search terms below)

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

PubWest(PGPB,USPT,EPAB,JPAB), Google Scholar, USPTO

Search Terms: optical, passive, network, magnetic, laser, aplifier, filter, line, terminal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X ----- Y	US 6,606,430 B2 (Bartur et al.) 12 August 2003 (12.08.2003), entire document especially col 4, ln 15-33, col 4, ln 34 to col 5, ln 11, col 2, ln 23-29, col 6, ln 52-62, col 2, ln 23-29, col 6, ln 52-62, col 1, ln 50 to col 2, ln 42, col 2, ln 53-56, col 3, ln 31, col 5, ln 60 to col 6, ln 31, col 3, ln 11-22	1, 2, 4, 5, 10-12, 14, 15, and 20-25 3, 6-9, 13, and 16-19
Y	US 7,257,327 B2 (Small) 14 August 2007 (14.08.2007), entire document especially col 8, ln 56-67	3, and 13
Y	US 6,320,996 B2 (Scobey et al.) 20 November 2001 (20.11.2001), entire document especially col 15, ln 31-41, col 14, ln 47 to col 15, ln 30	6-9, and 16-19

☐ Further documents are listed in the continuation of Box C.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

13 January 2009 (13.01.2009)

Date of mailing of the international search report

13 FEB 2009

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents

P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-3201

Authorized officer:

Lee W. Young

PCT Helpdesk: 571-272-4300

PCT OSP: 571-272-7774