



(51) International Patent Classification:

G02F 1/1335 (2006.01)

G02F 1/141 (2006.01)

(21) International Application Number:

PCT/CN2018/077894

(22) International Filing Date:

02 March 2018 (02.03.2018)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant: HONG KONG APPLIED SCIENCE AND TECHNOLOGY RESEARCH INSTITUTE COMPANY LIMITED [CN/CN]; 5/F, Photonics Centre, 2 Science Park West Avenue, Hong Kong Science Park, Shatin, New Territories, Hong Kong (CN).

(72) Inventors: TAM, Ming Wai Alwin; 1108, Long Fai House, Wong Tai Sin Lower Estate, Kowloon, Hong Kong (CN). ZHU, Xiuling; Flat D, 2/F, Block 3, Castello, Shatin, N.T., Hong Kong (CN). CHAN, Kin Lung; 3105 Hong Lai House, Hong Yat Court, Lam Tin, Hong Kong (CN).

(74) Agent: CHINA PAT INTELLECTUAL PROPERTY OFFICE; 2nd Floor, Zhongguancun Intellectual Property Building, Block B, No. 21 Haidian South Road, Haidian District, Beijing 100080 (CN).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,

(54) Title: BEAM-STEERING APPARATUS WITH FAST RESPONSE AND ENHANCED STEERING RESOLUTION

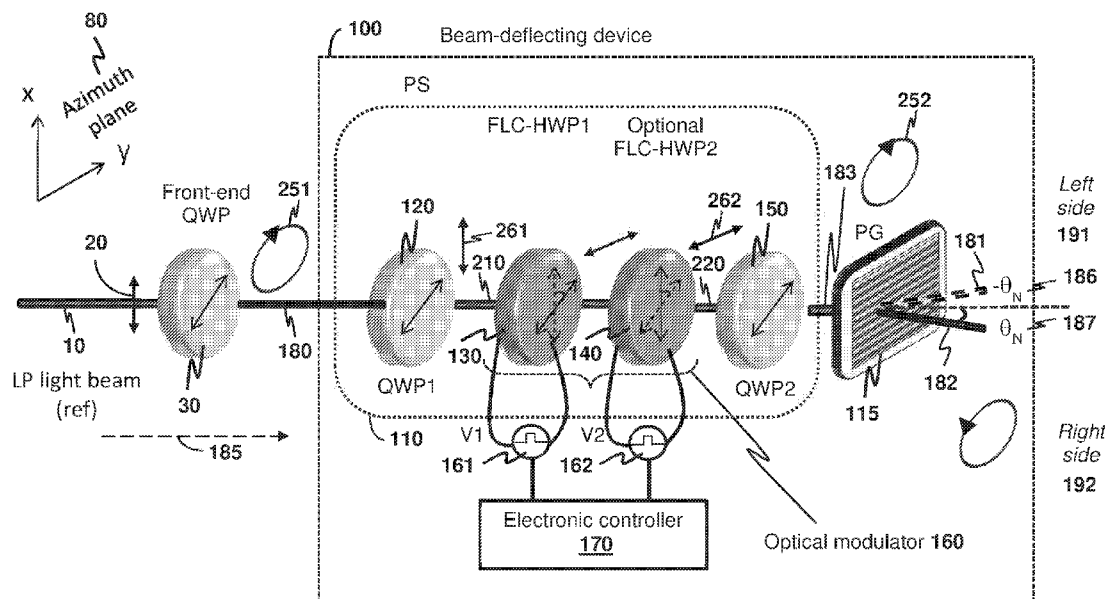


FIG. 1

(57) Abstract: A device (100) for controllably deflecting a first circularly-polarized (CP) light beam (180) from an incident direction (185) with fast response comprises a polarization selector (PS) (110) to adjust the incident light beam's sense of rotation (251) to a desired one to form a second CP light beam (183), and a polarization grating (PG) (115) to deflect the second CP light beam (183) according to the desired sense of rotation. The PS (110) comprises an optical modulator (160) sandwiched between two quarter-wave plates (120, 150). The optical modulator (160) has at least one ferroelectric liquid crystal (FLC) half-wave plate (HWP) (130) being reconfigurable in fast axis orientation. The device (100) has a fast response in beam steering due to a short time of reconfiguring the FLC HWP (130). Based on serially cascading multiple units each being this device (100), a beam-steering apparatus (610, 710) having fast response and enhanced steering resolution is obtained. The apparatus (610, 710) is usable for enhancing a field of view in projecting an image.



OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

BEAM-STEERING APPARATUS WITH FAST RESPONSE AND ENHANCED STEERING RESOLUTION

5 LIST OF ABBREVIATIONS

	[0001]	3D	three-dimensional
	[0002]	CP	circularly-polarized
	[0003]	DC	direct current
	[0004]	DMD	digital micromirror device
10	[0005]	DOE	diffractive optical element
	[0006]	EO	electro-optical
	[0007]	FLC	ferroelectric liquid crystal
	[0008]	FOV	field of view
	[0009]	H	horizontal
15	[0010]	HWP	half-wave plate
	[0011]	IR	infrared
	[0012]	LC	liquid crystal
	[0013]	LCoS	a liquid crystal on silicon
	[0014]	LH	left hand
20	[0015]	LP	linearly-polarized
	[0016]	PG	polarization grating
	[0017]	PS	polarization selector
	[0018]	QWP	quarter-wave plate
	[0019]	RH	right hand
25	[0020]	SLM	spatial light modulator
	[0021]	V	vertical

FIELD OF THE INVENTION

[0022] The present application generally relates to an apparatus for non-mechanically steering an optical beam. In particular, the present invention relates to a beam-steering
30 apparatus based on using plural beam-deflecting devices for increasing a resultant steering

resolution where each of the beam-deflecting devices employs at least one FLC HWP for providing fast response time.

BACKGROUND

[0023] Non-mechanical steering of an optical beam is useful for many applications such as increasing the FOV in holographic projection. A PG can be used to non-mechanically steering the optical beam or an optical image. Theoretical and implementation aspects of the PG can be found in, e.g., "Polarization Gratings for Non-Mechanical Beam Steering Applications" authored by J. Buck et al. and published in *Proceedings of SPIE 8395, Acquisition, Tracking, Pointing, and Laser Systems Technologies XXVI*, 83950F (15 May 2012), the disclosure of which is incorporated by reference herein. The PG deflects a CP light beam by a deflection angle to a traveling direction of the CP light beam. The deflection is to the left side or the right side of the traveling direction. Whether the left or right side is selected in light deflection is determined according to the sense or rotation, or handedness, of the CP light beam.

[0024] However, there is a need for improvement in the PG regarding its steering resolution and response time. The steering resolution is generally poor as the PG offers a fixed deflection angle. The PG's response time of switching the light beam from the left side to the right side or vice versa, usually around 10ms per steer, is relatively shorter than many other beam-steering devices such as a liquid prism. Despite this, a shorter response time, e.g., a sub-millisecond response time, is required for a number of practical applications such as tracking a fast-moving object and then spotlighting it in a radar application.

[0025] US2012/0188467 addresses the issue of poor resolution by disclosing a beam-steering device realized with a serial cascade of multiple units each being a PS followed by a PG. Each unit, with the PS thereof realized by nematic LC, is electronically controllable to deflect an incoming light beam or maintain its traveling direction by using an electric field to control orientation of LC molecules in the PS. By controlling an actual deflection angle in each unit, a plurality of achievable deflection angles is obtained so that the steering resolution is increased. Although the steering resolution is improved, the response time in beam steering is not shortened.

[0026] US9,575,366 discloses a FLC switch that is capable of fast switching and low-cost manufacturing, and claims that this switch is useful for implementing a diffraction grating. The disclosed switch includes a pair of crossed polarizers, causing no deflection of the incident beam when the disclosed FLC switch is switched on. Although the FLC switch of

US9,575,366 provides fast switching and the multistage arrangement used in the beam-steering device of US2012/0188467 improves the beam steering resolution, applying the FLC switch of US9,575,366 to implement the PS in each unit of the beam-steering device of US2012/0188467 does not result in a workable PG having an improved steering resolution and a fast response time since the FLC switch is basically an on-off switch.

[0027] There is a need in the art for a new design of a beam-steering device that provides an improved steering resolution and a fast response time.

SUMMARY OF THE INVENTION

[0028] A first aspect of the present invention is to provide a device for controllably deflecting a first CP light beam from an incident direction with an advantage that the device provides a fast response in beam steering.

[0029] The beam-deflecting device comprises a PG for receiving a second CP light beam generated from the first CP light beam and deflecting the received second CP light beam from the incident direction by a deflection angle to a left side or a right side of the incident direction. The second CP light beam has a second sense of rotation. Selection of the left or right side in deflecting the second CP light beam is determined according to the second sense of rotation.

[0030] The device further comprises a PS for controllably maintaining or reversing the first sense of rotation of the first CP light beam to generate the second CP light beam that possesses the second sense of rotation. The PS comprises a first QWP, an optical modulator and a second QWP. The first QWP is used for transforming the first CP light beam to a first LP light beam. The first LP light beam has a first polarization orientation. The first QWP is arranged such that the first sense of rotation determines the first polarization orientation. The optical modulator is used for adjusting the first polarization orientation of the first LP light beam to a second polarization orientation so as to form a second LP light beam having the second polarization orientation. The second QWP is used for transforming the second LP light beam to the second CP light beam. The second QWP is arranged such that the second polarization orientation determines the second sense of rotation possessed by the second CP light beam that is generated.

[0031] Particularly, the optical modulator comprises at least one FLC HWP reconfigurable by at least one electrical signal applied to the at least one FLC HWP such that the at least one electrical signal controls whether the first and second polarization orientations are same or mutually orthogonal. It follows that the at least one electrical signal also controls

selection of the left or right side in deflecting the second CP light beam. When the left side is switched to the right side or vice versa, a transition period for the second CP light beam to transit between the left and right sides is governed by a time of reconfiguring the at least one FLC HWP in response to a change of the at least one electrical signal.

5 [0032] In one embodiment, the at least one FLC HWP consists of a first FLC HWP only.

[0033] In another embodiment, the at least one FLC HWP consists of a first FLC HWP and a second FLC HWP serially cascaded together. The at least one electrical signal consists of a first electrical signal for reconfiguring the first FLC HWP, and a second electrical signal for reconfiguring the second FLC HWP. To cause the second polarization orientation to be
10 orthogonal to the first polarization orientation, the first and second electrical signals are synchronized to be mutually out-of-phase. To cause the second polarization orientation to be same as the first polarization orientation, the first and second electrical signals are synchronized to be in-phase. Preferably, each of the first and second electrical signals over a given duration is a bipolar signal symmetrical with respect to zero volt and having an
15 amplitude transition at a mid-point of the duration, causing each of the first and second FLC HWPs to be driven with a zero DC voltage averaged over the duration.

[0034] A second aspect of the present invention is to provide a beam-steering apparatus for deflecting an incident LP light beam by a selected angle from an incident direction. The apparatus has fast response in beam steering as well as an enhanced steering resolution.

20 [0035] The beam-steering apparatus comprises a front-end QWP for transforming the incident LP light beam to an incident CP light beam, and plural beam-deflecting units serially cascaded together such that the incident CP light beam is successively deflected during traveling over the beam-deflecting units. Each of the beam-deflecting units is realized as any of the embodiments of the beam-deflecting device as set forth in the first aspect of the present
25 invention. The apparatus further comprises an electronic controller configured to determine and generate the at least one electrical signal for each of the beam-deflecting units such that the selected angle equals a sum of signed deflection angles each provided by an individual beam-deflection unit. For the individual beam-deflection unit, the signed deflection angle has a magnitude given by the deflection angle and a sign determined according to the left or right
30 side that is selected.

[0036] A third aspect of the present invention is to provide a system for projecting an image with a FOV enhanced by using any of the embodiments of the beam-steering apparatus as disclosed in the second aspect of the present invention.

[0037] The system comprises an image generator, and the beam-steering apparatus realized according of any embodiment of the second aspect of the present invention. The image generator is used for generating the image in LP light. The beam-deflecting apparatus is used to deflect the image.

5 [0038] In one embodiment, the image generator comprises a light source for generating LP light, a passive DOE module for generating the image upon illuminated by the light source such that the image is carried in LP light, and a fine steerer located between the passive QWP and the passive DOE module for additionally deflecting the image carried in CP light. In particular, the fine steerer has a steering angle range narrower than a steering
10 angle range provided by the beam-steering apparatus. It follows that the beam-steering apparatus increases a FOV provided by the system in comparison to using the fine steerer alone.

[0039] In another embodiment, the image generator comprises a light source for generating LP light, and a SLM for generating and steering the image upon illuminated by the
15 light source such that the image is carried in LP light and is changeable by programming the SLM. Particularly, the SLM has a steering angle range narrower than a steering angle range provided by the beam-steering apparatus so that the beam-steering apparatus increases a FOV provided by the system in comparison to using the SLM alone.

[0040] Other aspects of the present invention are disclosed as illustrated by the
20 embodiments hereinafter.

BRIEF DESCRIPTION OF THE DRAWINGS

[0041] FIG. 1 depicts a beam-deflecting device in accordance with an exemplary embodiment of the present invention.

[0042] FIG. 2A illustrates an orientation of a fast axis.

25 [0043] FIG. 2B illustrates fast axes of QWPs and HWPs in the beam-deflecting device.

[0044] FIG. 3 illustrates voltage levels used in reconfiguring an optical modulator realized with only one FLC HWP in accordance with one embodiment of the present invention, the optical modulator being used in the beam-deflecting device.

[0045] FIG. 4 illustrates signal waveforms used in reconfiguring an optical modulator
30 realized by a serial cascade of two FLC HWPs in accordance with one embodiment of the present invention, the optical modulator being used in the beam-deflecting device.

[0046] FIG. 5 depicts, in accordance with an exemplary embodiment of the present invention, a beam-steering apparatus formed by serially cascading multiple beam-deflecting devices for improving beam-steering resolution.

[0047] FIG. 6 depicts a first embodiment of a system comprising the disclosed beam-steering apparatus for projecting an image with enhanced FOV, where the system uses a passive DOE to generate the image.

[0048] FIG. 7 depicts a second embodiment of a system comprising the disclosed beam-steering apparatus for projecting an image with enhanced FOV, where the system uses an active SLM to generate the image that is changeable by programming the SLM.

10 DETAILED DESCRIPTION

[0049] As occasionally used hereinafter, a sense of rotation of a CP light beam is either LH or RH, and a LP light beam is characterized with a polarization orientation. Sometimes but not absolutely necessary, the LP light beam is confined to have one of two mutually-orthogonal polarization orientations regarded as H (horizontal) and V (vertical) according to some coordinate system.

[0050] The fast switching property of FLC is advantageously used in a beam-deflecting device disclosed herein to rapidly steer the light beam from deflecting to one side of an incident direction to deflecting to an opposite side thereof. The fast response time of FLC stems from spontaneous polarization of FLC molecules, a property not possessed by nematic LC. However, unlike conventional nematic LC, the EO response of FLC is an in-plane switching type. A special optical design is required for the beam-deflecting device to account for this unique EO response of FLC.

[0051] A first aspect of the present invention is to provide a device for controllably deflecting a first CP light beam from an incident direction. The device essentially employs a non-mechanical mechanism for deflecting the first CP light beam.

[0052] FIG. 1 depicts an exemplary embodiment of the disclosed device. A beam-deflecting device **100** is used to controllably deflect a first CP light beam **180** from an incident direction **185**. The first CP light beam **180** has a first sense of rotation **251**. As the first CP light beam **180** has a circular polarization, the first sense of rotation **251** is either LH or RH.

[0053] The beam-deflecting device **100** comprises a PG **115** for receiving a second CP light beam **183** generated from the first CP light beam **180** and for deflecting the received second CP light beam **183** from the incident direction **185** by a deflection angle (**186** or **187**)

to a left side **191** or a right side **192** of the incident direction **185**. The second CP light beam **183** has a second sense of rotation **252**, which is either LH or RH. As it is a property of PGs (see the disclosure of J. Buck et al. as mentioned above), selection of the left side **191** or the right side **192** in deflecting the second CP light beam **183** is determined according to the second sense of rotation **252**. In practical realizations of the PG **115** by nematic LC or LC polymer, e.g., in US2012/0188467, deflection angles **186**, **187** are the same, or substantially close together, regardless of whether the second CP light beam **183** travels to the left side **191** to form a left-deflecting output light beam **181** or travels to the right side **192** to form a right-deflecting output light beam **182**.

[0054] The left side **191** and the right side **192**, which are opposite to each other along the incident direction **185**, are relative concepts and are not uniquely defined when a 3D space is considered. When those skilled in the art define the left side **191** in the space first, the right side **192** is immediately obtained as a side opposite to the left side **191** along the incident direction **185**. Those skilled in the art may also assign the right side **192** to be a new left side when the beam-deflecting device **100** is turned upside down. As will soon be evident, optical elements in the disclosed device **100** are aligned in a manner such that the disclosed beam-deflecting device **100** is rotationally invariant in structure. Therefore, any partition of the space into the left and right sides **191**, **192** along the incident direction **185** does not affect the uniqueness in defining the structure of the beam-deflecting device **100**. In the present disclosure, the beam-deflecting device **100** is described with the left and right sides **191**, **192** as shown in FIG. 1, where the beam-deflecting device **100** is depicted on an azimuth plane **80** (x-y plane).

[0055] Given that one wishes to direct the second CP light beam **183** to a desired side, which is either the left side **191** or the right side **192**, one is required to set the second sense of rotation **252** to a particular sense of rotation determined according to the desired side. The second sense of rotation **252** may be the same or mutually orthogonal to the first sense of rotation **251**. Hence, it is required to have a user-configurable optical element to adjust the first CP light beam **180** to have the second sense of rotation **252**. The beam-deflecting device **100** further comprises a PS **110** for controllably maintaining or reversing the first sense of rotation **251** of the first CP light beam **180** so as to generate the second CP light beam **183** that possesses the second sense of rotation **252**.

[0056] In the beam-deflecting device **100**, the PS **110** is an active optical device that is externally controllable. To have a fast response time in beam steering, FLC is used in forming one or more optical elements in the PS **110**. The PG **115** is circular-polarization

sensitive while most existing FLC-based devices, due to manufacturing constraints, are designed to be responsive only to LP light beams. The PS **110** is developed by taking this limitation into account.

[0057] The PS **110** as disclosed herein comprises a first QWP **120**, an optical modulator **160** and a second QWP **150** where the optical modulator **160** is sandwiched between the first and second QWPs **120**, **150**. The optical modulator **160** comprises a first FLC HWP **130** reconfigurable by a first electrical signal **161**, and optionally a second FLC HWP **140** reconfigurable by a second electrical signal **162**. The first FLC HWP **130** and the second HWP **140** each function as a HWP but the fast axis thereof is reconfigurable by the corresponding electrical signal (**161** or **162**). Though skilled in the art will appreciate that once the fast axis of an optical element is defined, the slow axis thereof is identifiable as an axis orthogonal to the fast axis. An electronic controller **170** is used for generating the first electrical signal **161** and, if the second FLC HWP **140** is present, the second electrical signal **162**.

[0058] For illustrative purposes only, a LP light beam **10** is used to generate the first CP light beam **180** by transmitting the LP light beam **10** through a front-end QWP **30**. The LP light beam **10** has a polarization orientation **20** to be used as reference in illustrating fast-axis orientation of various QWPs and HWPs in the disclosed device **100**. FIG. **2A** illustrates an inclination angle **52** extended from the polarization orientation **20** to a certain fast axis **50**. As an example only, FIG. **2B** illustrates fast axes of (a) the first QWP **120**, (b) the first FLC HWP **130**, (c) the second FLC HWP **140** (d) the second QWP **150** and (e) the front-end QWP **30**. The first QWP **120** has a first fast axis **121**, which makes an inclination angle **122** with respect to the polarization orientation **20**. The second QWP **150** has a second fast axis **151**, which makes an inclination angle **152**. The first FLC HWP **130** has a third fast axis, where the third fast axis is reconfigurable by the first electrical signal **161** to adopt either a first orientation **131** or a second orientation **133**. The first orientation **131** and the second orientation **133** make inclination angles **132**, **134**, respectively. The second FLC HWP **140** has a fourth fast axis, where the fourth fast axis is reconfigurable by the second electrical signal **162** to adopt either a third orientation **141** or a fourth orientation **143**. The third orientation **141** and the fourth orientation **143** make inclination angles **142**, **144**, respectively. The front-end QWP **30** is a passive QWP with a fifth fast axis **31**, making an inclination angle **32** with respect to the polarization orientation **20**.

[0059] The Inventors have determined the following inclination angles to be used for the disclosed device **100** such that the PS **110** can controllably maintain or reverse the first sense

of rotation **251** of the first CP light beam **180** for generating the second CP light beam **183** having the second sense of rotation **252**.

[0060] • The first QWP **120** and the second QWP **150** have their inclination angles **122**,
5 **152**, the same and selected to be either 45° or -45° .

[0061] • The first FLC HWP **130** has the inclination angle **132** of the first orientation
131 to be 45° or -45° , and has the inclination angle **134** of the second orientation **133**
to be 0° or 90° .

[0062] • The second FLC HWP **140** has the inclination angle **142** of the third
10 orientation **141** to be 45° or -45° , and has the inclination angle **144** of the fourth
orientation **143** to be 0° or 90° .

[0063] • The first orientation **131** that is selected needs not be the same as the selected
third orientation **141**. Similarly, the selected second orientation **133** needs not be the
same as the selected fourth orientation **143**.

[0064] • To enable the LP light beam **10** to generate the first CP light beam **180**, the
15 front-end QWP **30** has the inclination angle **32** the same as the inclination angle **122**
of the first QWP **120** (or the inclination angle **152** of the second QWP **150**).

[0065] Although the aforementioned inclination angles are 0° or multiples of 45° , and
20 specify intended orientations to which fast axes are pointed, practically misalignment with
the intended orientations exist. As experimentally determined by the Inventors, the beam-
deflecting device **100** is workable if each of the first fast axis **121**, the second fast axis **151**
and the first and second orientations **131**, **133** of the third axis deviates from an intended
orientation by at most 2° . In case the optical modulator **160** has the second FLC HWP **140**,
25 each of the third and fourth orientations **141**, **143** of the fourth axis deviates from an intended
orientation by at most 2° .

[0066] From the above-mentioned choices of fast axes, those skilled in the art will
appreciate that without reference to the polarization orientation **20**, the fast-axis orientation is
expressible by the following characterization.

[0067] • The first and second fast axes **121**, **151** are oriented along a certain pointing
30 direction, e.g., a pointing direction **60** as shown in FIG. **2B**.

[0068] • The first orientation **131** is along or orthogonal to the pointing direction **60**.

The second orientation **133** has a 45° or -45° offset from the first orientation **131**.

[0069] • The third orientation **141** is along or orthogonal to the pointing direction **60**.

The fourth orientation **143** has a 45° or -45° offset from the third orientation **141**.

5

[0070] The functions performed by various optical elements in the PS **110** are described as follows. The first QWP **120** is used for transforming the first CP light beam **180** to a first LP light beam **210** having a first polarization orientation **261**. The first QWP **120** is further arranged as mentioned above such that the first sense of rotation **251** determines the first polarization orientation **261**. The optical modulator **160** is used for adjusting the first polarization orientation **261** of the first LP light beam **210** to a second polarization orientation **262** so as to form a second LP light beam **220** having the second polarization orientation **262**. The second QWP **150** is used for transforming the second LP light beam **220** to the second CP light beam **183**. In addition, the second QWP **150** is arranged as mentioned above such that the second polarization orientation **262** determines the second sense of rotation **252** possessed by the second CP light beam **183**.

10

15

[0071] In a first embodiment of the beam-deflecting device **100**, the optical modulator **160** is equipped with the first FLC HWP **130** only.

[0072] The first electrical signal **161** is applied to the first FLC HWP **130** to create a potential difference across the first FLC HWP **130** and hence an electric field therein. The purpose of creating the electric field inside the first FLC HWP **130** is to orient FLC molecules therein in a certain way so as to orient the third fast axis of the first FLC HWP **130** to adopt the first orientation **131** or the second orientation **133**. Whether the first orientation **131** or the second orientation **133** is adopted is determined according to the voltage of the first electrical signal **161**. In one choice of voltage levels for the first electrical signal **161** as shown in FIG. 3, two antipodal voltage levels, denoted as $-V_p$ and $+V_p$, are used for orientation selection. When the first electrical signal **161** has a voltage of $-V_p$, the first orientation **131** is adopted as an illustrative example. When the first electrical signal **161** has a voltage of $+V_p$, the first FLC HWP **130** adopts the second orientation **133** in orienting the third fast axis. As such, the first electrical signal **161** controls whether the first and second polarization orientations **261**, **262** are same or mutually orthogonal. Furthermore, the first electrical signal **161** controls the outcome of the second polarization orientation **262**.

20

25

30

[0073] The advantage of the beam-deflecting device **100** as disclosed herein is apparent when one wishes to switch the device output from the left-deflecting output light beam **181** to the right-deflecting output light beam **182** or vice versa. A transition period for the second CP light beam **183** to transit between the left side **191** and the right side **192** is given by a time taken by the first FLC HWP **130** to reconfigure itself so as to switch between the first and second orientations **131**, **133**. Switching between the two orientations **131**, **133** is achieved by reorienting FLC molecules in the first FLC HWP **130**. Due to spontaneous polarization of the FLC molecules, the first FLC HWP **130** takes a short switching time of around 10 μ s to 200 μ s. Therefore, the transition period for switching from one side to another is also around 10 μ s to 200 μ s, offering the beam-deflecting device **100** an advantage of fast response.

[0074] Table **1** lists the senses of orientation and the polarization orientations of the involved light beams **180**, **210**, **220**, **183** against the two voltages ($-V_p$, $+V_p$) of the first electrical signal **161**. For convenience, the first orientation **131** and the second orientation **133** are selected to be 45° (obtained by a voltage of $-V_p$) and 0° (obtained by a voltage of $+V_p$), respectively, in obtaining Table **1**. Note that if the third fast axis has a 45° orientation, a change of the first polarization orientation **261** results and the first and second polarization orientations **261**, **262** are mutually orthogonal; if the third fast axis has a 0° orientation, there is no change in the first polarization orientation **261**. From Table **1**, it is apparent that if the first sense of rotation **251** of the first CP light beam **180** is known and it is given a desired side (the left side **191** or the right side **192**) to which the first CP light beam **180** is intended to be deflected, then the required voltage of the first electrical signal **161** applied to the first FLC HWP **130** is uniquely determinable.

Table 1.

1st electrical signal 161	1st sense of rotation 251	1st polarization orientation 261	2nd polarization orientation 262	2nd sense of rotation 252	Deflecting to:
$-V_p$	LH	H	V	LH	Left side 191
$+V_p$	LH	H	H	RH	Right side 192
$-V_p$	RH	V	H	RH	Right side 192
$+V_p$	RH	V	V	LH	Left side 191

[0075] A LC cell is preferred to have DC balancing in applying a potential difference across the LC cell; otherwise free carriers would be injected into a LC layer inside the cell, potentially leading to undesirable consequences such as shortening the lifetime of the beam-deflecting device **100**. For the cell made of nematic LC, a square-wave signal having the same positive and negative peak voltage without a DC component is applied across the LC cell to achieve DC balancing. This scheme works well for a nematic LC cell because the EO response of nematic LC is the same for both positive and negative voltages. However, adopting this driving scheme would not work for FLC as the EO responses for positive and negative voltages are different, potentially leading to operational flickering of the output light beam steering from the left-deflecting one **181** to the right-deflecting one **182** or vice-versa.

[0076] In a second embodiment of the beam-deflecting device **100**, DC balancing is introduced. The optical modulator **160** is formed by serially cascading the first FLC HWP **130** and the second FLC HWP **140** together. The third fast axis of the first FLC HWP **130** adopts the first orientation **131** or the second orientation **133** according to the first electrical signal **161**. The fourth fast axis of the second FLC HWP **140** adopts the third orientation **141** or the fourth orientation **143** according to the second electrical signal **162**. Particularly, the waveforms used for the first and second electrical signals **161**, **162** are designed for achieving DC balancing.

[0077] FIG. 4 depicts exemplary waveforms used by the first and second electrical signals **161**, **162** for configuring the optical modulator **160** for achieving DC balancing. Waveforms **310**, **320**, which form a pair of in-phase waveforms synchronized over a duration **360**, are used as the first and second electrical signals **161**, **162**, respectively, for maintaining the first polarization orientation **261** without change after passing through the first and second FLC HWPs **130**, **140**. Waveforms **330**, **340**, which are a pair of mutually out-of-phase waveforms synchronized over the duration **360**, are used as the first and second electrical signals **161**, **162**, respectively, for making a 90° shift of the first polarization orientation **261**.

[0078] To demonstrate the usefulness of the two pairs of synchronized waveforms, without loss of generality consider a special case that the first and third orientations **131**, **141** are 45° (obtained by a voltage of $-V_p$), and that the second and fourth orientations **133**, **143** are 0° (obtained by a voltage of $+V_p$). The duration **360** is divided into a first half duration **361** and a second half duration **362**. Table 2 lists the effects by driving the first and second FLC HWPs **130**, **140** over the first half duration **361** and the second half duration **362** with the pair of in-phase waveforms **310**, **320**. Table 3 lists the corresponding effects when the pair of out-of-phase waveforms **330**, **340** is used.

Table 2.

	Fast-axis orientation of first FLC HWP 130	Fast-axis orientation of second FLC HWP 140	Effect to first polarization orientation 261 in each half duration
1st half duration 361	0°	0°	No change of polarization orientation
2nd half duration 362	45°	45°	No change of polarization orientation

Table 3.

	Fast-axis orientation of first FLC cell 130	Fast-axis orientation of second FLC HWP 140	Effect to first polarization orientation 261 in each half duration
1st half duration 361	0°	45°	90° shift of polarization orientation
2nd half duration 362	45°	0°	90° shift of polarization orientation

5

[0079] It is apparent that over the whole duration **360**, the first and second polarization orientations **261**, **262** are the same if the pair of in-phase waveforms **310**, **320** is used, whereas the two polarization orientations **261**, **262** are mutually orthogonal if the pair of out-of-phase waveforms **330**, **340** is employed.

10 **[0080]** From the waveforms **310**, **320**, **330**, **340**, those skilled in the art will appreciate that each of the first and second electrical signals **161**, **162** over the whole duration **360** is a bipolar signal symmetrical with respect to zero volt and having an amplitude transition at a mid-point **365** of the duration **360**, causing each of the first and second FLC HWPs **130**, **140** to be driven with a zero DC voltage averaged over the duration **360**. Thereby, DC balancing
15 is achieved.

[0081] The waveforms **310**, **320**, **330**, **340** may be modified in a number of ways to achieve the same aforementioned effects while keeping the advantage of DC balancing. In

one way, both in-phase waveforms **310**, **320** are inverted such that each of the waveforms **310**, **320** after modification has the voltage of $-V_p$ in the first half duration **361** and the voltage of $+V_p$ in the second half duration **362**. Note that the inverted version of the pair of in-phase waveforms **310**, **320** is also one pair of in-phase waveforms. Similarly, both out-of-phase waveforms **330**, **340** may also be inverted.

[0082] Those skilled in the art may generalize the observations made above and yield the following characterization to the first and second electrical signals **161**, **162**. To cause the second polarization orientation **262** to be orthogonal to the first polarization orientation **261** over the duration **360**, the first electrical signal **161** configures the first FLC HWP **130** to adopt the first orientation **131** over the first half duration **361** and the second orientation **133** over the second half duration **362** while the second electrical signal **162** configures the second FLC HWP **140** to adopt the fourth orientation **143** over the first half duration **361** and the third orientation **141** over the second half duration **362**. To cause the second polarization orientation **262** to be same as the first polarization orientation **261** over the duration **360**, the first electrical signal **161** configures the first FLC HWP **130** to adopt the first orientation **131** over the first half duration **361** and the second orientation **133** over the second half duration **362** while the second electrical signal **162** configures the second FLC HWP **140** to adopt the third orientation **141** over the first half duration **361** and the fourth orientation **143** over the second half duration **362**.

[0083] Depending on applications, the first CP light beam **180** may be visible or invisible. For example, if the device **100** is used in a projector for projecting an image visually viewable by humans, the first CP light beam **180** is visible. In another example, if the first CP light beam **180** is used for sensing a surrounding space, IR light may be used. In general, the PG **115**, the first QWP **120**, the first and second FLC HWPs **130**, **140**, and the second QWP **150** are configured to be responsive to the wavelength range of interest.

[0084] A second aspect of the present invention is to provide a beam-steering apparatus for deflecting an incident CP light beam by a selected angle from an incident direction. In particular, the beam-steering apparatus provides an enhanced steering resolution by adopting a multi-stage approach similar to the device of US2012/0188467, as well as a fast response as provided by the beam-deflecting device disclosed above.

[0085] FIG. 5 depicts a beam-steering apparatus **400** in accordance with an exemplary embodiment of the present invention. The apparatus **400** receives an incident LP light beam **480** and deflects it by a selected angle **486** from an incident direction **481** to form an output light beam **485**. The apparatus **400** comprises a front-end QWP **420** for transforming the

incident LP light beam 480 to an incident CP light beam 482, and plural beam-deflecting units 421, 422, 425 serially cascaded together such that the incident CP light beam 482 is successively deflected during traveling over the beam-deflecting units 421, 422, 425. Each of the beam-deflecting units 421, 422, 425 is realized as any of the embodiments of the beam-deflecting device disclosed above in the first aspect of the present invention. The front-end QWP 420 is similar in function to the front-end QWP 30 in FIG. 1. Hence, the front-end QWP 420 has a fast axis 429 (similar to the fifth fast axis 31) substantially parallel to the first fast axis 121 of the beam-deflecting unit 421, which is immediately adjacent to the front-end QWP 420. The apparatus 400 further comprises an electronic controller 430 configured to determine and generate one or more electrical signals for each beam-deflecting unit. For example, a first set of electrical signal(s) 431, a second set of electrical signal(s) 432 and a third set of electrical signal(s) 435 are generated for the beam-deflecting units 421, 422, 425, respectively. In particular, the one or more electrical signals are determined such that the selected angle equals a sum of signed deflection angles each provided by an individual beam-deflection unit. For the individual beam-deflection unit, the signed deflection angle has a magnitude given by the deflection angle and a sign determined according to the left or right side that is selected.

[0086] Although three beam-deflecting units 421, 422, 425 are depicted in FIG. 5 for illustration of the present invention, the present invention is not limited to only this number of beam-deflecting units 421, 422, 425. Any two or more beam-deflecting units may be used in forming the apparatus 400.

[0087] A third aspect of the present invention is to provide a system for projecting an image with a FOV enhanced by using any of the embodiments of the beam-steering apparatus as disclosed in the second aspect of the present invention. The image may be any image. For example, the image may be a visual image for human viewing, or a structured-light pattern transmitted in IR for some engineering purposes such as for 3D object measurement.

[0088] A first embodiment of the system disclosed herein is depicted in FIG. 6. A system 600 comprises an image generator 690 and a beam-steering apparatus 610. The image generator 690 is used for generating an image 662 in LP light. The beam-steering apparatus 610, realized according to any embodiment of beam-steering apparatus as disclosed above in the second aspect of the present invention, is used for deflecting the image 662 to form an output image (664a or 664b). Note that the image 662 carried in LP light has a role similar to the LP light beam 10 in FIG. 1. As such, a polarization orientation 672 of the LP light of the

image **662** has a 45° or -45° offset from the fast axis **429** of the front-end QWP **420** of the beam-steering apparatus **610**.

[0089] The image generator **690** comprises a light source **634**, a passive DOE module **632** and a fine steerer **630**. The light source **634** is used for generating LP light **660**. The passive DOE module **632** is used for generating a second image **661** when the passive DOE module **632** is illuminated by the LP light **660** to form the second image **661** that is carried in LP light. The fine steerer **630**, located between the passive QWP **620** and the passive DOE module **632**, is used for providing certain image deflection to the second image **661** to form the image **662**. In particular, the fine steerer **630** has a steering angle range narrower than a steering angle range provided by the beam-steering apparatus **610**. Thus, the beam-steering apparatus advantageously increases a FOV provided by the system **600** when compared to using the fine steerer **630** alone.

[0090] In one option, the passive DOE module **632** is a Dammann grating. In another option, the fine steerer **630** is a liquid prism or a variable optical array (such as an optical phased array).

[0091] A second embodiment of the system disclosed herein is depicted in FIG. 7. Similar to the system **600**, a system **700** comprises an image generator **790** and a beam-steering apparatus **710**. The image generator **790** is used for generating an image **761** in LP light. The beam-steering apparatus **710**, realized according to any embodiment of beam-steering apparatus as disclosed above in the second aspect of the present invention, is used for deflecting the image **761** to form an output image (**763a** or **763b**). Similar to the system **600** in the above-mentioned first embodiment, a polarization orientation **772** of the LP light of the image **761** makes a 45° or -45° offset from the fast axis **429** of the front-end QWP **420** of the beam-steering apparatus **710**.

[0092] The image generator **790** comprises a light source **732** and a SLM **730**. The light source **732** is used for generating LP light **760**. The SLM **730** is an active device for generating the image **761** and steering the generated image **761** when the SLM **730** is illuminated by the light source **732**. It follows that the image **761** is carried in LP light. Furthermore, the image **761** is changeable by programming the SLM **730**. In particular, the SLM **730** has a steering angle range narrower than a steering angle range provided by the beam-steering apparatus **710**. Effectively, the beam-steering apparatus **710** increases a FOV provided by the system **700** in comparison to using the SLM **730** alone.

[0093] The SLM **730** may be a LCoS or a DMD.

[0094] The present invention may be embodied in other specific forms without departing from the spirit or essential characteristics thereof. The present embodiment is therefore to be considered in all respects as illustrative and not restrictive. The scope of the invention is indicated by the appended claims rather than by the foregoing description, and all changes
5 that come within the meaning and range of equivalency of the claims are therefore intended to be embraced therein.

CLAIMS

1. A device for controllably deflecting a first circularly-polarized (CP) light beam from an incident direction, the first CP light beam having a first sense of rotation, the device comprising:

a polarization grating (PG) for receiving a second CP light beam generated from the first CP light beam and deflecting the received second CP light beam from the incident direction by a deflection angle to a left side or a right side of the incident direction, the second CP light beam having a second sense of rotation, wherein selection of the left or right side in deflecting the second CP light beam is determined according to the second sense of rotation; and

a polarization selector (PS) for controllably maintaining or reversing the first sense of rotation of the first CP light beam to generate the second CP light beam that possesses the second sense of rotation, the PS comprising:

(a) a first quarter-wave plate (QWP) for transforming the first CP light beam to a first linearly-polarized (LP) light beam having a first polarization orientation, the first QWP being arranged such that the first sense of rotation determines the first polarization orientation;

(b) an optical modulator for adjusting the first polarization orientation of the first LP light beam to a second polarization orientation so as to form a second LP light beam having the second polarization orientation; and

(c) a second QWP for transforming the second LP light beam to the second CP light beam, the second QWP being arranged such that the second polarization orientation determines the second sense of rotation possessed by the second CP light beam that is generated;

wherein the optical modulator comprises at least one ferroelectric liquid crystal (FLC) half-wave plate (HWP) reconfigurable by at least one electrical signal applied to the at least one FLC HWP such that the at least one electrical signal controls whether the first and second polarization orientations are same or mutually orthogonal and thereby controls selection of the left or right side in deflecting the second CP light beam, whereby when the left side is switched to the right side or vice versa, a transition period for the second CP light beam to transit between the left and right sides is governed by a time of

reconfiguring the at least one FLC HWP in response to a change of the at least one electrical signal.

2. The device of claim 1 further comprising an electronic controller for determining and generating the at least one electrical signal.

3. The device of claim 2, wherein:

the at least one electrical signal consists of a first electrical signal;

the at least one FLC HWP consists of a first FLC HWP;

the first QWP has a first fast axis, the second QWP has a second fast axis, and the first FLC HWP has a third fast axis; and

the first and second fast axes are oriented along a pointing direction; and

the third fast axis is reconfigurable by the first electrical signal to adopt either a first orientation or a second orientation, the first orientation being along or orthogonal to the pointing direction, the second orientation having a 45° or -45° offset from the first orientation.

4. The device of claim 3, wherein each of the first axis, the second axis, the first orientation and the second orientation deviates from an intended orientation by at most 2° .

5. The device of claim 1, wherein:

the at least one electrical signal consists of a first electrical signal and a second electrical signal;

the at least one FLC HWP consists of a first FLC HWP and a second FLC HWP serially cascaded together;

the first QWP has a first fast axis, the second QWP has a second fast axis, the first FLC HWP has a third fast axis, and the second FLC HWP has a fourth fast axis;

the first and second fast axes are oriented along a pointing direction;

the third fast axis is reconfigurable by the first electrical signal to adopt either a first orientation or a second orientation, the first orientation being along or orthogonal to the pointing direction, the second orientation having a 45° or -45° offset from the first orientation;

the fourth fast axis is reconfigurable by the second electrical signal to adopt either a third orientation or a fourth orientation, the third orientation being along or orthogonal to the pointing direction, the fourth orientation having a 45° or -45° offset from the third orientation; and

the first and second electrical signals are synchronized such that:

(a) to cause the second polarization orientation to be orthogonal to the first polarization orientation over a duration divided into a first half duration and a second half duration, the first electrical signal configures the first FLC HWP to adopt the first orientation over the first half duration and the second orientation over the second half duration while the second electrical signal configures the second FLC HWP to adopt the fourth orientation over the first half duration and the third orientation over the second half duration; and

(b) to cause the second polarization orientation to be same as the first polarization orientation over the duration, the first electrical signal configures the first FLC HWP to adopt the first orientation over the first half duration and the second orientation over the second half duration while the second electrical signal configures the second FLC HWP to adopt the third orientation over the first half duration and the fourth orientation over the second half duration.

6. The device of claim 5, wherein:

the first and second electrical signals are synchronized to be mutually out-of-phase so as to cause the second polarization orientation to be orthogonal to the first polarization orientation; and

the first and second electrical signals are synchronized to be in-phase so as to cause the second polarization orientation to be same as the first polarization orientation.

7. The device of claim 5, wherein:

each of the first and second electrical signals over the duration is a bipolar signal symmetrical with respect to zero volt and having an amplitude transition at a mid-point of the duration, causing each of the first and second FLC HWPs to be driven with a zero DC voltage averaged over the duration.

8. The device of claim 5, each of the first axis, the second axis, and the first to fourth orientations deviates from an intended orientation by at most 2° .

5 9. A beam-steering apparatus for deflecting an incident linearly-polarized (LP) light beam by a selected angle from an incident direction, the apparatus comprising:

a front-end quarter-wave plate (QWP) for transforming the incident LP light beam to an incident CP light beam;

plural beam-deflecting units serially cascaded together such that the incident CP
10 light beam is successively deflected during traveling over the beam-deflecting units, wherein each of the beam-deflecting units is realized as the device of claim 1; and

an electronic controller configured to determine and generate the at least one electrical signal for each of the beam-deflecting units such that the selected
15 angle equals a sum of signed deflection angles each provided by an individual beam-deflection unit, wherein for the individual beam-deflection unit, the signed deflection angle has a magnitude given by the deflection angle and a sign determined according to the left or right side that is selected.

20 10. The beam-steering apparatus of claim 9, wherein in the individual beam-deflecting unit:

the at least one electrical signal consists of a first electrical signal;

the at least one FLC HWP consists of a first FLC HWP;

the first QWP has a first fast axis, the second QWP has a second fast axis, and the
25 first FLC HWP has a third fast axis; and

the first and second fast axes are oriented along a pointing direction; and

the third fast axis is reconfigurable by the first electrical signal to adopt either a first orientation or a second orientation, the first orientation being along or
orthogonal to the pointing direction, the second orientation having a 45° or -45°
30 offset from the first orientation.

11. The beam-steering apparatus of claim 9, wherein in the individual beam-deflecting unit:

the at least one electrical signal consists of a first electrical signal and a second electrical signal;

the at least one FLC HWP consists of a first FLC HWP and a second FLC HWP serially cascaded together;

5 the first QWP has a first fast axis, the second QWP has a second fast axis, the first FLC HWP has a third fast axis, and the second FLC HWP has a fourth fast axis;

the first and second fast axes are oriented along a pointing direction;

10 the third fast axis is reconfigurable by the first electrical signal to adopt either a first orientation or a second orientation, the first orientation being along or orthogonal to the pointing direction, the second orientation having a 45° or -45° offset from the first orientation;

15 the fourth fast axis is reconfigurable by the second electrical signal to adopt either a third orientation or a fourth orientation, the third orientation being along or orthogonal to the pointing direction, the fourth orientation having a 45° or -45° offset from the third orientation; and

the first and second electrical signals are synchronized such that:

20 (a) to cause the second polarization orientation to be orthogonal to the first polarization orientation over a duration divided into a first half duration and a second half duration, the first electrical signal configures the first FLC HWP to adopt the first orientation over the first half duration and the second orientation over the second half duration while the second electrical signal configures the second FLC HWP to adopt the fourth orientation over the first half duration and the third orientation over the second half duration; and

25 (b) to cause the second polarization orientation to be same as the first polarization orientation over the duration, the first electrical signal configures the first FLC HWP to adopt the first orientation over the first half duration and the second orientation over the second half duration while the second electrical signal configures the second FLC HWP to adopt the third orientation over the first half duration and the fourth orientation over the second half duration.

30

12. The beam-steering apparatus of claim 11, wherein in the individual beam-deflecting unit:

the first and second electrical signals are synchronized to be mutually out-of-phase so as to cause the second polarization orientation to be orthogonal to the first polarization orientation; and

the first and second electrical signals are synchronized to be mutually in-phase so as to cause the second polarization orientation to be same as the first polarization orientation.

13. The beam-steering apparatus of claim 11, wherein in the individual beam-deflecting unit:

each of the first and second electrical signals over the duration is a bipolar signal symmetrical with respect to zero volt and having an amplitude transition at a mid-point of the duration, causing each of the first and second FLC HWPs to be driven with a zero DC voltage averaged over the duration.

14. A system for projecting an image comprising:

an image generator for generating the image in linearly-polarized (LP) light; and the beam-steering apparatus of any of claims 9-13 for deflecting the image.

15. The system of claim 14, wherein the image generator comprises:

a light source for generating LP light;

a passive diffractive optical element (DOE) module for generating the image upon illuminated by the light source such that the image is carried in LP light; and

a fine steerer located between the passive QWP and the passive DOE module for additionally deflecting the image carried in CP light, the fine steerer having a steering angle range narrower than a steering angle range provided by the beam-steering apparatus so that the beam-steering apparatus increases a field of view (FOV) provided by the system in comparison to using the fine steerer alone.

16. The system of claim 15, wherein the passive DOE module is a Dammann grating.

17. The system of claim 15, wherein the fine steerer is a liquid prism or an optical phased array.

18. The system of claim 14, wherein the image generator comprises:

- 5 a light source for generating LP light; and
- a spatial light modulator (SLM) for generating and steering the image upon illuminated by the light source such that the image is carried in LP light and is changeable by programming the SLM, wherein the SLM has a steering angle range narrower than a steering angle range provided by the beam-steering apparatus so that the beam-steering apparatus increases a field of view (FOV)
- 10 provided by the system in comparison to using the SLM alone.

19. The system of claim 18, wherein the SLM is a liquid crystal on silicon (LCoS).

15 20. The system of claim 18, wherein the SLM is a digital micromirror device (DMD).

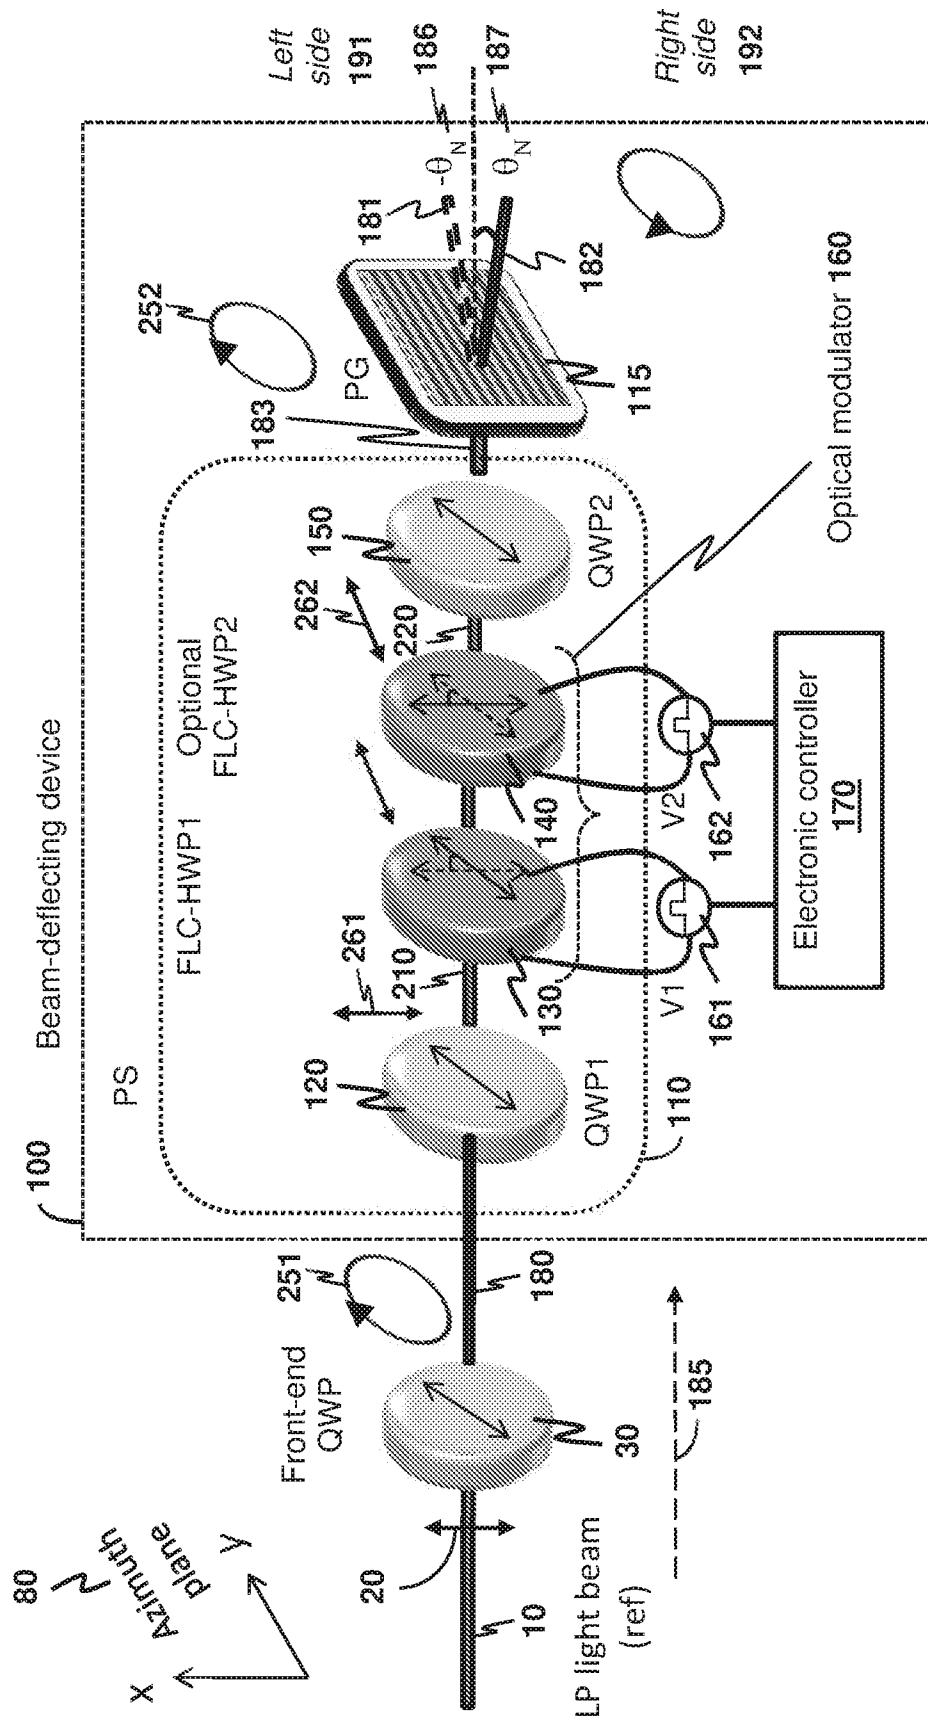


FIG. 1


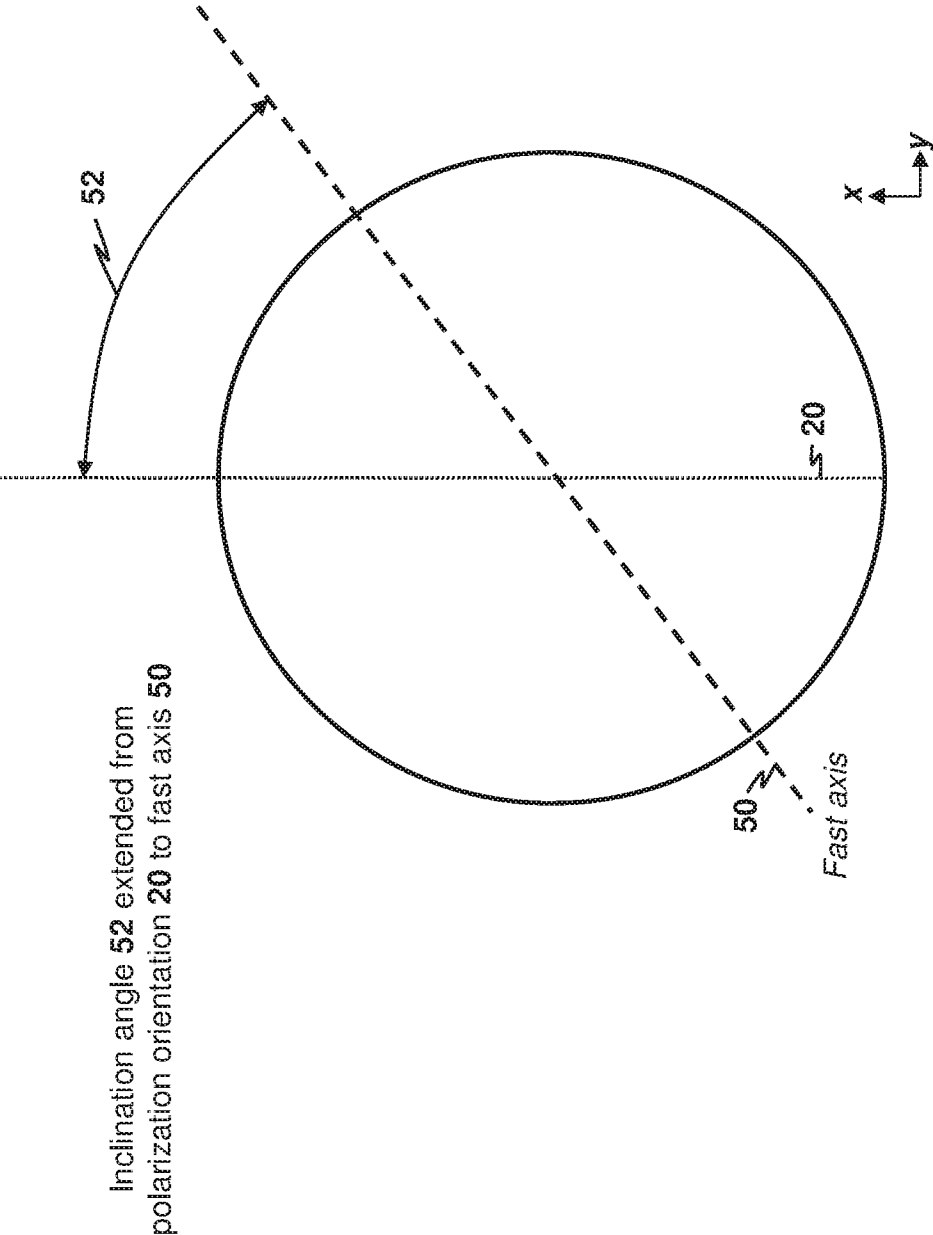


FIG. 2A

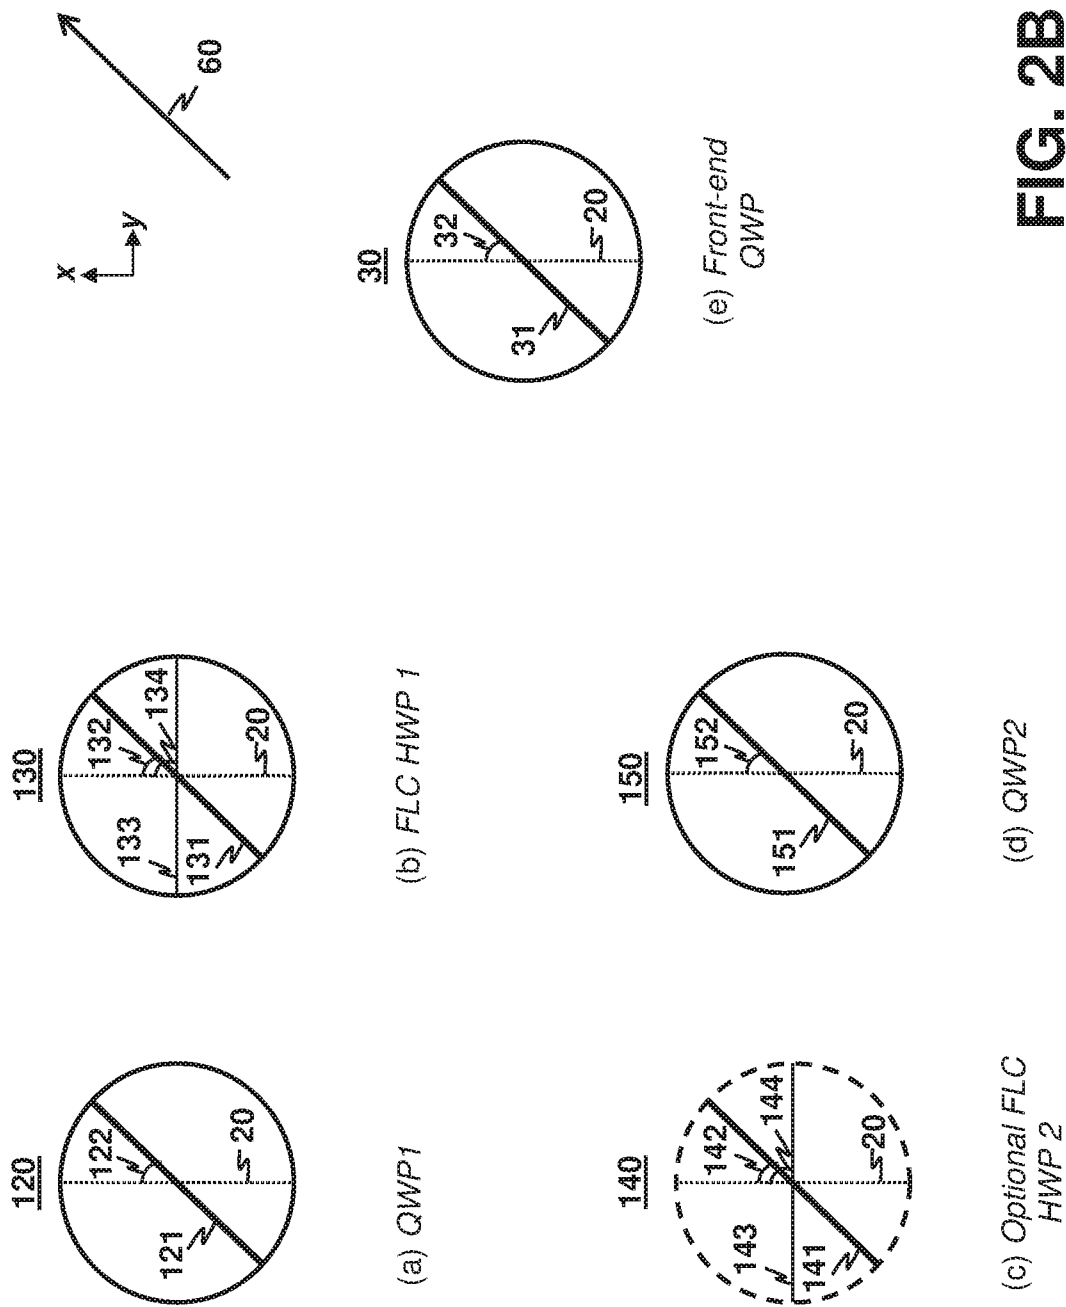

Electrical signal 161	Fast axis of 1st FLC HWP 130
-Vp	First orientation 131
+Vp	Second orientation 133

FIG. 3

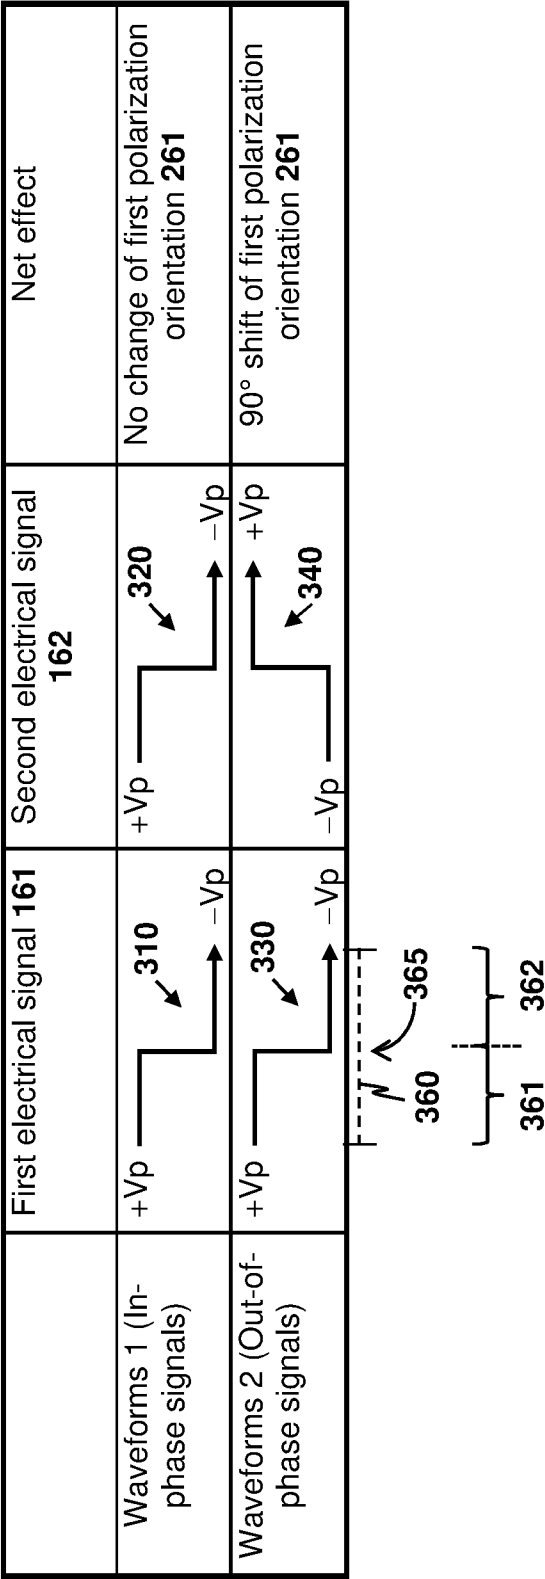


FIG. 4

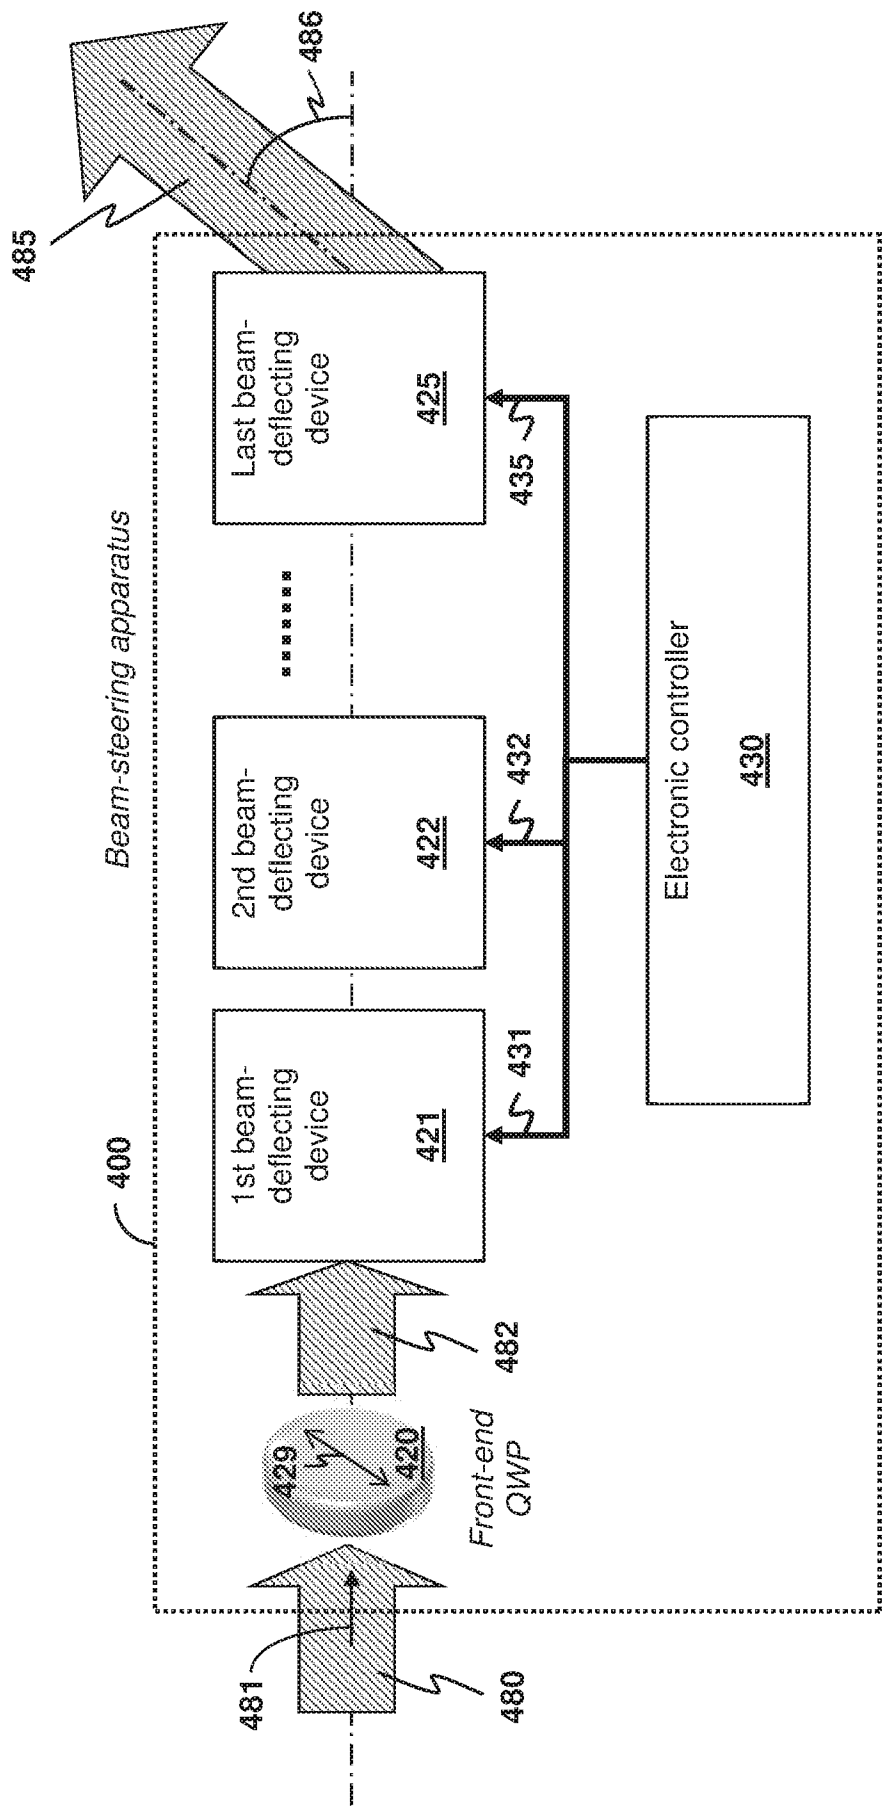


FIG. 5

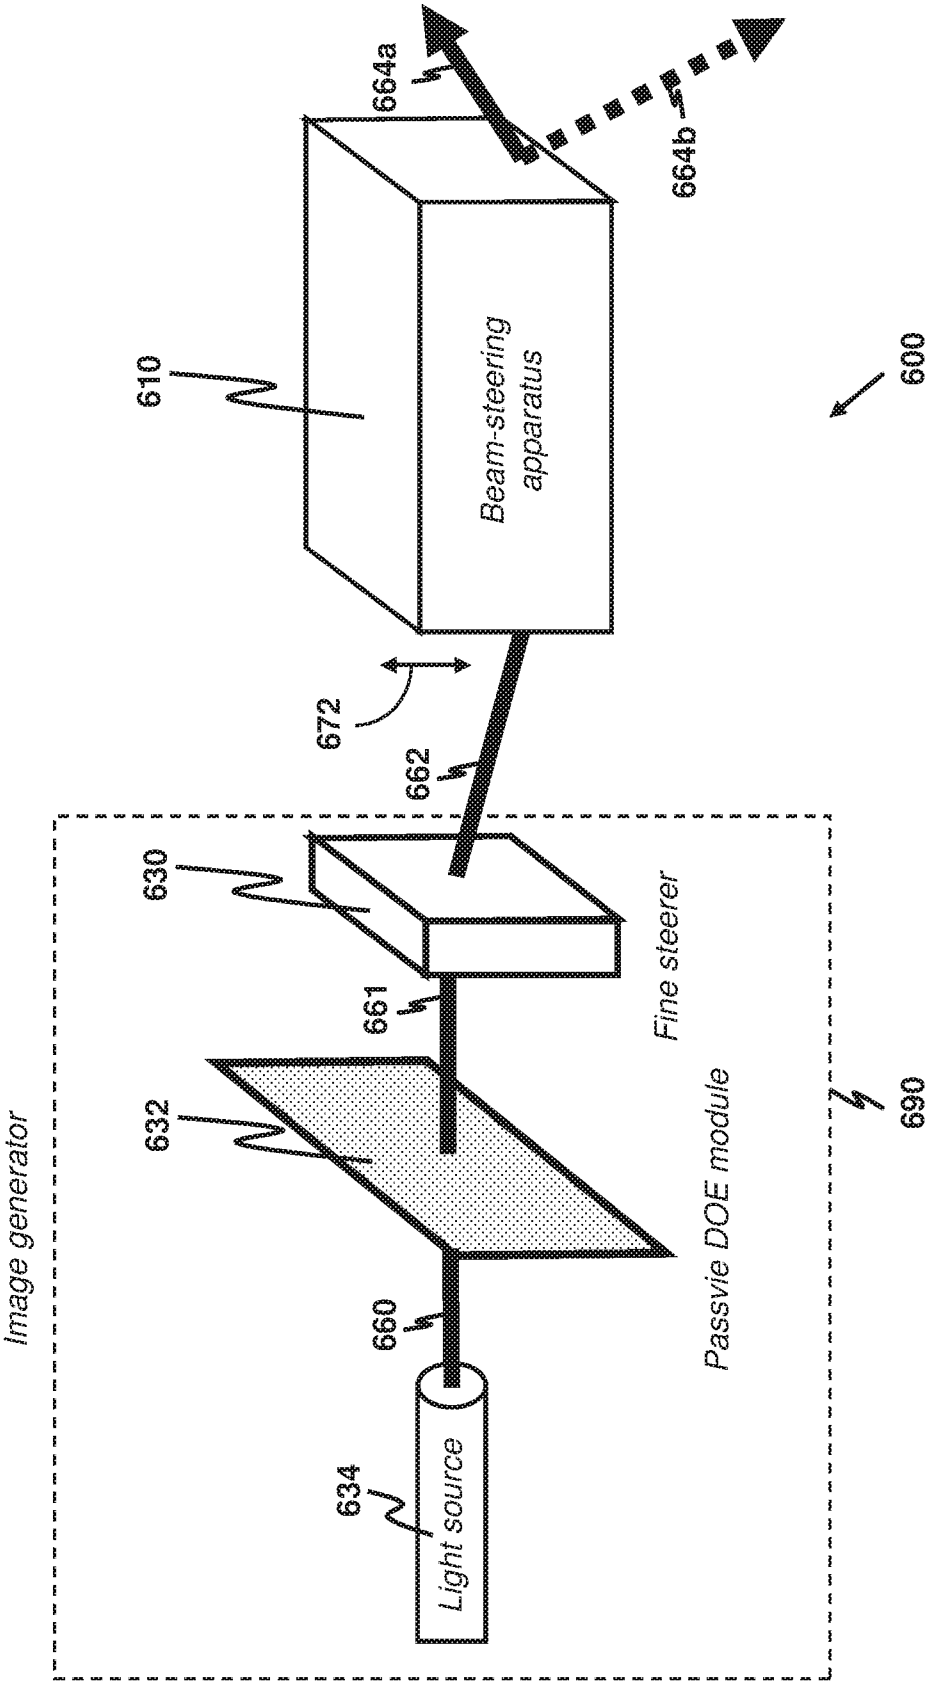


FIG. 6

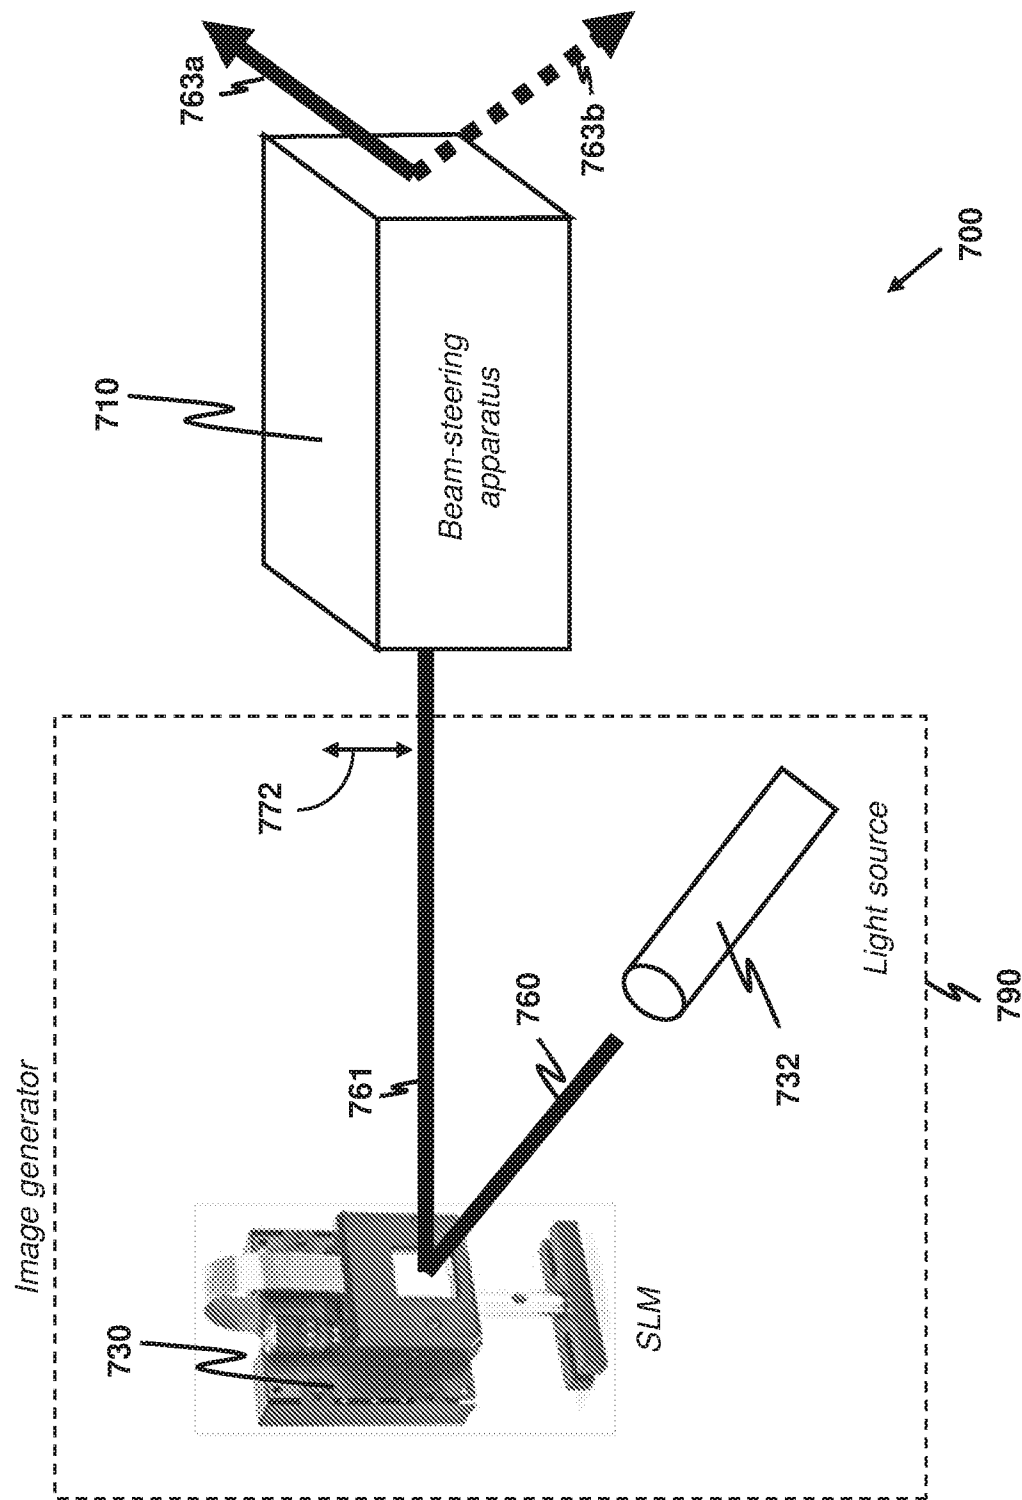


FIG. 7

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2018/077894

A. CLASSIFICATION OF SUBJECT MATTER

G02F 1/1335(2006.01)i; G02F 1/141(2006.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G02F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

CNKI,CNPAT,EPODOC,WPI:HONG KONG APPLIED SCIENCE AND TECHNOLOGY RESEARCH, polari+,deflect+, quarter 1w wave,1/4,half 1w wave, circular+,linear+, orientat+, modulator, project+, display.

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
E	CN 108401447 A (HONG KONG APPLIED SCIENCE AND TECHNOLOGY RESEARCH INSTITUTE COMPANY LIMITED) 14 August 2018 (2018-08-14) claims 1-20	1-20
A	CN 104460020 A (HUAWEI TECHNOLOGIES CO., LTD.) 25 March 2015 (2015-03-25) description paragraphs [0056]-[0118]	1-20
A	CN 1588180 A (UNIV. ZHEJIANG) 02 March 2005 (2005-03-02) the whole document	1-20
A	US 2017160352 A1 (TWINLEAF L.L.C) 08 June 2017 (2017-06-08) the whole document	1-20
A	CN 104011582 A (HEWLETT-PACKARD DEV. CO., LP) 27 August 2014 (2014-08-27) the whole document	1-20
A	KR 20040020345 A (RES. INST. IND. SCIENCE & TECH.) 09 March 2004 (2004-03-09) the whole document	1-20



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

“A” document defining the general state of the art which is not considered to be of particular relevance

“E” earlier application or patent but published on or after the international filing date

“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

“O” document referring to an oral disclosure, use, exhibition or other means

“P” document published prior to the international filing date but later than the priority date claimed

“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

“&” document member of the same patent family

Date of the actual completion of the international search

08 November 2018

Date of mailing of the international search report

28 November 2018

Name and mailing address of the ISA/CN

STATE INTELLECTUAL PROPERTY OFFICE OF THE
P.R.CHINA
6, Xitucheng Rd., Jimen Bridge, Haidian District, Beijing
100088
China

Authorized officer

CHEN, Lin

Facsimile No. (86-10)62019451

Telephone No. 86-(10)-53962360

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/CN2018/077894

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)			Publication date (day/month/year)
CN	108401447	A	14 August 2018	None			
CN	104460020	A	25 March 2015	EP	3035093	A2	22 June 2016
				US	2016154247	A1	02 June 2016
				CN	104460020	B	10 April 2018
				JP	6150146	B2	21 June 2017
				JP	2016103021	A	02 June 2016
CN	1588180	A	02 March 2005	CN	100432751	C	12 November 2008
US	2017160352	A1	08 June 2017	US	2014247045	A1	04 September 2014
				US	9575144	B2	21 February 2017
				US	9915711	B2	13 March 2018
CN	104011582	A	27 August 2014	EP	2788811	A1	15 October 2014
				WO	2013085535	A1	13 June 2013
				KR	20140082855	A	02 July 2014
				US	2015029588	A1	29 January 2015
KR	20040020345	A	09 March 2004	KR	100452301	B1	08 October 2004