



(43) International Publication Date
24 July 2014 (24.07.2014)

(51) International Patent Classification:

C23C 22/52 (2006.01) *H05K 3/06* (2006.01)
C23F 1/18 (2006.01) *H05K 3/38* (2006.01)

(21) International Application Number:

PCT/EP2013/065882

(22) International Filing Date:

29 July 2013 (29.07.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

13151243.6 15 January 2013 (15.01.2013) EP

(71) Applicant: **ATOTECH DEUTSCHLAND GMBH**
[DE/DE]; Erasmustraße 20, 10553 Berlin (DE).

(72) Inventors: **LÜTZOW, Norbert**; Kadettenweg 82a, 12205
Berlin (DE). **SCHMIDT, Gabriela**; Schulze-Boysen-
Straße 19, 10365 Berlin (DE). **TEWS, Dirk**; Stühlinger
Strasse 8, 10318 Berlin (DE).

(74) Agent: **WONNEMANN, Jörg**; Atotech Deutschland
GmbH, Erasmustraße 20, 10553 Berlin (DE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: AQUEOUS COMPOSITION FOR ETCHING OF COPPER AND COPPER ALLOYS

Figure 3

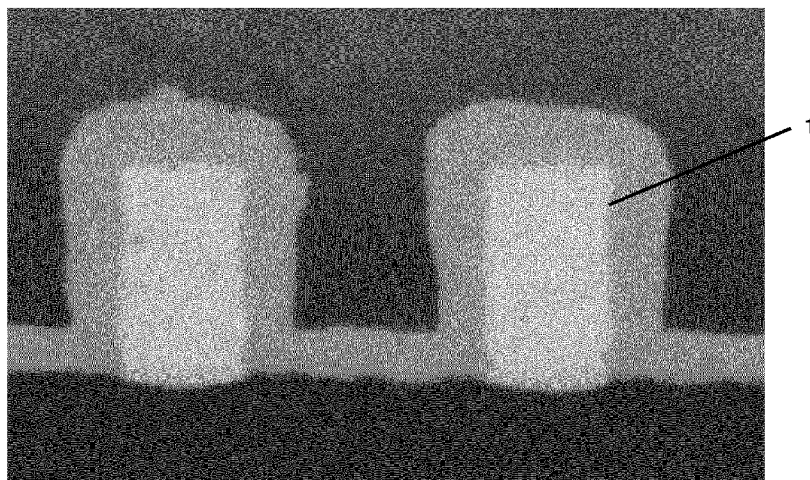

(57) Abstract: The present invention relates to an aqueous composition for and a process for etching copper and copper alloys applying said aqueous composition. The aqueous composition comprises a source for Fe³⁺ ions, at least one acid, at least one triazole or tetrazole derivative, and at least one etching additive selected from N-alkylated iminodipropionic acid, salts thereof, modified polyglycol ethers and quaternary ureylene polymers. The aqueous composition is particularly useful for making of fine structures in the manufacture of printed circuit boards, IC substrates and the like.

Aqueous composition for etching of copper and copper alloys

Field of the Invention

The invention relates to aqueous compositions for etching of copper and copper alloys and a process for etching of copper and copper alloys in the manufacture of printed circuit boards, IC substrates, copperised semiconductor wafers and the like.

Background of the Invention

Circuit formation by etching of copper or copper alloy layers is a standard manufacturing step in production of printed circuit boards, IC substrates and related devices.

A negative pattern of the circuit is formed by a) applying an etch resist, e.g., a polymeric dry film resist or a metal resist on a layer of copper, b) etching away those portions of copper not covered by the etch resist and c) remove the etch resist from the remaining copper circuit.

Etching solutions applied for this task are selected from different types of compositions such as mixtures of an oxidizing agent and an acid. Two main types of etching solutions are based on an acid such as sulphuric acid or hydrochloric acid and contain as the oxidizing agent either hydrogen peroxide or Fe^{3+} ions added as FeCl_3 . Such etching solutions are disclosed in C. F. Coombs, Jr., "Printed Circuits Handbook", 5th Ed. 2001, Chapter 33.4.3, pages 33.14 to 33.15 and Chapter 33.4.5, pages 33.17.

The ongoing miniaturization of circuits in terms of line width / interline-space values and thickness of the copper layers to be etched does not allow to using conventional etching solutions such as the ones described above.

The disadvantage of known etching solutions is even more present if the copper tracks are manufactured by a semi additive process (SAP). Here the bare dielectric substrate is first coated with a seed layer serving as an electrically conductive layer. The seed layer comprises for example copper deposited by electroless plating. Next, a patterned resist layer is formed on the seed layer and a thicker, second copper layer is deposited by electroplating into the openings of the patterned resist layer onto the seed layer. The patterned resist layer is stripped and the seed layer in between copper tracks deposited by electroplating needs to be removed by a differential etch step. The seed layer deposited by electroless plating has a finer grain structure than the second copper layer deposited by electroplating. The different grain structures can lead to a different etching behaviour of the individual copper layers.

A similar situation is present when copper tracks are manufactured by a modified semiadditive process (m-SAP) wherein a thick, second copper layer is deposited in the openings of the patterned resist layer onto a first thin layer of copper. The first copper layer is manufactured, e.g. by thinning a copper clad attached to the dielectric substrate. Again, both first and second copper layer have a different grain structure.

The etching solution applied for the differential etching step should only remove the first copper layer in between the copper tracks while not attacking the side-walls and the top of the copper tracks deposited by electroplating and the underlying first copper layer or copper seed layer.

Etching solutions based on sulfuric acid and hydrogen peroxide lead to an undesired undercutting of the first copper layer during etching (Fig. 1) which results in an insufficient adhesion of the copper layer on the dielectric substrate.

Etching solutions based on sulfuric acid and Fe^{3+} ions typically show an etching behaviour as shown in Fig. 2. The broader base of the etched copper line can lead to circuit shorts which are not acceptable.

Objective of the present Invention

Therefore, it is the first objective of the present invention to provide an aqueous composition for etching of copper and copper alloys which results in the formation of rectangular shaped copper features after etching.

It is a second objective of the present invention to remove Cu^{2+} ions from said aqueous composition.

Summary of the Invention

The first objective is solved by an aqueous composition for etching of copper and copper alloys, the composition comprising Fe^{3+} ions, at least one acid, at least one triazole or tetrazole derivative, and at least one etching additive selected from the group consisting of N-alkylated iminodipropionic acid and salts thereof, modified polyglycol ethers and quaternary ureylene polymers.

A rectangular line shape of etched copper or copper alloy structures is achieved when applying the aqueous composition of the present invention. Thereby, the risk of circuit shorts between individual copper or copper alloy structures is minimized. Furthermore, a sufficient adhesion between the etched copper or copper alloy structure and the underlying dielectric substrate is achieved.

The second objective of the present invention is solved by a process for etching copper and copper alloys comprising, in this order, the steps of

- a. providing a substrate having a copper or copper alloy surface,
- b. contacting said substrate with the aqueous composition according to the present invention in a first tank

wherein during contacting copper is oxidized to Cu^{2+} ions and the Cu^{2+} ions are disclosed in the aqueous composition according to the present invention,

- c. transferring a portion of the aqueous composition according to the present invention after contacting with the substrate to a second tank wherein said second tank comprises an anode and a cathode and
- d. reducing said Cu^{2+} ions to copper by applying a current between said anode and said cathode.

Brief Description of the Figures

Figure 1 shows two copper tracks obtained by etching with an aqueous composition consisting of sulfuric acid and hydrogen peroxide (comparative example).

Figure 2 shows a copper track obtained by etching with an aqueous composition consisting of sulfuric acid and Fe^{3+} ions (comparative example).

Figure 3 shows two copper tracks obtained by etching with an aqueous composition comprising a N-alkylated iminodipropionic acid.

Figure 4 shows two copper tracks obtained by etching with an aqueous composition comprising a modified polyglycol ether.


Figure 5 shows two copper tracks obtained by etching with an aqueous composition comprising a quaternary ammonium polymer.

Detailed Description of the Invention

A layer of copper or a copper alloy is etched with an aqueous composition for etching of copper and copper alloys, the composition comprising Fe^{3+} ions, at least one acid, at least one azole derivative, and at least one etching additive selected from the group consisting of N-alkylated iminodipropionic acid, salts thereof, modified polyglycol ethers and quaternary ureylene polymers.

Most preferably, the at least one etching additive is selected from compounds according to formula (I).

The N-alkylated iminodipropionic acid or salt thereof is selected from compounds according to formula (I):

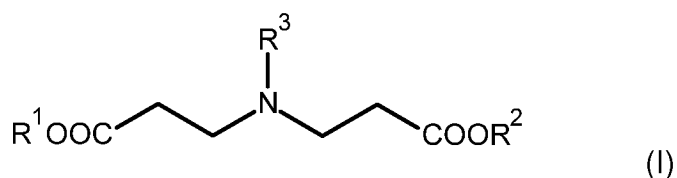

wherein R^1 and R^2 are independently selected from the group consisting of H, Li^+ , Na^+ , K^+ , and NH_4^+ and R^3 is preferably selected from the group consisting of unsubstituted linear C_1 to C_{12} alkyl, branched and unbranched, and unsubstituted cyclic C_5 to C_8 alkyl.


More preferably, R^3 is selected from the group consisting of unsubstituted linear C_3 to C_8 alkyl, branched and unbranched.

Most preferably, R^3 is selected from the group consisting of n-pentyl, n-hexyl, n-heptyl, n-octyl, branched pentyl, branched hexyl, branched heptyl and branched octyl.

The term “unsubstituted” is defined herein as containing no residue such as hydroxyl, carboxyl, carbonyl, amino etc.


The term “branched” is defined herein as having one or more side group(s) which is (are) an unsubstituted alkyl residue.

Modified polyglycol ethers are preferably selected from the group consisting of compounds according to formula (II):

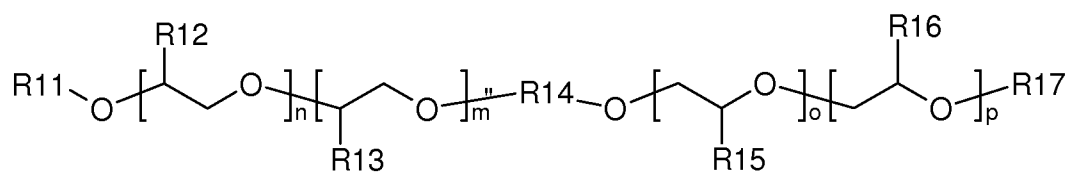

(II)

wherein R^{11} and R^{17} can be equal or different and are selected independently from the group consisting of H or a suitable counter ion like sodium or potassium, C_1 - C_{20} -alkyl, substituted or unsubstituted, linear or branched, C_1 - C_6 -alkaryl, linear or branched, allyl, aryl, sulfate, phosphate, halide and sulfonate and wherein each of the multiple R^{12} , R^{13} , R^{15} and R^{16} groups may be the same or different and are selected independently from the group consisting of H or C_1 - C_6 -alkyl, linear or branched, substituted or unsubstituted and wherein R^{14} is selected from the group consisting of C_1 - C_{12} -alkylene, linear or branched, substituted or unsubstituted, aryl 1,2-, 1,3- or 1,4-substituted, naphthyl, 1,3-, 1,4- 1,5- 1,6- or 1,8-substituted, higher annulated aryl, cycloalkyl and $-O-(CH_2(CH_2)_nOR^{11})$, wherein R^{11} has the meaning defined above and R^{14} is selected from the group represented by formula (III)

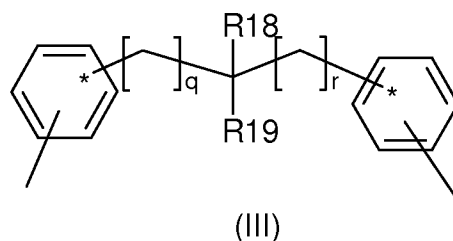

wherein the substitution independently is 1,2-, 1,3- or 1,4 for each ring and wherein q and r are equal or different and 0 to 10 and R^{18} and R^{19} are selected independently from the group consisting of H or C_1 - C_6 -alkyl, linear or branched and wherein m , n , o and p are integral numbers ranging from 0 to 200 and can be equal or different and $m+n+o+p$ is at least 2. Preferably $m+n+o+p$ ranges from 4 to 100, more preferably from 10 to 50.


Substituted alkyl, alkaryl and aryl groups described herein are hydrocarbyl moieties which are substituted with at least one atom other than carbon, including moieties in which a carbon chain atom is substituted with a hetero atom such as nitrogen, oxygen, silicon, phosphorous, boron, sulfur, or a halogen atom. The hydrocarbyl moieties may be substituted with one or more of the following substituents: halogen, heterocyclo, alkoxy, alkenoxy, alkynoxy, aryloxy, hydroxy,

protected hydroxy, hydroxycarbonyl, keto, acyl, acyloxy, nitro, amino, amido, nitro, phosphono, cyano, thiol, ketals, acetals, esters and ethers.

Preferred are aqueous solutions, wherein R^{11} and R^{17} of the modified polyglycol ethers according to formula (II) are selected independently from the group consisting of H, methyl, sodium, potassium, halide, sulfate, phosphate and sulfonate.


Preferred are aqueous solutions, wherein R^{12} , R^{13} , R^{15} and R^{16} of modified polyglycol ethers according to formula (II) are selected independently from the group consisting of H, methyl, ethyl, n-propyl and isopropyl.

Preferred are aqueous solutions wherein R^{14} of the modified polyglycol ethers according to formula (II) is selected from the group represented by formulae (IV) and (V)



(IV)


and

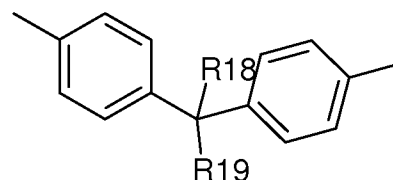

(V)


and wherein R^{18} and R^{19} are selected from the group consisting of H, methyl, ethyl, n-propyl and isopropyl.

Modified polyglycol ethers according to formula (II) having the following formulae are particularly preferred.

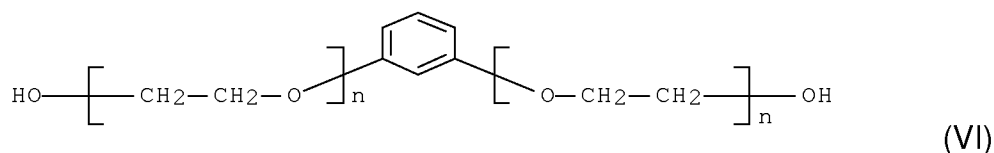


(VI)

and wherein $n = 1 - 20$, preferably $3 - 8$.

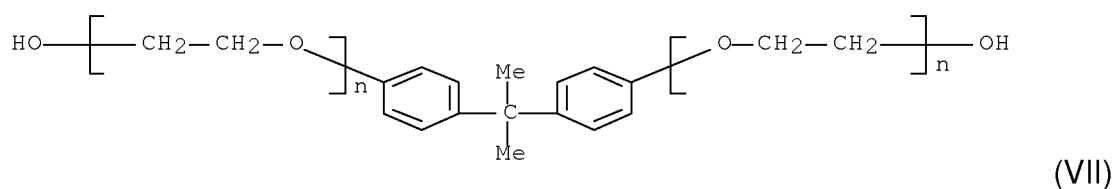


and wherein $n = 1 - 20$, preferably $2 - 10$.

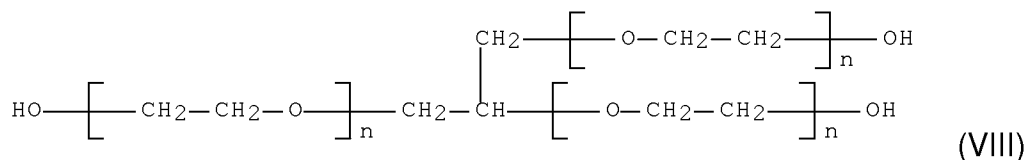


and wherein $n = 1 - 20$, preferably $2 - 7$.


The quaternary ureylene polymer is preferably selected from polymers having the formulae (IX) and (X):




and




wherein n is an integer and preferably ranges from 1 to 40, more preferably from 3 to 30 and most preferably from 5 to 20. Monomer A is derived from a diamino compound represented by compounds according to formulae (XI) to (XIII):

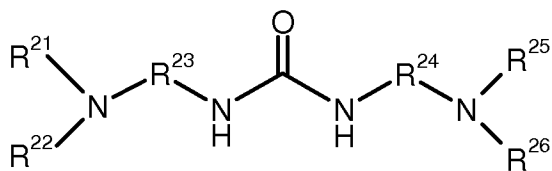

(XI)

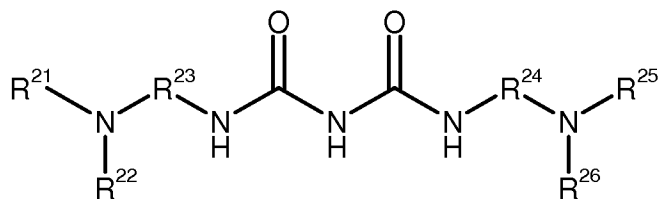

(XII)

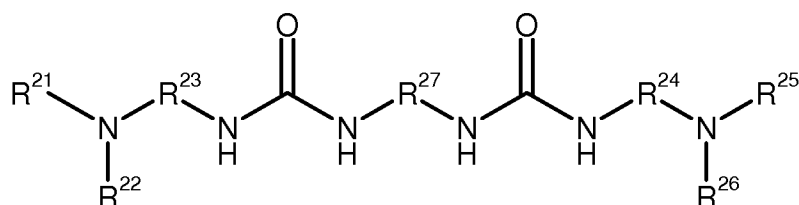

(XIII)

wherein R^{21} , R^{22} , R^{25} , and R^{26} are independently selected from the group consisting of a substituted or unsubstituted hydrocarbon residue with 1 to 10 carbon atoms, preferably methyl, ethyl, hydroxyethyl or $-\text{CH}_2\text{CH}_2(\text{OCH}_2\text{CH}_2)_y-\text{OH}$, wherein y is between 0 and 4, and

R^{23} , R^{24} and R^{27} are independently selected from the group consisting of $(\text{CH}_2)_p$, wherein p stands for an integer of 2 to 12, preferably for an ethylene or propylene group, or for a $-\text{[CH}_2\text{CH}_2\text{O]}_m-\text{CH}_2\text{CH}_2-$ group, wherein m is between 1 and 40, preferably for a $-(\text{CH}_2)_2-\text{O}-(\text{CH}_2)_2-$ or $-(\text{CH}_2)_2-\text{O}-(\text{CH}_2)_2-\text{O}-(\text{CH}_2)_2-$ group.

Preferably, monomer A is selected from compounds according to formula (XI).

Monomer L in the at least one ureylene polymer according to formulae (IX) and (X) stands for a divalent residue, which is selected from the group consisting of

$-(\text{CH}_2)_p-$, wherein p is an integer preferably between 1 and 12, more preferably between 1 and 6, and most preferably between 2 and 4,

$-\text{CH}_2-\text{CH}(\text{OH})-\text{CH}_2-$, $-\text{[CH}_2\text{O]}_q-\text{CH}_2\text{CH}_2-$ and $-\text{[CH}_2\text{CH}_2\text{O]}_q-\text{CH}_2\text{CH}_2-$, wherein q is an integer between 1 and 40, preferably $-(\text{CH}_2)-\text{O}-(\text{CH}_2)_2-$, $-(\text{CH}_2)_2-\text{O}-(\text{CH}_2)_2-$ or $-(\text{CH}_2)_2-\text{O}-(\text{CH}_2)_2-\text{O}-(\text{CH}_2)_2-$,

and $-\text{CH}_2-\text{CH}(\text{OH})-\text{CH}_2-$.

The concentration of the at least one etching additive in the aqueous composition preferably ranges from 0.1 to 1.0 g/l, more preferably from 0.25 to 0.75 g/l.

The aqueous composition further comprises at least one triazole or tetrazole derivative preferably selected from the group comprising 5-amino-1H-tetrazole, 5-phenyl-1H-tetrazole, 1-phenyl-1H-tetrazol-5-thiol, 1-[2-(Dimethylamino)-ethyl]-1H-tetrazole-5-thiol, 1-H-benzotriazole, 1H-tolyltriazole and 5-carboxy-1H-benzotriazole.

Most preferably, the at least one triazole or tetrazole derivative is benzotriazole.

The concentration of the at least one triazole derivative ranges from 1 to 100 mg/l, more preferably from 5 to 50 mg/l and most preferably from 10 to 25 mg/l.

The at least one triazole derivative present in the aqueous composition according to the present invention serves as a complexing agent for copper ions which are formed during etching.

The source for Fe^{3+} ions is preferably selected from water soluble salts of Fe^{3+} ions. The most preferred source of Fe^{3+} ions is $\text{Fe}_2(\text{SO}_4)_3$.

The concentration of Fe^{3+} ions preferably ranges from 1 to 100 g/l, more preferably from 1 to 50 g/l and most preferably from 5 to 40 g/l.

The at least one acid is selected from the group comprising mineral acids such as sulfuric acid, and organic acids such as methanesulfonic acid. The most preferred acids are sulfuric acid and methanesulfonic acid.

The concentration of the acid (or all acids together in case more than one acid is added) ranges from 10 to 400 g/l, more preferably from 30 to 300 g/l and most preferably from 50 to 200 g/l.

The aqueous composition according to the present invention may further comprises chloride ions, preferably in a concentration in the range of 5 to 500 mg/l,

more preferably in the range of 10 to 200 mg/l and most preferably in the range of 20 to 100 mg/l. The source of chloride ions is preferably a compound selected from the group comprising LiCl, NaCl, KCl, and NH_4Cl .

In order to provide chloride ions in the desired concentration range and at the same time preferably providing a pH of the aqueous composition of < 4 , more preferably < 2 . Hydrochloric acid is not preferred as a source of chloride ions.

Optionally, the aqueous composition further contains one or more of Fe^{2+} ions, surfactants, organic sulfur compounds such as thiourea and sulfosalicylic acid and polyalkylene compounds such as polyethylene glycol, polypropylene glycol, copolymers of polyethylene glycol and polypropylene glycol and derivatives thereof of which all may improve the etching behaviour of the aqueous composition according to the present invention.

The substrates are preferably treated by spraying the aqueous composition according to the invention onto the substrates. The aqueous composition can be sprayed in a vertical mode or horizontal mode, depending on the equipment desired. Alternatively, the substrates can be immersed into the aqueous composition by dipping.

The temperature of the aqueous composition according to the present invention during use preferably ranges from 10 to 60 °C, more preferably from 20 to 50 °C and most preferably from 30 to 45 °C. The contact time depends on the copper thickness to be etched and is in the range from 10 to 360 s, more preferably from 20 to 200 s and most preferably from 30 to 90 s.

During use the aqueous composition is enriched in Cu^{2+} ions (they are disposed in the aqueous composition according to the present invention). At the same time Fe^{3+} ions are reduced to Fe^{2+} ions. Cu^{2+} ions have a negative impact on the performance of the aqueous composition. Cu^{2+} ions increase the density and viscosity of the etching solution and thereby negatively effect the etching behaviour. The etch rate and side wall etching performance may decrease. Furthermore, precipitation of Cu^{2+} ion complexes can occur. Such precipitates pose

a mechanical danger to the equipment and the surfaces coming into contact with the aqueous etching composition.

In processes according to prior art some or all of the added Cu^{2+} ions are removed by bleeding (removing) an adequate amount of etching solution and adding (feeding) fresh etching solution to the remaining solution.

One particular method to remove Cu^{2+} ions from an aqueous solution is to electrolytically reduce Cu^{2+} ions to metallic copper.

In principle, a second tank equipped with an anode and a cathode and a rectifier is required for electrolysis.

Portions of the aqueous composition according to the present invention are transferred from a first tank where or from which the etching of copper or a copper alloy layer is performed to a second tank equipped for electrolysis. During electrolysis Cu^{2+} ions are cathodically reduced to metallic copper and at the same time Fe^{2+} ions are oxidised anodically to Fe^{3+} ions.

The metallic copper can be collected and recycled. Without an electrolytic regeneration cell the oxidizing agent (Fe^{3+} ions) would need to be continuously added to the etching solution. By application of the above described regeneration the spent Fe^{3+} ions are regenerated at the anodes (Fe^{2+} is oxidised to Fe^{3+}) and thereby no adding (feeding) of the oxidising agent during use of the etching solution is required.

A method and an apparatus useful for this process are disclosed in US 2006/0175204 A1. This method involves feeding of the etching solution into an electrolysis cell being hermetically sealed or having an anode hood, the electrolysis cell comprising a cathode, an inert anode, means for removing the electrolytically deposited copper from the cathode and means for collecting the removed copper and applying a potential to the removed copper, wherein the electrolysis cell does not have an ion exchange membrane or a diaphragm.

Examples

The invention will now be illustrated by reference to the following non-limiting examples.

A substrate containing a dielectric layer, a seed layer obtained by electroless plating of copper and a patterned second layer of copper obtained by electroplating was used throughout all examples.

The seed layer not covered by the patterned second layer of copper was etched away by spraying different aqueous compositions onto the substrates with an adjusted copper etch rate of 2 $\mu\text{m}/\text{min}$. The contact time was adjusted to provide the required copper removal. The samples were rinsed with water and the dry film resist was stripped.

The obtained line shapes of the etched copper tracks were investigated from cross-sections by optical microscope after depositing a nickel layer onto the copper tracks which serves as a protection layer during preparation of the cross-sections.

Example 1 (comparative)

An aqueous composition consisting of 20 g/l H_2O_2 and 90 g/l sulfuric acid was applied as etching solution.

The resulting line shape of copper tracks (track width: 8 μm , track height: 10 μm) is shown in Fig. 1. The copper tracks **1** show a severe undercutting **2** of the track base (i.e. the seed layer obtained by electroless plating of copper). Hence, the copper track has not the required rectangular shape and no sufficient adhesion to the underlying dielectric substrate.

Example 2 (comparative)

An aqueous composition consisting of 5 g/l $\text{Fe}_2(\text{SO}_4)_3$ and 90 g/l sulfuric acid was applied as etching solution.

The resulting line shape of the copper tracks (track width: 20 μm , track height: 10 μm) is shown in Fig. 2. The copper track **1** shows a strong trapezoidal shape indicated by the dotted lines **3**. Hence, the copper track does not provide the desired rectangular shape and poses the danger of circuit shorts or cross-talk between individual tracks.

Example 3

An aqueous composition consisting of 15 g/l $\text{Fe}_2(\text{SO}_4)_3$, 90 g/l sulfuric acid, 15 mg/l benzotriazole, and 0.7 g/l of an etching additive according to formula (I) wherein R^1 is H, R^2 is Na^+ and R^3 is 2-ethyl-hexyl was applied as etching solution.

The resulting line shape of the copper tracks (track width: 8 μm , track height: 10 μm) is shown in Fig. 3. The copper tracks **1** have the desired rectangular line shape, have a sufficient adhesion to the underlying dielectric substrate and pose no risk for circuit shorts or cross-talk between individual tracks.

Example 4

An aqueous composition consisting of 15 g/l $\text{Fe}_2(\text{SO}_4)_3$, 90 g/l sulfuric acid, 15 mg/l benzotriazole, and 200 mg/l of an etching additive according to formula (VII) (CAS No.: 29086-67-7) was applied as etching solution.

The resulting line shape of the copper tracks (track width: 20 μm , track height: 10 μm) is shown in Fig. 4. The copper tracks **1** have the desired rectangular line shape, have a sufficient adhesion to the underlying dielectric substrate and pose no risk for circuit shorts or cross-talk between individual tracks.

Example 5


An aqueous composition consisting of 15 g/l $\text{Fe}_2(\text{SO}_4)_3$, 90 g/l sulfuric acid, 16 mg/l benzotriazole, and 20 mg/l of an etching additive according to formula (IX) wherein A is selected from a monomer according to formula (XI) wherein

R^{21} , R^{22} , R^{25} and R^{26} are methyl and R^{22} and R^{24} are $-(CH_2)_3-$, and L is a $-(CH_2)_2-O-(CH_2)_2-$ residue was applied as etching solution.

The resulting line shape of the copper tracks (track width: 20 μm , track height: 10 μm) is shown in Fig. 5. The copper tracks **1** have the desired rectangular line shape, have a sufficient adhesion to the underlying dielectric substrate and pose no risk for circuit shorts or cross-talk between individual tracks.

CLAIMS


1. An aqueous composition for etching of copper and copper alloys comprising a source for Fe^{3+} ions, at least one acid, at least one triazole or tetrazole derivative, and at least one etching additive selected from the group consisting of N-alkylated iminodipropionic acid, salts thereof, modified polyglycol ethers and quaternary ureylene polymers.
2. The aqueous composition for etching of copper and copper alloys according to claim 1 wherein the N-alkylated iminodipropionic acid or salts thereof is selected from compounds according to formula (I)

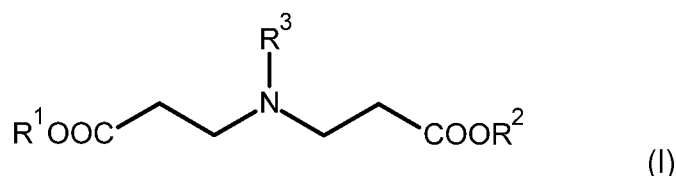


wherein R^1 and R^2 are independently selected from the group consisting of H, Li^+ , Na^+ , K^+ and NH_4^+ , and R^3 is selected from the group consisting of unsubstituted linear C_1 to C_{12} alkyl, branched and unbranched, and unsubstituted cyclic C_5 to C_8 alkyl.

3. The aqueous composition for etching of copper and copper alloys according to claim 2 wherein R^3 in formula (I) is selected from linear C_3 - to C_8 - alkyl, branched and unbranched.
4. The aqueous composition for etching of copper and copper alloys according to claims 2 and 3 wherein R^3 in formula (I) is selected from the group consisting of propyl, butyl, pentyl, hexyl, branched propyl, branched butyl, branched pentyl and branched hexyl.

5. The aqueous composition for etching copper and copper alloys according to claim 1 wherein the modified polyglycol ether is selected from the group consisting of compounds according to formula (II):

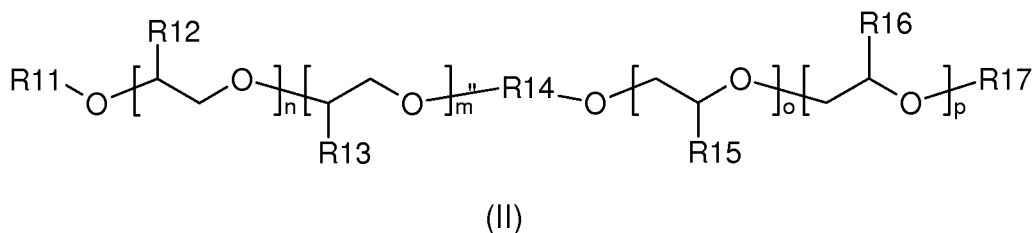


wherein R^{11} and R^{17} can be equal or different and are selected independently from the group consisting of H or a suitable counter ion like sodium or potassium, C_1 - C_{20} -alkyl, substituted or unsubstituted, linear or branched, C_1 - C_6 -alkaryl, linear or branched, allyl, aryl, sulfate, phosphate, halide and sulfonate and wherein each of the multiple R^{12} , R^{13} , R^{15} and R^{16} groups may be the same or different and are selected independently from the group consisting of H or C_1 - C_6 -alkyl, linear or branched, substituted or unsubstituted and wherein R^{14} is selected from the group consisting of C_1 - C_{12} -alkylene, linear or branched, substituted or unsubstituted, aryl 1,2-, 1,3- or 1,4-substituted, naphthyl, 1,3-, 1,4- 1,5- 1,6- or 1,8-substituted, higher annulated aryl, cycloalkyl and $-O-(CH_2(CH_2)_nOR^{11})$, wherein R^{11} has the meaning defined above and R^{14} is selected from the group represented by formula (III)

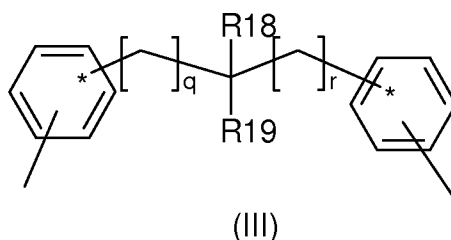


wherein the substitution independently is 1,2-, 1,3- or 1,4 for each ring and wherein q and r are equal or different and 0 to 10 and R^{18} and R^{19} are selected independently from the group consisting of H or C_1 - C_6 -alkyl, linear or branched and wherein m, n, o and p are integral numbers ranging from 0 to 200 and can be equal or different and $m+n+o+p$ is at least 2.




6. The aqueous composition for etching of copper and copper alloys according to claim 1 wherein the quaternary ureylene polymer is selected from polymers according to formulae (IX) and (X)



and



wherein n is an integer and preferably ranges from 1 to 40, more preferably from 3 to 30 and most preferably from 5 to 20, and wherein monomer A is derived from a diamino compound represented by compounds according to formulae (XI) to (XIII):

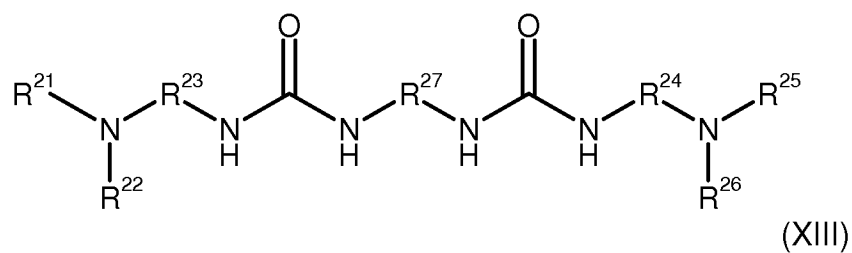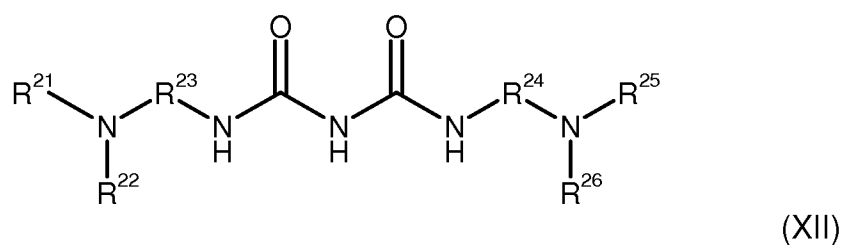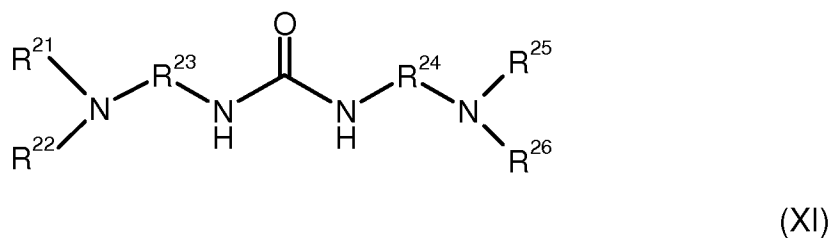

wherein R^{21} , R^{22} , R^{25} , and R^{26} are independently selected from the group consisting of a substituted or unsubstituted hydrocarbon residue with 1 to 10 carbon atoms and

R^{23} , R^{24} and R^{27} are independently selected from the group comprising $(CH_2)_p$, wherein p stands for an integer of 2 to 12, or for a $-[CH_2CH_2O]_m-CH_2CH_2-$ group, wherein m is between 1 and 40, preferably for a $-(CH_2)_2-O-(CH_2)_2-$ or $-(CH_2)_2-O-(CH_2)_2-O-(CH_2)_2-$ group,

wherein monomer L is selected from the group consisting of

$-(CH_2)_p-$, wherein p is an integer between 1 and 12, $-CH_2-CH(OH)-CH_2-$, $-[CH_2O]_q-CH_2CH_2-$ and $-[CH_2CH_2O]_q-CH_2CH_2-$, wherein q is an integer between 1 and 40.

7. The aqueous composition for etching of copper and copper alloys according to any of the foregoing claims wherein the concentration of the at least one etching additive ranges from 0.1 to 1.0 g/l.
8. The aqueous composition for etching of copper and copper alloys according to any of the foregoing claims wherein the at least one triazole or tetrazole derivative is selected from the group comprising 5-amino-1H-tetrazole, 5-phenyl-1H-tetrazole, 1-phenyl-1H-tetrazol-5-thiol, 1-[2-(dimethylamino)-ethyl]-1H-tetrazole-5-thiol, 1-H-benzotriazole, 1H-tolyltriazole and 5-carboxy-1H-benzotriazole.
9. The aqueous composition for etching of copper and copper alloys according to any of the foregoing claims wherein the concentration of the at least one triazole or tetrazole derivative ranges from 1 to 100 mg/l.
10. The aqueous composition for etching of copper and copper alloys according to any of the foregoing claims wherein the source for Fe^{3+} ions is $Fe_2(SO_4)_3$.

11. The aqueous composition for etching of copper and copper alloys according to any of the foregoing claims wherein the concentration of Fe^{3+} ions ranges from 1 to 100 g/l.
12. The aqueous composition for etching of copper and copper alloys according to any of the foregoing claims wherein the at least one acid is selected from the group comprising sulfuric acid and methanesulfonic acid.
13. The aqueous composition for etching of copper and copper alloys according to any of the foregoing claims wherein the concentration of the at least one acid ranges from 10 to 400 g/l.
14. A process for etching copper or copper alloys comprising, in this order, the steps of
 - a. providing a substrate having a copper or copper alloy surface,
 - b. contacting said substrate with the aqueous composition according to any of claims 1 to 13 in a first tank,


wherein during contacting copper is oxidized to Cu^{2+} ions and the Cu^{2+} ions are disclosed in said aqueous composition,
 - c. transferring a portion of said aqueous composition after contacting with the substrate to a second tank

wherein said second tank comprises an anode and a cathode and
 - d. reducing said Cu^{2+} ions to copper by applying a current between said anode and said cathode.

1/5


FIGURES

Figure 1

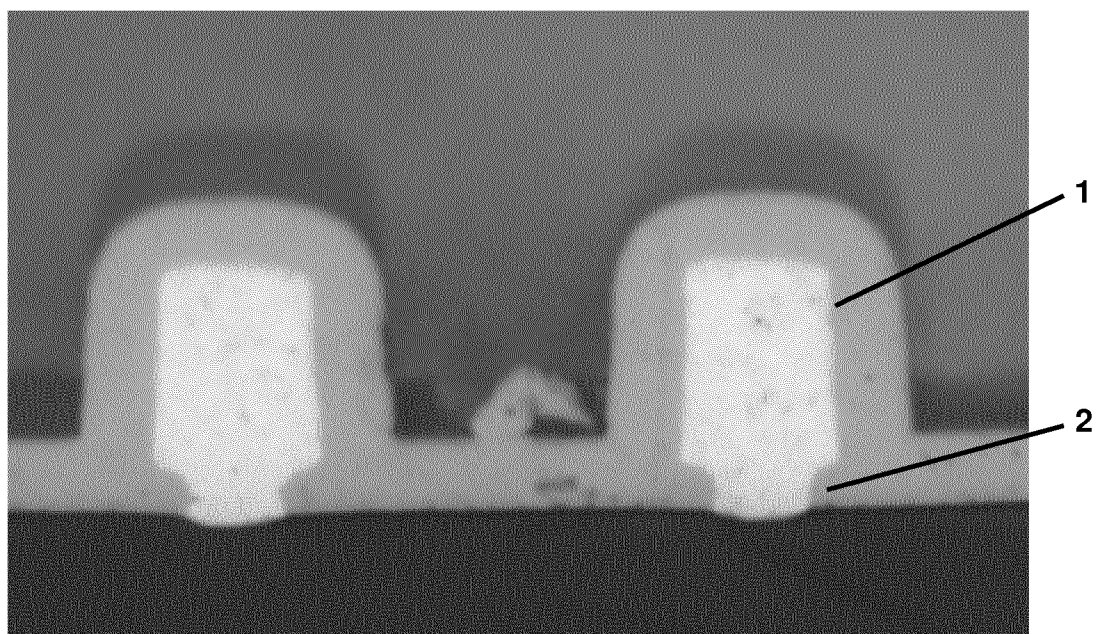


2/5

Figure 2

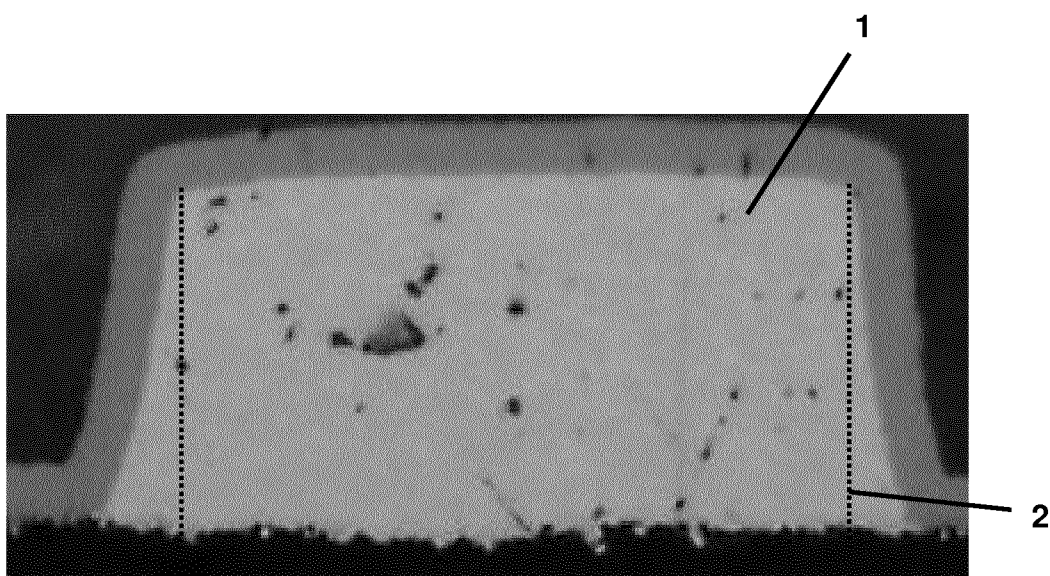


3/5

Figure 3

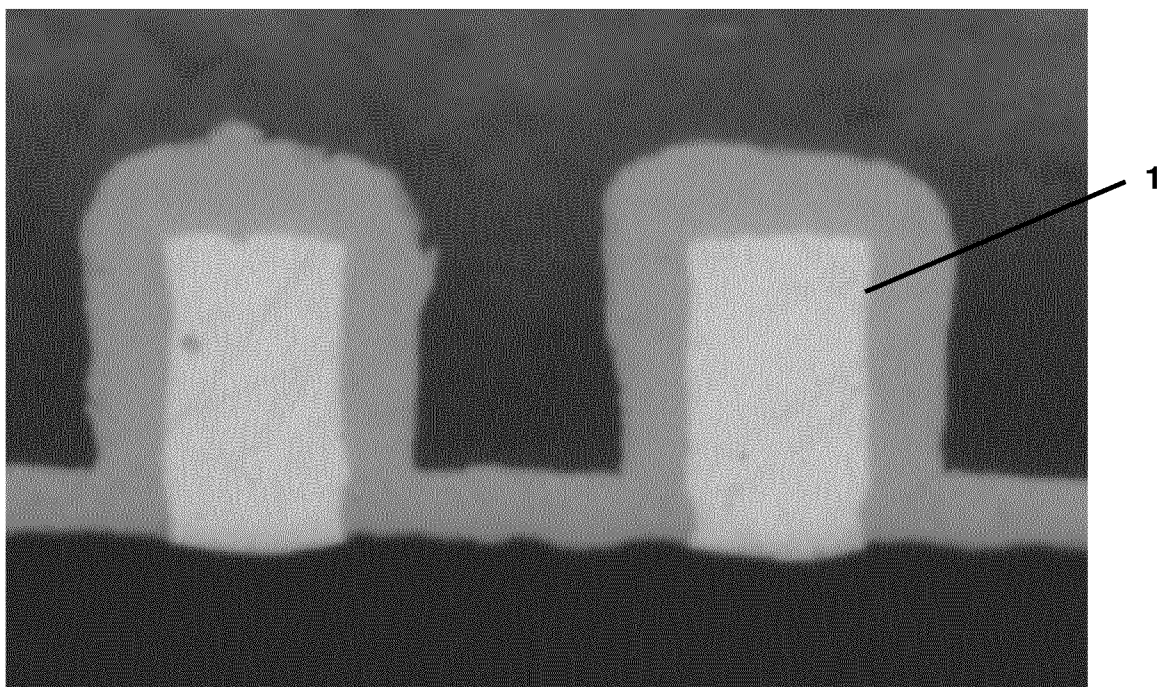

4/5

Figure 4

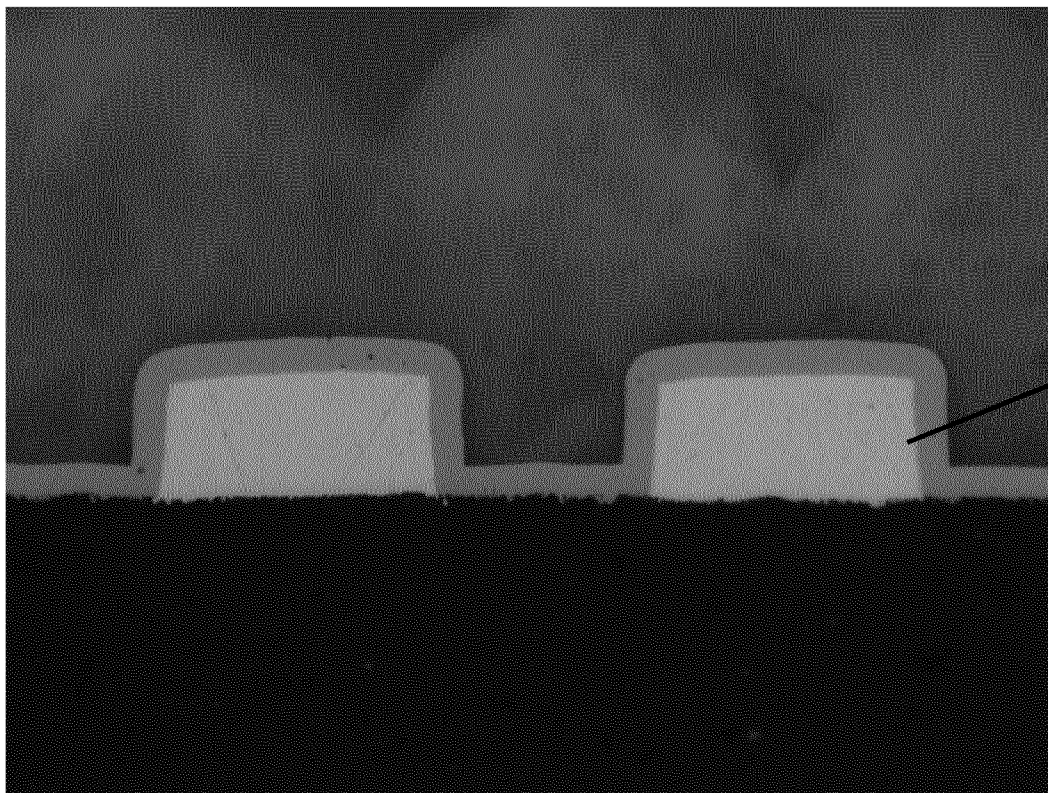

5/5

Figure 5



INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2013/065882

A. CLASSIFICATION OF SUBJECT MATTER
INV. C23C22/52 C23F1/18 H05K3/06
ADD. H05K3/38

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
C23C C23F H05K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, COMPENDEX, INSPEC, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 926 265 A1 (ROHCO INC MCGEAN [US] ATOTECH DEUTSCHLAND GMBH [DE]) 30 June 1999 (1999-06-30) paragraphs [0032] - [0044], [0084], [0093] -----	1-14
A	US 2010/252530 A1 (DURANTE ROBERT JEFFREY [US] ET AL) 7 October 2010 (2010-10-07) paragraphs [0010], [0020], [0025] - [0029]; claims 1,3-9 -----	1-14
A	WO 2009/109391 A1 (ATOTECH DEUTSCHLAND GMBH [DE]; SPARING CHRISTIAN [DE]; LUETZOW NORBERT) 11 September 2009 (2009-09-11) page 8, line 24 - page 12, line 2 -----	1-14



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

20 August 2013

Date of mailing of the international search report

30/08/2013

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Hoyer, Wolfgang

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2013/065882

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0926265	A1	30-06-1999	DE 69809382 D1 19-12-2002
			DE 69809382 T2 11-09-2003
			EP 0926265 A1 30-06-1999
			JP 4160190 B2 01-10-2008
			JP H11261215 A 24-09-1999
			TW 546412 B 11-08-2003
			US 6284309 B1 04-09-2001
			US 2002048685 A1 25-04-2002
			US 2002056702 A1 16-05-2002

US 2010252530	A1	07-10-2010	KR 20100110745 A 13-10-2010
			US 2010252530 A1 07-10-2010

WO 2009109391	A1	11-09-2009	CN 101926235 A 22-12-2010
			EP 2099268 A1 09-09-2009
			EP 2248402 A1 10-11-2010
			JP 2011517324 A 02-06-2011
			KR 20100126355 A 01-12-2010
			TW 200944616 A 01-11-2009
			US 2010323099 A1 23-12-2010
			WO 2009109391 A1 11-09-2009
