



(12) **DEMANDE DE BREVET CANADIEN
CANADIAN PATENT APPLICATION**


(13) **A1**

(86) Date de dépôt PCT/PCT Filing Date: 2019/05/22
(87) Date publication PCT/PCT Publication Date: 2020/11/26
(85) Entrée phase nationale/National Entry: 2022/02/02
(86) N° demande PCT/PCT Application No.: US 2019/018453
(87) N° publication PCT/PCT Publication No.: 2020/236129

(51) Cl.Int./Int.Cl. *H01F 27/32* (2006.01),
G01N 27/02 (2006.01), *H01F 27/28* (2006.01)
(71) Demandeur/Applicant:
R-WATER LLC, US
(72) Inventeur/Inventor:
REZANEZHAD GATABI, JAVAD, US
(74) Agent: KIRBY EADES GALE BAKER

(54) Titre : TECHNIQUE D'ENCAPSULATION POUR CAPTEURS A CONDUCTIVITE PAR INDUCTION
(54) Title: PACKAGING TECHNIQUE FOR INDUCTIVE CONDUCTIVITY SENSORS

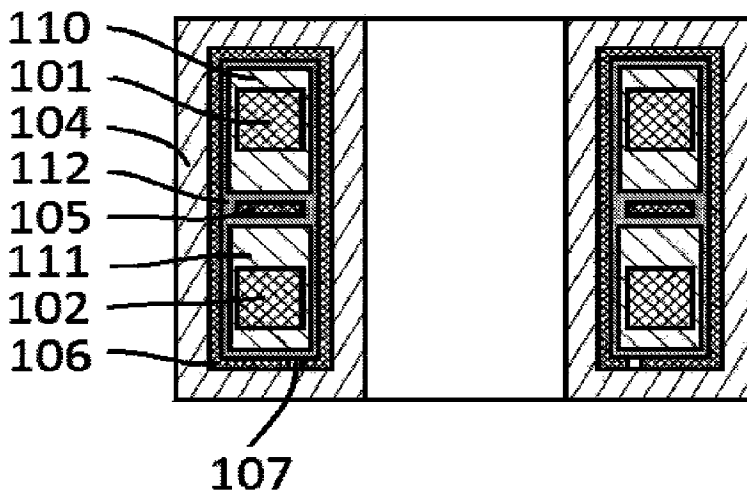FIG. 4



(57) **Abrégé/Abstract:**

This invention presents a new packaging technique that allows for the use of a wider range of isolating materials for inductive conductivity sensors, thereby significantly reducing the cost of producing the sensors, improving their precision and accuracy, and increasing their sensitivity.



Date Submitted: 2022/02/02

CA App. No.: 3146695

Abstract:

This invention presents a new packaging technique that allows for the use of a wider range of isolating materials for inductive conductivity sensors, thereby significantly reducing the cost of producing the sensors, improving their precision and accuracy, and increasing their sensitivity.

TITLE OF INVENTION:

Packaging Technique for Inductive Conductivity Sensors

CROSS-REFERENCE TO RELATED APPLICATIONS: Co-pending US utility patent application 14/721,444, "Conductivity and Impedance Sensor", by the same inventor.

BACKGROUND OF THE INVENTION:

Inductive conductivity sensors are widely used in quality monitoring and process control for many industrial and research applications. Non-contact, inductive conductivity sensors are of interest because of their immunity to chemical corrosion and maintaining their calibration for a longer period of time. The manufacturing process of conventional inductive conductivity sensors requires complicated, time-consuming, and expensive production steps. While the fundamental measurement concept is simple, the main complexity of the conductivity sensor comes from its packaging process.

This invention presents a new packaging technique that allows for the use of a wider range of isolating materials for inductive conductivity sensors, which will significantly reduce the cost of producing the sensor and increase its sensitivity. It will combine exceptionally advantageously with the conductivity and impedance sensors that are the subject of this inventor's co-pending application number 14/721,444, and the disclosure of that application is incorporated herein by reference.

BRIEF SUMMARY OF THE INVENTION:

The polymers employed to isolate the magnetic cores, and the materials used to protect them against the under-test substance, affect the electrical and magnetic properties of the sensor. In order to overcome this issue, in conventional sensors, the components of the magnetic system are separated from the polymer material using a secondary material such as a porous ceramic cement. A very limited group of materials with unique properties can be used for this purpose. The process and material expenses for the secondary material add a significant cost to the manufacturing process of the sensor. Furthermore, the secondary material affects the performance of the sensor. A limited group of materials can be used for the secondary isolation due to their required chemical, mechanical, electrical, and magnetic properties. Often, a third material such as a metal support is also required to mechanically protect the sensitive secondary insulator from external mechanical tensions. This invention presents a new packaging technique that allows for the use of a wider range of isolating materials for inductive conductivity sensors. It will significantly reduce the cost of producing the sensor, improve its precision and accuracy, and increase its sensitivity.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING:

FIG. 1A, Prior Art, illustrates the simplest form of the toroidal conductivity sensor comprising a drive toroid, a receiving toroid, and a conductive material around the sensor making a current loop that transfers the energy from the driving toroid to the sensing toroid. **FIG. 1B**, Prior Art, illustrates the cross-section view of the simplest form of the toroidal conductivity sensor. This figure shows how a non-conductive, magnetically

transparent material such as a corrosion-resistive polymer is employed to protect the magnetic core and wires from the under-test substance.

FIG. 2A, Prior Art, illustrates a shielding disk placed between two toroids preventing direct induction from the drive toroid to the sensing toroid. **FIG. 2B** shows the embodiment of a conventional toroidal conductivity measurement sensor. The sensor comprises a driving toroid, a sensing toroid, a shielding conductive disk, a corrosion-resistive polymer, a secondary insulating material, and metal casing.

FIG. 3, Prior Art, shows how the secondary insulating material makes a closed loop around the drive toroid and the sensing toroid, causing a current loop due to any electrical or magnetic conductivity of the material, resulting a transfer of energy from the drive toroid to the sensing toroid.

FIG. 4 shows the embodiment of this novel packaging for a toroidal conductivity-measurement sensor.

FIGS. 5A and 5B show the embodiment of this novel packaging for toroidal conductivity-measurement sensors with 3 toroids. **FIG. 5A** shows an embodiment with two driving toroids and one receiving toroid, and **FIG. 5B** shows an embodiment with one driving toroid and two receiving toroids.

DETAILED DESCRIPTION OF THE INVENTION:

The simplest form of the toroidal conductivity sensor in prior art is illustrated in **FIG. 1A**. The sensor is comprised of a drive toroid **101** and a receiving or sensing toroid **102**. A conductive material around the sensor makes a current loop **103** that transfers the applied

energy from driving toroid **101** to sensing toroid **102**. The electrical parameters of this measurement structure, when surrounded by the under-test substance, are affected due to electrical and magnetic properties of the under-test substance. As introduced in the prior art and as shown in **FIG. 1B**, a non-conductive, magnetically transparent material **104**, often a corrosion resistive polymer, is employed to protect the magnetic core and wires from the under-test substance. The insulator **104** can also mechanically stabilize the sensor. The main problem of the sensor embodiment of **FIG. 1B** is the direct induction from the drive toroid **101** to the sensing toroid **102**. To prevent the direct induction that affects the sensor's functionalities, as illustrated in **FIG. 2A**, a shielding disk **105** is placed between the two toroids. The shielding material **105** can be metal or any conductive material. It is also common to ground the shielding material **105**.

It is known that the sensor embodiment of **FIG. 1B** or **FIG. 2A** is affected by the dielectric properties of the under-test substance. The corrosion-resistive polymer **104** is often a good dielectric material. Material **104**, in combination with the under-test substance, affects the self-capacitance of the wires of the drive toroid **101** and the self-capacitance of the wires of the receiving toroid **102** and the mutual capacitance made between the wires of two toroids. The common technique to reduce the influence of the dielectric properties of the under-test material on the self-capacitance and mutual capacitance of the toroids is the use of a secondary insulating material **108**. The insulating material **108** has a weak dielectric property or it has a spongy or porous structure that results a low equivalent capacitance. Materials that satisfy the criteria for insulator **108** can be brittle or sensitive to mechanical shocks. Hence, it is very common to employ a mechanically-stronger metallic casing to protect the insulator **108**. The metal casing **106** also acts as a shielding cage to protect the

sensor from external electromagnetic noises. It is also common to ground the metal casing **106** to improve its shielding properties. A gap **107**, which can be an air-gap or filled with any non-conducting material, should prevent the metal casing **106** from making a closed loop as a conductor around either the drive toroid or the sensing toroid or both toroids. The embodiment of the conventional sensors is shown in **FIG. 2B**.

As shown in **FIG. 3**, material **108** makes a closed loop **109** around toroid **101** and toroid **102**. Any electrical or magnetic conductivity of the material **108** results in a transfer of energy from the drive toroid **101** to the sensing toroid **102**. A direct transfer of energy via loop **109** results in an error in the conductivity measurement. Considering this fact, it is obvious that a very limited group of materials can be used as material **108** in the sensor embodiment, because of their necessarily unusual electrical, magnetic, and dielectric properties. Material **108** should have four major properties: poor capacitance, high magnetic transparency, high magnetic reluctance, and low electrical conductivity. Any degradation of material **108** over time can affect at least one of these four properties and result in a significant decline in the sensor's accuracy.

This invention presents a new structure that eliminates the dependence of the sensor on a practically unique material **108**. In this novel technique, as shown in **Fig. 4**, a magnetically transparent, non-electrically conductive material **112** is employed to separate the toroids. The toroid **101** and the material **110** around toroid **101** are separated from toroid **102** and the material **111** around toroid **102** using a shielding material **112**. Material **110** and material **111** have poor capacitance and are magnetically transparent. This innovative invention allows the use of a wider range of substances as materials **110** and **111**, including

a wider group of ceramic compounds with better mechanical properties that do not require a metal structure for mechanical protection. This includes, but is not limited to, any porous cements and spongy polymers and foams. Preventing a closed loop of material **110** or material **111** around both toroids (similar to loop **109** in **Fig. 3**) in the new embodiment significantly reduces the measurement error. Avoiding a metallic casing **106**, or reducing its thickness, results better sensitivity in conductivity measurement. The simplest embodiment for this invention is shown in **FIG. 4**. The sensor embodiment of **FIG. 4** also includes an optional thin conductive layer **106** for shielding purposes. This conductive layer includes a gap **107** that can be an air-gap or filled with any non-conducting material. The gap **107** prevents the conductive layer **106** from making a conductive closed loop around either drive toroid **101**, or sensing toroid **102**, or both toroids. The conductive layer **106** can be grounded to improve its shielding properties. As shown in **FIG. 4** the preferred embodiment for the sensor also comprises a shielding disk **105** that prevents the direct transfer of energy from toroid **101** to toroid **102**. The shielding disk **105** can also be grounded to improve its shielding properties.

The idea of using a magnetically transparent, non-electrically conductive material **112** to separate the driving toroid from the receiving toroid, and using two separate magnetically transparent materials **110** and **111** with poor capacitance around the toroids, can also be used for inductive conductivity sensors with 3 toroids. Conductivity sensors with three toroids are commonly used to achieve a higher precision and higher accuracy measurement. A sensor structure with one driving toroid and two receiving toroids (connected in series) is commonly used to achieve higher sensitivity, and a sensor structure

with two driving toroids (connected in series) and one receiving toroid is known to be less sensitive to external noise.

In the sensor embodiment shown in **FIG. 5A**, the sensor comprises two drive toroids, **101** and **113**, and one sensing toroid **102**. Electromagnetically transparent components **110**, **111**, and **114**, which have poor capacitance properties, surround the three toroids, and the toroids are separated from each other using insulator **112**. This embodiment can also be practiced using one driving toroid and two receiving toroids as shown in **FIG. 5B**. In **FIG. 5B** the sensor comprises one drive toroid **101** and two sensing toroids **102** and **115**. Electromagnetically transparent components **110**, **111**, and **116**, which have poor capacitance properties, surround the three toroids, and the toroids are separated from each other using insulator **112**.

I claim:

1. An inductive conductivity sensor, comprising at least one drive toroid or other electromagnetically analogous drive structure, and at least one receiving toroid or other electromagnetically analogous receiving structure, wherein the structures are at least partially submersed in a conductive test substance, and a current is applied to the drive toroid and measured at the receiving toroid so as to obtain a measurement of the conductivity of the test substance, wherein the improvement comprises:
 - surrounding each toroid with an insulating material that is magnetically transparent and has poor capacitance to form an insulated unit, and
 - surrounding each insulated unit, and separating the insulated units from each other, with a magnetically transparent and non-electrically conductive shielding material.
2. The sensor of Claim 1, wherein each insulated unit is provided with one or more toroidally-shaped conductive shields located between the toroids.
3. The Sensor of Claim 1, wherein the shielding material is in turn surrounded by a layer of a conductive material, which layer is provided with an air gap or other non-conductive interruption to prevent the layer from constituting a conductive closed loop around the toroids.
4. The sensor of Claim 3, wherein each insulated unit is provided with one or more

toroidally-shaped conductive shields located between the toroids.

5. The Sensor of Claim 1, wherein there are a plurality of drive toroids and one receiving toroid, or one drive toroid and a plurality of receiving toroids.

6. The sensor of Claim 5, wherein each insulated unit is provided with one or more toroidally-shaped conductive shields located between the toroids.

7. The Sensor of Claim 5, wherein the shielding material is in turn surrounded by a layer of a conductive material, which layer is provided with an air gap or other non-conductive interruption to prevent the layer from constituting a conductive closed loop around the toroids.

8. The sensor of Claim 7, wherein each insulated unit is provided with one or more toroidally-shaped conductive shields located between the toroids.

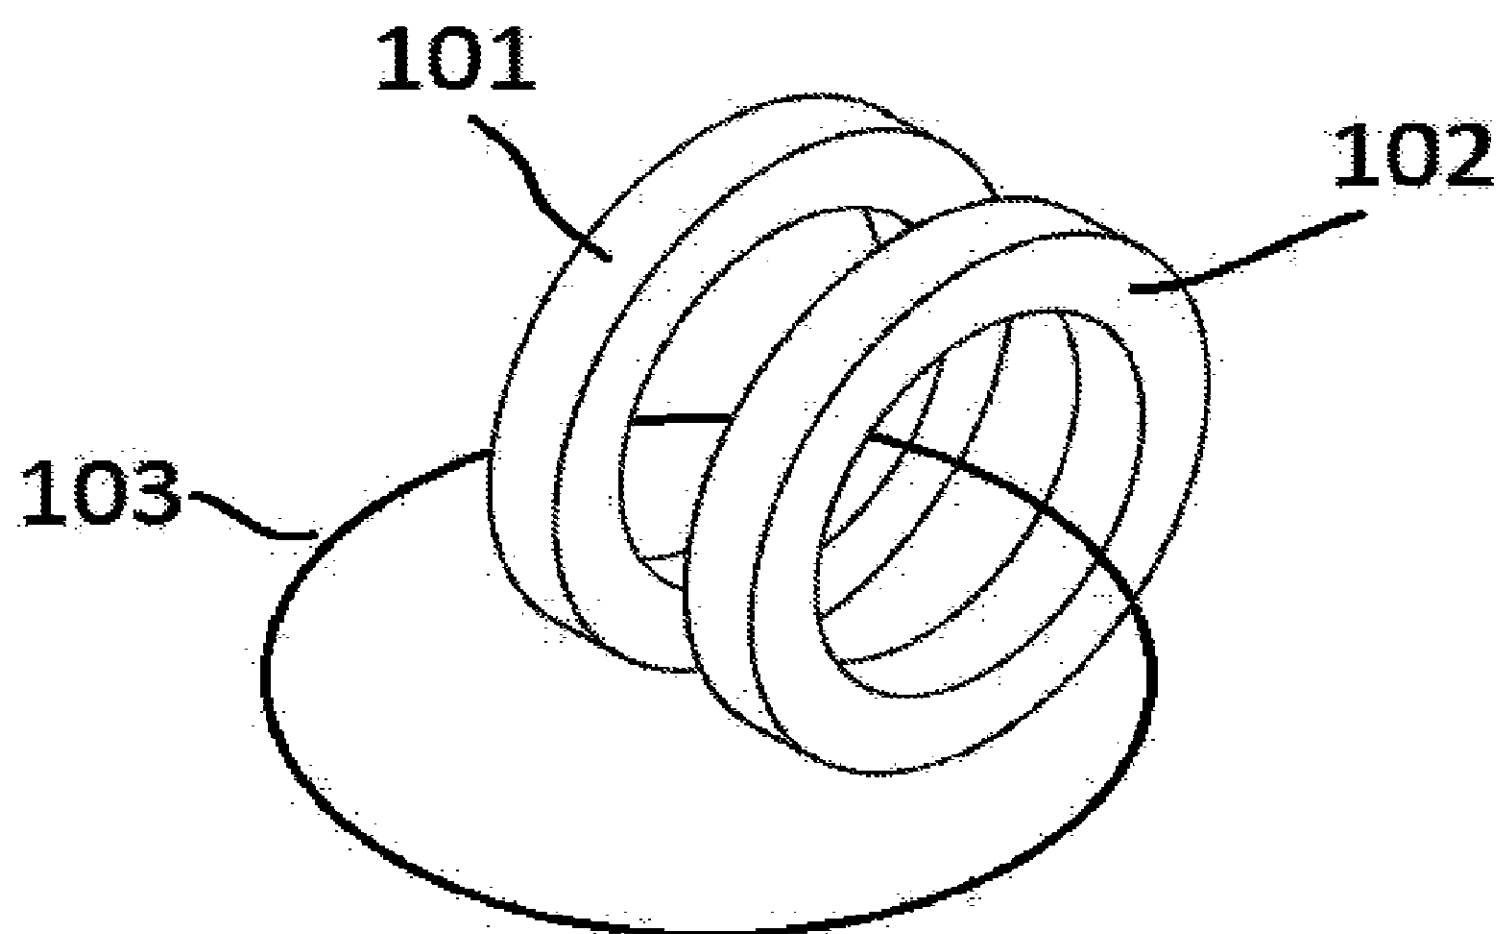
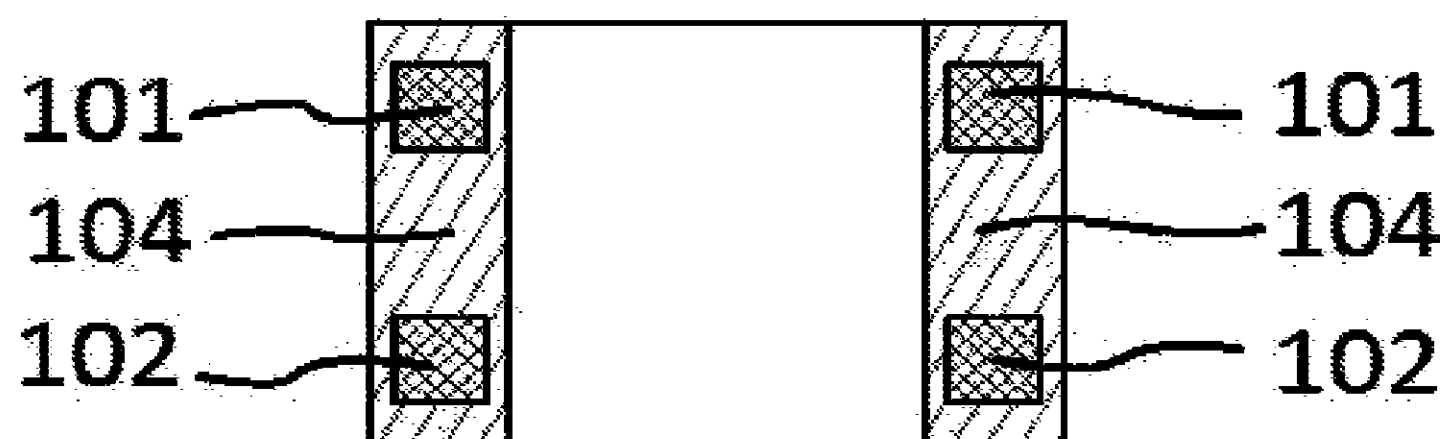
FIG. 1A - PRIOR ART**FIG. 1B - PRIOR ART**

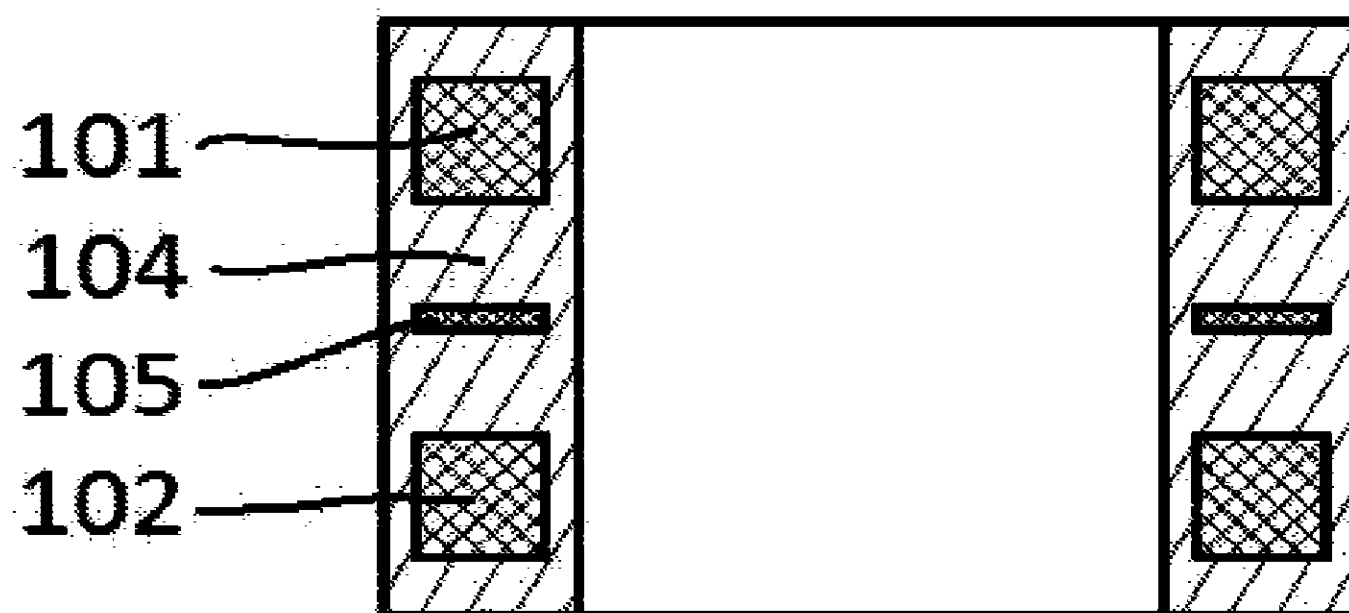
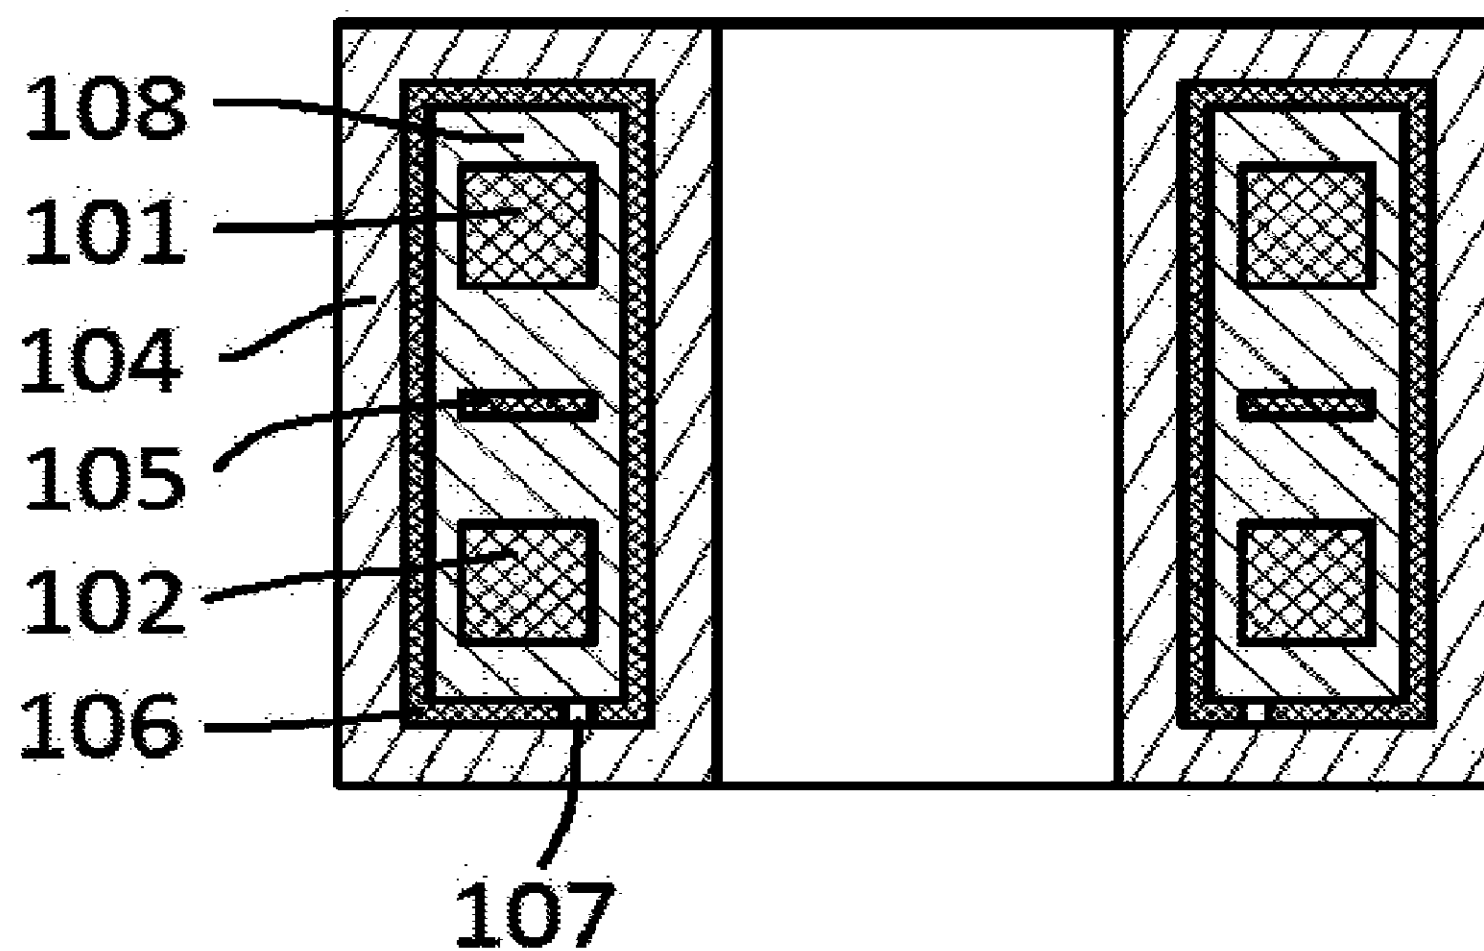
FIG. 2A - PRIOR ART**FIG. 2B - PRIOR ART**

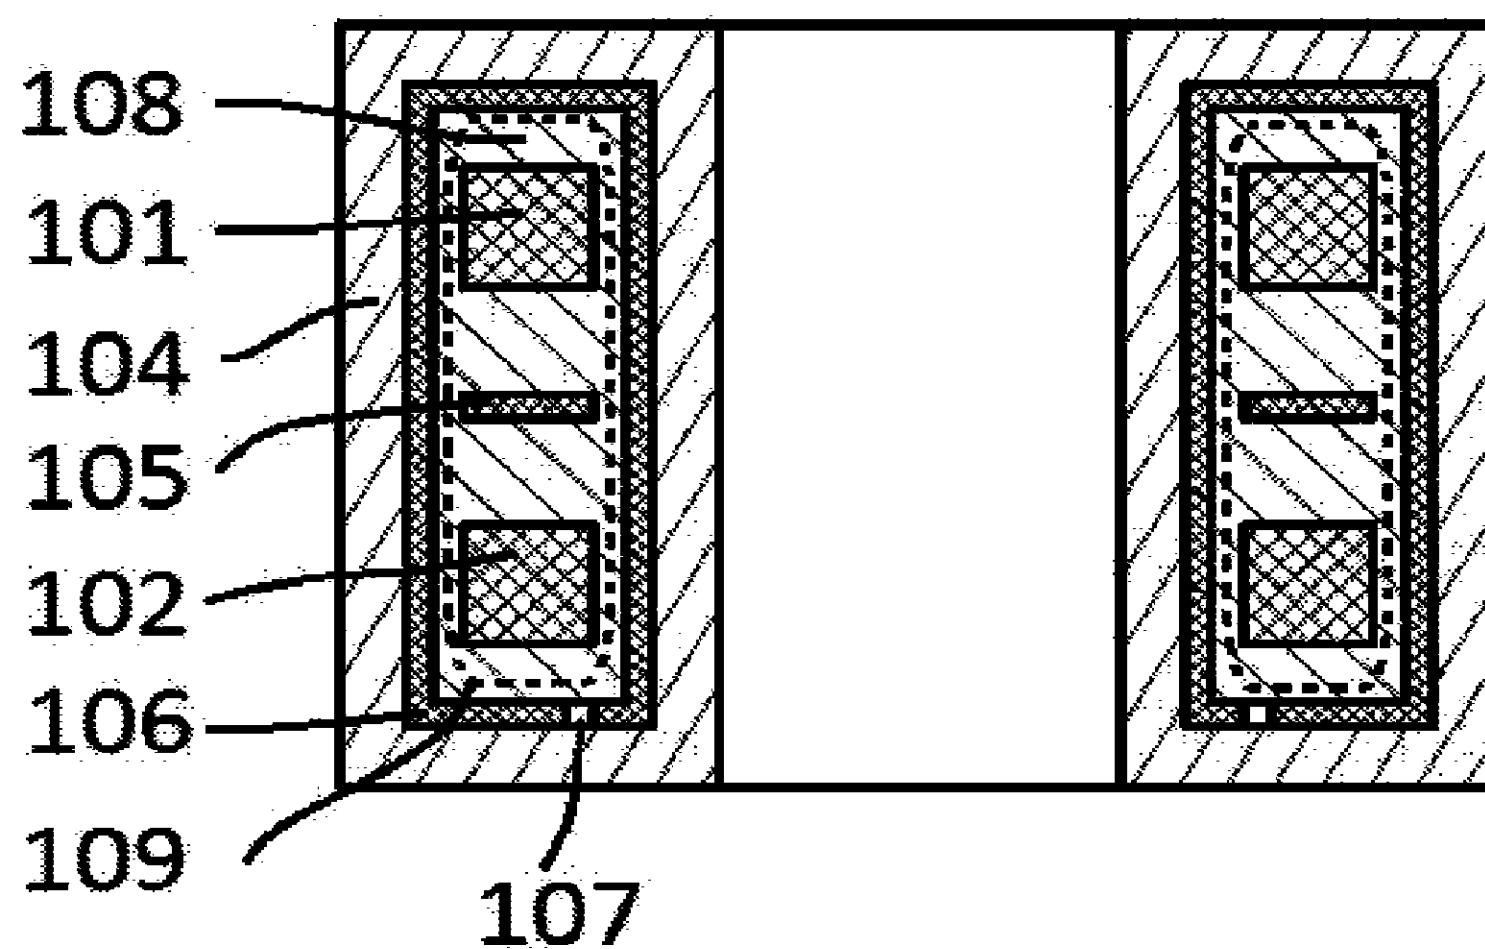
FIG. 3 - PRIOR ART

FIG. 4

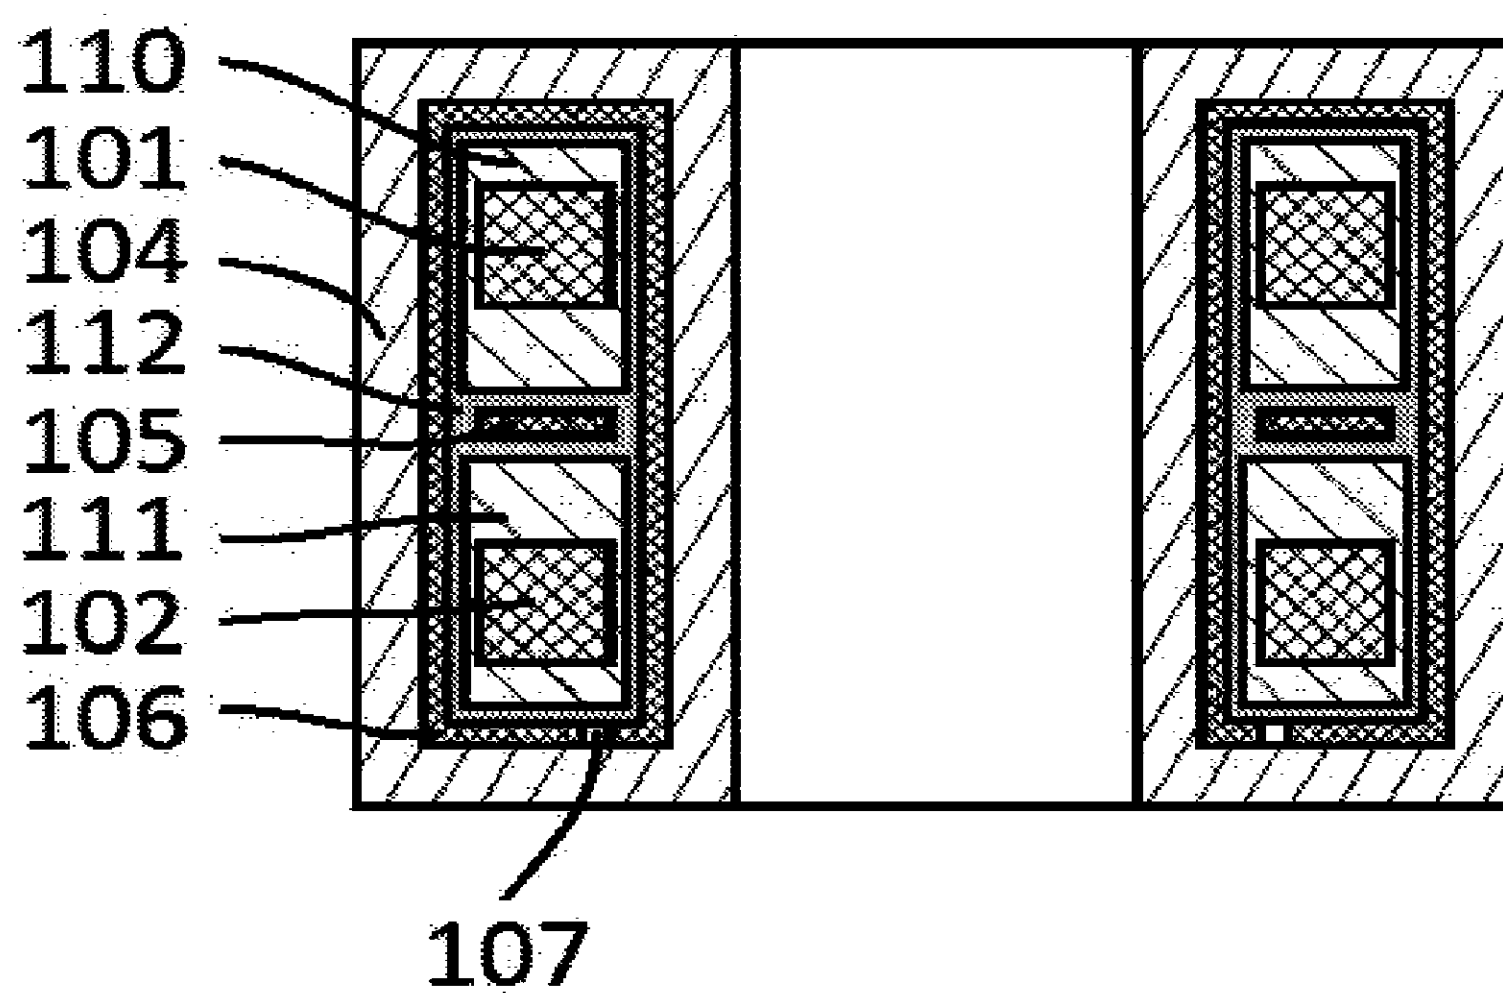


FIG. 5A

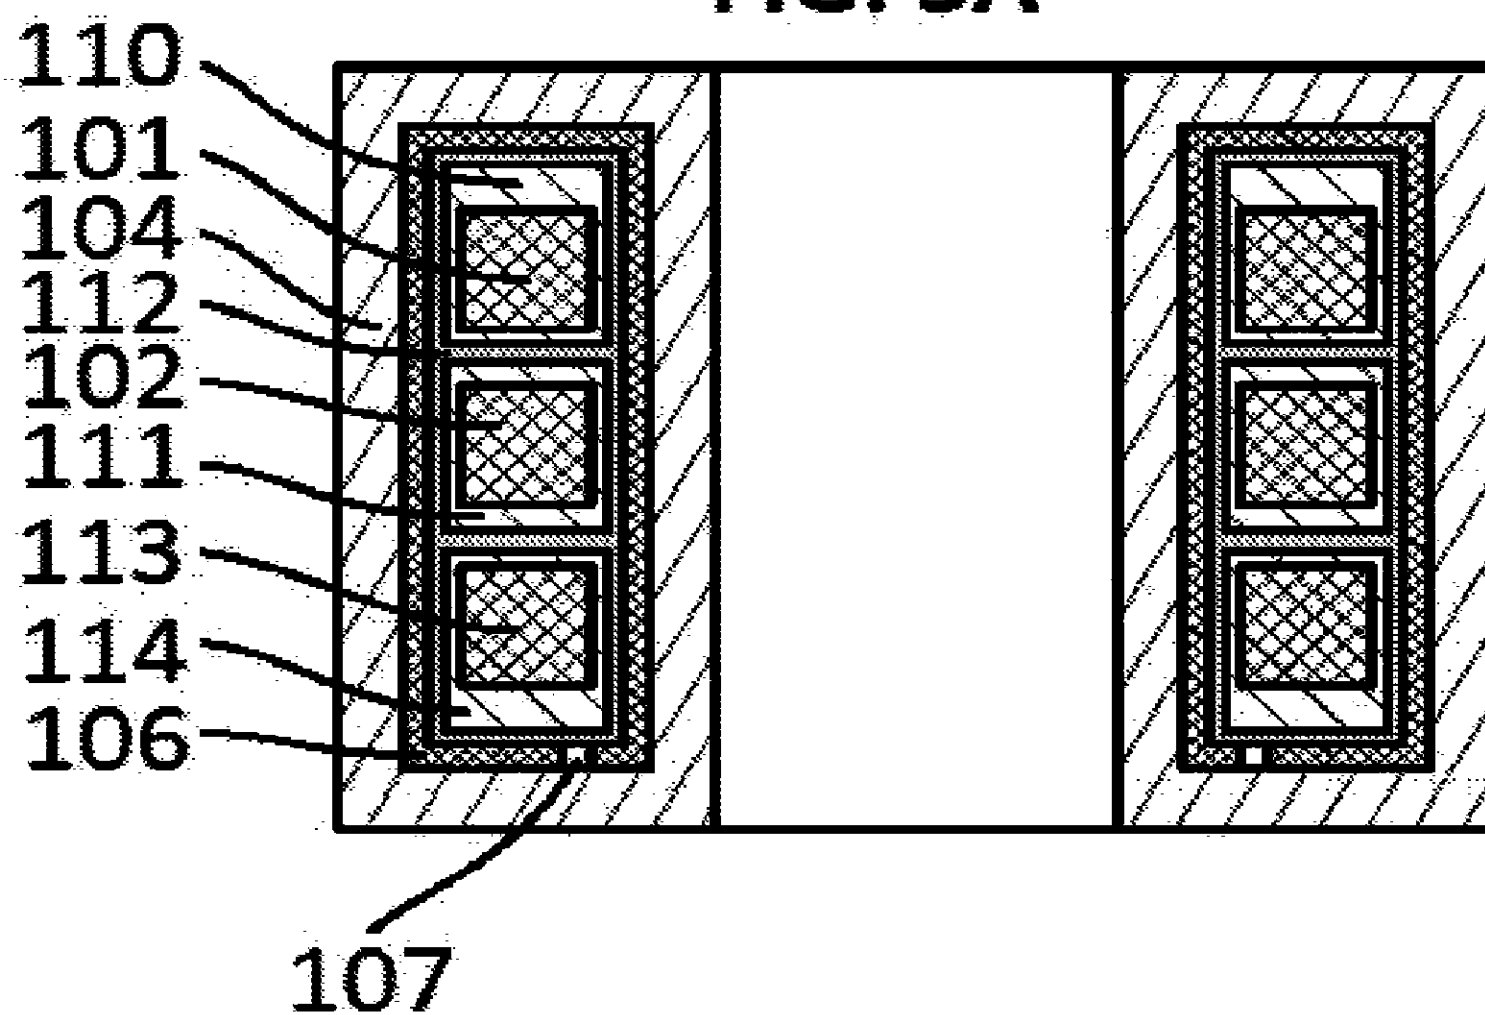


FIG. 5B

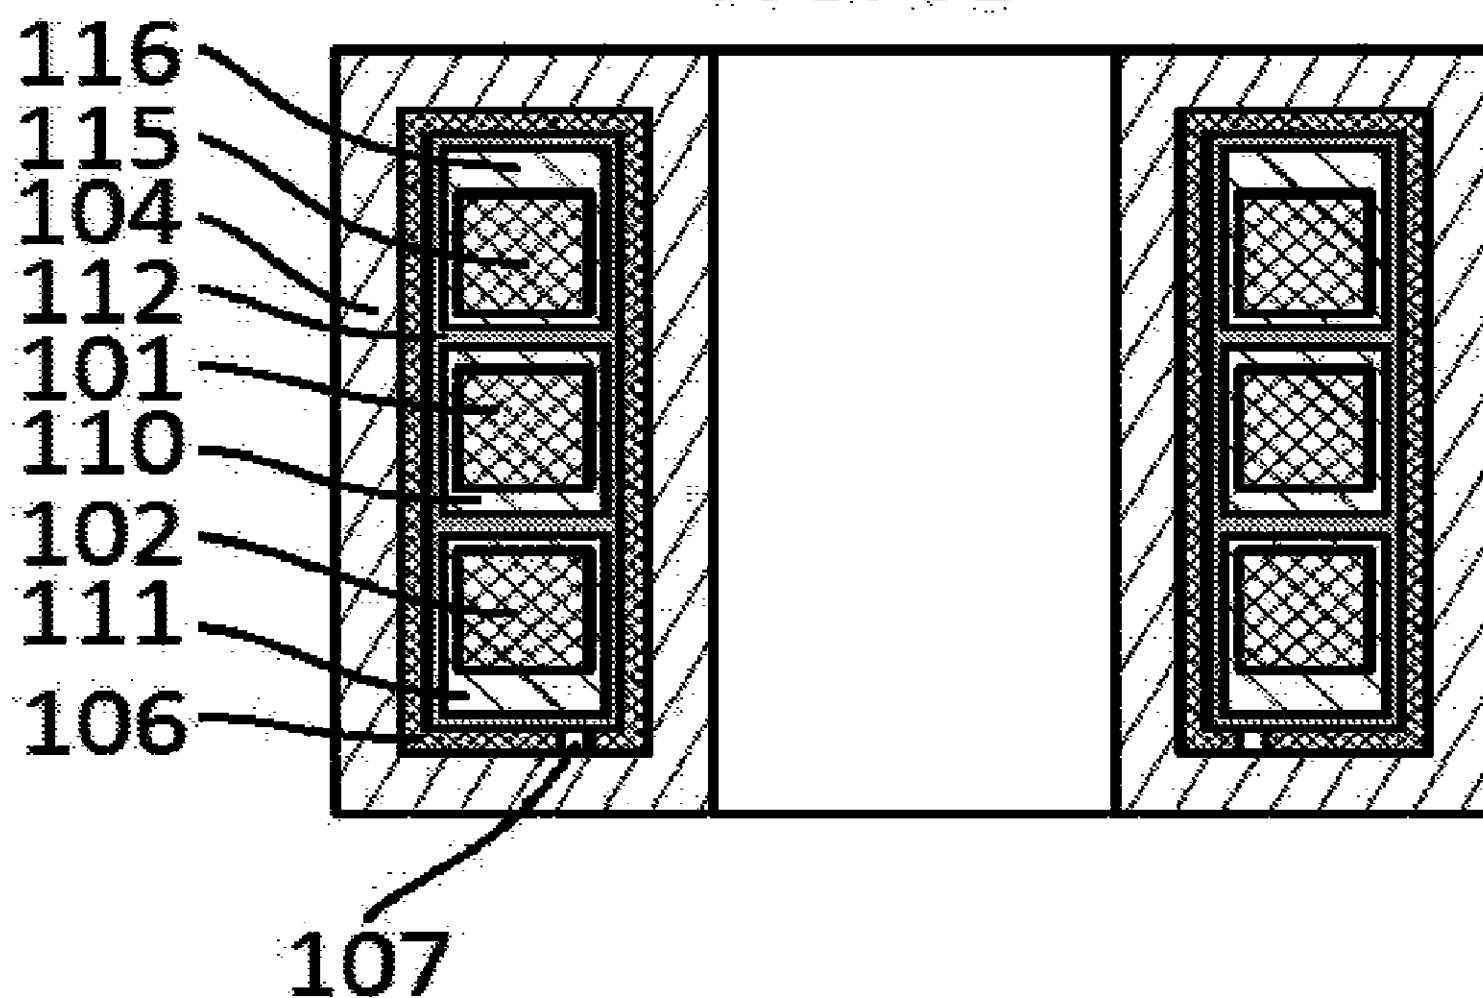


FIG. 4

