




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>3</sup> :  G01R 15/08	A1	(11) International Publication Number: WO 82/ 02954  (43) International Publication Date: 2 September 1982 (02.09.82)
(21) International Application Number: PCT/US82/00204 (22) International Filing Date: 19 February 1982 (19.02.82)  (31) Priority Application Number: 238,450 (32) Priority Date: 26 February 1981 (26.02.81) (33) Priority Country: US		(74) Agents: EDERER, Norbert; International Patent Operation, General Electric Company, 570 Lexington Avenue, New York, NY 10022 (US) et al.  (81) Designated States: BR, CH (European patent), DE (European patent), FR (European patent), GB (European patent), JP.
(71) Applicant: GENERAL ELECTRIC COMPANY [US/US]; 1 River Road, Schenectady, NY 12305 (US).  (72) Inventors: DI MASSIMO, Donald, Vincent ; 7357 Westgate Lane, Liverpool, NY 13088 (US). MAY, John, Bruce ; 3936 Willowbrook Lane, Liverpool, NY 13088 (US). JOHNSON, Brian, Cory ; 116 Huntington Road, Syracuse, NY 13219 (US). COOPER, Jeffrey, Lynn ; 701 First Street, Liverpool, NY 13088 (US).		Published <i>With international search report.</i>

## (54) Title: MULTIPLE RATE ELECTRICAL ENERGY METERING APPARATUS.

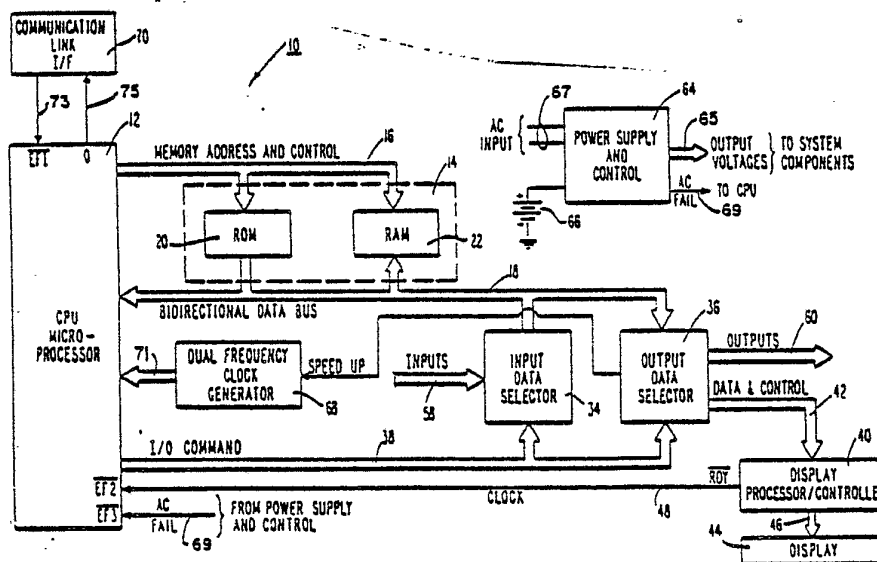

## (57) Abstract

The apparatus is adapted for metering electrical energy on a continuous basis, and also for separately metering the energy supplied during time intervals during the day when peak system loads are expected, so as to provide a basis for surcharges for energy consumed during those peak load intervals. The system includes input means (58, 34, 18) to receive pulses representative of electrical energy consumption, means (within 12) for detecting the beginning and the end of a peak time of use period, a first register (within 12) for accumulating the total count of pulses received during the peak time of use period, a second register (within 12) for accumulating the total count of pulses received, and a display means (44) interconnected with the registers (at 18, 36, 42, 40, 46) and operable selectively for reading out and displaying the contents of either one of the registers.

***FOR THE PURPOSES OF INFORMATION ONLY***

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	KP	Democratic People's Republic of Korea
AU	Australia	LI	Liechtenstein
BE	Belgium	LK	Sri Lanka
BR	Brazil	LU	Luxembourg
CF	Central African Republic	MC	Monaco
CG	Congo	MG	Madagascar
CH	Switzerland	MW	Malawi
CM	Cameroon	NL	Netherlands
DE	Germany, Federal Republic of	NO	Norway
DK	Denmark	RO	Romania
FI	Finland	SE	Sweden
FR	France	SN	Senegal
GA	Gabon	SU	Soviet Union
GB	United Kingdom	TD	Chad
HU	Hungary	TG	Togo
JP	Japan	US	United States of America

-1-

MULTIPLE RATE ELECTRICAL ENERGY  
METERING APPARATUS

5        This invention relates to the measurement of electrical energy consumption by power system customers, and more particularly to improved apparatus for metering electrical energy consumption at multiple rates depending upon the time of day, time of week and time of year during which the energy is being consumed.

10        Electrical energy is sold generally on the basis of a fixed rate schedule. Because of this fixed rate structure, electrical generation and distribution systems are overloaded at certain times and, at other times, are only lightly  
15        loaded. There is no incentive for customers to limit their peak load time use. This results in substantial inefficiencies since a much larger plant and distribution system than is economically desirable is required in order to meet peak demands  
20        of the generation and distribution system.

25        Prior attempts have been made to charge a lower rate for electrical energy consumption during off-peak periods and a higher rate for energy consumption during on-peak periods. This is to encourage the user to consume electrical energy during off-peak periods to level the load requirements placed on the power system.

-2-

One prior apparatus for metering the consumption of electrical energy at multiple rates is disclosed by Germer, et al in U.S. Patent 4,050,020. This apparatus employs three sets of decade gear driven dials for registering kilowatt hours consumed on a continuous basis, kilowatt hours consumed during preselected mid-peak intervals, and kilowatt hours consumed during preselected high-peak intervals. A programmable control circuit controls the operation of the alternate sets of decade gear driven dials at predetermined times.

Additionally, systems have been developed for measuring maximum peak power consumption over a predetermined time period. This is referred to as "demand" metering. To permit power companies to have generating capability to supply all consumers at all times, it is necessary that peak loads be predictable. Thus, there is a practice of metering and billing users based on peak load demand within a given period of time, typically 15 minutes during system peak-load times of day. This gives the user an incentive to maintain a level load and not exceed a predetermined peak.

In a demand metering system, the consumption of power is measured and recorded on a demand meter register during demand intervals of a predetermined length. Previously, the demand interval length had been for a fixed length of time (e.g. 15 or 30 minutes.) However, for



-3-

greater flexibility in demand metering, the utility companies required a universal meter which could be readily altered to change the demand interval length without making extensive mechanical or electrical modifications. One such meter is disclosed in U.S. Patent No. 4,179,654 Germer.

Another weakness in demand metering, whether for a fixed length demand interval or for a demand interval length which can be changed, has been that there is customarily a complete reset and restart of the demand interval measurement at fixed times such as every 15 minutes or every half hour. This has led to inaccuracies in demand measurements if a peak demand load is in operation through the end of one demand metering interval and the beginning of a succeeding demand interval so as to distribute and dilute the peak demand over two demand intervals. It has been proposed to provide for a so called "sliding" demand measurement interval in order to overcome this difficulty by matching the demand measurement interval with the actual time interval of maximum load demand. One such system is disclosed in U.S. Patent No. 4,229,795, Vieweg et al. However, that system includes a serious limitation in that the duration of the demand measurement interval is fixed, and therefore, inflexible, in spite of the "sliding" demand period feature.




-4-

Another problem encountered in prior systems has been that they typically require hardware for providing a visual readout of all of the various measurements which are being made by the metering system on a continuous and concurrent basis.

One feature of the present invention is to provide a visual indicating means which displays less than the total number or quantities being metered, preferably displaying only one of those quantities at a time, the system being capable of selective enablement for visual indication of any one of the various quantities being metered. The present invention also deals successfully with the various problems of prior systems as outlined above.

In carrying out the invention there is provided a multiple rate electrical metering system operable to register total electrical energy consumed by a monitored load as well as electrical energy consumed by said load during at least one preselected time of use period, said system comprising input means adapted to receive and count pulses which are representative of electrical energy consumption by said load, including means for detecting the beginning and the end of a first preselected time of use period, first register means connected to said input means for accumulating the total count of pulses received during said preselected time of use period, second register means connected to said input means for accumulating the total



-5-

count of pulses received, characterized by the provision of a display means and means inter-connecting said registers and said display means and operable selectively for reading out the  
5 contents of any selected one of said registers to said display means for providing a visual display of the contents of said named register by said display means.

In the drawings:

10 FIG. 1 is a schematic block diagram of a preferred apparatus for carrying out the present invention;

FIG. 2 is a more detailed schematic block diagram depicting the central processing unit,  
15 the input data selector, the output data selector, and the associated interconnecting portions of the apparatus of FIG. 1.

FIG. 3 is a more detailed schematic block diagram depicting the display processor/controller  
20 and display portions of the apparatus of FIG. 1.

FIG. 4 is a schematic diagram depicting a communication link interface circuit referred to in FIG. 1.

FIG. 5\* is a schematic diagram representation  
25 of data storage registers and associated logical apparatus for the collection and accumulation of

---

\* i.e. FIGS. 5A and 5B considered as a unit



-6-

electrical energy measurements which are incorporated in the central processing unit microprocessor 12 and in the memory unit 14 of FIG. 1.

5           FIG. 6 is a schematic detail illustrating a time delay feature in the reapplication of power to a controlled load after a power down condition.

10           Referring to FIG. 1 of the drawing, there is shown a schematic block diagram of the preferred embodiment of the apparatus of the present invention, generally designated 10. The apparatus 10 includes a central processing unit comprising a microprocessor 12. In the preferred embodiment, 15 the microprocessor 12 is an RCA CDP 1802 COSMAC Microprocessor. The microprocessor 12 is electrically connected to an external memory 14 by means of a memory address and control circuit 16 and bi-directional data bus 18.

20           In the preferred embodiment, the external memory 14 comprises a read only memory (ROM) 20 and a random access memory (RAM) 22. The ROM 20 is preferably a Supertex, Incorporated Model MM3200 Read Only Memory organized in a 4096 x 8 configuration. The RAM 22 preferably comprises a pair 25 of Harris Corporation model HM-6513-L 512 x 4 RAM's (24 and 26) interconnected to provide a 512 x 8 memory array.

30           The apparatus 10 additionally includes an input data selector 34 and an output data selector





-7-

36 which are electrically connected to the microprocessor 12 by means of the bi-directional data bus 18 and an input/output command section 38. The output data selector 36 is electrically  
5 connected to a display processor/controller 40 by means of a data and control bus 42. The display processor/controller 40 is electrically connected to a display 44 by means of a display control bus 46. In addition, the display processor/  
10 controller 40 is electrically connected to the microprocessor 12 by means of a clock line 48.

The apparatus also includes a power supply and control circuit 64 which supplies the appropriate voltages, as indicated at 65, to the  
15 various components of the multiple rate metering apparatus 10. The power supply and control circuit 64 derives its primary source of power from the monitored power distribution system, as indicated at 67. However, there is also provided a carryover  
20 battery 66 for supplying carryover power to the apparatus 10 in the event of a power outage in the monitored distribution system. The power supply and control circuit 64 includes AC  
25 fail battery switchover, battery test, and interrupt generating circuits which monitor the primary and secondary (carryover) power sources and provide for continued operation, in a reduced keep-alive mode which keeps trace of passing time during a  
primary power outage. The failure of primary power  
30 is signalled from the power circuit 64 to the



-8-

microprocessor 12 on a connection 69.

Also shown in FIG. 1 is a block representation of a dual frequency clock generator 68 connected at 71 to provide the clock frequency necessary to operate the microprocessor 12. The dual frequency clock generator 68 is capable of supplying a clock signal having a higher frequency, approximately 1 MHz during normal operation, and a lower frequency, 1 KHz, during primary power outages.

In FIG. 1, there is also shown a communication link interface circuit 70 which is electrically connected at 73 to the input/output flag input 1 ( $\overline{EFL}$ ) and at 75 to the Q output (Q) terminal of the microprocessor 12. The communication link 70 is described further below in connection with FIG. 4.


Referring now to FIG. 2, there is shown a schematic block diagram depicting the interconnection of the microprocessor 12, the input data selector 34, the output data selector 36 and the input/output command section 38. The input data selector 34 preferably may be implemented by an RCA type CD40257B COS/MOS Quad 2-Line-to-1-Line Data Selector/Multiplexer. The output data selector 36 preferably may be implemented by an RCA type CD4099B COS/MOS 8-bit Addressable Latch. The input/output command section 38 comprises a first two input NAND gate 54 and a second two input NAND gate 56.



-9-

Inputs 58 are electrically connected to the data selector 34 as shown in FIG. 2, with the input from disc circuit A (DSK A) connected to terminal B1; the input from disc circuit B (DSK B) connected to terminal B2; the input from a demand reset switch 59 connected to terminal B3 and the input from a display activate switch 61 connected to input terminal A1. In the preferred embodiment, the inputs DSK A and DSK B, are developed from the rotating disc of a watt-hour meter. Optical electronics convert the disc rotation information, as developed by sensing slot locations, to electrical pulse signals over the two lines to terminals B1 and B2 of the input data selector 34. These signals are indicative of the amount of electrical energy being consumed in the measured system. Such a structure is shown and described in U.S. Patent No. 4,179,654-Germer. The demand reset switch 59 is preferably a manually activated momentary switch as illustrated schematically in the drawing. Display activate switch 61 is preferably a magnetically activated switch, such as a reed switch, which may be activated by a magnetic wand.

The outputs D1 through D4 of the data selector 34 are electrically connected to data input/output ports B0 through B3 respectively of the micro-processor 12 by means of the bi-directional data bus 18.



-10-

Outputs 60 from the output data selector 36 comprise alert signals A,B and C and a load control signal at 60A from output terminal Q0, Q1, Q2 and Q3 respectively. The output terminals Q0, Q1 and Q2 are electrically connected to external alert circuits while the output terminal Q3 is electrically connected at 60A to a load control circuit. The output connections 42 from terminals Q4, Q5 and Q7, generating data, clock, and OFF signals respectively, are electrically connected to the display processor/controller 40. The input/output data terminals, B0 through B3, of the microprocessor 12 are electrically connected to the address input terminals A0 through A2, and the data input terminal respectively of the output data selector 36 by means of the bi-directional data bus 18.

The input/output command output 0 (N0) terminal of the microprocessor 12, is electrically connected to one input of a first two input NAND gate 54. The timing pulse B (TPB) output terminal of the microprocessor 12 is electrically connected to the other input of the first two input NAND gate 54 and one input of a second two input NAND gate 56. The input/output command output 1 (N1) terminal of the microprocessor 12 is electrically connected to the other input of the second two input NAND gate 56. The output of the first NAND gate 54 is electrically connected to the output disable terminal OD of the data selector 34. The output of the second NAND gate 56 is electrically connected to the write disable terminal WD of the output data selector 36.

-11-

The input/output command output 2 (N2) terminal of the microprocessor 12 is electrically connected to the input select terminal IS of the data selector 34. By generating the appropriate command and control signals at its terminals N0, TPB and N2, as will be subsequently described, the microprocessor can cause data representative of the selected input 58 to appear at the data output terminals D1 through D4 of the data selector 34. Similarly, by generating the appropriate signals at its output terminals TPB and N1, as will be subsequently described, the microprocessor 12, can cause output data from its input/output data terminal B3 to appear at a selected one of the output terminals Q0 through Q7 of the output data selector 36 as determined by the signals appearing on the input/output data terminals B0 through B2 of the microprocessor 12.

Referring now to FIG. 3, there is shown a schematic block diagram depicting the interconnection of the display process/controller 40 and the display 44 by means of the display control bus 46. In the preferred embodiment, the display processor/controller 40 may be a Texas Instruments TMS1070 microcomputer. The display 44 is preferably a Futaba model No. 9-ST-68 9-Digit Vacuum Fluorescent Display. "0" outputs 00 through 07 of the display processor/controller 40 are electrically connected to the segment control inputs A through H respectively of the display 44 by means of the display control

BUREAU  
CMI  
WLO

-12-

bus 46. The "R" outputs R0 through R8 of the processor/controller 40 are electrically connected to the digit control inputs R0 through R8 respectively of the display 44 by means of the display control bus 46. The data and clock outputs from the output data selector 36 are electrically connected through bus 42 to the K4 and K8 inputs respectively of the processor/controller 40. The OFF output from the output data selector 36 controls an electronic switch 62 which selectively controls the appropriate supply voltage through connection 64A from a power supply and control circuit 64 (FIG. 1) to the supply voltage terminal  $V_{DD}$  of the display processor/controller 40. The R9 terminal of the processor/controller is electrically connected to the input/output flag input 2 (EF2) terminal of the microprocessor 12 via the clock line 48.

FIG. 4 is a schematic detail of the communication link 70. Communication link 70 includes a photo detector 77 and a light emitting diode 79. The signal from the photo detector 77 is connected to the input of an amplifier comparator 72, the output of which is connected to the input of a Schmitt trigger 74. The output of the Schmitt trigger 74 is electrically connected at 73 to the EF1 terminal of the microprocessor 12. In the preferred embodiment, the comparator 72 is an RCA type CA 139G Quad Comparator. The Schmitt trigger 74 is preferably an RCA type CD 40106 B "COS/MOS Hex Schmitt trigger". The Q output from



-13-

the microprocessor 12 is electrically connected at 75 to an electronic switch 76 which controls the application of power to the light emitting diode (LED) 79.

5       The operation of the communication link interface circuit 70 is as follows. An optical communication link (not shown) having a light transmitter (for example an LED) and a light detector (for example a photo transistor), is  
10       positioned next to, and optically coupled with the communication link interface circuit 70 in a complementary relationship with the LED 79 and photodetector 77 of the interface circuit 70.  
15       In the preferred embodiment, the LED 79 and photodetector 77 of the interface circuit 70 are mounted side by side in an optical port of the multiple rate metering apparatus 10. This coupling permits the LED of the optical link to align with the  
20       photo detector 77 of the interface circuit 70 while the photo detector of the optical link is positioned opposite the LED 79 of the interface circuit 70.  
      Upon the detection of light emitted from the LED of the optical link, the photo detector 77 generates a signal which is input to the Schmitt trigger 74  
25       through the comparator 72. The Schmitt trigger 74 generates a pulse which is coupled through connection 73 to the EF1 terminal of the microprocessor 12. In addition, a signal generated by the microprocessor  
30       12 at its Q output terminal through connection 75 will cause the electronic switch 76 to complete a power circuit to the LED 79 causing the LED to emit light.



-14-

This emitted light is detected by the photo detector of the optical link which in turn generates a signal for use at the other end of the optical link.

5           In a preferred embodiment, the apparatus 10 of FIG. 1 is programmable and reprogrammable to meet changing rate designs utilizing the through-the-cover optical communication link 70, preferably using a portable programmer/tester (not  
10 shown). This same link can be implemented for automated reading and recording of meter data if desired. The preferred embodiment of the apparatus 10 is programmable for 5 years, regardless of how many of the programmable functions are  
15 used. It can accomodate up to 10 holidays per year and 4 seasonal rate changes per year. The time of use schedule can be different for each season with up to 8 daily set points on quarter hour intervals. In addition, the apparatus can accomodate a week-end/holiday schedule for each season with up to 6  
20 daily set points on quarter hour intervals. Day-light savings time changes and leap year are also accomodated.

25           Thirty-three registers selectively displayable on the 9 digit vacuum fluorescent display 44, which display can be programmed to sequence through the quantities selected for display at preselected times. The display is also capable of being activated by a magnetic wand which when placed in proximity to





-15-

5 the magnetic display activate switch (61, FIG. 2)  
previously described, activates the switch. The  
wand can be used to fast forward the display until  
the selected register is located, or to single  
step the display to the next register, if desired.  
10 In addition, holding the magnetic wand at the meter  
for greater than a preselected time period (one  
second in the preferred embodiment) can initialize  
the display to the first register. As shown in  
FIG. 2, disc inputs are available to the input  
15 data selector 34 at terminals B1 and B2. As  
previously stated, these inputs are developed from  
the rotating disc of the kilowatt hour meter.  
Other inputs to the input data selector 34 include  
reset demand (at B3) and display activate at A1.

20 The output data selector 36 is used to couple  
information from the microprocessor 12 to three  
alert outputs A, B and C at 60. Each alert output  
is active when the time of use period associated  
with that particular alert is in existence; and,  
25 as each rotation of the disc occurs, that par-  
ticular alert output will be a pulse signal. In  
the preferred embodiment, optical couplers/  
isolators develop an electrically isolated output  
pulse for each rotation of the disc. In addition,  
30 a load control output 60A from the output data  
selector 36 activates a relay, the contacts of  
which can be used to selectively control an  
external load. Other outputs 42 from the data  
selector 36 are used to transmit data and control

-16-

signals to the display processor/controller 40. Another output at Q6 controls the output frequency of the dual frequency clock generator 68 (FIG. 1). Clock generator 68 provides a high frequency clock  
5 signal (approximately  $1\text{MH}_2$ ) to the microprocessor 12 during normal operations, and a low frequency clock signal ( $1\text{KH}_2$ ) during AC power outage conditions.

FIG. 5 is a schematic circuit diagram illustrating registers which are employed for storing  
10 electrical energy measurements in accordance with the present invention and which are included in the central processing unit microprocessor 12 of FIG. 1, or in the associated memory address and control  
15 unit 14, together with associated switching logic and memory and register circuits for controlling the delivery of data to the data registers in accordance with the present invention.

The data storage registers illustrated in FIG. 5  
20 include a first pulse count register 82 for storing and accumulating a total count of pulses received during a preselected time of use during each day as a measure of electrical energy consumption during that period. A second register 84 is arranged to  
25 accumulate the total count of pulses received as a measure of total energy consumed, and a fourth register 86 is provided for accumulating a maximum count of pulses received during a limited period as a measurement of the maximum demand for  
30 electrical energy consumed during that limited period.



-17-

The time of use period during which pulses are accumulated in the first pulse count register 82 is determined by a number representative of the beginning of a time of use during a particular day stored in a register 88, and a number stored in a register 90 indicative of the end of the time of use. The numbers stored in registers 88 and 90 are gated from a times of day table storage memory 92 by means of gating devices 94 and 96 under the control of a calendar day clock 98. Particular times of day are selected from the table storage memory 92 for days of particular classes, such as weekdays, holidays, Saturdays, and Sundays, by control signals gated through gates 100 and 102 from a calendar storage memory 104. Gates 100 and 102 are also controlled by clock 98.

The calendar storage memory 104 preferably stores the calendar for a number of years ahead, including recognition of a different status for each weekend day, and also including a different status for each holiday. The calendar day clock 98 issues a series of new control signals each day, operating through a connection 106 to the calendar storage memory 104 to advance the recognition of a new date from the calendar storage memory 104. The control signals supplied from the calendar day clock 98 to the gates 100 and 102 then cause a gating through of day type information to the times of day table storage memory 92 to appropriately select the proper times of day for the beginning and the end of the time of use period for which energy is to be recorded in register 82. Those times of day are then gated by



-18-

the calendar day clock signals from 98 through gates 94 and 96 to the time of use begin register 88 and the time of use end register 90. The detection of the actual occurrence of the time of use to begin is then determined by comparing the real time, as shown by a real time clock register 108 with the time of use begin time stored in register 88 by means of a compare circuit 110. A bistable control circuit 112 is normally initially in the set state so as to operate through a connection 114 to enable a gate 116 connecting the begin register 88 to the compare circuit 110 for comparison with the real time clock register 108. Under these conditions, a corresponding gate 118 from the end register 90 to the compare circuit 110 is not enabled because that gate relies upon an enablement signal from the reset output at connection 120 from the bistable circuit 112.

However, as soon as the compare circuit 110 indicates an identity between the contents of the begin register 88 and the real time clock register 108, the compare circuit 110 issues a signal on a connection 122 to a trigger input of the bistable circuit 112. Since there is a cross connection, indicated at 114A from the set output 114 to the reset input of the bistable circuit 112, the trigger input is effective to change the state of the bistable circuit 112, disabling the gate 116, and enabling the gate 118. The reset output on connection 120 also is effective to enable a gate 124 which gates input pulses from a pulse input



-19-

connection 18A to the first pulse count register 82 to commence or recommence the accumulation of pulses indicative of electrical energy consumed. The connection 18A represents a part of the data available from the data bus 18 of FIG. 1 from the input data selector 34, and represents pulses derived from one of the meter disc input pulse sources, indicative of energy consumed.

With the gate 118 enabled, the compare circuit 110 will be effective to detect a comparison between the real time indicated by the clock register 108 and the end time stored in the end register 90. The circuit thus recognizes the end of the time of use to issue another output signal on connection 122 to the trigger input of the bistable circuit 112 to again change its state to the set state. This disables gates 118 and 124, and stops the accumulation of pulse counts in the first pulse count register 82.

The second pulse count register 84 is connected directly to the pulse input connection 18A to receive and count all of the pulses which are available, to thus accumulate all of the pulses as a measure of the total electrical energy consumed. The contents of either of the registers 82 or 84 may be selected for display by means of a read select control 126 which is operable in response to a signal received over the bus 18, as schematically indicated at 18C. The selective readout control signals supplied from the read select control circuit 126 to the registers



-20-

82 and 84 cause the contents of one of those registers to be read out upon a common display information bus indicated at 18B. Again, the function of the display bus 18B may be carried  
5 out by the data bus 18 of FIG. 1.

The invention also preferably includes demand measurement circuitry, including circuitry for determining a time of day during which demand is to be measured. This may be accomplished in a manner  
10 similar to that for determining the time of use in connection with registers 88 and 90. Registers corresponding to registers 88 and 90 are shown at 128 and 130 for respectively storing the beginning of the demand time in register 128 and the end of  
15 the demand time in register 130. These registers may be set to different time values for different days from the times of day table storage memory 92 through connections 132 and 134, which are not shown in full.

20 Before the demand time begins, the contents of the demand time begin register 128 are gated through the gating device 136 to a compare circuit 138 for comparison with the real time from the real time clock register 108 through connection 140.  
25 The gate 136 is controlled by a bistable circuit 142 through the set output connection 144. As soon as an identity is recognized, indicating that the demand begin time has arrived, the compare circuit 138 issues an output signal on the connection 146



-21-

to the trigger input of the bistable circuit 142, causing that bistable circuit to reset, disabling gate 136. The reset output from bistable circuit 142 at connection 148 enables a gate 150 so that  
5 the compare circuit 138 is ready to detect the end of the demand time interval.

The signal on connection 148 also enables an AND gate 152. The other input 154 of the AND gate 152 is normally enabled through a delay circuit 156  
10 by a signal from connection 69. The enablement of AND gate 152 provides enabling signals to gates 158 and 160. The gate 158 is connected from the pulse input connection 18A to a third register 162 for the purpose of accumulating pulses as a measure  
15 of present demand. The accumulation of pulses by the third register 162 is only for a limited demand interval.

At the end of each limited demand interval, the contents of the third register 162 are compared  
20 with the contents of the previously measured maximum demand for a similar interval stored in register 86 by means of a compare circuit 164. Compare circuit 164 is enabled for this purpose by a signal on connection 174. If the comparison indicates that  
25 the contents of the present demand register 162 exceed the contents of the maximum demand register 86, then the compare circuit 164 issues a control signal at the connection 166 to a gate 168 which is effective to transfer the pulse count stored in the  
30 present demand register 162 to the maximum demand register 86, as a new maximum value. The comparison



-22-

operation at the end of the present demand interval is initiated by a clock signal from a clock 170 supplied through a connection 172 and gate 160 on connection 174 to the enable input of compare circuit 164. The length of the demand interval is preferably programmable, as schematically indicated at 176 by selecting different clock interval outputs to be supplied on connection 172.

The present demand register 162 is reset through a connection 178, from the clock 170. Reset typically occurs at the end of each present demand interval, and immediately after the initiation of the compare operation through connection 174. However, in accordance with a preferred embodiment of the invention, the reset of the present demand register 162 is only a partial reset, and the relationship between the frequency of the compare enable signal provided at connection 174, and the demand reset signals provided to the present demand register 162 through connection 178 is such as to provide for successively overlapping present demand time intervals, previously referred to above as a "sliding" demand measurement. Each partial reset of the present demand register 162 may simply consist of removing a single count from the register. Thus, register 162 may be of the kind which can be counted up or counted down, the signals provided through gate 158 being effective to count the register up, and the reset signals provided through connection 178 being effective to count the register down.





-23-

The maximum demand register 86 is also connected to the read select control circuit 126 for enablement by that control to provide a read-out on the display bus 18B. Thus, the maximum demand measurement stored in register 86 is one of the alternative measurements which may be displayed. Whenever there is a reestablishment of power to a power customer, after a prior interruption of power, it is known that there may be a high demand for power for an initial interval. If this restoration of power occurs during a time when maximum demand is being measured, it is not desired to make an immediate demand measurement because it is not fair to the customer to have deprived him of power, and then penalize him because he requires additional catch up power to energize his previously neglected loads. Accordingly, the delay circuit 156 is provided which is effective to reenable AND gate 152 through connection 154 only after a predetermined delay interval after power is reinstated, as detected by an input on connection 69, which is a power failure signal, as previously described in connection with FIG. 1.

All of the clocks illustrated in FIG. 5 including the calendar day clock 98, the real time clock register 108, and the clock 170 which controls the demand metering function may be combined in a single clock structure, and are, in any case, controlled by the clock generator 68 of FIG. 1.



-24-

While specific special purpose circuitry is illustrated in FIG. 5 for accomplishing the measurement of the various energy values, it will be understood that these functions may be carried out by the general multi-purpose logic of the microprocessor 12 of FIG. 1 under the control of programs which are preferably stored in the read only memory section 20 of the memory unit 14 of FIG. 1

While only three readable energy measurement storage registers 82, 84 and 86 are illustrated in FIG. 5, it will be understood that a number of other such registers may be provided for the storage of other energy quantities which may be alternatively read out by the read select control 126 to the single display device, as previously explained above.

FIG. 6 schematically illustrates another preferred feature of the invention wherein a system load 182 is reconnected only after a preselected time interval following the reconnection of power after a power outage in the monitored system. For accomplishing this purpose, the load control circuit referred to in relation to connection 60A of the connections 60 in FIG. 2 may be carried out as schematically illustrated in FIG. 6. The circuit is shown to include a time delay control circuit 180 which provides a time delay function for the re-establishment of power to the load schematically illustrated at 182. The initial reapplication of power at connection 60A begins the time delay



-25-

interval. As soon as the time delay interval of  
circuit 180 expires, a signal appears at connection  
184, energizing a winding 186 of a relay, picking  
up and closing the normally open contact 188 of that  
5 relay, and connecting power through a connection 190  
to the load 182.

All of the drawings are simplified schematics.  
It will be understood that additional buffers, shift  
registers and logic gates may be required for  
10 reliable operation.



-26-

## CLAIMS:

1. A multiple rate electrical metering system operable to register total electrical energy consumed by a monitored load as well as electrical energy consumed by said load during at least one  
5 preselected time of use period, said system comprising
- input means (58, 34, 18, FIG. 1; 18A, FIG. 5) adapted to receive pulses which are representative of electrical energy consumption by said load,  
10 means (88, 90, 110, 108, FIG. 5) for detecting the beginning and the end of a first preselected time of use period,
- first register means (82) connected to said input means (at 124) for accumulating the total count of  
15 pulses received during said preselected time of use period,
- second register means (84) connected to said input means for accumulating the total count of pulses received,
- 20 characterized by the provision of a display means (44, FIG. 1) and means (18, 36, 42, 40, 46, FIG. 1; 18B, 126, FIG. 5) interconnecting said registers (82, 84, FIG. 5) and said display means (44) and operable selectively for reading out the contents  
25 of any selected one of said registers (82, 84) to said display means (44) for providing a visual display of the contents of said last named register by said display means (44).

-27-

2. A metering system as claimed in Claim 1, further characterized in the provision of a third register means (162, FIG. 5) connected (at 158) to said input means (18A) for accumulating the count  
5 of pulses received in a succession of predetermined demand time intervals of equal duration during a second pre-selected time of use period as a measure of the maximum rate of demand for power during said second pre-selected time of use period, means  
10 (170, 178) for resetting said third register means at regular intervals related to said demand time intervals so that said third register means can again accumulate a count of pulses to signify a maximum rate of demand during a new demand time  
15 interval, a fourth register means (86) for storing the maximum number of pulses counted during any one of said demand intervals as a measure of maximum demand, means (164) for comparing the total count of pulses stored in said third register  
20 means (162) at the end of each demand interval with the contents of said fourth register means (86) and means (168) operable in response to said comparing means for increasing the count stored in said third register means when the comparison of the count  
25 shows that the count stored in said third register means (162) exceeds the count stored in said fourth register means (86), and said means (18, 36, 42, 40, 46, FIG. 1; 18B, FIG. 5) interconnecting said first and second register means with said display means (44)  
30 being operable to interconnect said fourth register means (86) with said display means (44) for selectively reading out the contents of said fourth register means (86) for display as an alternative to the contents of said first or second register  
35 means (82, 84, FIG. 5).



-28-

3. A metering system as claimed in Claim 2 further characterized in that said means (170, 178, FIG. 5) for resetting said third register means (162) is operable to only partially reset  
5 third register means (162) on each reset operation and characterized in that the time span between successive endings of demand time intervals is less than a demand time interval so that the count of pulses stored in said third register means (162)  
10 at the end of each demand interval represents a count accumulated during a demand interval which overlaps with prior demand intervals.

4. A metering system as claimed in Claim 3 further characterized in the provision of programmable means (176, FIG. 5) which is operable to selectively change the length of each demand time  
5 interval.

5. A metering system (FIG. 1) as claimed in claim 1, 2, 3, or 4, further characterized in the provision of manually operable means (61, FIG. 2) for selectively activating said readout means  
5 (18, 36, 42, 40, 46, FIG. 1; 18B, 126, FIG. 5) to selectively display the contents of any one of said first (82), second (84), and fourth (86) register means at said display means (44).

6. A metering system as claimed in claim 2, 3, or 4, further characterized in the provision of means (64, 69, FIG. 1) for detecting a power outage and means (12, 69, 156, 152, FIG. 5)  
5 connected to said power outage detection means and operable to delay the measurement of the maximum demand rate for a predetermined time period after the re-establishment of power.




-29-

7. A metering system as claimed  
in claim 1,2,3, or 4 further characterized in  
the provision of a storage means (104, FIG. 5) for  
storing a first table of preselected day types in  
5 chronological order by date of occurrence during  
a selected year, means (88,90,92) for storing a  
second table of times of day for the beginning and  
the end of each of said pre-selected time of use  
periods in chronological order by time of occurrence  
10 during each day type, clock means (108) for in-  
dicating real times, and comparison means (110) for  
periodically comparing said stored times for the  
beginning and the end of the time of use periods  
and operable to provide a signal (at 122) upon  
15 detection of a coincidence for control of the  
accumulation of pulses in said first register means  
(82).

8. A metering system as claimed  
in claim 1,2,3, or 4 further characterized in the  
provision of means (180,186,188,FIG. 6) for re-  
connecting a load (182) only after a pre-selected  
5 time interval following the reconnection of power  
after a power outage in the monitored system.


9. A metering system as claimed  
in claim 1,2,3, or 4 further characterized in the  
provision of an optical communication link interface  
(70, FIG. 1; 70, FIG. 4) for transmitting data and  
5 information to an external programmer-tester and for  
receiving data and information from the external  
programmer-tester.

1/6

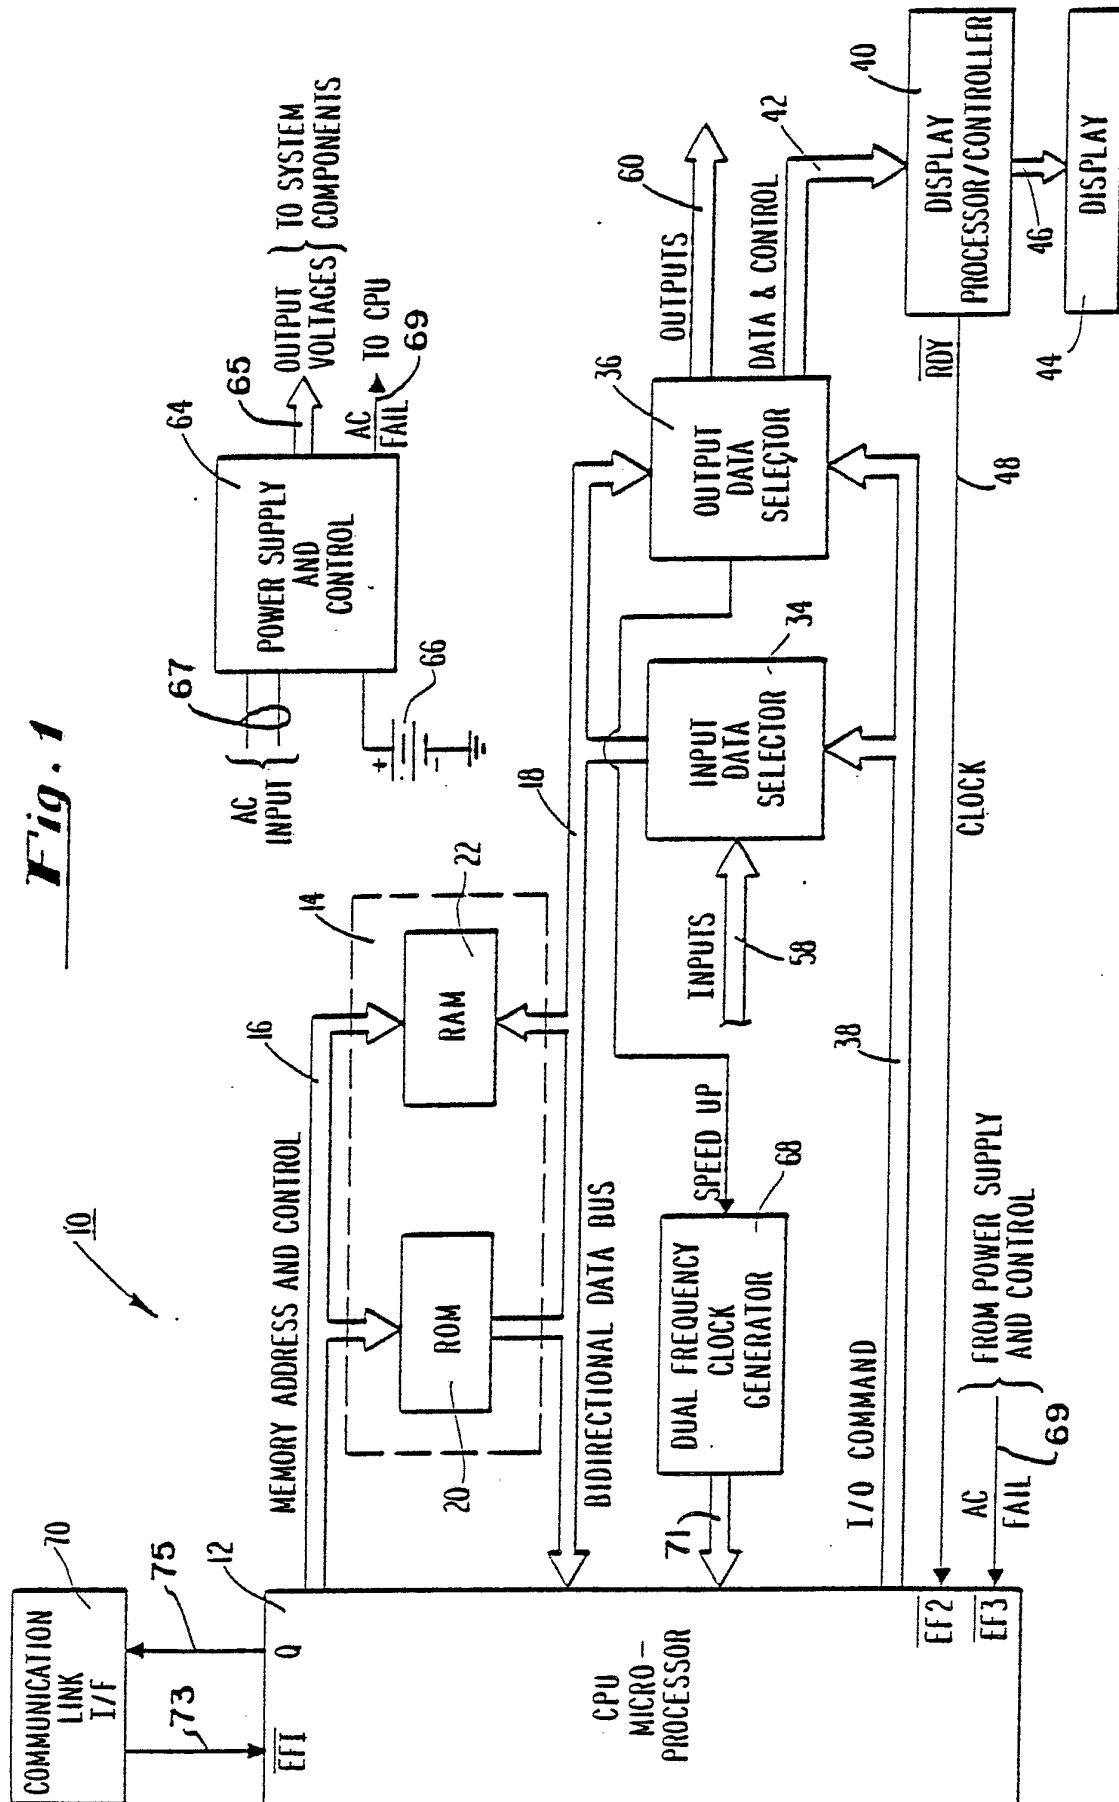
**Fig. 1**



2/6


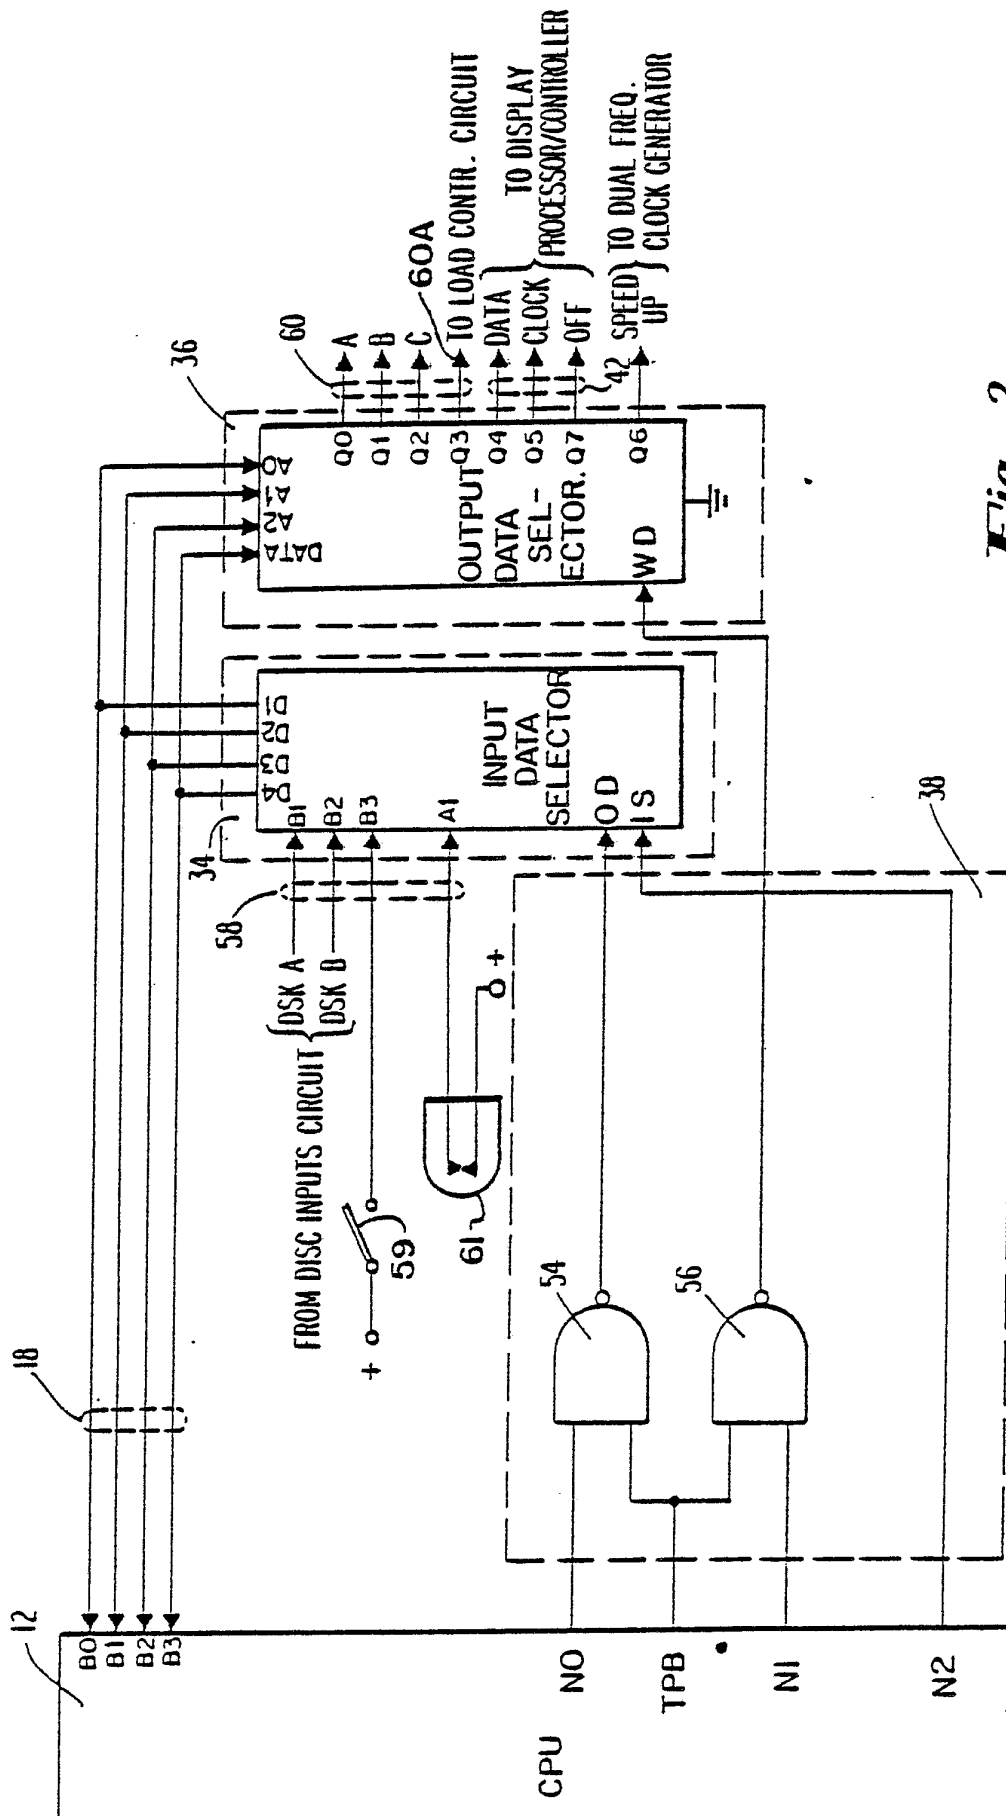


3/6

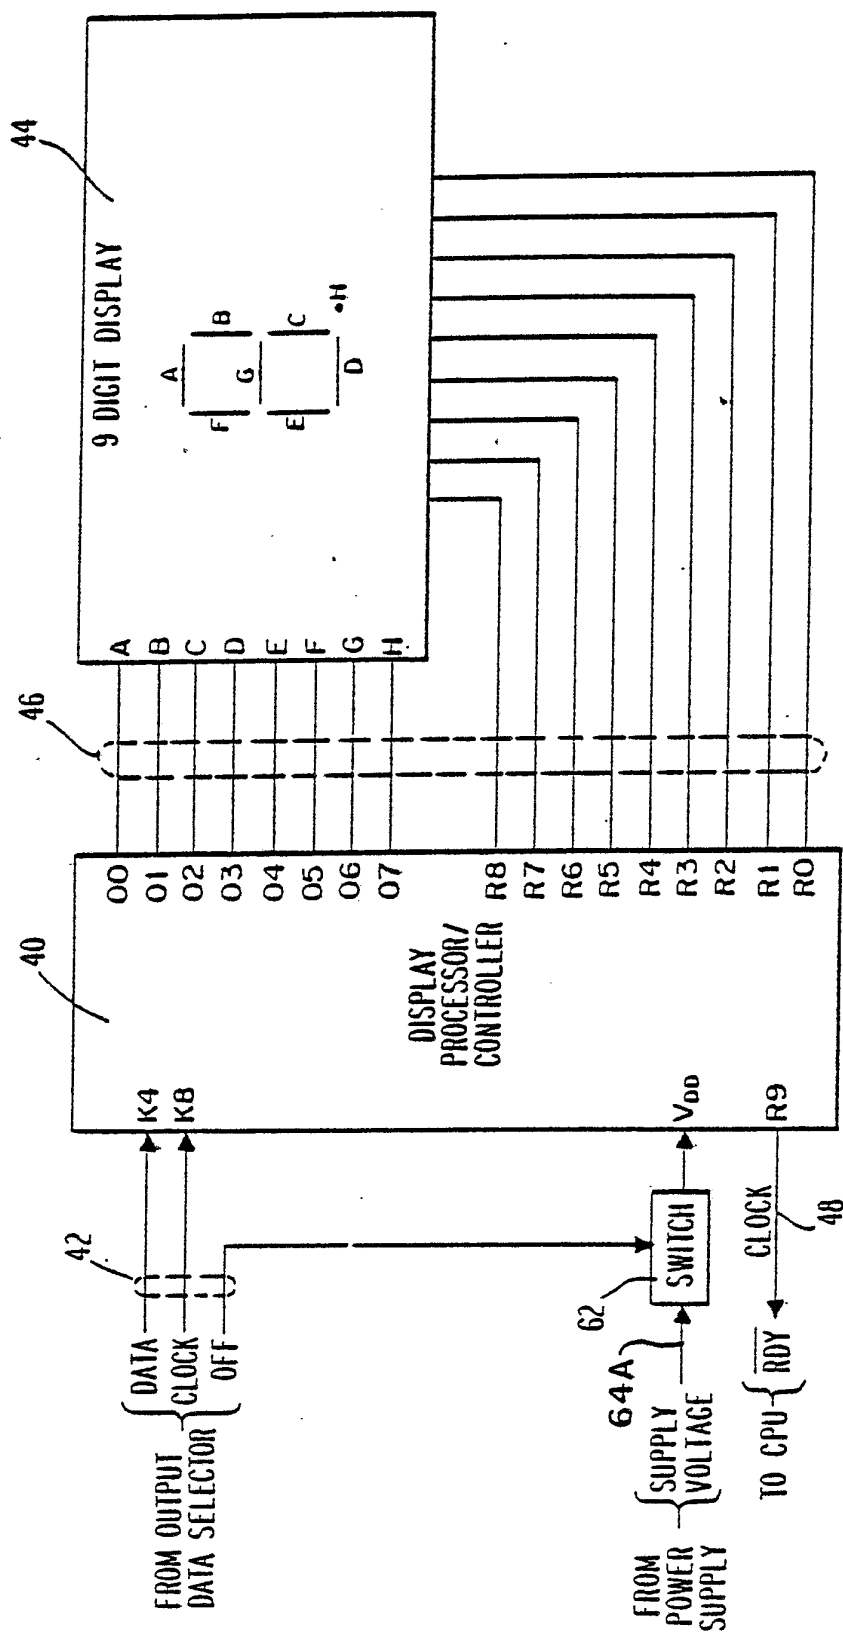


**Fig. 3**


4/6

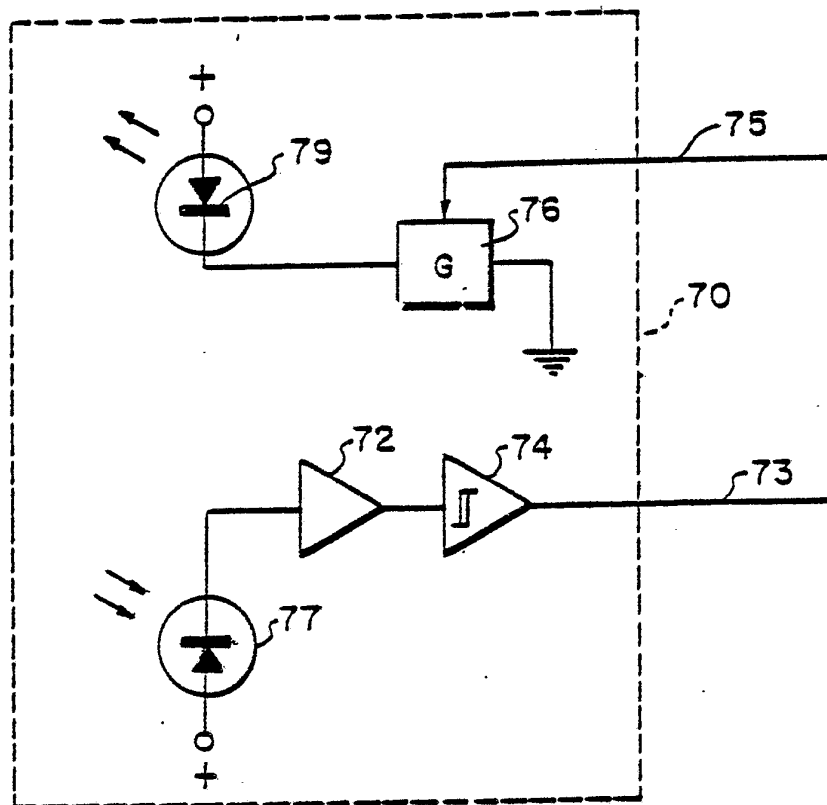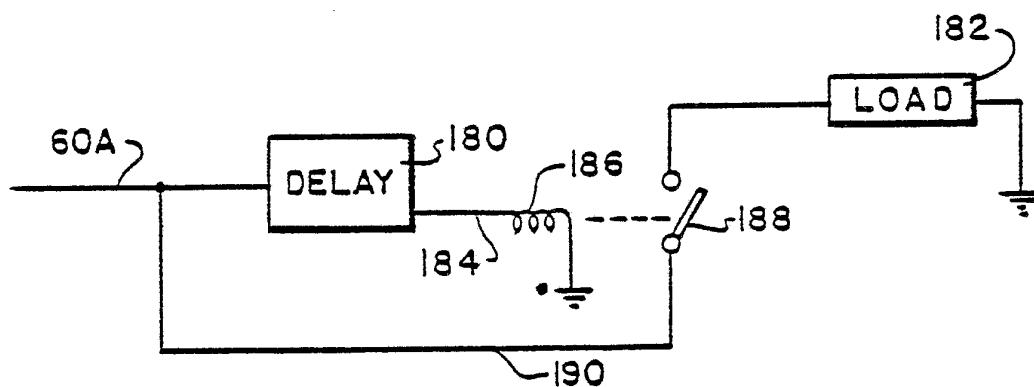**Fig. 4****Fig. 6**

5/6

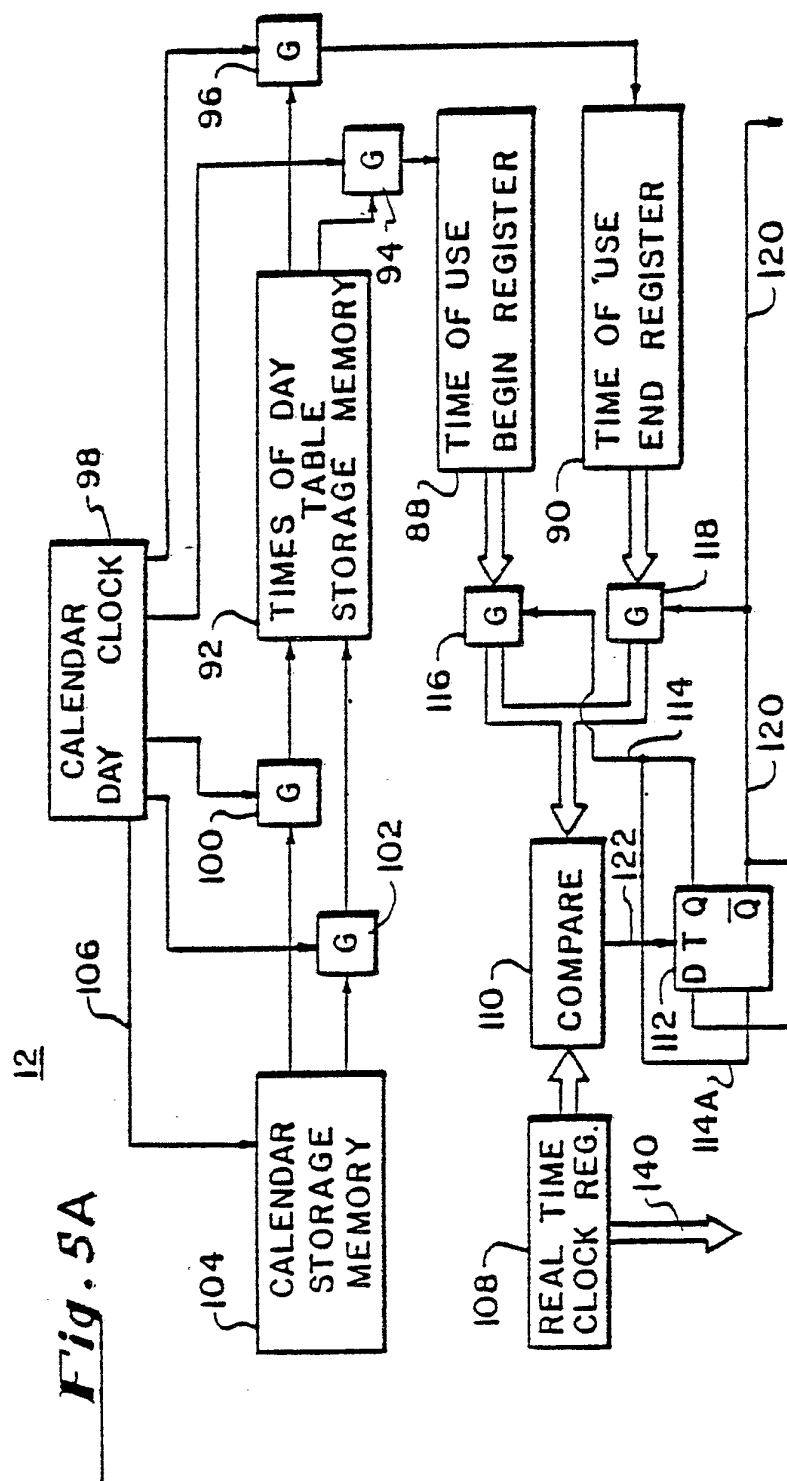

6/6

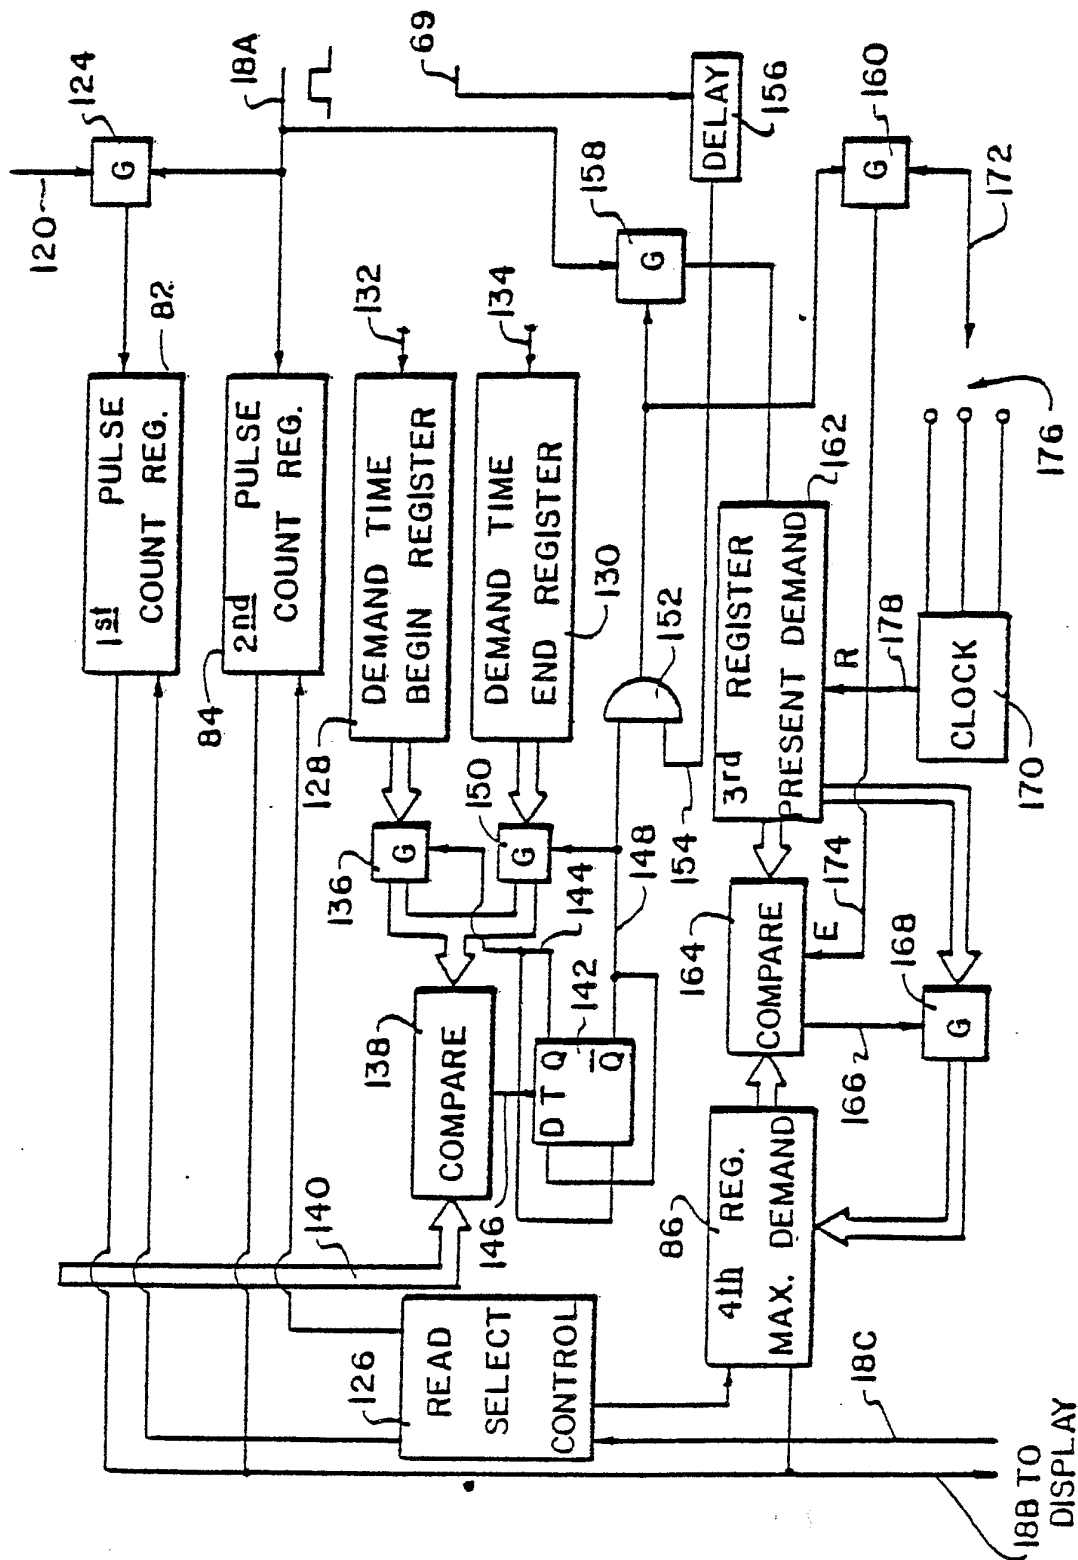*Fig. 5B*

# INTERNATIONAL SEARCH REPORT

International Application No PCT/US82/00204

<b>I. CLASSIFICATION OF SUBJECT MATTER</b> (if several classification symbols apply, indicate all) <sup>3</sup> According to International Patent Classification (IPC) or to both National Classification and IPC INT. CL. <sup>3</sup> G01R 15/08 U.S. CL. 324/116																							
<b>II. FIELDS SEARCHED</b> <div style="text-align: center; margin-top: 10px;">Minimum Documentation Searched <sup>4</sup></div> <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 5px;"> <tr> <th style="width: 20%;">Classification System</th> <th style="width: 80%;">Classification Symbols</th> </tr> <tr> <td style="text-align: center; vertical-align: top;">U.S.</td> <td>324/116, 103R 364/483</td> </tr> </table> <div style="text-align: center; margin-top: 10px;">Documentation Searched other than Minimum Documentation to the extent that such Documents are included in the Fields Searched <sup>5</sup></div>			Classification System	Classification Symbols	U.S.	324/116, 103R 364/483																	
Classification System	Classification Symbols																						
U.S.	324/116, 103R 364/483																						
<b>III. DOCUMENTS CONSIDERED TO BE RELEVANT</b> <sup>14</sup> <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 5px;"> <tr> <th style="width: 10%;">Category <sup>*</sup></th> <th style="width: 60%;">Citation of Document, <sup>16</sup> with indication, where appropriate, of the relevant passages <sup>17</sup></th> <th style="width: 30%;">Relevant to Claim No. <sup>18</sup></th> </tr> <tr> <td style="text-align: center;">X</td> <td>US, A, 4,050,020 published 20 September 1977, GERMER et al</td> <td style="text-align: center;">1-9</td> </tr> <tr> <td style="text-align: center;">X,P</td> <td>US, A, 4,301,508 published 17 November 1981, ANDERSON et al</td> <td style="text-align: center;">1-9</td> </tr> <tr> <td style="text-align: center;">X</td> <td>US, A, 3,502,980 published 24 March 1970, BAGGOTT</td> <td style="text-align: center;">2-9</td> </tr> <tr> <td style="text-align: center;">X,P</td> <td>US, A, 4,298,839 published 03 November 1981, JOHNSTON</td> <td style="text-align: center;">9</td> </tr> <tr> <td style="text-align: center;">X</td> <td>US, A, 4,229,795 published 21 October 1980, VIEWEG et al</td> <td style="text-align: center;">7</td> </tr> <tr> <td style="text-align: center;">A</td> <td>US, A, 4,179,654 published 18 December 1979, GERMER</td> <td style="text-align: center;">1-9</td> </tr> </table>			Category <sup>*</sup>	Citation of Document, <sup>16</sup> with indication, where appropriate, of the relevant passages <sup>17</sup>	Relevant to Claim No. <sup>18</sup>	X	US, A, 4,050,020 published 20 September 1977, GERMER et al	1-9	X,P	US, A, 4,301,508 published 17 November 1981, ANDERSON et al	1-9	X	US, A, 3,502,980 published 24 March 1970, BAGGOTT	2-9	X,P	US, A, 4,298,839 published 03 November 1981, JOHNSTON	9	X	US, A, 4,229,795 published 21 October 1980, VIEWEG et al	7	A	US, A, 4,179,654 published 18 December 1979, GERMER	1-9
Category <sup>*</sup>	Citation of Document, <sup>16</sup> with indication, where appropriate, of the relevant passages <sup>17</sup>	Relevant to Claim No. <sup>18</sup>																					
X	US, A, 4,050,020 published 20 September 1977, GERMER et al	1-9																					
X,P	US, A, 4,301,508 published 17 November 1981, ANDERSON et al	1-9																					
X	US, A, 3,502,980 published 24 March 1970, BAGGOTT	2-9																					
X,P	US, A, 4,298,839 published 03 November 1981, JOHNSTON	9																					
X	US, A, 4,229,795 published 21 October 1980, VIEWEG et al	7																					
A	US, A, 4,179,654 published 18 December 1979, GERMER	1-9																					
<div style="font-size: small;"> <p><sup>*</sup> Special categories of cited documents: <sup>15</sup></p> <p>"A" document defining the general state of the art</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document cited for special reason other than those referred to in the other categories</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but on or after the priority date claimed</p> <p>"T" later document published on or after the international filing date or priority date and not in conflict with the application, but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance</p> </div>																							
<b>IV. CERTIFICATION</b> <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 5px;"> <tr> <td style="width: 50%; padding: 5px;">           Date of the Actual Completion of the International Search <sup>2</sup>   <div style="text-align: center; font-size: large;">02 JUNE 1982</div> </td> <td style="width: 50%; padding: 5px;">           Date of Mailing of this International Search Report <sup>2</sup>   <div style="text-align: center; font-size: large;">08 JUN 1982</div> </td> </tr> <tr> <td style="width: 50%; padding: 5px;">           International Searching Authority <sup>1</sup>   <div style="text-align: center; font-size: large;">ISA/US</div> </td> <td style="width: 50%; padding: 5px;">           Signature of Authorized Officer <sup>19</sup>  <div style="text-align: center;">              Ernest F. Karlson           </div> </td> </tr> </table>			Date of the Actual Completion of the International Search <sup>2</sup>  <div style="text-align: center; font-size: large;">02 JUNE 1982</div>	Date of Mailing of this International Search Report <sup>2</sup>  <div style="text-align: center; font-size: large;">08 JUN 1982</div>	International Searching Authority <sup>1</sup>  <div style="text-align: center; font-size: large;">ISA/US</div>	Signature of Authorized Officer <sup>19</sup> <div style="text-align: center;">              Ernest F. Karlson           </div>																	
Date of the Actual Completion of the International Search <sup>2</sup>  <div style="text-align: center; font-size: large;">02 JUNE 1982</div>	Date of Mailing of this International Search Report <sup>2</sup>  <div style="text-align: center; font-size: large;">08 JUN 1982</div>																						
International Searching Authority <sup>1</sup>  <div style="text-align: center; font-size: large;">ISA/US</div>	Signature of Authorized Officer <sup>19</sup> <div style="text-align: center;">              Ernest F. Karlson           </div>																						