

(43) International Publication Date
21 September 2017 (21.09.2017)(51) International Patent Classification:
H04L 5/00 (2006.01)(21) International Application Number:
PCT/SE2017/050260(22) International Filing Date:
16 March 2017 (16.03.2017)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
62/309,433 16 March 2016 (16.03.2016) US

(71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON (PUBL) [SE/SE]; SE-164 83 Stockholm (SE).

(72) Inventors: SUI, Yutao; Ankdammsgatan 25 lgh 1703, SE-171 67 Solna (SE). WANG, Yi-Pin Eric; 1357 Grosventres Ct, Fremont, California 94539 (US). GRÖVLEN, Asbjörn; Lindhagensgatan 139, lgh 1403, SE-112 15 Stockholm (SE). SHOKRI RAZAGHI, Hazhir; Hanstavägen 49, Lgh 1643, SE-164 53 Kista (SE). BLANKENSHIP, Yufei; 21910 W. Pine Lake Circle, Kildeer, Illinois 60047 (US). LIN, Xingqin; 85 Rio Robles E Unit 3206, San Jose, California 95134 (US). ADHIKARY, Ansuman; 1528 Vista Club Circle, Apt 104, Santa Clara, California 95054 (US). BERGMAN, Johan; Kungsholmsgatan 9, SE-112 27 Stockholm (SE).

(74) Agent: BOU FAICAL, Roger; Ericsson AB, Patent Unit Kista RAN 1, SE-164 80 Stockholm (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: WIRELESS DEVICE, NETWORK NODE AND METHODS IN A WIRELESS COMMUNICATION SYSTEM

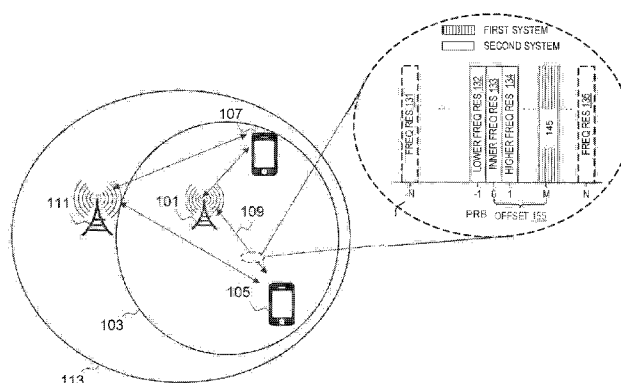


FIG. 1a

(57) Abstract: Embodiments herein relate for example to a method performed by a wireless device in a first wireless communication system that is deployed on a frequency resource. The wireless device receives information indicating a PRB offset and a corresponding channel raster offset. The channel raster offset is an offset in frequency between a channel raster, used by the wireless device (105) in a cell search process, and the frequency resource. The PRB offset indicates an offset between the frequency resource and an inner frequency resource on which a second wireless communication system is deployed. In the frequency domain, the second wireless communication system is deployed on at least one higher frequency resource above the inner frequency resource and at least one lower frequency resource below the inner frequency resource. The wireless device determines, based on the received information, an adjustment in frequency applicable for the frequency resource on which the first wireless communication system is deployed.



**WIRELESS DEVICE, NETWORK NODE AND METHODS IN A WIRELESS
COMMUNICATION SYSTEM**

TECHNICAL FIELD

[0001] The present disclosure relates generally to the field of communications, and in particular to a wireless device, a network node and methods performed in a first wireless communication system. Furthermore, a computer program and a computer readable storage medium are also provided herein.

BACKGROUND

[0002] The Background section of this document is provided to place embodiments of the present disclosure in technological and operational context, to assist those of skill in the art in understanding their scope and utility. Unless explicitly identified as such, no statement herein is admitted to be prior art merely by its inclusion in the Background section.

[0003] Cellular communication systems are currently being developed and improved for machine type communication (MTC), which is a type of communication characterized by lower demands on data rates than for example mobile broadband, but with higher requirements on e.g. low cost device design, better coverage, and ability to operate for years on batteries without charging or replacing the batteries. Currently, Third Generation Partnership Project (3GPP) is standardizing a feature called Narrowband Internet of Things (NB-IoT) for satisfying all the requirements put forward by MTC type applications, while maintaining backward compatibility with the current Long Term Evolution (LTE) radio access technology. A new work item named Narrowband IoT (NB-IoT) has been approved in 3GPP where the objective is to specify a radio access for cellular internet of things that addresses improved indoor coverage, support for massive number of low throughput devices, low delay sensitivity, ultra-low device cost, low device power consumption and (optimized) network architecture.

[0004] NB-IoT systems have three different deployment modes, i.e., stand-alone, guard-band, and in-band. In stand-alone mode, the NB-IoT system is operated in dedicated frequency bands. For in-band operation, the NB-IoT system can be placed inside the frequency bands used by the current LTE system by using one or several LTE Physical Resource Block (PRB) for NB-IoT systems, while in the guard-band mode, the NB-IoT system can be placed in the

frequency band used as guard band by the current LTE system. The NB-IoT has a system bandwidth of 180 kHz.

[0005] A channel raster of e.g. the downlink (DL) of NB-IoT systems is on a frequency grid of 100 kHz, also denoted cell search grid. That is, the NB-IoT devices try to find the NB-IoT carriers in a step size of 100 kHz. For the standalone deployment, this is fine. But for the in-band and guard-band operation, as observed in R1-160082, NB-IoT Channel Raster, source Ericsson, 3GPP TSG-RAN1 NB-IOT Ad Hoc 18th – 20th Jan 2016, Budapest, Hungary, there is no LTE PRB that can be used for NB-IoT deployment that falls directly on the cell search grid used for NB-IoT in LTE in-band operation. The frequency offset to the 100 kHz grid is a minimum of ± 2.5 kHz and ± 7.5 kHz for even and odd number of PRBs in the LTE system bandwidth, respectively (see R1-160082, NB-IoT Channel Raster, source Ericsson, 3GPP TSG-RAN1 NB-IOT Ad Hoc 18th – 20th Jan 2016, Budapest, Hungary). The ± 2.5 kHz or ± 7.5 kHz can be handled by the wireless device during the cell search process and then compensated for. However, these channel raster offsets constrain the positions where NB-IoT carriers can be deployed for the in-band and guard-band operations.

[0006] For the guard-band operation, for an LTE system with 10 or 20 MHz system bandwidth, it is possible to find e.g. NB-IoT downlink carrier frequency that is 2.5 kHz off the 100 kHz channel raster. For other LTE system bandwidths, the offset to the 100 kHz raster is 52.5 kHz. Therefore, in order to get within the same ± 7.5 kHz to the 100 kHz grid, 3 guard subcarriers are needed. One guard carrier is of a 15 kHz width and placed in the same Fast Fourier Transform (FFT) grid at the legacy LTE system that gives orthogonality to the legacy LTE PRB. However, there are no other solutions to put the NB-IoT carriers on the exact 100 kHz raster grids in the LTE guard-band without losing orthogonality to the legacy LTE system. If an NB-IoT system is deployed in the guard-band of an LTE system and not orthogonal to the LTE subcarriers, e.g., to fulfill the 100 kHz channel raster requirement, the existing solution is either to transmit the NB-IoT carrier at a lower power or to use stringent channel filters to ensure that the LTE spectrum mask, which regulates out of band emission levels, is not violated and that there is no significant interference between the NB-IoT system and the LTE system.

[0007] Thus, it may be rather resource consuming or resource inefficient, according to prior art, to enable the wireless device to use a first wireless communication system, such as an NB-IoT system, that is deployed together with a second wireless communication system such as a LTE system.

SUMMARY

[0008] The following presents a simplified summary of the disclosure in order to provide a basic understanding to those of skill in the art. This summary is not an extensive overview of the disclosure and is not intended to identify key/critical elements of embodiments of the disclosure or to delineate the scope of the disclosure. The sole purpose of this summary is to present some concepts disclosed herein in a simplified form as a prelude to the more detailed description that is presented later.

[0009] An object of embodiments herein is to enable or enhance possibility for a wireless device to use a first wireless communication system that is deployed together with a second wireless communication system in an efficient manner. A further object of embodiments herein is to enable or enhance possibility for a wireless device to use a Narrowband Internet of Things (NB-IoT) system that is deployed together with a Long Term Evolution (LTE) system in an efficient manner.

[0010] The object is achieved by providing a method performed by a wireless device in a first wireless communication system that is deployed on a frequency resource. The wireless device receives information indicating a physical resource block (PRB) offset and a corresponding channel raster offset. The channel raster offset is an offset in frequency between a channel raster, used by the wireless device in a cell search process, and the frequency resource, and the PRB offset indicates an offset between the frequency resource and an inner frequency resource on which a second wireless communication system is deployed. In the frequency domain, the second wireless communication system is deployed on at least one higher frequency resource above the inner frequency resource and at least one lower frequency resource below the inner frequency resource. The wireless device further determines, based on the received information, an adjustment in frequency applicable for the frequency resource on which the first wireless communication system is deployed.

[0011] The object is further achieved by providing a method performed by a network node in a first wireless communication system that is deployed on a frequency resource. The network node transmits information indicating a PRB offset and a corresponding channel raster offset. The channel raster offset is an offset in frequency between a channel raster, used by the wireless device in a cell search process, and the frequency resource, and the PRB offset indicates an offset between the frequency resource and an inner frequency resource on which a second wireless communication system is deployed. In the frequency domain, the second wireless communication system is deployed on at least one higher frequency resource above

the inner frequency resource and at least one lower frequency resource below the inner frequency resource.

[0012] It is herein also provided a computer program comprising instructions, which, when executed on at least one processor, causes the at least one processor to carry out the methods herein, as performed by the wireless device or the network node. Furthermore, it is herein provided a computer-readable storage medium, having stored thereon a computer program comprising instructions which, when executed on at least one processor, cause the at least one processor to carry out the methods herein, as performed by the wireless device or the network node.

[0013] The object is further achieved by providing a wireless device for a first wireless communication system that is deployed on a frequency resource. The wireless device is configured to receive information indicating a PRB offset and a corresponding channel raster offset. The channel raster offset is an offset in frequency between a channel raster, used by the wireless device in a cell search process, and the frequency resource. The PRB offset indicates an offset between the frequency resource and an inner frequency resource on which a second wireless communication system is deployed. In the frequency domain, the second wireless communication system is deployed on at least one higher frequency resource above the inner frequency resource and at least one lower frequency resource below the inner frequency resource. The wireless device is further configured to determine, based on the received information, an adjustment in frequency applicable for the frequency resource on which the first wireless communication system is deployed.

[0014] The object is further achieved by providing a network node for a first wireless communication system that is deployed on a frequency resource. The network node is configured to transmit information indicating a PRB offset and a corresponding channel raster offset. The channel raster offset is an offset in frequency between a channel raster, used by a wireless device in a cell search process, and the frequency resource. The PRB offset indicates an offset between the frequency resource and an inner frequency resource on which a second wireless communication system is deployed. In the frequency domain, the second wireless communication system is deployed on at least one higher frequency resource above the inner frequency resource and at least one lower frequency resource below the inner frequency resource.

[0015] Embodiments herein disclose an efficient manner of enabling a wireless device to determine and use, for communication in a first wireless communication system, a frequency

resource of the first wireless communication system that is deployed together with a second wireless communication system, e.g. by being deployed in the guard band or in-band of the second wireless communication system. The manner whereby the wireless device is enabled to determine and use the frequency resource is efficient in that information, transmitted by the network node and received by the wireless device for determining the location of the frequency resource, is independent of the bandwidth of the second wireless communication system. It is further efficient in that, according to at least some embodiments, the information transmitted by the network node indicates, to the wireless device, an adjustment in frequency, e.g. for determining the frequency resource, by indicating, e.g. in form of an index, to the wireless device, the PRB offset, e.g. in numbers of PRBs, and the corresponding channel raster offset. In other words, the transmitted information jointly indicates the PRB offset and the corresponding channel raster offset. This will result in a resource efficient signaling enabling the wireless device to use the first wireless communication system that is deployed together with the second wireless communication system.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016] The present disclosure will now be described more fully hereinafter with reference to the accompanying drawings, in which embodiments of the disclosure are shown. However, this disclosure should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the disclosure to those skilled in the art. Like numbers refer to like elements throughout.

[0017] FIG. 1a illustrates an embodiment of a system for deploying a frequency resource for a first wireless communication system or network according to embodiments herein.

[0018] FIG. 1b illustrates a flowchart depicting a method performed by a wireless device according to embodiments herein.

[0019] FIG. 1c is a schematic overview depicting PRB offset and channel raster offset according to embodiments herein.

[0020] FIG. 1d is a schematic flowchart depicting a method performed by a network node according to embodiments herein.

[0021] FIG. 1e is a combined flowchart and signaling scheme according to embodiments herein.

[0022] FIG. 2a is a block diagram depicting a wireless device according to embodiments herein.

[0023] FIG. 2b is a block diagram depicting a network node according to embodiments herein.

[0024] FIG. 3a illustrates an embodiment of a wireless device in accordance with various aspects as described herein.

[0025] FIG. 3b illustrates another embodiment of a wireless device in accordance with various aspects as described herein.

[0026] FIG. 4 illustrates another embodiment of a wireless device in accordance with various aspects as described herein.

[0027] FIG. 5 illustrates an embodiment of a method performed by a wireless device in accordance with various aspects as described herein.

[0028] FIG. 6 illustrates an embodiment of a network node in accordance with various aspects as described herein.

[0029] FIG. 7 illustrates another embodiment of a network node in accordance with various aspects as described herein.

[0030] FIG. 8 illustrates another embodiment of a network node in accordance with various aspects as described herein.

[0031] FIG. 9 illustrates an embodiment of a method performed by a network node in accordance with various aspects as described herein.

[0032] FIG. 10 illustrates another embodiment of a wireless device in accordance with various aspects as described herein.

[0033] FIG. 11 illustrates embodiments of center frequency offsets of frequency resources for an even and odd number of frequency resources in a system bandwidth of a second wireless communication system in accordance with various aspects as described herein.

[0034] FIG. 12 illustrates a system for deploying a frequency resource in a wireless communication system in accordance with various aspects as described herein.

[0035] FIG. 13 illustrates a system for deploying a frequency resource in a wireless communication system in accordance with various aspects as described herein.

[0036] FIG. 14 illustrates a system for deploying a frequency resource in a wireless communication system in accordance with various aspects as described herein.

[0037] FIG. 15 illustrates a system for deploying a frequency resource in a wireless communication system in accordance with various aspects as described herein.

[0038] FIG. 16 illustrates a system for deploying a frequency resource in a wireless communication system in accordance with various aspects as described herein.

[0039] FIG. 17 illustrates a system for deploying a frequency resource in a wireless communication system in accordance with various aspects as described herein.

DETAILED DESCRIPTION

[0040] For simplicity and illustrative purposes, the present disclosure is described by referring mainly to an exemplary embodiment thereof. In the following description, numerous specific details are set forth in order to provide a thorough understanding of the present disclosure. However, it will be readily apparent to one of ordinary skill in the art that the present disclosure may be practiced without limitation to these specific details. In this description, well known methods and structures have not been described in detail so as not to unnecessarily obscure the present disclosure.

[0041] FIG. 1a illustrates a first wireless communication system and a second wireless communication system, e.g., served by one or more first and second network nodes that may be the same or different network nodes. The first wireless communication system, e.g., a Narrowband Internet of Things (NB-IoT) system, is deployed on one or more frequency resources, including a **frequency resource 145**. In one example, the frequency resource **145** may be a range of contiguous frequencies, a physical resource block (PRB), or the like. In another example, the frequency resource **145** may be a single subcarrier, multiple contiguous subcarriers, or the like. The second wireless communication system, e.g., wideband LTE system, is deployed on one or more frequency resources **131-135**. These frequency resources **131-135** include a so-called **inner frequency resource 133** as well as at least one **higher frequency resource 134** and at least one **lower frequency resource 132**. The at least one higher frequency resource **134** is above the inner frequency resource **133** in the frequency domain, whereas the at least one lower frequency resource **132** is below the inner frequency resource **133** in the frequency domain. The inner frequency resource **133** in this regard may be flanked on either side in the frequency domain with another frequency resource on which the second wireless communication system is deployed. In other words, the at least one higher frequency resource **134** may be of a higher frequency than the frequency of the inner frequency resource **133** and/or the at least one lower frequency resource **132** may be of a lower frequency

than the frequency of the inner frequency resource **133**. Thus, in some embodiments, the second wireless communication system is deployed on frequency resources comprising the inner frequency resource **133** and the at least one higher frequency resource **134** above the inner frequency resource and the at least one lower frequency resource **132** below the inner frequency resource **133**. In other words, the second wireless communication system in these embodiments uses frequency resources comprising the inner frequency resource **133** and the at least one higher frequency resource **134** above the inner frequency resource and the at least one lower frequency resource **132** below the inner frequency resource **133**. It should be noted that where the term "wireless communication system" is used herein to denote entities or structures, the term "wireless communication network" is equally applicable, and can be used as an alternative term. It should further be noted that the expression "an offset between item X and item Y" as used herein for simplicity regarding a channel raster offset and a PRB offset, such as the offset **155** in Figure 1a, should be taken to mean "an offset by which item X is offset from item Y", or as the case may be "an offset by which item Y is offset from item X", or equivalently "an offset from item X to item Y". In other words, the sentence "The channel raster offset is an offset in frequency between a channel raster, used by the wireless device in a cell search process, and the frequency resource, and the PRB offset indicates an offset between the frequency resource and an inner frequency resource on which a second wireless communication system is deployed" should be understood to mean "The channel raster offset is an offset in frequency from a channel raster, used by the wireless device in a cell search process, to the frequency resource, and the PRB offset indicates an offset by which the frequency resource is offset from an inner frequency resource on which a second wireless communication system is deployed".

[0042] In some embodiments, the second wireless communication system may be deployed on one or more other frequency resources in addition to one or more lower, inner, and higher resources **132-134**. As shown, for example, the second wireless communication system may be deployed also on **an additional lower frequency resource 131** and/or **an additional higher frequency resource 135**. In view of these and other embodiments, therefore, the first wireless communication system is in some embodiments deployed in-band of the second wireless communication system. In other embodiments, though, the first wireless communication system may be deployed in a guard band of the second wireless communication system. In still other embodiments, the first wireless communication system may be deployed outside any band of the second wireless communication system, e.g., in a standalone way.

[0043] Irrespective of how or where the first wireless communication system and the second wireless communication system are deployed relative to one another, one or more embodiments herein enable and/or enhance communication of the wireless device in the first wireless communication system by enabling determination of the frequency resource **145** on which the first wireless communication system is deployed. This determination may involve for example determining the location of frequency resource **145** in the frequency domain, e.g., in terms of an index mapped to the frequency resource **145**, where different indices are mapped to different frequency resources e.g. in terms of PRBs.

[0044] Some embodiments herein may relate to deployment of an NB-IoT system in an environment where also an LTE system is deployed, i.e., the NB-IoT system can be deployed within the LTE system or in the guard-band used by the LTE system. The NB-IoT system may be deployed for in-band, guard-band or stand-alone operation. For all deployment modes, a 100 kHz channel raster will be used by wireless devices trying to find the NB-IoT carriers, e.g. in a cell search process. Due to the presence of a Direct Current (DC)-carrier in an LTE system and its position as well as the size of an LTE PRB in frequency domain, i.e., 180 kHz, none of the center frequencies of the LTE PRBs fall directly on the cell search grid of the 100 kHz channel raster for NB-IoT in-band deployment. The channel raster offset to a 100 kHz grid of the channel raster is a minimum of ± 2.5 kHz for even number of PRBs in the LTE system bandwidth, and ± 7.5 kHz for odd number of PRBs in the LTE system bandwidth. As stated above the ± 2.5 kHz or ± 7.5 kHz can be handled by the wireless device during the cell search process and then be compensated for. However, these channel raster offsets constrain the positions where NB-IoT anchor carriers can be deployed for the in-band and guard-band operations.

[0045] In one example embodiment discussed herein, a **wireless device 105**, such as a user equipment (UE), may obtain the information indicating an **offset 155** such as by receiving the information from a **network node 101**. The wireless device **105** may then determine, based on the offset **155** and the inner frequency resource **133** of the second wireless communication system, the frequency resource **145** on which the first wireless communication system is deployed.

[0046] According to further embodiments herein the wireless device **105** receives information indicating a PRB offset, represented by the **offset 155**. As will be explained in the following, the received information also indicates a corresponding channel raster offset. The channel raster offset is an offset in frequency between a channel raster, used by the wireless device **105** in the cell search process, and the frequency resource **145**, e.g. the center of the frequency resource

in case the frequency resource is e.g. a PRB. The PRB offset indicates an offset between the frequency resource **145** and the inner frequency resource **133** on which the second wireless communication system is deployed, which inner frequency resource **133** is thus used by the second wireless communication system. In the frequency domain, the second wireless communication system is deployed on the at least one higher frequency resource **134** above the inner frequency resource **133** and the at least one lower frequency resource **132** below the inner frequency resource **133**. The PRB offset may be expressed as a number of PRBs between the frequency resource **145** and the inner frequency resource **133**, with a positive sign for the PRB offset when the frequency resource **145** is a higher frequency resource than the frequency resource **133**, and a negative sign for the PRB offset when the frequency resource **145** is a lower frequency resource than the inner frequency resource **133**. The channel raster offset also has a sign and an absolute value. The absolute value of the channel raster offset is related to and determined by whether there is an odd or even number of PRBs spanning the system bandwidth of the second wireless communication system and the sign of the channel raster offset is related to and derivable from the sign of the PRB offset. The relation between the sign of the channel raster offset and the sign of the PRB offset is also related to and determined by whether there is an odd or even number of PRBs spanning the system bandwidth of the second wireless communication system. The information indicating the PRB offset may therefore, by being dependent on whether there is an odd or even number of PRBs spanning the system bandwidth of the second wireless communication system and through the relation between the sign of the PRB offset and the sign of the channel raster offset, also indicate the absolute value and sign of the channel raster offset.

[0047] The wireless device **105** further determines, based on the received information, an adjustment in frequency applicable for the frequency resource **145** on which the first wireless communication system is deployed. The adjustment in frequency corresponds to the channel raster offset between a grid point of the channel raster used by the wireless device **105** in the cell search process and the frequency resource **145**. The adjustment in frequency is needed for the wireless device **105** to enable communication with the first wireless communication system after that the grid point of the channel raster has been located during the cell search process, e.g. by the wireless device **105** having received a synchronization signal of the first wireless communication system on the frequency represented by the located grid point. For example, the wireless device **105** may determine the adjustment in frequency to be -7.5 kHz when the sign of the PRB offset is negative and +7.5 kHz when the sign of the PRB offset is positive in a situation when the received information indicating the PRB offset is based on that the second

wireless communication system has a system bandwidth spanning an odd number of PRBs. Furthermore, in a situation when the received information indicating the PRB offset is based on that the second wireless communication system has a system bandwidth spanning an even number of PRBs, the wireless device **105** may determine the adjustment in frequency to be +2.5 kHz when the sign of the PRB offset is negative and -2.5 kHz when the sign of the PRB offset is positive.

[0048] Alternatively described, according to the above referenced further embodiments, the wireless device **105**, such as a user equipment (UE), thus receives information indicating the PRB offset, represented by the **offset 155**. The information indicating the PRB offset is based on whether there is an odd or even number of PRBs spanning a system bandwidth of a second wireless communication system. The PRB offset indicates the offset between the frequency resource **145** on which the first wireless communication system is deployed and the inner frequency resource **133** on which the second wireless communication system is deployed. The inner frequency resource **133** is thus used by the second wireless communication system and the frequency resource **145** is used by the first wireless communication system. In the frequency domain, the second wireless communication system is further deployed on the at least one higher frequency resource **134** above the inner frequency resource **133** and the at least one lower frequency resource **132** below the inner frequency resource **133**. The PRB offset has a sign that is positive when the frequency resource **145** is a higher frequency resource than the inner frequency resource **133**, and negative when the frequency resource **145** is a lower frequency resource than the inner frequency resource **133**. The wireless device **105** further determines, based on the received information, a channel raster offset that corresponds to the indicated PRB offset. The channel raster offset is the offset in frequency between the channel raster and the frequency resource **145** on which the first wireless communication system is deployed. The channel raster is used by the wireless device **105** in the cell search process searching for the first communication system. The channel raster offset corresponds to the PRB offset in that the channel raster offset indicates a frequency adjustment needed to be made by the wireless device **105** to tune to the carrier frequency of the first wireless communication system from the channel raster, e.g. from a grid point on the channel raster, when the first wireless communication system is deployed on the frequency resource **145** indicated by the PRB offset.

[0049] The PRB offset may e.g. be in form of an index for indexing a PRB. The index may be denoted PRB index and may indicate the PRB as the frequency resource **145** assigned to the

first wireless communication system counted from the inner frequency **133**. This indexing may be used both for indexing an anchor PRB signaled in a Master Information Block (MIB) of e.g. the NB-IoT system, and for indexing a non-anchor PRB for multi-carrier operations of e.g. NB-IoT systems. Using this way of indexing PRBs, the information indicating the PRB offset may be signaled in a manner that enables determination of the PRB, and the corresponding channel raster offset, without requiring signaling of the system bandwidth of the second wireless communication system, such as the LTE system bandwidth for the LTE system. Therefore, embodiments herein may be applied for all existing LTE system bandwidths, and be forward compatible if new LTE system bandwidths are defined in the future. For example, in embodiments where the second wireless communication system is the LTE system and where the information indicating the PRB offset is based on whether the LTE system bandwidth spans an even or odd number of PRBs, and where the sign of the PRB offset indicated by the signaled information is related to the sign of the channel raster offset, i.e. the sign of a frequency offset relative to the 100 kHz grid, the channel raster offset can be implicitly derived, from the signaled information, by the wireless device **105**. The way to index the PRB further allows the wireless device **105** to derive LTE Cell Specific Reference Signal (CRS) information without using the LTE system bandwidth. For e.g. in-band operation the existing LTE CRSs can be used by the wireless device **105** during a channel estimation to improve the channel estimation. This also applies for the cases of multi-carrier operation of NB-IoT systems. Information to obtain CRS sequence may also be included in the MIB of the first wireless communication system, e.g. the NB-IoT system. For example, the MIB of the NB-IoT system may include an indication, e.g. in form of a same-PCI indicator, that the NB-IoT system and the LTE system are using a same Physical Cell Identifier (PCI) as well as the information indicating the PRB offset or PRB index. Thus, some embodiments herein enable the wireless device **105** to make use of CRS available within the second wireless communication system for improving channel estimation and/or demodulation for communication with the first wireless communication system.

[0050] Notably, one or more embodiments herein determine the frequency resource **145** on which the first wireless communication system is deployed based on or relative to a certain frequency resource(s) on which the second wireless communication system is deployed. In particular, the certain frequency resource(s) includes the so-called inner frequency resource **133** on which the second wireless communication system is deployed. The inner frequency resource **133** is “inner” in the sense that it is distinct from and inside of the outermost edge frequency resources that define or span the frequency bandwidth occupied by the second wireless communication system, e.g. in the middle of the frequency bandwidth occupied by the

second wireless communication system. This means that the second wireless communication system is deployed on the at least one higher frequency resource **134** above the inner frequency resource **133** in the frequency domain, and is deployed on the at least one lower frequency resource **132** below the inner frequency resource **133** in the frequency domain. In this broad sense, therefore, there may be more than one frequency resource that qualifies as an inner frequency resource.

[0051] In any event, the frequency resource **145** on which frequency resource the first wireless communication system is deployed is offset **155** in frequency from the inner frequency resource **133**, e.g., a given or predefined inner frequency resource. Embodiments herein exploit this offset in order to identify or otherwise determine the frequency resource **145** on which the first wireless communication system is deployed. This offset is denoted PRB offset herein and may be an offset in terms of a number of PRBs.

[0052] For example, in some embodiments, the wireless device **105** is configured to determine the PRB offset **155** between the frequency resource **145** on which the first wireless communication system is deployed and the inner frequency resource **133** on which the second wireless communication system is deployed. The wireless device **105** in this case determines the frequency resource **145** on which the first wireless communication system is deployed, based on the determined PRB offset relative the inner frequency resource **133**. In fact, in one or more embodiments, the wireless device **105** determines this without knowledge of the frequency bandwidth of the second wireless communication system, i.e., the determination is not a function of the second wireless communication system's bandwidth. Accordingly, in some embodiments, the wireless device **105** may not need to be signaled the second wireless communication system's bandwidth as a prerequisite. Rather, the wireless device **105** is simply signaled the information indicating the PRB offset. This information may be signaled as information e.g. in the format of an index. The signaled information may further indicate, at least implicitly, the corresponding channel raster offset. The channel raster offset is the offset in frequency between the channel raster, which channel raster is used by the wireless device **105** in the cell search process, and the frequency resource **145**. The wireless device **105** further determines, based on the received information, e.g. the received index, an adjustment in frequency applicable for the frequency resource on which the first wireless communication system is deployed. Thus, the wireless device **105** is enabled to use the first wireless communication system.

[0053] In one embodiment, the network node **101** such as a base station may assign, e.g. to the first wireless communication system, the frequency resource **145** on which the first wireless communication system is deployed. The first wireless communication system may be a narrowband communication system such as NB-IoT. The frequency resource **145** may be in-band, in a guard-band, or outside any band of the second wireless communication system. The network node **101** may determine the PRB offset **155** between the frequency resource **145** on which the first communication system is deployed and the inner frequency resource **133** on which the second wireless communication system is deployed. The network node **101** may further determine whether there is an odd or even number of PRBs spanning a system bandwidth of the second wireless communication system. The network node **101** may further determine the channel raster offset that corresponds to the determined PRB offset **155**. The network node **101** may then generate, based on whether there is an odd or even number of PRBs spanning the system bandwidth of the second wireless communication system, information indicating the PRB offset. The information may for example be generated such that the information indicating the PRB offset, e.g. the above mentioned index, differs depending on whether there is an odd or even number of PRBs spanning a system bandwidth of a second wireless communication system. The generated information may further indicate, at least implicitly, the channel raster offset that corresponds to the PRB offset. The network node **101** transmits the information to the wireless device **105** to enable the wireless device **105** to determine the corresponding frequency resource **145**.

[0054] The wireless device **105** may obtain the information indicating the offset **155** by receiving, from the network node **101**, the information generated by the network node **101** based on whether there is an odd or even number of PRBs spanning the system bandwidth of the second wireless communication system. The wireless device **105** may then determine, based on the offset **155** from the inner frequency resource **133** of the second wireless communication system, the frequency resource **145** on which the first wireless communication system is deployed. The wireless device **105** may be determined in some embodiments the frequency resource **145** on which the first wireless communication system is deployed by determining, based on the information received from the network node **101**, the channel raster offset that corresponds to the indicated offset **155**.

[0055] The system may include the network node **101**, also referred to as the first network node, with a **first coverage area 103** and a **second network node 111** with a **second coverage area 113**. The network node **101** may be configured to support the first wireless

communication system. In one example, the first wireless communication system may be one or more narrowband communication systems such as an NB-IoT system. Further, the network node **101** may be a base station, an access point, a wireless router, or the like. The network node **101** may serve one or more wireless devices **105** and **107** via radio link interfaces such as **radio link interface 109**. The second network node **111** may be configured to support the second wireless communication system. In one example, the second wireless communication system may be one or more wideband communication systems such as LTE, New Radio (NR) or LTE-Next (NX), Universal Mobile Telecommunications System (UMTS), Global System for Mobile communications (GSM), or the like. Further, the second network node **111** may be a base station, an access point, a wireless router, or the like. The second network node **111** may also serve the wireless devices **105** and **107**. The network node **101** and the second network node **111** may be the same network node or different network nodes and may communicate with each other over a link.

[0056] In another embodiment, the network node **101** may allow the wireless devices **105** and **107** to operate in different operation modes. The network node **101** may allow the wireless devices **105** and **107** to operate in standalone spectrum. In one example, the standalone spectrum may be a dedicated frequency spectrum of the first wireless communication system. Further, the network node **101** may allow the wireless devices **105** and **107** to operate in a guard band of the second wireless communication system corresponding to the second network node **111**. In one example, the guard band may be a frequency spectrum that is in a guard band of a wideband communication system like that of the second wireless communication system. In another example, the guard band may be a frequency spectrum of a wideband communication system, like that of the second wireless communication system, which frequency spectrum is not in-band. Also, the first network node **101** may allow the wireless devices **105** and **107** to operate in-band of the second wireless communication system, such as a wideband communication system, corresponding to the second network node **111**. In one example, the in-band may be a frequency spectrum in the operating band of a wideband communication system. In another example, the in-band may be frequency spectrum of a wideband communication system that is not a guard-band of the wideband communication system.

[0057] The method actions performed by the wireless device **105** in the first wireless communication system that is deployed on the frequency resource according to some embodiments will now be described with reference to a flowchart depicted in **Fig. 1b**. Actions

performed in some, but not necessarily all, embodiments are marked with dashed boxes. The method may be for enabling or enhancing communication in or with the first wireless communication system.

[0058] Action 115. The wireless device **105** may receive, during the cell search process using the channel raster, a synchronization signal of the first wireless communication network. The wireless device **105** may guess the channel raster offset, e.g. 2.5 kHz or 7.5 kHz, already when processing the received synchronization signal during the cell search. However, this needs to be confirmed later by signaling information indicating, at least implicitly, the channel raster offset. After being synchronized with the first wireless communication system by processing the synchronization signal or signals, the wireless device **105** receives the information as stated in action 120.

[0059] Action 120. The wireless device **105** receives information indicating the PRB offset and the corresponding channel raster offset. The channel raster offset is the offset in frequency between the channel raster, which channel raster is used by the wireless device **105** in the cell search process, and the frequency resource **145** on which the first wireless communication system is deployed. The PRB offset indicates the offset between the frequency resource **145** and the inner frequency resource **133** on which the second wireless communication system is deployed. In the frequency domain, the second wireless communication system is deployed on the at least one higher frequency resource **134** above the inner frequency resource **133** and the at least one lower frequency resource **132** below the inner frequency resource **133**. The wireless device **105** may receive the information by receiving a MIB of the first wireless communication system, which MIB may comprise five bits indicating the PRB offset and, at least implicitly, the corresponding channel raster offset. Receiving the information enables the wireless device **105** to determine, based on the PRB offset, cell-specific reference signal (CRS) information of the second communication system and to use this information for improving channel estimation, and/or for demodulation, in the first wireless communication system. The received information may comprise an index indicating the PRB offset and, at least implicitly, the corresponding channel raster offset.

[0060] Action 125. The wireless device **105** determines, based on the received information, the adjustment in frequency applicable for the frequency resource **145** on which the first wireless communication system is deployed.

[0061] Since the PRB offset **155** is indicated relative to the inner frequency resource **133** there is no need to signal the system bandwidth. Therefore, it can be applied for all cases of system

bandwidth, and be forward compatible if new and different system bandwidths are defined in the future.

[0062] In some embodiments the wireless device **105**, for the first wireless communication system that is deployed on the frequency resource **145**, receives (action 120) information indicating the PRB offset wherein the information indicating the PRB offset is based on whether there is an odd or even number of PRBs spanning a system bandwidth of the second wireless communication system. The PRB offset indicates the offset between the frequency resource **145** on which the first wireless communication system is deployed and the inner frequency resource **133** on which the second wireless communication system is deployed. In the frequency domain, the second wireless communication system is deployed on the at least one higher frequency resource **134** above the inner frequency resource **133** and the at least one lower frequency resource **132** below the inner frequency resource **133**. The PRB offset has a sign that is positive when the frequency resource **145** is a higher frequency resource than the inner frequency resource **133**, and negative when the frequency resource **145** is a lower frequency resource than the inner frequency resource **133**.

[0063] Furthermore, the wireless device **105** may determine, based on the received information, a channel raster offset corresponding to the indicated PRB offset, wherein the channel raster offset is an offset in frequency between a channel raster, which channel raster is used by the wireless device **105** in a cell search process, and the frequency resource **145** on which the first wireless communication system is deployed.

[0064] Fig. 1c illustrates the PRB offset (O_{PRB}), analogous to offset **155** in Figure 1, and channel raster offset (O_{CR}) for a first wireless system that is deployed on a frequency resource **145** within the frequency band of the second wireless communication system, for the case where the system bandwidth of the second wireless communication system comprises or spans an uneven number of PRBs. The channel raster grid is shown below the PRBs. In this example, each PRB has a width of 180 kHz in the frequency dimension. The PRB offset O_{PRB} indicates the offset, e.g. in terms of number of PRBs, between a center frequency of the frequency resource **145**, on which the first wireless communication system is deployed, and a middle frequency (f_i), which is a DC carrier dividing the inner frequency resource **133** in two halves. The PRB offset O_{PRB} is counted starting from the inner frequency resource **133**. The channel raster offset O_{CR} indicates the offset between the channel raster, used by the wireless device **105** in the cell search process, and the frequency resource **145**, i.e. the offset in frequency (to the center frequency of the frequency resource **145**) relative to a grid point on the channel

raster. For example, the wireless device **105** performs a cell search process and receives a synchronization signal of the first communication system at a 900 kHz grid point of the channel raster. The wireless device **105** then receives information indicating the PRB offset O_{PRB} , e.g. a PRB offset of minus five, indicating that the first wireless communication system is deployed on PRB index minus five and that the channel raster offset is -7,5 kHz, since the channel raster offset that corresponds to PRB offset minus five, when the system bandwidth of the second communication system spans an odd number of PRBs, is -7,5 kHz. This may be retrieved from a table configured at the wireless device **105**. Thus the wireless device **105** may tune to the frequency resource **145** on -907,5 kHz from the channel raster grid point -900 kHz.

[0065] The method actions performed by the network node **101** in the first wireless communication system that is deployed on the frequency resource **145** according to some embodiments will now be described with reference to a flowchart depicted in **Fig. 1d**. Actions performed in some, but not necessarily all, embodiments are marked with dashed boxes. The method may be for enabling, or enhancing the possibilities for, the wireless device to communicate with or in the first wireless communication system.

[0066] Action 150. The network node **101** may transmit the synchronization signal to be received by the wireless device **105** during the cell search process.

[0067] Action 151. The network node **101** may determine the PRB offset for the frequency resource on which the first wireless communication system is deployed and the corresponding channel raster offset. The network node **101** may determine whether there is an odd or even number of PRBs spanning a system bandwidth of the second wireless communication system.

[0068] Action 152. The network node **101** may further generate the information indicating the PRB offset and the corresponding channel raster offset.

[0069] Action 153. The network node **101** transmits the information indicating the PRB offset and the corresponding channel raster offset. The channel raster offset is the offset in frequency between a channel raster, used by the wireless device **105** in the cell search process, and the frequency resource **145**. The PRB offset indicates the offset between the frequency resource **145** and the inner frequency resource **133** on which the second wireless communication system is deployed. In the frequency domain, the second wireless communication system is deployed on the at least one higher frequency resource **134** above the inner frequency resource and the at least one lower frequency resource **132** below the inner frequency resource. The network node **101** may transmit the information by transmitting a MIB of the first wireless communication

system, which MIB may comprise five bits indicating the PRB offset and, at least implicitly, the corresponding channel raster offset. The MIB may further comprise a same-PCI indicator indicating same PCI of the first and second wireless communication systems. Alternatively, the information may be transmitted using RRC signaling to the wireless device **105**. The transmitted information may comprise an index indicating the PRB offset and, at least implicitly, the corresponding channel raster offset.

[0070] In some embodiments the network node **101**, transmits (action 153) information indicating the PRB offset wherein the information indicating the PRB offset is based on whether there is an odd or even number of PRBs spanning a system bandwidth of the second wireless communication system. The PRB offset indicates the offset between the frequency resource **145** on which the first wireless communication system is deployed and the inner frequency resource **133** on which the second wireless communication system is deployed. In the frequency domain, the second wireless communication system is deployed on the at least one higher frequency resource **134** above the inner frequency resource **133** and the at least one lower frequency resource **132** below the inner frequency resource **133**. The PRB offset has a sign that is positive when the frequency resource **145** is a higher frequency resource than the inner frequency resource **133**, and negative when the frequency resource **145** is a lower frequency resource than the inner frequency resource **133**.

[0071] Fig. 1e is a combined flowchart and signaling scheme according to embodiments herein. The actions may be performed in any suitable order.

[0072] Action 160. The wireless device **105** may try to find a carrier of the second communication system in a step size of a channel raster e.g. in a step size of 100 kHz, by detecting/receiving the synchronization signal on the carrier, e.g. receiving the NB-IoT Primary Synchronization Sequence (NB-PSS) and/or the NB-IoT Secondary Synchronization Sequence (NB-SSS) and retrieving the cell identity (ID).

[0073] Action 161. The first network node **101** transmits reference signals such as Narrowband Reference signals (NRS) according to a predefined mapping in the frequency domain.

[0074] Action 162. The network node **101** may transmit the MIB over the first communication system.

[0075] Action 163. The wireless device **105** reads, using the received NRS known from the synchronization signal, the information indicating the PRB offset and the corresponding channel

raster offset from the MIB on the found carrier. The MIB may comprise the PRB index and further the same-PCI indicator.

[0076] Action 164. The wireless device **105** determines, based on the information received in action 163, the adjustment in frequency applicable for the frequency resource **145** on which the first wireless communication system is deployed and adjusts accordingly i.e. tunes to the center frequency of the frequency resource **145** of the first wireless communication system.

[0077] Action 165. The first network node **101** transmits further NRSs.

[0078] Action 166. The second network node **111** transmits CRS according to a predefined mapping in the frequency domain.

[0079] Action 167. The wireless device **105** may then perform channel estimation based on the NRS and CRS. E.g. the wireless device **105** may read the information that is included in the MIB to obtain a CRS sequence. The MIB may further include the same-PCI indicator indicating that the same PCI is used. The PRB offset and the same-PCI indicator may be used to determine where CRS of the second communication system are located, which CRS may be used by the wireless device **105** for channel estimation of the channel set up to the first wireless communication system and/or demodulation of communications from the first wireless communication system.

[0080] Fig. 2a is a block diagram depicting the wireless device **105** in the first wireless communication system that is deployed on the frequency resource **145**.

[0081] The wireless device **105** may comprise **processing circuitry 170**, e.g. one or more processors, configured to perform the methods herein.

[0082] The wireless device **105** may comprise a **receiving module 171**, e.g. a receiver or a transceiver. The wireless device **105**, the processing circuitry **170**, and/or the receiver or the receiving module **171** is configured to receive information indicating the PRB offset and the corresponding channel raster offset. The channel raster offset is the offset in frequency between the channel raster, used by the wireless device **105** in the cell search process, and the frequency resource **145**. The PRB offset indicates the offset between the frequency resource **145** and the inner frequency resource **133** on which the second wireless communication system is deployed. In the frequency domain, the second wireless communication system is deployed on the at least one higher frequency resource **134** above the inner frequency resource **133** and the at least one lower frequency resource **132** below the inner frequency resource **133**.

[0083] The wireless device **105** may comprise a **determining module 172**. The wireless device **105**, the processing circuitry **170**, and/or the determining module **172** is configured to determine, based on the received information, the adjustment in frequency applicable for the frequency resource **145** on which the first wireless communication system is deployed.

[0084] The wireless device **105**, the processing circuitry **170**, and/or the receiver or the receiving module **171** may be configured to receive, during the cell search process using the channel raster, the synchronization signal of the first wireless communication system.

[0085] That the wireless device **105**, the processing circuitry **170**, and/or the receiver or the receiving module **171** is being configured to receive the information indicating the PRB offset and the corresponding channel raster offset may enable the wireless device **105** to determine, based on the PRB offset, CRS information of the second communication system and to use this information for channel estimation and/or for demodulation in the first wireless communication system.

[0086] The wireless device **105**, the processing circuitry **170**, and/or the receiver or the receiving module **171** may be configured to receive the information by being configured to receive a MIB of the first wireless communication system, which MIB comprises five bits indicating the PRB offset and the corresponding channel raster offset.

[0087] The information may comprise the index indicating the PRB offset and, at least implicitly, the corresponding channel raster offset.

[0088] The wireless device **105**, the processing circuitry **170**, and/or the receiver or the receiving module **171** may be configured to receive information indicating the PRB offset, wherein the information indicating the PRB offset is based on whether there is an odd or even number of PRBs spanning a system bandwidth of a second wireless communication system. The PRB offset indicates an offset between the frequency resource **145** on which the first wireless communication system is deployed and an inner frequency resource **133** on which the second wireless communication system is deployed. In the frequency domain, the second wireless communication system is deployed on at least one higher frequency resource **134** above the inner frequency resource **133** and at least one lower frequency resource **132** below the inner frequency resource **133**. The PRB offset has a sign that is positive when the frequency resource **145** is a higher frequency resource than the inner frequency resource **133**, and negative when the frequency resource **145** is a lower frequency resource than the inner frequency resource **133**.

[0089] The wireless device **105**, the processing circuitry **170**, and/or the determining module **172** may be configured to determine, based on the received information, a channel raster offset corresponding to the indicated PRB offset, wherein the channel raster offset is an offset in frequency between a channel raster, which channel raster is used by the wireless device in a cell search process, and the frequency resource **145** on which the first wireless communication system is deployed.

[0090] The wireless device **105** further comprises a **memory 173** comprising one or more memory units. The memory **173** comprises instructions executable by the processing circuitry **170** to perform the methods herein when being executed in the wireless device **105**. The memory **173** is arranged to be used to store e.g. information, data such as indices, PRB indices, tables, channel raster grid, cell search configurations, PRB offsets, channel raster offsets, and application(s) to perform the methods described herein when being executed on e.g. a processor, etc.

[0091] The methods according to the embodiments described herein for the wireless device **105** may be respectively implemented by means of e.g. a **computer program 174** or a computer program product, comprising instructions, i.e., software code portions, which, when executed on at least one processor, cause the at least one processor to carry out the actions described herein, as performed by the wireless device **105**. The computer program **174** may be stored on a **computer-readable storage medium 175**, e.g. a disc or similar. The computer-readable storage medium **175**, having stored thereon the computer program, may comprise the instructions which, when executed on at least one processor, e.g. downloaded and ran, cause the at least one processor to carry out the actions described herein, as performed by the wireless device **105**. In some embodiments, the computer-readable storage medium may be a non-transitory computer-readable storage medium.

[0092] **Fig. 2b** is a block diagram depicting the network node **101** in the first wireless communication system that is deployed on the frequency resource **145**.

[0093] The network node **101** may comprise **processing circuitry 180**, e.g. one or more processors, configured to perform the methods herein.

[0094] The network node **101** may comprise a **transmitting module 181**, e.g. a transmitter or a transceiver. The network node **101**, the processing circuitry **180**, and/or the transmitter or the transmitting module **181** is configured to transmit the information indicating the PRB offset and the corresponding channel raster offset. The channel raster offset is the offset in frequency

between the channel raster used by the wireless device **105** in the cell search process and the frequency resource **145**. The PRB offset indicates the offset between the frequency resource **145** and the inner frequency resource **133** on which the second wireless communication system is deployed. In the frequency domain, the second wireless communication system is deployed on the at least one higher frequency resource **134** above the inner frequency resource **133** and the at least one lower frequency resource **132** below the inner frequency resource **133**.

[0095] The network node **101**, the processing circuitry **180**, and/or the transmitter or the transmitting module **181** may be configured to transmit the synchronization signal to be received by the wireless device **105** during the cell search process.

[0096] The network node **101** may comprise a **determining module 182**. The wireless device **105**, the processing circuitry **180**, and/or the determining module **182** may be configured to determine the channel raster offset and the PRB offset for the frequency resource **145** on which the first wireless communication system is deployed.

[0097] The network node **101** may comprise a **generating module 183**. The wireless device **105**, the processing circuitry **180**, and/or the generating module **183** may be configured to generate the information indicating the determined PRB offset and the corresponding channel raster offset.

[0098] The network node **101**, the processing circuitry **180**, and/or the transmitter or the transmitting module **181** may be configured to transmit the MIB of the first wireless communication system, which MIB comprises five bits indicating the PRB offset and the corresponding channel raster offset. The MIB may further comprise the same-PCI indicator.

[0099] The transmitted information may comprise an index indicating the PRB offset and the corresponding channel raster offset.

[00100] The network node **101**, the processing circuitry **180**, and/or the transmitter or the transmitting module **181** may be configured to transmit the information indicating the PRB offset, wherein the information indicating the PRB offset is based on whether there is an odd or even number of PRBs spanning a system bandwidth of a second wireless communication system. The PRB offset indicates an offset between the frequency resource **145** on which the first wireless communication system is deployed and an inner frequency resource **133** on which the second wireless communication system is deployed. In the frequency domain, the second wireless communication system is deployed on at least one higher frequency resource **134** above the inner frequency resource **133** and at least one lower frequency resource **132** below

the inner frequency resource **133**. The PRB offset has a sign that is positive when the frequency resource **145** is a higher frequency resource than the inner frequency resource **133**, and negative when the frequency resource **145** is a lower frequency resource than the inner frequency resource **133**.

[00101] The network node **101** further comprises a **memory 184** comprising one or more memory units. The memory **184** comprises instructions executable by the processing circuitry **180** to perform the methods herein when being executed in the network node **101**. The memory **184** is arranged to be used to store e.g. information, data such as allocation of frequency resources, indices, PRB indices, tables, channel raster grid, cell search configurations, PRB offsets, channel raster offsets, and application(s) to perform the methods described herein when being executed on e.g. a processor, etc.

[00102] The methods according to the embodiments described herein for the network node **101** may be respectively implemented by means of e.g. a **computer program 185** or a computer program product, comprising instructions, i.e., software code portions, which, when executed on at least one processor, cause the at least one processor to carry out the actions described herein, as performed by the network node **101**. The computer program **185** may be stored on a **computer-readable storage medium 186**, e.g. a disc or similar. The computer-readable storage medium **186**, having stored thereon the computer program, may comprise the instructions which, when executed on at least one processor, cause the at least one processor to carry out the actions described herein, as performed by the network node **101**. In some embodiments, the computer-readable storage medium may be a non-transitory computer-readable storage medium.

[00103] **FIG. 3a** illustrates one embodiment of a wireless device **200** for deploying a frequency resource in a wireless communication system in accordance with various aspects as described herein. The illustrated wireless device **200** comprises a receiver **201**, an obtaining circuit **203**, a determination circuit **205**, and a transmitter **207**.

[00104] **FIG. 3b** illustrates another embodiment of a wireless device **300** for deploying a frequency resource in a first wireless communication system in accordance with various aspects as described herein. The illustrated wireless device **300** comprises a processing circuit or circuits **301**, a memory **303**, a radio frequency (RF) interface **305**, and one or more antennas **307**. The processing circuit or circuits may comprise a receiving module **311**, an obtaining module **313**, a determining module **315** and/or a transmitting module **317**.

[00105] FIG. 4 illustrates another embodiment of a wireless device **400** for deploying a frequency resource in a wireless communication system in accordance with various aspects as described herein. The illustrated wireless device **400** may comprise a receiving module **401**, an obtaining module **403**, a determining module **405** and/or a transmitting module **407**.

[00106] FIG. 5 illustrates one embodiment of a method **500** by a wireless device for deploying a frequency resource in a wireless communication system in accordance with various aspects as described herein.

[00107] Action **501**. By the wireless device receive a first signal from a network node.

[00108] Action **503**. The wireless device obtains, from the signal, information indicating the offset between the frequency resource on which the first wireless communication system is deployed and the inner frequency resource on which the second wireless communication system is deployed. In the frequency domain, the second wireless communication system is deployed on the at least one higher frequency resource above the inner frequency resource and the at least one lower frequency resource below the inner frequency resource.

[00109] Action **505**. The wireless device determines, based on the offset and the inner frequency resource, the frequency resource on which the first wireless communication system is deployed.

[00110] Action **507**. The wireless device may transmit a second signal on the determined frequency resource to the network node.

[00111] FIG. 6 illustrates one embodiment of a network node **600** for deploying a frequency resource in a first wireless communication system in accordance with various aspects as described herein. The illustrated network node **600** comprises a determination circuit **601**, a generating circuit **603**, a transmitter **607**, and a receiver **609**. The frequency resource deployed for the first wireless communication network that is offset to the inner frequency on which the second wireless communication network is deployed. An offset information is transmitted to the wireless device from the transmitter **607**.

[00112] FIG. 7 illustrates another embodiment of a network node **700** for deploying a frequency resource in a wireless communication system in accordance with various aspects as described herein. The illustrated network node **700** comprises a processing circuit or circuits **701**, a memory **703**, a radio frequency (RF) interface **705**, and one or more antennas **707**. The processing circuit or circuits **701** may comprise a determining module **711**, a generating module **713**, a transmitting module **715** and/or a receiving module **717**.

[00113] FIG. 8 illustrates another embodiment of a network node **800** for deploying a frequency resource in a wireless communication system in accordance with various aspects as described herein. The illustrated network node **800** may comprise a determining module **801**, a generating module **803**, a transmitting module **805** and/or a receiving module **807**.

[00114] FIG. 9 illustrates one embodiment of a method by a network node for deploying a frequency resource in a wireless communication system in accordance with various aspects as described herein.

[00115] **Action 901.** The network node determines an offset between the frequency resource on which the first wireless communication system is deployed and the inner frequency resource on which the second wireless communication system is deployed. In the frequency domain, the second wireless communication system is deployed on the at least one higher frequency resource above the inner frequency resource and the at least one lower frequency resource below the inner frequency resource.

[00116] **Action 903.** The network node generates information indicating the offset to enable the wireless device to determine the frequency resource on which the first wireless communication system is deployed.

[00117] **Action 905.** The network node transmits the information to the wireless device.

[00118] **Action 907.** The network node may receive a signal on the frequency resource from the wireless device.

[00119] Of course, despite particular applicability to NB-IoT in some examples, it will be appreciated that the techniques may be applied to other wireless networks, including eMTC as well as to successors of the Evolved-Universal Terrestrial Radio Access Network (E-UTRAN). Thus, references herein to signals using terminology from the 3GPP standards for LTE should be understood to apply more generally to signals having similar characteristics and/or purposes, in other networks.

[00120] A radio node herein is any type of node (e.g., a base station or wireless communication device) capable of communicating with another node over radio signals. A network node is any type of radio node within a wireless communication network, such as a base station, an access point, a wireless router, or the like. The network node may further be a transmission and reception point e.g. a radio-access network node such as a Wireless Local Area Network (WLAN) access point or Access Point Station (AP STA), an access controller, a base station e.g. a radio base station such as a NodeB, an evolved Node B (eNB, eNode B), a

base transceiver station, a radio remote unit, an Access Point Base Station, a base station router, a transmission arrangement of a radio base station, a stand-alone access point or any other network unit capable of communicating with a wireless device within the service area served by the radio network node depending e.g. on the radio access technology and terminology used. A wireless device or wireless communication device is any type of radio node capable of communicating with a network node over radio signals. The wireless device may therefore refer to a machine-to-machine (M2M) device, a machine-type communications (MTC) device, a NB-IoT device, etc.. The wireless device may also be a User Equipment (UE), however it should be noted that the UE does not necessarily have a “user” in the sense of an individual person owning and/or operating the device. A wireless device may also be referred to as a radio device, a radio communication device, a wireless terminal, or simply a terminal – unless the context indicates otherwise, the use of any of these terms is intended to include device-to-device UEs or devices, machine-type devices or devices capable of machine-to-machine communication, sensors equipped with a wireless device, wireless-enabled table computers, mobile terminals, smart phones, laptop-embedded equipped (LEE), laptop-mounted equipment (LME), USB dongles, wireless customer-premises equipment (CPE), etc. In the discussion herein, the terms machine-to-machine (M2M) device, machine-type communication (MTC) device, wireless sensor, and sensor may also be used. It should be understood that these devices may be UEs, but are generally configured to transmit and/or receive data without direct human interaction.

[00121] In an IoT scenario, a wireless device as described herein may be, or may be comprised in, a machine or device that performs monitoring or measurements, and transmits the results of such monitoring measurements to another device or a network. Particular examples of such machines are power meters, industrial machinery, or home or personal appliances, e.g. refrigerators, televisions, personal wearables such as watches etc. In other scenarios, a wireless device as described herein may be comprised in a vehicle and may perform monitoring and/or reporting of the vehicle’s operational status or other functions associated with the vehicle.

[00122] Furthermore, in an NB-IoT context, it may be the case that, to support lower manufacturing costs for NB-IOT devices, the transmission bandwidth is reduced to one physical resource block (PRB) of size 180KHz. Both frequency division duplexing (FDD) and Time Division Duplexing (TDD) are supported. For FDD (i.e. the transmitter and receiver operate at different carrier frequencies) only half-duplex mode needs to be supported in the wireless

device. The lower complexity of the devices (e.g. only one transmission/receiver chain) means that a small number of repetitions might be needed also in normal coverage. Further, to alleviate wireless device complexity, the working assumption may be to have cross-subframe scheduling. That is, a transmission is first scheduled on Enhanced Physical DL Control Channel (E-PDCCH aka M-EPDCCH) and then the first transmission of the actual data on the Physical DL Shared Channel (PDSCH) is carried out after the final transmission of the M-EPDCCH.

[00123] FIG. 10 illustrates another embodiment of a wireless device **1000**, in accordance with various aspects as described herein. In some instances, the wireless device **1000** may be referred as a network node, a base station (BS), an access point (AP), a user equipment (UE), a mobile station (MS), a terminal, a cellular phone, a cellular handset, a personal digital assistant (PDA), a smartphone, a wireless phone, an organizer, a handheld computer, a desktop computer, a laptop computer, a tablet computer, a set-top box, a television, an appliance, a game device, a medical device, a display device, a metering device, or some other like terminology. In other instances, the wireless device **1000** may be a set of hardware components. In FIG. 10, the wireless device **1000** may be configured to include a processor **1001** that is operatively coupled to an input/output interface **1005**, a radio frequency (RF) interface **1009**, a network connection interface **1011**, a memory **1015** including a random access memory (RAM) **1017**, a read only memory (ROM) **1019**, a storage medium **1031** or the like, a communication subsystem **1051**, a power source **1013**, another component, or any combination thereof. The storage medium **1031** may include an operating system **1033**, an application program **1035**, data **1037**, or the like. Specific devices may utilize all of the components shown in FIG. 10, or only a subset of the components, and levels of integration may vary from device to device. Further, specific devices may contain multiple instances of a component, such as multiple processors, memories, transceivers, transmitters, receivers, etc. For instance, a computing device may be configured to include a processor and a memory.

[00124] In FIG. 10, the processor **1001** may be configured to process computer instructions and data. The processor **1001** may be configured as any sequential state machine operative to execute machine instructions stored as machine-readable computer programs in the memory, such as one or more hardware-implemented state machines (e.g., in discrete logic, FPGA, ASIC, etc.); programmable logic together with appropriate firmware; one or more stored-program, general-purpose processors, such as a microprocessor or Digital Signal Processor (DSP), together with appropriate software; or any combination of the above. For example, the processor **1001** may include two computer processors. In one definition, data is information in a

form suitable for use by a computer. It is important to note that a person having ordinary skill in the art will recognize that the subject matter of this disclosure may be implemented using various operating systems or combinations of operating systems.

[00125] In the current embodiment, the input/output interface **1005** may be configured to provide a communication interface to an input device, output device, or input and output device. The wireless device **1000** may be configured to use an output device via the input/output interface **1005**. A person of ordinary skill will recognize that an output device may use the same type of interface port as an input device. For example, a USB port may be used to provide input to and output from the wireless device **1000**. The output device may be a speaker, a sound card, a video card, a display, a monitor, a printer, an actuator, an emitter, a smartcard, another output device, or any combination thereof. The wireless device **1000** may be configured to use an input device via the input/output interface **1005** to allow a user to capture information into the wireless device **1000**. The input device may include a mouse, a trackball, a directional pad, a trackpad, a presence-sensitive input device, a display such as a presence-sensitive display, a scroll wheel, a digital camera, a digital video camera, a web camera, a microphone, a sensor, a smartcard, and the like. The presence-sensitive input device may include a digital camera, a digital video camera, a web camera, a microphone, a sensor, or the like to sense input from a user. The presence-sensitive input device may be combined with the display to form a presence-sensitive display. Further, the presence-sensitive input device may be coupled to the processor. The sensor may be, for instance, an accelerometer, a gyroscope, a tilt sensor, a force sensor, a magnetometer, an optical sensor, a proximity sensor, another like sensor, or any combination thereof. For example, the input device may be an accelerometer, a magnetometer, a digital camera, a microphone, and an optical sensor.

[00126] In FIG. **10**, the RF interface **1009** may be configured to provide a communication interface to RF components such as a transmitter, a receiver, and an antenna. The network connection interface **1011** may be configured to provide a communication interface to a network **1043a**. The network **1043a** may encompass wired and wireless communication networks such as a local-area network (LAN), a wide-area network (WAN), a computer network, a wireless network, a telecommunications network, another like network or any combination thereof. For example, the network **1043a** may be a Wi-Fi network. The network connection interface **1011** may be configured to include a receiver and a transmitter interface used to communicate with one or more other nodes over a communication network according to one or more communication protocols known in the art or that may be developed, such as Ethernet, TCP/IP,

SONET, ATM, or the like. The network connection interface **1011** may implement receiver and transmitter functionality appropriate to the communication network links (e.g., optical, electrical, and the like). The transmitter and receiver functions may share circuit components, software or firmware, or alternatively may be implemented separately.

[00127] In this embodiment, the RAM **1017** may be configured to interface via the bus **1003** to the processor **1001** to provide storage or caching of data or computer instructions during the execution of software programs such as the operating system, application programs, and device drivers. In one example, the wireless device **1000** may include at least one hundred and twenty-eight megabytes (128 Mbytes) of RAM. The ROM **1019** may be configured to provide computer instructions or data to the processor **1001**. For example, the ROM **1019** may be configured to be invariant low-level system code or data for basic system functions such as basic input and output (I/O), startup, or reception of keystrokes from a keyboard that are stored in a non-volatile memory. The storage medium **1031** may be configured to include memory such as RAM, ROM, programmable read-only memory (PROM), erasable programmable read-only memory (EPROM), electrically erasable programmable read-only memory (EEPROM), magnetic disks, optical disks, floppy disks, hard disks, removable cartridges, flash drives. In one example, the storage medium **1031** may be configured to include an operating system **1033**, an application program **1035** such as a web browser application, a widget or gadget engine or another application, and a data file **1037**.

[00128] In FIG. 10, the processor **1001** may be configured to communicate with a network **1043b** using the communication subsystem **1051**. The network **1043a** and the network **1043b** may be the same network or networks or different network or networks. The communication subsystem **1051** may be configured to include one or more transceivers used to communicate with the network **1043b**. The one or more transceivers may be used to communicate with one or more remote transceivers of another wireless device such as a base station of a radio access network (RAN) according to one or more communication protocols known in the art or that may be developed, such as IEEE **1002.xx**, code division multiple access (CDMA), wideband code division multiple access (WCDMA), GSM, LTE, Universal Terrestrial Radio Access Network (UTRAN), WiMax, or the like.

[00129] In another example, the communication subsystem **1051** may be configured to include one or more transceivers used to communicate with one or more remote transceivers of another wireless device such as user equipment according to one or more communication protocols known in the art or that may be developed, such as IEEE **1002.xx**, CDMA, WCDMA,

GSM, LTE, UTRAN, WiMax, or the like. Each transceiver may include a transmitter **1053** or a receiver **1055** to implement transmitter or receiver functionality, respectively, appropriate to the RAN links (e.g., frequency allocations and the like). Further, the transmitter **1053** and the receiver **1055** of each transceiver may share circuit components, software or firmware, or alternatively may be implemented separately.

[00130] In the current embodiment, the communication functions of the communication subsystem **1051** may include data communication, voice communication, multimedia communication, short-range communications such as Bluetooth, near-field communication, location-based communication such as the use of the global positioning system (GPS) to determine a location, another like communication function, or any combination thereof. For example, the communication subsystem **1051** may include cellular communication, Wi-Fi communication, Bluetooth communication, and GPS communication. The network **1043b** may encompass wired and wireless communication networks such as a local-area network (LAN), a wide-area network (WAN), a computer network, a wireless network, a telecommunications network, another like network or any combination thereof. For example, the network **1043b** may be a cellular network, a Wi-Fi network, and a near-field network. The power source **1013** may be configured to provide an alternating current (AC) or direct current (DC) power to components of the wireless device **1000**.

[00131] In **FIG. 10**, the storage medium **1031** may be configured to include a number of physical drive units, such as a redundant array of independent disks (RAID), a floppy disk drive, a flash memory, a USB flash drive, an external hard disk drive, thumb drive, pen drive, key drive, a high-density digital versatile disc (HD-DVD) optical disc drive, an internal hard disk drive, a Blu-Ray optical disc drive, a holographic digital data storage (HDDS) optical disc drive, an external mini-dual in-line memory module (DIMM) synchronous dynamic random access memory (SDRAM), an external micro-DIMM SDRAM, a smartcard memory such as a subscriber identity module or a removable user identity (SIM/RUIM) module, other memory, or any combination thereof. The storage medium **1031** may allow the wireless device **1000** to access computer-executable instructions, application programs or the like, stored on transitory or non-transitory memory media, to off-load data, or to upload data. An article of manufacture, such as one utilizing a communication system may be tangibly embodied in storage medium **1031**, which may comprise a computer-readable medium.

[00132] The functionality of the methods described herein may be implemented in one of the components of the wireless device **1000** or partitioned across multiple components of the

wireless device **1000**. Further, the functionality of the methods described herein may be implemented in any combination of hardware, software or firmware. In one example, the communication subsystem **1051** may be configured to include any of the components described herein. Further, the processor **1001** may be configured to communicate with any of such components over the bus **1003**. In another example, any of such components may be represented by program instructions stored in memory that when executed by the processor **1001** performs the corresponding functions described herein. In another example, the functionality of any of such components may be partitioned between the processor **1001** and the communication subsystem **1051**. In another example, the non-computative-intensive functions of any of such components may be implemented in software or firmware and the computative-intensive functions may be implemented in hardware.

[00133] FIG. 11 illustrates embodiments of center frequency offsets of frequency resources for an even and odd number of frequency resources in a system bandwidth of a wireless communication system in accordance with various aspects as described herein. The channel raster offsets O_{CR} for different PRBs are disclosed. For the case of a system bandwidth of an even number of PRBs, for PRB n and PRB $n+5$ the channel raster offset is $-2,5$ kHz (i.e. for the wireless device to tune to the PRB from the channel raster grid). For PRB $n-1$ and PRB $n-6$ the channel raster offset is $+2,5$ kHz (i.e. for the wireless device to tune to the PRB from the channel raster grid). For the case of a system bandwidth of an uneven number of PRBs, for PRB $n+5$ the channel raster offset is $+7,5$ kHz (i.e. for the wireless device to tune to the PRB from the channel raster grid). For PRB $n-5$ the channel raster offset is $-7,5$ kHz (i.e. for the wireless device to tune to the PRB from the channel raster grid). As stated in the further embodiments explained below, if a 100 kHz raster is used, not all PRBs can be used for NB-IoT in-band deployment. For the guard-band operation, though the granularity does not need to be 1 PRB, in order to maintain orthogonality to the legacy LTE system and limited to the offset to ± 2.5 kHz or ± 7.5 kHz from 100 kHz raster grid, only some positions in the LTE guard-band can be used for the NB-IoT downlink carriers. ± 2.5 kHz and ± 7.5 kHz offset from the 100 kHz grid can be accommodated by the cell search process.

[00134] Cellular communication systems are currently being developed and improved for machine type communication (MTC), communication characterized by lower demands on data rates than for example mobile broadband, but with higher requirements on e.g. low cost device design, better coverage, and ability to operate for years on batteries without charging or replacing the batteries. Currently, 3GPP is standardizing a feature called Narrowband Internet of

Things (NB-IoT) for satisfying all the requirements put forward by MTC type applications, while maintaining backward compatibility with the current LTE radio access technology. At 3GPP RAN#70 meeting, a new work item named Narrowband IoT (NB-IoT) was approved, see. The objective is to specify a radio access for cellular internet of things that addresses improved indoor coverage, support for massive number of low throughput devices, low delay sensitivity, ultra-low device cost, low device power consumption and (optimized) network architecture.

[00135] For NB-IoT, three different operation modes are defined, i.e., stand-alone, guard-band, and in-band. In stand-alone mode, the NB-IoT system is operated in dedicated frequency bands. For in-band operation, the NB-IoT system can be placed inside the frequency bands used by the current LTE system, while in the guard-band mode, the NB-IoT system can be placed in the guard band used by the current LTE system. The NB-IoT has a system bandwidth of 180 kHz.

[00136] The channel raster of the downlink of NB-IoT systems is on a frequency grid of 100 kHz. That is the NB-IoT devices try to find the NB-IoT carriers in a step size of 100 kHz. For the standalone deployment, this is fine. But for the in-band and guard-band operation, as observed in [2], due to the presence of the DC-carrier and the fact the center of the PRB is in between two sub-carriers, there is no PRB that falls directly on the cell search grid used in LTE in-band operation. The frequency offset to the 100 kHz grid is a minimum of ± 2.5 kHz and ± 7.5 kHz for even and odd number of PRBs in the LTE system bandwidth, respectively. This is shown in Figure 11, and detailed description of this problem is given in [2] and [3]. The ± 2.5 kHz or ± 7.5 kHz can be handled by the device during the cell search process and then compensated [4] [5]. However, these offsets constrain the positions where NB-IoT carriers can be deployed for the in-band and guard-band operations.

[00137] For the guard-band operation, as showed in [2] that for an LTE system with 10 or 20 MHz system bandwidth, it is possible to find NB-IoT downlink carrier frequency that is 2.5 kHz off the 100 kHz frequency raster. For other LTE system bandwidth, the offset to the 100 kHz raster is 52.5 kHz. Therefore, in order to get within the same ± 7.5 kHz to the 100 kHz grid, 3 guard subcarriers are needed. One guard carrier is 15 kHz width and placed in the same FFT grid at the legacy LTE system that gives orthogonality to the legacy LTE PRB. However, there are no other solutions to put the NB-IoT carriers on the exact 100 kHz raster grids on the LTE guard-band without losing orthogonality to the legacy LTE system.

[00138] For the in-band operation, the existing LTE CRSs can be used by the NB-IoT devices to improve the channel estimation. As it is agreed that the information to obtain CRS

sequence is included in MIB, the MIB needs to include the same-PCI indicator and the PRB index [1].

[00139] The existing solution is either to transmit the NB-IoT carrier at a lower power or use stringent channel filter to ensure the LTE spectrum mask is not violated.

[00140] It is herein disclosed a novel way to index the PRB for NB-IoT in-band operation. This indexing can be used both for the anchor PRB signaled in the MIB, or for indexing the non-anchor PRB for multi-PRB operations of NB-IoT systems.

[00141] The proposed solution can index the PRB without signaling the LTE system bandwidth. Therefore, it can be applied for all cases, and be forward compatible if new LTE system bandwidth is defined in the future. Further, this proposed solution provides more flexibility of NB-IoT guard-band deployment without impacting the legacy LTE system.

[00142] **Figure 11** illustrates the center frequency offsets of LTE PRBs from even and odd system bandwidths. The DC carrier is placed in between of two PRBs (even number of PRBs) or in the middle of the middle PRB (odd number cases). As discussed in [2] [3], if a 100 kHz raster is used, not all PRBs can be used for NB-IoT in-band deployment. For the guard-band operation, though the granularity does not need to be 1 PRBs, in order to maintain orthogonality to the legacy LTE system and limited the offset to ± 2.5 kHz or ± 7.5 kHz from 100 kHz raster grid, only several positions in the LTE guard-band can be used for the NB-IoT downlink carriers [2]. In the evaluations in [4] [5], ± 2.5 kHz and ± 7.5 kHz offset from the 100 kHz grid can be accommodated by the cell search process.

[00143] For the in-band operation, the existing LTE CRSs can be used by the NB-IoT devices to improve the channel estimation. This also applies for the cases of multi-PRB operation of NB-IoT systems.

[00144] In order to obtain the exact LTE CRS information, PCID and PRB index may be needed. In the current system, since the PRB index is defined from low to high frequency, we signal the system bandwidth together with the PRB index in order to obtain the exact LTE CRS information. It is herein proposed a new way to signal the PRB index. The new method does not need to use the LTE system bandwidth to derive the LTE CRS information.

[00145] The LTE CRS positions in frequency domain can be derived from the PCID, and it is agreed in RAN1 NB-IoT Ad Hoc that "Note that the PCID from NB-SSS and the LTE PCID indicate the same LTE CRS position" [1]. Therefore, in order to obtain the exact LTE CRS information, the PRB position of the NB-IoT system needs to be indicated.

[00146] Regarding the multi-PRB operation in NB-IoT, if the anchor carrier is in the guard-band and the non-anchor carrier(s) are in-band, either the PCID can be chosen the same as what has been stated above, i.e., “Note that the PCID from NB-SSS and the LTE PCID indicate the same LTE CRS position” [1], to facilitate the LTE CRS derivation, or the PCID of the LTE system can be sent to NB-IoT devices via high layer signaling. The PRB indexing methods described in this disclosure can then be applied to indicate the position of the non-anchor PRBs.

[00147] Notice, the LTE CRS is generated in the manner as follows [7].

[00148] “The reference-signal sequence $r_{l,n_s}(m)$ is defined by

$$\mathbf{[00149]} \quad r_{l,n_s}(m) = \frac{1}{\sqrt{2}}(1 - 2 \cdot c(2m)) + j \frac{1}{\sqrt{2}}(1 - 2 \cdot c(2m+1)), \quad m = 0, 1, \dots, 2N_{\text{RB}}^{\text{max,DL}} - 1$$

[00150] where n_s is the slot number within a radio frame and l is the OFDM symbol number within the slot. The pseudo-random sequence $c(i)$ is defined in clause 7.2. The pseudo-random sequence generator shall be initialized with

$c_{\text{init}} = 2^{10} \cdot (7 \cdot (n'_s + 1) + l + 1) \cdot (2 \cdot N_{\text{ID}}^{\text{cell}} + 1) + 2 \cdot N_{\text{ID}}^{\text{cell}} + N_{\text{CP}}$ at the start of each OFDM symbol where

$$\mathbf{[00151]} \quad n'_s = \begin{cases} 10 \lfloor n_s / 10 \rfloor + n_s \bmod 2 & \text{for frame structure type 3 when the CRS is part of a DRS} \\ n_s & \text{otherwise} \end{cases}$$

$$N_{\text{CP}} = \begin{cases} 1 & \text{for normal CP} \\ 0 & \text{for extended CP} \end{cases}$$

[00152] The reference signal sequence $r_{l,n_s}(m)$ shall be mapped to complex-valued

modulation symbols $a_{k,l}^{(p)}$ used as reference symbols for antenna port p in slot n_s according to

$$\mathbf{[00153]} \quad a_{k,l}^{(p)} = r_{l,n_s}(m')$$

[00154] where

$$\begin{aligned}
 k &= 6m + (v + v_{\text{shift}}) \bmod 6 \\
 l &= \begin{cases} 0, N_{\text{syb}}^{\text{DL}} - 3 & \text{if } p \in \{0,1\} \\ 1 & \text{if } p \in \{2,3\} \end{cases} \\
 m &= 0, 1, \dots, 2 \cdot N_{\text{RB}}^{\text{DL}} - 1 \\
 m' &= m + N_{\text{RB}}^{\text{max,DL}} - N_{\text{RB}}^{\text{DL}}
 \end{aligned}$$

[00155]

[00156] The variables v and v_{shift} define the position in the frequency domain for the different reference signals where v is given by

$$v = \begin{cases} 0 & \text{if } p = 0 \text{ and } l = 0 \\ 3 & \text{if } p = 0 \text{ and } l \neq 0 \\ 3 & \text{if } p = 1 \text{ and } l = 0 \\ 0 & \text{if } p = 1 \text{ and } l \neq 0 \\ 3(n_s \bmod 2) & \text{if } p = 2 \\ 3 + 3(n_s \bmod 2) & \text{if } p = 3 \end{cases}$$

[00157]

[00158] The cell-specific frequency shift is given by $v_{\text{shift}} = N_{\text{ID}}^{\text{cell}} \bmod 6$.

[00159] From the ways that the LTE CRSs are generated, we can use a new way to index the PRB which gives the same m' , which is used to determine the LTE CRS information. To be more specific, for all the systems, as long as the offset from the middle PRB is known, the LTE CRS can be determined. Therefore, it is only necessary to signal the offset between the NB-IoT PRB to the offset of the LTE middle PRB.

[00160] Define the new PRB index numbering that starts from the middle as

$$n'_{\text{PRB}} = n_{\text{PRB}} - (N_{\text{RB}}^{\text{DL}} - N_{\text{RB}}^{\text{DL}} \bmod 2) / 2,$$

[00161]

[00162] where n_{PRB} is the original PRB index, and n'_{PRB} is the new indexing being signaled, i.e. an example of the information indicating the PRB offset and the corresponding channel raster offset being signaled to the wireless device 105. Notice that the sign of n'_{PRB} is related to the sign of the channel raster offset. Therefore, the sign of the channel raster offset can be implicitly derived from n'_{PRB} .

[00163] Then m' is still calculated as $m' = m + N_{RB}^{maxDL} - N_{RB}^{DL}$, but with m being substituted by $n = 2 \cdot n'_{PRB} + N_{RB}^{DL} - N_{RB}^{DL} \bmod 2 + \tilde{m}$. Here $\tilde{m} = 0,1$ for all the cases. As we can see from the calculation, N_{RB}^{DL} is not needed in calculating m' , and therefore the LTE system bandwidth does not need to be signaled. Moreover, since the odd and even number of PRBs is related to the absolute value of the channel raster offset, no additional signaling is needed. Another advantage of using this method is forward compatibility, if new LTE system bandwidth is defined in the further.

[00164] Please there are several ways to express n . The one we choose is one of the possibilities. As long as the final value of m' is the same, the LTE CRS can be successfully derived.

[00165] Please notice that in practice there are several ways to signal or derive the value of n'_{PRB} . One straight forward way is to directly signal the value of n'_{PRB} . This can be used for the multi-PRB operations. Another way is to indirectly signal n'_{PRB} . For example, we can scale n'_{PRE} with a given step size. If every 5 PRBs are used, then n'_{PRE} can be -2, -1, 0, 1, 2, ..., and then we multiply it with the step size of 5 that gives, ... -10, -5, 0, 5, 10 as the actual indexing value. We will not describe all the possible ways to signal n'_{PRE} .

[00166] An example is given in the following paragraph to facilitate the understanding of the proposed indexing method. In this example, we use 10 MHz LTE system as an example to illustrate the proposed indexing method. The legacy LTE PRB indexing is from 0 to 49, and the indexing is from low frequency to high frequency. We choose PRB 35, which is one of the possible anchor positions of deploying NB-IoT carrier [3].

[00167] For PRB 35, following [7], we have

$$[00168] \quad m = 2 \cdot 35 + [0,1] = 70, 71.$$

[00169] Then we have

$$[00170] \quad m' = m + N_{RB}^{maxDL} - N_{RB}^{DL} = [70,71] + 110 - 50 = 130, 131.$$

[00171] The new indexing maps PRB 35 to the following offset from the LTE middle PRB as

[00172] $n'_{PRB} = n_{PRB} - (N_{RB}^{DL} - N_{RB}^{DL} \bmod 2) / 2 = 35 - (50 - 50 \bmod 2) / 2 = 10$

[00173] Therefore,

[00174] $m' = n + N_{RB}^{\max, DL} - N_{RB}^{DL} = 2 \cdot n'_{PRB} + N_{RB}^{DL} - N_{RB}^{DL} \bmod 2 + \tilde{m} + N_{RB}^{\max, DL} - N_{RB}^{DL}$

[00175] $= 2 \cdot 10 + N_{RB}^{DL} - 50 \bmod 2 + [0, 1] + 110 - N_{RB}^{DL} = 130, 131$

[00176] As we can see, with only indicating the offset, i.e., 10 PRBs from the middle, the same m' can be obtained without knowing the system bandwidth N_{RB}^{DL} .

[00177]

[00179] At RAN#69, a new work item named Narrowband IoT (NB-IoT) was approved, see [6]. The objective is to specify a radio access for cellular internet of things that addresses improved indoor coverage, support for massive number of low throughput devices, low delay sensitivity, ultra-low device cost, low device power consumption and (optimized) network architecture.

[00180] NB-IOT should support 3 different modes of operation:

[00181] 1. "Stand-alone operation" utilizing for example the spectrum currently being used by GERAN systems as a replacement of one or more GSM carriers

[00182] 2. "Guard band operation" utilizing the unused resource blocks within a LTE carrier's guard-band

[00183] 3. "In-band operation" utilizing resource blocks within a normal LTE carrier

[00184] In RAN1#84 meeting, the following items about NPBCH and NB-MIB are agreed."

[00185] The 4 most significant bits of NB-IoT SFN are indicated in NB-MIB

[00186] 4 bits are used to indicate NB-SIB1 scheduling information in NB-MIB

[00187] Rate matching, scrambling and mapping for Normal Cyclic Prefix (CP)

[00188] In FDD mode, after CRC attachment and channel coding, the NB-MIB is rate matched to $E=1,600$ bits denoted by $e_0, e_1, \dots, e_{E-1}$ according to Section 5.3.1.3 in TS 36.212

[00189] The rate matched bits are scrambled with a sequence of length 1,600

[00190] --- The scrambling sequence for the NB-PBCH is given in 7.2 of TS 36.211 and is initialized with the NB-IoT Physical Cell Identifier (PCI) in each radio frame fulfilling $nf \bmod 64 = 0$ where nf is the System Frame Number (SFN)

[00191] The modulated bits are mapped to resource elements in a frequency first, time second fashion

[00192] Within one NB-MIB TTI, the i -th block of 80ms duration, $i=0,1,\dots,7$, is used to transmit bits $e_{200*i+j}$, $j=0,1,\dots,199$, i.e., identical symbols are transmitted in each subframe #0 within the i -th block

[00193] The number of NB-RS ports (1 or 2) is indicated by NB-PBCH CRC masking (all 0's for 1 port, and all 1's for 2 ports, as in the current spec for LTE CRS)

[00194] For rate matching purpose for NB-PBCH, the number of NB-RS ports is based on 2

- [00195] The number of CRS ports is indicated by NB-MIB.
- [00196] The deployment mode is indicated by NB-MIB
- [00197] Note: it doesn't imply that it has to be a separate information field
- [00198] Raster offset is indicated in NB-MIB
- [00199] Working assumption:
- [00200] Information to obtain CRS sequence (only needed if same-PCI indicator is set to true), and a same-PCI indicator (to indicate whether or not LTE PCI and NB-IoT PCI are the same) are indicated in NB-MIB
- [00201] --- Note that this working assumption is related to the working assumption regarding the potential usage of LTE CRS for demodulation
- [00202] FFS whether same-PCI indicator and PRB index are always present, or only in in-band case
- [00203] The differentiation of FDD vs. TDD is NOT indicated in Rel-13
- [00204] --- Note: it is assumed that there is at least one reserved bit in NB-MIB
- [00205] NB-MIB indicates the TBS of NB-SIB1, where the number of different TB sizes for NB-SIB1 transmission is 4.
- [00206]
- [00207] Herein we discuss some remaining issues of NB-MIB and NPBCH design.
- [00208] In NB-IoT, the essential system information, e.g., system frame number (SFN), for initial access to a cell is carried on NPBCH. It is beneficial to use the same NPBCH design for all three deployment modes, i.e., standalone, guard-band and in-band. In R1-160918, it is proposed that different version of MIB contents should be used for different operation modes, since some of fields in the MIB are not needed for some operations modes. Based on the understanding of the sourcing company, there are some similar properties experienced by in-band and guard-band operations, e.g., channel raster offset. Therefore, it is not necessary to define three different versions of MIB contents, but to use two versions of MIB contents, one for in-band and guard-band operations, and one for stand-alone. And the size of the MIB should be the same for all cases.
- [00209] Observation 1: Two versions of MIB contents can be defined, one for in-band and guard-band, one for stand-alone operation.

[00210]

[00211] Remaining issues about MIB contents

[00212] SFN

[00213] It was agreed that “the 4 most significant bits of NB-IoT SFN are indicated in NB-MIB”. However, whether to include HyperSFN is still an open issue. In RAN1 simulations, we have shown that NB-MIB can support 34-bit payload, and therefore, we can also accommodate partial or the entire HyperSFN in the MIB if necessary. However, the details should be based on the input from RAN2.

[00214] Observation 2: If necessary, partial or entire HyperSFN can be placed in NB-MIB based on input from RAN2.

[00215] Operation mode indication, LTE CRS information, Raster offset, and system BW

[00216] Regarding the LTE CRS information, the following are agreed

[00217] “

[00218] Information to obtain CRS sequence (only needed if same-PCI indicator is set to true), and a same-PCI indicator (to indicate whether or not LTE PCI and NB-IoT PCI are the same) are indicated in NB-MIB

[00219] Note that this working assumption is related to the working assumption regarding the potential usage of LTE CRS for demodulation

[00220] FFS whether same-PCI indicator and PRB index are always present, or only in in-band case

[00221] ”

[00222] For the in-band operation, LTE CRS can be used by the NB-IoT devices to improve the channel estimation. As it is agreed that the information to obtain CRS sequence is included in MIB, the MIB needs to include the same-PCI indicator and the PRB index. As we have two different versions of MIB, 1 bit is needed for mode indication. And 1 bit is needed for the same-PCI indicator.

[00223] For guard-band and in-band operations, the channel raster needs to be indicated. The values of raster offset would be -2.5 kHz, +2.5 kHz, -7.5 kHz, +7.5 kHz. However, only the absolute value needs to be signaled, and therefore, only 1 bit is needed. We discuss this in more details in the following paragraph.

[00224] The LTE CRS positions in frequency domain can be derived from the PCID, and it is agreed in RAN1 NB-IoT Ad Hoc that “Note that the PCID from NB-SSS and the LTE PCID indicate the same LTE CRS position”. Therefore, in order to obtain the exact LTE CRS information, the PRB position of the NB-IoT system needs to be indicated. Notice, the LTE CRS is generated in the manner as follows 3GPP TS 36.211.

[00225] The reference-signal sequence $r_{l,n_s}(m)$ is defined by

$$r_{l,n_s}(m) = \frac{1}{\sqrt{2}}(1 - 2 \cdot c(2m)) + j \frac{1}{\sqrt{2}}(1 - 2 \cdot c(2m+1)), \quad m = 0, 1, \dots, 2N_{\text{RB}}^{\text{max,DL}} - 1 \quad \text{where } n_s \text{ is the}$$

slot number within a radio frame and l is the OFDM symbol number within the slot. The pseudo-random sequence $c(i)$ is defined in clause 7.2. The pseudo-random sequence generator shall be initialised with

$c_{\text{init}} = 2^{10} \cdot (7 \cdot (n'_s + 1) + l + 1) \cdot (2 \cdot N_{\text{ID}}^{\text{cell}} + 1) + 2 \cdot N_{\text{ID}}^{\text{cell}} + N_{\text{CP}}$ at the start of each OFDM symbol where

$$n'_s = \begin{cases} 10 \lfloor n_s / 10 \rfloor + n_s \bmod 2 & \text{for frame structure type 3 when the CRS is part of a DRS} \\ n_s & \text{otherwise} \end{cases}$$

[00226]

$$N_{\text{CP}} = \begin{cases} 1 & \text{for normal CP} \\ 0 & \text{for extended CP} \end{cases}$$

[00227] The reference signal sequence $r_{l,n_s}(m)$ shall be mapped to complex-valued modulation symbols $a_{k,l}^{(p)}$ used as reference symbols for antenna port p in slot

n_s according to $a_{k,l}^{(p)} = r_{l,n_s}(m)$

where

$$k = 6m + (v + v_{\text{shift}}) \bmod 6$$

$$l = \begin{cases} 0, N_{\text{syb}}^{\text{DL}} - 3 & \text{if } p \in \{0,1\} \\ 1 & \text{if } p \in \{2,3\} \end{cases}$$

$$m = 0, 1, \dots, 2 \cdot N_{\text{RB}}^{\text{DL}} - 1$$

$$m' = m + N_{\text{RB}}^{\text{max, DL}} - N_{\text{RB}}^{\text{DL}}$$

The variables v and v_{shift} define the position in the frequency domain for the different reference signals where v is given by

$$v = \begin{cases} 0 & \text{if } p = 0 \text{ and } l = 0 \\ 3 & \text{if } p = 0 \text{ and } l \neq 0 \\ 3 & \text{if } p = 1 \text{ and } l = 0 \\ 0 & \text{if } p = 1 \text{ and } l \neq 0 \\ 3(n_s \bmod 2) & \text{if } p = 2 \\ 3 + 3(n_s \bmod 2) & \text{if } p = 3 \end{cases}$$

The cell-specific frequency shift is given by $v_{\text{shift}} = N_{\text{ID}}^{\text{cell}} \bmod 6$.

[00228]

“

[00229] From the ways that the LTE CRSs are generated, we can use a new way to index the PRB which gives the same m' , which is used to determine the LTE CRS information. To be more specific, for all the systems, as long as the offset from the middle PRB is known, the LTE CRS can be determined. Therefore, it is only necessary to signal the offset between the NB-IoT PRB to the LTE middle PRB.

[00230] Define the new PRB index numbering that starts from the middle as

$$n'_{PRB} = n_{PRB} - (N_{RB}^{DL} - N_{RB}^{DL} \bmod 2) / 2,$$

where n_{PRB} is the original PRB index, and n'_{PRB} is the new indexing being singled, which is relative to the middle LTE PRB. Notice that the sign of n'_{PRB} is related to the sign of the channel raster offset. Therefore, the sign of the channel raster offset can be implicitly derived from n'_{PRB} .

Observation 3: It is not necessary to signal the sign of the channel raster offset as it can be derived from n'_{PRB} .

Then m' is still calculated as $m' = m + N_{RB}^{maxDL} - N_{RB}^{DL}$, but with m being substituted by

$$n = 2 \cdot n'_{PRB} + N_{RB}^{DL} - N_{RB}^{DL} \bmod 2 + \tilde{m}. \text{ Here } \tilde{m} = 0, 1 \text{ for all the cases. As we can see}$$

from the calculation, N_{RB}^{DL} is not needed in calculating m' , and therefore the LTE system bandwidth does not need to be signalled. Moreover, since the odd and even number of PRBs is related to the absolute value of the channel raster offset, no additional signalling is needed.

An example is given in the appendix to facilitate the understanding of the proposed indexing method. Another advantage of using this method is forward compatibility, if new LTE system bandwidth is defined in the future.

Observation 4: The LTE system bandwidth does not need to be signalled.

Proposal 1: It is proposed to signal the PRB indexing offset from the middle of the LTE system.

Since at most 18 PRBs can be used as anchors for NB-IoT in-band deployment, 5 bits are needed for the indexing. As 5 bits gives 32 different indexing values, some of the values can be used to indicate guard-band operation including the corresponding raster offset.

Observation 5: If only the LTE CRS information is needed, 5 bits are necessary to indicate the offset from middle PRB of the LTE system to the NB-IoT anchor PRB.

Observation 6: Some of the indexing values given by the 5 bits can be used to indicate the guard-band operation including the corresponding raster offset.

The number of CRS ports

The number of LTE CRS ports is agreed to be indicated in MIB. However, this field can be re-used for stand-alone. The current understanding is that for stand-alone operation in release 13, only single antenna is supported. However, in later releases, maybe two antennas can also be used for stand-alone operation, e.g., in the case of deploying NB-IoT system with low power nodes.

Proposal 2: The 1 bit LTE CRS port indication field can be re-used for stand-alone mode for forward compatibility.

Other issues

During the discussion in the RAN1#84, some companies pointed out the issue of enabling frequency tracking in the current NPBCH design. The current NPBCH design allows frequency tracking between every 10 ms. This is good enough for NB-IoT devices experiencing slow varying channels. The NPBCH design in eMTC uses OFDM symbol repetitions to enable frequency tracking within a subframe. Similar design can also be used in NB-IoT system to enable better frequency tracking.

Observation 7: OFDM symbol repetitions within a subframe of NPBCH can be considered to offer better frequency tracking for NPBCH decoding.

Conclusions

Table 1 and Table 2 give an estimation of the MIB content and size of each field. As we can see, in total 17 bits are needed in the MIB for stand-alone operation, and in total 24 bits are needed in the MIB for guard-band and in-band operation.

Table 1 MIB content stand-alone

Field	Size (bits)
SFN	4
Operation mode	1, to indicate whether it is stand-alone or not.
The number of antenna ports	1, reserved for further releases.
FDD/TDD indication (reserved for future use)	(1)
SIB1 scheduling info. and TBS	4
Access barring info.	Estimated to be 1 (Decision should be made in RAN2)
Value tag indicate system info change	Estimated to be 5 (Decision should be made in RAN2)
Total Size	Estimated to be 17

Table 2 MIB content in-band and guard-band

Field	Size (bits)
SFN	4
Operation mode	1, to indicate whether it is stand-alone or not.
PRB index for in-band operation	5, including indication of guard-band operation
Channel raster offset	1
The number of CRS ports	1
Same PCI indication	1
FDD/TDD indication (reserved for future use)	(1)
SIB1 scheduling info. and TBS	4
Access barring info.	Estimated to be 1 (Decision should be made in RAN2)
Value tag indicate system info change	Estimated to be 5 (Decision should be made in RAN2)
Total Size	Estimated to be 24

Based on the discussion above, we have the following proposals and observations.

Proposal 1: It is proposed to signal the PRB indexing offset from the middle of the LTE system.

Proposal 2: The 1 bit LTE CRS port indication field can be re-used for stand-alone mode for forward compatibility.

Observation 1: Two versions of MIB contents can be defined, one for in-band and guard-band, one for stand-alone operation.

Observation 2: If necessary, partial or entire HyperSFN can be placed in NB-MIB based on input from RAN2.

Observation 3: It is not necessary to signal the sign of the channel raster offset as it can be derived from n'_{PRB} .

Observation 4: The LTE system bandwidth does not need to be signalled.

Observation 5: If only the LTE CRS information is needed, 5 bits are necessary to indicate the offset from middle PRB of the the LTE system to the NB-IoT anchor PRB.

Observation 6: Some of the indexing values given by the 5 bits can be used to indicate the guard-band operation including the corresponding raster offset.

Observation 7: OFDM symbol repetitions within a subframe of NPBCH can be considered to offer better frequency tracking for NPBCH decoding.

REFERENCES

[1] R1-161548, "RAN1 agreements for Rel-13 NB-IoT", source WI rapporteur (Ericsson), RAN1 #84, 15 - 19 Feb 2016, Malta.

[2] R1-160082, NB-IoT Channel Raster, source Ericsson, 3GPP TSG-RAN1 NB-IOT Ad Hoc 18th – 20th Jan 2016, Budapest, Hungary

[3] R1-160022, Channel raster design, source Huawei, HiSilicon, 3GPP TSG-RAN1 NB-IOT Ad Hoc 18th – 20th Jan 2016, Budapest, Hungary

[4] R1-160080, NB-IoT –Synchronization Channel Evaluations, source Ericsson, 3GPP TSG-RAN1 NB-IOT Ad Hoc 18th – 20th Jan 2016, Budapest, Hungary

[5] R1-160021, Synchronization signal evaluation, source Huawei, HiSilicon, 3GPP TSG-RAN1 NB-IOT Ad Hoc 18th – 20th Jan 2016, Budapest, Hungary

[6] RP-152284, "New Work Item: Narrowband IoT (NB-IoT)," sources Huawei and HiSilicon, RAN #70.

[7] 3GPP TS 36.211.

[8] R1-160918, "MIB Contents for NB-IoT", source InterDigital, RAN1 #84, 15 - 19 Feb 2016, Malta.

Example

In this example, we use 10 MHz LTE system as an example to illustrate the proposed indexing method. The legacy LTE PRB indexing is from 0 to 49, and the indexing is from low frequency to high frequency. We choose PRB 35, which is one of the possible anchor positions of deploying NB-IoT carrier.

For PRB 35, following [7], we have

$$m = 2 \cdot 35 + [0, 1] = 70, 71.$$

Then we have

$$m' = m + N_{RB}^{\max, DL} - N_{RB}^{DL} = [70, 71] + 110 - 50 = 130, 131.$$

The new indexing maps PRB 35 to the following offset from the LTE middle PRB as

$$n'_{PRB} = n_{PRB} - (N_{RB}^{DL} - N_{RB}^{DL} \bmod 2) / 2 = 35 - (50 - 50 \bmod 2) / 2 = 10$$

Therefore,

$$\begin{aligned} m' &= n + N_{RB}^{\max, DL} - N_{RB}^{DL} = 2 \cdot n'_{PRB} + N_{RB}^{DL} - N_{RB}^{DL} \bmod 2 + \tilde{m} + N_{RB}^{\max, DL} - N_{RB}^{DL} \\ &= 2 \cdot 10 + N_{RB}^{DL} - 50 \bmod 2 + [0, 1] + 110 - N_{RB}^{DL} = 130, 131 \end{aligned}$$

As we can see, with only indicating the offset, i.e., 10 PRBs from the middle, the same

m' can be obtained without knowing the system bandwidth N_{RB}^{DL} .

[00231] FIG. 12 illustrates a system for deploying a frequency resource in a wireless communication system in accordance with various aspects as described herein. The frequency Resource on which the first wireless communication network is deployed is marked with stripes and the frequency resources on which the second wireless communication system such as LTE are marked with white. The frequency resource is offset the inner frequency resource in an in-band deployment.

[00232] FIG. 13 illustrates a system for deploying a frequency resource in a wireless communication system in accordance with various aspects as described herein. A first frequency resource on which the first wireless communication network is deployed is offset into the guard band of the second wireless communication system. The first frequency resource is pointing to a second frequency, on which the first wireless communication network is deployed resource, in-band of the bandwidth.

[00233] FIG. 14 illustrates a system for deploying a frequency resource in a wireless communication system in accordance with various aspects as described herein. A first frequency resource on which the first wireless communication network is deployed is offset in-band of the second wireless communication system. The first frequency resource is pointing to a second frequency, on which the first wireless communication network is deployed resource, into the guard band of the bandwidth.

[00234] FIG. 15 illustrates a system for deploying a frequency resource in a wireless communication system in accordance with various aspects as described herein. A first frequency resource, being an anchor frequency resource, on which the first wireless communication network is deployed is offset into the guard band of the second wireless communication system. The first frequency resource is pointing to a secondary frequency resource, on which the first wireless communication network is deployed resource, also in the guard band of the bandwidth.

[00235] FIG. 16 illustrates a system for deploying a frequency resource in a wireless communication system in accordance with various aspects as described herein. A first frequency resource, being an anchor PRB, on which the first wireless communication network is deployed is offset into the guard band of the second wireless communication system. The first frequency resource is pointing to a secondary PRB, on which the first wireless communication network is deployed resource, in an opposite guard band of the bandwidth.

[00236] FIG. 17 illustrates a system for deploying a frequency resource in a wireless communication system in accordance with various aspects as described herein. A first frequency resource, being an anchor PRB, on which the first wireless communication network is deployed is offset in-band of the second wireless communication system. The first frequency resource is pointing to a secondary PRB, on which the first wireless communication network is deployed resource for a first UE, also in-band of the bandwidth. Further, the first frequency resource is pointing to a secondary PRB, on which the first wireless communication network is deployed resource for a secondary UE, also in-band of the bandwidth. All are the PRBs are offset relative the inner frequency resource.

Some embodiments are further disclosed herein.

[00237] In one embodiment, a method performed by a wireless device may determine a frequency resource on which a first wireless communication system is deployed. The method may include obtaining information indicating an offset between a frequency resource on which

the first wireless communication system is deployed and an inner frequency resource on which the second wireless communication system is deployed. In the frequency domain, the second wireless communication system may be deployed on at least one higher frequency resource above the inner frequency resource and at least one lower frequency resource below the inner frequency resource. The method may also include determining, based on the offset and the inner frequency resource, the frequency resource on which the first wireless communication system is deployed.

[00238] In another embodiment, the method may include comprising transmitting or receiving on the determined frequency resource.

[00239] In another embodiment, the inner frequency resource may be a middle frequency resource.

[00240] In another embodiment, the second wireless communication system may be deployed on an odd number of frequency resources. Further, the inner frequency resource may be the middlemost frequency resource amongst the odd number of frequency resources. The middlemost frequency resource may have the same number of frequency resources on either side of the middlemost frequency resource. Further, frequencies corresponding to the middle frequency resource may be between frequencies corresponding to the lower frequency resource and frequencies corresponding to the upper frequency resource.

[00241] In another embodiment, the second wireless communication system may be deployed on an even number of frequency resources. Further, the inner frequency resource may be one of the two middlemost frequency resources amongst the even number of frequency resources.

[00242] In another embodiment, the method may include determining one or more other frequency resources on which the first wireless communication system is deployed.

[00243] In another embodiment, the step of determining the frequency resource on which the first wireless communication system is deployed may be irrespective of a bandwidth of the second wireless communication system.

[00244] In another embodiment, the step of obtaining may include receiving the information from a network node.

[00245] In another embodiment, the determined frequency resource may be an anchor frequency resource on which random access is performed for the first wireless communication system.

[00246] In another embodiment, the anchor frequency resource may be a physical resource block (PRB) that contains information corresponding to at least one of a synchronization sequence, a broadcast channel and an information block.

[00247] In another embodiment, the synchronization sequence may be related to at least one of an NB-IoT Primary Synchronization Sequence (NB-PSS) and an NB-IoT Secondary Synchronization Sequence (NB-SSS).

[00248] In another embodiment, the broadcast channel may be related to a NB-IoT Physical Broadcast Channel (NB-PBCH).

[00249] In another embodiment, the information block may be related to a System Information Block (SIB) transmission.

[00250] In another embodiment, the first wireless communication system may be deployed on an anchor frequency resource for performing random access and on one or more non-anchor frequency resources for a data connection. Further, the determined frequency resource may be a non-anchor frequency resource.

[00251] In another embodiment, the wireless device may be a user equipment (UE).

[00252] In another embodiment, the frequency resource may be a range of contiguous frequencies.

[00253] In another embodiment, the frequency resource may be a physical resource block (PRB).

[00254] In another embodiment, the frequency resource of the first wireless communication system may be deployed in at least one of an in-band or a guard band of the second wireless communication system.

[00255] In another embodiment, the frequency resource of the first wireless communication system may be deployed outside any band of the second wireless communication system.

[00256] In one embodiment, a wireless device may be configured to obtain information indicating an offset between a frequency resource on which the first wireless communication system is deployed and an inner frequency resource on which the second wireless communication system is deployed. Further, in the frequency domain, the second wireless

communication system may be deployed on at least one higher frequency resource above the inner frequency resource and at least one lower frequency resource below the inner frequency resource. The wireless device may also determine, based on the offset and the inner frequency resource, the frequency resource on which the first wireless communication system is deployed.

[00257] In one embodiment, a wireless device may include means for obtaining information indicating an offset between a frequency resource on which the first wireless communication system is deployed and an inner frequency resource on which the second wireless communication system is deployed. Further, in the frequency domain, the second wireless communication system may be deployed on at least one higher frequency resource above the inner frequency resource and at least one lower frequency resource below the inner frequency resource. The wireless device may also include means for determining, based on the offset and the inner frequency resource, the frequency resource on which the first wireless communication system is deployed.

[00258] In one embodiment, a computer program comprising instructions which, when executed by at least one processor of a wireless device, causes the wireless device to perform the method of any of the embodiments herein.

[00259] In another embodiment, a carrier may contain the computer program corresponding to the wireless device to perform the method of any of the embodiments herein. Further, the carrier may be one of an electronic signal, optical signal, radio signal, or computer readable storage medium.

[00260] In one embodiment, a method performed by a network node may assign a frequency resource on which a first wireless communication system is deployed. The method may include determining an offset between the frequency resource on which the first wireless communication system is deployed and an inner frequency resource on which the second wireless communication system is deployed. Further, in the frequency domain, the second wireless communication system may be deployed on at least one higher frequency resource above the inner frequency resource and at least one lower frequency resource below the inner frequency resource. The method may also include generating information indicating the offset to enable a wireless device to determine the frequency resource.

[00261] In another embodiment, the method may include transmitting the information to the wireless device.

[00262] In another embodiment, the method may include determining one or more other frequency resources on which the first wireless communication system is deployed.

[00263] In another embodiment, the step of determining the frequency resource on which the first wireless communication system is deployed may be irrespective of a bandwidth of the second wireless communication system.

[00264] In another embodiment, the method may include receiving a signal on the frequency resource on which the first wireless communication system is deployed in-band or in the guard band of the second wireless communication system.

[00265] In one embodiment, a network node may be configured to determine an offset between the frequency resource on which the first wireless communication system is deployed and an inner frequency resource on which the second wireless communication system is deployed. Further, in the frequency domain, the second wireless communication system may be deployed on at least one higher frequency resource above the inner frequency resource and at least one lower frequency resource below the inner frequency resource. The network node may be further configured to generate information indicating the offset to enable a wireless device to determine the frequency resource.

[00266] In one embodiment, a network node may include means for determining the offset between a frequency resource on which the first wireless communication system is deployed and an inner frequency resource on which the second wireless communication system is deployed. Further, in the frequency domain, the second wireless communication system may be deployed on at least one higher frequency resource above the inner frequency resource and at least one lower frequency resource below the inner frequency resource. The network node may also include means for generating information indicating the offset to enable a wireless device to determine the frequency resource.

[00267] In one embodiment, a computer program comprising instructions which, when executed by at least one processor of a network node, may cause the network node to perform the method of any of the embodiments herein.

[00268] In another embodiment, a carrier may contain the computer program corresponding to the network node to perform the method of any of the embodiments herein. Further, the carrier may be one of an electronic signal, optical signal, radio signal, or computer readable storage medium.

[00269] The previous detailed description is merely illustrative in nature and is not intended to limit the present disclosure, or the application and uses of the present disclosure. Furthermore, there is no intention to be bound by any expressed or implied theory presented in the preceding field of use, background, summary, or detailed description. The present disclosure provides various examples, embodiments and the like, which may be described herein in terms of functional or logical block elements. The various aspects described herein are presented as methods, devices (or apparatus), systems, or articles of manufacture that may include a number of components, elements, members, modules, nodes, peripherals, or the like. Further, these methods, devices, systems, or articles of manufacture may include or not include additional components, elements, members, modules, nodes, peripherals, or the like.

[00270] Furthermore, the various aspects described herein such as functions and modules may be implemented using standard programming or engineering techniques to produce software, firmware, hardware (e.g., circuits), or any combination thereof to control a computing device to implement the disclosed subject matter. It will be appreciated that some embodiments may be comprised of one or more generic or specialized processors such as microprocessors, digital signal processors, customized processors and field programmable gate arrays (FPGAs) and unique stored program instructions (including both software and firmware) that control the one or more processors to implement, in conjunction with certain non-processor circuits, some, most, or all of the functions of the methods, devices and systems described herein. Alternatively, some or all functions could be implemented by a state machine that has no stored program instructions, or in one or more application specific integrated circuits (ASICs), in which each function or some combinations of certain of the functions are implemented as custom logic circuits. Of course, a combination of the two approaches may be used. Further, it is expected that one of ordinary skill, notwithstanding possibly significant effort and many design choices motivated by, for example, available time, current technology, and economic considerations, when guided by the concepts and principles disclosed herein will be readily capable of generating such software instructions and programs and ICs with minimal experimentation.

[00271] The term “article of manufacture” as used herein is intended to encompass a computer program accessible from any computing device, carrier, or media. For example, a computer-readable medium may include: a magnetic storage device such as a hard disk, a floppy disk or a magnetic strip; an optical disk such as a compact disk (CD) or digital versatile disk (DVD); a smart card; and a flash memory device such as a card, stick or key drive.

Additionally, it should be appreciated that a carrier wave may be employed to carry computer-readable electronic data including those used in transmitting and receiving electronic data such as electronic mail (e-mail) or in accessing a computer network such as the Internet or a local area network (LAN). Of course, a person of ordinary skill in the art will recognize many modifications may be made to this configuration without departing from the scope or spirit of the subject matter of this disclosure.

[00272] Throughout the specification and the embodiments, the following terms take at least the meanings explicitly associated herein, unless the context clearly dictates otherwise. Relational terms such as “first” and “second,” and the like may be used solely to distinguish one entity or action from another entity or action without necessarily requiring or implying any actual such relationship or order between such entities or actions. The term “or” is intended to mean an inclusive “or” unless specified otherwise or clear from the context to be directed to an exclusive form. Further, the terms “a,” “an,” and “the” are intended to mean one or more unless specified otherwise or clear from the context to be directed to a singular form. The term “include” and its various forms are intended to mean including but not limited to. References to “one embodiment,” “an embodiment,” “example embodiment,” “various embodiments,” and other like terms indicate that the embodiments of the disclosed technology so described may include a particular function, feature, structure, or characteristic, but not every embodiment necessarily includes the particular function, feature, structure, or characteristic. Further, repeated use of the phrase “in one embodiment” does not necessarily refer to the same embodiment, although it may. The terms “substantially,” “essentially,” “approximately,” “about” or any other version thereof, are defined as being close to as understood by one of ordinary skill in the art, and in one non-limiting embodiment the term is defined to be within 10%, in another embodiment within 5%, in another embodiment within 1% and in another embodiment within 0.5%. A device or structure that is “configured” in a certain way is configured in at least that way, but may also be configured in ways that are not listed.

[00273] It will be appreciated that the foregoing description and the accompanying drawings represent non-limiting examples of the methods and apparatus taught herein. As such, the apparatus and techniques taught herein are not limited by the foregoing description and accompanying drawings. Instead, the embodiments herein are limited only by the following claims and their legal equivalents.

CLAIMS

1. A method performed by a wireless device (105) in a first wireless communication system that is deployed on a frequency resource, the method comprising:
receiving (120) information indicating a physical resource block, PRB, offset and a corresponding channel raster offset,
 wherein the channel raster offset is an offset in frequency between a channel raster, used by the wireless device (105) in a cell search process, and the frequency resource,
 wherein the PRB offset indicates an offset between the frequency resource and an inner frequency resource on which a second wireless communication system is deployed,
 and wherein, in the frequency domain, the second wireless communication system is deployed on at least one higher frequency resource above the inner frequency resource and at least one lower frequency resource below the inner frequency resource; and
determining (125), based on the received information, an adjustment in frequency applicable for the frequency resource on which the first wireless communication system is deployed.
2. The method of claim 1, further comprising
receiving (115), during the cell search process using the channel raster, a synchronization signal of the first wireless communication system.
3. The method of any of the claims 1-2, wherein the received information enables the wireless device to determine, based on the PRB offset, cell-specific reference signal, CRS, information of the second communication system and to use this information for channel estimation in the first wireless communication system.
4. The method of any of the claims 1-3, wherein receiving the information comprises receiving a master information block, MIB, of the first wireless communication system, which MIB comprises five bits indicating the PRB offset and the corresponding channel raster offset.

5. The method of any of the claims 1-4, wherein the information comprises an index indicating the PRB offset and the corresponding channel raster offset.
6. A method performed by a network node (101) in a first wireless communication system that is deployed on a frequency resource, the method comprising:
transmitting (153) information indicating a physical resource block, PRB, offset and a corresponding channel raster offset,
 wherein the channel raster offset is an offset in frequency between a channel raster, used by the wireless device in a cell search process, and the frequency resource,
 wherein the PRB offset indicates an offset between the frequency resource and an inner frequency resource on which a second wireless communication system is deployed,
 and wherein, in the frequency domain, the second wireless communication system is deployed on at least one higher frequency resource above the inner frequency resource and at least one lower frequency resource below the inner frequency resource.
7. The method of claim 6, further comprising
transmitting (150) a synchronization signal to be received by a wireless device during the cell search process.
8. The method of any of the claims 6-7, further comprising
determining (151) the channel raster offset and the PRB offset for the frequency resource on which the first wireless communication system is deployed, and
generating (152) the information indicating the determined PRB offset and the corresponding channel raster offset.
9. The method of any of the claims 6-8, wherein transmitting the information comprises transmitting a master information block, MIB, of the first wireless communication system, which MIB comprises five bits indicating the PRB offset and the corresponding channel raster offset.

10. The method of any of the claims 6-9, wherein the information comprises an index indicating the PRB offset and the corresponding channel raster offset.
11. A wireless device (105) for a first wireless communication system that is deployed on a frequency resource, the wireless device being configured to:
- receive information indicating a physical resource block, PRB, offset and a corresponding channel raster offset,
 - wherein the channel raster offset is an offset in frequency between a channel raster, used by the wireless device (105) in a cell search process, and the frequency resource,
 - wherein the PRB offset indicates an offset between the frequency resource and an inner frequency resource on which a second wireless communication system is deployed,
 - and wherein, in the frequency domain, the second wireless communication system is deployed on at least one higher frequency resource above the inner frequency resource and at least one lower frequency resource below the inner frequency resource; and to
 - determine, based on the received information, an adjustment in frequency applicable for the frequency resource on which the first wireless communication system is deployed.
12. The wireless device (105) of claim 11, further being configured to
- receive, during the cell search process using the channel raster, a synchronization signal of the first wireless communication system.
13. The wireless device (105) of any of the claims 11-12, wherein that the wireless device (105) is being configured to receive the information indicating the PRB offset and the corresponding channel raster offset enables the wireless device (105) to determine, based on the PRB offset, cell-specific reference signal, CRS, information of the second communication system and to use this information for channel estimation in the first wireless communication system.

14. The wireless device (105) of any of the claims 11-13, wherein the wireless device (105) is being configured to receive the information by being configured to receive a master information block, MIB, of the first wireless communication system, which MIB comprises five bits indicating the PRB offset and the corresponding channel raster offset.
15. The wireless device (105) of any of the claims 11-14, wherein the information comprises an index indicating the PRB offset and the corresponding channel raster offset.
16. A network node (101) for a first wireless communication system that is deployed on a frequency resource, the network node being configured to:
- transmit information indicating a physical resource block, PRB, offset and a corresponding channel raster offset,
 - wherein the channel raster offset is an offset in frequency between a channel raster, used by a wireless device (105) in a cell search process, and the frequency resource,
 - wherein the PRB offset indicates an offset between the frequency resource and an inner frequency resource on which a second wireless communication system is deployed,
 - and wherein, in the frequency domain, the second wireless communication system is deployed on at least one higher frequency resource above the inner frequency resource and at least one lower frequency resource below the inner frequency resource.
17. The network node (101) of claim 16, further being configured to
- transmit a synchronization signal to be received by the wireless device (105) during the cell search process.
18. The network node (101) of any of the claims 16-17, further being configured to:
- determine the channel raster offset and the PRB offset for the frequency resource on which the first wireless communication system is deployed; and to
 - generate the information indicating the determined PRB offset and the corresponding channel raster offset.

19. The network node (101) of any of the claims 16-18, being configured to transmit the information by being configured to transmit a master information block, MIB, of the first wireless communication system, which MIB comprises five bits indicating the PRB offset and the corresponding channel raster offset.
20. The network node (101) of any of the claims 16-19, wherein the information comprises an index indicating the PRB offset and the corresponding channel raster offset.
21. A computer program comprising instructions, which, when executed on at least one processor, cause the at least one processor to carry out any of the methods according to any of the claims 1-10, as performed by the wireless device (105) or the network node (101).
22. A computer-readable storage medium, having stored thereon a computer program comprising instructions which, when executed on at least one processor, cause the at least one processor to carry out the method according to any of the claims 1-10, as performed by the wireless device (105) or the network node (101).

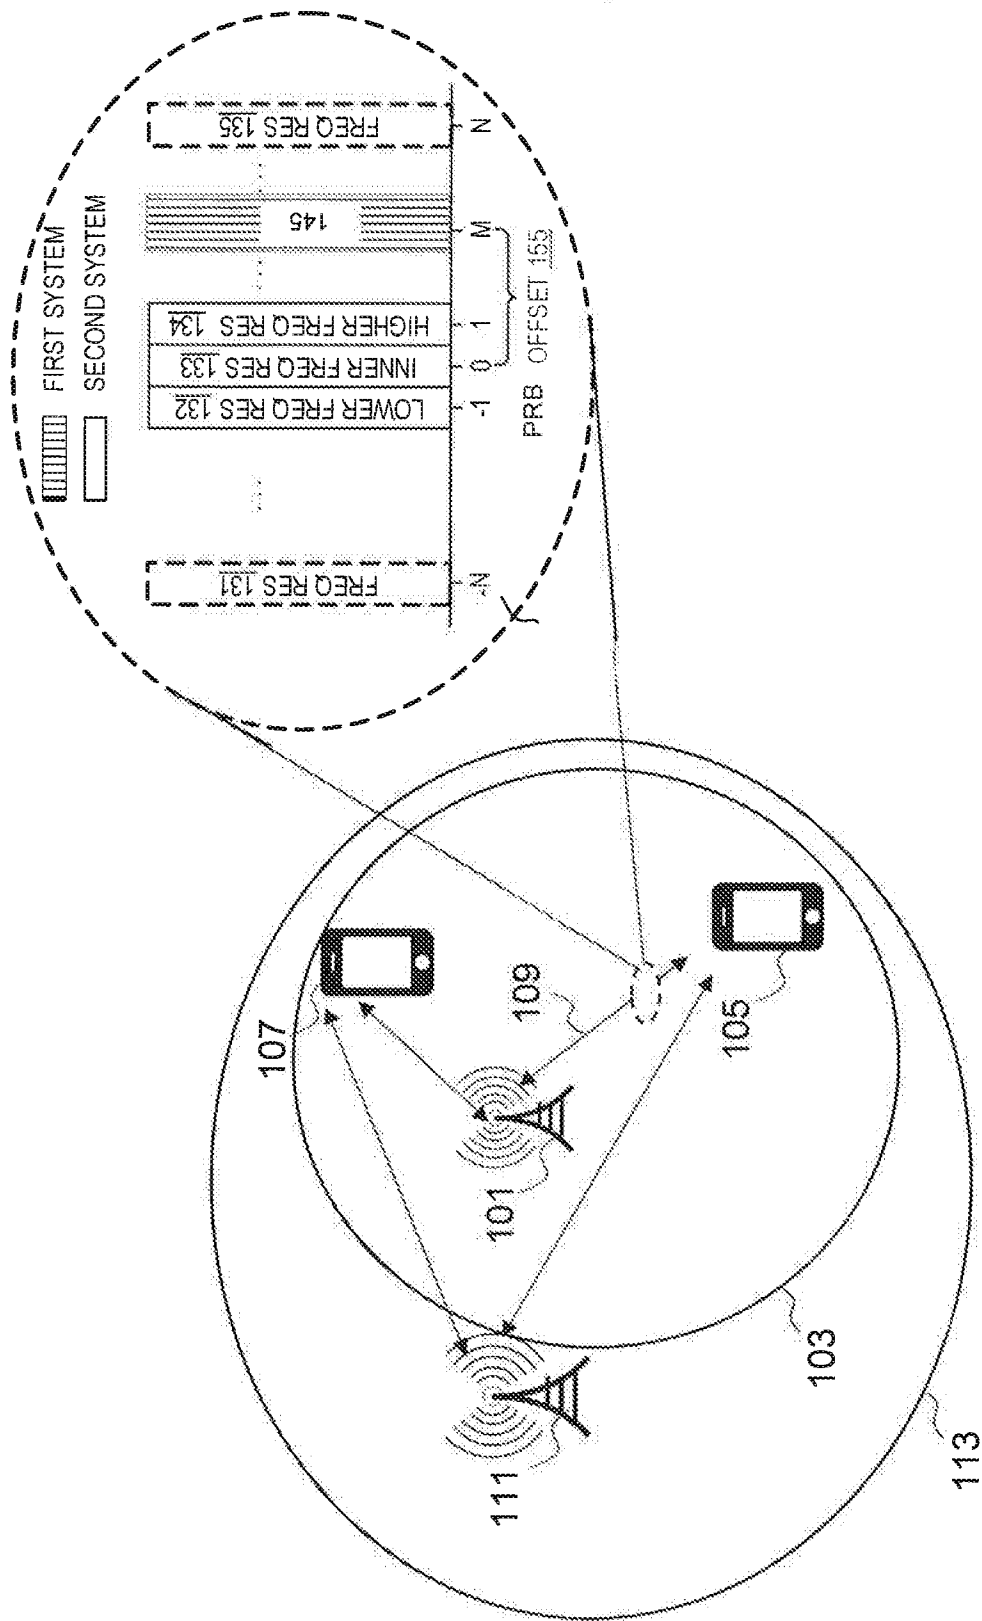


FIG. 1a

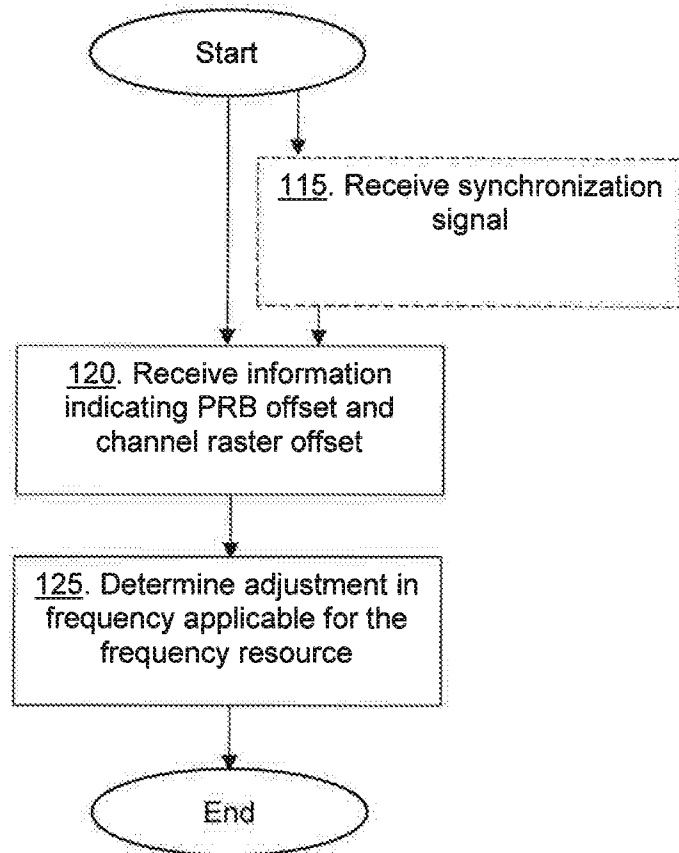


FIG. 1b

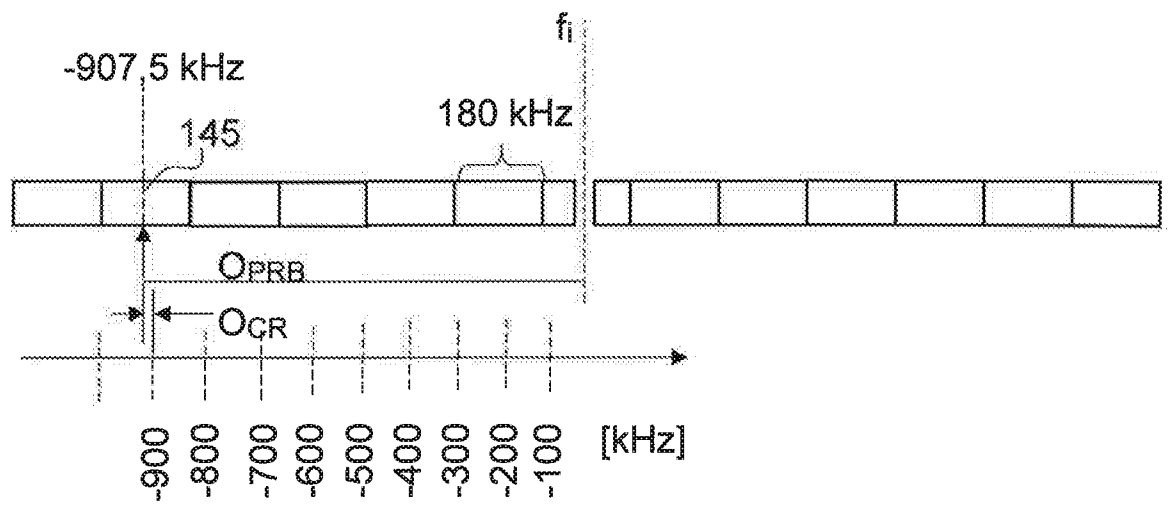


FIG. 1c

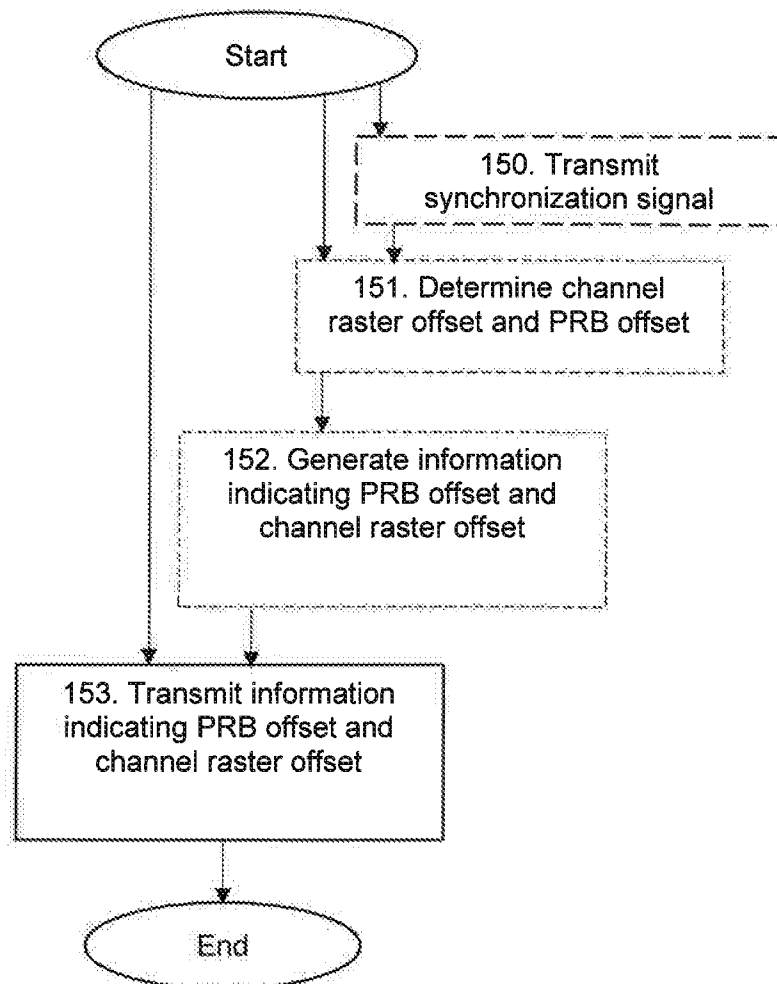


FIG. 1d

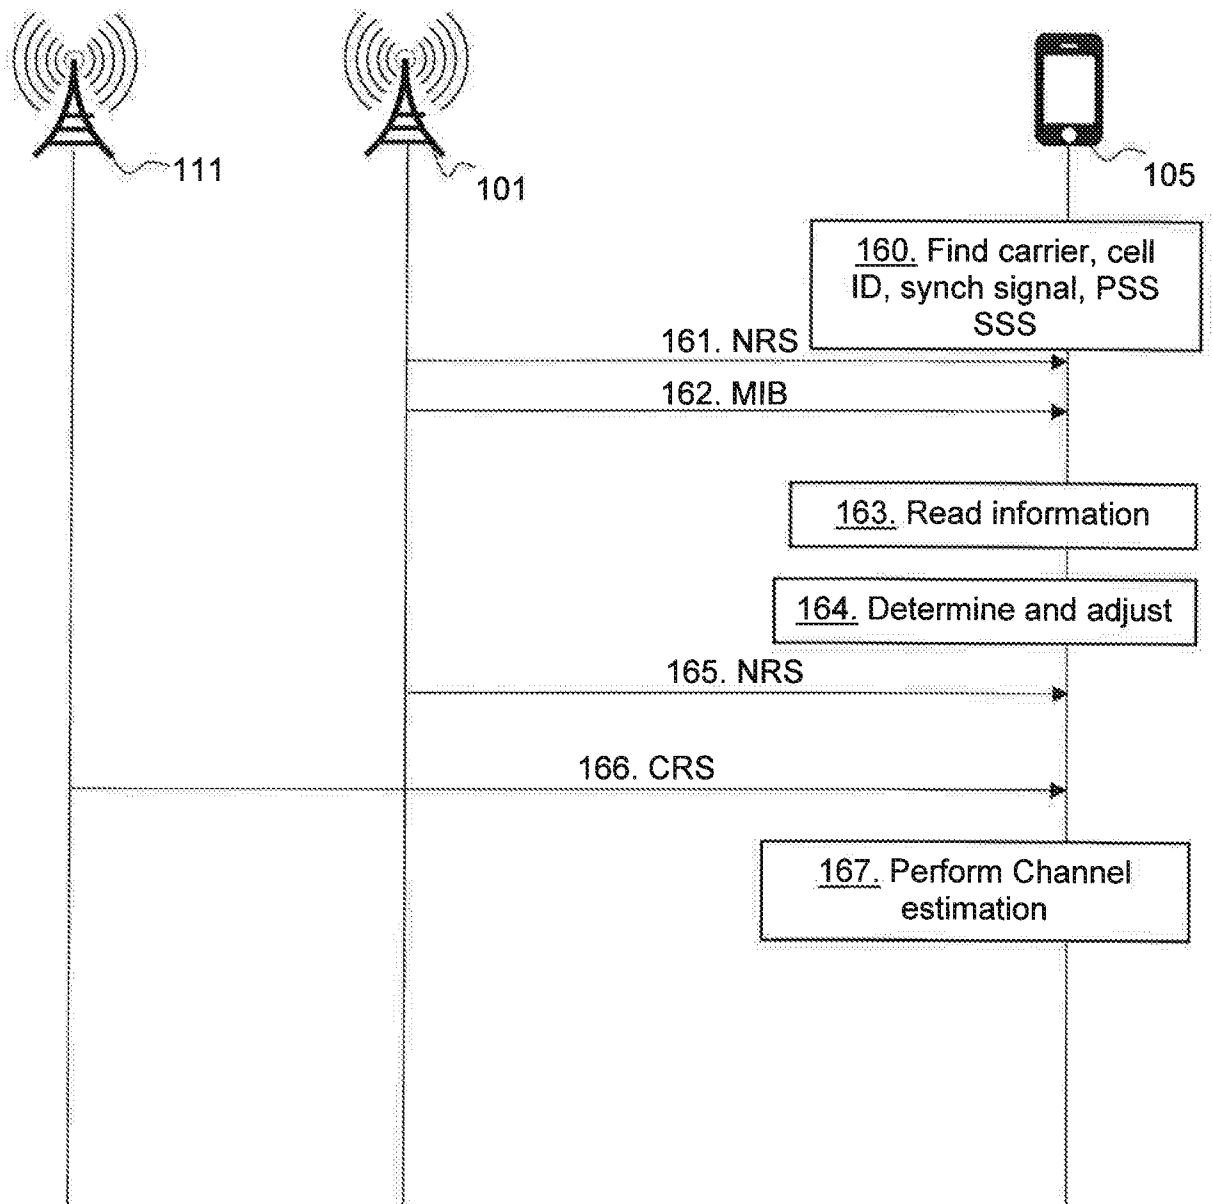


FIG. 1e

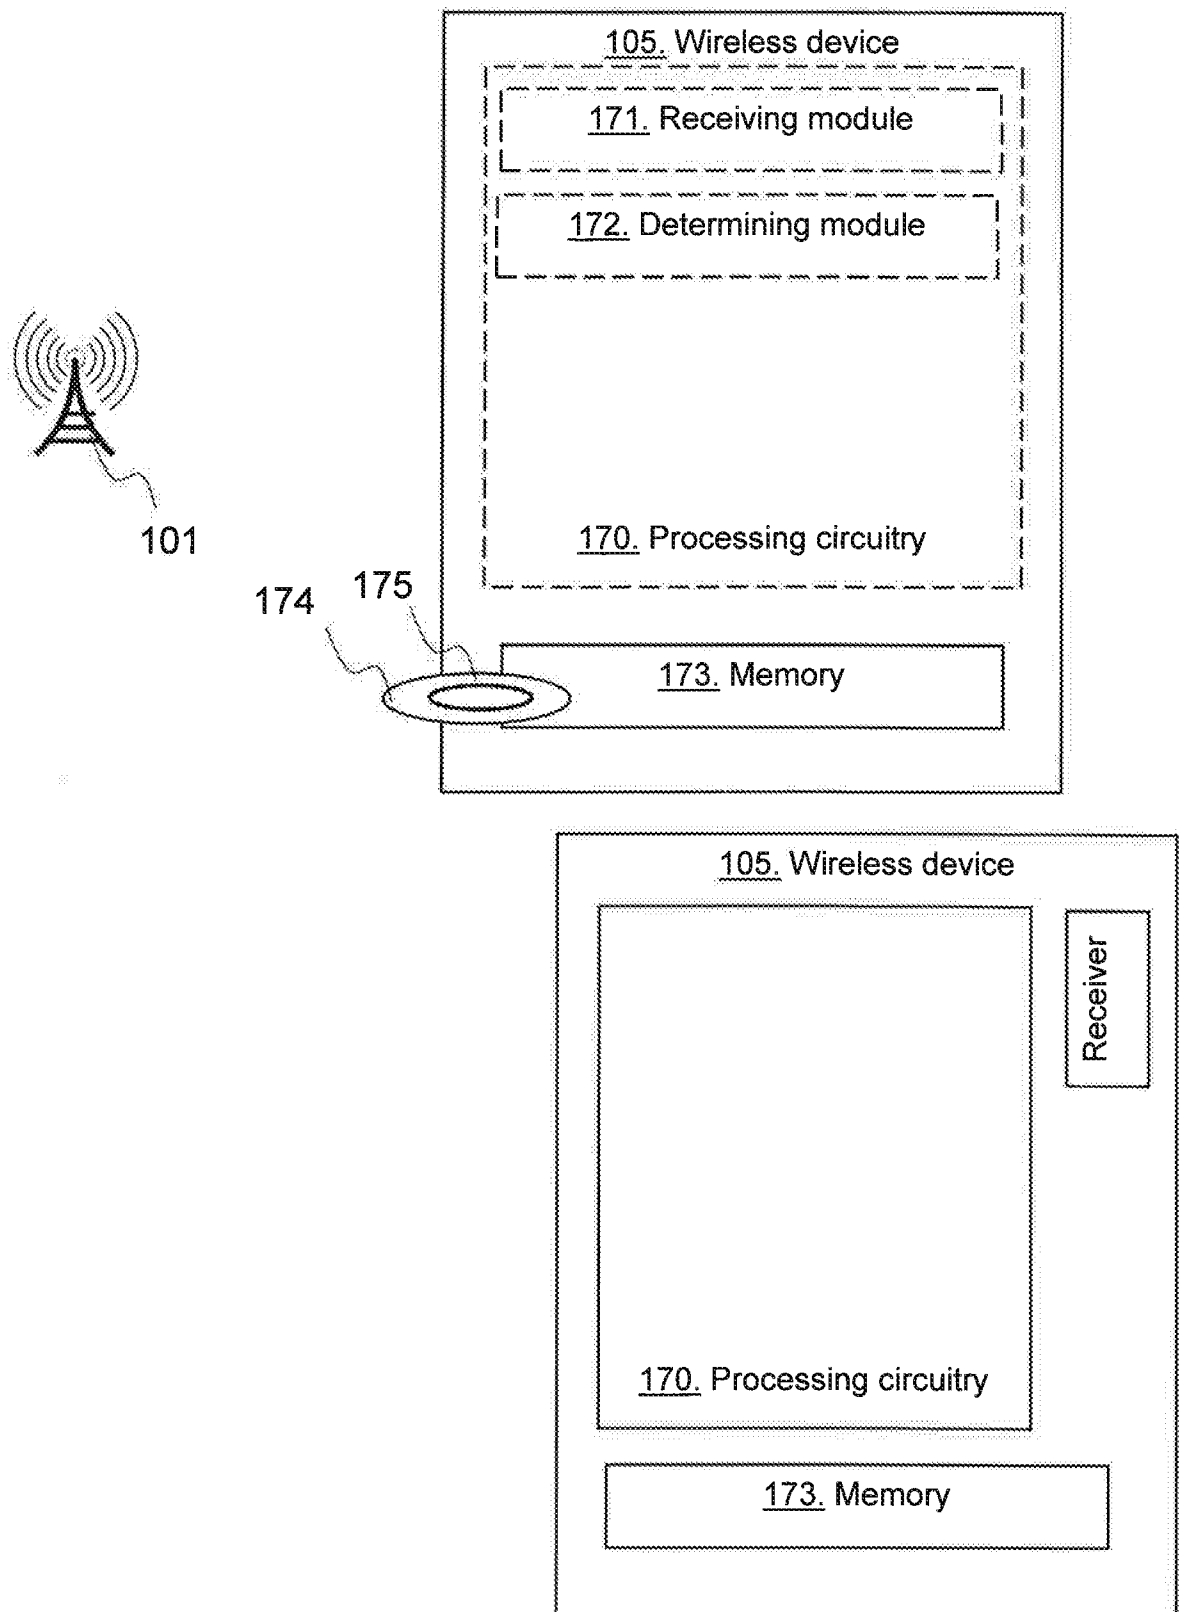


FIG. 2a

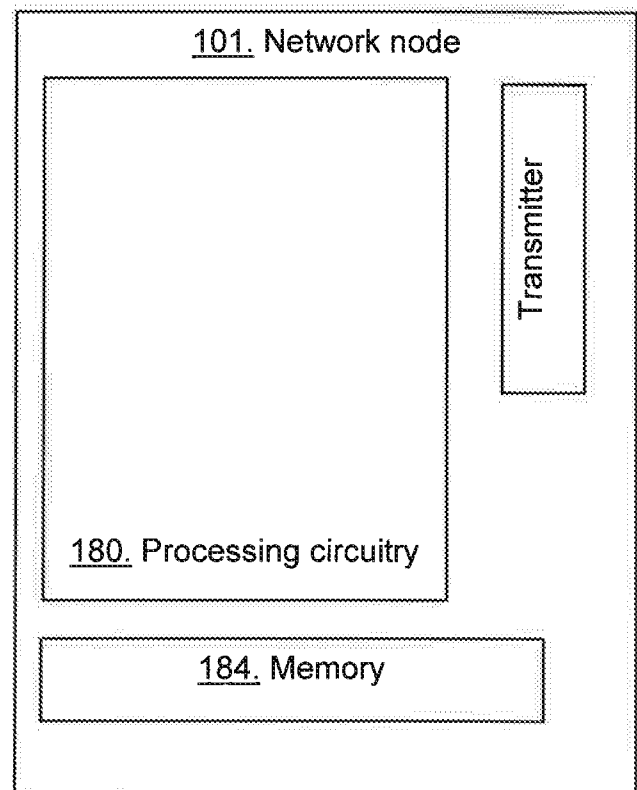
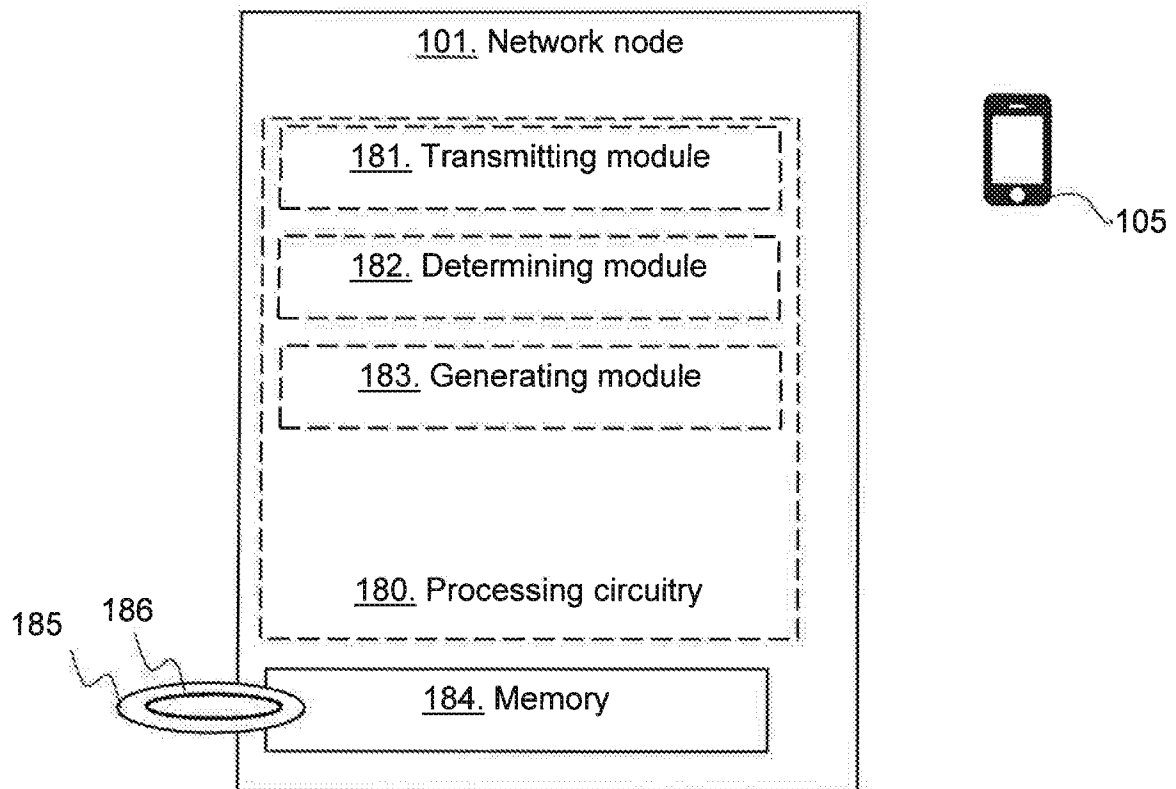


FIG. 2b

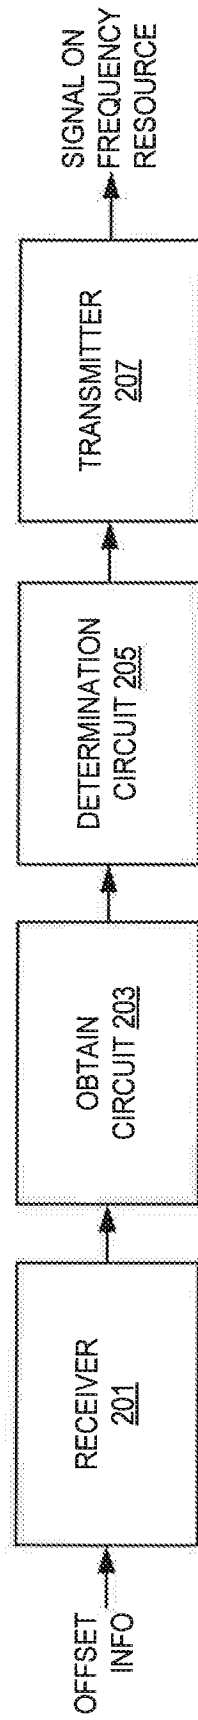
200

FIG. 3a

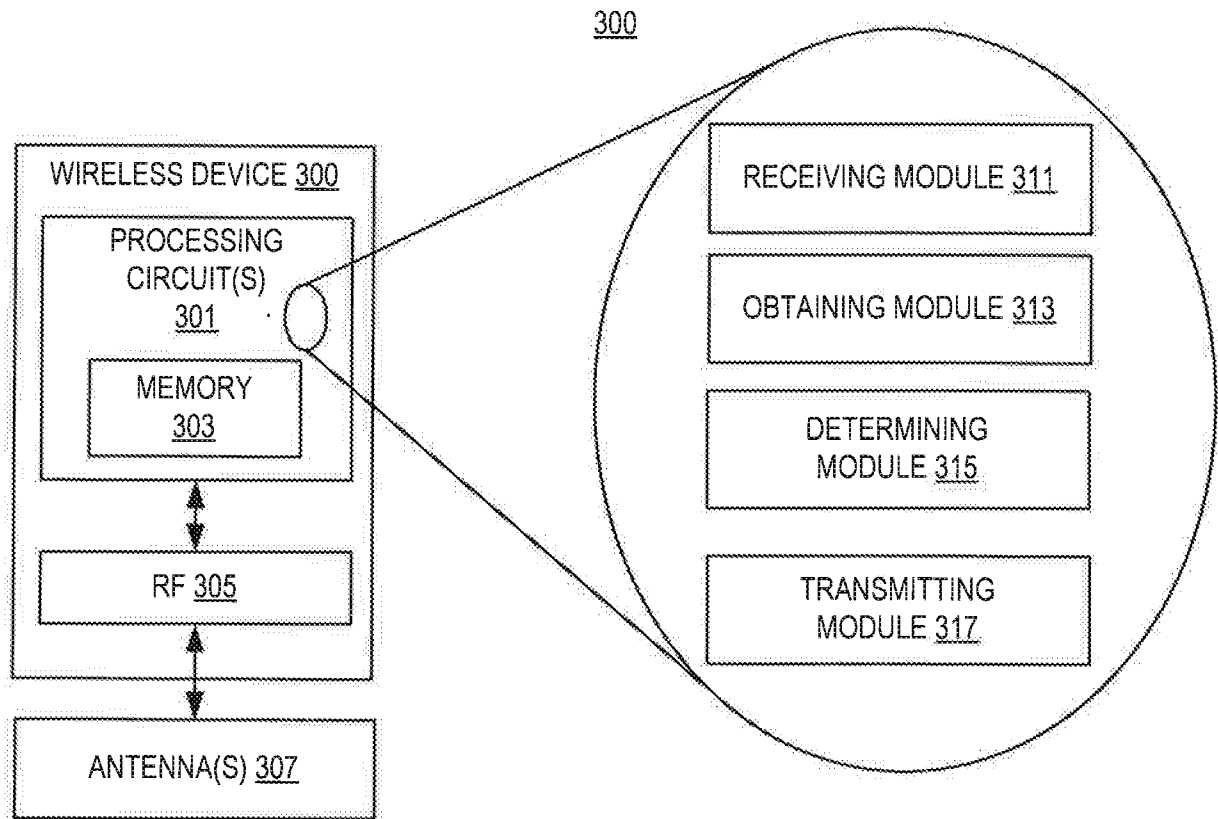
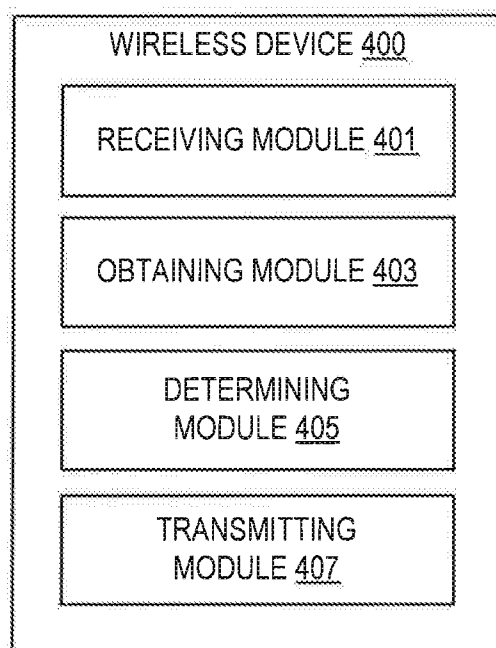


FIG. 3b

400**FIG. 4**

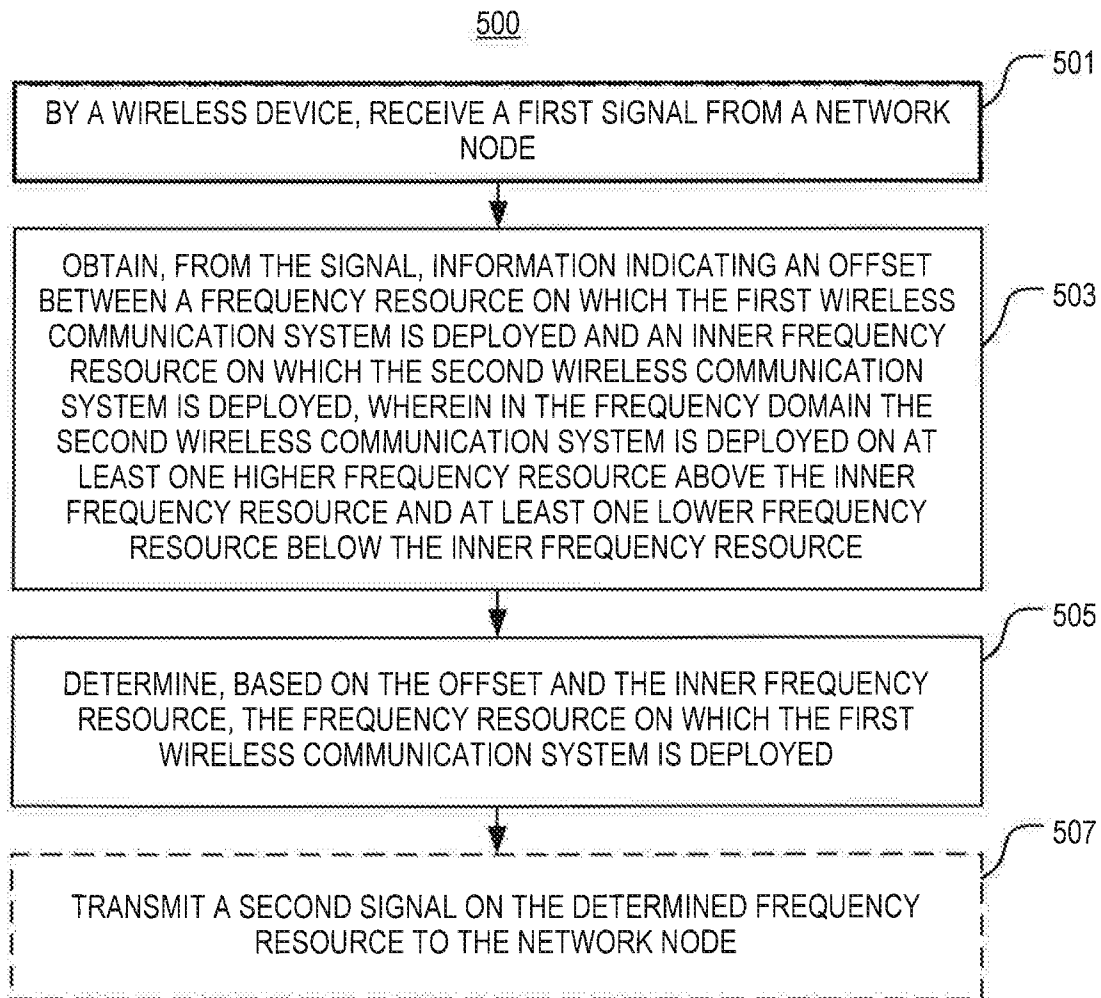


FIG. 5

600

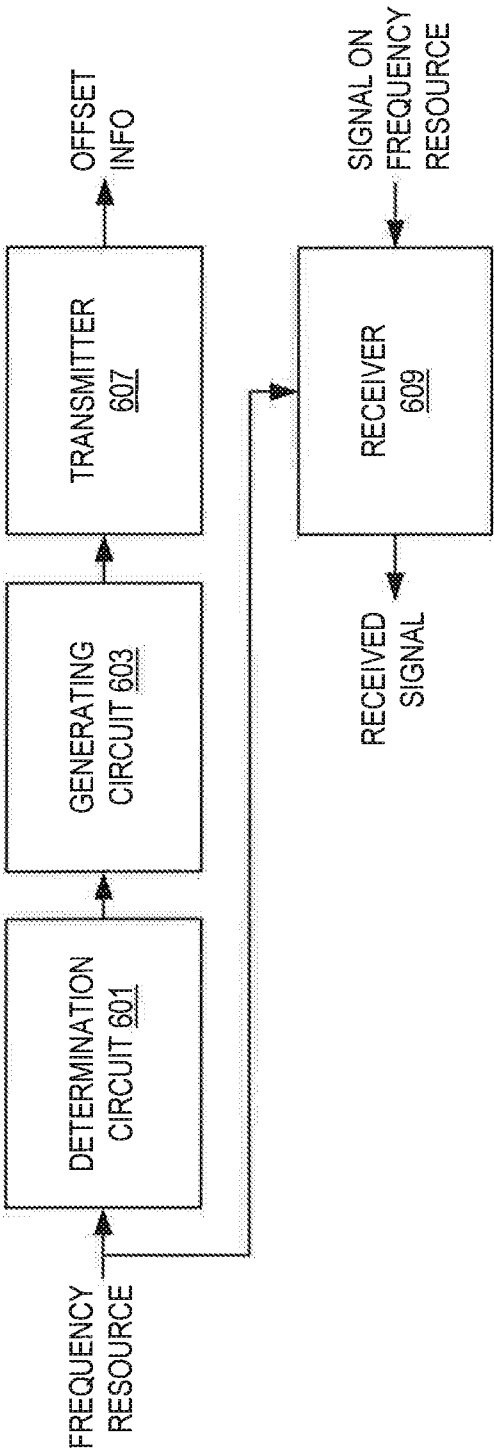


FIG. 6

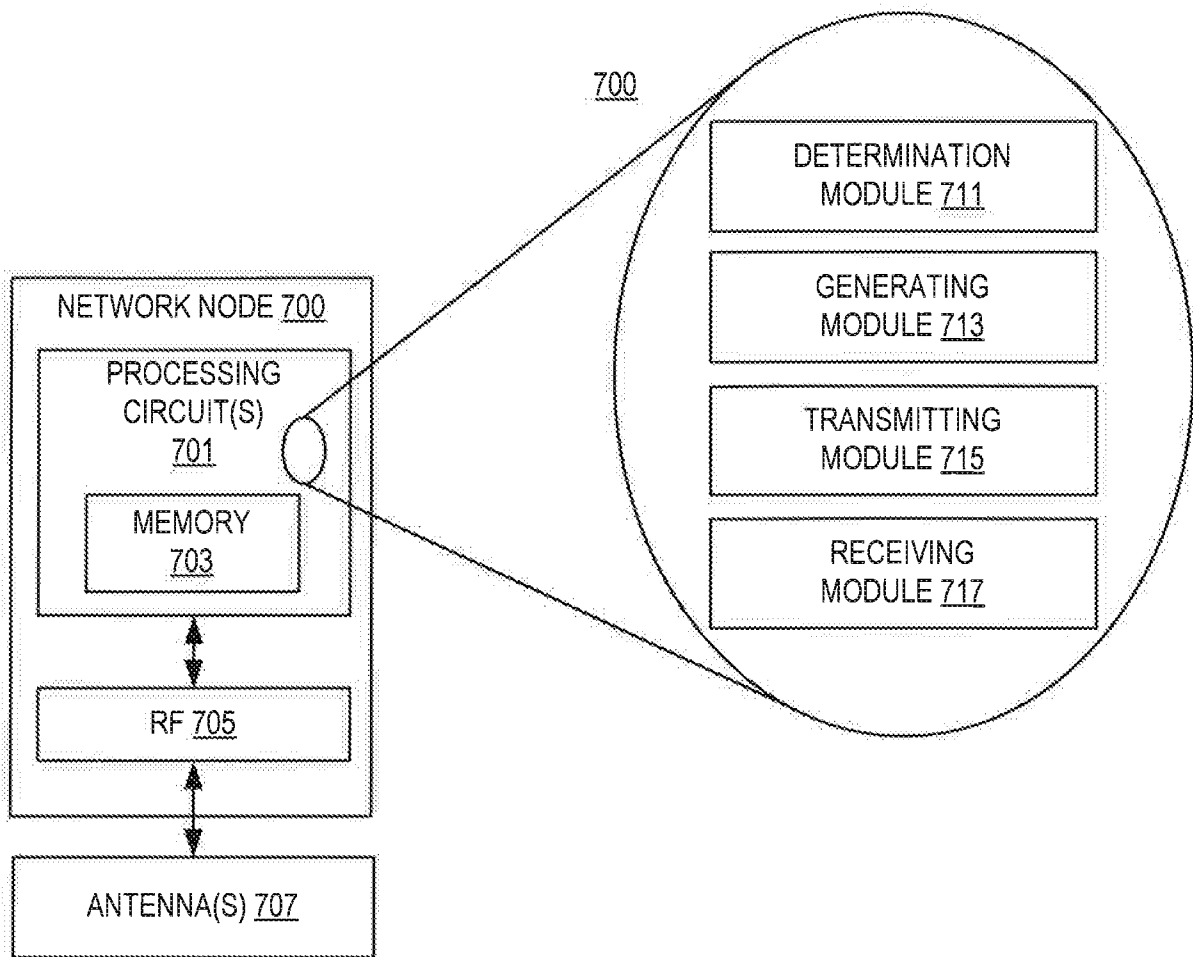
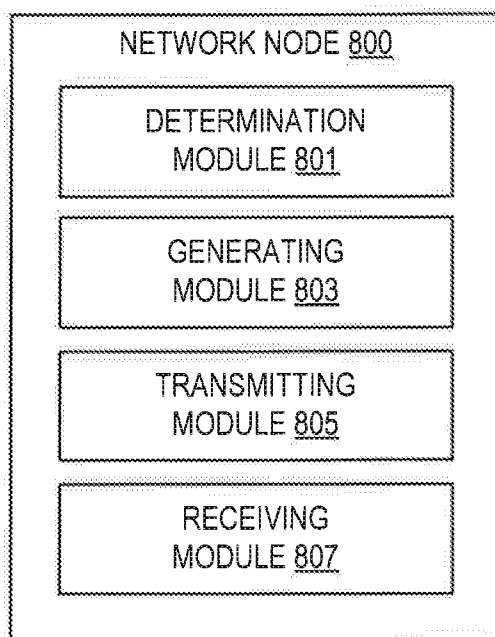


FIG. 7

800**FIG. 8**

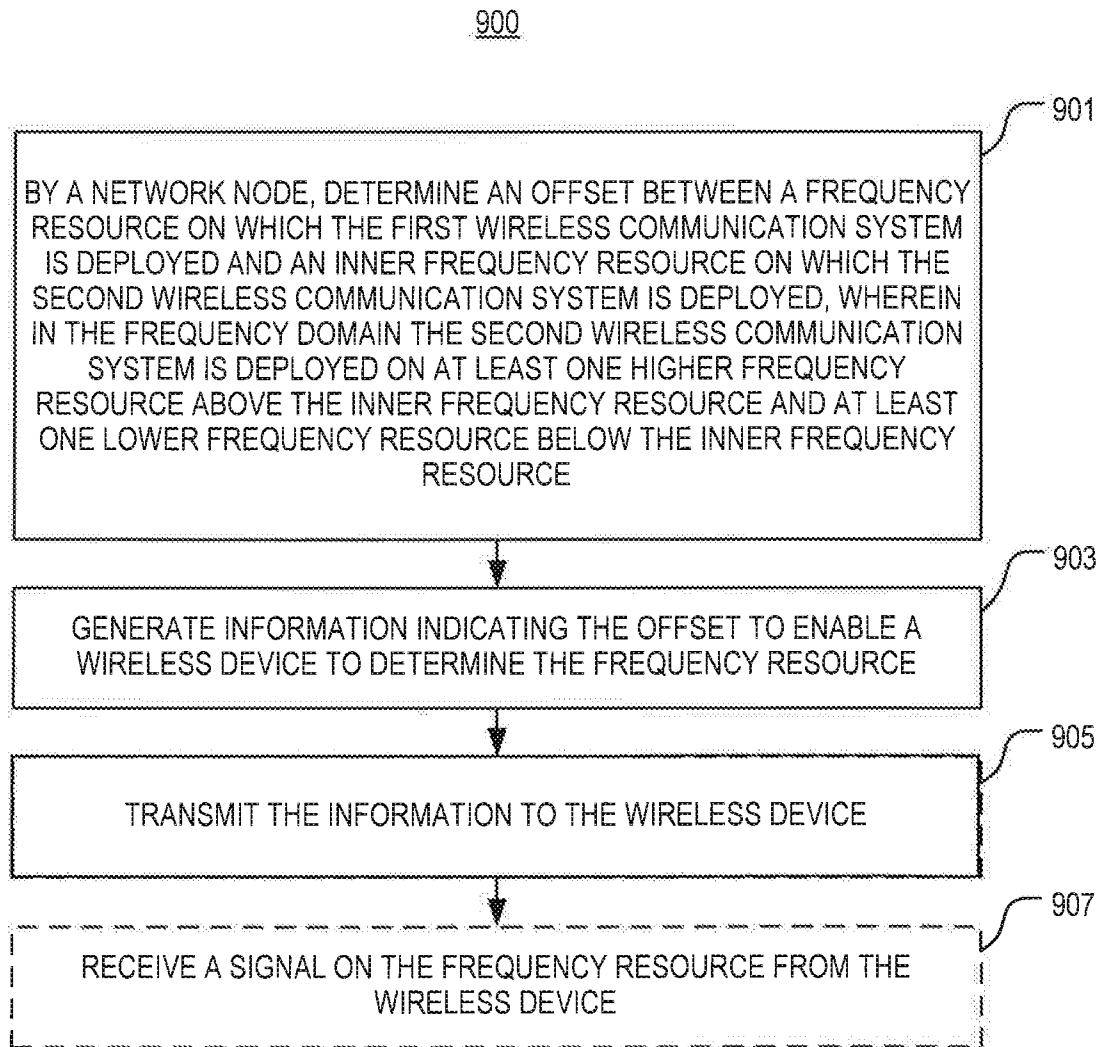


FIG. 9

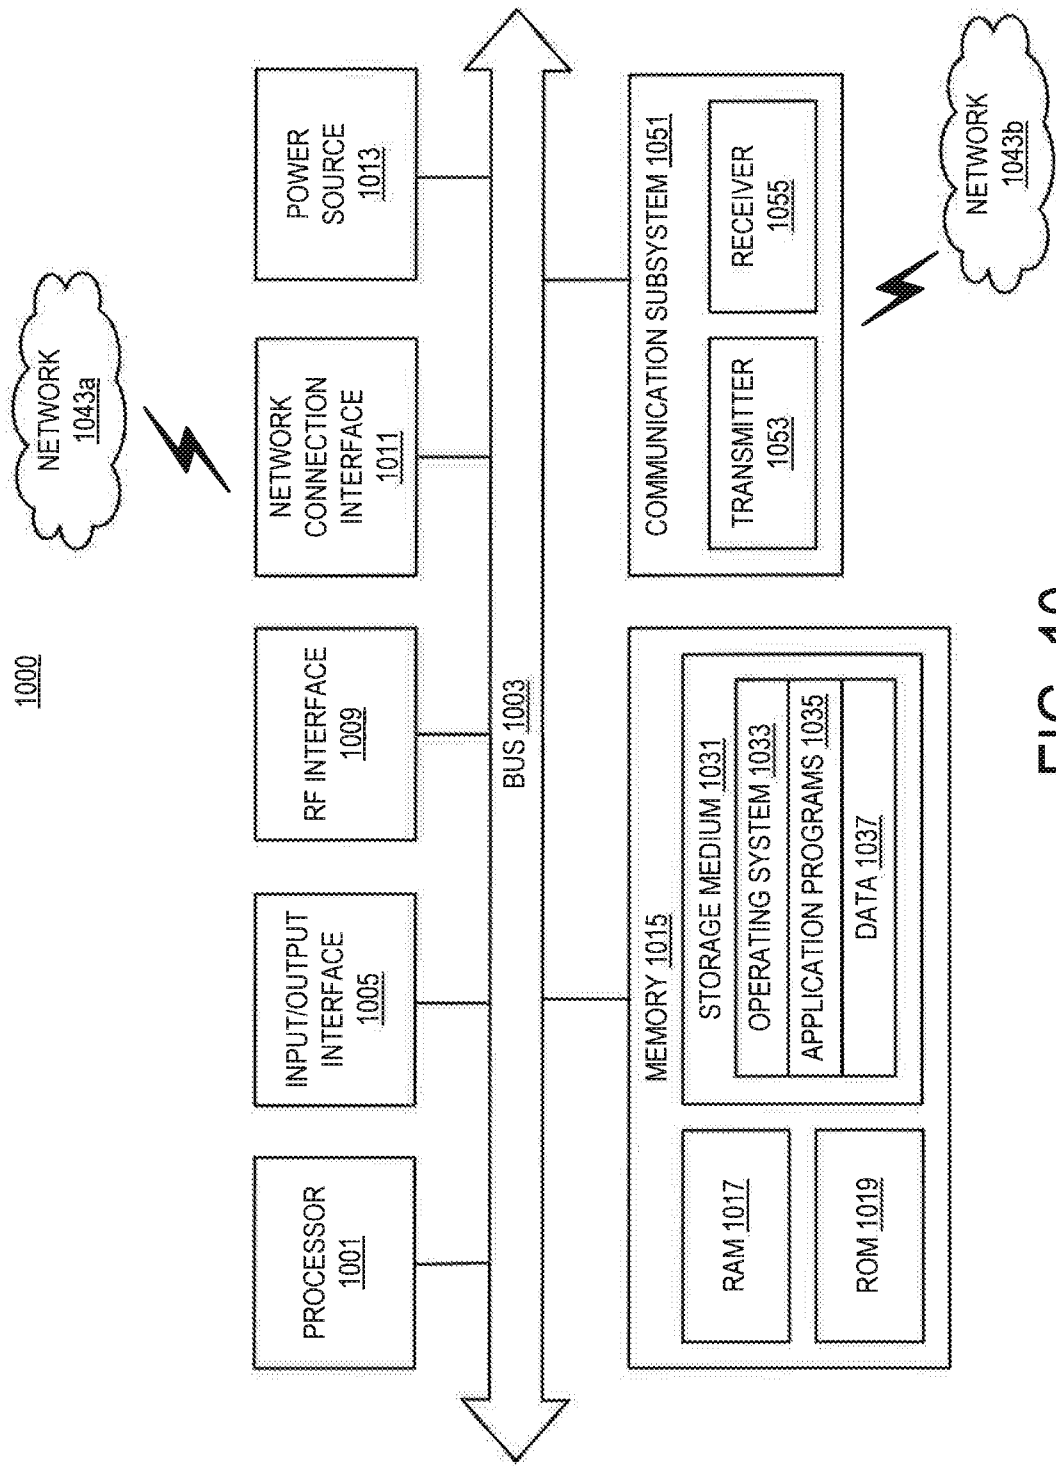


FIG. 10

1100

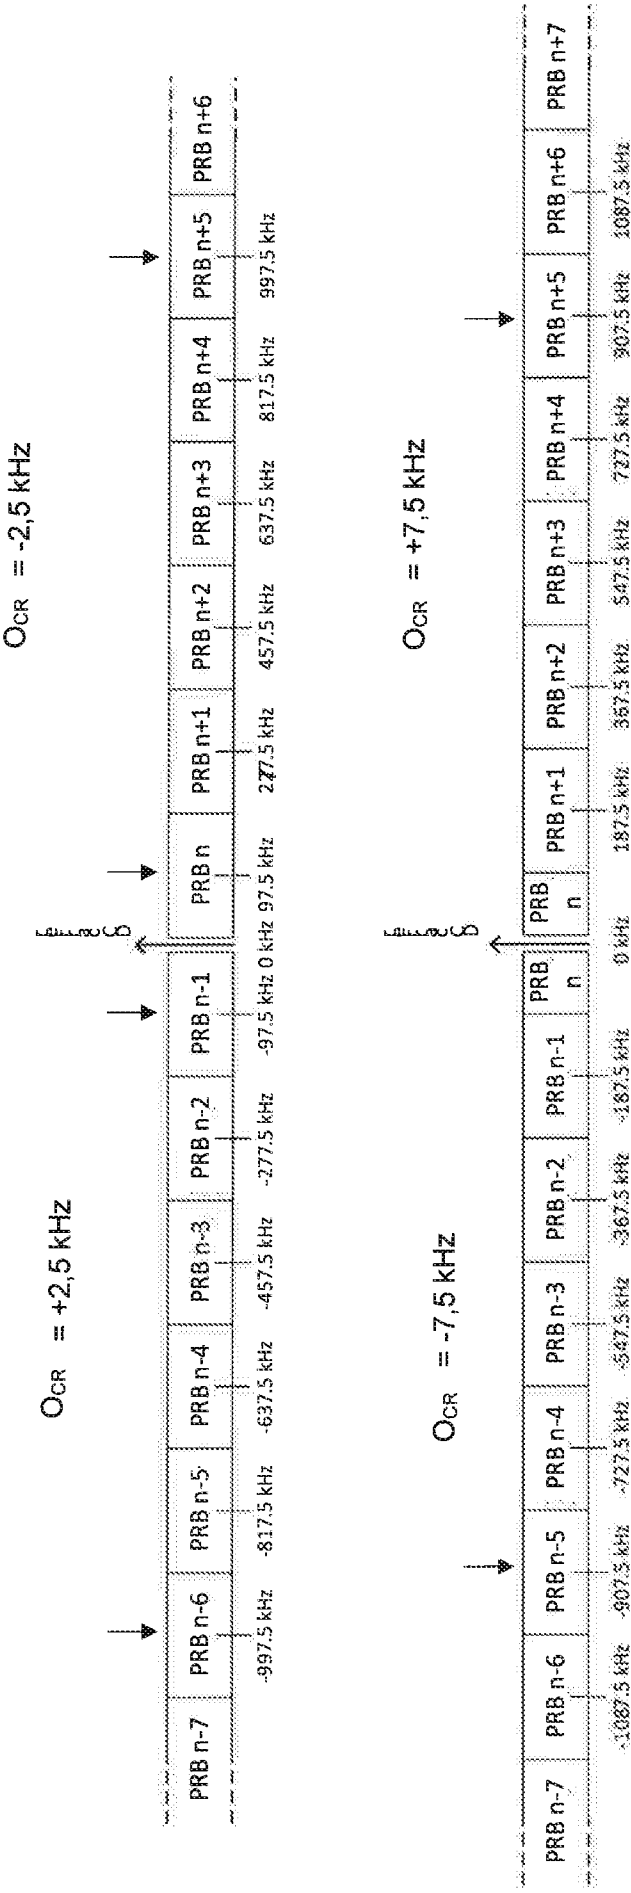


FIG. 11

18/23

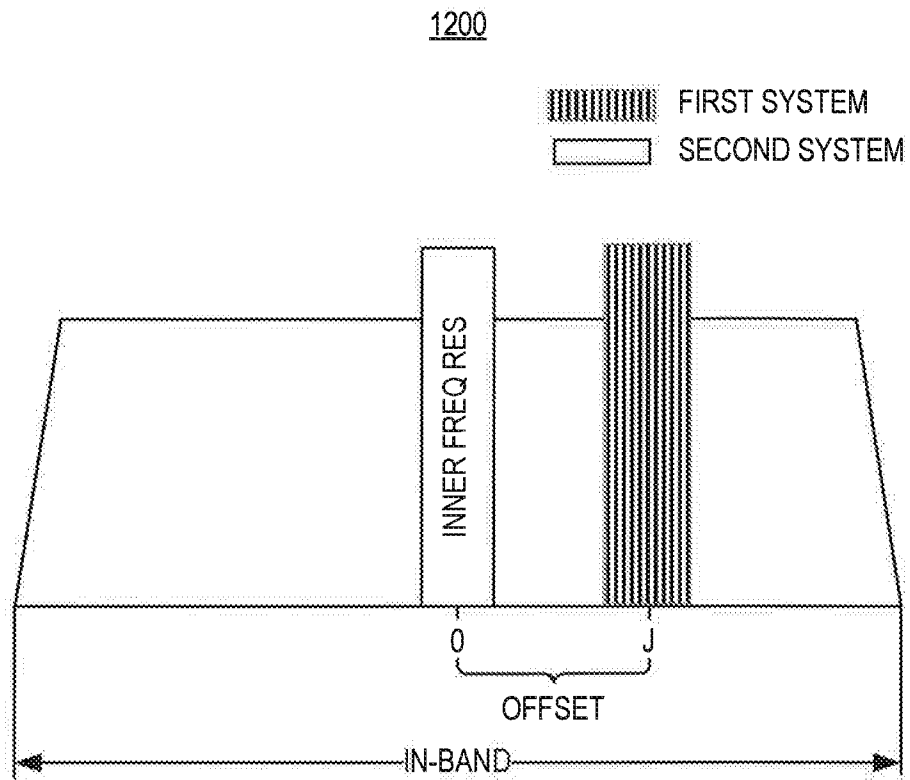


FIG. 12

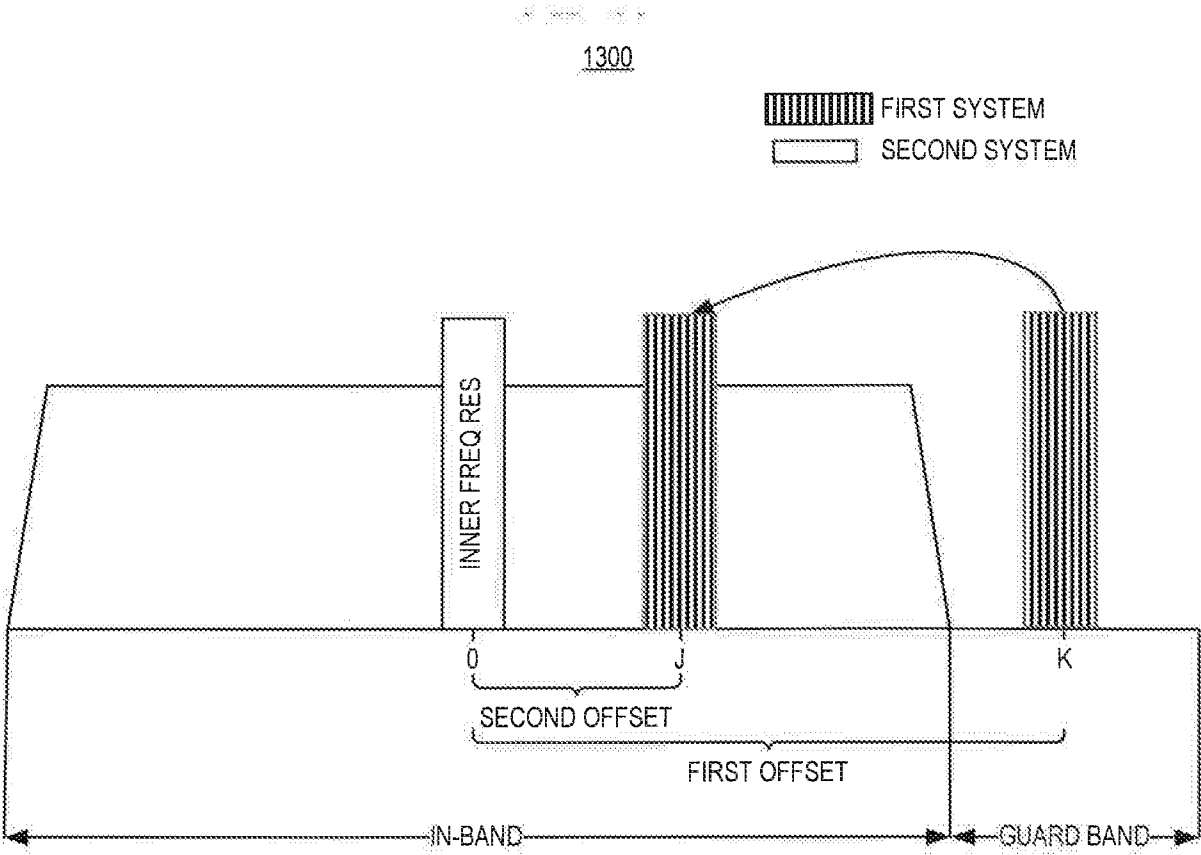


FIG. 13

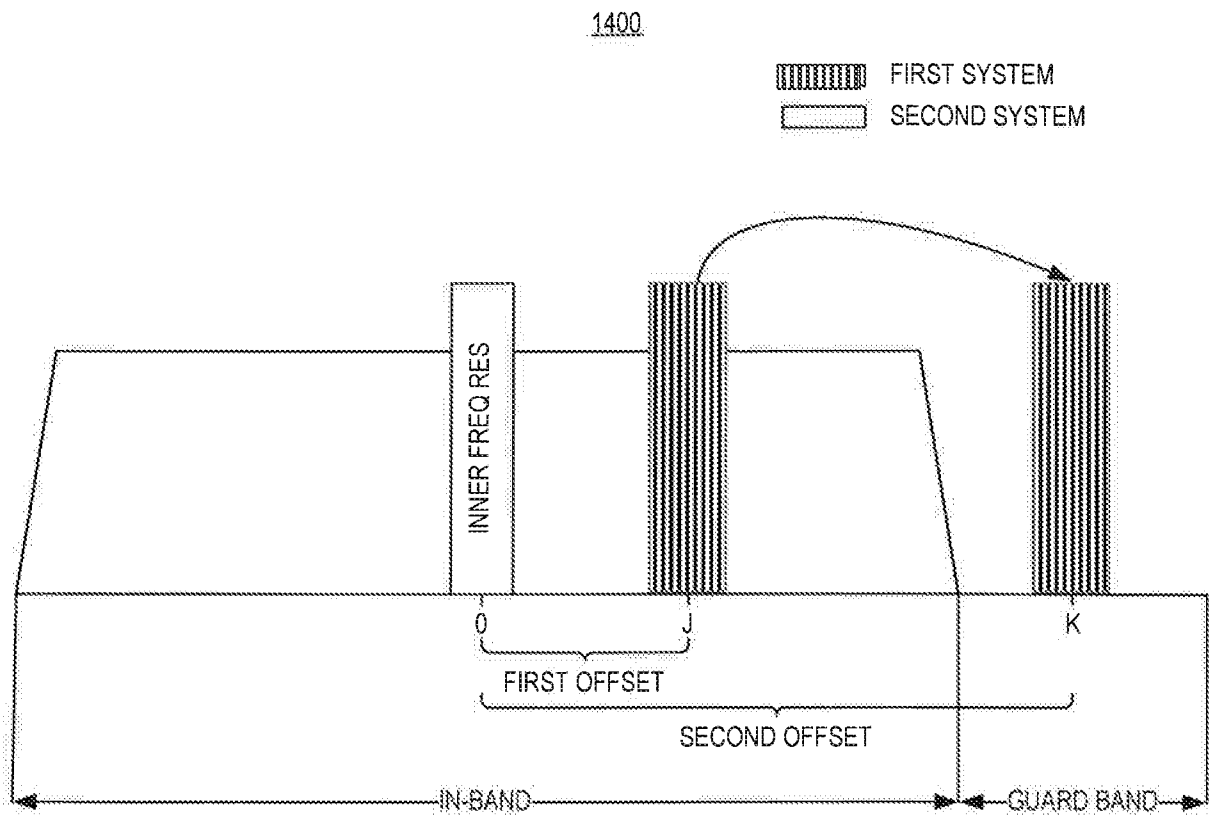


FIG. 14

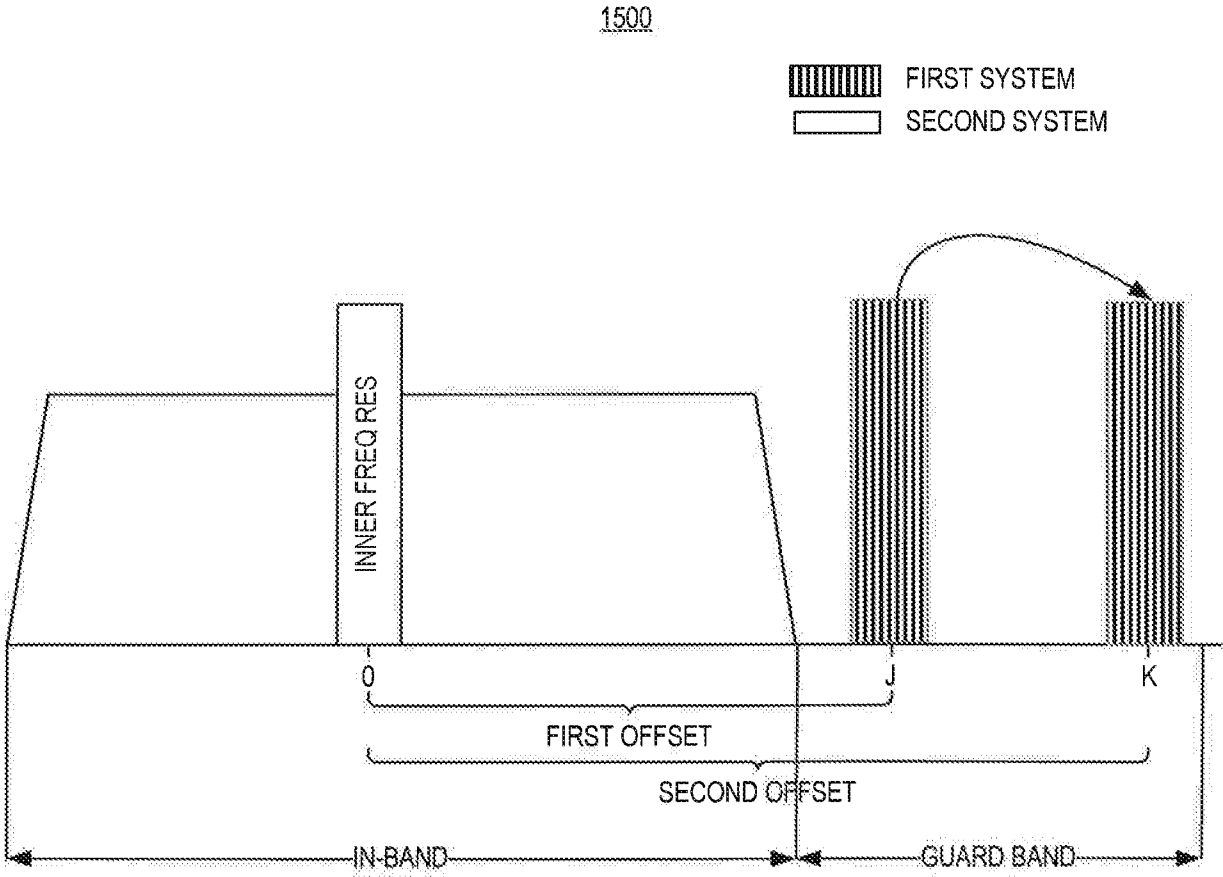


FIG. 15

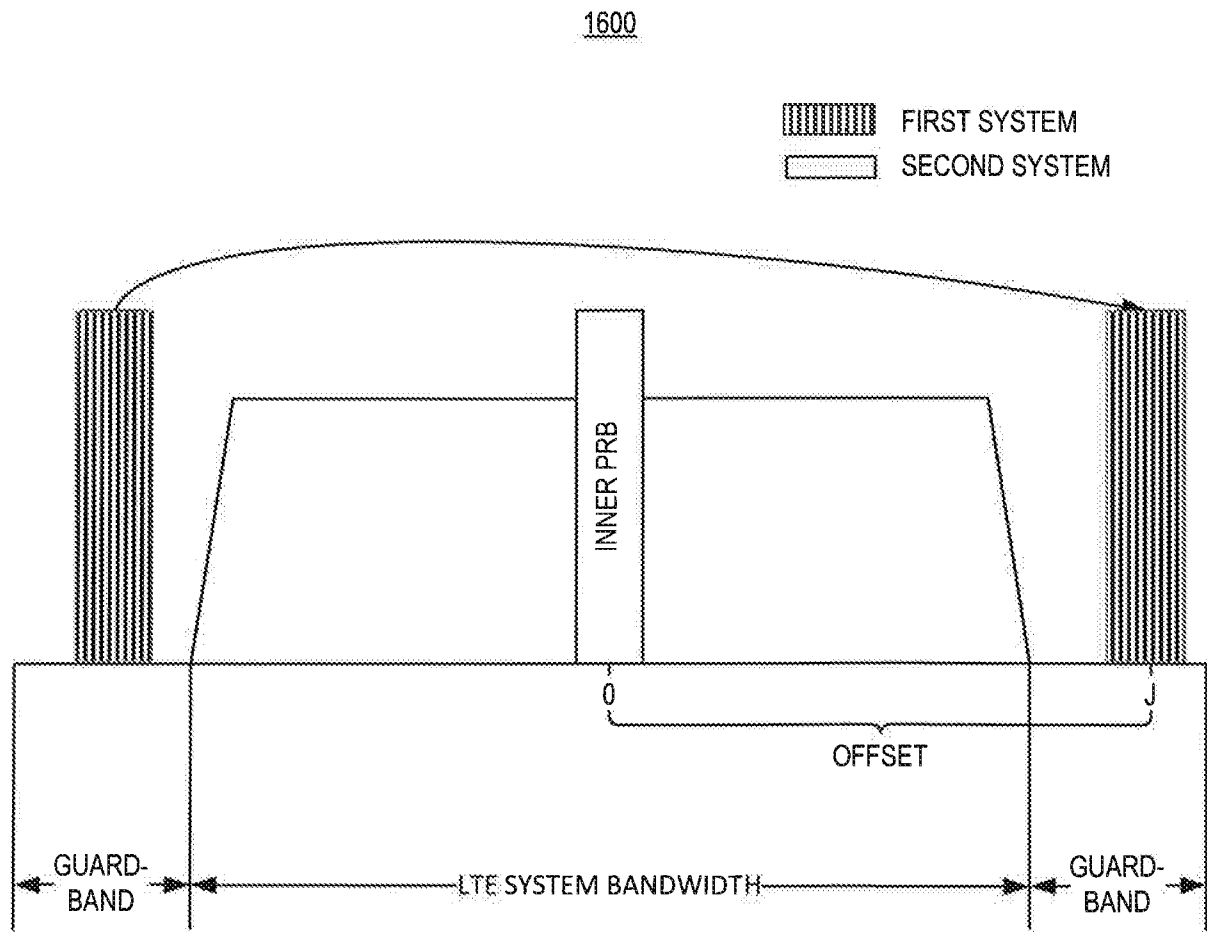


FIG. 16

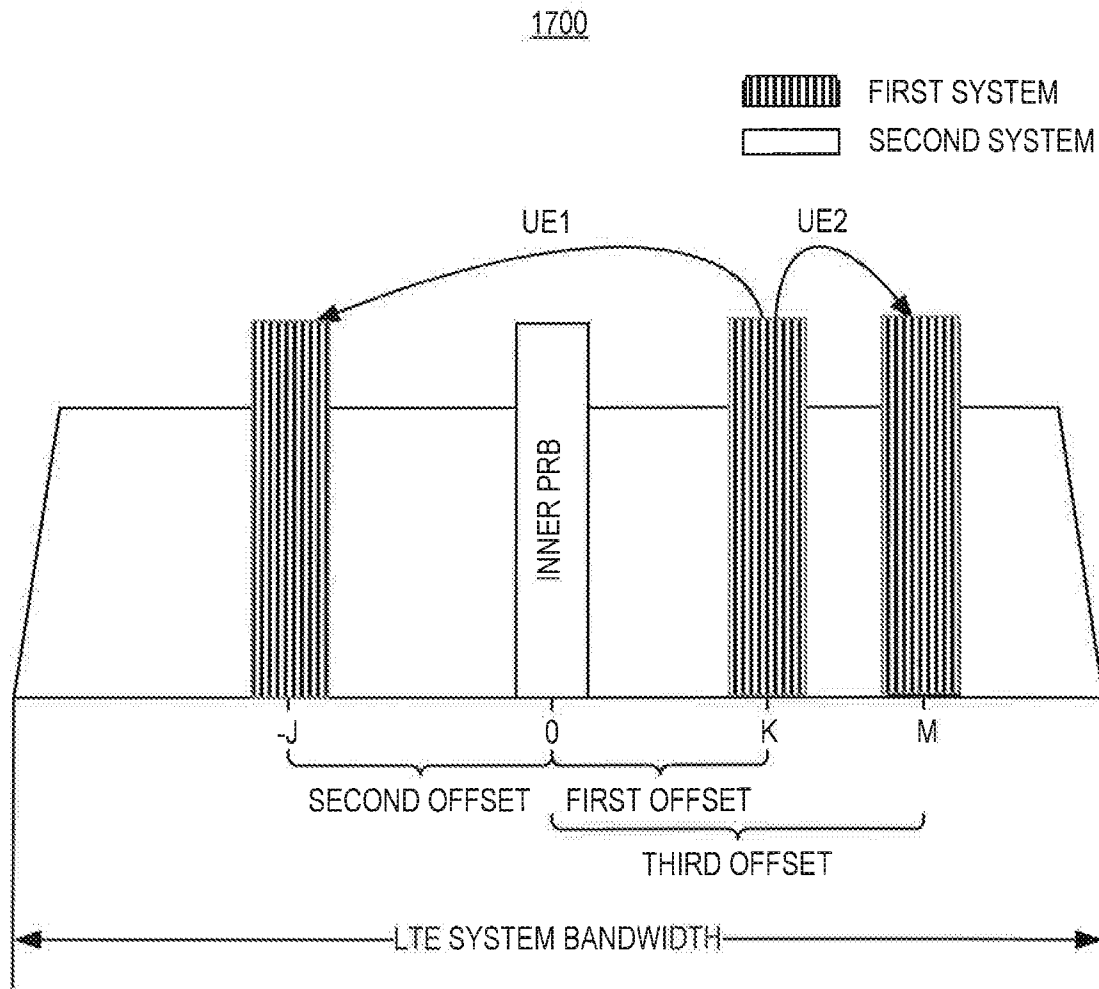


FIG. 17

INTERNATIONAL SEARCH REPORT

International application No
PCT/SE2017/050260

A. CLASSIFICATION OF SUBJECT MATTER
INV. H04L5/00
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	ERICSSON: "NB-IoT - NB-MIB content and design considerations", 3GPP DRAFT; R1-160440 - NB-IOT - NB-MIB CONTENT AND DESIGN CONSIDERATIONS, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS CEDEX, France vol. RAN WG1, no. St. Julian, Malta; 20160215 - 20160219 14 February 2016 (2016-02-14), XP051053776, Retrieved from the Internet: URL: http://www.3gpp.org/ftp/Meetings_3GPP_SYNC/RAN1/Docs/ [retrieved on 2016-02-14] Sections 1-4; table 1 ----- -/-	1-22



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

12 May 2017

Date of mailing of the international search report

19/05/2017

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Devillers, Bertrand

INTERNATIONAL SEARCH REPORT

International application No
PCT/SE2017/050260

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	ERICSSON: "NB-IoT Channel Raster", 3GPP DRAFT; R1-160082 - NB-IOT - CHANNEL RASTER, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS CEDEX ; FRANCE , vol. RAN WG1, no. Budapest, HU; 20160118 - 20160120 12 January 2016 (2016-01-12), XP051064697, Retrieved from the Internet: URL:http://www.3gpp.org/ftp/tsg_ran/WG1_RL 1/TSGR1_AH/LTE_NB-IoT_1601/Docs/ [retrieved on 2016-01-12] cited in the application Section 1-4; figures 1-2; table 1 -----	1-22