



- (51) International Patent Classification:
G01S 5/18 (2006.01) G01S 15/74 (2006.01)
G01S 5/30 (2006.01)
- (21) International Application Number:
PCT/US2015/014073
- (22) International Filing Date:
2 February 2015 (02.02.2015)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
14/170,879 3 February 2014 (03.02.2014) US
- (71) Applicant: **GOOGLE INC.** [US/US]; 1600 Amphitheatre Parkway, Mountain View, California 94043 (US).
- (72) Inventors: **BORGGAARD, Geoffrey Allen**; 1600 Amphitheatre Parkway, Mountain View, California 94043 (US). **KOULOMZIN, Daniel George**; 160 Amphitheatre Parkway, Mountain View, California 94043 (US). **WREN,**

Christopher Richard; 1600 Amphitheatre Parkway, Mountain View, California 94043 (US).

(74) Agents: **KAMLAY, Aaron** et al.; Morris & Kamlay LLP, 1150 18th Street, NW, Suite 575, Washington, District of Columbia 20036 (US).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,

[Continued on next page]

(54) Title: MAPPING POSITIONS OF DEVICES USING AUDIO

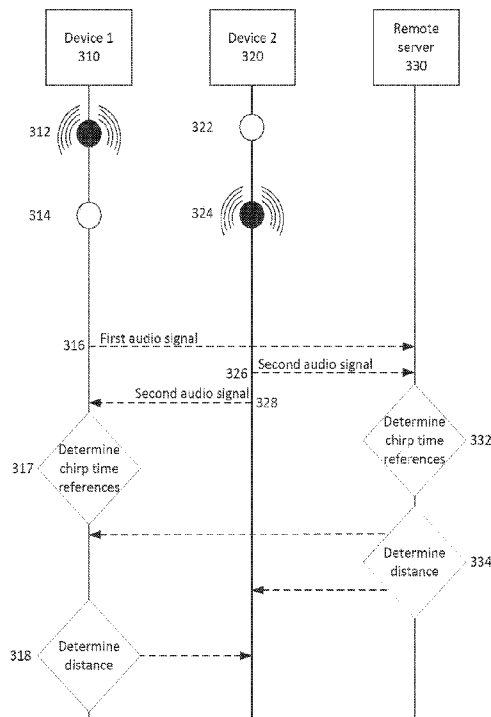FIG. 3



(57) Abstract: Disclosed are methods and systems for determining distance between two or more mobile devices utilizing a sound emitted from each device such as a chirp. Each device may determine or receive an indication of a time reference for each instance the device emits or detects a chirp. Utilizing the time reference data, the distance between the two or more devices may be determined assuming the sound travels at a constant speed of 340.29 m/s. Techniques for disambiguating orientation of the devices relative to one another are also disclosed.

WO 2015/117064 A1

TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, **Published:**
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, — *with international search report (Art. 21(3))*
LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE,
SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

MAPPING POSITIONS OF DEVICES USING AUDIO

BACKGROUND

[1] The speed of sound is generally constant assuming standard temperature and pressure at 340.29 m/s. A variety of techniques exist for utilizing audio to determine a position to an object. For example, sonar determines a range to an object by emitting one or more pulses of sound and listening for an echo. As another example, the distance between two locations may be estimated using ultrasonic and radio pulses in tandem, based upon the time difference in arrival between the audio chirp and the radio chirp, which travels at the speed of light.

BRIEF SUMMARY

[2] According to an implementation of the disclosed subject matter, a system is provided that includes a first mobile device that is configured to emit a first chirp at a first time reference. The first mobile device may be configured to receive a first audio signal and detect a second chirp from a second mobile device at a second time reference within the first audio signal. It may obtain an indication of a first distance between the first mobile device and the second mobile device based on the first time reference, the second time reference, a third time reference, and a fourth time reference. The third time reference may correspond to when the second mobile device emits the second chirp and the fourth time reference may correspond to when the second mobile device receives the first chirp.

[3] In an implementation, a first audio signal may be received from a first mobile device. A second audio signal may be received from a second mobile device. A first time reference corresponding to a first chirp from the first mobile device may be determined in the first audio signal. A second time reference corresponding to a second chirp from the second mobile device may be determined in the first audio signal. A third time reference corresponding to the first chirp from the second mobile device may be determined in the second audio signal. A fourth time reference corresponding to the second chirp from the second mobile device may be

determined in the second audio signal. A first distance between the first chirp and the second chirp may be determined based on the first time reference and the second time reference. A second distance between the first chirp and the second chirp may be determined based on the third time reference and the fourth time reference. The first distance may be compared to the second distance. A distance calculation may be provided to the first mobile device and the second mobile device.

[4] An advantage of the disclosed systems and methods is that the calculation can determine relative orientation of a plurality of devices. The disclosed implementations also provide a distance determination between two or more devices without custom hardware or additional hardware besides that which is typically included in a smartphone. Additional features, advantages, and implementations of the disclosed subject matter may be set forth or apparent from consideration of the following detailed description, drawings, and claims. Moreover, it is to be understood that both the foregoing summary and the following detailed description provide examples of implementations and are intended to provide further explanation without limiting the scope of the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[5] The accompanying drawings, which are included to provide a further understanding of the disclosed subject matter, are incorporated in and constitute a part of this specification. The drawings also illustrate implementations of the disclosed subject matter and together with the detailed description serve to explain the principles of implementations of the disclosed subject matter. No attempt is made to show structural details in more detail than may be necessary for a fundamental understanding of the disclosed subject matter and various ways in which it may be practiced.

[6] FIG. 1 shows a computer according to an implementation of the disclosed subject matter.

[7] FIG. 2 shows a network configuration according to an implementation of the disclosed subject matter.

[8] FIG. 3 is an example system for determining the distance between two or more device according to an implementation disclosed herein.

[9] FIG. 4 is an example of how time references are associated with chirp detection or emission according to an implementation disclosed herein.

[10] FIG. 5 is an example method for determining the distance between two or more devices as disclosed herein.

[11] FIG. 6 is an example configuration of devices that may be used to determine orientation of one device relative to two other devices according to an implementation disclosed herein.

DETAILED DESCRIPTION

[12] Disclosed is a way to determine the distance and orientation between two or more devices. As stated earlier, the speed of sound is generally constant. As an example, an application may be launched that coordinates the audio “chirp” for each device, devices A and B. The chirps may be similar in length and sound, and/or the chirps may be activated manually by a user controlling the device. Device A may receive an indication that it has emitted a chirp at time 0 or at sample 0 and receive device B’s chirp at time 4.5 seconds later, i.e., 4.5 seconds after the first chirp is emitted by A. Device B may emit its chirp at time 0 and receive device A’s chirp 1.5 seconds earlier, i.e., at a time -1.5s relative to the time Device B emitted its chirp. By comparing the interval between chirps as detected by each device, the distance between the devices may be known. For example, the average between the two devices in this example is $(4.5s - -1.5s)/2 = 3s$, which may be multiplied 340.29 meters/second to determine the distance between device A and device B. Devices A and B are approximately 1020m apart in this example.

[13] Digital audio may be sampled at one sample every 44,100th of a second. In an implementation the speed of sound and digital sample rate may be used to determine a distance and/or orientation between two or more devices with an audio “chirp.” Devices A and B may provide sample time indications instead of raw time as used in the above example. To illustrate, Device A may receive an indication that it has emitted a chirp at sample time 0 and it may

receive Device B's chirp at sample time 1000. The sample time may refer to the number of samples in a digital audio stream. In this example, 1000 samples of the digital audio have been made between Device A's indication of a chirp and Device B's chirp being received by Device A. Device B may receive an indication that it has emitted a chirp at sample time 0 and it may have received or detected Device A's chirp at sample time -950, i.e., Device B sampled Device A's chirp 950 samples before it received an indication that Device B had emitted a chirp. To determine the distance between the devices, the sample interval, corresponding to the difference between when an indication of a chirp was received from a first device and the time at which a chirp was detected or received by a second device, may be determined. For Device A, the distance calculation is: $(1,000 \text{ samples} - 0 \text{ samples}) \times 1 \text{ sample} / 44,100 \text{ seconds} \times 340 \text{m/s} = 7.7 \text{m}$. For Device B, the distance calculation is: $(0 \text{ samples} - -950 \text{ samples}) \times 1 \text{ sample} / 44,100 \text{ seconds} \times 340 \text{m/s} = 7.3 \text{m}$. The average between the two distance calculations may be utilized or one device's distance calculation may be used in lieu of another's. The use of sample times to determine time differences may be useful, for example, when a remote server or other third device calculates time differences and/or distances between devices. In this case, the remote server or other device may be provided only audio files that include or are believed to include one or more chirps, and an indication of the sample rate of the audio file, which often may be encoded or embedded within the audio file itself. The server thus may quickly determine time differences based upon the number of samples occurring between chirps, without the need for other devices to track separately the time at which chirps occur. Such a configuration also may allow for configurations in which devices other than the remote server or similar device detects chirps within audio samples, and the devices capturing the audio samples are not configured to perform chirp detection.

[14] In the event that three devices are utilized, a relative orientation of the three devices may be determined. The three devices, for example, form the nodes of a triangle in space. The distance between device A and devices B and C may be 3 meters and 4 meters respectively. The distance between devices B and C may be 5 meters. Based on this information alone, however, it is unclear whether device C is to the "right" or "left" of device B relative to device A. Several methods are provided herein to determine the relative orientation of device C as compared to devices A and B. Devices B and C may be pointed at device A and directional data available to the devices, such as from built-in compass components, may be used to determine which

direction they are pointed. As another example, a stereo microphone may be used to measure the difference in amplitude between the left and right channels to determine whether a device is to the left or the right of the receiving device. Similarly, a stereo microphone may be simulated by taking two or more measurements. For example, a first measurement may be made while pointing device C at device A. Device C may be moved slightly to the left or right and the process may be repeated. Distance calculations may be performed to determine relative orientation of Device C to Device A.

[15] Implementations of the presently disclosed subject matter may be implemented in and used with a variety of component and network architectures. FIG. 1 is an example computer 20 suitable for implementations of the presently disclosed subject matter. The computer 20 includes a bus 21 which interconnects major components of the computer 20, such as a central processor 24, a memory 27 (typically RAM, but which may also include ROM, flash RAM, or the like), an input/output controller 28, a user display 22, such as a display screen via a display adapter, a user input interface 26, which may include one or more controllers and associated user input devices such as a keyboard, mouse, and the like, and may be closely coupled to the I/O controller 28, fixed storage 23, such as a hard drive, flash storage, Fibre Channel network, SAN device, SCSI device, and the like, and a removable media component 25 operative to control and receive an optical disk, flash drive, and the like.

[16] The bus 21 allows data communication between the central processor 24 and the memory 27, which may include read-only memory (ROM) or flash memory (neither shown), and random access memory (RAM) (not shown), as previously noted. The RAM is generally the main memory into which the operating system and application programs are loaded. The ROM or flash memory can contain, among other code, the Basic Input-Output system (BIOS) which controls basic hardware operation such as the interaction with peripheral components. Applications resident with the computer 20 are generally stored on and accessed via a computer readable medium, such as a hard disk drive (e.g., fixed storage 23), an optical drive, floppy disk, or other storage medium 25.

[17] The fixed storage 23 may be integral with the computer 20 or may be separate and accessed through other interfaces. A network interface 29 may provide a direct connection to a

remote server via a telephone link, to the Internet via an internet service provider (ISP), or a direct connection to a remote server via a direct network link to the Internet via a POP (point of presence) or other technique. The network interface 29 may provide such connection using wireless techniques, including digital cellular telephone connection, Cellular Digital Packet Data (CDPD) connection, digital satellite data connection or the like. For example, the network interface 29 may allow the computer to communicate with other computers via one or more local, wide-area, or other networks, as shown in FIG. 2.

[18] Many other devices or components (not shown) may be connected in a similar manner (e.g., document scanners, digital cameras and so on). Conversely, all of the components shown in FIG. 1 need not be present to practice the present disclosure. The components can be interconnected in different ways from that shown. The operation of a computer such as that shown in FIG. 1 is readily known in the art and is not discussed in detail in this application. Code to implement the present disclosure can be stored in computer-readable storage media such as one or more of the memory 27, fixed storage 23, removable media 25, or on a remote storage location.

[19] FIG. 2 shows an example network arrangement according to an implementation of the disclosed subject matter. One or more clients 10, 11, such as local computers, smart phones, tablet computing devices, and the like may connect to other devices via one or more networks 7. The network may be a local network, wide-area network, the Internet, or any other suitable communication network or networks, and may be implemented on any suitable platform including wired and/or wireless networks. The clients may communicate with one or more servers 13 and/or databases 15. The devices may be directly accessible by the clients 10, 11, or one or more other devices may provide intermediary access such as where a server 13 provides access to resources stored in a database 15. The clients 10, 11 also may access remote platforms 17 or services provided by remote platforms 17 such as cloud computing arrangements and services. The remote platform 17 may include one or more servers 13 and/or databases 15.

[20] More generally, various implementations of the presently disclosed subject matter may include or be implemented in the form of computer-implemented processes and apparatuses for practicing those processes. Implementations also may be implemented in the form of a

computer program product having computer program code containing instructions implemented in non-transitory and/or tangible media, such as floppy diskettes, CD-ROMs, hard drives, USB (universal serial bus) drives, or any other machine readable storage medium, wherein, when the computer program code is loaded into and executed by a computer, the computer becomes an apparatus for practicing implementations of the disclosed subject matter. Implementations also may be implemented in the form of computer program code, for example, whether stored in a storage medium, loaded into and/or executed by a computer, or transmitted over some transmission medium, such as over electrical wiring or cabling, through fiber optics, or via electromagnetic radiation, wherein when the computer program code is loaded into and executed by a computer, the computer becomes an apparatus for practicing implementations of the disclosed subject matter. When implemented on a general-purpose microprocessor, the computer program code segments configure the microprocessor to create specific logic circuits. In some configurations, a set of computer-readable instructions stored on a computer-readable storage medium may be implemented by a general-purpose processor, which may transform the general-purpose processor or a device containing the general-purpose processor into a special-purpose device configured to implement or carry out the instructions. Implementations may be implemented using hardware that may include a processor, such as a general purpose microprocessor and/or an Application Specific Integrated Circuit (ASIC) that implements all or part of the techniques according to implementations of the disclosed subject matter in hardware and/or firmware. The processor may be coupled to memory, such as RAM, ROM, flash memory, a hard disk or any other device capable of storing electronic information. The memory may store instructions adapted to be executed by the processor to perform the techniques according to implementations of the disclosed subject matter.

[21] In an implementation, an example of which is provided in Fig. 3, a system is provided that includes a first mobile device **310**. The mobile device **310** may be, for example, a smartphone, a tablet, or a laptop. The mobile device **310** includes at least a processor, a microphone, and a speaker. In some configurations, more than one microphone may be utilized to receive an audio signal. The first mobile device may be configured to emit a first chirp and receive a first indication of the first chirp at a first time reference **312**. For example, the processor may note a raw time value or a sample time value that corresponds to when the chirp was emitted from the first device. In some configurations, the first mobile device may begin a

counter once it emits the first chirp and stop the counter once it detects a chirp from the second device. Initialization of the counter may constitute receiving a first indication of the first chirp at a first time reference as disclosed herein. In some configurations, the mobile device may activate its microphone prior to emitting the first chirp. The audio recorded by the microphone may be analyzed, for example by the mobile device, to determine the timings of the first chirp and/or the second chirp. In such a configuration, the mobile device does not require clock synchronization with the device that emits the second chirp.

[22] A chirp may refer to a brief audio pulse that, in some instances, can be repeated. A chirp may differ from another chirp (e.g., a first chirp and a second chirp) in at least one audio quality. An audio quality may refer to, for example, a frequency, a duration of chirp, and/or a pattern of chirp. In some cases, a “chirp” may refer to a repeated audio pulse of a specific type, a known fluctuation or variation in a continuous or semi-continuous audio signal, or the like.

[23] A microphone on the first mobile device 310 may be utilized to receive a first audio signal. A second indication of a second chirp 324 from a second mobile device 320 at a second time reference may be received or detected within the first audio signal at 314. For example, the presence of the second chirp in the first audio signal may be detected and the second time reference corresponding thereto may be determined by the processor. An indication may be a signal to start recording an audio signal on the first mobile device in some configurations. If an application is coordinating the first mobile device and the second mobile device, the application may signal a start and stop time for sending and recording audio to both devices. Thus, the second time reference corresponding to the second chirp in the first audio signal may be separately determined from the third time reference corresponding to the second chirp in the second audio signal. For example, the first device may receive an indication that the second device has emitted the second chirp. A remote server may determine the time reference within the first audio signal at which the second chirp was received by the first device. As stated earlier, a time reference may refer to a raw time value (e.g., presented in seconds, minutes, etc.) or a sample time value corresponding to the number of digital samples taken during an interval of time. The sample time value may be converted to a raw time value as needed.

[24] As an example, the first mobile device 310 and the second mobile device 320 may each operate an application that instructs the other device to emit a chirp or that automatically causes each device to emit a chirp. The application may coordinate the frequency, duration, pattern, and/or timing of the first and/or second chirps with each device involved or each device within a specified proximity that is concurrently operating the application. In some cases, a user may ping a friend or other user to activate the application by, for example, sending the other user a text, email, etc. The two mobile devices may communicate directly with one another, such as through the application, or they may not communicate further with one another and utilize a remote server for processing of the audio signals and/or chirp time reference data.

[25] The first audio signal may be uploaded 316 to a remote server 330 for determination of the distance between the first chirp and the second chirp. The second mobile device 320 may also upload its audio signal 326 to the server 330 for processing. The remote server 330 may determine time references in each of the first audio signal and the second audio signal corresponding to each instance of a chirp being emitted or detected in the respective audio signals 332. The server may then provide an indication of the corresponding time references to the mobile devices or it may provide an indication of a distance between the first device and the second device.

[26] Detecting the first chirp 312 and/or the second chirp 324 and/or the first time reference and/or second time references corresponding thereto in the first audio signal may be performed by the remote server by analyzing the first audio signal for a chirp. An indication of a time reference corresponding to when a chirp was made by a particular device may be sent to the server in lieu of having the server detect the time of when a chirp was emitted by the device. In some instances, the server may be made aware of a chirp's frequency, duration, approximate time it was made, or other audio qualities. For example, the first mobile device may transmit a message to the server when it emits the first chirp. In some instances, the server may direct a scan of an audio signal for a chirp in a particular frequency around a particular time. In instances where the server does not have information about the chirp, it may discern a chirp using pattern recognition software. In some configurations, the server may determine what constitutes background noises in an audio signal and filter out such sounds to determine the time reference of a given chirp.

[27] As stated above, the speed of sound is constant assuming a standard temperature and pressure. Using the speed of sound, the sample rate for a digital audio signal, and the sample or time references of two chirps corresponding to when a chirp was emitted or received by either mobile device, the server may calculate the distance between two devices (e.g., the first mobile device and the second mobile device) 332. In some instances, the server may receive the second audio signal from the second mobile device. Thus, the server may be in communication with an application operating on each of the first mobile device and the second mobile device.

[28] In some configurations, the first mobile device 310 may perform the calculation of the distance between itself and the second device using the first audio signal and/or the second audio signal from the second device 318. In such a configuration, the second mobile device may send the first mobile device, directly or indirectly, the second audio signal 328. The second audio signal may contain a third reference and a fourth reference that correspond to the time at which the second mobile device emits the second chirp 324 and the time at which the second mobile device 320 detects or receives an indication of the first chirp 322 from the first mobile device 310. In some configurations, the second device may perform some preprocessing of the second audio signal and may send a starting position for each of the chirps based on the pre-processing. Other devices may likewise perform such preprocessing and, for example, send starting positions of chirps detected in an audio signal to a server for a distance computation. Thus, in some configurations, the first mobile device may be configured to receive the third time reference and the fourth time reference, the second audio signal, and/or an indication of chirps detected or emitted in the second audio signal. The second mobile device 320 may be configured to send a third indication and a fourth indication of the third time reference and the fourth time reference, respectively, to the first mobile device or to a remote server. The third time reference may correspond to when the second mobile device emitted the second chirp or an indication thereof. The fourth time reference may correspond to when the second mobile device detected the first chirp within the second audio signal or received an indication thereof.

[29] As described above, the first mobile device 310 or a remote server may determine the distance based on the first and second time references by themselves or in combination with the third and fourth time references 318. For example, the first distance may represent the average of the distances determined based on the first and second time reference and the third and fourth

time references. The system may be configured to repeat the series of chirps from each device and distance determinations based on the chirps. The first distance may represent a minimum distance over a series of samples collected during repetition of the chirps and distance determinations based thereon. Thus, the distance between the first mobile device and the second mobile device may be calculated based on a minimum distance that is derived from two or more distance calculations between the two devices. Although theoretically the distances obtained from the respective time pairs from the two mobile devices should be identical, they may not be for technical reasons such as sound interference or microphone capabilities.

[30] Whether the determination of the distance between the first mobile device **310** and the second mobile device **320** is performed locally, such as by the first mobile device **310**, or remotely, such as by a server **330**, the first mobile device may obtain an indication of a first distance between the first mobile device and the second mobile device. For example, a remote server **330** may transmit an indication of the first distance to the first mobile device and/or the second mobile device **334**. As another example, the remote server may simply store the calculation of the first distance to a database and the first mobile device may query the database to obtain the indication of the first distance. If the first mobile device performs the distance calculation, it may transmit an indication of the distance to the second mobile device **318**.

[31] The example system in Fig. 3 may include the second mobile device. The second mobile device, as stated above, may emit the second chirp at the third time reference. A third indication of the third time reference may be received by the second mobile device. The indication may be, for example, a time stamp, sample time, or the like sent by the processor of the device or a start recording signal from an application on the device that is coordinating chirping as described above. The second mobile device may receive a second audio signal and detect, within the audio signal, the first chirp from the first mobile device or it may send the second audio signal to a remote server to detect the first chirp within the second audio signal. The server may send a fourth indication of the fourth time reference corresponding to when the first chirp was detected in the second audio signal. If an application is coordinating the first mobile device and the second mobile device, the application may signal a start and stop time for sending and recording audio to both devices. A determination of the third and/or fourth time reference corresponding to the second and first chirp respectively may be performed by the

second mobile device or a remote server as described above. For example, remote server may determine the presence of the chirps within the second audio signal and correlate the detection of a chirp with a time reference. An indication of a time reference corresponding to when a chirp was emitted or detected may be sent by the server or received by one or more of the mobile devices. The second mobile device may receive the first time reference and the second time reference and determine the first distance. Likewise, the first mobile device may be configured to send the first time reference and the second time reference to the second mobile device. The second mobile device may obtain an indication of the first distance between the first mobile device and the second mobile device based on at least one of the first and second time references and/or the third fourth time references. For example, the second device may compute the average of the distances it calculates based on the first and second time references and the third and fourth time references.

[32] The system depicted in Fig. 3 may include a server that may be configured to receive an indication of the first time reference, the second time reference, the third time reference, and the fourth time reference. As described earlier, the server may determine an indication of the first distance between the first mobile device and the second mobile device based on at least one of the first time reference and the second time reference and/or the third time reference and the fourth time reference. The server may provide an indication of the first distance to one or more devices which have requested the first distance and/or that have provided an audio signal such as the first mobile device and/or the second mobile device.

[33] For clarity, Fig. 4 shows an example diagram of the time references associated with the chirps emitted and/or received by each of the first 401, second 402, and third mobile device 403 as disclosed herein. In an implementation, the first mobile device may be further configured to receive an indication of a third chirp from a third mobile device at a fifth time reference within the first audio signal. The first mobile device may receive an indication of a second distance corresponding to the distance between the first mobile device and the third mobile device. The second distance may be based on the first time reference and the fifth time reference and/or a sixth time reference and a seventh time reference. The sixth time reference may correspond to when the third mobile device emits the third chirp and the seventh time reference may correspond to when the third mobile device detects or receives the first chirp. Indications of the

time references may be provided to the first mobile device, an application operating on the mobile devices that coordinates the chirping behavior of each mobile device, and/or a remote server.

[34] In an implementation, the second mobile device may be configured to emit the second chirp from the second mobile device at the third time reference, receive a third indication of the second chirp at the third time reference, receive a second audio signal, and receive a fourth indication of the first chirp from the first mobile device at the fourth time reference within the second audio signal. An eighth indication of a third chirp from the third mobile device. The eighth indication may correspond to the eighth time reference as shown in Fig. 4. Detection of chirps and/or receipt of indications of time references, as described earlier, may be performed or provided by a remote server or on a given mobile device. The second mobile device may obtain an indication of the first distance between the first mobile device and the second mobile device based on the first time reference and the second time reference and/or the third time reference and the fourth time reference. It may obtain an indication of a third distance between the second mobile device and the third mobile device based on the third time reference and the eighth time reference and/or the sixth time reference and a ninth time reference. The ninth time reference may correspond to a time at which the third mobile device receives the second chirp or an indication thereof. The third mobile device may be configured to emit the third chirp from the third mobile device at the sixth time reference and receive a third audio signal. A sixth indication of the third chirp may be provided to the third mobile device. The indication may be, for example, the raw time value at which the chirp was emitted or the sample time value. The third mobile device may detect the first chirp from the first mobile device at the seventh time reference within the third audio signal and likewise detect the second chirp from the second mobile device at the ninth time reference. As described above, detection of chirps within the third audio signal may be performed by a remote server in lieu of a mobile device. The server may then return an indication of the time references to the mobile device and the mobile device may perform a distance calculation. The server may provide the distance calculation to the mobile device in lieu of providing the time references in some configurations.

[35] The third mobile device may obtain an indication of the second distance between the first mobile device and the third mobile device based on the first time reference and the fifth time

reference and/or the sixth time reference and the seventh time reference. It may obtain an indication of the third distance between the second mobile device and the third mobile device based on the third time reference and the eighth time reference and/or the sixth time reference and the ninth time reference.

[36] In configurations in which three or more mobile devices are present, orientation of the devices may be determined using a variety of methods. In an implementation, the first mobile device is designated as a master device. Designation of a mobile device as a master device may be performed by random selection among devices that are within a threshold proximity to one another or by selecting the first device to execute an application that coordinates chirping from other proximal devices as the master device. Other techniques for selecting a master device are known in the art and may be compatible with the systems and methods disclosed herein. The second mobile and/or third mobile devices may be configured to receive an instruction to orient the device toward the master device. For example, if an application is coordinating the chirping of the first, second, and third mobile devices, the application may provide a notice to orient the device toward the master device. The master device may be identified in the notice by a phone number or user name, for example. The master device (e.g., the first mobile device) may receive an indication that the second mobile device and the third mobile device have been oriented toward it. For example, the application may receive compass data from the second and/or third mobile device to indicate an orientation of a device. An orientation of the second mobile device and third mobile device relative to the first mobile device may be determined based on, for example, compass data received from each of the second mobile device and the third mobile device.

[37] In an implementation, each of the first mobile device, the second mobile device, and the third mobile device may have at least two microphones. An audio signal may be received for each microphone on a device. In some cases, a single audio signal may contain the audio data from both microphones, but the audio data detected or received by each microphone may be separated out for each individual microphone (e.g., contained or encoded in discrete audio channels). As an example shown in Fig. 6, the first mobile **610** device may be configured to receive a fourth audio signal from a second microphone **614** on the first mobile device. In this example, the first audio signal may correspond to a first microphone **612** on the first mobile

device 610. The first audio signal may be compared to the fourth audio signal by a server or by the first mobile device. If the server performs the comparison, it may receive the first and fourth audio signals from the first mobile device 610, or a single audio stream that contains audio data from both microphone 612, 614 on the first device 610. Likewise, the second 620 and third 630 audio devices may obtain audio signals for each microphone on the respective devices and may compare the audio signals or have a server perform the comparison of audio signals to determine a direction of a chirp. For example, the second mobile device 620 may obtain a fifth audio signal from a fourth microphone 624 on the second mobile device 620 (and the second audio signal may correspond to a third microphone 622 on the second mobile device 620). The third mobile device 630 may obtain a sixth audio signal from a sixth microphone 634 on the third mobile device 630 (and the third audio signal may correspond to a fifth microphone 632 on the third mobile device 630). A comparison of the fifth audio signal to the second audio signal and/or the sixth audio signal to the third audio signal may be performed by the second mobile device or third mobile device respectively or by a server. A comparison of between the audio detected by two microphones on a device may reveal, for example that a left oriented microphone detected a chirp from a device slightly before the right microphone detected the same chirp, indicating that the device from which the chirp was emitted was left of the device detecting the chirp. For example, Device 1's speaker 616 may emit a chirp that is detected by Device 2's two microphones 622, 624. The distance traveled by sound emitted from device 1's speaker 616 would be different as detected by device 2's two microphones 622, 624 due to the position of those microphones on Device 2 620, as indicated by the two dashed lines 640, 645. The first mobile device may receive an indication of orientation of the first mobile device relative to the second mobile device and the third mobile device based on the comparison of the first audio signal to the fourth audio signal. The second and third mobile devices may receive indications of their positions relative to the first and third mobile devices or first and second mobile devices respectively. Thus, the orientation of each mobile device in the system may be determined.

[38] In an implementation, the first mobile device may be configured to receive an indication that the first mobile device has been rotated a predetermined number of degrees in a known direction. It may emit a fourth chirp and obtain an indication of a fourth distance between the first mobile device and the third mobile device based on the fourth chirp and an indication of a fifth distance between the second mobile device and the third mobile device based on the

fourth chirp. The indication of the fourth distance may be compared to that of second distance and indication of the fifth distance may be compared to that of the third distance. A relative orientation of the third mobile device to the first mobile device and the second mobile device based on the comparison may be determined. For example, compass data from the first device may be utilized to determine the direction of rotation of the first device. Distance calculations subsequent to the rotation of the first mobile device may reveal slight changes in the distances between the first device and the second and third mobile devices respectively. If the location of the microphone on the first mobile device is known, the combination of distance calculations, compass information, and microphone location may be used to determine the relative orientation of the second and third mobile with to the first mobile device. In some cases, conventional triangulation techniques may be used to determine a location and/or rotation of the third device.

[39] In an implementation, an example of which is provided in Fig. 5, a first audio signal may be received, for example by a server, from a first mobile device at **510**. A second audio signal from a second mobile device may be received at **520**. A first indication of a first time reference corresponding to a first chirp from the first mobile device and a second time reference corresponding to a second chirp from the second mobile device in the first audio signal may be received at **530**. A third indication of a third time reference corresponding to the first chirp from the first mobile device and a fourth indication of a fourth time reference corresponding to the second chirp from the second mobile device in the second audio signal may be received at **540**.

[40] As an example, the first mobile device may emit a chirp in response to a user activating an application configured to coordinate chirping. An indication that the chirp has been emitted may be sent to the first mobile device and/or to a server in communication with the first mobile device. The second mobile device may emit a second chirp and a second indication that the chirp has been emitted by the second mobile device may be sent to the second mobile device, the first mobile device (as a, and/or the server. Each mobile device may record an audio signal using a microphone on the respective devices. After a predefined time period, a signal to stop recording, a user-based action to cause recording to cease, the first audio signal from the first device and the second audio signal from the second device may be analyzed to ascertain time references corresponding to when each device received or heard the other device's chirp. Thus, an indication of the time at which a first device emits a chirp may be received by a server and the

time at which the first device detects or receives a second device's chirp based on an analysis of the audio signal may be determined by the server. Similarly, the second device's audio signal may be provided to the server for a determination of the time (e.g., sample time or raw time) at which it detected the first device's chirp. The server may perform a distance calculation based on the time references indicating to when the first and second devices emitted their respective chirps and the time references indicating when the first and second devices detected a chirp from the other device.

[41] A first distance between two devices based on the first chirp and the second chirp may be determined based on the first time reference and the second time reference at **550**. A second distance between the first chirp and the second chirp may be determined based on the third time reference and the fourth time reference at **560**. The first distance may be compared to the second distance at **570**. A server may provide an average between the first distance and the second distance as a distance calculation. The server may randomly or otherwise select one of the first distance or the second distance as the distance calculation if, for example, the two distances are sufficiently close (e.g., the two distances do not deviate by more than 10%). A distance calculation may be provided to the first mobile device and the second mobile device at **580**. In some configurations, the server may provide the first distance calculation to the second mobile device and the second distance calculation may be provided to the first mobile device. Each device may average the distance calculation obtained from another device. For example the first device may obtain the first distance and receive the second distance from the server. The first device may then average the second distance with the first distance. Generally, the first distance and second distance will be close. If, however, the first distance and the second distance are too dissimilar, the server, for example, may direct each device to repeat the chirp process beginning at **510** in Fig. 5. The distance between the first mobile device and the second mobile device may be calculated based on a minimum distance that is derived from two or more distance calculations between the two devices. It may include, for example, the first distance and the second distance. A minimum distance may be provided, for example, as the distance between the two devices based on one or more repetitions of the process shown in Fig. 5 in some configurations.

[42] In some configurations, a third audio signal may be received from a third mobile device. For example, the third mobile device may communicate the third audio signal to a remote server. A series of time references may be determined in the audio signals that have been received, including a fifth time reference corresponding to a third chirp from the third mobile device, a sixth time reference corresponding to the third chirp from the third mobile device in the third audio signal, a seventh time reference corresponding to the first chirp from the first mobile device in the third audio signal, an eighth time reference corresponding to the third chirp from the third mobile device in the second audio signal, and a ninth time reference corresponding to the second chirp from the second mobile device in the third audio signal. As stated earlier, the aforementioned determinations may be performed by the first mobile device or a remote server, for example.

[43] Time determinations (e.g., sample time or raw time as described earlier) obtained from the various audio signals may be utilized to perform distance calculations based on the detection of a chirp and an assumption of between two or more devices as described substantially above. A third distance between the first mobile device and the third mobile device may be determined based on the first time reference, the fifth time reference, the sixth time reference, and the seventh time reference. A fourth distance between the second mobile device and the third mobile device may be determined based on the third time reference, the eighth time reference, the sixth time reference, and the ninth time reference. As described above, one of the mobile devices (e.g., the first mobile device) may be designated as a master device using a number of selection methods known in the art (e.g., random selection, etc.).

[44] An orientation of three or more devices relative to one another may be determined based on techniques disclosed earlier. For example, an indication that the first mobile device has been rotated a predetermined number of degrees in a known direction (e.g., based on compass data) may be received. A fourth chirp may be detected in each of the first audio signal, second audio signal, and third audio signal. Distance calculations may be performed using a time reference obtained for the fourth chirp in each of the audio signals. The distance calculations post-rotation of the device may be compared to the corresponding distance calculation pre-rotation of the device. For example, a fifth distance between the first mobile device and the third mobile device may be determined using time references obtained for the fourth chirp in the first

audio signal and the third audio signal. The fifth distance may be compared to the third distance. As described earlier, distance calculations subsequent to the rotation of the first mobile device may reveal slight changes in the distances between the first device and the second and third mobile devices respectively. The combination of distance calculations, compass information, and microphone location may inform the orientation of the second and third mobile devices relative to the first mobile device.

[45] The foregoing description, for purpose of explanation, has been described with reference to specific implementations. However, the illustrative discussions above are not intended to be exhaustive or to limit implementations of the disclosed subject matter to the precise forms disclosed. Many modifications and variations are possible in view of the above teachings. The implementations were chosen and described in order to explain the principles of implementations of the disclosed subject matter and their practical applications, to thereby enable others skilled in the art to utilize those implementations as well as various implementations with various modifications as may be suited to the particular use contemplated.

CLAIMS

1. A system, comprising:

a first mobile device configured to:

emit a first chirp from the first mobile device;

receive a first indication of the first chirp at a first time reference;

receive a first audio signal;

receive a second indication of a second chirp from a second mobile device at a second time reference within the first audio signal;

obtain an indication of a first distance between the first mobile device and the second mobile device based on the first time reference, the second time reference, a third time reference, and a fourth time reference, wherein the third time reference corresponds to a time at which the second mobile device emits the second chirp and the fourth time reference corresponds to a time at which the second mobile device receives the first chirp.

2. The system of claim 1, the first mobile device further configured to:

receive a third indication of the third time reference corresponding to when the second mobile device emits the second chirp;

receive a fourth indication of the fourth time reference corresponding to when the second mobile device receives the first chirp; and

calculate the first distance between the first mobile device and the second mobile device based on the first time reference, the second time reference, the third time reference, and the fourth time reference.

3. The system of claim 2, the second mobile device further configured to send the third time reference and the fourth time reference to the first mobile device;
4. The system of claim 2, wherein the first distance is calculated based on an average of the first distance and a distance determined based upon the third and fourth time references.
5. The system of claim 1, further comprising the second mobile device configured to:
 - emit the second chirp from the second mobile device;
 - receive the third indication of the second chirp at the third time reference;
 - receive a second audio signal;
 - receive the fourth indication of the first chirp from the first mobile device at the fourth time reference within the second audio signal; and
 - obtain the indication of the first distance between the first mobile device and the second mobile device based on the first time reference, the second time reference, the third time reference, and the fourth time reference.
6. The system of claim 5, the second mobile device further configured to:
 - receive the first indication of the first time reference corresponding to when the first mobile device emits the first chirp;
 - receive the second indication of the second time reference corresponding to when the first mobile device receives the second chirp; and
 - calculate the first distance between the first mobile device and the second mobile device.
7. The system of claim 6, the first mobile device further configured to send the first time reference and the second time reference to the second mobile device.

8. The system of claim 6, wherein a distance between the first mobile device and the second mobile device is calculated based on an average of the first distance and a distance determined based upon the third and fourth time references.

9. The system of claim 6, wherein the distance between the first mobile device and the second mobile device is calculated based upon a minimum distance selected from a plurality of distance calculations, the plurality of distance calculations including the first distance and the second distance.

10. The system of claim 1, further comprising a server configured to:

receive the first indication of the first time reference, the second indication of the second time reference, the third indication of the third time reference, and the fourth indication of the fourth time reference;

determine the indication of the first distance between the first mobile device and the second mobile device based on the first time reference, the second time reference, the third time reference, and the fourth time reference; and

provide the indication of the first distance to the first mobile device and the second mobile device.

11. The system of claim 1, wherein the first chirp and the second chirp differ in at least one audio quality.

12. The system of claim 11, wherein the audio quality is selected from the group consisting of: a frequency, a duration of chirp, and a pattern of chirp.

13. The system of claim 1:

the first mobile device further configured to:

receive a fifth indication of a third chirp from a third mobile device at a fifth time reference within the first audio signal;

obtain an indication of a second distance between the first mobile device and the third mobile device based on the first time reference, the fifth time reference, a sixth time reference, and a seventh time reference, wherein the sixth time reference corresponds to a time at which the third mobile device emits the third chirp and the seventh time reference corresponds to a time at which the third mobile device receives the first chirp.

14. The system of claim 13,

the second mobile device configured to:

emit the second chirp from the second mobile device;

receive the third indication of the second chirp at the third time reference;

receive a second audio signal;

receive the fourth indication of the first chirp from the first mobile device at the fourth time reference within the second audio signal;

receive an eighth indication of the third chirp from the third mobile device at the eighth time reference;

obtain the indication of the first distance between the first mobile device and the second mobile device based on the first time reference, the second time reference, the third time reference, and the fourth time reference; and

obtain an indication of a third distance between the second mobile device and the third mobile device based on the third time reference, the eighth time reference, the sixth

time reference and a ninth time reference, wherein the ninth time reference corresponds to a time at which the third mobile device receives the second chirp;

the third mobile device configured to:

emit the third chirp from the third mobile device;

receive a sixth indication of the third chirp at the sixth time reference;

receive a third audio signal;

receive a seventh indication of the first chirp from the first mobile device at the seventh time reference within the third audio signal;

receive an ninth indication of the second chirp from the second mobile device at the ninth time reference within the third audio signal;

obtain the indication of the second distance between the first mobile device and the third mobile device based on the first time reference, the fifth time reference, the sixth time reference, and the seventh time reference; and

obtain the indication of the third distance between the second mobile device and the third mobile device based on the third time reference, the eighth time reference, the sixth time reference and the ninth time reference.

15. The system of claim 14, wherein the first mobile device is designated as a master device.

16. The system of claim 15,

the second mobile device further configured to:

receive an instruction to orient the second mobile device toward the master device;

the third mobile device further configured to:

receive the instruction to orient the third mobile device toward the master device;
the master device configured to:
receive an indication that the second mobile device and the third mobile device
have been oriented toward the first mobile device; and
determine an orientation of the second mobile device and the third mobile device
relative to the first mobile device.

17. The system of claim 15, wherein the indication that the second mobile device and the third mobile device have been oriented toward the first mobile device comprises compass data for each of the second mobile device and the third mobile device.

18. The system of claim 15, wherein each of the first mobile device, the second mobile device, and the third mobile device have at least two microphones.

19. The system of claim 18,
the first mobile device further configured to:
receive a fourth audio signal from a second microphone on the first mobile device, wherein the first audio signal corresponds to a first microphone on the first mobile device;
compare the first audio signal to the fourth audio signal;
receive an indication of orientation of the first mobile device relative to the second mobile device and the third mobile device based on the comparison of the first audio signal to the fourth audio signal.

20. The system of claim 19,

the second mobile device further configured to:

obtain a fifth audio signal from a fourth microphone on the second mobile device, wherein the second audio signal corresponds to a third microphone on the second mobile device;

compare the second audio signal to the fifth audio signal;

receive an indication of orientation of the second mobile device relative to the first mobile device and the third mobile device based on the comparison of the second audio signal to the fifth audio signal;

the third mobile device further configured to:

obtain a sixth audio signal from a sixth microphone on the third mobile device, wherein the third audio signal corresponds to a fifth microphone on the third mobile device;

compare the third audio signal to the sixth audio signal;

receive an indication of orientation of the third mobile device relative to the first mobile device and the second mobile device based on the comparison of the third audio signal to the sixth audio signal.

21. The system of claim 14, the first mobile device further configured to:

receive an indication that the first mobile device has been rotated a predetermined number of degrees in a known direction;

emit a fourth chirp;

obtain an indication of a fourth distance between the third mobile device and the first mobile device based on the fourth chirp;

obtain an indication of a fifth distance between the third mobile device and the second mobile device based on the fourth chirp;

compare the indication of the fourth distance to the second distance and the fifth distance to the third distance; and

determine a relative orientation of the third mobile device to the first mobile device and the second mobile device based on the comparison.

22. A method, comprising:

receiving from a first mobile device a first audio signal;

receiving from a second mobile device a second audio signal;

receiving a first indication of a first time reference corresponding to a first chirp from the first mobile device in the first audio signal;

receiving a second indication of a second time reference corresponding to a second chirp from the second mobile device in the first audio signal;

receiving a third indication of a third time reference corresponding to the first chirp from the first mobile device in the second audio signal;

receiving a fourth indication of a fourth time reference corresponding to the second chirp from the second mobile device in the second audio signal;

determining a first distance between the first chirp and the second chirp based on the first time reference and the second time reference;

determining a second distance between the first chirp and the second chirp based on the third time reference and the fourth time reference;

comparing the first distance to the second distance; and

providing a distance calculation to the first mobile device and the second mobile device.

23. The method of claim 22, wherein the distance calculation comprises an average of the first distance and the second distance.

24. The method of claim 22, wherein the distance between the first mobile device and the second mobile device is calculated based upon a minimum distance selected from a plurality of distance calculations, the plurality of distance calculations including the first distance and the second distance.

25. The method of claim 22, wherein the first chirp and the second chirp differ in at least one audio quality.

26. The method of claim 25, wherein the audio quality is selected from the group consisting of: a frequency, a duration of chirp, and a pattern of chirp.

27. The method of claim 22 further comprising:

receiving from a third mobile device a third audio signal;

receiving a fifth indication of a fifth time reference corresponding to a third chirp from the third mobile device in the first audio signal;

receiving a sixth indication of a sixth time reference corresponding to the third chirp from the third mobile device in the third audio signal;

receiving a seventh indication of a seventh time reference corresponding to the first chirp from the first mobile device in the third audio signal;

receiving an eighth indication of an eighth time reference corresponding to the third chirp from the third mobile device in the second audio signal;

receiving a ninth indication of a ninth time reference corresponding to the second chirp from the second mobile device in the third audio signal;

determining a third distance between the first mobile device and the third mobile device based on the first time reference, the fifth time reference, the sixth time reference, and the seventh time reference.

28. The method of claim 27, further comprising determining a fourth distance between the second mobile device and the third mobile device based on the third time reference, the eighth time reference, the sixth time reference, and the ninth time reference.

29. The method of claim 28, further comprising designating the first mobile device as a master device.

30. The method of claim 29,
providing an instruction to the second mobile device to orient it toward the master device;
providing an instruction to the third mobile device to orient it toward the master device;
receiving an indication that the second mobile device and the third mobile device have been oriented toward the first mobile device; and
determining an orientation of the second mobile device and the third mobile device relative to the first mobile device.

31. The method of claim 30, wherein the indication that the second mobile device and the third mobile device have been oriented toward the first mobile device comprises compass data for each of the second mobile device and the third mobile device.

32. The method of claim 30, wherein each of the first mobile device, the second mobile device, and the third mobile device have at least two microphones.
33. The method of claim 32,
receiving a fourth audio signal from a second microphone on the first mobile device,
wherein the first audio signal corresponds to a first microphone on the first mobile device;
comparing the first audio signal to the fourth audio signal;
receiving an indication of orientation of the first mobile device relative to the second mobile device and the third mobile device based on the comparison of the first audio signal to the fourth audio signal.
34. The method of claim 33,
obtaining a fifth audio signal from a fourth microphone on the second mobile device,
wherein the second audio signal corresponds to a third microphone on the second mobile device;
comparing the second audio signal to the fifth audio signal;
receiving an indication of orientation of the second mobile device relative to the first mobile device and the third mobile device based on the comparison of the second audio signal to the fifth audio signal;
obtaining a sixth audio signal from a sixth microphone on the third mobile device,
wherein the third audio signal corresponds to a fifth microphone on the third mobile device;
comparing the third audio signal to the sixth audio signal;
receiving an indication of orientation of the third mobile device relative to the first mobile device and the second mobile device based on the comparison of the third audio signal to the sixth audio signal.

35. The method of claim 27, further comprising:

receiving an indication that the first mobile device has been rotated a predetermined number of degrees in a known direction;

detecting a fourth chirp in each of the first audio signal, the second audio signal, and the third audio signal;

obtaining an indication of a fifth distance between the third mobile device and the first mobile device based on the fourth chirp;

obtaining an indication of a sixth distance between the third mobile device and the second mobile device based on the fourth chirp;

comparing the indication of the fifth distance to the third distance and the fifth distance to the third distance; and

determining a relative orientation of the third mobile device to the first mobile device and the second mobile device based on the comparison.

FIG. 1

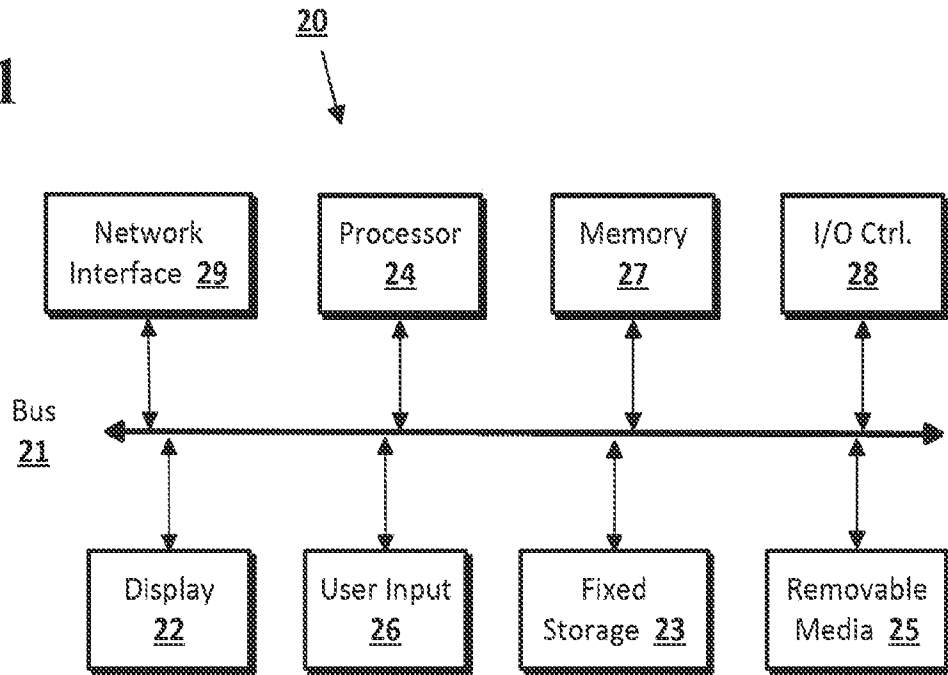


FIG. 2

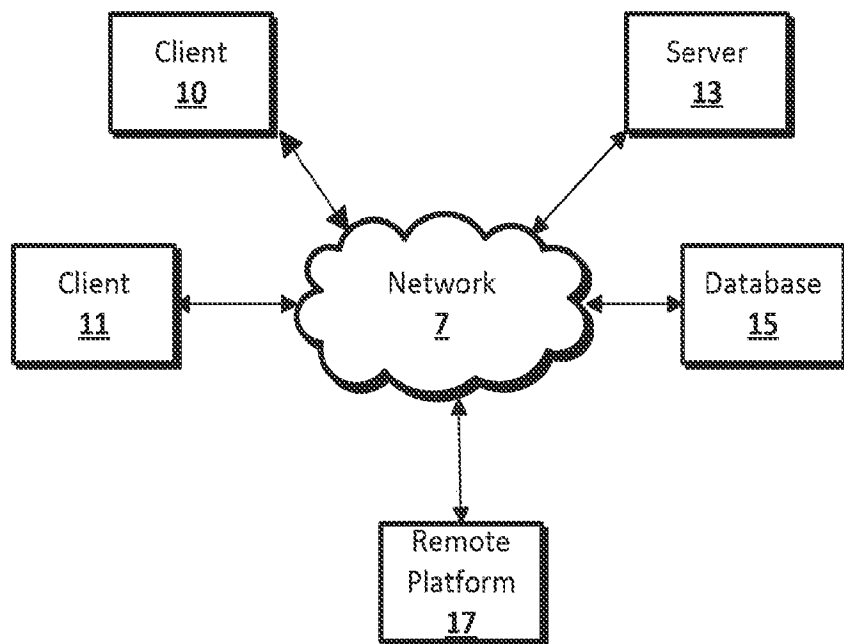


FIG. 3

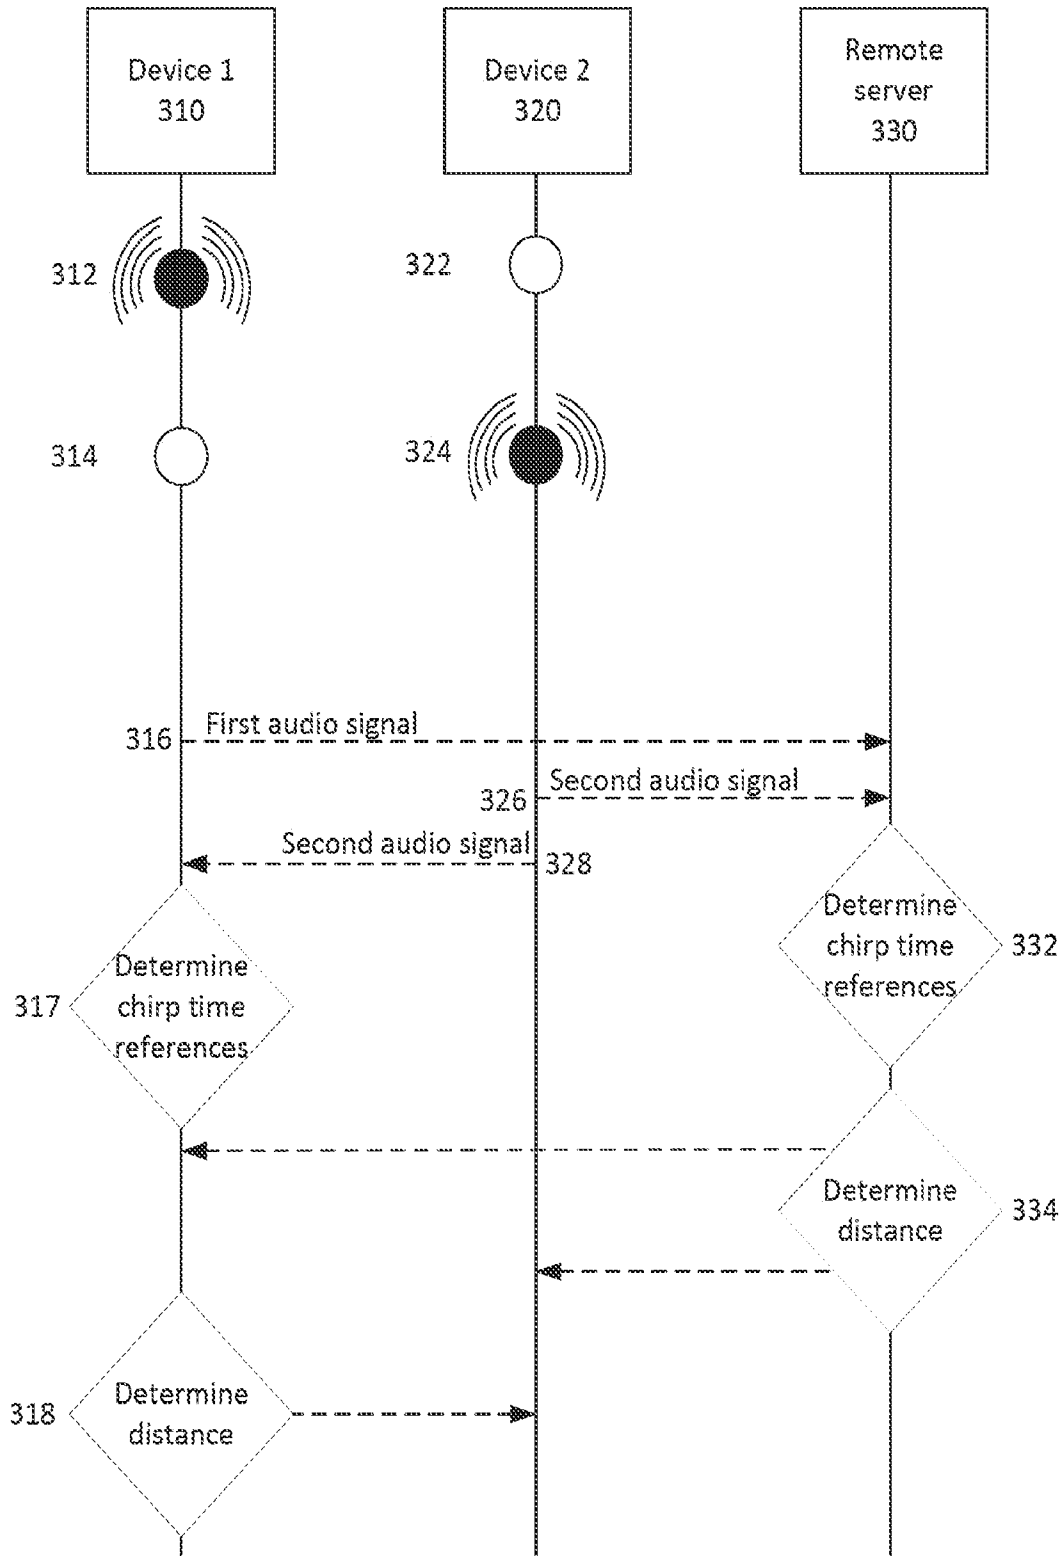


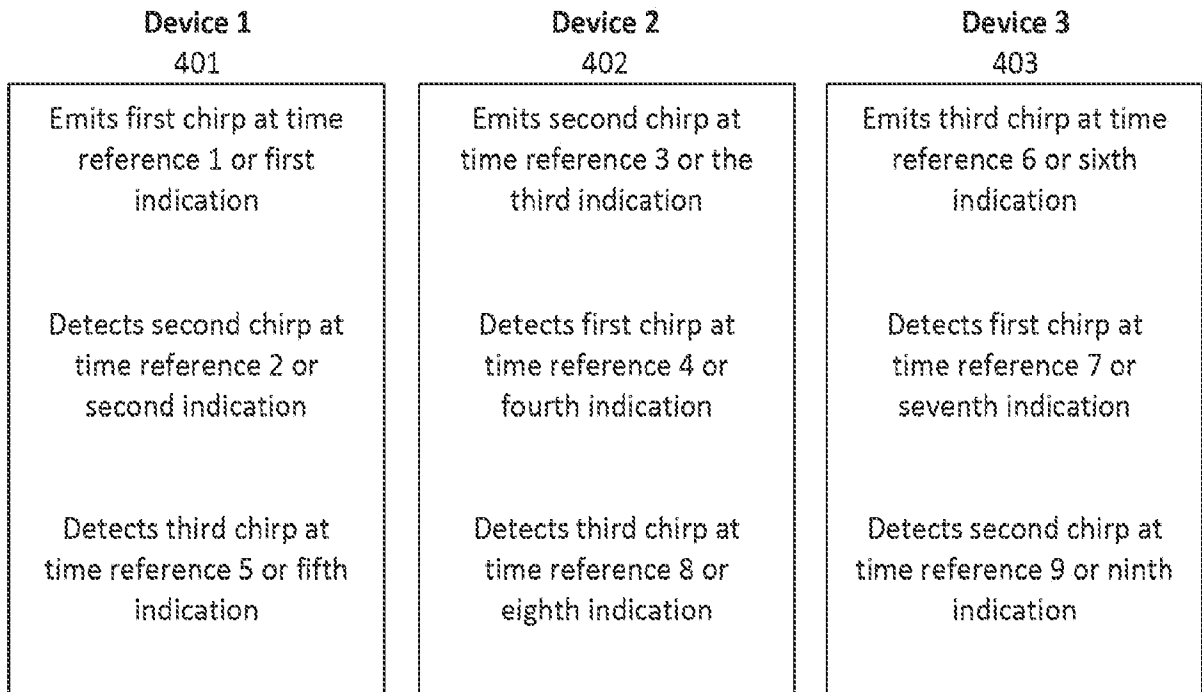
FIG. 4


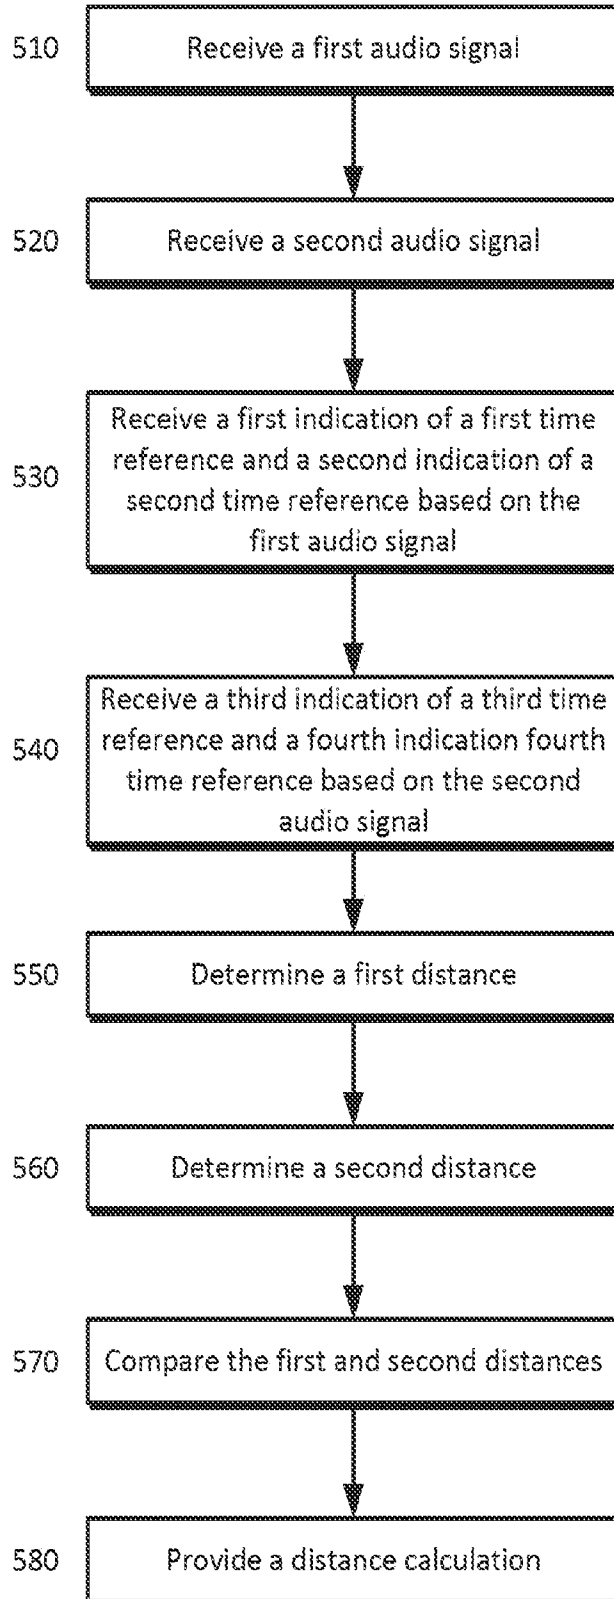
FIG. 5

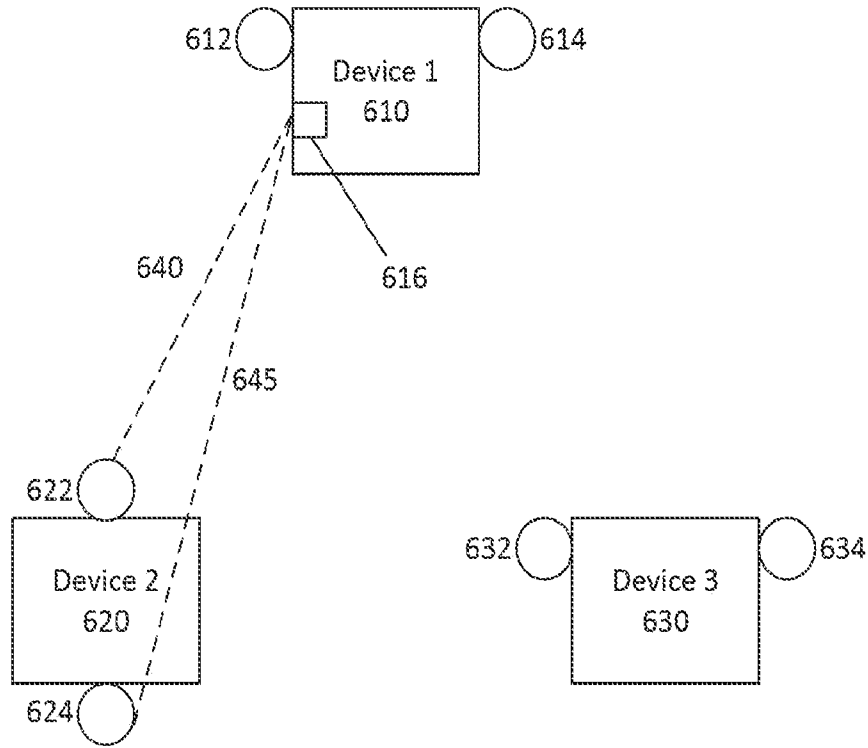FIG. 6



INTERNATIONAL SEARCH REPORT

International application No
PCT/US2015/014073

A. CLASSIFICATION OF SUBJECT MATTER INV. G01S5/18 G01S5/30 G01S15/74 ADD.		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) G01S		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y A	US 2013/163382 A1 (MILLAR JAMES [US] ET AL) 27 June 2013 (2013-06-27) abstract; figures 3,4 paragraphs [0003], [0004], [0019], [0033], [0034], [0038] - [0045]	1-15, 22-29 18-20, 32-34 16,17, 21,30, 31,35
Y A	----- US 8 243 961 B1 (MORRILL DANIEL LAWRENCE [US]) 14 August 2012 (2012-08-14) abstract column 5, line 48 - line 63 column 8, line 9 - line 17 column 9, line 55 - column 10, line 10	18-20, 32-34 15,16, 21,30, 31,35
A	----- US 6 720 876 B1 (BURGESS DAVID A [US]) 13 April 2004 (2004-04-13) abstract; figures -----	1-35
	-/--	
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents :		
"A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed		"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family
Date of the actual completion of the international search 29 April 2015		Date of mailing of the international search report 08/05/2015
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016		Authorized officer Roost, Joseph

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2015/014073

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2006/133556 A1 (SARKAR AMITES [US]) 22 June 2006 (2006-06-22) abstract; figures -----	1-35

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2015/014073

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2013163382 A1	27-06-2013	US 2013163382 A1 WO 2013137958 A2	27-06-2013 19-09-2013
US 8243961 B1	14-08-2012	US 8243961 B1 US 8588434 B1	14-08-2012 19-11-2013
US 6720876 B1	13-04-2004	NONE	
US 2006133556 A1	22-06-2006	AU 2003276538 A1 CN 1717593 A EP 1579238 A1 JP 2006507500 A KR 20050086799 A TW 200422638 A US 2006133556 A1 WO 2004048997 A1	18-06-2004 04-01-2006 28-09-2005 02-03-2006 30-08-2005 01-11-2004 22-06-2006 10-06-2004