

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
8 July 2004 (08.07.2004)

PCT

(10) International Publication Number
WO 2004/057791 A1

(51) International Patent Classification⁷: **H04L 1/18**, 27/34

(21) International Application Number:
PCT/EP2002/014744

(22) International Filing Date:
23 December 2002 (23.12.2002)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **MAT-SUSHITA ELECTRIC INDUSTRIAL CO., LTD.** [JP/JP]; 1006 Kadoma, Kadoma City, Osaka 571-8500 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **GOLITSCHKE EDLER VON ELBWART, Alexander** [DE/DE]; Wilhelminen Strasse 32, 64285 Darmstadt (DE). **WENGERTER, Christian** [DE/DE]; Bahnhof Strasse 10d, 63924 Kleinheubach (DE).

(74) Agent: **KUHL, Dietmar**; Grünecker, Kinkeldey, Stockmair & Schwanhäusser, Maximilianstr. 58, 80538 München (DE).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND APPARATUS FOR TRANSMITTING DATA IN A DIVERSITY COMMUNICATION SYSTEM EMPLOYING CONSTELLATION REARRANGEMENT WITH QPSK MODULATION

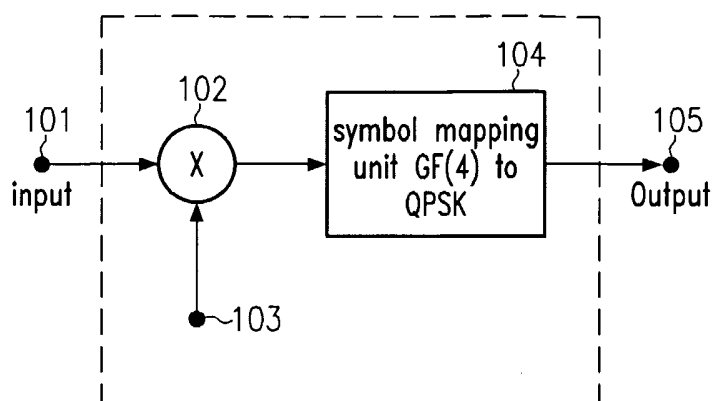

(57) Abstract: A method of transmitting data from a transmitter to a receiver of a diversity (e.g. ARQ or repetition coding) communication system comprising the step of encoding data received from a signal source to generate a Galois field (GF) symbols (101). The method further comprises the steps of modifying redundant GF symbols by an arithmetic operation (102) mapping the GF symbols using QPSK as modulation scheme (104) and transmitting the QPSK modulation symbols and the modified redundant symbols (105) to the receiver. Furthermore, the invention concerns a corresponding transmitter of a diversity communication system.

METHOD AND APPARATUS FOR TRANSMITTING DATA IN A DIVERSITY COMMUNICATION SYSTEM EMPLOYING CONSTELLATION REARRANGEMENT WITH QPSK MODULATION

The present invention generally relates to signal constellation rearrangement schemes. This technique is applicable in communication systems that provide ARQ mechanisms or in systems that provide diversity by transmitting redundancy within the same data unit. It is in particular suitable for systems that employ QPSK as modulation scheme.

The invention can also be applied in a communication system where redundancy is transmitted simultaneously, e.g. via multiple diversity branches for example transmit antennas, or within the same data packet. In the following this is generally referred to as "diversity".

In G. Benelli, "New mapping rules for combination of M-ary modulation and error-detecting codes in ARQ systems", IEE Proceedings, Vol. 137, Pt. I, No. 4, August 1990, it is shown and proven that increasing the euclidean distances between signal constellation points more than linearly results in improved performance. This is particularly valid when identical data is to be repeated either by using multiple packet transmissions, or by repeating identical data within the same packet with different constellations.

To this end, there exist different mapping methods of symbols onto constellation points. These methods depend then for example on the transmission number of a packet. The behaviour can be seen as illustrated in Figures 3A to Figure 3C. In these, identical input symbols ("0", "1", "2", "3") are mapped onto different signal constellation points in first, second, and third transmission respectively.

For binary communication systems, the binary mathematic involved follows the rules of finite fields with 2 elements, also called Galois Field of order two or GF(2) in short.

The operations and rules for Galois Fields exist however for other orders than two. Details on this can be found for example in S. Lin, D.J. Costello Jr., „Error Control Coding: Fundamentals and Applications“, Prentice-Hall, 1983, pages 29-33. Here it is sufficient to note that additions and multiplications are defined in a straightforward way.

In the present invention, the multiplication of GF(4) elements is of particular interest. Therefore two important properties are given here without proof:

- *For two elements of GF(4) a and b , b is a so-called null-element, if*
$$a \bullet b = b$$
(1)
holds for any a .
- *For two elements of GF(4) a and b , b is a so-called identity-element, if*
$$a \bullet b = a$$
(2)
holds for any a .

As described above, the prior art is so far realised through a parameterised input symbol to symbol mapping entity. The present invention aims for efficient implementational reasons to provide a method and transmitter using a non-parameterised standard mapping entity.

According to a present invention, there is provided a method and a transmitter for transmitting data as set forth by the independent claims. The general idea underlying the present invention is to modify in the transmitter the redundant retransmitted data symbols by an arithmetic operation to have the beneficial effects of increased euclidean distances.

According to a preferred embodiment of the invention, an input symbol sequence is modified by a multiplier that operates over a Galois Field GF(4), which is dependent on the diversity number parameter, prior to entering the symbols into the mapping entity 105. The resulting output sequence is then indistinguishable from the output of the mapping entity operating with a plurality of mapping schemes.

In the following the invention will be described in further detail with reference to the accompanying drawings in which

- Figure 1 illustrates the principal structure for an implementation of the transmitter according to the present invention;
- Figure 2 illustrates addition and multiplication operations in GF(4) arithmetics;
- Figures 3A-3C show 3 sample symbol mapping rules;
- Figure 4 shows an alternative embodiment of the transmitter;
- Figure 5 illustrates an example for a packet transmission method according to the present invention.

The present invention computes a rearranged QPSK symbol for a given input symbol. Since in QPSK there are four distinguishable modulation symbols, we can identify these with the four distinct elements of GF(4), for convenience labelled "0", "1", "2", "3". Referring to equations (1) and (2), "0" is the null-element and "1" is the identity-element. Also for simplicity we assume that the input symbols consist of GF(4) elements, using the same labelling.

According to Figure 1, the necessary parts of a transmitter for illustrating the present invention are shown. In more detail, the transmitter comprises an input portion 101, which receives data symbols from a signal source (not shown). The input portion can e.g. implemented by a data encoding unit to generate Galois field symbols.

A multiplier 102 computes the multiplication of the input symbols with a diversity parameter m 103, which itself is defined as an element of GF(4). In that way, modified redundant data symbols having the identical information as previously generated symbols are obtained.

After multiplication, the input symbols are applied to the symbol mapping unit 104 employing QPSK as modulation scheme. Finally, a transmitting unit, symbolized by

output portion 105, transmits the QPSK modulated GF symbols and the modified redundant GF symbols over a wired or wireless channel to the receiver of the communication system.

The arithmetic operations within GF(4) are usually defined by a primitive polynomial. For the outline of this description, we assume this polynomial to be

$$g(\alpha) = 1 + \alpha + \alpha^2 \quad (3)$$

If an ARQ system consisting of retransmissions is concerned, m can be derived from the transmission number. Let t identify the transmission number of a packet, starting at 1. Then m can be computed as

$$m = (t \bmod 3) + 1 \quad (4)$$

The preferred embodiment of the multiplier 102 consists of a two-dimensional lookup-table, similar to the right part of Figure 2.

With these presumptions it is easy to prove for those skilled in the art that the output portion 105 achieves the same distance properties as the concept of applying different mapping rules. Therefore the symbol mapping unit 104 can follow one of the mappings of Figures 3A to 3C consistently and independently of the diversity parameter.

As an alternative to the lookup-table implementation, another form is based upon polynomial calculations, as outlined in S. Lin, D.J. Costello Jr., „Error Control Coding: Fundamentals and Applications“, Prentice-Hall 1983, pages 29-33.

In brief, each element of GF(4) is represented by a polynomial. Multiplications of GF(4) elements are therefore translated into polynomial multiplications. Then the primitive polynomial (see equation (3)) combined with addition properties of GF(4)

can be used to reduce the resulting polynomial, such that in the end the resultant polynomial can be translated back into the corresponding GF(4) element.

Similarly, the whole representation of GF(4) elements and the corresponding QPSK symbols can be changed to polynomial representation or power representation (see S. Lin, D.J. Costello Jr., „Error Control Coding: Fundamentals and Applications“, Prentice-Hall 1983 on page 33, Table 2.8 for an example of GF(16)). Likewise, the representation can be any distinguishable set of characters/number/etc., as these are only abstractions for math theory, and do not change the underlying operations and properties.

As an example, instead of “0”, “1”, “2”, “3” the representation could also be “7”, “a”, “□”, “✱”.

If binary communication systems are employed, then typically these binary symbols (“bits”) are represented as “0” or “1”, i.e. GF(2). In such a case, a modified block diagram of the transmitter portion is shown in Figure 4.

Prior to GF(4) multiplication a converter 106 of two GF(2) symbols into one GF(4) symbol is necessary. Generally this mapping is arbitrary. The preferred embodiment for this is given in Table 1. It should be emphasized that other mappings are possible, as long as they are unambiguous and are used consistently.

GF(2) input symbols	GF(4) output symbol
00	0
01	1
10	2
11	3

Table 1

Likewise, a similar conversion rule can be defined for any input alphabet that has a cardinality of a power of two, possibly with the need to split one input symbol into multiple output symbols (i.e. two input GF(8) symbols could be mapped into three output GF(4) symbols).

Again, it should be stated that the representation of GF(4) symbols is exemplary.

The example given in equation (4) above is the preferred implementation. However, other algorithms can be devised to the same end.

The criteria for finding a suitable diversity parameter m are:

- m shall never be the null-element
- m shall change when a data element is transmitted for the non-first time
- An element of GF(4) shall not be used for m while any other element of GF(4) except the null-element has not been used less often.

As an example for the latter rule, an element that has already been used 2 times so far shall not be reused while any other element has not been used for 2 times.

Generally, m should only be changed when the data to be transmitted has already been sent before. As an example, Figure 5 shows a very simple data packet consisting of nine GF(4) symbols s_i , $i=1..3$ in positions $p_1..p_9$. For the symbols in positions p_1, p_2, p_3 the value of m can be set to 1. In positions p_4, p_5, p_6 , there are symbols which had already been transmitted, therefore the value of m should now be changed for example to 2. Similarly in positions p_7, p_8, p_9 the value of m should change again, now to the GF(4) symbol 3. If afterwards any of the symbols s_1, s_2, s_3 is transmitted again, m can be chosen again freely of the three non-null elements of GF(4).

It is important to note that the change of m shall only take place if the data to be transmitted carries the same information, in other words if the data is repetitive. It is not meant to say that m should change whenever e.g. the GF(4) symbol 2 is

transmitted. The procedure outlined above is only meaningful if the underlying information of the symbol is identical.

As an example for applicability of the present invention take a repetition code of rate $\frac{1}{2}$, where each information symbol is transmitted twice for improved error resilience. Other examples should be easy to identify for those skilled in the art of diversity transmissions, e.g. ARQ.

CLAIMS

1. A method of transmitting data from a transmitter to a receiver of a diversity communication system comprising the steps of:

encoding data received from a signal source to generate Galois field (GF) symbols;

modifying redundant GF symbols by an arithmetic operation;

mapping the GF symbols and the modified redundant GF symbols using QPSK as modulation scheme; and

transmitting the QPSK modulation symbols and the modified redundant QPSK symbols to the receiver.
2. The method according to claim 1, wherein the step of modifying redundant GF symbols comprises multiplying an input data symbol sequence with a multiplier.
3. The method according to claim 2, wherein the multiplier is dependent on a diversity parameter.
4. The method according to one of claims 1 to 3, wherein the GF symbols are obtained by an operation over a GF(4) field with four elements.
5. The method according to claim 4, wherein the input GF symbols are converted to GF(4) symbols prior to applying the arithmetic operation.
6. The method according to claims 1 to 5, wherein the arithmetic operation is defined by a primitive polynomial.

7. The method according to claim 3, wherein the diversity parameter is changed when data to be transmitted carries the same information that have already been sent to the receiver.
8. The method according to claims 1 to 7, wherein the redundant modified QPSK symbols are transmitted within the same data packet with the QPSK modulation symbols.
9. The method according to claims 1-8, wherein the redundant modified QPSK symbols are transmitted over multiple diversity branches.
10. A transmitter of a diversity communication system comprising:
 - a data encoding unit (101) for generating GF symbols,
 - a modifying unit (102) for generating modified redundant GF symbols using an arithmetic operation;
 - a mapping unit (104) for mapping the GF symbols and the modified redundant GF symbols using QPSK as modulation scheme; and
 - a transmitting unit (105) for transmitting the QPSK modulated GF symbols and the modified redundant QPSK symbols.
11. The transmitter according to claim 10, wherein the modifying unit (102) is a multiplier (102) for multiplying the GF symbols with a multiplier.
12. The transmitter according to claim 10 or 11, wherein the multiplier is a look-up table according to which the input GF symbols are modified using a diversity parameter.

13. The transmitter according to one of claims 10 to 12, wherein the transmitter is an ARQ transmitter for sending redundancy versions of already sent data symbols having identical information.

1/2

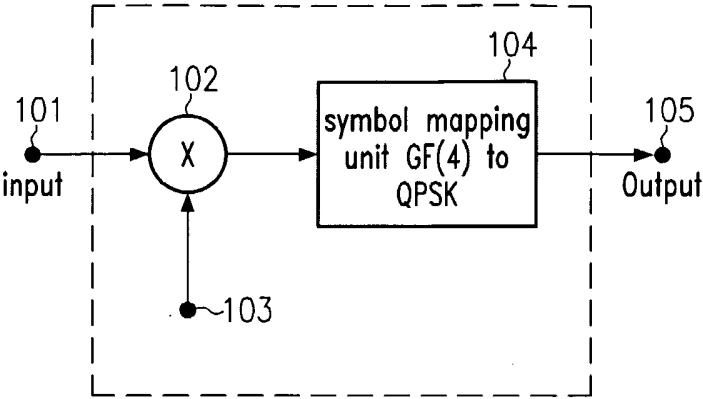


Fig. 1

+	0	1	2	3	X	0	1	2	3
0	0	1	2	3	0	0	0	0	0
1	1	0	3	2	1	0	1	2	3
2	2	3	0	1	2	0	2	3	1
3	3	2	1	0	3	0	3	1	2

Fig. 2

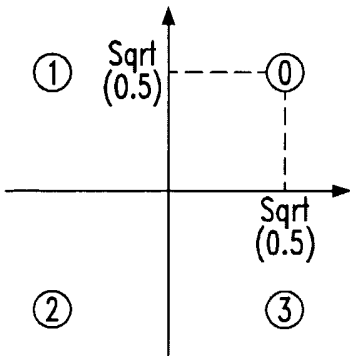


Fig.3A

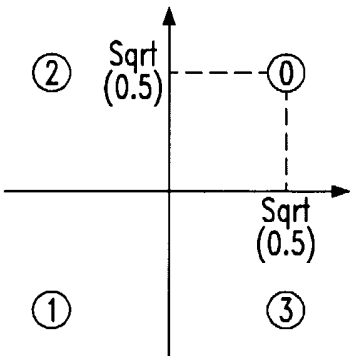


Fig.3B

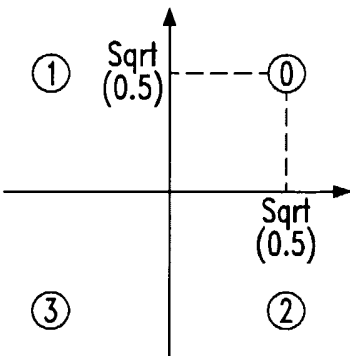


Fig.3C

2/2

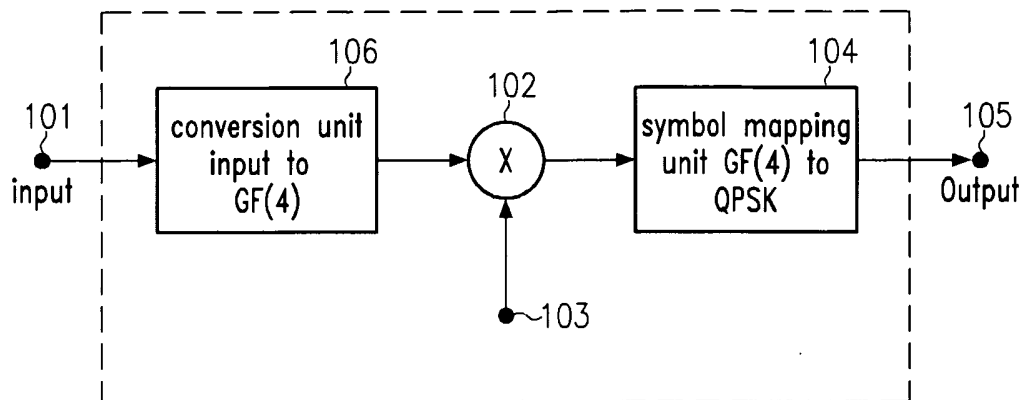


Fig. 4

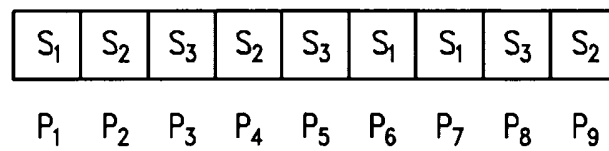


Fig. 5

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 02/14744

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04L1/18 H04L27/34

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 02 067491 A (SCHMITT PHILIPP MICHAEL ;WENGERTER CHRISTIAN (DE); SEIDEL EIKO (DE) 29 August 2002 (2002-08-29) abstract page 4, paragraph 5 - paragraph 6 page 8; tables 1,2 page 12; tables 3,4 page 16 -page 17; figures 1-6	1-7, 10-13
Y		8,9
Y	JOHN G. PROAKIS: "Digital Communications" 3RD EDITION, ISBN 0-07-113814-5, 1995, page 777 XP002250660 page 777	8,9

☐ Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

* & * document member of the same patent family

Date of the actual completion of the international search

8 August 2003

Date of mailing of the international search report

08/09/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Marzenke, M

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 02/14744

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 02067491	A	29-08-2002	WO 02067491 A1	29-08-2002
			BR 0110161 A	31-12-2002
			CA 2406234 A1	29-08-2002
			EP 1293059 A1	19-03-2003
