




- (51) **International Patent Classification:**
G09G 5/00 (2006.01) *G09G 5/12* (2006.01)
- (21) **International Application Number:**
PCT/US2012/027661
- (22) **International Filing Date:**
5 March 2012 (05.03.2012)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
13/083,943 11 April 2011 (11.04.2011) US
- (71) **Applicant (for all designated States except US):** **ANALOG DEVICES, INC.** [US/US]; One Technology Way, Norwood, MA 02062-9106 (US).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** **BOHM, Christian, Willibald** [DE/DE]; Ringstrasse 14, 94371 Rattenberg (DE). **HALL, Peter** [DE/DE]; Blumenburgstrasse 92, 80636 Munich (DE).
- (74) **Agents:** **HAILS, Robert L.** et al.; Kenyon & Kenyon LLP, 1500 K Street, N.w., Washington, DC 20005 (US).
- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

- (54)
- Title:**
- ENCRYPTION TOPOLOGY FOR TRANSPORTING MULTIPLE AV STREAMS OVER A UNIFIED MEDIUM

Figure 1

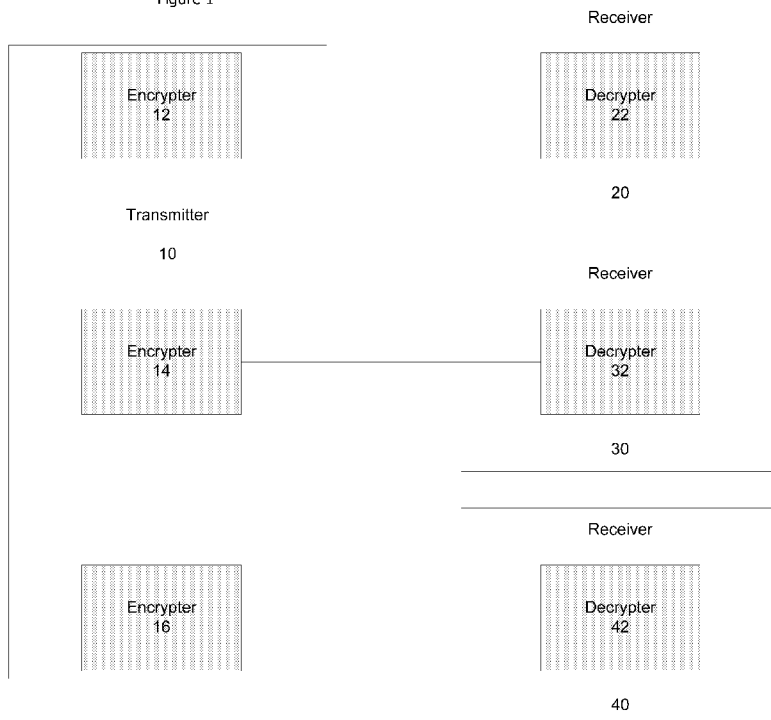

(57) **Abstract:** A system architecture allows for the transmission of multiple HDCP encrypted audio/video streams over a single unified cable to multiple receivers using a daisy chain topology. Each individual audio/video stream is first encrypted and then combined into a uniform stream, and the uniform stream is transmitted to each of the receivers. Each receiver contains a decryption engine that operates independently of the engines in the other receivers, therefore allowing each receiver to select to a unique channel and decrypt and display one of the audio/video streams.



Published:

— *with international search report (Art. 21(3))*

ENCRYPTION TOPOLOGY FOR TRANSPORTING MULTIPLE AV STREAMS OVER A UNIFIED MEDIUM

FIELD OF THE INVENTION

[01] The present invention relates to the transmission of audio and video streams over serial transports. The present invention further relates to a method for transmitting multiple HDCP encrypted streams over a unified cable arranged in a daisy chain topology. The present invention further relates to an architecture for daisy chain nodes to transport encrypted audio/video streams on a single cable in an automotive vehicle.

BACKGROUND INFORMATION

[02] The distribution of audio and video ("AV") content in motor vehicles is an emerging market. The manufacturing of modern motor vehicles has included such features as rear seat entertainment systems which can display high-definition formats to vehicle occupants. These entertainment systems allow for an occupant to view navigational data as well as watch broadcast or cinematic programming. An occupant can watch commercially available content on entertainment systems from connected electronic devices, including blu-ray players, which can display various formats such as 1080p to the viewer. Connecting an entertainment system to a high definition device, such as blu-ray player, requires a suitable connection, which can support the transmission of the uncompressed digital data.

[03] The transmission of high definition content, in particular high definition content on commercially distributed materials, is regulated in an effort to prevent piracy of the materials. Encryption of the high definition content transmitted from the commercial materials allows for the prevention of unlawful distribution of those commercial materials. Content encrypted from

the materials cannot be freely copied and distributed. Digital copyright protection systems prevent a copyrighted work from displaying on a device that does not support the copyright protection system. For the transmission of high definition content, the standard used is known as high-bandwidth digital copyright protection ("HDCP"). Manufacturers who wish to display high definition content on their device, may obtain a license that unlocks and allows the high definition content to display on the device. HDCP restricts the transmission of HDCP encrypted content and prevents that content from playing on an unlicensed device that does not support HDCP.

[04] One significant characteristic of the HDCP 1.X standard (including HDCP standards 1.0 and 1.4), is that while it allows for the transmission of the encrypted content, it does not allow the transmission to be of a 'broadcast' type. HDCP 1.X supported device transmitters must connect to each respective HDCP receiver via a point-to-point link. If more than one audio/video receiver (display) is to be connected to a transmitter, a HDCP repeater must be implemented. This repeater consists of a HDCP receiver which decrypts the audio/video content and a set of one or more transmitters which re-encrypt and transmit the audio/video content again. This breaks the tree structure of a broadcast system into a set of point-to-point links. The HDCP repeaters at the tree nodes are expensive to implement. They typically include a microcontroller subsystem running software to handle the communication between upstream and downstream point-to-point links. In some applications (e.g. the automotive case) it may be highly undesirable to have a need for 'intelligent' nodes at remote locations of an audio/video distribution network. Instead, there is a strong desire to centralize all software execution in one spot, typically at the top of the audio/video distribution tree where a powerful processor already resides.

[05] A point-to-point link can be establish to separately connect each of the individual rear display monitors directly to the transmitter, as illustrated in FIG. 1. In FIG. 1, each of the cables can be driven by its own built-in encryption engine **12**, **14**, and **16**, in transmitter **10**, and each of the displays monitors **20**, **30**, and **40** can separately decrypt the HDCP encrypted content through decryption engines **22**, **32**, and **42**, to display the content on the individual display monitor. However, the usage of separate individual cables to accomplish the transmission to multiple receivers or display monitors creates additional weight in the vehicle, and is not cost effective to implement.

[06] One way to overcome the need for separate point-to-point connection cables is to merge the unencrypted audio/video streams into a single unified stream. The single stream is then encrypted resulting in a single unified encryption stream ("UES"). The UES is transmitted to a receiver which decrypts the entire UES before separating the UES into individual audio/video streams. Because decryption occurs for the entire UES instead of the individual audio/video streams, a single set of keys are used to encrypt and decrypt all of the audio/video streams, and the audio/video streams are protected by one set of encryption and decryption engines.

[07] A system using a daisy chain topology for transmitting a UES is illustrated in FIG. 2. In motor vehicle design, using a daisy chain to connect multiple outputs devices to a transmitter is preferable because it drastically reduces the amount of cable used, and subsequently the cost and weight of the cable. The displays, as depicted in FIG. 2, are connected in a daisy chaining fashion. In transmitter **110**, multiple audio/video streams are combined in an adder and fed to encrypter **112**, where encrypter **112** encrypts the combined stream into a UES and sends the UES via a cable to the first of the receivers. The first receiver **120** receives the UES and

decrypts it via a decryption engine **122**. One of the audio/video streams is displayed on the display **125** in receiver **120**. The UES is sent through HDCP repeater **123** and re-encrypted through encrypter **124** and transmitted from the first receiver to a subsequent display or receiver. At the second receiver **130**, the UES is decrypted by decryption engine **132** and one of the audio/video streams is displayed locally at display **135**. The UES may again be encrypted by encryption engine **134** and transmitted to a subsequent display or receiver. This process is repeated for the remaining display monitors.

[08] The described daisy-chain of displays depicted in FIG. 2, must use HDCP Repeaters, such as repeater **123**, in each daisy chain node. Since the primary audio/video sources and the transmitter must be aware of all connected audio/video sinks subsequently attached to it, a HDCP repeater must be employed to collect downstream information from a daisy chain connection and transmit it upstream towards the transmitter. Each intermediate node passes information of the subsequently connected downstream receivers or displays, topology, or public keys, back to the previously node, and eventually back to the audio/video source. This requires the presence of a microprocessor and a memory at each intermediate node, i.e display monitor or receiver. Implementing microprocessors and the corresponding software in each of the display units adds significantly to the cost and complexity of the overall of the system. The cost saved by reducing the cable length is outweighed by the additional cost of the additional microprocessors in each of the display monitors.

[09] Implementing daisy chains to transmit the HDCP encrypted content can also be problematic in the event the encryption system fails. Because the streams have to be decrypted at each intermediate node, and re-encrypted for streams transmitted to subsequently connected display monitors or receivers, if the re-encryption of the streams fails at any of the

nodes, all subsequently connected nodes will be affected. Therefore, the failure of the encryption engine at any of the connected display monitors prevents the decryption and display of the remaining audio/video streams at the subsequently connected display monitors or receivers.

[10] Thus there remains a need in the art, for a cost effective architecture which allows for the daisy chaining of connected display monitors or receivers to a HDCP 1.X audio/video transmitter, without the use of HDCP repeaters on nodes of the intermediates nodes, which maximizes efficiency and minimizes area.

BRIEF DESCRIPTION OF THE DRAWINGS

[11] Figure 1 is a diagram of an architecture with a set of transmitters in an audio/video source connected to individual receivers via individual cables.

[12] Figure 2 is a diagram of a transmitter connected to receivers through a daisy chain using HDCP repeaters.

[13] Figure 3 is a diagram of a transmitter in the audio/video source that encrypts and combines the audio/video streams, according the present invention.

[14] Figure 4 is a diagram of a receiver that decrypts and separates the audio/video streams, according the present invention.

[15] Figure 5 is a diagram of an architecture transmitter and a receiver connected in a daisy chain topology, according to the present invention.

DETAILED DESCRIPTION

[16] The subject invention will now be described in detail for specific preferred embodiments of the invention, it being understood that these embodiments are intended only as illustrative examples and the invention is not to be limited thereto.

[17] Transmitting multiple HDCP encrypted audio/video streams over a single unified cable may be arranged in a daisy chain topology without the use of HDCP repeaters at each daisy chain node. Embodiments of the present invention provide a primary HDCP transmitter establishing virtual point-to-point links with each node in the daisy chain configuration. Each audio/video stream received by the transmitter is encrypted separately before being combined into a unified stream and transmitted. Each separately encrypted audio/video stream in the unified audio/video stream may only be decrypted once, where decryption of the individual stream occurs at a corresponding receiver or display monitor. Each of the receivers may contain a decryption engine that operates independently of engines in the other receivers, thus making the primary HDCP transmitter aware of all connected downstream audio/video sink devices.

[18] FIG. 3 illustrates a diagram of a transmitter in a HDCP compatible audio/video source of the present invention. Transmitter **200** may be embedded in a audio/video source device that may be compatible to HDCP1.X. In an alternative embodiment, transmitter **200** may be housed outside any audio/video source and may receive audio/video streams from one or more HDCP compatible audio/video sources. In an embodiment, the audio/video source devices may be located in the front of the vehicle.

[19] Transmitter **200** may house a plurality of encryption engines **210.1-210.n**. Each encryption engine may include its own separate set of keys. When multiple audio/video streams are input to transmitter **200**, each individual audio/video stream, AV1-AVn, may be fed

to a respective encryption engine **210.1-210.n**. Auxiliary signals not corresponding to the audio/video streams, may also be fed to the encryption engines **210.1-210.n** through auxiliary lines (not pictured). These auxiliary signals may include timing signals, synchronization signals, or other data signals that may be relevant to an input audio/video stream.

[20] A host control interface **280** which may selectably control the encryption engines **210.1-210.n** may be located near transmitter **200**. The host control interface **280** may allow for the initialization and setting of the parameters of encryption engines **210.1-210.n**. Host control interface **280** may emit a control signal to enable or disable encryption engines **210.1-210.n**. Host control interface **280** may also check the encryption status of an input audio/video stream. As each of the encryption engines **210.1-210.n** may operate independently of the other encryption engines, interface **280** may synchronize the encryption engines to work simultaneously, or may selectively shut down one or more of the encryption engines while other encryption engines remain operating. This may allow for the host control interface **280** to set a configuration where various encryption engines may be disabled. Host control interface **280** may also set an encryption algorithm to be used. In an embodiment, the encryption algorithm may be an algorithm corresponding to HDCP 1.X.

[21] Each encryption engine may also output an unencrypted side band communication stream. These output side band streams may be downstream communication to connected receivers to convey control data from the encryption engines. The side band streams may exchange public keys with the receivers or verify the integrity of the connection with the encryption engine. Each side band communication stream may be coupled with the encrypted audio/video stream from the respective encryption engine, and is output to the corresponding

receiver for which the accompanying encrypted audio/video stream is decrypted and displayed on.

[22] Transmitter **200** may also include a framer **220**. Framer **220** may include a plurality of channels, Ch1-Chn. Each of the channels in framer **220** may correspond to a respective encryption engine. In an embodiment, the number of channels in framer **220** may be equal to the number of encryption engines. Each of the channels in framer **220** may receive an encrypted audio/video stream from a respective encryption engine. Framer **220** may combine individual encrypted audio/video streams into a single uniform stream. In an embodiment framer **220** may be a multiplexer.

[23] In an example embodiment, framer **220** may use a round-robin technique to sort and combine the individual streams into a uniform stream. In this embodiment, individual streams may be sorted and combined by channel, with the encrypted audio/video stream in the subsequent channel being added next. In an alternative embodiment, framer **220** may use a priority driven algorithm to sort and combine the individual encrypted audio/video streams according to an assigned priority. In such an embodiment, encrypted audio/video streams that have been assigned a higher priority may be sorted and combined first. An example of a priority classification may be the proximity of the nodes to the HDCP transmitter. A stream that is to be decrypted and displayed at an immediate node may be assigned the highest priority. The next highest priority may be assigned to the audio/video stream that is to be decrypted and displayed at the next receiver or display monitor. Subsequent priorities for the remaining encrypted audio/video streams may be assigned in this manner.

[24] Framer **220** may also receive side band communication streams, SB Down 1-SB Down n, from the encryption engines **210.1-210.n**. Each of the channels in framer **220** may

receive a side band communication stream from the same respective encryption engine that output the encrypted audio/video stream to the respective channel.

[25] Transmitter **200** may house serializer **240**. Serializer **240** may convert the combined encrypted stream into a format that may be transmitted across transmission line and reread and formatted by a receiver. Buffer **260** may also be included in transmitter **200**. Buffer **260** may be a physical transport interface to feed the uniform encrypted stream to a receiver. Transport mechanism for physical transport may include wire solutions, wireless transmission, optical connections, or any other means to transmit the combined encrypted. In an embodiment, the transport mechanism may a twisted cable.

[26] Control data may also be sent from a corresponding receiver back to the transmitter. Transmitter **200** may include buffer **270** which may receive upstream side band communication streams from the receivers. Transmitter **200** may also include deserializer **250**. The upstream side band communication stream may have been formatted in the sending receiver and deserializer **250** may reformat the transmitted data back into a uniform stream.

[27] Transmitter **200** may include a deframer **230**. Deframer **230** may include a plurality of channels, Ch1-Chn. In an embodiment deframer **230** may be a demultiplexer. Deframer **230** may separate the uniform stream into individual upstream side band communication streams corresponding to control data. Each of the channels in deframer **230** may correspond to a respective encryption engine and may output a upstream side band communication stream to the respective encryption engine. In an embodiment, the number of channels in deframer **230** may be equal to the number of encryption engines.

[28] During operation, audio/video streams AV1-AVn may be applied to encryption engines **210.1-210.n**. Each of the audio/video streams AV1-AVn may be separately tagged and

encrypted by the respective encryption engine. Each encryption engine may encrypt the respective audio/video stream using separate and individual private keys contained by the encryption engine. The encrypted audio/video streams EAV1-EAVn may be output to a respective channel in framer **220**.

[29] Each of the encryption engines **210.1-210.n** may also output a downstream side band communication stream to a respective channel in framer **220**, with the downstream side band communication stream eventually being received by a designated receiver. The respective downstream side band communication stream may carry control data that must be transmitted from the respective encryption engine to one of the decryption engines in the designated receiver. The transmission of the downstream side band communication stream may allow for the exchange of public keys from the respective encryption engine to the corresponding decryption engine.

[30] The encrypted data/video streams and the downstream side band communication streams may be combined into a single merged pre-encrypted stream ("MPES"). The MPES may be arranged based on the round-robin or priority technique described above. The MPES may contain the input streams to framer **220** in a manner that allows for separation of the signals at the respective receivers. Framer **220** may output the MPES to serializer **240**.

[31] Serializer **240** may convert the MPES into an appropriate format for transmission and output the MPES to buffer **260**. Buffer **260** may feed the uniform encrypted stream to a receiver via the selected transport mechanism.

[32] FIG. 4 illustrates a diagram of a receiver of the present invention. In an embodiment, the receiver may be a transceiver. In an embodiment the receiver may be a display monitor. FIG. 4 illustrates a first receiver at the first node in the daisy chain, but may also represent

subsequent receivers in subsequent nodes in the daisy chain. Receiver **300** may house buffer **370** that may be a physical transport interface. In the first receiver, buffer **370** may receive a formatted version of the MPES from transmitter **200**. In subsequently connected receivers in the daisy chain, buffer **370** may receive the formatted version of MPES from buffer **385** of the preceding receiver in the daisy chain. The output of buffer **370** may be connected to the input of buffer **385**. Buffer **385** may output the formatted version of the MPES from receiver **300** to the next receiver in the daisy chain. The output of buffer **370** may also be connected to deserializer **350**. The MPES may have been formatted in transmitter **200** and deserializer **350** may recreate the MPES in a digital form.

[33] Receiver **300** may include a deframer **330**. Deframer **330** may include only a single channel. In a first receiver, that channel may be Ch1. Deframer **330** may divide the merged encrypted audio/video streams into separate data paths. The respective encrypted audio/video stream that is to be displayed on receiver **300** may be stored on the channel in deframer **330**. The stored encrypted audio/video stream may be output to decryption engine **310**. None of the other encrypted audio/video streams may be stored on deframer **330**, and as a result, may not be decrypted locally. Decryption engine **310** may contain its own set of decryption keys and may use this set of keys to decrypt the stored encrypted audio/video stream. The decryption engine **310** may use the same encryption algorithm used by the respective encryption engine **210.1-210.n** to undo the encryption done by the respective encryption engine.

[34] A respective side band downstream communication stream, SB Down1 as illustrated in FIG. 4., may also be transmitted to the decryption engine **310**. This side band downstream communication stream may share public keys or control data with the decryption engine **310**

from the respective encryption engine that encrypted the audio/video stream. The side band downstream communication stream may be separated from the MPES by deframer **330** and output to the decryption engine **310**.

[35] Host control interface **280** may selectably control deframer **330** and decryption engine **310**. The host control interface **280** may allow for the initialization and setting of the parameters of decryption engine **310** and may emit a control signal to enable or disable decryption engine **310**. Host control interface **280** may also check the decryption status of an input encrypted audio/video stream to decryption engine **310**.

[36] Receiver **300** may also include buffer **380** and deserializer **390**. If the respective receiver is the last receiver in the daisy chain node, buffer **380** and deserializer **390** may not be present. Incoming upstream side band communication streams may be received from subsequent receivers in the daisy chain receivers to receiver **300** through buffer **380**. These incoming upstream side band communication streams may convey control data from the decryption engines in the downstream receivers back to the encryption engines in transmitter **200**. The side band streams may exchange public keys with the transmitter or verify the integrity of the connection with the decryption engines of the respective receiver.

[37] Deserializer **390** may reformat the upstream side band communication streams, which may have been formatted in the sending receiver. The reformatted upstream side band communications streams may be output to respective channels in framer **320**.

[38] Framer **320** may include a channel corresponding to the respective audio/video stream being output by the respective receiver and an additional channel for the upstream side band communication streams received from deserializer **390**. Framer **320** may combine the upstream side band communication stream from the given receiver with the upstream side

band communication streams from the downstream receivers into a single stream. Framer **320** may be coupled to serializer **340**.

[39] Receiver **300** may include serializer **240**. Serializer **340** may convert the combined upstream communication streams into a format that may be transmitted across the transport mechanism formatted by a preceding receiver or transmitter **200**. Buffer **360** may also be included in receiver **300** and may be a physical transport interface to feed the combined upstream side band communication streams to a preceding receiver or transmitter **200**. If the respective receiver is the first receiver, buffer **360** may feed the upstream side band communications streams back to transmitter **200**. If the respective receiver is not the first receiver, but a subsequent receiver in the daisy chain, buffer **360** may feed the upstream side band communications streams back to buffer **380** in the preceding receiver.

[40] During operation, a formatted version of the MPES may be applied to buffer **370**. The buffer may output the formatted MPES to buffer **385** where the entire MPES may be fed to a next receiver. The MPES may also be fed to deserializer **360** which redigitizes the MPES and outputs the MPES to deframer **330**. Deframer **330** may divide the MPES and pick up one of the encrypted audio/video streams to be decrypted locally in the receiver. This encrypted audio/video stream, EAV1, may be output from deframer **330** to decryption engine **310**. Deframer **330** may also output the downstream side band communication stream, SB Down1, to decryption engine **310**. The downstream side band communication stream may correspond to control data and public keys outputted from the respective encryption engine that encrypted EAV1 to decryption engine **310**.

[41] Decryption engine **310** may decrypt encrypted audio/video stream EAV1 using its set of private keys and the same encryption algorithm used to encrypt AV1, and output the

audio/video stream for display. If an auxiliary stream is also present, that auxiliary stream may also be outputted (not pictured). Decryption engine **310** may also output an upstream side band communication stream, SB UP1 to framer **320**, which may convey control data from decryption engine **310** back to transmitter **200**. Deframer **300** may combine the upstream side band communication stream from decryption engine **310** with incoming upstream side band communication streams from preceding receivers in the daisy chain from buffer **380** and output this combined stream to serializer **340**. Serializer **340** may convert the combined stream into a format that may be transmitted and may output this formatted stream to buffer **360**. Buffer **360** may feed the combined stream to transmitter **200** if the receiver is the first receiver in the daisy chain or to the preceding receiver if the receiver is a subsequent receiver in the daisy chain.

[42] FIG. 5 illustrates a diagram of an architecture where a transmitter and connected receivers are connected in a daisy chain topology, according to the present invention. FIG. 5 illustrates a first receiver **300.1** at the first node in the daisy chain, which may be connected directly to transmitter **200**. Receiver **300.1** may also be coupled to a next receiver in the daisy chain, receiver **300.n** as illustrated in FIG. 5. As illustrated in FIG. 5, receiver **300.n** may be the last receiver in the daisy chain. In other embodiments, there exists a number of receivers in the daisy chain that are coupled between receiver **300.1** and receiver **300.n**.

[43] The input of buffer **370.1** in receiver **300.1** may be coupled to the output of buffer **260** in transmitter **200**. The output of buffer **360.n** in receiver **300.1** may be coupled to the input of buffer **270**. The input of buffer **370.n** in receiver **300.n** may be coupled to the output of **385.1**, and the output of buffer **360.n** in receiver **300.n** may be coupled to the input of

buffer **380.1**. Both the decryption engines **310.1** and **310.n**, and the deframers **330.1** and **330.n**, may be selectably controlled by host control interface **280**.

[44] During operation, the MPES may be transmitted across a twisted cable or other transport mechanism from transmitter **200** to a first receiver **300.1**. The MPES may be fed to receiver **300.1** from buffer **260** and may be received in the receiver by buffer **370.1**. Buffer **370.1** may output the MPES to the deserializer **350.1** and deframer **330.1** to pick up one of the encrypted audio/video streams which may be displayed after being decoded by decryption engine **310.1**. Receiver **300.1** may be programmed to pick up a designated encrypted audio/video stream from the MPES. Receiver **300.1** may not pick up any of the other encrypted audio/video streams from MPES and a security mechanism may be implemented to ensure that receiver **300.1** picks up a unique channel from the other receivers. Multiple receivers in the daisy chain may not pick up the same channel, therefore each encrypted audio/video stream may only be decrypted and displayed by one dedicated receiver. This may ensure a defined one-to-one assignment between any one particular channel in transmitter **200** and a receiver in the daisy chain, establishing a point-to-point connection between transmitter **200** and each of the connected receivers in the daisy chain.

[45] The MPES may be outputted from buffer **370.1** to receiver **300.n** through buffer **385.1**. The MPES may be received in receiver **300.n** by buffer **370.n**. Buffer **370.1** may output the MPES to the deserializer **350.n** and deframer **330.n** to pick up one of the encrypted audio/video streams which may be displayed after being decoded by decryption engine **310.n**. Receiver **300.n** may also be programmed to pick up a designated encrypted audio/video stream from the MPES and not pick up any of the other encrypted channels designated in the preceding receivers in the daisy chain.

[46] Decryption engine **310.n** may output an upstream side band communication stream, SB UP n, to framer **320.n**, which may be output the communication stream to the preceding receiver, receiver **300.1** in FIG. 5, through serializer **340.n** and buffer **360.n**. Receiver **300.1** may receive all of the upstream side band communication streams from the subsequent receivers in the daisy chain through buffer **360.1** and deserializer **360.n**. Framer **320.1** may combine the incoming upstream side band communications streams with upstream side band stream from decryption engine **310.1** and output the combined stream back to transmitter 200, through serializer **340.1** and buffer **360.1**. The combined side band stream may be fed to transmitter **300.1** from buffer **360.1** and may be received in the transmitter by buffer **270**. The combined side band stream may be separated into individual streams and each individual upstream side band communication stream may be sent to a respective encryption engine to convey control data and license key information from the respective receiver.

[47] Several embodiments of the invention are specifically illustrated and/or described herein. However, it will be appreciated that modifications and variations of the invention are covered by the above teachings and within the purview of the appended claims without departing from the spirit and intended scope of the invention.

WHAT IS CLAIMED IS:

1. A system that enables transmission of multiple HDCP encrypted streams over a unified cable using a daisy chain topology, the system comprising:

a transmitter outputting a merged stream over the unified cable;

a plurality of encryption engines housed in the transmitter, the plurality of encryption engines encrypting received audio/video streams with a key associated with each respective encryption engine;

a framer receiving the encrypted audio/video streams from the plurality of encryption engines, wherein the framer combines the encrypted audio/video streams into the merged stream;

a first receiver coupled to the transmitter, the first receiver receiving the merged stream from the transmitter;

a deframer housed in the first receiver, the deframer selecting one of the encrypted audio/video streams from the merged stream;

a decryption engine housed in the first receiver, the decryption engine decrypting the respective encrypted audio/video stream, the respective audio/video stream being output for display; and

at least one additional receiver coupled to the first receiver by a daisy chain, wherein the at least one additional receiver receives the merged stream from the first receiver, the at least one additional receiver selecting and decrypting a different encrypted audio/video stream from the merged stream, the different audio/video stream being output for display.

2. The system according to claim 1, wherein the framer is housed in the transmitter.

3. The system according to claim 1, wherein an additional deframer is housed in the at least one additional receiver, the additional deframer selecting the different encrypted audio/video streams from the merged stream.
4. The system according to claim 1, wherein an additional decryption engine is housed in the at least one additional receiver, the additional decryption engine decrypting the different encrypted audio/video stream.
5. The system according to claim 1, wherein another receiver is coupled to the at least one additional receiver by the daisy chain, wherein the another receiver receives the merged stream from the at least one additional receiver.
6. The system according to claim 1, wherein the transmitter is situated in an HDCP compatible audio/video source.
7. The system according to claim 4, wherein the at least one additional receiver outputs an upstream side band stream from the additional decryption engine to the first receiver.
8. The system according to claim 7, wherein an additional framer is housed in the first receiver, the additional framer combining a upstream side band stream from the decryption engine with the incoming upstream side band stream from the at least one additional receiver into a combined upstream side band stream, the combined upstream side band stream outputted to the transmitter.
9. The system according to claim 4, wherein the plurality of encryption engines output downstream side band streams, one of the downstream side band streams being transmitted to the decryption engine.

10. The system according to claim 9, wherein another one of the downstream side band streams is transmitted to the additional decryption engine.

11. The system according to claim 8, wherein another deframer is housed in the transmitter, the another deframer separating the combined upstream side band stream into individual upstream side band streams that are transmitted to the encryption engines.

12. A method for transmitting multiple HDCP encrypted streams over a unified cable using a daisy chain topology, the method comprising:

encrypting received audio/video streams with a plurality of encryption engines housed in a transmitter;

combining the encrypted audio/video streams into a merged stream with a framer housed in the transmitter;

formatting the merged stream for transmission across a transport mechanism;

outputting the formatted merged stream across the transport mechanism to a first receiver;

transmitting the formatted merged stream to at least one additional receiver via a daisy chain connection with the first receiver;

selecting one of the encrypted audio/video streams from the merged stream after the formatted merged stream is reformatted;

decrypting the respective encrypted audio/video stream by a decryption engine in the first receiver, the respective audio/video stream being output for display;

selecting a different encrypted audio/video stream from the merged stream after the formatted merged stream is formatted; and

decrypting the different encrypted audio/video stream by an additional decryption engine in the at least one receiver, the different audio/video stream being output for display.

13. The method according to claim 12, further comprising:

transmitting the formatted merged stream to another receiver that is coupled to the at least one additional receiver by the daisy chain connection.

14. The method according to claim 12, wherein the at least one additional receiver outputs an upstream side band stream from the additional decryption engine to the first receiver.

15. The method according to claim 14, wherein the first receiver combines a upstream side band stream from the decryption engine with the incoming upstream side band stream from the at least one additional receiver into a combined upstream side band stream, the combined upstream side band stream outputted to the transmitter.

16. The method according to claim 12, wherein the plurality of encryption engines output downstream side band streams, one of the downstream side band streams being transmitted to the decryption engine.

17. The method according to claim 16, wherein another one of the downstream side band streams is transmitted to the additional decryption engine.

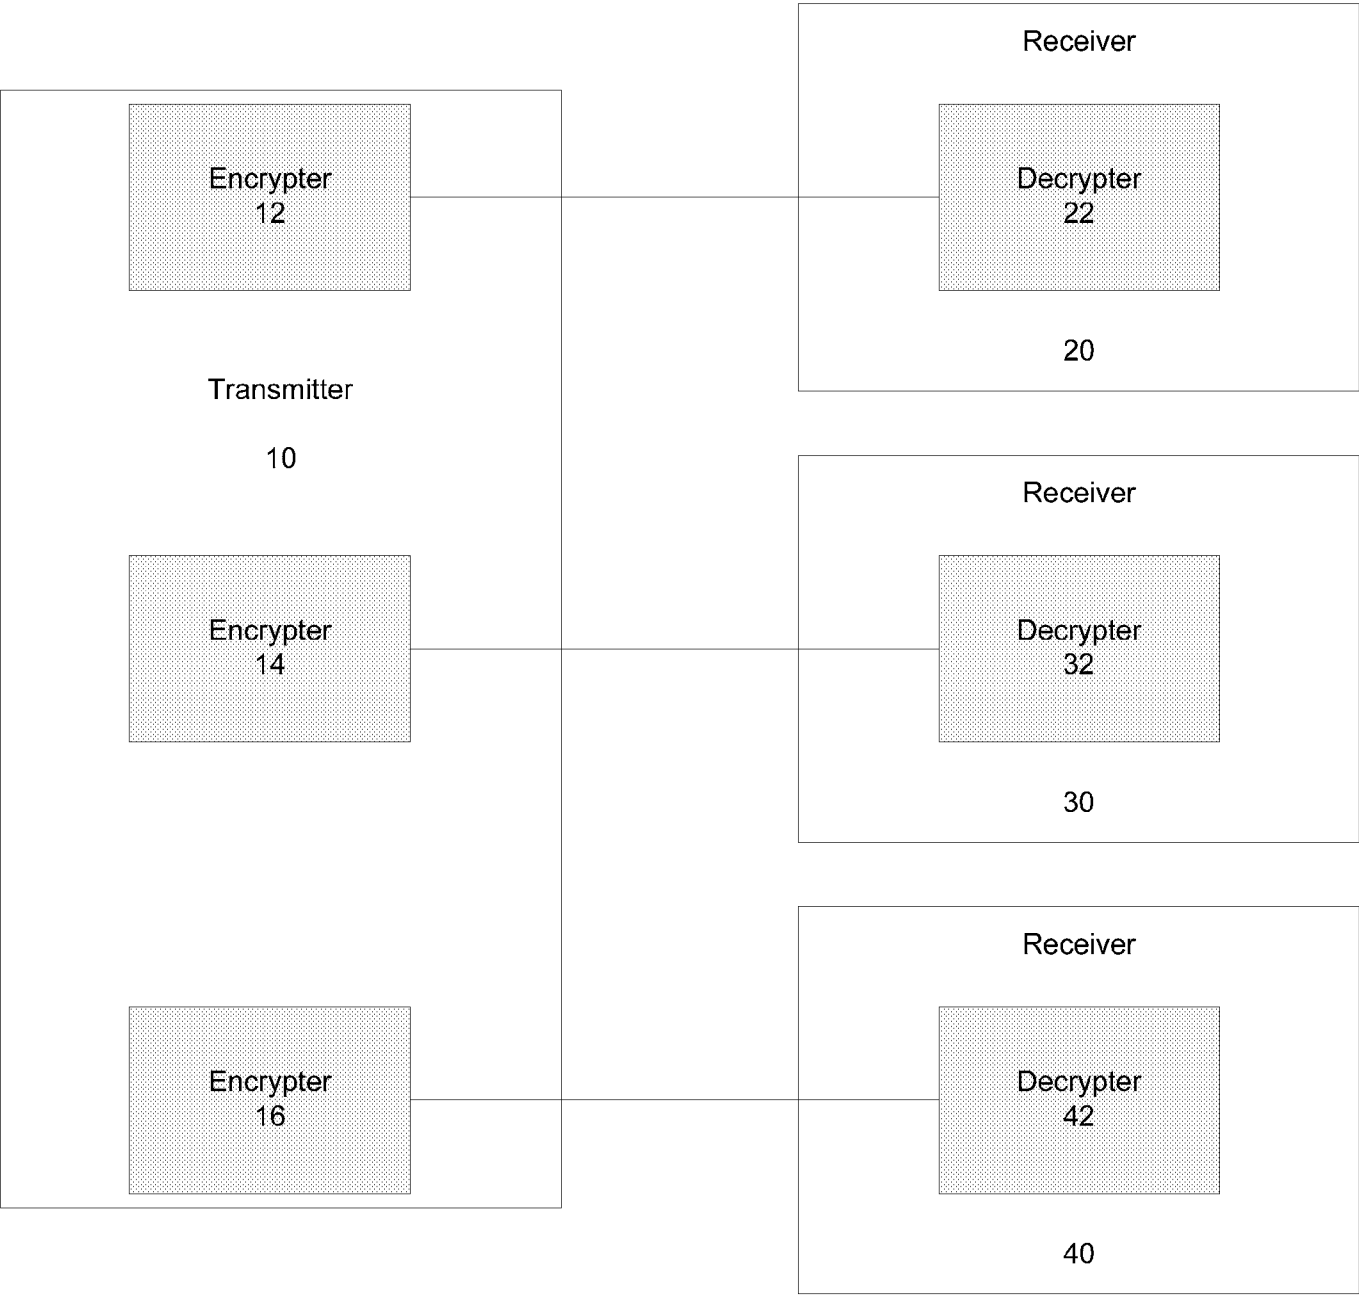


Figure 1

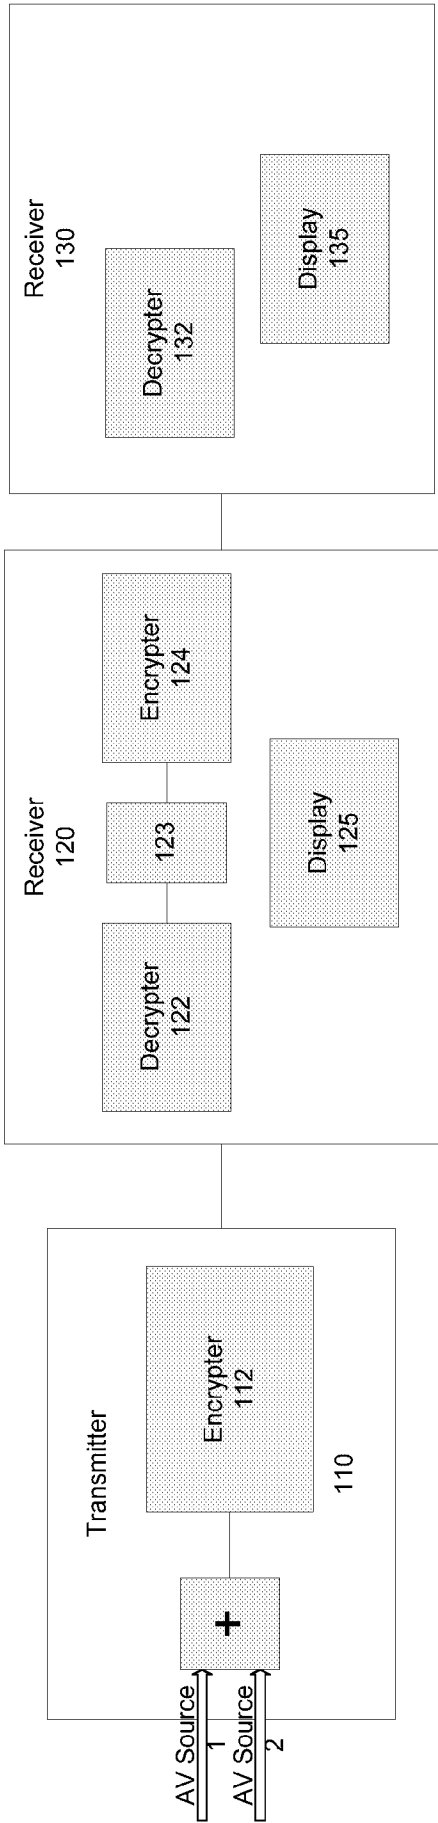


Figure 2

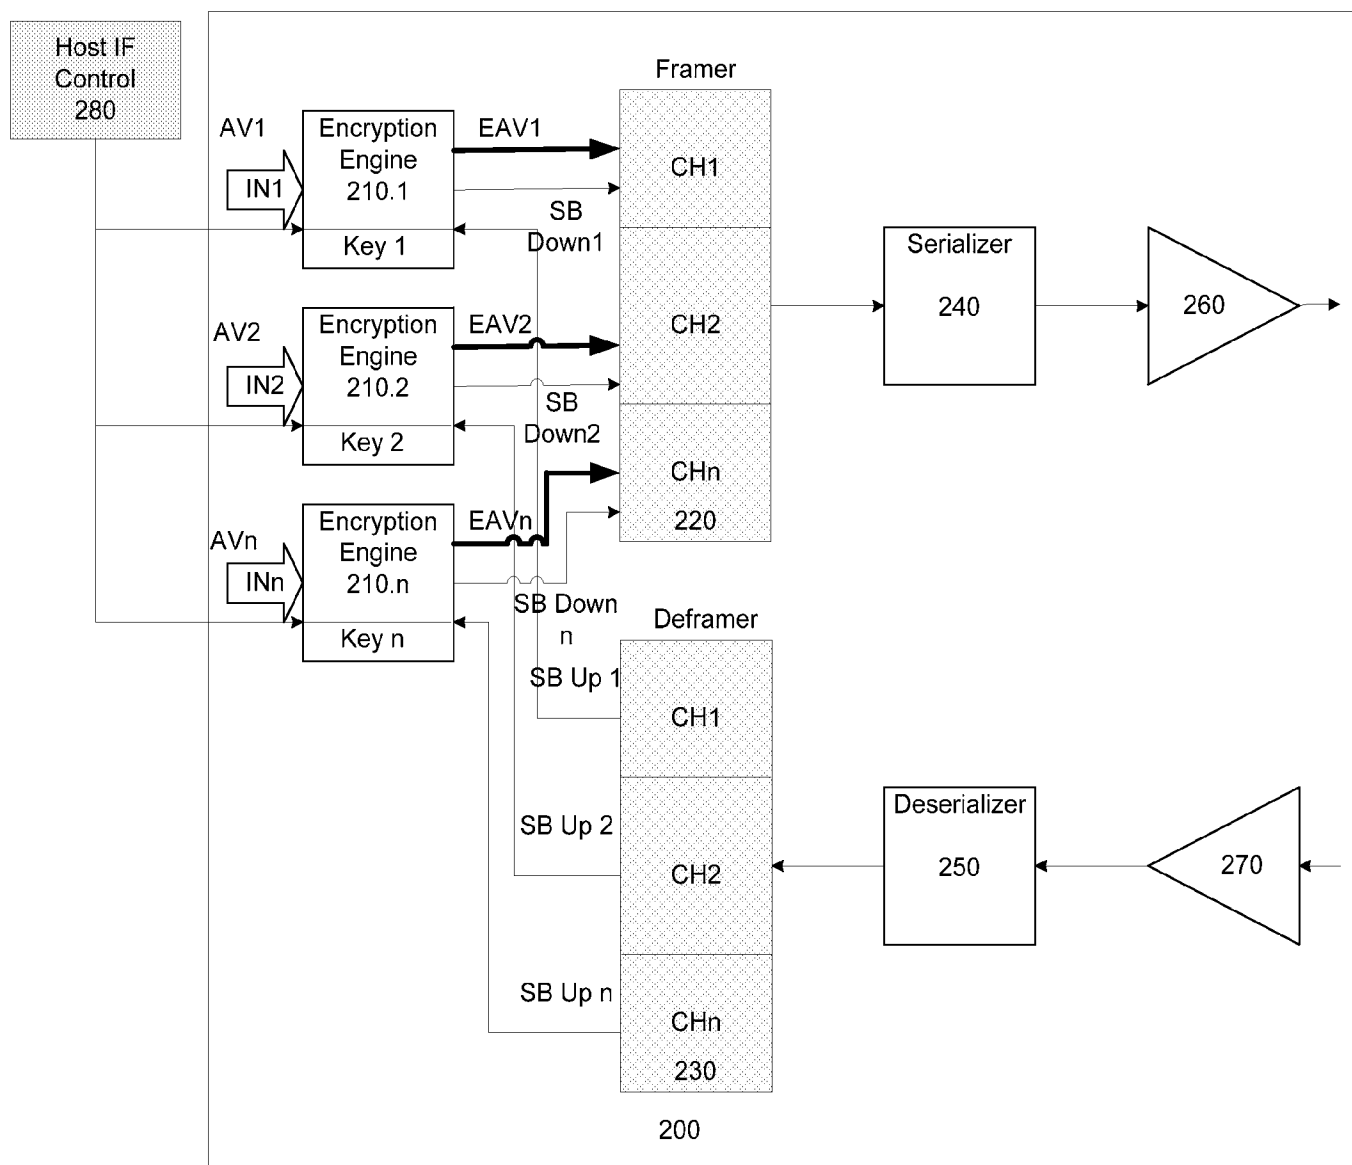


Figure 3

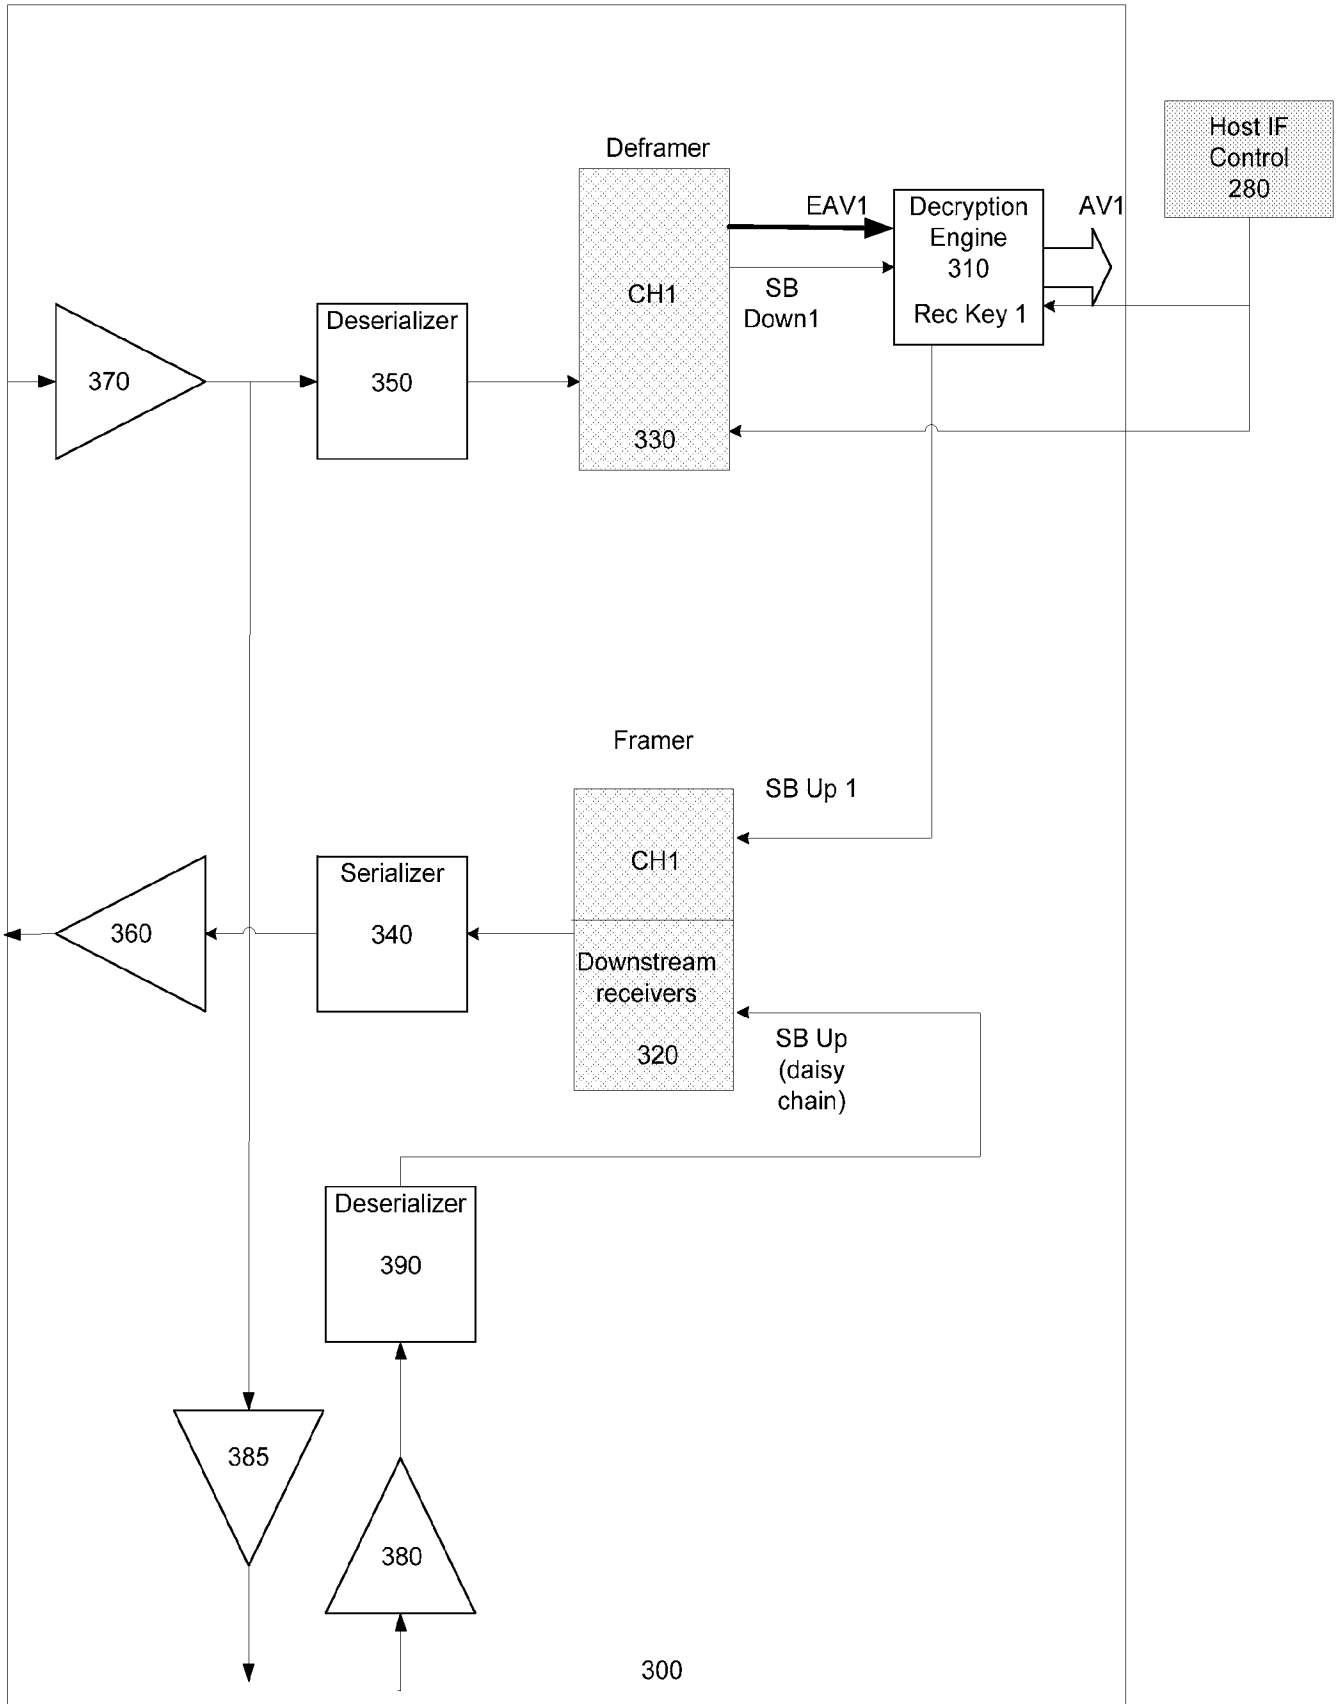


Figure 4

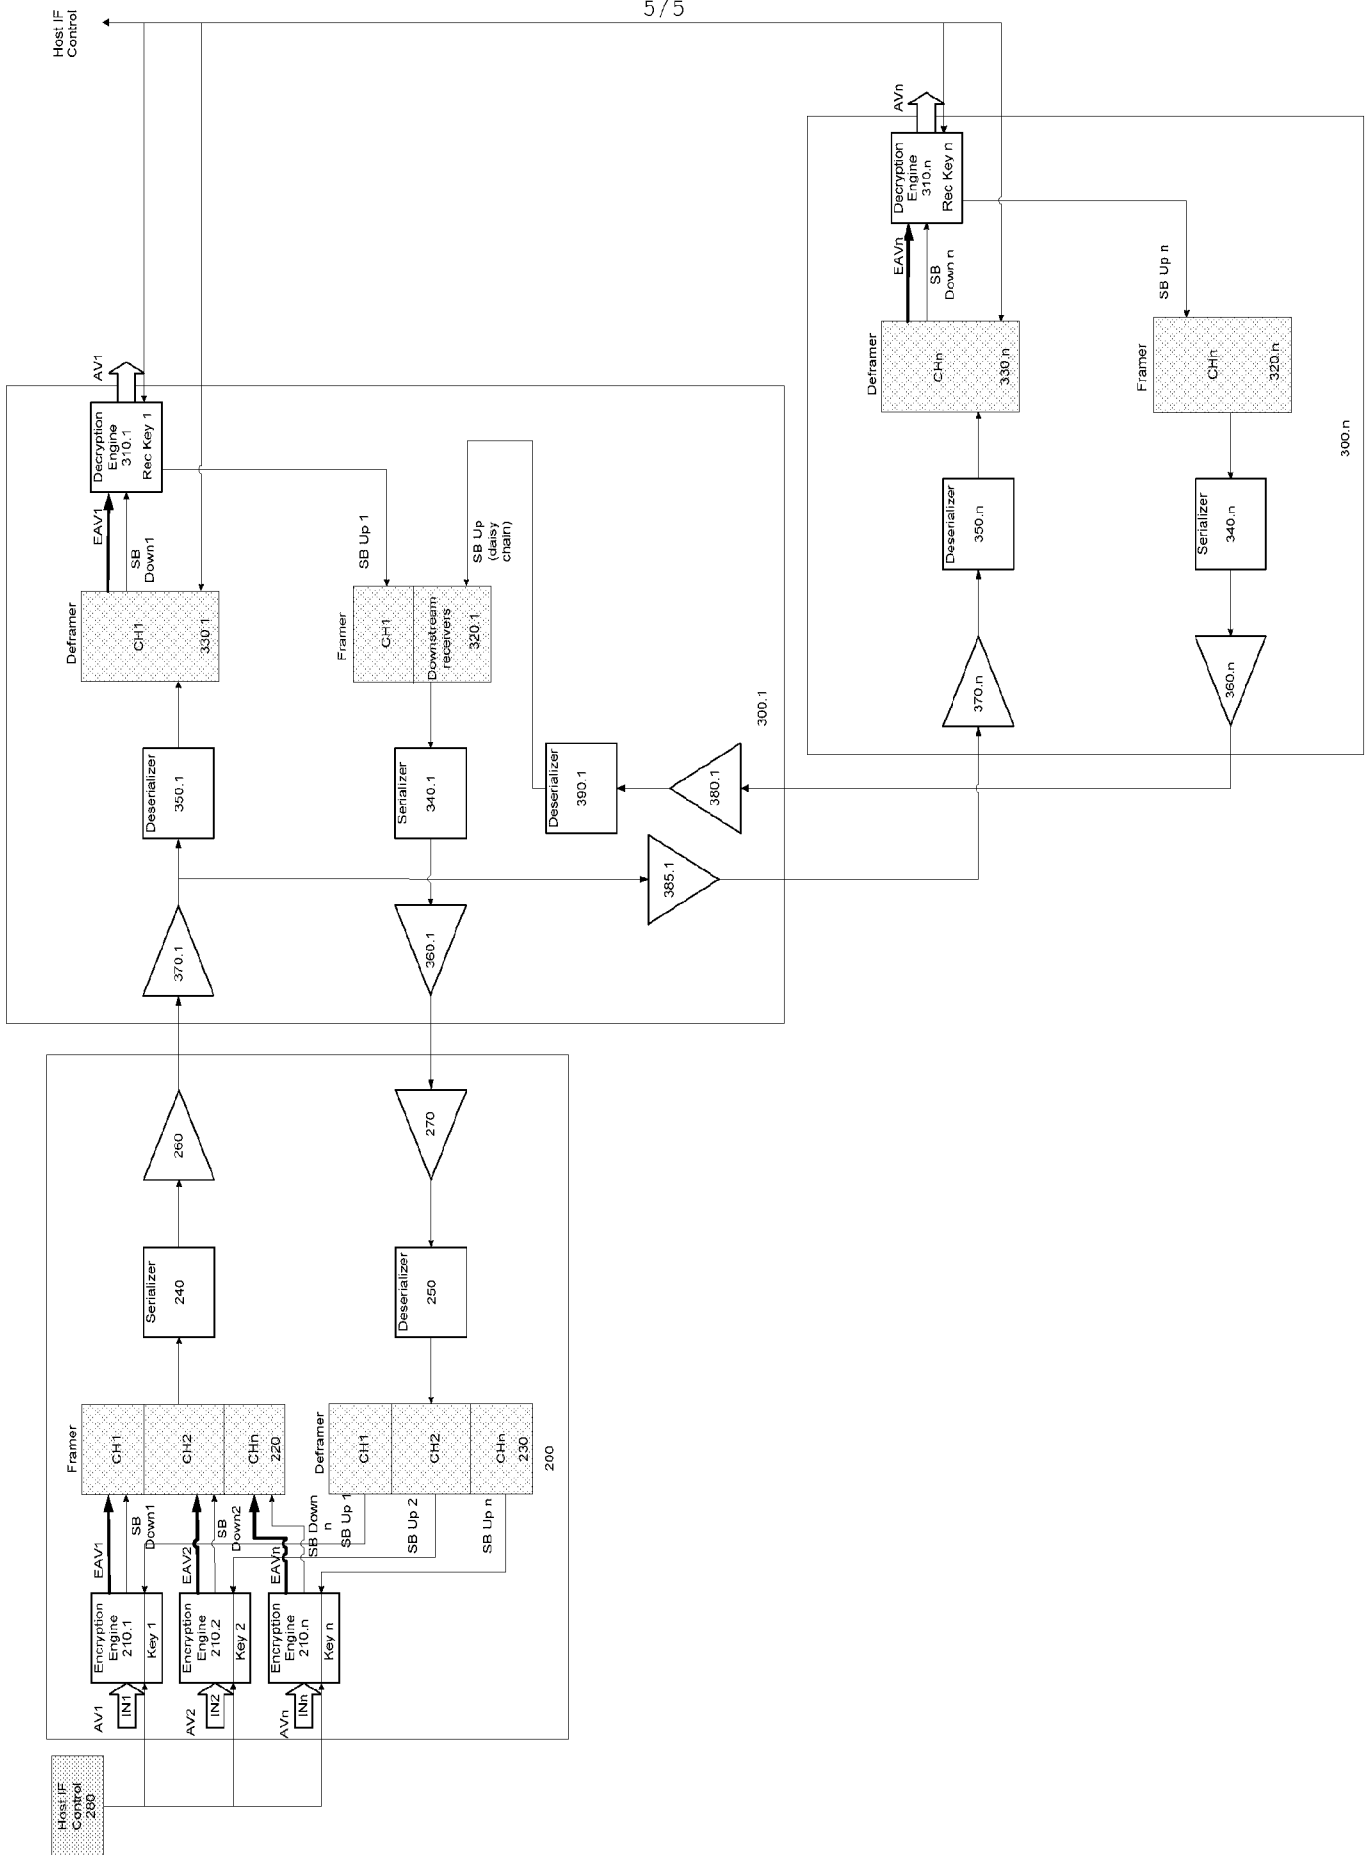


Figure 5

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US12/27661

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - G09G 5/00, 5/12 (2012.01)

USPC - 345/1.1, 204; 380/212

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC(8): H04N 5/44N; H04L 9/06 (2012.01); USPC: 713/171; 380/210, 212, 223

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

IPC(8): H04N 7/16, 7/173; G09G 5/00, 5/12 (2012.01); USPC: 345/1.1, 204; 725/30, 117

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

MicroPatent (US-G, US-A, EP-A, EP-B, WO, JP-bib, DE-C,B, DE-A, DE-T, DE-U, GB-A, FR-A); DialogPRO; IEEE; Google/Google Scholar; daisy chain, video*, high bandwidth digital content protect, HDCP

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2009/0278763 A1 (ZENG, X et al.) November 12, 2009, figure 3, paragraphs [0007], [0034], [0037], [0043], [0086].	1-17
Y	US 2006/0053441 A1 (WALKER, B) March 9, 2006, figures 1, 2, paragraphs [0016]-[0018], [0024].	1-17
Y	US 2007/0242062 A1 (GUO, Y et al.) October 18, 2007, figures 2a, 2b; paragraphs [0041], [0043].	7, 8, 11, 14, 15
E, X	WO 2012/033707 A1 (SISTO, J et al.) March 15, 2012, abstract, figure 6, paragraphs [0059]-[0063].	1-6, 9, 10, 12, 13, 16, 17
A	US 7903815 B2 (BACON, K et al.) March 8, 2011, abstract, figures 2, 3, column 4, line 42 to column 5, line 62.	1-6, 12, 13

☐ Further documents are listed in the continuation of Box C.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

04 May 2012 (04.05.2012)

Date of mailing of the international search report

30 MAY 2012

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450
Facsimile No. 571-273-3201

Authorized officer:

Shane Thomas

PCT Helpdesk: 571-272-4300
PCT OSP: 571-272-7774