

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
11 June 2009 (11.06.2009)

PCT

(10) International Publication Number
WO 2009/072101 A2

(51) International Patent Classification:
G06F 12/02 (2006.01)

(74) Agent: PEARL COHEN ZEDEK LATZER; 5 Shenkar
Street, P.O. Box 12704, Herzlia 46733 (IL).

(21) International Application Number:
PCT/IL2008/001231

(22) International Filing Date:
17 September 2008 (17.09.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/996,782 5 December 2007 (05.12.2007) US
61/006,805 31 January 2008 (31.01.2008) US
61/064,853 31 March 2008 (31.03.2008) US
61/071,465 30 April 2008 (30.04.2008) US
61/129,608 8 July 2008 (08.07.2008) US

(71) Applicant (for all designated States except US): **DENS-
BITS TECHNOLOGIES LTD.** [IL/IL]; Building 30, Flr
3, Matam Industrial Park, P.O.Box 15111, 31015 Haifa
(IL).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **KATZ, Michael**
[IL/IL]; 75 Moriah Ave., 34616 Haifa (IL).


(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA,
CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE,
EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID,
IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK,
LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW,
MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT,
RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL,
NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG,
CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished
upon receipt of that report

(54) Title: APPARATUS AND METHODS FOR GENERATING ROW-SPECIFIC READING THRESHOLDS IN FLASH MEM-
ORY

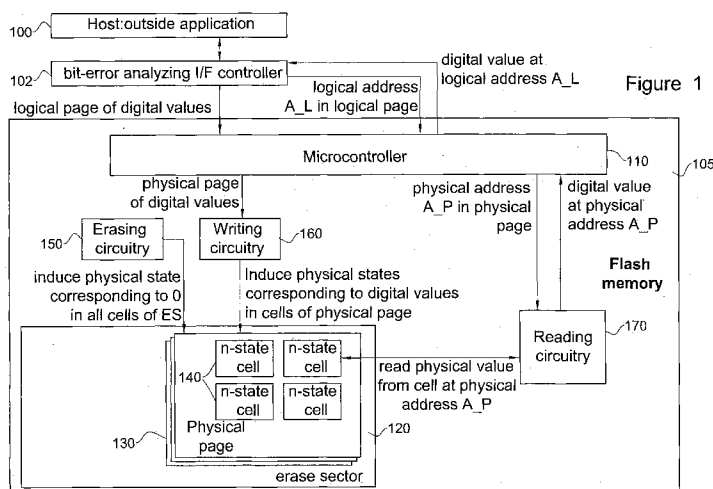

(57) Abstract: A method for generating a set of at least one row-specific reading threshold for reading at least portions of pages of data within an erase sector of a flash memory device, the method comprising predetermining at least one initial reading threshold; performing the following steps for at least one current logical page: generating bit error characterizing information regarding at least one corresponding bit error within at least one cell representing at least a logical portion of at least one successfully reconstructed previous logical page; and computing at least one row-specific reading threshold based on said bit error characterizing information and on a previous threshold initially comprising said initial threshold and subsequently comprising a row-specific reading threshold computed for a successfully reconstructed previous logical page; and reading at least a portion of said current logical page using said at least one row-specific reading threshold.

**APPARATUS AND METHODS FOR GENERATING ROW-SPECIFIC READING
THRESHOLDS IN FLASH MEMORY**

REFERENCE TO CO-PENDING APPLICATIONS

5

Priority is claimed from the following co-pending applications: US Provisional Application No. 61/129,608, filed July 8, 2008 and entitled "A Method for Acquiring and Tracking Detection Thresholds in Flash Devices", US Provisional Application No. 60/996,782, filed December 5, 2007 and entitled "Systems and Methods for Using a
10 Training Sequence in Flash Memory", US Provisional Application No. 61/064,853, filed March 31, 2008 and entitled "Flash Memory Device with Physical Cell Value Deterioration Accommodation and Methods Useful in Conjunction Therewith", US Provisional Application No. 61/006,805, filed January 31, 2008 and entitled "A Method for Extending the Life of Flash Devices" and US Provisional Application No.
15 61/071,465, filed April 30, 2008 and entitled "Systems and Methods for Temporarily Retiring Memory Portions".

Other co-pending applications include: US Provisional Application No. 60/960,207, filed September 20, 2007 and entitled "Systems and Methods for Coupling Detection in Flash Memory", US Provisional Application No. 61/071,467, filed April 30,
20 2008 and entitled "Improved Systems and Methods for Determining Logical Values of Coupled Flash Memory Cells", US Provisional Application No. 60/960,943, filed October 22, 2007 and entitled "Systems and methods to reduce errors in Solid State Disks and Large Flash Devices" and US Provisional Application No. 61/071,469, filed April 30, 2008 and entitled "Systems and Methods for Averaging Error Rates in Non-Volatile
25 Devices and Storage Systems", US Provisional Application No. 60/996,027, filed October 25, 2007 and entitled "Systems and Methods for Coping with Variable Bit Error Rates in Flash Devices", US Provisional Application No. 61/071,466, filed April 30, 2008 and entitled "Systems and Methods for Multiple Coding Rates in Flash Devices", US Provisional Application No. 61/006,120, filed December 19, 2007 and entitled
30 "Systems and Methods for Coping with Multi Stage Decoding in Flash Devices", US Provisional Application No. 61/071,464, filed April 30, 2008 and entitled "A Decoder

Operative to Effect A Plurality of Decoding Stages Upon Flash Memory Data and Methods Useful in Conjunction Therewith", US Provisional Application No. 61/006,385, filed January 10, 2008 and entitled "A System for Error Correction Encoder and Decoder Using the Lee Metric and Adapted to Work on Multi-Level Physical Media", US
5 Provisional Application No. 61/064,995, filed April 8, 2008 and entitled "Systems and Methods for Error Correction and Decoding on Multi-Level Physical Media", US Provisional Application No. 60/996,948, filed December 12, 2007 and entitled "Low Power BCH/RS Decoding: a Low Power Chien-Search Implementation", US Provisional Application No. 61/071,487, filed May 1, 2008 and entitled "Chien-Search System
10 Employing a Clock-Gating Scheme to Save Power for Error Correction Decoder and other Applications", US Provisional Application No. 61/071,468, filed April 30, 2008 and entitled "A Low Power Chien-Search Based BCH/RS Recoding System for Flash Memory, Mobile Communications Devices and Other Applications", US Provisional Application No. 61/006,806, filed January 31, 2008 and entitled "Systems and Methods
15 for using a Erasure Coding in Flash memory", US Provisional Application No. 61/071,486, filed May 1, 2008 and entitled "Systems and Methods for Handling Immediate Data Errors in Flash Memory", US Provisional Application No. 61/006,078, filed December 18, 2007 and entitled "Systems and Methods for Multi Rate Coding in Multi Level Flash Devices", US Provisional Application No. 61/064,923, filed April 30,
20 2008 and entitled "Apparatus For Coding At A Plurality Of Rates In Multi-Level Flash Memory Systems, And Methods Useful In Conjunction Therewith", US Provisional Application No. 61/064,760, filed March 25, 2008 and entitled "Hardware efficient implementation of rounding in fixed-point arithmetic", US Provisional Application No. 61/071,404, filed April 28, 2008 and entitled "Apparatus and Methods for Hardware-
25 Efficient Unbiased Rounding", US Provisional Application No. 61/136,234, filed August 20, 2008 and entitled "A Method Of Reprogramming A Non-Volatile Memory Device Without Performing An Erase Operation", US Provisional Application No. 61/129,414, filed June 25, 2008 and entitled "Improved Programming Speed in Flash Devices Using Adaptive Programming", and several other co-pending patent applications being filed
30 concurrently (same day).

FIELD OF THE INVENTION

The present invention relates generally to flash memory devices.

5

BACKGROUND OF THE INVENTION

Conventional flash memory technology is described in the following publications inter alia:

- 10 [1] Paulo Cappelletti, Clara Golla, Piero Olivo, Enrico Zaroni, "Flash Memories", Kluwer Academic Publishers, 1999.
- [2] G. Campardo, R. Micheloni, D. Novosel, "VLSI-Design of Non-Volatile Memories", Springer Berlin Heidelberg New York, 2005.

15 Other relevant technologies and state of the art systems are described in the following documents:

- [3] G. Proakis, "Digital Communications," 3rd ed., New York: McGraw-Hill, 1995.
- [4] P. Cappelletti et al., "Flash Memories," Kluwer, 1999.

20 "Read-disturb" is a known phenomenon whereby following a great many read operations performed on one or more particular physical pages within an erase sector, there is a deterioration in the quality of those physical pages or more typically in the quality of the entire erase sector. Typically, un-programmed cells tend to behave as though they were programmed, causing read errors.

25 The disclosures of all publications and patent documents mentioned in the specification, and of the publications and patent documents cited therein directly or indirectly, are hereby incorporated by reference.

SUMMARY OF THE INVENTION

The following terms may be construed either in accordance with any definition
5 thereof appearing in the prior art literature or in accordance with the specification, or as follows:

Bit error rate (BER) = a parameter that a flash memory device manufacturer commits to
vis a vis its customers, expressing the maximum proportion of wrongly read bits
10 (wrongly read bits/ total number of bits) that users of the flash memory device need to expect at any time during the stipulated lifetime of the flash memory device e.g. 10 years.

Block = a set of flash memory device cells which must, due to physical limitations of the flash memory device, be erased together. Also termed erase sector, erase block.

15

Cell: A component of flash memory that stores one bit of information (in single-level cell devices) or n bits of information (in a multi-level device having 2^n levels). Typically, each cell comprises a floating-gate transistor. n may or may not be an integer. "Multi-level" means that the physical levels in the cell are, to an acceptable level of
20 certainty, statistically partitionable into multiple distinguishable regions, plus a region corresponding to zero, such that digital values each comprising multiple bits can be represented by the cell. In contrast, in single-level cells, the physical levels in the cell are assumed to be statistically partitionable into only two regions, one corresponding to zero and one other, non-zero region, such that only one bit can be represented by a single-level
25 cell.

Charge level: the measured voltage of a cell which reflects its electric charge.

Cycling: Repeatedly writing new data into flash memory cells and repeatedly erasing the
30 cells between each two writing operations.

Decision regions: Regions extending between adjacent decision levels, e.g. if decision levels are 0, 2 and 4 volts respectively, the decision regions are under 0 V, 0 V – 2 V, 2V – 4 V, and over 4 V.

- 5 Demapping: basic cell-level reading function in which a digital n-tuple originally received from an outside application is derived from a physical value representing a physical state in the cell having a predetermined correspondence to the digital n-tuple.

- 10 Digital value or "logical value": n-tuple of bits represented by a cell in flash memory capable of generating $2^{\exp n}$ distinguishable levels of a typically continuous physical value such as charge, where n may or may not be an integer.

- 15 Erase cycle: The relatively slow process of erasing a block of cells (erase sector), each block typically comprising more than one page, or, in certain non-flash memory devices, of erasing a single cell or the duration of so doing. An advantage of erasing cells collectively in blocks as in flash memory, rather than individually, is enhanced programming speed: Many cells and typically even many pages of cells are erased in a single erase cycle.

- 20 Erase-write cycle: The process of erasing a block of cells (erase sector), each block typically comprising a plurality of pages, and subsequently writing new data into at least some of them. The terms "program" and "write" are used herein generally interchangeably.

- 25 Flash memory: Non-volatile computer memory including cells that are erased block by block, each block typically comprising more than one page, but are written into and read from, page by page. Includes NOR-type flash memory, NAND-type flash memory, and PRAM, e.g. Samsung PRAM, inter alia, and flash memory devices with any suitable number of levels per cell, such as but not limited to 2, 4, or 8.

30

Logical page: a portion of typically sequential data, whose amount is typically less than or equal to a predetermined amount of data defined to be a pageful of data, which has typically been defined by a host (data source/destination) or user thereof, as a page, and which is sent by the host to a flash memory device for storage and is subsequently read by the host from the flash memory device.

Mapping: basic cell-level writing function in which incoming digital n-tuple is mapped to a program level by inducing a program level in the cell, having a predetermined correspondence to the incoming logical value.

Physical Page = A portion, typically 512 or 2048 or 4096 bytes in size, of a flash memory e.g. a NAND or NOR flash memory device. Writing and reading is typically performed physical page by physical page, as opposed to erasing which can be performed only erase sector by erase sector. A few bytes, typically 16 – 32 for every 512 data bytes are associated with each page (typically 16, 64 or 128 per page), for storage of error correction information. A typical block may include 32 512-byte pages or 64 2048-byte pages. Alternatively, a physical page is an ordered set (e.g. sequence or array) of flash memory cells which are all written in simultaneously by each write operation, the set typically comprising a predetermined number of typically physically adjacent flash memory cells containing actual data written by and subsequently read by the host, as well as, typically error correction information and back pointers used for recognizing the true address of a page.

Precise read, soft read: Cell threshold voltages are read at a precision (number of bits) greater than the number of Mapping levels (2^n). The terms precise read or soft read are interchangeable. In contrast, in "hard read", cell threshold voltages are read at a precision (number of bits) smaller than, or equal to, the number of mapping levels (2^n where n = number of bits per cell).

Present level, Charge level: The amount of charge in the cell. The Amount of charge currently existing in a cell, at the present time, as opposed to "program level", the amount of charge originally induced in the cell (i.e. at the end of programming).

Program: same as "write".

5 Program level (programmed level, programming level): amount of charge originally induced in a cell to represent a given logical value, as opposed to "present level".

10 Reliability: Reliability of a flash memory device may be operationalized as the probability that a worst-case logical page written and stored in that device for a predetermined long time period such as 10 years will be successfully read i.e. that sufficiently few errors, if any, will be present in the physical page/s storing each logical page such that the error code appended to the logical page will suffice to overcome those few errors.

15 Reprogrammability (Np): An aspect of flash memory quality. This is typically operationalized by a reprogrammability parameter, also termed herein "Np", denoting the number of times that a flash memory can be re-programmed (number of erase-write cycles that the device can withstand) before the level of errors is so high as to make an unacceptably high proportion of those errors irrecoverable given a predetermined amount of memory devoted to redundancy. Typically recoverability is investigated
20 following a conventional aging simulation process which simulates or approximates the data degradation effect that a predetermined time period e.g. a 10 year period has on the flash memory device, in an attempt to accommodate for a period of up to 10 years between writing of data in flash memory and reading of the data therefrom.

25 Resolution: Number of levels in each cell, which in turn determines the number of bits the cell can store; typically a cell with 2^n levels stores n bits. Low resolution (partitioning the window, W, of physical values a cell can assume into a small rather than large number of levels per cell) provides high reliability.

Retention: Retention of original physical levels induced in the flash memory cells despite time which has elapsed and despite previous erase/write cycles; retention is typically below 100% resulting in deterioration of original physical levels into present levels.

- 5 Retention time: The amount of time that data has been stored in a flash device, typically without, or substantially without, voltage having been supplied to the flash device i.e. the time which elapses between programming of a page and reading of the same page.

Symbol: Logical value

10

Threshold level or "decision level": the voltage (e.g.) against which the charge level of a cell is measured. For example, a cell may be said to store a particular digital n-tuple D if the charge level or other physical level of the cell falls between two threshold values T.

- 15 Code rate: ratio of redundancy bits to data bits in flash memory.

Data cells: cells storing data provided by host as opposed to "non-data cells" which do not store host-provided data, and may, for example, store instead error correction information, management information, redundancy information, spare bits or parity bits.

20

Logical page: a set of bits defined as a page typically having a unique page address, by a host external to a flash memory device.

In the present specification, the terms "row" and "column" refer to rows of cells and columns of cells, respectively and are not references to sub-divisions of a logical page.

25

The term "MSB" is used herein to denote the bit which is programmed into a multi-level cell, storing several bits, first. The term "LSB" is used herein to denote the bit which is programmed into the multi-level cell, last. The term "CSB" is used herein to denote the bit which is programmed into a 3-level cell, storing 3 bits, second, i.e. after the MSB and before the LSB. It is appreciated that more generally, e.g. if the multi-level cell stores 4 or more levels, there are more than one CSBs and use of the term "CSB" herein,

30

which implies that the cell is a 3-level cell, is merely by way of example and is not intended to be limiting.

A logical page is a set of bytes which is meaningful to an application. The location of a logical page in memory is termed herein a physical page. This location may
5 comprise certain cells in their entirety, or, more commonly, may comprise only one or some bits within certain cells. The locations of each of a sequence of logical pages (page 0, page 1, page 2,...) within memory is pre-determined by a suitable mapping scheme mapping logical pages into the bits of the cells of a particular erase sector (block) in flash memory.

10 "Successfully reconstructed " means that using error correction code, the original logical page has been reconstructed generally satisfactorily, e.g., typically, that the logical page has been read, using reading thresholds, has undergone error correction as appropriate and has successfully passed its CRC (cyclic redundancy check) criterion.

"Bit errors" are those errors found in the physical page corresponding to a logical
15 page, which typically are corrected using ECC (error correction code) such that the page is successfully reconstructed despite these errors.

The term "reading threshold" and "detection threshold" are used generally interchangeably.

The term "directed threshold errors" refers to events in which a cell which was
20 programmed to one program level is erroneously interpreted, upon performing a read operation, as being programmed to another program level. A directed threshold error is described by stating the index of the threshold lying between the cell's program level and the erroneously read program level and which is closest to the cell's actual program level, as well as the direction of the error, i.e. "right to left" if the cell was misinterpreted as
25 being programmed to a program level residing to the left of the cell's program level, and "left to right" if the cell was misinterpreted as being programmed to a program level residing to the right of the cell's program level.

Certain embodiments of the present invention seek to provide improved flash memory device.

30 Certain embodiments of the present invention seek to provide inference methods in Flash Memory Devices based on analysis of bit error patterns.

Certain embodiments of the present invention seek to provide a method for correcting at least one detection threshold for reading the data of at least one page within an erase sector of a flash memory device, the method comprising associating the bit errors of at least one previous successfully read page to corresponding directed threshold errors and choosing a corrected threshold based on the previous detection threshold and number of the directed threshold errors.

Certain embodiments of the present invention seek to provide a method for associating at least one bit error of at least one successfully decoded page within an erase sector of a flash device to a corresponding directed threshold error.

Certain embodiments of the present invention seek to provide a method for performing tracking of at least one detection threshold for reading the data of at least one page within an erase sector of a flash memory device wherein previously decoded pages are used.

Certain embodiments of the present invention seek to provide a method for identifying read disturb in at least one erase sector of a flash memory device wherein at least one previously decoded page is used.

There is thus provided, in accordance with certain embodiments of the present invention, a method for generating a set of at least one row-specific reading threshold for reading at least portions of pages of data within an erase sector of a flash memory device, the method comprising predetermining at least one initial reading threshold, performing the following steps for at least one current logical page: generating bit error characterizing information regarding at least one corresponding bit error within at least one cell representing at least a logical portion of at least one successfully reconstructed previous logical page; and computing at least one row-specific reading threshold based on the bit error characterizing information and on a previous threshold initially comprising the initial threshold and subsequently comprising a row-specific reading threshold computed for a successfully reconstructed previous logical page; and reading at least a portion of the current logical page using the at least one row-specific reading threshold.

It is appreciated that the above row-specific method is performed locally, i.e. for local regions within a flash memory device being read, e.g. for each row in the flash

memory, or for some individual rows, or for each of a number of sets each comprising a relatively small number of typically adjacent rows.

According to certain embodiments of the present invention the number of threshold errors from left to right with respect to the detection threshold is compared to
5 the number of threshold errors from right to left with respect to the detection threshold, wherein the corrected detection threshold is modified according to the sign and magnitude of the difference between the two numbers of threshold errors.

According to certain embodiments of the present invention, the number of directional threshold errors with respect to at least one detection threshold in the page is
10 used to determine if the erase sector suffers from read disturb.

According to certain embodiments of the present invention the detection thresholds are corrected only for a subset of pages in the erase sector wherein the subset of pages is chosen such that the correction will be done on detection thresholds which were used on a subset of rows within an erase sector.

15 According to certain embodiments of the present invention thresholds are corrected only if the difference between the total error count associated with the decoding of the page and the total error count associated with the decoding of the previous page is larger than some number.

According to certain embodiments of the present invention the association
20 between bit errors and threshold errors in CSB and/or LSB pages is done based on reading the corresponding MSB and/or CSB pages from the flash device.

According to certain embodiments of the present invention the association is done based on the corresponding MSB and/or CSB pages which are stored in a buffer.

Further in accordance with certain embodiments of the present invention, the bit
25 error characterizing information comprises identification of a reading threshold associated with the bit error.

Still further in accordance with certain embodiments of the present invention, the bit error characterizing information comprises a direction of the bit error.

It is appreciated that a reading threshold is associated with each bit error in that a
30 wrong logical value is assigned to a bit when a physical value induced in the cell in which the bit resides, falls so far along one of the two tail ends of the voltage (e.g.) distribution

of the logical value as to exceed the upper threshold of the programmed value or so as to fall below the lower threshold of the programmed value. In the first instance, the upper threshold is associated with the bit error and the direction of the bit error is termed "left to right". In the second instance, the lower threshold is associated with the bit error and the direction of the bit error is termed "right to left".

Still further in accordance with certain embodiments of the present invention, a first number of threshold errors whose direction, with respect to the reading threshold, is from left to right is compared to a second number of threshold errors whose direction, with respect to the reading threshold, is from right to left, wherein the row-specific reading threshold depends upon at least one of the sign and magnitude of the difference between the first and second numbers of threshold errors.

Further in accordance with certain embodiments of the present invention, the method also comprises selecting a subset of rows within the erase sector; identifying a set of logical pages residing within the subset of rows; and performing the generating, computing and reading for the set of logical pages and for less than all pages in the erase sector.

Still further in accordance with certain embodiments of the present invention, the generating, computing and reading are performed only for the set of logical pages.

Additionally in accordance with certain embodiments of the present invention, the reading thresholds are corrected only if the number of bit errors per page is in a process of change of at least a predetermined magnitude.

Further in accordance with certain embodiments of the present invention, the reading thresholds are corrected only if the difference between the number of bit errors encountered during reconstruction of the current page and the number of bit errors occurring during reconstruction of at least one previous page is larger than a predetermined number.

The predetermined number is typically selected to be relatively large so that the reading threshold correction process is only initiated when a very significant rise in bit error frequency is detected. For example, if the page size is, say, 4K bytes, an increase in the number of bit errors per page of the order of magnitude of dozens or hundreds of bit

errors might trigger a reading threshold correction process such as those shown and described herein.

Further in accordance with certain embodiments of the present invention, the generating is performed for at least one CSB page residing in a row corresponding to an
5 MSB page also residing in the row, based at least partly on values read from the MSB page.

Additionally in accordance with certain embodiments of the present invention, the generating is performed for an LSB page residing in a row corresponding to an MSB and at least one CSB page also residing in the row, based at least partly on values read from
10 at least one of the MSB and CSB pages.

Further in accordance with certain embodiments of the present invention, the generating performed for the CSB page is based at least partly on values read on-the-fly from the MSB page.

Still further in accordance with certain embodiments of the present invention, the
15 generating performed for the LSB page is based at least partly on values read on-the-fly from at least one of the MSB and CSB pages.

Additionally in accordance with certain embodiments of the present invention, the generating performed for the CSB page is based at least partly on stored values previously read from the MSB page.

Further in accordance with certain embodiments of the present invention, the
20 generating performed for the LSB page is based at least partly on stored values previously read from at least one of the MSB and CSB pages.

It is appreciated that the values read from the MSB and/or CSB pages may be read from a buffer which stored these pages, perhaps when they were originally read, or may
25 be a re-read of a page which has already been read at least once either only for reading its own data, or also in order to perform the teachings of this invention, say, for a CSB page preceding the current page which is an LSB page. The buffer is typically located within a controller external to a flash memory device although alternatively it may be located within an internal controller.

Also provided, in accordance with another embodiment of the present invention,
30 is a method for using flash memory to store data, the method comprising writing at least

one page of data to the flash memory, reading the at least one page of data from the flash memory using a set of reading thresholds, including generating bit error characterizing information regarding at least one corresponding bit error within at least one cell representing at least a logical portion of at least one successfully reconstructed previous logical page; and subsequently, using the flash memory so as to take into account the bit error characterizing information.

Further in accordance with certain embodiments of the present invention, the bit error characterizing information comprises identification of a reading threshold which is associated with the bit error.

Still further in accordance with certain embodiments of the present invention, the bit error characterizing information comprises a direction of the bit error.

Additionally in accordance with certain embodiments of the present invention, the using comprises reading at least one subsequent page of data so as to take into account the bit error characterizing information.

Further in accordance with certain embodiments of the present invention, the using comprises detecting portions of the flash memory which suffer from read-disturb phenomenon based on the bit error characterizing information.

It is appreciated that typically, portions of the flash memory which suffer from read-disturb phenomenon are detected rather than merely deducing that a particular portion of memory, e.g. erase sector, suffers from the phenomenon based on the number of times that portion, or a sub-portion e.g. page within it, has been read.

Further in accordance with certain embodiments of the present invention, the detecting comprises detecting an overly large number of bit errors whose source is a reading threshold which is closest, within the set of reading thresholds, to zero voltage, and whose direction is from left to right.

Also provided, in accordance with another embodiment of the present invention, is a system for generating a set of at least one row-specific reading threshold for reading at least portions of pages of data within an erase sector of a flash memory device, the system comprising apparatus for predetermining at least one initial reading threshold; a bit error analyzer operative, for at least one current logical page, to generate bit error characterizing information regarding at least one corresponding bit error within at least

one cell representing at least a logical portion of at least one successfully reconstructed previous logical page; and a bit error-based threshold generator operative to compute at least one row-specific reading threshold based on the bit error characterizing information and on a previous threshold initially comprising the initial threshold and subsequently
5 comprising a row-specific reading threshold computed for a successfully reconstructed previous logical page; and a flash memory cell reader operative to read at least a portion of the current logical page using the at least one row-specific reading threshold.

Further provided, in accordance with yet another embodiment of the present invention, is a system for using flash memory to store data, the system comprising
10 apparatus for writing in flash memory operative to write at least one page of data to the flash memory; a bit error characterizing reader operative to read the at least one page of data from the flash memory using a set of reading thresholds, including generating bit error characterizing information regarding at least one corresponding bit error within at least one cell representing at least a logical portion of at least one successfully
15 reconstructed previous logical page; and a bit error-based controller operative to control the flash memory so as to take into account the bit error characterizing information.

Any suitable processor, display and input means may be used to process, display, store and accept information, including computer programs, in accordance with some or all of the teachings of the present invention, such as but not limited to a conventional
20 personal computer processor, workstation or other programmable device or computer or electronic computing device, either general-purpose or specifically constructed, for processing; a display screen and/or printer and/or speaker for displaying; machine-readable memory such as optical disks, CDRoms, magnetic-optical discs or other discs; RAMs, ROMs, EPROMs, EEPROMs, magnetic or optical or other cards, for storing, and
25 keyboard or mouse for accepting. The term "process" as used above is intended to include any type of computation or manipulation or transformation of data represented as physical, e.g. electronic, phenomena which may occur or reside e.g. within registers and /or memories of a computer.

The above devices may communicate via any conventional wired or wireless
30 digital communication means, e.g. via a wired or cellular telephone network or a computer network such as the Internet.

The apparatus of the present invention may include, according to certain embodiments of the invention, machine readable memory containing or otherwise storing a program of instructions which, when executed by the machine, implements some or all of the apparatus, methods, features and functionalities of the invention shown and described herein. Alternatively or in addition, the apparatus of the present invention may include, according to certain embodiments of the invention, a program as above which may be written in any conventional programming language, and optionally a machine for executing the program such as but not limited to a general purpose computer which may optionally be configured or activated in accordance with the teachings of the present invention.

The embodiments referred to above, and other embodiments, are described in detail in the next section.

Any trademark occurring in the text or drawings is the property of its owner and occurs herein merely to explain or illustrate one example of how an embodiment of the invention may be implemented.

Unless specifically stated otherwise, as apparent from the following discussions, it is appreciated that throughout the specification discussions, utilizing terms such as, "processing", "computing", "estimating", "selecting", "ranking", "grading", "calculating", "determining", "generating", "reassessing", "classifying", "generating", "producing", "stereo-matching", "registering", "detecting", "associating", "superimposing", "obtaining" or the like, refer to the action and/or processes of a computer or computing system, or processor or similar electronic computing device, that manipulate and/or transform data represented as physical, such as electronic, quantities within the computing system's registers and/or memories, into other data similarly represented as physical quantities within the computing system's memories, registers or other such information storage, transmission or display devices.

BRIEF DESCRIPTION OF THE DRAWINGS

Certain embodiments of the present invention are illustrated in the following drawings:

5 Fig. 1 is a simplified block diagram of a flash memory system constructed and operative in accordance with certain embodiments of the present invention;

 Fig. 2 is a simplified functional block diagram illustration of the bit-error analyzing controller 102 of Fig. 1, according to certain embodiments of the present invention;

10 Fig. 3 is a theoretical graph of voltage distributions conditional on program levels which is useful in understanding certain embodiments of the present invention;

 Fig. 4A - 4C, taken together, are a diagram depicting mapping from data bits to program levels and threshold crossover errors which is useful in understanding certain embodiments of the present invention;

15 Figs. 5A - 5B, taken together, form a simplified flowchart illustration of a method for correcting reading thresholds by tracking bit error patterns, which method may for example be performed by the system of Figs. 1 - 2, the method being operative according to certain embodiments of the present invention;

 Fig. 6 is a simplified flowchart illustration of a method for performing the "bit error to threshold error" step in Figs. 5A - 5B for an MSB page, the method identifying, for each bit error, a reading threshold associated therewith and a direction thereof;

20 Fig. 7 is a simplified flowchart illustration of a method for performing the "bit error to threshold error" step in Figs. 5A - 5B for a CSB page, assuming, which of course need not be the case, that the cells in each page are 3-level cells (i.e. assuming for simplicity that there is only one CSB page), the method identifying, for each bit error, a reading threshold associated therewith and a direction thereof;

25 Figs. 8A - 8B, taken together, form a simplified flowchart illustration of a method for performing the "bit error to threshold error" step in Figs. 5A - 5B for an LSB page, the method identifying, for each bit error, a reading threshold associated therewith and a direction thereof;

30

Fig. 9 is a simplified flowchart illustration of a method for performing the threshold updating step in Figs. 5A – 5B for either an MSB, CSB, or an LSB page;

Fig. 10 is a simplified flowchart illustration of a method for read disturb identification by tracking bit error patterns, the method being operative according to certain embodiments of the present invention;

Fig. 11 is a simplified flowchart illustration of a modification of the method of Figs. 5A – 5B in which tracking activation is diluted;

Fig. 12 is a simplified flowchart illustration of a method for accessing the page-to-row lookup table corresponding to the mapping type;

Fig. 13 is a table comprising a mapping between logical pages and physical pages which is useful in understanding certain embodiments of the present invention;

Fig. 14 is a table comprising another mapping between logical pages and physical pages which is useful in understanding certain embodiments of the present invention;

Fig. 15 is a look-up-table based on the mapping in Fig. 13 which associates for each page index the corresponding row index where the logical page resides, and which is useful in understanding certain embodiments of the present invention;

Fig. 16 is a look-up-table based on the mapping in Fig. 14 which associates for each page index the corresponding row index where the logical page resides, and which is useful in understanding certain embodiments of the present invention;

Fig. 17 is a simplified flowchart illustration of a modification of the method of Figs. 5A – 5B in which tracking activation is conditional, the method being operative according to certain embodiments of the present invention;

Fig. 18 is a generalized flowchart illustration of a method of operation of the system of Figs. 1 – 2, the method being operative according to certain embodiments of the present invention; and

Fig. 19 is a simplified flowchart illustration of a method for using flash memory to store data, the method being operative in accordance with certain embodiments of the present invention.

DETAILED DESCRIPTION OF CERTAIN EMBODIMENTS

In the present specification, the terms "row" and "column" as used herein are intended to include rows of cells and columns of cells, respectively and are not
5 references to sub-divisions of a logical page.

The term "MSB" as used herein is intended to include the bit which is programmed into a multi-level cell, storing several bits, first. The term "LSB" as used herein is intended to include the bit which is programmed into the multi-level cell, last. The term "CSB" as used herein is intended to include the bit which is programmed into a
10 3-level cell, storing 3 bits, second, i.e. after the MSB and before the LSB. It is appreciated that more generally, e.g. if the multi-level cell stores 4 or more levels, there are more than one CSBs and use of the term "CSB" herein, which implies that the cell is a 3-level cell, is merely by way of example and is not intended to be limiting.

A logical page as used herein is intended to include a set of bytes which is
15 meaningful to an application. The location of a logical page in memory is termed herein a physical page. This location may comprise certain cells in their entirety, or, more commonly, may comprise only one or some bits within certain cells. The locations of each of a logical sequence of logical pages (page 0, page 1, page 2,...) within memory is pre-determined by a suitable mapping scheme mapping logical pages into the bits of the
20 cells of a particular erase sector (block) in flash memory.

"Successfully reconstructed " as used herein is intended to include situations in which, using error correction code, the original logical page has been reconstructed generally satisfactorily, e.g., typically, that the logical page has been read, using reading thresholds, has undergone error correction as appropriate and has successfully passed its
25 CRC (cyclic redundancy check) criterion.

"Bit errors" as used herein is intended to include those errors found in the physical page corresponding to a logical page, which typically are corrected using ECC (error correction code) such that the page is successfully reconstructed despite these errors.

The terms "reading threshold" and "detection threshold" are used generally
30 interchangeably.

Reference is now made to Fig. 1 which is a simplified block diagram of a flash memory system constructed and operative in accordance with certain embodiments of the present invention. As shown, the flash memory system of Fig. 1 includes a host or outside application 100 which interfaces, via an interface controller 102, with a flash memory device 105. An internal microcontroller 110 typically manages the functional units of the flash memory device 105. The storage portion of the flash memory device includes one or more typically many erase sectors 120 each storing one or more typically many physical pages 130 each including one or more typically many cells 140 having more than one possible state such that logical values may be stored therein. Erasing circuitry 150 is provided to erase data from cells, writing circuitry 160 writes data into cells, and reading circuitry 170 reads data from cells.

A particular feature of the system shown in Fig. 1 by way of example is the bit-error analyzing functionalities of the I/F controller 102 and/or of the internal microcontroller 110.

Fig. 2 is a simplified functional block diagram illustration of the bit-error analyzing controller 102 of Fig. 1, according to certain embodiments of the present invention. As shown, the controller 102 may include a bit error characterization block 200 which provides information regarding bit errors' characteristics, particularly joint characteristics, to application functionalities such as but not limited to a read threshold computation unit 210 and/or a read-disturb event finder 220. Optionally, a buffer 230 is provided which is useful for reading MSB and CSB pages as described in detail herein. The buffer 230 serves the characterizer of bit errors 200 which in turn serves read threshold computation unit 210 and/or read-disturb event finder 220.

The system of Figs. 1 – 2 is particularly suitable for generating a set of at least one row-specific reading threshold for reading at least portions of pages of data within an erase sector of a flash memory device. This method may comprise some or all of the following steps, as shown in Fig. 18:

Step 3010: predetermining at least one initial reading threshold

Step 3020: performing steps 3030 and 3040 for each of at least one current logical pages.

Step 3030: generating bit error characterizing information regarding at least one corresponding bit error within at least one cell representing at least a logical portion of at least one successfully reconstructed previous logical page.

Step 3040: computing at least one row-specific reading threshold based on the bit error characterizing information and on a previous threshold initially comprising the initial threshold and subsequently comprising a row-specific reading threshold computed for a successfully reconstructed previous logical page.

Step 3050: When steps 3030 and 3040 have been performed for a set of current logical pages, step 3050 is performed, involving reading at least a portion of the current logical page using the at least one row-specific reading threshold.

Conventionally, flash memory devices store information as charge in "cells", each made of either a floating gate transistor or an NROM transistor. In single-level cell (SLC) devices, each cell stores only one bit of information. Multi-level cell (MLC) devices can store more than one bit per cell by choosing between multiple levels of electrical charge to apply to the floating gates of their cells. The amount of charge (also known as charge level) is then measured by a detector, by comparing the voltage of the transistor gate (also known as charge level and denoted V_T) to a decision threshold voltage (also known as charge level boundary point and denoted V_D). The amount of charge is then used to determine the programmed level (logical value) of the cell. Due to inaccuracies during the programming procedure and charge loss due to time and temperature (also known as retention), the measured levels suffer from a random distortion. Prior art Fig. 3 illustrates an example of the eight separate probability distributions of a cell which can be programmed with one of eight corresponding program levels (111, 110, 100, 101, 001, 000, 010, and 011, respectively). For each distribution curve, the Y-axis represents the probability that the cell is programmed to the corresponding level, given the value of the charge level V_T (represented by the x- axis).

A particular feature of certain embodiments of the present invention, is that changes in the distributions of the programming lobes illustrated in Fig. 3 are tracked between pages, using a suitable indicator of such changes such as bit error characteristics including associated threshold and direction of each bit error, all as described in detail below.

The cell's programmed level may be determined using several methods. One method is to apply a voltage to the cell's gate and measure if the cell conducts current. The cell has a certain threshold voltage such that if voltage above that threshold is applied to the gate, the gate will conduct. Below that threshold voltage the gate will not conduct current (or will conduct a small amount of current, below a certain demarcation level). As the amount of charge in the cell changes this threshold voltage, the charge may be inferred by determining at which voltage the cell starts to conduct current. Thus, the programmed level is determined by iteratively applying different voltages to the gate and measuring whether the cells conduct or not. Another method is based on the fact that when applying a voltage above the threshold voltage, the cell conducts current and the amount of current depends on the difference between the applied voltage and the threshold voltage. As the threshold voltage changes as a function of the amount of charge in the cell, the programmed level may be inferred by measuring the current going through the cell.

Thus, the programmed level may be obtained by simultaneously comparing the conducted current with a given set of fixed currents distinguishing between all programmed levels. In other words, each cell's programmed level is determined by simultaneously comparing the V_T level against several decision threshold levels (detection thresholds). For example, if there are eight possible programmed levels, the cell's V_T is simultaneously compared against seven decision threshold levels which divide the voltage axis into eight regions, as demonstrated in Fig. 3.

In general, if there are L possible program levels, then $L-1$ decision threshold levels are employed. As the probability distributions extend beyond the decision threshold levels, there is a probability of detection error, i.e. detecting the wrong program level. In order to minimize the detection error, one wishes to set the decision threshold levels optimally. The optimal placement of the decision thresholds levels in terms of minimizing the detection error probability generally depends on the probability distribution associated with the V_T level of the cells. The statistical behavior of the cells' V_T level can be approximated by Gaussian distributions. The optimal placement of the detection threshold for the Gaussian case is a known function of the means and standard deviations (STDs) of the Gaussian distributions. In other words, knowledge of good

decision thresholds (assuming the Gaussian assumption is correct) is possible if the means and STDs of the cells' V_T distributions are known.

Since the means and STDs of the the probability distributions change as a result of cycling and retention, it is not clear how to set the decision thresholds when attempting to read a given page storing information. Setting the decision thresholds to the optimal position corresponding to a fresh device might show acceptable performance only if the page was recently programmed and not retained for a significant amount of time. Similarly, setting the decision thresholds to fit a device which was cycled 1000 times and retained for 10 years might not work, i.e. cause too many detection errors, if the page in question was recently written to a non-cycled flash device.

In some applications, this situation calls for a training stage in which the flash device's controller learns the "state" of the page/block and determines a set of decision thresholds which will yield preferably as little detection errors as possible when used to read the page.

Since some variations exist in the statistics of the program levels between different blocks within one flash device, and between different pages within one erase sector, it is appreciated that one cannot hope to find a single choice of thresholds which will be appropriate, i.e. yield a sufficiently high uncoded bit error rate (UBER), for all the pages in the flash device. One solution is to use the training process for every page to be read, or for every page for which it is suspected that the detection thresholds previously obtained are not sufficiently accurate. Depending on the complexity of the training process, such a solution might be too costly, and might jeopardize the feasibility of certain flash applications.

Certain embodiments of this invention include a way for adapting the detection thresholds from one page to the next in such a way which considerably limits the number of training operations employed to read an entire population of blocks of a flash device. The adaptation is done either without or with very little additional reading operations from the flash device. In certain embodiments, the adaptation is done based on the bit error pattern obtained after successful decoding of the error correcting code (ECC).

The embodiment described above also has applications for coping with read disturb. Read disturb is a situation where the voltages applied to the row and column of a target

memory floating gate cell in order to perform the read operation, cause unwanted programming to erased cells which lie on the same column as the target cell. This unwanted programming accumulates over time after successive read operations to the degree of causing cells in the erased state to be in programmed states.

5 Certain embodiments of this invention use the bit error patterns to identify a block which is suffering from a severe read disturb and if left unchanged might reach a state where the data stored in it becomes undetectable.

Also described herein are variations on the above embodiments which account for performance trade-offs.

10 According to certain embodiments of the present invention, tracking of the changes in the detection thresholds which occur between successive pages in a flash array is provided. The tracking is performed by analyzing the asymmetry between errors which occur due to cells' V_T levels crossing the detection thresholds from left to right and errors which occur due to cells' V_T levels crossing the detection thresholds from right to left.

15 The detection thresholds are modified according to the sign and magnitude of the difference between the two types of threshold errors. The tracking operation guarantees that detection thresholds adapt to the changes in the threshold voltage distributions without the need to perform multiple training procedures which may be costly in terms of flash read operations.

20 Certain embodiments of this invention seek to perform the above functionalities in a manner which saves processing time e.g. by performing the tracking procedure only for certain rows/pages within an erase sector, and/or by performing the tracking procedure only when the total number of errors increases drastically with respect to previous rows/pages. Certain embodiments of this invention seek to perform the above

25 functionalities in a manner which saves memory requirements e.g. by performing read operations from the flash "on the fly" in order to associate bit errors to the threshold errors.

Certain embodiments of this invention seek to identify erase sectors which suffer from read disturb. This is done by identifying erased cells which have become

30 programmed due to repetitive read operations. A threshold error association mechanism is used here to identify programming of erased cells by checking the number of directed

threshold errors from left to right with respect to the detection threshold closest to the erased level.

By way of example, consider a floating gate flash memory device where each cell has 8 possible charge levels (or program levels), thus storing 3 bits per cell. That said, certain
 5 embodiments of this invention are also applicable to NROM flash devices and/or flash devices with less or more charge levels. The page to be read has been written to a flash device after an unknown number of program/erase cycles, and the data in the page was retained for an unknown period of time. Denote the number of cells in the page by N_c . Denote the means of the cells' V_T level distributions by $\mu_1, \mu_2, \dots, \mu_8$, where the
 10 index 1 corresponds to the erase level, index 2 corresponds to the program level closest to the erased state, and so on. Furthermore, denote by $\sigma_1, \sigma_2, \dots, \sigma_8$ the standard deviations (STDs) of these distributions, respectively. Finally, denote by $T_1, T_2, \dots, T_7$ the detection thresholds which are to be used for reading the page. An approximation to the optimal detection thresholds is given by the following formula:

$$T_k = \frac{\sigma_{k+1}\mu_k + \sigma_k\mu_{k+1}}{\sigma_k + \sigma_{k+1}}, k = 1, 2, \dots, 7.$$

Tracking of Detection Thresholds according to certain embodiments of the present invention is now described in detail.

In many occasions, the pages of one block are read sequentially. When examining the threshold voltage distributions of the pages in one block, it is observed that some
 20 variations occur from page to page. In some situations, the total variations across the rows of a single block can be comparatively large. This implies that employing the same detection thresholds for reading all the pages of the block will result in too many errors, which the error correcting code will not be able to correct.

One solution is to perform a training procedure for every row in the block. This
 25 approach might be less favorable due to the potential delay inherent to the training process. A low cost alternative is described herein which need not employ any extra reading operations from the flash other than those which actually read the page.

In the example shown and described herein, the mapping between data bits and cell program levels is depicted in prior art Fig. 4. Each combination of bits corresponding to
 30 a specific selection of MSB, CSB, and LSB is mapped to one of eight program levels as

shown in Fig. 4. The dashed vertical lines mark the reading thresholds. In order to read the MSB, a single threshold is used. Cells which conduct current when this threshold is applied to their gate are interpreted as having their MSB equal to 1, while the remaining cells are identified as having their MSB equal 0. The reading of the CSB employs two thresholds. Cells which conduct when the left threshold is applied to them and cells which do not conduct (even) if the right threshold is applied to them are identified as having their CSB equal 1, while the cells which do not conduct when the left threshold is applied to them but conduct current when the right threshold is applied to them are interpreted as having their CSB equal 0. For the LSB, four thresholds are employed. Cells whose V_T lies between T_1 and T_2 or between T_3 and T_4 are interpreted as having their LSB equal 0, while for the remaining cells, the LSB is read as 1.

The curved arrows above each detection threshold designate errors resulting from threshold voltages of some cells appearing in the detection regions of their neighboring cells. For example, assume a cell was programmed to level 3, but due to programming error and/or retention effects, the actual threshold voltage at the time the cell is to be read is just to the left of T_1 in the second graph of Fig. 4. When T_1 is applied to this cell, it will conduct current and its CSB bit will be erroneously interpreted as a 1 even though its CSB was 0. Such an error event is marked by the bold solid curved arrow above T_1 in the second graph of Fig. 4. Similarly, the remaining dashed curved arrows designate threshold errors from left to right, while the solid arrows mark errors from right to left. These threshold errors are termed herein "directed threshold errors".

The tracking process is based on the assumption that when the thresholds are not optimally placed, e.g. due to the shifting of the means of the program levels between successive rows, an asymmetry is present between the errors from left to right and the errors from right to left.

The tracking process may proceed as depicted in Figs. 5A – 5B. It is appreciated that $T_1 - T_4$ in Figs. 5A – 5B are defined by Fig. 4. Once a page within a block of a flash device is successfully decoded, the corrected page bits are passed to the tracking block along with the location of the erroneous bits, the page bit type (MSB, CSB, or LSB), and the set of thresholds which was used to read the page. If the page is an MSB page, only

one threshold is supplied. If the page is a CSB page, 2 thresholds are given, and finally, tracking of an LSB page uses knowledge of four detection thresholds.

Next, the process maps each bit error to a directed threshold error event and updates an appropriate counter. For each threshold, two counters are used, one counting threshold errors from left to right, and another which counts errors from right to left. Once all the errors in the page are processed, the corresponding thresholds are corrected in the appropriate direction as a function of the asymmetry in the number of threshold errors. In one embodiment, the difference between the threshold errors from left to right and from right to left is computed for every threshold, and according to the difference's sign and magnitude an appropriate quantity is either added to or subtracted from the original threshold. The procedure described in Figs. 5A – 5B is repeated for every page which is successfully decoded.

The way in which the bit errors are mapped to threshold error events depends on the type of page which is being tracked. For example, assuming here and throughout the present specification, that standard gray level coding is used, the mapping may be as shown in Figs. 6 – 8. Specifically, Fig. 6 is a simplified flowchart illustration of a method for performing the "bit error to threshold error" step in Figs. 5A – 5B for an MSB page, the method identifying, for each bit error, a reading threshold associated therewith and a direction thereof.

Fig. 7 is a simplified flowchart illustration of a method for performing the "bit error to threshold error" step in Figs. 5A – 5B for a CSB page, assuming that the cells in each page are 3-level cells (i.e. assuming for simplicity that there is only one CSB page), the method identifying, for each bit error, a reading threshold associated therewith and a direction thereof.

Figs. 8A – 8B, taken together, form a simplified flowchart illustration of a method for performing the "bit error to threshold error" step in Figs. 5A – 5B for an LSB page, the method identifying, for each bit error, a reading threshold associated therewith and a direction thereof.

It is appreciated that in the case of an MSB page, as shown in Fig. 6, each bit error of the form $0 \rightarrow 1$ corresponds to a threshold error from right to left, and each bit error of the form $1 \rightarrow 0$ is a result of a threshold error from left to right. As shown in Fig. 7, in the

case of a CSB page in a certain physical row, the mapping depends on the corresponding bit in the MSB page residing in the same physical row. For instance, a bit error event of the form $0 \rightarrow 1$ can be interpreted as a right-to-left threshold error event of threshold T_1 , if the MSB bit equals 1, or as a left-to-right threshold error event of threshold T_2 , if the MSB bit equals 0. Similarly, as shown in Figs. 8A – 8B, the mapping of bit errors to threshold error events for an LSB page typically comprises using knowledge of the MSB and CSB bits in the corresponding cells residing in the same physical row. Depending on the order in which the pages are written to and read from the erase sector, and depending on the mapping between logical pages and physical pages (and rows), a buffer may be used in order to store the values of the MSB and CSB pages for future tracking of CSB and LSB pages.

For instance, if the LSB page of a certain row is always written d pages after the MSB page of the same row, a buffer of length at least d may be used to guarantee that upon decoding of the LSB page, the MSB page of the same row is available.

Identification of Read Disturbs according to certain embodiments of the present invention is now described in detail.

In flash memories, the read procedure involves the application of certain voltages to the word line corresponding to the row address of the read cell as well as the bit line corresponding to the column address of the cell. These voltages are of the same kind as those which are applied during programming, only lower in magnitude. The voltage applied to the bit line may induce a small charge transfer to the floating gate. While the charge transfer which occurs in any individual read operation is limited due to the relatively low voltage applied to the bit line, the cumulative effect of many ($\sim 100,000$) read operations might cause a significant charge increase in the floating gate. This phenomenon may cause cells which are in the erased state and which share the same bit line as the cell being read to become programmed. Furthermore, since all the cells along a bit line are affected by this disturb, the excessive reading of even a single page might have a deleterious effect on the entire block.

While it is possible to identify such a situation by maintaining counters for each block in the flash device and checking if for a particular block the number of read

operations exceeded a certain threshold, such an approach involving a multitude of counters might be prohibitively complex in some applications.

According to certain embodiments of the present invention, a determination is made as to whether a given block is reaching the state where the excessive read
5 operations from it are about to render the data undetectable, by using the ingredients of the tracking process which was described above. Specifically, a determination may be made as to whether the cells within a particular page which are in the erased state have begun shifting to a programmed state. This can be done by associating the bit errors to their corresponding threshold errors and checking if the number of threshold errors from
10 left to right with respect to the detection threshold closest to the erase state has increased beyond some prescribed threshold. Once the above threshold is crossed, proper measures can be taken in order to prevent the data stored in the block from being distorted beyond repair. For instance, the content of the block can be copied to another block, and the block which was identified as suffering from read disturb can be erased. An example of
15 this procedure is shown in Fig. 10.

Any suitable action may be initiated if a read-disturb phenomenon has been detected. To give one possible example among many suitable remedial actions, the content of the block can be copied to another available block, and the block suffering from read disturb can be erased and used subsequently as an available block.

20 Performance trade-off considerations according to certain embodiments of the present invention are now described in detail.

In order to implement the tracking of detection thresholds as described hereinabove and the identification of blocks which suffer from read disturb also described hereinabove some previously read pages may be kept in appropriate buffers. The length of the buffer
25 may depend on the particular order in which logical pages are mapped to physical pages within an erase sector. In some applications, the buffer might impose limitations on the scope of these applications.

Several methods by which memory consumption stemming from the buffer may be reduced, are described below. It is appreciated that the presentation of these in the context
30 of the tracking application described above is merely by way of example and the applicability of these methods is not limited to the tracking application described above.

Dilution of Tracking Activation according to certain embodiments of the present invention is now described in detail. In some applications, the voltage variation across the rows of a block are such which employ only a few threshold corrections within the block. In the tracking method described above, the procedure for tracking the detection
5 thresholds is activated for every page in the block. This implies that most of the times, the tracking is activated in vain.

In certain embodiments of the present invention, the tracking is employed only on pages which lie in rows which are multiples of a certain integer values (e.g. 2, 3). The advantages of this approach are twofold. First, the processing of the bit errors is
10 circumvented in some of the rows in the block, leading to saving in processing times. Second, the MSB and CSB pages which belong to the untracked rows need not be saved in the buffer, leading to savings in the system's memory requirements. An example of this procedure is shown in Fig. 11.

Conditional activation of tracking according to certain embodiments of the
15 present invention is now described in detail.

In some applications, the mapping between logical pages and physical pages is such that in order to implement the tracking procedure a large number of pages is employed such as several dozen pages. It is therefore sometimes advantageous to trade-off memory resources with time resources.

20 In certain embodiments of this invention, the buffer is relinquished and replaced by occasional read operations from the flash. Based on the reasoning described above, it is expected that tracking will hardly be employed within the block. Tracking is typically employed when the distributions of the program levels have changed significantly with respect to the ones which were obtained last. Such a situation can be identified by
25 checking if the total number of errors has significantly increased with respect to the previous row or page. Only if the number of errors has risen drastically, is the tracking procedure employed, and in case of tracking a CSB or a LSB page, appropriate read operations will be performed to enable association of bit errors to threshold errors. It is assumed that the scarcity of the tracking procedures employed within one block is
30 sufficient to render the performance loss or increased time delay, due to the additional read operation, negligible.

Example implementations: Two specific implementations of the invention shown and described herein are now described, by way of example, which pertain respectively to different mappings of a sequence of logical pages numbered for convenience 0, 1, 2,... each including a multiplicity of data bytes such as 4K data bytes, into an erase block including an array of physical cells arranged in physical rows numbered for convenience 0, 1, 2,... and physical columns. Implementation 1 pertains to a mapping scheme termed Mapping 1 and described below, and Implementation 2 pertains to a mapping scheme termed Mapping 2 and described below. It is appreciated that alternatively, any other suitable mappings may be used.

Mapping 1 comprises the following mapping scheme: A sequence of logical pages is mapped into an erase block including an array of physical multi-level e.g. 3-level cells as follows:

Logical page 0 is stored in the MSBs of cells 0, 2, 4 etc. in row 0.

Logical page 1 is stored in the MSBs of cells 1, 3, 5 etc. in row 0.

Logical page 2 is stored in the MSBs of cells 0, 2, 4, etc. in row 1.

Logical page 3 is stored in the MSBs of cells 1, 3, 5, etc. in row 1.

Logical page 4 is stored in the MSBs of cells 0, 2, 4, etc. in row 2.

Logical page 5 is stored in the MSBs of cells 1, 3, 5, etc. in row 2.

Logical page 6 is stored in the MSBs of cells 0, 2, 4, etc. in row 3.

Logical page 7 is stored in the MSBs of cells 1, 3, 5, etc. in row 3.

Logical page 8 is stored in the MSBs of cells 0, 2, 4, etc. in row 4.

Logical page 9 is stored in the MSBs of cells 1, 3, 5, etc. in row 4.

Logical page 10 is stored in the CSBs of cells 0, 2, 4, etc. in row 0.

Logical page 11 is stored in the CSBs of cells 1, 3, 5, etc. in row 0.

Logical page 12 is stored in the MSBs of cells 0, 2, 4, etc. in row 5.

Logical page 13 is stored in the MSBs of cells 1, 3, 5, etc. in row 5.

Logical page 14 is stored in the CSBs of cells 0, 2, 4, etc. in row 1.

Logical page 15 is stored in the CSBs of cells 1, 3, 5, etc. in row 1.

Logical pages 0, 2, etc. are termed herein "even pages" whereas pages 1, 3, etc. are termed herein "odd pages". For the case of erase sectors comprising 192 logical pages

mapped to 32 physical rows, the mapping of pages to cells is listed in its entirety in Fig. 14.

Example implementation 1 is now described. As for tracking an MSB page, the implementation is not dependent on the mapping and is depicted in Fig. 6. As for tracking a CSB page, e.g. as shown in Fig. 7, the step 705 comprises looking in the table appearing in Fig. 16, and finding the row in which the page resides. Then, the row number is used to access the table in Fig. 14 and obtain the page number of the corresponding MSB page residing in the same row. The page itself is located in the buffer appearing in Fig. 2.

As for tracking an LSB page e.g. as shown in Figs. 8A – 8B, the step 810 comprises looking in the table appearing in Fig. 16, and finding the row in which the page resides. Then, the row number is used to access the table in Fig. 14 and obtain the page numbers of the corresponding MSB and CSB pages residing in the same row. The pages themselves are located in the buffer appearing in Fig. 2.

Mapping 2 comprises the following mapping scheme:

A sequence of logical pages is mapped into an erase block including an array of physical multi-level e.g. 3-level cells as follows:

Logical page 0 is stored in the MSBs of cells 0, 2, 4 etc. in row 0.

Logical page 1 is stored in the MSBs of cells 1, 3, 5 etc. in row 0.

Logical page 2 is stored in the CSBs of cells 0, 2, 4, etc. in row 0.

Logical page 3 is stored in the CSBs of cells 1, 3, 5, etc. in row 0.

Logical page 4 is stored in the LSBs of cells 0, 2, 4, etc. in row 0.

Logical page 5 is stored in the LSBs of cells 1, 3, 5, etc. in row 0.

Logical page 6 is stored in the MSBs of cells 0, 2, 4, etc. in row 1.

Logical page 7 is stored in the MSBs of cells 1, 3, 5, etc. in row 1.

Logical pages 0, 2, etc. are termed herein "even pages" whereas pages 1, 3, etc. are termed herein "odd pages". For the case of erase sectors comprising 192 logical pages mapped to 32 physical rows, the mapping of pages to cells is listed in its entirety in Fig. 13.

Example implementation 2 is now described. As for tracking an MSB page, the implementation is not dependent on the mapping and is depicted in Fig. 6. As for tracking

a CSB page e.g. as shown in Fig. 7, step 705 comprises looking in the table appearing in Fig. 15, and finding the row in which the page resides. Then, the row number is used to access the table in Fig. 13 and obtain the page number of the corresponding MSB page residing in the same row. The page itself is located in the buffer appearing in Fig. 2. As
5 for tracking an LSB page e.g. as shown in Figs. 8A – 8B, step 810 comprises looking in the table appearing in Fig. 15, and finding the row in which the page resides. Then, the row number is used to access the table in Fig. 13 and obtain the page numbers of the corresponding MSB and CSB pages residing in the same row. The pages themselves are located in the buffer appearing in Fig. 2.

10 Fig. 18 is a generalized flowchart illustration of a method of operation of the system of Figs. 1 – 2, the method being operative according to certain embodiments of the present invention.

The method of Fig. 18 typically comprises some or all of the following steps, suitably ordered e.g. as shown:

15 Step 3010: predetermine at least one initial reading threshold.

Step 3020: perform steps 3030 and 3040 for each of at least one current logical pages.

Step 3030: generate bit error characterizing information regarding at least one corresponding bit error within at least one cell representing at least a logical portion of at
20 least one successfully reconstructed previous logical page.

Step 3040: compute at least one row-specific reading threshold based on the bit error characterizing information and on a previous threshold initially comprising the initial threshold and subsequently comprising a row-specific reading threshold computed for a successfully reconstructed previous logical page.

25 Step 3050: When steps 3030 and 3040 have been performed for a set of current logical pages, step 3050 is performed, involving reading at least a portion of the current logical page using the at least one row-specific reading threshold.

Fig. 19 is a simplified flowchart illustration of a method for using flash memory to store data, the method being operative in accordance with certain embodiments of the
30 present invention. The method of Fig. 19 typically comprises some or all of the following steps, suitably ordered e.g. as shown:

Step 3110: Write at least one page of data to flash memory

Step 3120: Read at least one page of data from flash memory using a set of reading thresholds, including generating bit error characterizing information regarding at least one corresponding bit error within at least one cell representing at least a logical
5 portion of at least one successfully reconstructed previous logical page

Step 3130: Subsequently, use flash memory so as to take into account bit error characterizing information.

It is appreciated that software components of the present invention including programs and data may, if desired, be implemented in ROM (read only memory) form
10 including CD-ROMs, EPROMs and EEPROMs, or may be stored in any other suitable computer-readable medium such as but not limited to disks of various kinds, cards of various kinds and RAMs. Components described herein as software may, alternatively, be implemented wholly or partly in hardware, if desired, using conventional techniques.

Included in the scope of the present invention, inter alia, are electromagnetic
15 signals carrying computer-readable instructions for performing any or all of the steps of any of the methods shown and described herein, in any suitable order; machine-readable instructions for performing any or all of the steps of any of the methods shown and described herein, in any suitable order; program storage devices readable by machine, tangibly embodying a program of instructions executable by the machine to perform any
20 or all of the steps of any of the methods shown and described herein, in any suitable order; a computer program product comprising a computer useable medium having computer readable program code having embodied therein, and/or including computer readable program code for performing, any or all of the steps of any of the methods shown and described herein, in any suitable order; any technical effects brought about by
25 any or all of the steps of any of the methods shown and described herein, when performed in any suitable order; any suitable apparatus or device or combination of such, programmed to perform, alone or in combination, any or all of the steps of any of the methods shown and described herein, in any suitable order; information storage devices or physical records, such as disks or hard drives, causing a computer or other device to be
30 configured so as to carry out any or all of the steps of any of the methods shown and described herein, in any suitable order; a program pre-stored e.g. in memory or on an

information network such as the Internet, before or after being downloaded, which embodies any or all of the steps of any of the methods shown and described herein, in any suitable order, and the method of uploading or downloading such, and a system including server/s and/or client/s for using such; and hardware which performs any or all of the
5 steps of any of the methods shown and described herein, in any suitable order, either alone or in conjunction with software.

Certain operations are described herein as occurring in the microcontroller internal to a flash memory device. Such description is intended to include operations which may be performed by hardware which may be associated with the microcontroller
10 such as peripheral hardware on a chip on which the microcontroller may reside. It is also appreciated that some or all of these operations, in any embodiment, may alternatively be performed by the external, host-flash memory device interface controller including operations which may be performed by hardware which may be associated with the interface controller such as peripheral hardware on a chip on which the interface
15 controller may reside. Finally it is appreciated that the internal and external controllers may each physically reside on a single hardware device, or alternatively on several operatively associated hardware devices.

Any data described as being stored at a specific location in memory may alternatively be stored elsewhere, in conjunction with an indication of the location in
20 memory with which the data is associated. For example, instead of storing page- or erase-sector-specific information within a specific page or erase sector, the same may be stored within the flash memory device's internal microcontroller or within a microcontroller interfacing between the flash memory device and the host, and an indication may be stored of the specific page or erase sector associated with the cells.

It is appreciated that the teachings of the present invention can, for example, be
25 implemented by suitably modifying, or interfacing externally with, flash controlling apparatus. The flash controlling apparatus controls a flash memory array and may comprise either a controller external to the flash array or a microcontroller on-board the flash array or otherwise incorporated therewithin. Examples of flash memory arrays
30 include Samsung's K9XXG08UXM series, Hynix' HY27UK08BGFM Series, Micron's MT29F64G08TAAWP or other arrays such as but not limited to NOR or phase change

memory. Examples of controllers which are external to the flash array they control include STMicroelectronics's ST7265x microcontroller family, STMicroelectronics's ST72681 microcontroller, and SMSC's USB97C242, Traspan Technologies' TS-4811, Chipsbank CBM2090/CBM1190. Example of commercial IP software for Flash file systems are: Denali's Spectra™ NAND Flash File System, Aarsan's NAND Flash Controller IP Core and Arasan's NAND Flash File System. It is appreciated that the flash controller apparatus need not be NAND-type and can alternatively, for example, be NOR-type or phase change memory-type.

Flash controlling apparatus, whether external or internal to the controlled flash array, typically includes the following components: a Memory Management/File system, a NAND interface (or other flash memory array interface), a Host Interface (USB, SD or other), error correction circuitry (ECC) typically comprising an Encoder and matching decoder, and a control system managing all of the above. The present invention may for example interface with or modify, as per any of the embodiments described herein, one, some or all of the above components.

Features of the present invention which are described in the context of separate embodiments may also be provided in combination in a single embodiment. Conversely, features of the invention, including method steps, which are described for brevity in the context of a single embodiment or in a certain order may be provided separately or in any suitable subcombination or in a different order. "e.g." is used herein in the sense of a specific example which is not intended to be limiting.

CLAIMS

1. A method for generating a set of at least one row-specific reading threshold for reading at least portions of pages of data within an erase sector of a flash memory device, the method comprising:

predetermining at least one initial reading threshold;

performing the following steps for at least one current logical page:

generating bit error characterizing information regarding at least one corresponding bit error within at least one cell representing at least a logical portion of at least one successfully reconstructed previous logical page; and

computing at least one row-specific reading threshold based on said bit error characterizing information and on a previous threshold initially comprising said initial threshold and subsequently comprising a row-specific reading threshold computed for a successfully reconstructed previous logical page; and

reading at least a portion of said current logical page using said at least one row-specific reading threshold.

2. A method according to claim 1 wherein said bit error characterizing information comprises identification of a reading threshold associated with the bit error.

3. A method according to claim 1 wherein said bit error characterizing information comprises a direction of the bit error.

4. A method according to claim 1 wherein a first number of threshold errors whose direction, with respect to said reading threshold, is from left to right is compared to a second number of threshold errors whose direction, with respect to said reading threshold, is from right to left, wherein the row-specific reading threshold depends upon at least one of the sign and magnitude of the difference between said first and second numbers of threshold errors.

5. A method according to claim 1 and also comprising:
selecting a subset of rows within said erase sector; and
identifying a set of logical pages residing within said subset of rows; and
performing said generating, computing and reading for said set of logical
5 pages and for less than all pages in said erase sector.

6. A method according to claim 5 and wherein said generating, computing
and reading are performed only for said set of logical pages.

10 7. A method according to claim 1 wherein said reading thresholds are
corrected only if the number of bit errors per page is in a process of change of at least
a predetermined magnitude.

15 8. A method according to claim 7 wherein said reading thresholds are
corrected only if the difference between the number of bit errors encountered during
reconstruction of said current page and the number of bit errors occurring during
reconstruction of at least one previous page is larger than a predetermined number.

20 9. A method according to claim 1 wherein said generating is performed for
at least one CSB page residing in a row corresponding to an MSB page also residing
in said row, based at least partly on values read from said MSB page.

25 10. A method according to claim 1 wherein said generating is performed for
an LSB page residing in a row corresponding to an MSB and at least one CSB page
also residing in said row, based at least partly on values read from at least one of said
MSB and CSB pages.

30 11. A method according to claim 9 wherein said generating performed for
said CSB page is based at least partly on values read on-the-fly from said MSB page.

12. A method according to claim 10 wherein said generating performed for said LSB page is based at least partly on values read on-the-fly from at least one of said MSB and CSB pages.

5 13. A method according to claim 9 wherein said generating performed for said CSB page is based at least partly on stored values previously read from said MSB page.

10 14. A method according to claim 10 wherein said generating performed for said LSB page is based at least partly on stored values previously read from at least one of said MSB and CSB pages.

15. A method for using flash memory to store data, the method comprising:
writing at least one page of data to said flash memory;

15 reading said at least one page of data from said flash memory using a set of reading thresholds, including generating bit error characterizing information regarding at least one corresponding bit error within at least one cell representing at least a logical portion of at least one successfully reconstructed previous logical page; and

20 subsequently, using said flash memory so as to take into account said bit error characterizing information.

25 16. A method according to claim 15 wherein said bit error characterizing information comprises identification of a reading threshold which is associated with the bit error.

17. A method according to claim 15 wherein said bit error characterizing information comprises a direction of the bit error.

18. A method according to claim 15 wherein said using comprises reading at least one subsequent page of data so as to take into account said bit error characterizing information.

5 19. A method according to claim 15 wherein said using comprises detecting portions of said flash memory which suffer from read-disturb phenomenon based on said bit error characterizing information.

10 20. A method according to claim 19 wherein said detecting comprises detecting an overly large number of bit errors whose source is a reading threshold which is closest, within said set of reading thresholds, to zero voltage, and whose direction is from left to right.

15 21. A system for generating a set of at least one row-specific reading threshold for reading at least portions of pages of data within an erase sector of a flash memory device, the system comprising:

apparatus for predetermining at least one initial reading threshold;

20 a bit error analyzer operative, for at least one current logical page, to generate bit error characterizing information regarding at least one corresponding bit error within at least one cell representing at least a logical portion of at least one successfully reconstructed previous logical page; and

25 a bit error-based threshold generator operative to compute at least one row-specific reading threshold based on said bit error characterizing information and on a previous threshold initially comprising said initial threshold and subsequently comprising a row-specific reading threshold computed for a successfully reconstructed previous logical page; and

a flash memory cell reader operative to read at least a portion of said current logical page using said at least one row-specific reading threshold.


30 22. A system for using flash memory to store data, the system comprising:

apparatus for writing in flash memory operative to write at least one page of data to the flash memory;

a bit error characterizing reader operative to read said at least one page of data from said flash memory using a set of reading thresholds, including generating bit error characterizing information regarding at least one corresponding bit error within at least one cell representing at least a logical portion of at least one successfully reconstructed previous logical page; and

a bit error-based controller operative to control said flash memory so as to take into account said bit error characterizing information.

1/20

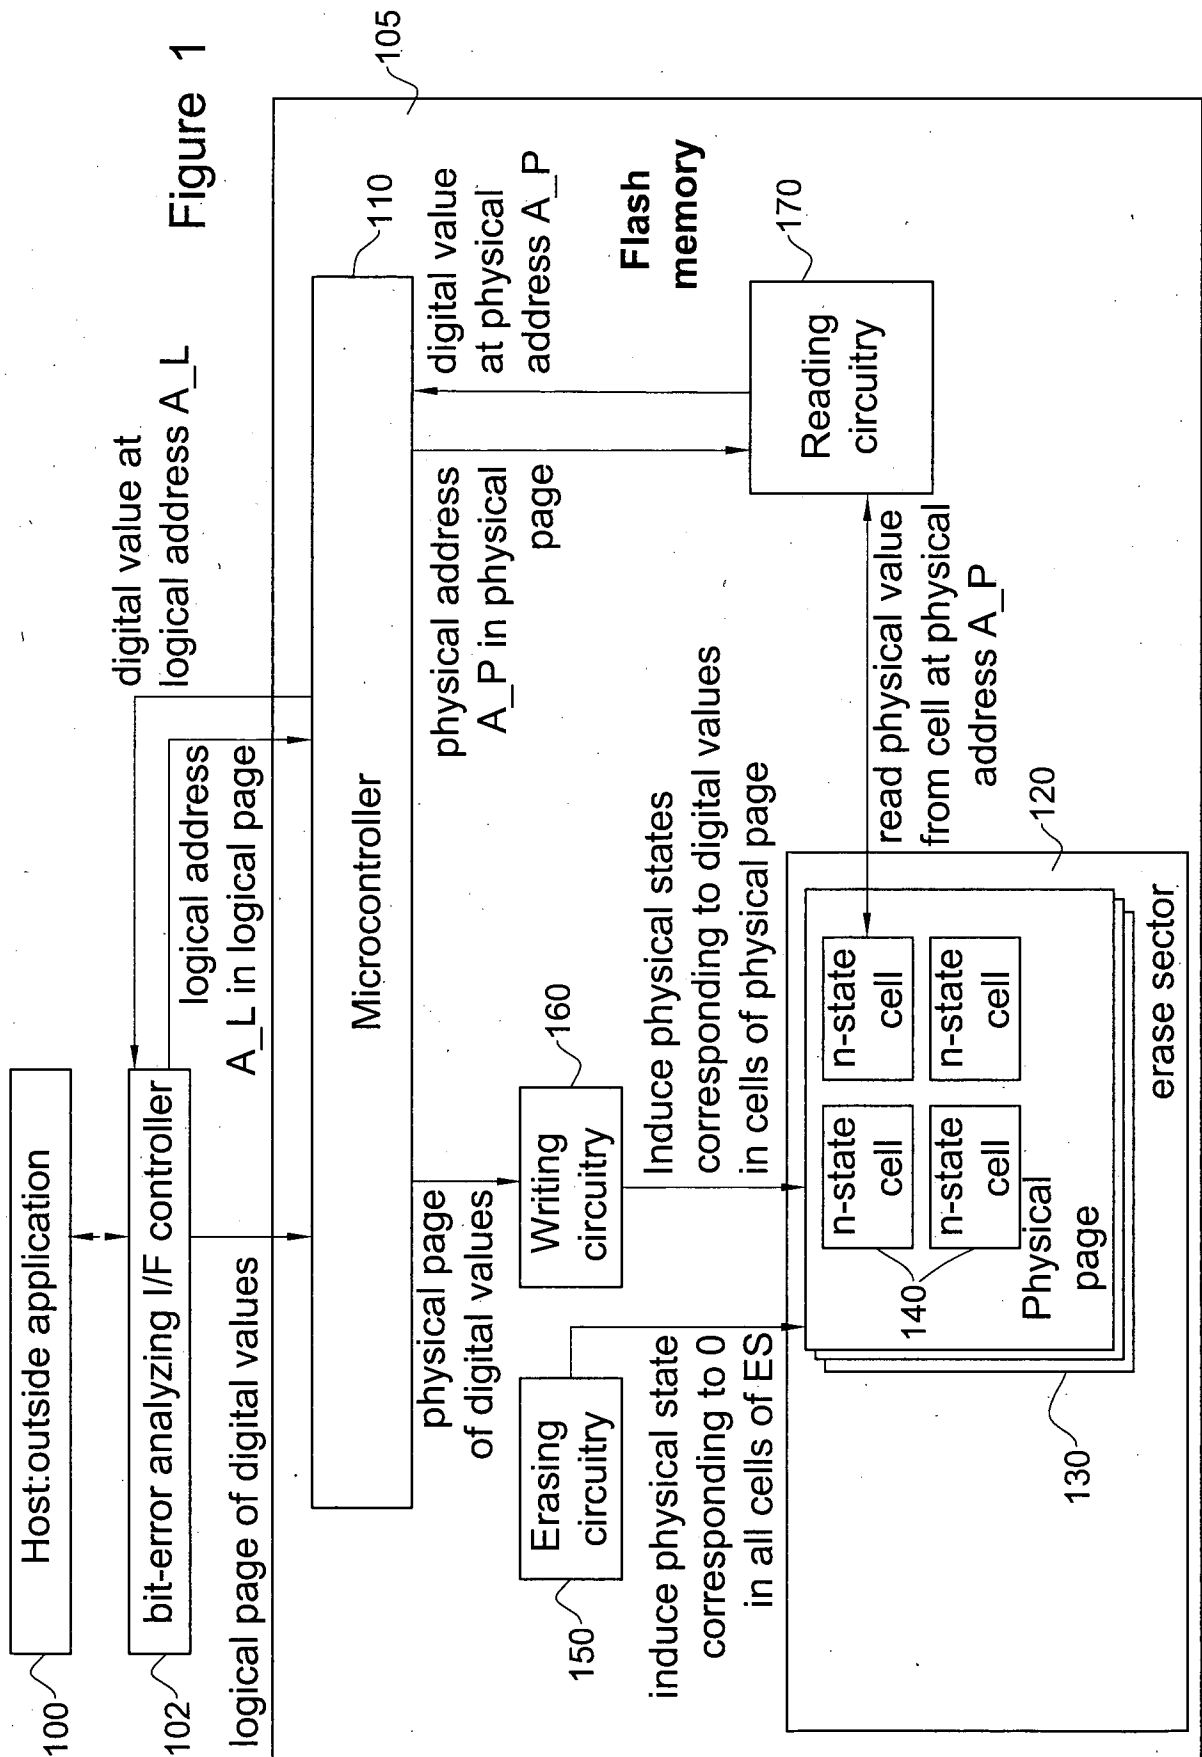

2/20

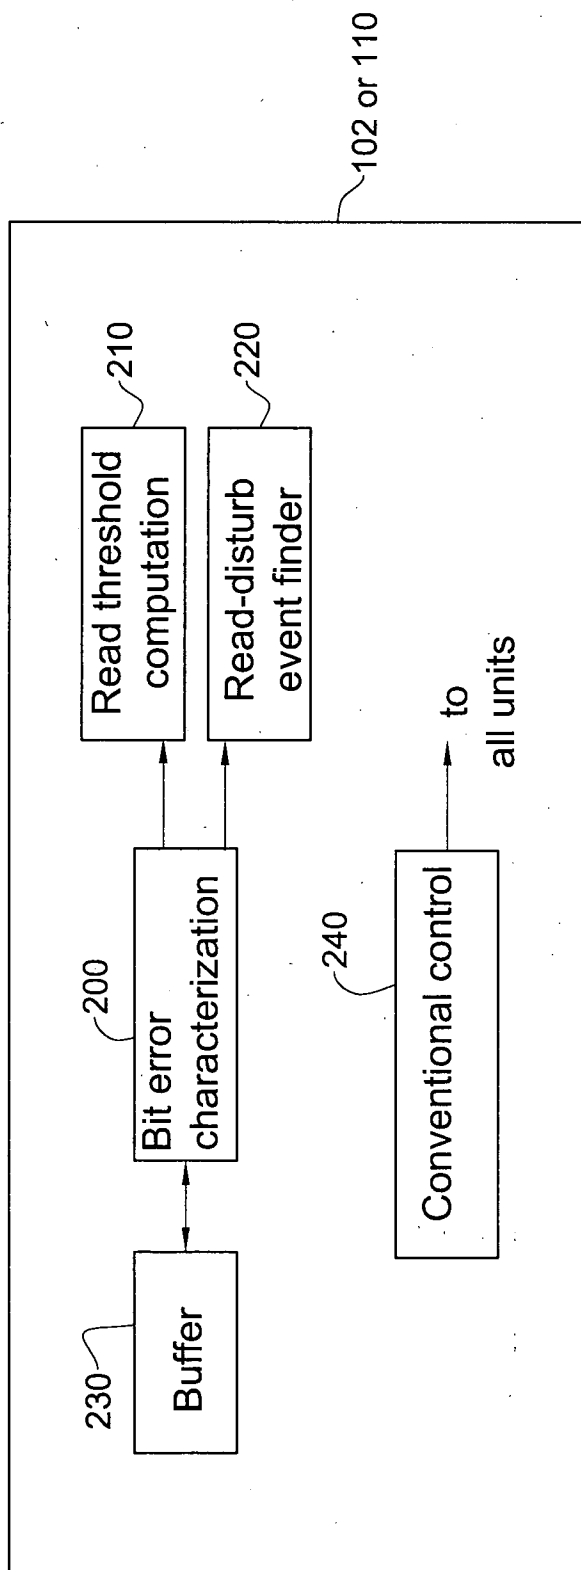


Figure 2

3/20

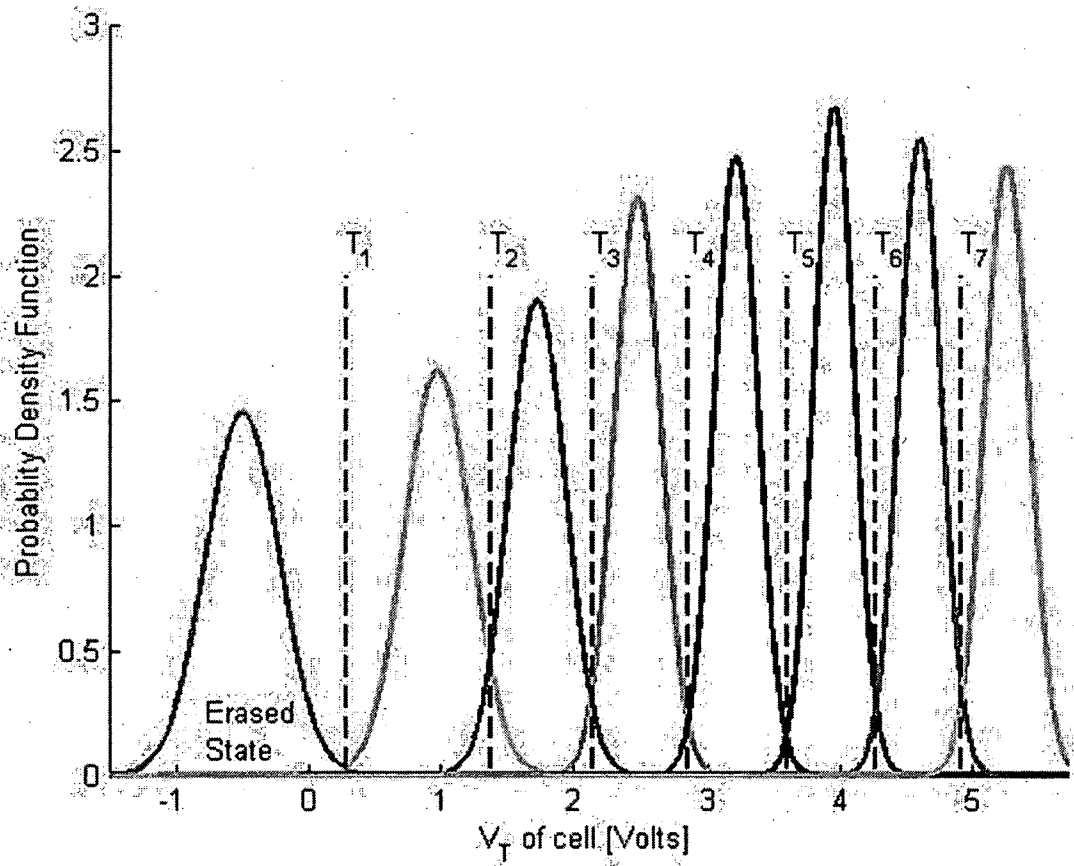


Figure 3

4/20

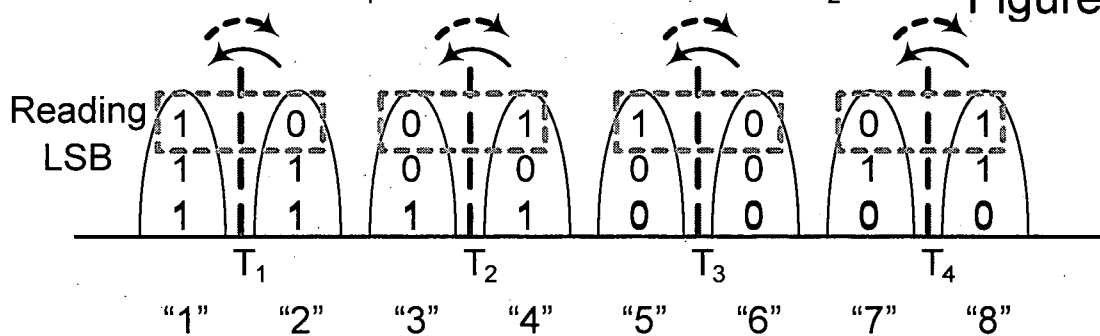
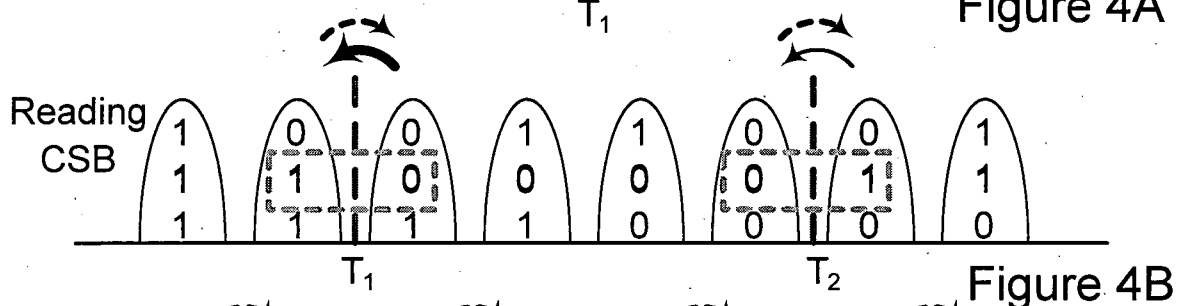
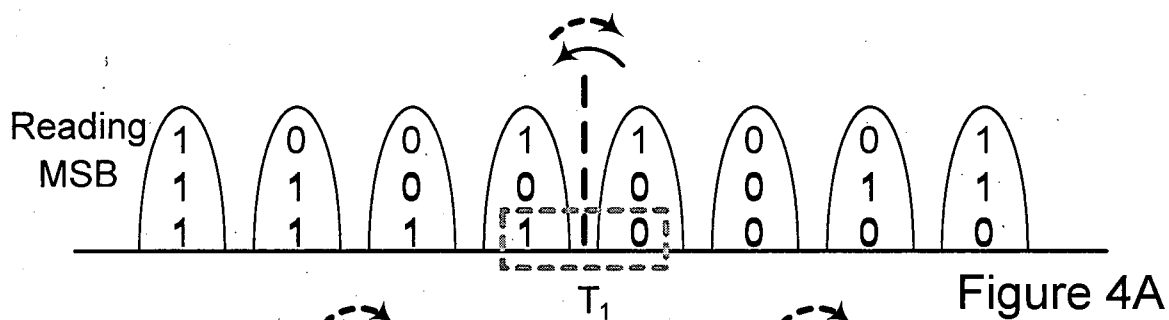


Figure 4C

5/20

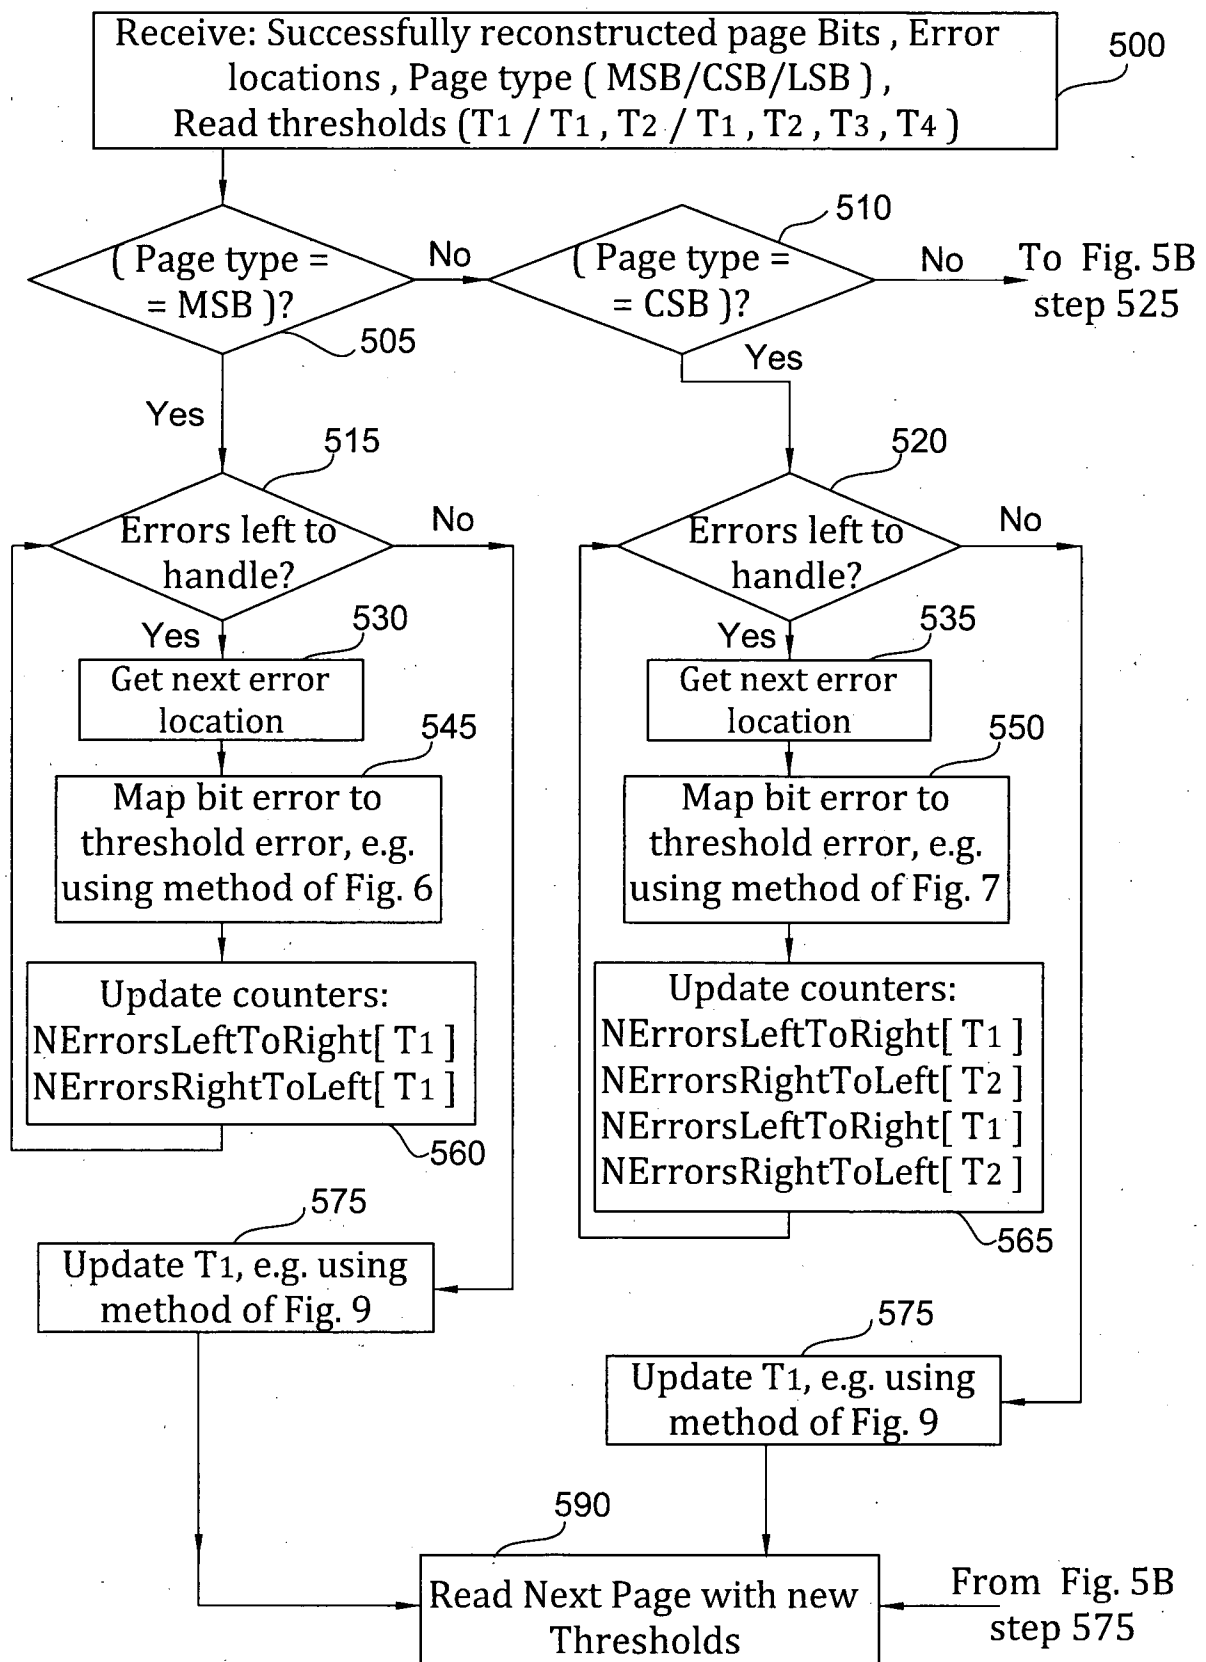


Figure 5A

6/20

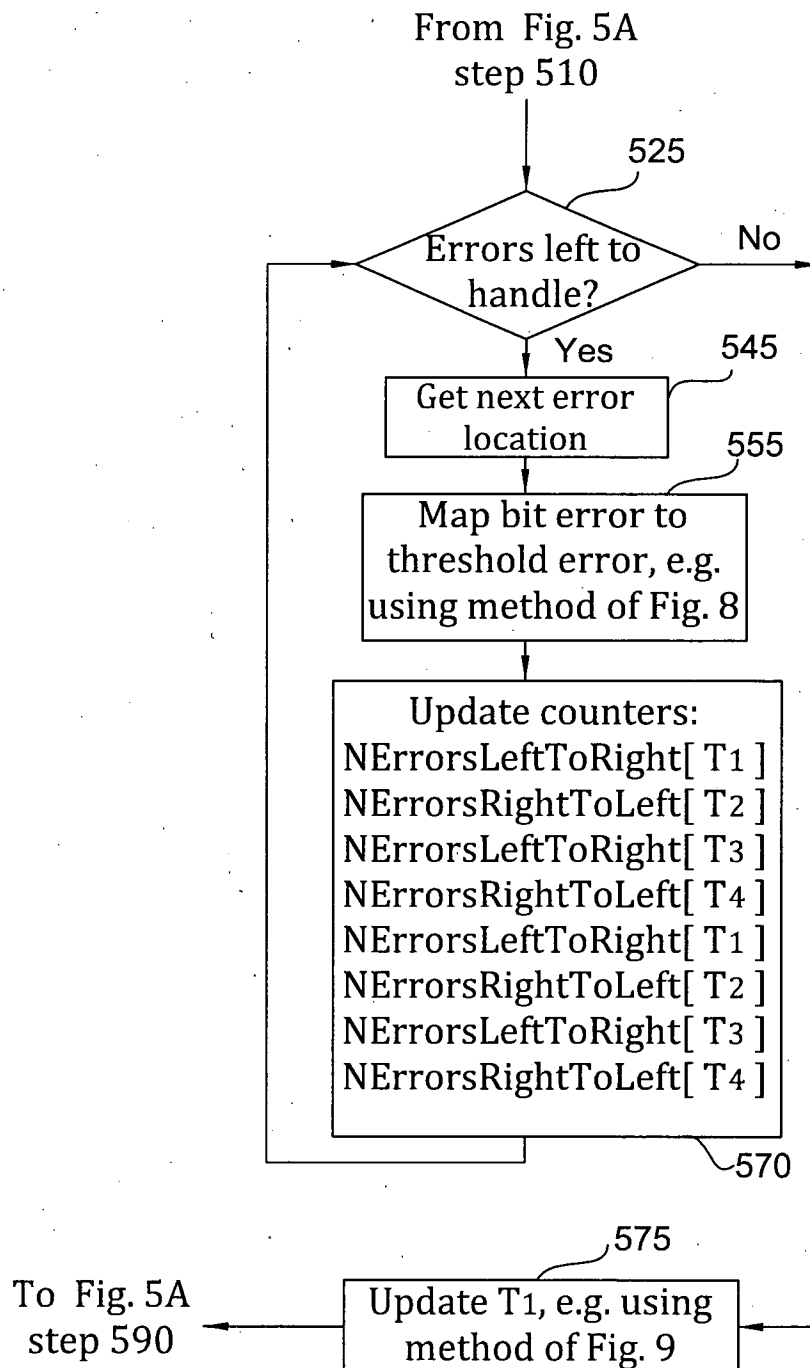


Figure 5B

7/20

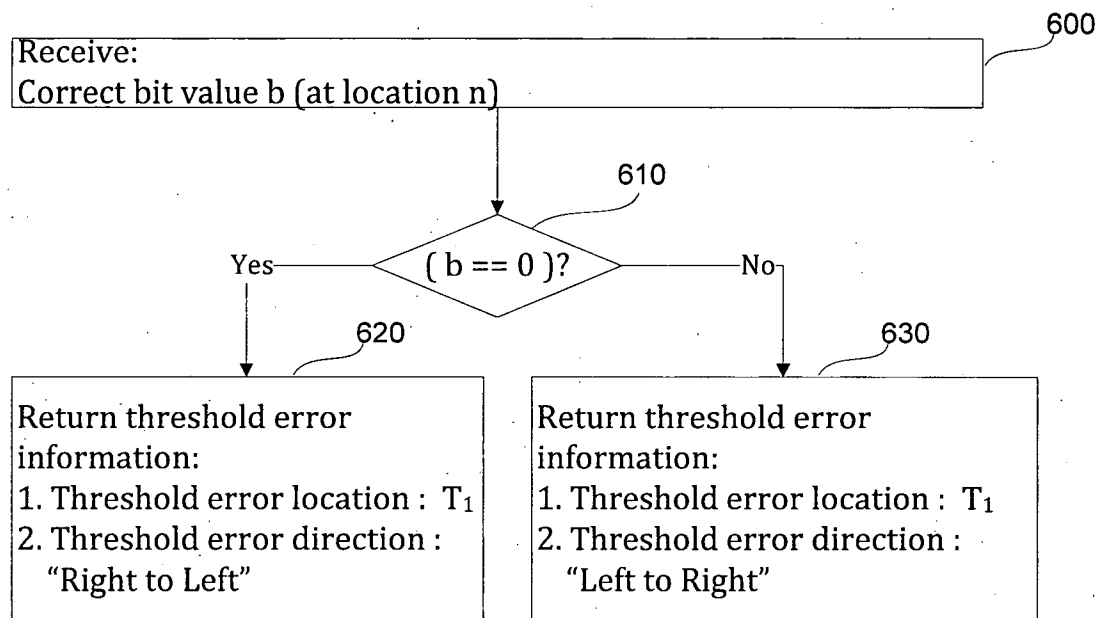


Figure 6

8/20

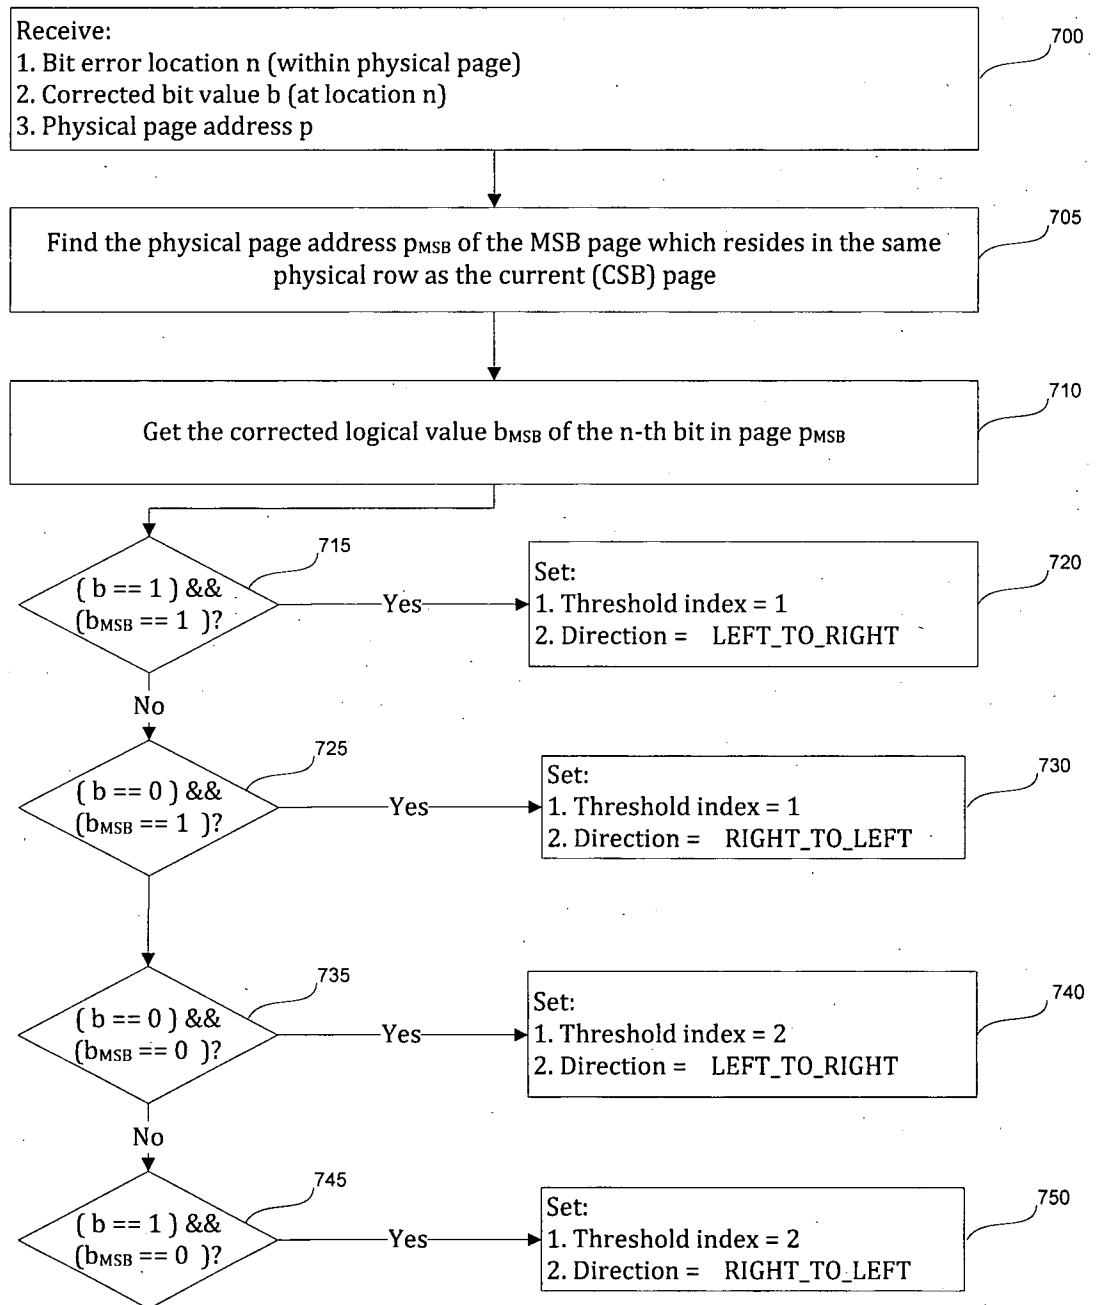


Figure 7

9/20

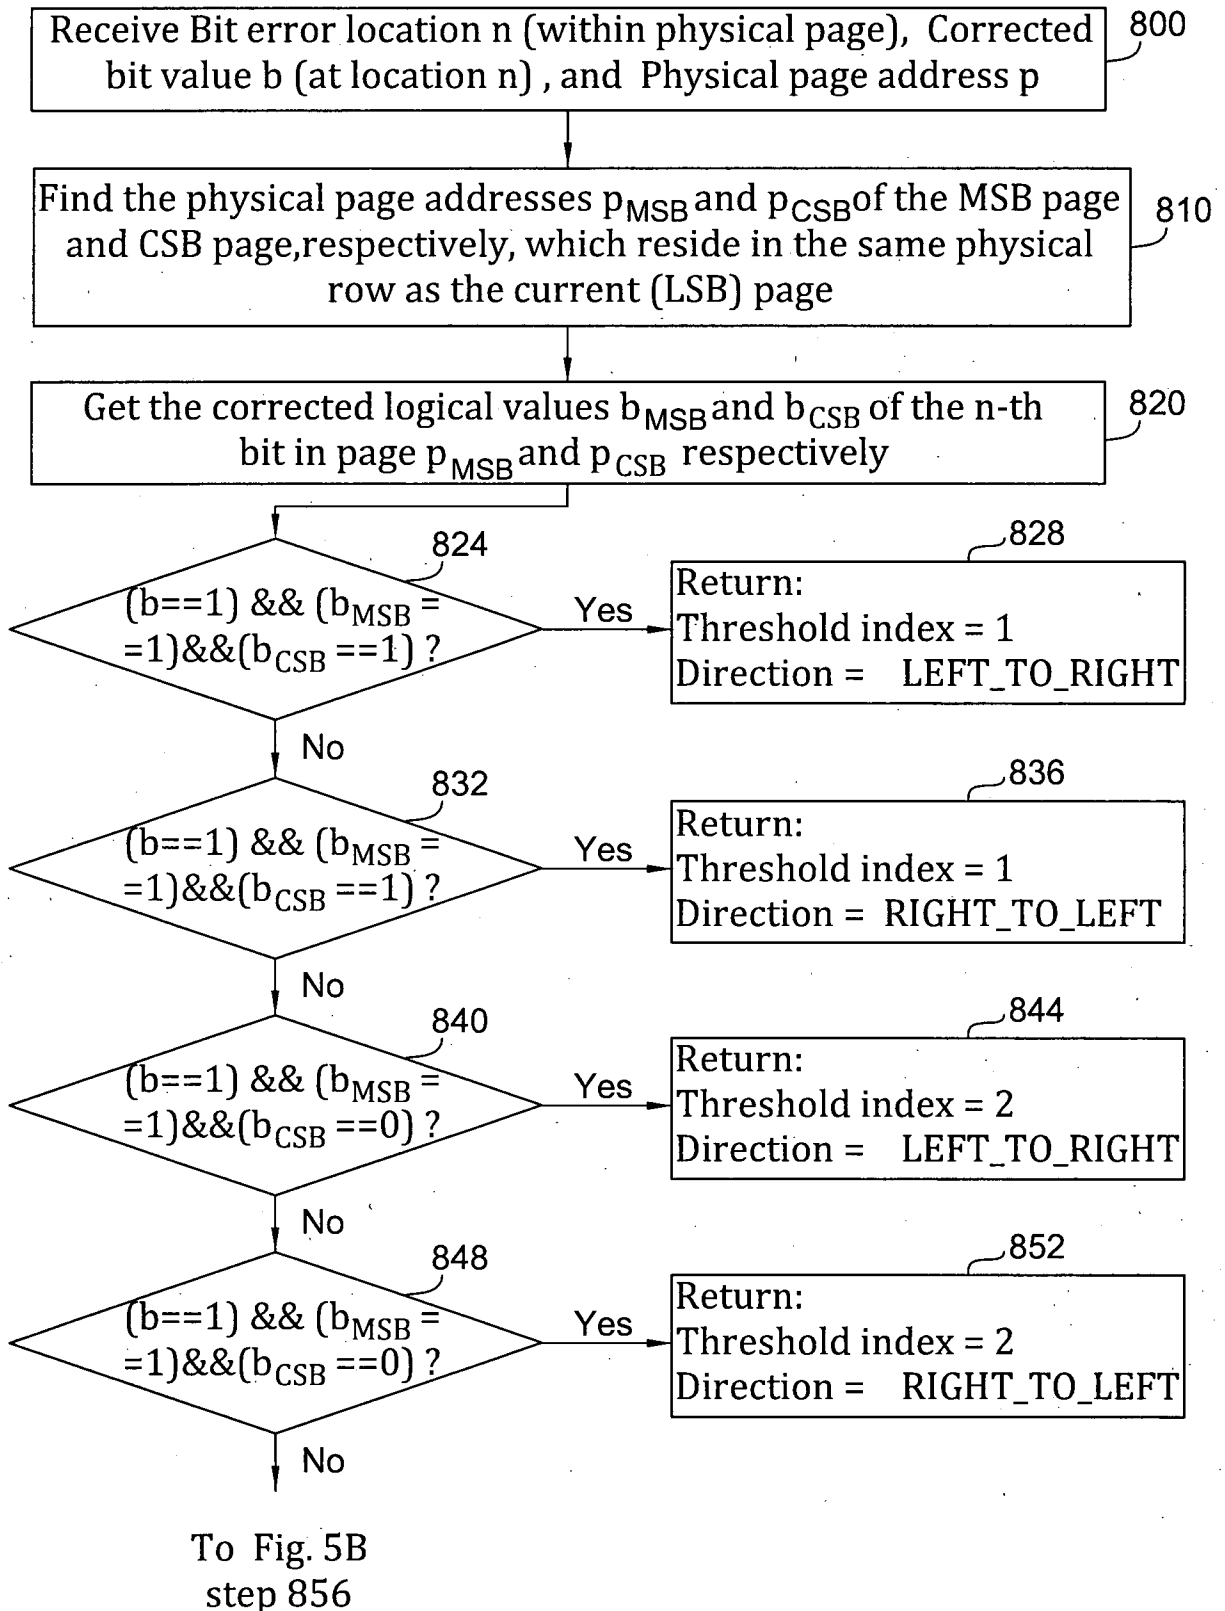


Figure 8A

10/20

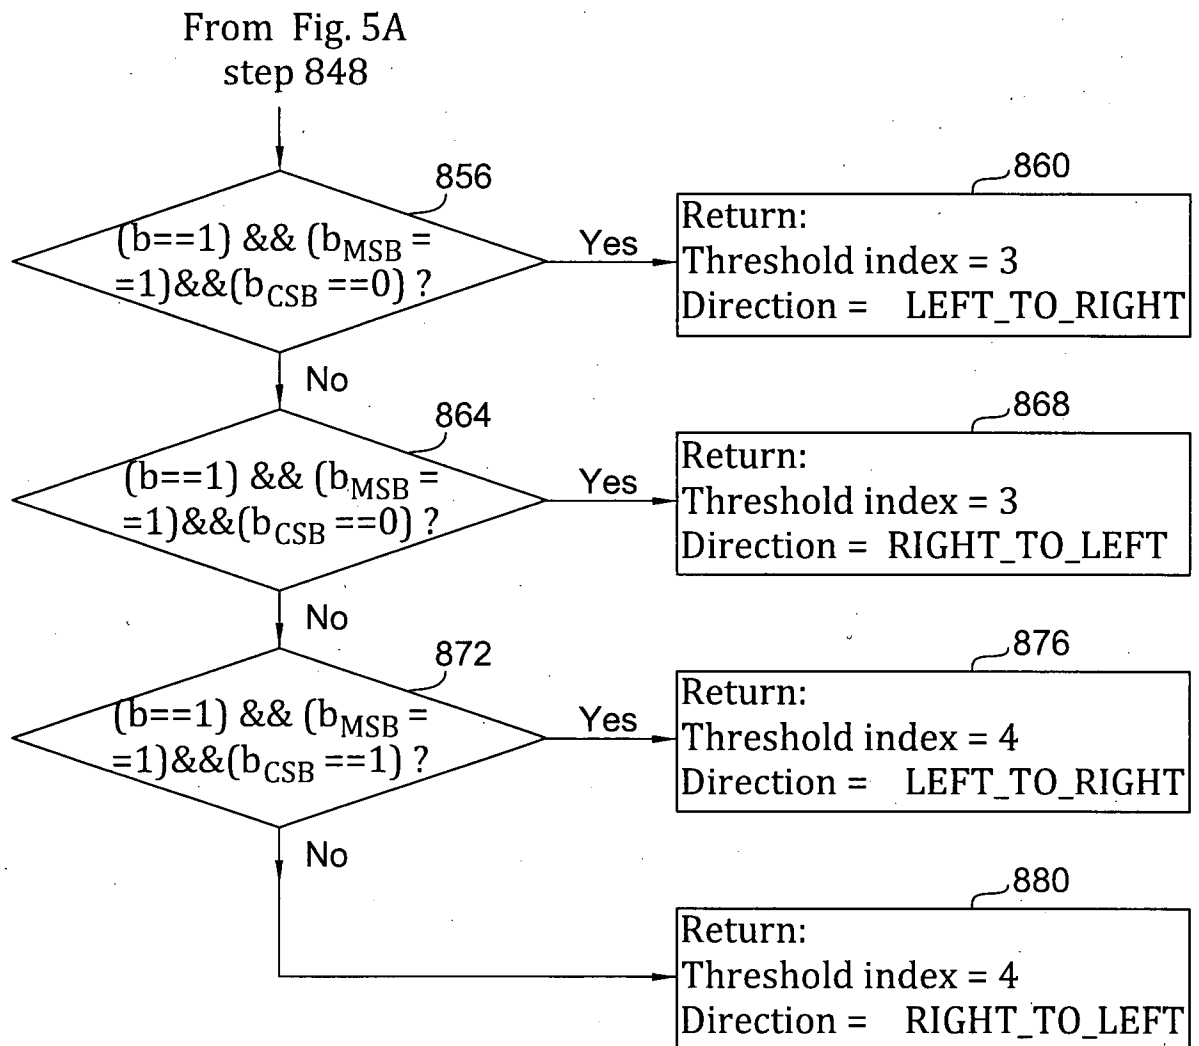


Figure 8B

11/20

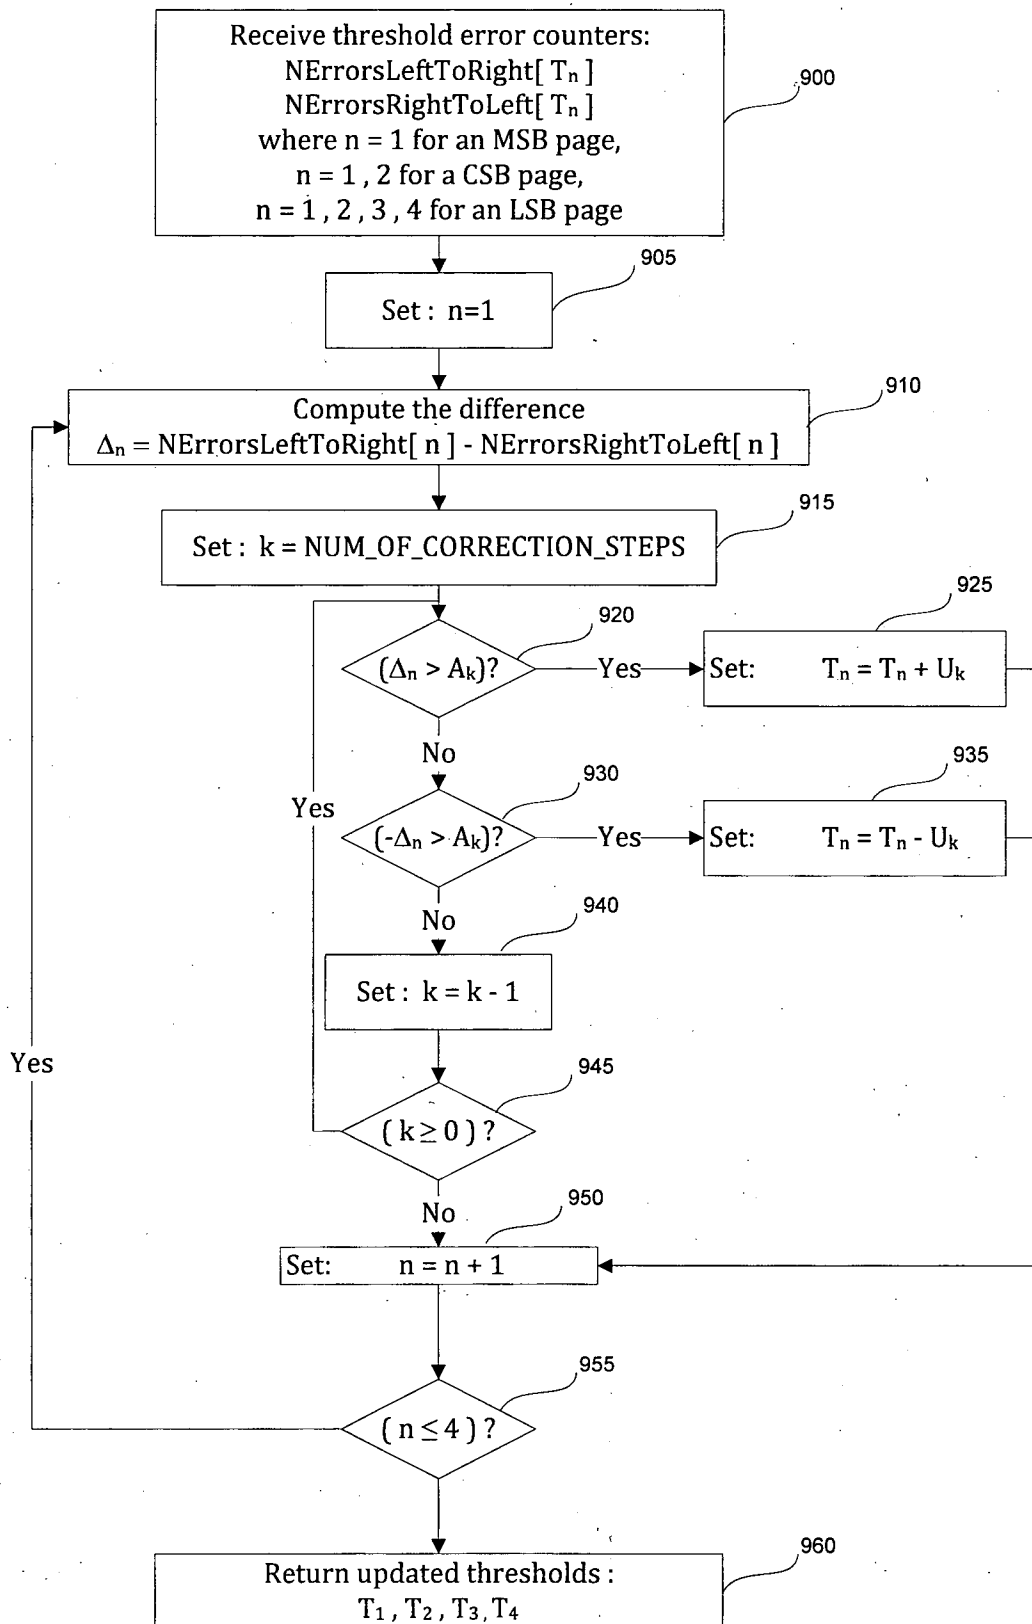


Figure 9

12/20

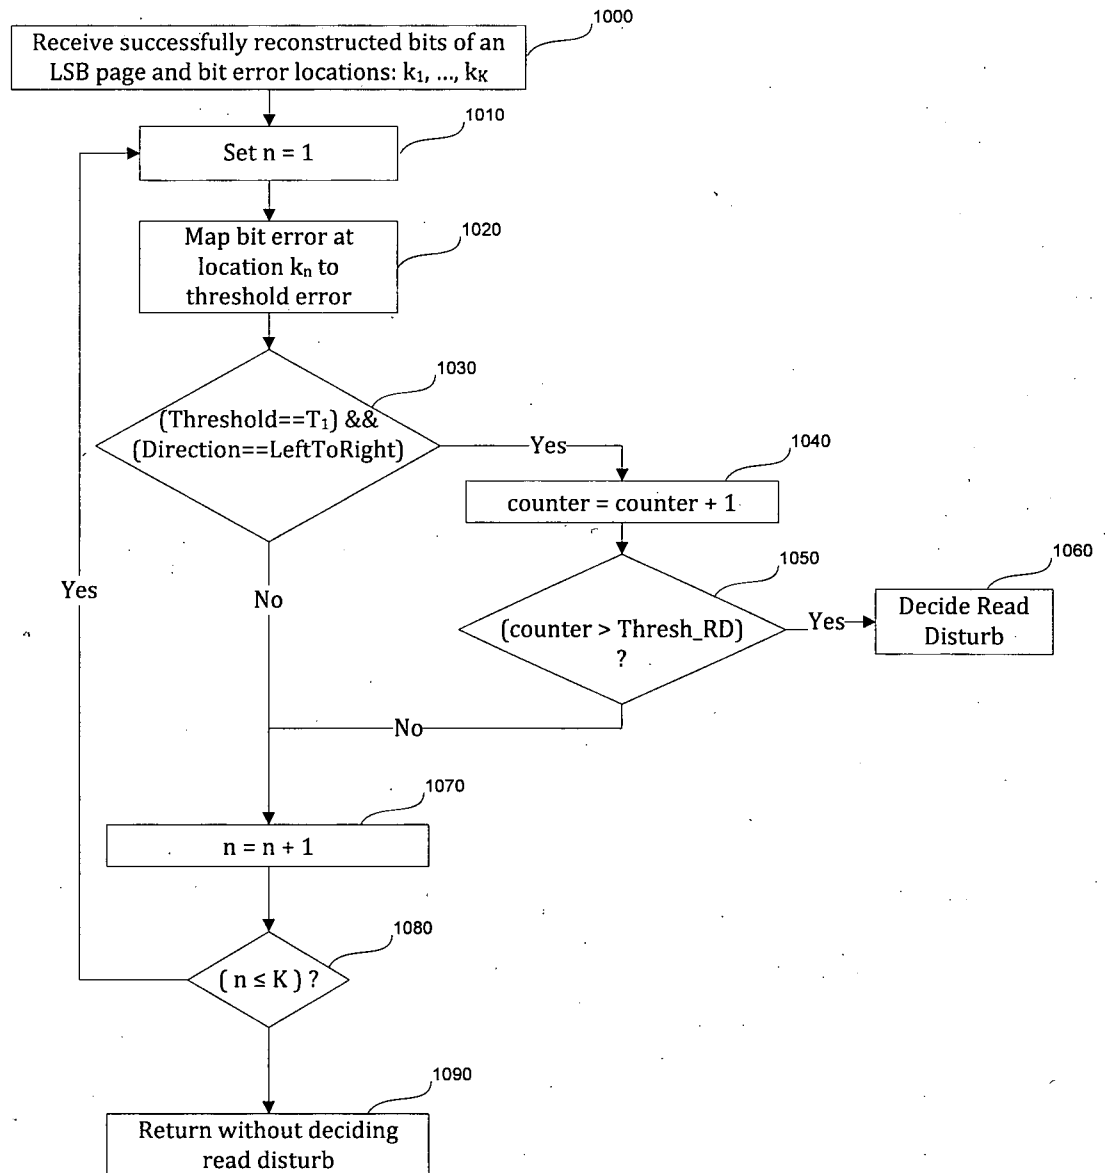


Figure 10

13/20

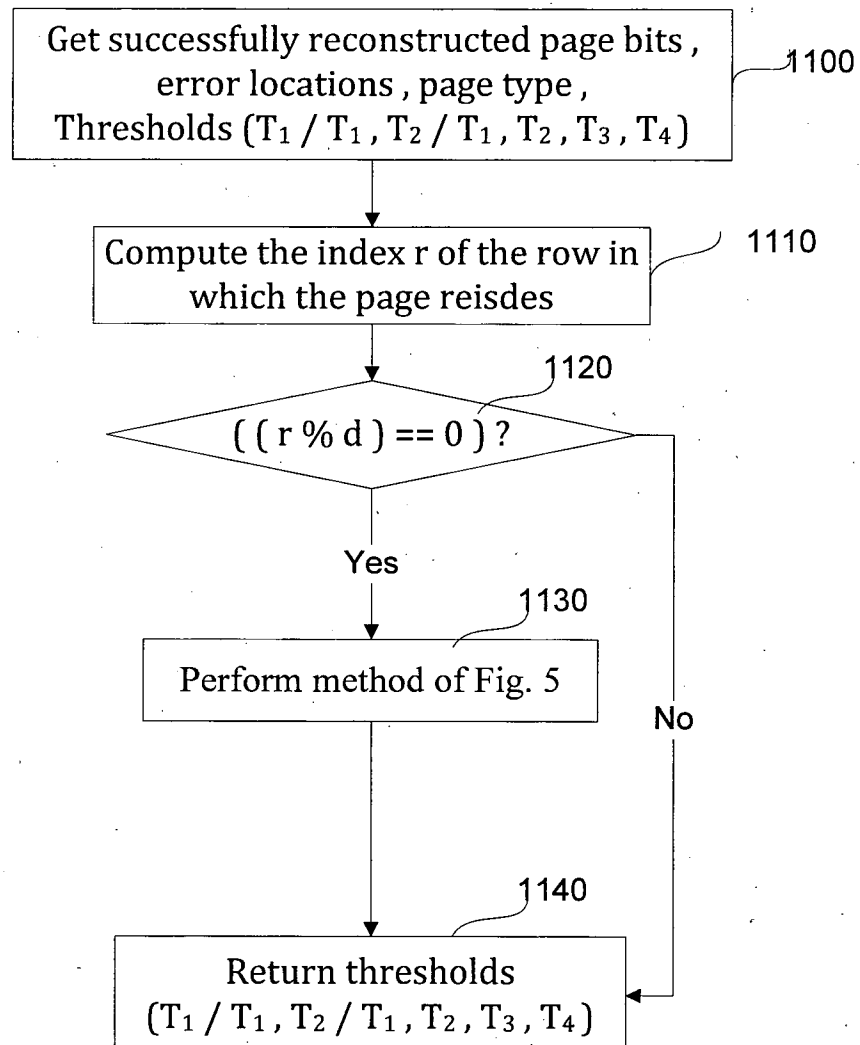


Figure 11

14/20

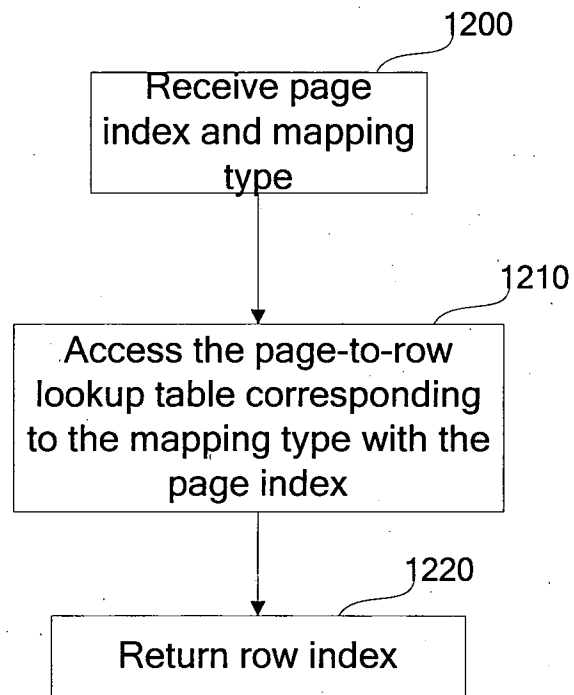


Figure 12

15/20

Row	Even Pages			Odd Pages		
	MSB	CSB	LSB	MSB	CSB	LSB
0	0	2	4	1	3	5
1	6	8	10	7	9	11
2	12	14	16	13	15	17
3	18	20	22	19	21	23
4	24	26	28	25	27	29
5	30	32	34	31	33	35
6	36	38	40	37	39	41
7	42	44	46	43	45	47
8	48	50	52	49	51	53
9	54	56	58	55	57	59
10	60	62	64	61	63	65
11	66	68	70	67	69	71
12	72	74	76	73	75	77
13	78	80	82	79	81	83
14	84	86	88	85	87	89
15	90	92	94	91	93	95
16	96	98	100	97	99	101
17	102	104	106	103	105	107
18	108	110	112	109	111	113
19	114	116	118	115	117	119
20	120	122	124	121	123	125
21	126	128	130	127	129	131
22	132	134	136	133	135	137
23	138	140	142	139	141	143
24	144	146	148	145	147	149
25	150	152	154	151	153	155
26	156	158	160	157	159	161
27	162	164	166	163	165	167
28	168	170	172	169	171	173
29	174	176	178	175	177	179
30	180	182	184	181	183	185
31	186	188	190	187	189	191

Figure 13

16/20

	Even Pages			Odd Pages		
Row	MSB	CSB	LSB	MSB	CSB	LSB
0	0	10	28	1	11	29
1	2	14	34	3	15	35
2	4	18	40	5	19	41
3	6	22	46	7	23	47
4	8	26	52	9	27	53
5	12	32	58	13	33	59
6	16	38	64	17	39	65
7	20	44	70	21	45	71
8	24	50	76	25	51	77
9	30	56	82	31	57	83
10	36	62	88	37	63	89
11	42	68	94	43	69	95
12	48	74	100	49	75	101
13	54	80	106	55	81	107
14	60	86	112	61	87	113
15	66	92	118	67	93	119
16	72	98	124	73	99	125
17	78	104	130	79	105	131
18	84	110	136	85	111	137
19	90	116	142	91	117	143
20	96	122	148	97	123	149
21	102	128	154	103	129	155
22	108	134	160	109	135	161
23	114	140	166	115	141	167
24	120	146	170	121	147	171
25	126	152	174	127	153	175
26	132	158	178	133	159	179
27	138	164	182	139	165	183
28	144	168	184	145	169	185
29	150	172	186	151	173	187
30	156	176	188	157	177	189
31	162	180	190	163	181	191

Figure 14

17/20

Page	Row	Page	Row	Page	Row	Page	Row	Page	Row	Page	Row
0	0	32	5	64	10	96	16	128	21	160	26
1	0	33	5	65	10	97	16	129	21	161	26
2	0	34	5	66	11	98	16	130	21	162	27
3	0	35	5	67	11	99	16	131	21	163	27
4	0	36	6	68	11	100	16	132	22	164	27
5	0	37	6	69	11	101	16	133	22	165	27
6	1	38	6	70	11	102	17	134	22	166	27
7	1	39	6	71	11	103	17	135	22	167	27
8	1	40	6	72	12	104	17	136	22	168	28
9	1	41	6	73	12	105	17	137	22	169	28
10	1	42	7	74	12	106	17	138	23	170	28
11	1	43	7	75	12	107	17	139	23	171	28
12	2	44	7	76	12	108	18	140	23	172	28
13	2	45	7	77	12	109	18	141	23	173	28
14	2	46	7	78	13	110	18	142	23	174	29
15	2	47	7	79	13	111	18	143	23	175	29
16	2	48	8	80	13	112	18	144	24	176	29
17	2	49	8	81	13	113	18	145	24	177	29
18	3	50	8	82	13	114	19	146	24	178	29
19	3	51	8	83	13	115	19	147	24	179	29
20	3	52	8	84	14	116	19	148	24	180	30
21	3	53	8	85	14	117	19	149	24	181	30
22	3	54	9	86	14	118	19	150	25	182	30
23	3	55	9	87	14	119	19	151	25	183	30
24	4	56	9	88	14	120	20	152	25	184	30
25	4	57	9	89	14	121	20	153	25	185	30
26	4	58	9	90	15	122	20	154	25	186	31
27	4	59	9	91	15	123	20	155	25	187	31
28	4	60	10	92	15	124	20	156	26	188	31
29	4	61	10	93	15	125	20	157	26	189	31
30	5	62	10	94	15	126	21	158	26	190	31
31	5	63	10	95	15	127	21	159	26	191	31

Figure 15

18/20

Page	Row	Page	Row	Page	Row	Page	Row	Page	Row	Page	Row
0	0	32	5	64	6	96	20	128	21	160	22
1	0	33	5	65	6	97	20	129	21	161	22
2	1	34	1	66	15	98	16	130	17	162	31
3	1	35	1	67	15	99	16	131	17	163	31
4	2	36	10	68	11	100	12	132	26	164	27
5	2	37	10	69	11	101	12	133	26	165	27
6	3	38	6	70	7	102	21	134	22	166	23
7	3	39	6	71	7	103	21	135	22	167	23
8	4	40	2	72	16	104	17	136	18	168	28
9	4	41	2	73	16	105	17	137	18	169	28
10	0	42	11	74	12	106	13	138	27	170	24
11	0	43	11	75	12	107	13	139	27	171	24
12	5	44	7	76	8	108	22	140	23	172	29
13	5	45	7	77	8	109	22	141	23	173	29
14	1	46	3	78	17	110	18	142	19	174	25
15	1	47	3	79	17	111	18	143	19	175	25
16	6	48	12	80	13	112	14	144	28	176	30
17	6	49	12	81	13	113	14	145	28	177	30
18	2	50	8	82	9	114	23	146	24	178	26
19	2	51	8	83	9	115	23	147	24	179	26
20	7	52	4	84	18	116	19	148	20	180	31
21	7	53	4	85	18	117	19	149	20	181	31
22	3	54	13	86	14	118	15	150	29	182	27
23	3	55	13	87	14	119	15	151	29	183	27
24	8	56	9	88	10	120	24	152	25	184	28
25	8	57	9	89	10	121	24	153	25	185	28
26	4	58	5	90	19	122	20	154	21	186	29
27	4	59	5	91	19	123	20	155	21	187	29
28	0	60	14	92	15	124	16	156	30	188	30
29	0	61	14	93	15	125	16	157	30	189	30
30	9	62	10	94	11	126	25	158	26	190	31
31	9	63	10	95	11	127	25	159	26	191	31

Figure 16

19/20

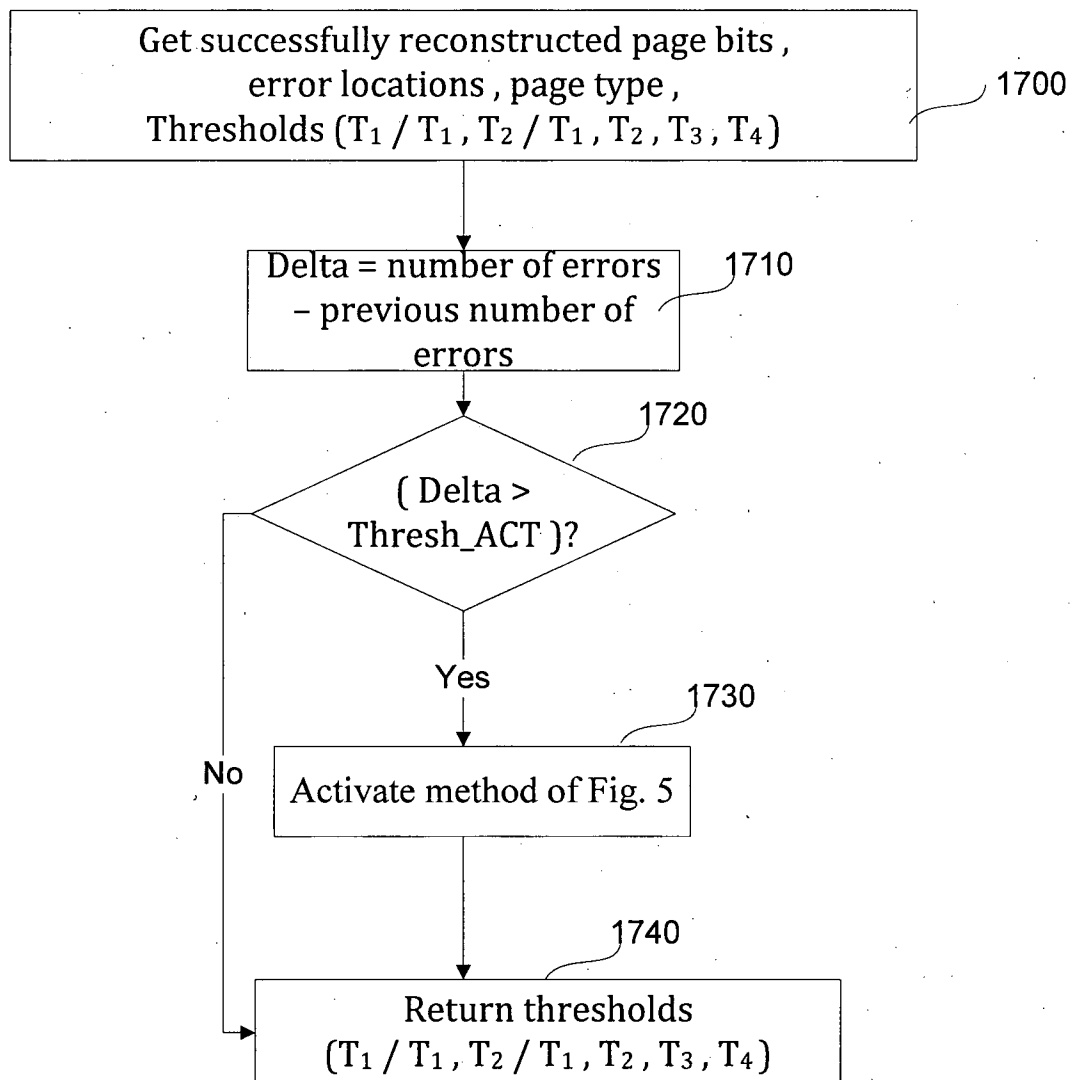


Figure 17

20/20

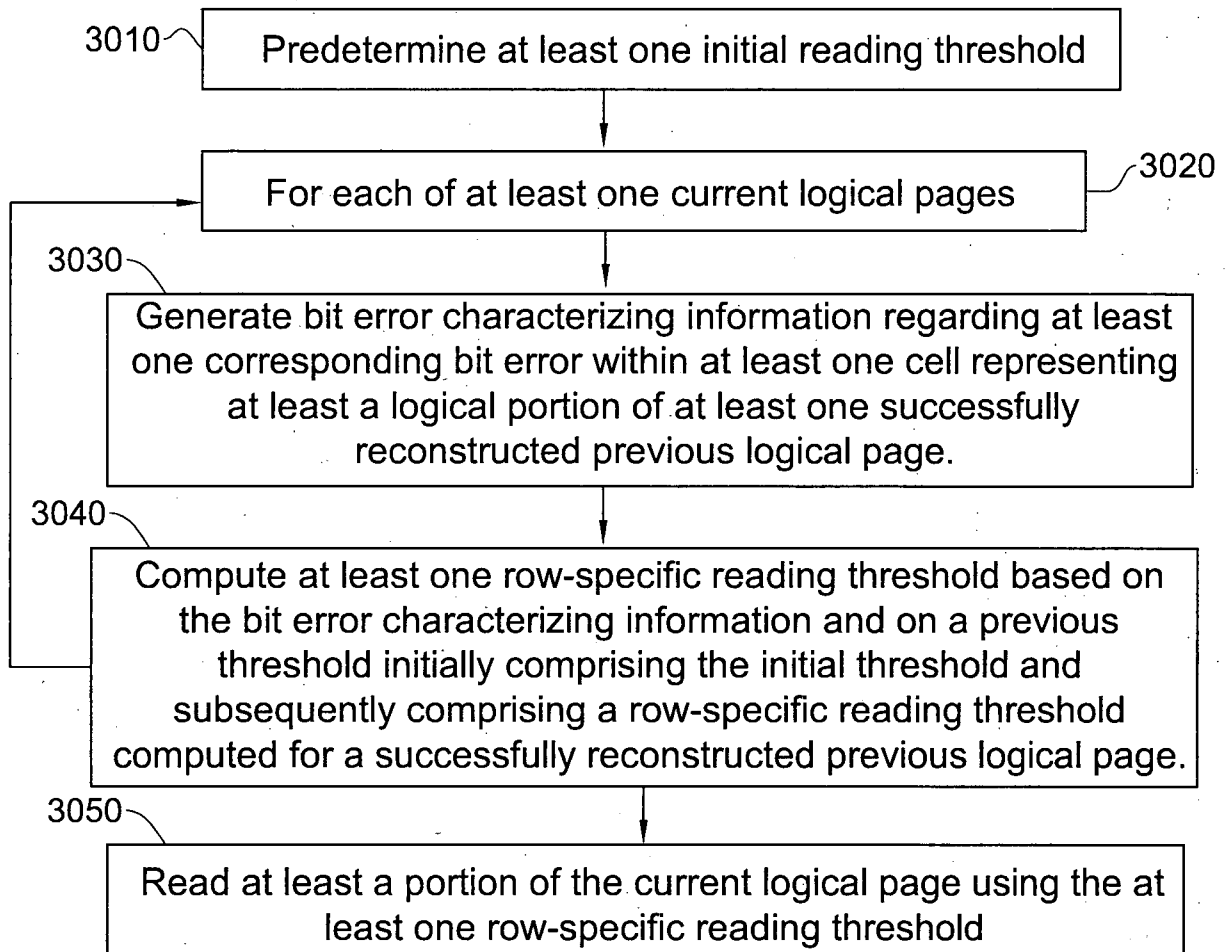


Figure 18

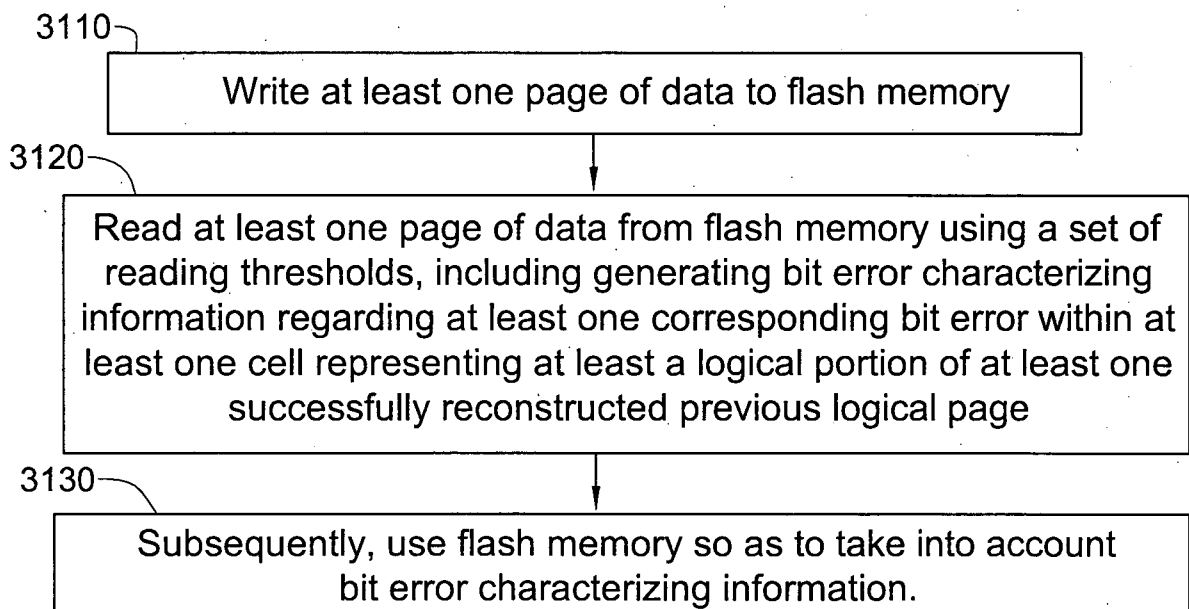


Figure 19