




(86) Date de dépôt PCT/PCT Filing Date: 2015/12/01
(87) Date publication PCT/PCT Publication Date: 2016/06/09
(45) Date de délivrance/Issue Date: 2023/05/23
(85) Entrée phase nationale/National Entry: 2017/05/31
(86) N° demande PCT/PCT Application No.: DK 2015/050370
(87) N° publication PCT/PCT Publication No.: 2016/086940
(30) Priorité/Priority: 2014/12/01 (DK PA201470754)

(51) Cl.Int./Int.Cl. *A63H 3/16* (2006.01),
A63H 33/06 (2006.01), *F16B 37/08* (2006.01)
(72) Inventeurs/Inventors:
SCHILDKNECHT HOE, MIKKEL, DK;
MORTENSEN, PER, DK
(73) Propriétaire/Owner:
LEGO A/S, DK
(74) Agent: SMART & BIGGAR LP

(54) Titre : STRUCTURE COMPRENANT DEUX PARTIES DE COQUE
(54) Title: A STRUCTURE COMPRISING TWO SHELL PARTS

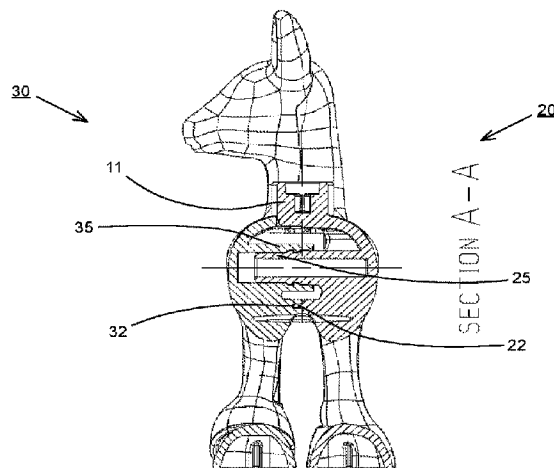

(57) Abrégé/Abstract:

A structure (10) comprising two shell parts (20, 30) which are connected to each other with at least one snap connection (21), wherein the two shell parts comprise, on the inner side, mutually complementary male and female snap means (25, 35) configured to form a snap connection (21), and wherein the two shell parts have complementarily configured abutment faces that abut on each other when the male and female snap means are interconnected (25, 35); wherein the male and female snap means (25, 35) comprise an external spiral-shaped protrusion (24) configured on the male snap means, and a thereto complementarily configured, internal, spiral-shaped protrusion (34) configured on the female snap means; and wherein the external spiral-shaped protrusion (24) on the male snap means (25) is configured such that it engages with the internal spiral-shaped protrusion (34) on the female snap means (35); and that the structure (10) comprises rotation-preventive means configured such that the two shell parts are unable to rotate relative to each other when the male and female snap means are interconnected to form at least one snap connection (21).

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
9 June 2016 (09.06.2016)



(10) International Publication Number
WO 2016/086940 A1

(51) International Patent Classification:

A63H 33/06 (2006.01) *F16B 37/08* (2006.01)
A63H 3/16 (2006.01)

(21) International Application Number:

PCT/DK2015/050370

(22) International Filing Date:

1 December 2015 (01.12.2015)

(25) Filing Language:

Danish

(26) Publication Language:

English

(30) Priority Data:

PA201470754 1 December 2014 (01.12.2014) DK

(71) Applicant: LEGO A/S [DK/DK]; Aastvej 1, 7190 Billund (DK).

(72) Inventors: SCHILDKNECHT HOÉ, Mikkel; Møllebakken 6, Rårup, 7130 Juelsminde (DK). MORTENSEN, Per; Valmuevej 8, 7323 Give (DK).

(74) Agent: GUARDIAN IP CONSULTING I/S; Diplomvej, Building 381, 2800 Kgs. Lyngby (DK).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: A STRUCTURE COMPRISING TWO SHELL PARTS

FIG 1

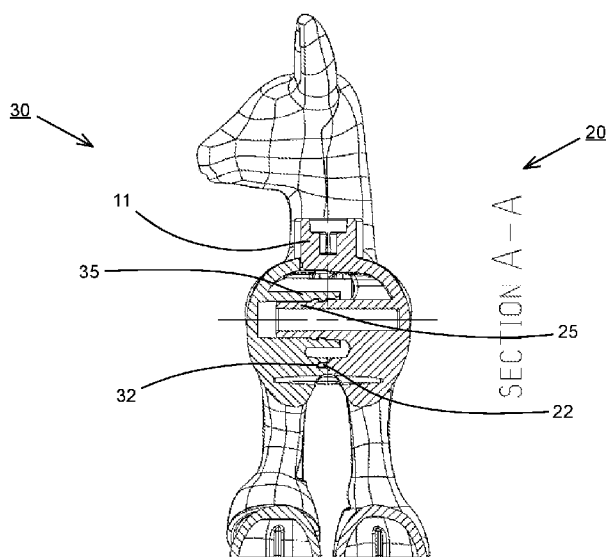

(57) Abstract: A structure (10) comprising two shell parts (20, 30) which are connected to each other with at least one snap connection (21), wherein the two shell parts comprise, on the inner side, mutually complementary male and female snap means (25, 35) configured to form a snap connection (21), and wherein the two shell parts have complementarily configured abutment faces that abut on each other when the male and female snap means are interconnected (25, 35); wherein the male and female snap means (25, 35) comprise an external spiral-shaped protrusion (24) configured on the male snap means, and a thereto complementarily configured, internal, spiral-shaped protrusion (34) configured on the female snap means; and wherein the external spiral-shaped protrusion (24) on the male snap means (25) is configured such that it engages with the internal spiral-shaped protrusion (34) on the female snap means (35); and that the structure (10) comprises rotation-preventive means configured such that the two shell parts are unable to rotate relative to each other when the male and female snap means are interconnected to form at least one snap connection (21).

A structure comprising two shell parts

The present invention relates to a structure comprising two shell parts that are connected to each other by at least one snap connection; wherein the
5 two shell parts comprise, on the inner side, mutually complementary male and female snap means configured to form a snap connection; and wherein the two shell parts have complementarily configured abutment faces that abut on each other when the male and female snap means are interconnected.

10

Background

It is commonly known to build structures from shell parts. It is also known to use snap connections in the context of interconnection of two shell parts,
15 wherein the snap connection is constituted by two cylindrical, complementary snap means; wherein they are configured with slits longitudinally of the snap means for temporarily enabling deformation to the effect that the two complementary snap means with protrusions and recesses, respectively, are enabled to engage with one another.

20

However, the construction of the known snap connections bring about the need for complex tools and/or work procedures in the context of the manufacturing process, where the moulded shell parts with snap means are to be removed from the mould.

25

Brief description of the invention

It is consequently the object of the invention to provide an alternative construction for a permanent interconnection of two shell parts for forming a
30 structure, and whereby the structure is simpler to manufacture by plastics moulding.

This is accomplished in that the male and female snap means described above comprise an external spiral-shaped protrusion configured on the male snap means and a thereto complementarily configured internal spiral-shaped protrusion configured on the female snap means; and wherein the external spiral-shaped protrusion on the male
5 snap means is configured in such a manner that it engages with the internal spiral-shaped protrusion on the female snap means; and in that the structure comprises rotation-preventive means configured such that the two shell parts cannot rotate relative to each other when the male and female snap means are interconnected to form at least one snap connection.

10

According to an embodiment of the invention, there is provided a structure comprising two shell parts, wherein the two shell parts comprise a first shell part and a second shell part, which are connected to each other with at least one snap connection, wherein the two shell parts comprise, on the inner side, mutually complementary male and female
15 snap means configured to form the at least one snap connection, and wherein the two shell parts have complementarily configured abutment faces that abut on each other when the male and female snap means are interconnected, wherein the male and female snap means comprise an external spiral-shaped protrusion configured on the male snap means, and a thereto complementarily configured, internal, spiral-shaped
20 protrusion configured on the female snap means, and wherein the external spiral-shaped protrusion on the male snap means is configured such that the external spiral-shaped protrusion engages with the internal spiral-shaped protrusion on the female snap means; and wherein the structure comprises rotation-preventive means configured such that the two shell parts are unable to rotate relative to each other when the male
25 and female snap means are interconnected to form at least one snap connection.

30

According to an embodiment of the invention, the structure comprises at least two snap connections whereby the two shell parts cannot rotate relative to each other when the male and female snap means are interconnected.

30

According to an embodiment of the invention, each of the two shell parts comprises, along their peripheries, complementarily configured abutment faces in the form of

flanges or recesses, whereby the two shell parts cannot rotate relative to each other when the male and female snap means are interconnected.

5 According to an embodiment of the invention, the male snap means comprises a tubular protrusion having an exterior surface, wherein the external diameter of the exterior surface of the male snap means is smallest at the free end of the male snap means opposite the shell part.

10 According to an embodiment of the invention, the male snap means comprises an interior surface which is either a cylindrical cavity of uniform diameter or frusto-conical with smallest diameter closest to shell part and largest diameter at the free end.

According to an embodiment of the invention, the female snap means comprises complementary construction relative to the male snap means for forming a snap connection; wherein the female snap means comprises a
5 tubular protrusion comprising an interior surface; wherein the internal diameter of the interior surface of the female snap means is smallest at the shell part and largest at the free end of the female snap means opposite the shell part. Hereby it is accomplished that the shell parts comprising snap means can be more easily separated from a plastics mould in the
10 manufacturing process.

According to an embodiment of the invention, the female snap means comprises an exterior surface, wherein the exterior surface is either cylindrical with uniform diameter or frusto-conical with smallest diameter at
15 the extremity of the female snap means.

According to an embodiment of the invention, the interior surface of the tubular protrusion of the female snap means comprises at least one spiral-shaped protrusion, and the exterior surface of the tubular protrusion of the
20 male snap means comprises spiral-shaped protrusions.

According to an embodiment of the invention, the structure comprises one or more coupling means configured for interconnection with toy building elements comprising complementarily configured coupling means.
25

According to an embodiment of the invention, the structure is configured from plastics material and manufactured by injection moulding.

List of figures

30

An embodiment of the invention will now be explained in further detail with reference to the drawing, wherein:

Figure 1 illustrates a structure assembled by two shell parts, seen in a cross-sectional view and seen from above;

Figure 2 illustrates, in a perspective view, two shell parts;

Figure 3 illustrates male and female snap means and a snap connection, seen in a lateral view;

Figure 4 illustrates, in a perspective view, a snap connection and a female snap means and a male snap means.

Detailed description with reference to the figures

The present invention relates to a structure 10 in the form of a toy figure, which, in figure 1, is illustrated as an animal.

The structure (10) comprises two shell parts (20, 30) that are connected to each other by one or more snap connections. Each of the two shell parts comprises, on the inner side, complementary and tubular, respectively, male and female snap means (25, 35) that are configured to form a concealed snap connection, and wherein the two shell parts have complementarily configured abutment faces that abut on each other when the male and female snap means are interconnected (25, 35).

The snap means (25, 35) comprise one or more spiral-shaped protrusions (24, 34), whereby the two snap means are able to mesh with each other.

The spiral-shaped protrusions comprise both conically spiral-shaped protrusions and helical protrusions.

5 The structure (10) comprises one or more rotation-preventive means whereby the two shell parts are unable to rotate relative to each other when the male and female snap means are interconnected.

10 The rotation-preventive means may be in the form of the structure (10) comprising at least two snap connections (21) or the two shell parts (20, 30) each comprising, along the periphery of the shell parts, complementarily configured abutment faces in the form of flanges or recesses, as illustrated in figure 1, with tongue and groove (22, 32), respectively, whereby the two shell parts cannot rotate relative to each other and thereby obviates that shell parts are unintentionally separated. Thus, the structure may either comprise
15 one or more types of rotation-preventive means in combination.

The structure (10) comprises one or more coupling means (11) configured for interconnection with toy building elements comprising complementarily configured coupling means whereby the structure may partake in playing with
20 toy building sets.

Figure 2 shows the two shell parts (20, 30). The first shell part (20) comprises three male snap means (25) that are arranged on the inner side of the shell part and a coupling means (11) which is arranged on the outer side of the
25 shell part. Correspondingly the second shell part (30) is shown comprising three female snap means (35) that are configured for receiving the male snap means (25) on the first shell part.

30 The two types of snap means are tubular, and the male snap means (25) illustrated with a threaded protrusion on the external cylindrical surface, said threaded protrusion consisting of one long groove that sits like a helix on the

surface of the cylinder like eg on a bolt. The female snap means is complementarily configured with a thread on the inner side of the cylindrical hole, like on a nut having an interior thread.

- 5 Moreover, the constructions of the snap connection (21) and the two snap means (25, 35) are further shown in Figures 3 and 4, respectively.

The male snap means (25) comprises an exterior surface (26) and a cylindrical interior surface (27) and a free end (28). On the exterior surface
10 (26) of the male snap means (25), a spiral-shaped protrusion (24) is arranged at the free end (28).

The female snap means (35) also comprises a cylindrical exterior surface (36) and an interior surface (37) and a free end (38). The female snap means
15 (35) is configured with at least one spiral-shaped protrusion (34) on the interior surface (37) of the tubular female snap means (35) that creates a groove corresponding to the complementary configuration of the at least one spiral-shaped protrusion (24) on the exterior surface (26) of the male snap means (25). The spiral-shaped protrusion extends two rounds in the shown
20 embodiment.

In figures 3 and 4, the two tubular snap means, the female snap means (35) and the male snap means (25), respectively, are shown separate and interconnected to form a snap connection (21).

25

The exterior surface of the male snap means (25) is configured such that the largest diameter of the exterior surface is positioned at the shell part (20) opposite the free end (28), whereas the outer diameter of male snap means (25) is smallest at the free end (28). Likewise, the interior surface of the
30 female snap means (35) is configured such that the smallest diameter is positioned at the shell part (30), and wherein the internal diameter of the

female snap means (35) is largest at the free end (38) of the female snap means (35).

5 The tubular male snap means (25) comprises a cylindrical cavity formed by the interior surface (27). The configuration of that cavity is illustrated as a frusto-conical cavity with smallest diameter closest to shell part (20) and largest diameter at the free end (28).

10 The exterior surface (36) of the female snap means (35) is illustrated in figure 3 with a cylindrical, uniform diameter. According to a further embodiment, the exterior surface (36) of the female snap means is frusto-conical with the smallest diameter at the free end (38) of the female snap means (35).

CLAIMS:

1. A structure comprising two shell parts, wherein the two shell parts comprise a first shell part and a second shell part, which are connected to each other with at least one snap connection, wherein the two shell parts comprise, on the inner side, mutually complementary male and female snap means configured to form the at least one snap connection, and wherein the two shell parts have complementarily configured abutment faces that abut on each other when the male and female snap means are interconnected, wherein the male and female snap means comprise an external spiral-shaped protrusion configured on the male snap means, and a thereto complementarily configured, internal, spiral-shaped protrusion configured on the female snap means, and wherein the external spiral-shaped protrusion on the male snap means is configured such that the external spiral-shaped protrusion engages with the internal spiral-shaped protrusion on the female snap means; and wherein the structure comprises rotation-preventive means configured such that the two shell parts are unable to rotate relative to each other when the male and female snap means are interconnected to form at least one snap connection.
2. The structure according to claim 1, wherein the at least one snap connection comprises at least two snap connections such that the two shell parts cannot rotate relative to each other when the male and female snap means are interconnected.
3. The structure according to claim 1 or 2, wherein each of the two shell parts comprises a periphery, and wherein each of the two shell parts along the periphery comprises the complementarily configured abutment faces in the form of flanges or recesses such that the two shell parts cannot rotate relative to each other when the male and female snap means are interconnected.
4. The structure according to any one of claims 1-3, wherein the male snap means comprises a tubular protrusion with an exterior surface, wherein an external diameter of the exterior surface of the male snap means is smallest at a free end of the male snap means opposite the first shell part.

5. The structure according to any one of claims 1-3, wherein the male snap means comprises an interior surface which is either a cylindrical cavity of uniform diameter or a frusto-conical cavity with smallest diameter closest to the first shell part and largest diameter at a free end of the male snap means.

5

6. The structure according to claim 4, wherein the male snap means comprises an interior surface which is either a cylindrical cavity of uniform diameter or a frusto-conical cavity with smallest diameter closest to the first shell part and largest diameter at the free end of the male snap means.

10

7. The structure according to any one of claims 1-6, wherein the female snap means comprises complementary construction relative to the male snap means for forming a snap connection, wherein the female snap means comprises a tubular protrusion comprising an interior surface; wherein an internal diameter of the interior surface of the female snap means is smallest at the second shell part and largest at a free end of the female snap means opposite the second shell part.

15

8. The structure according to any one of claims 1-6, wherein the female snap means comprises an exterior surface which is either cylindrical with a uniform diameter or frusto-conical with a smallest diameter at a free end of the female snap means.

20

9. The structure according to claim 7, wherein the female snap means comprises an exterior surface which is either cylindrical with a uniform diameter or frusto-conical with a smallest diameter at the free end of the female snap means.

25

10. The structure according to any one of claims 1-9, wherein the structure comprises one or more coupling means configured for interconnection with toy building elements comprising complementarily configured coupling means.

30

11. The structure according to any one of claims 1-10, wherein the structure is configured from a plastics material and made by injection moulding.

FIG 1

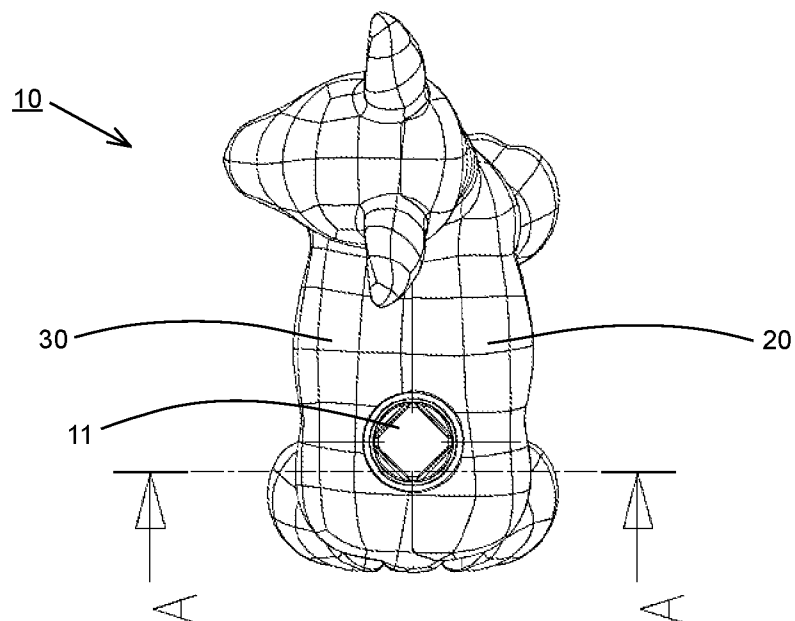
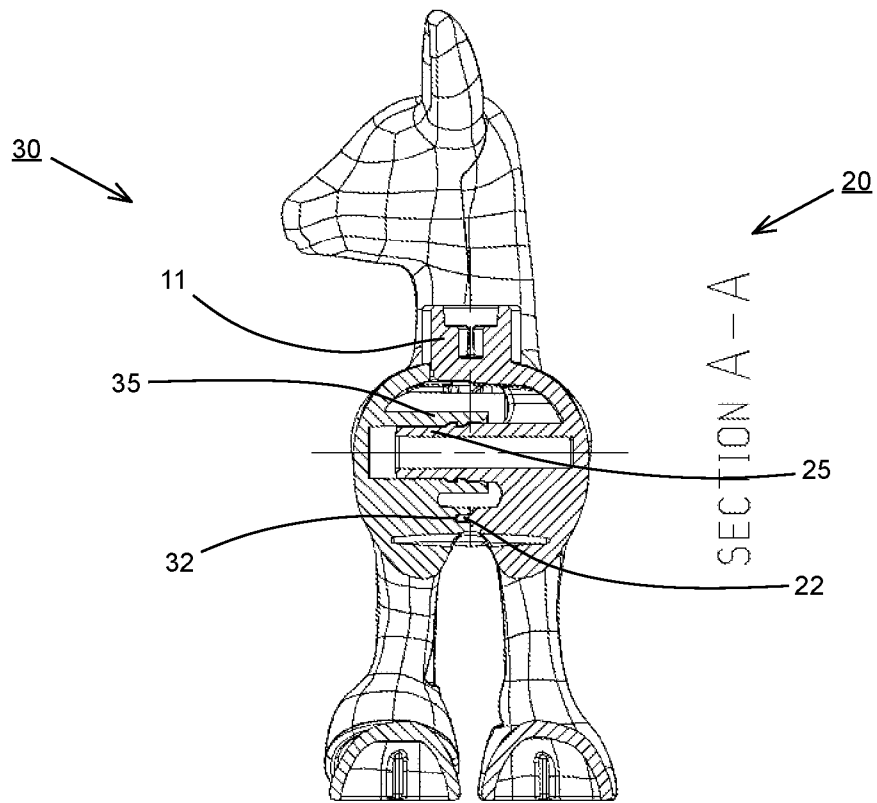


FIG. 2

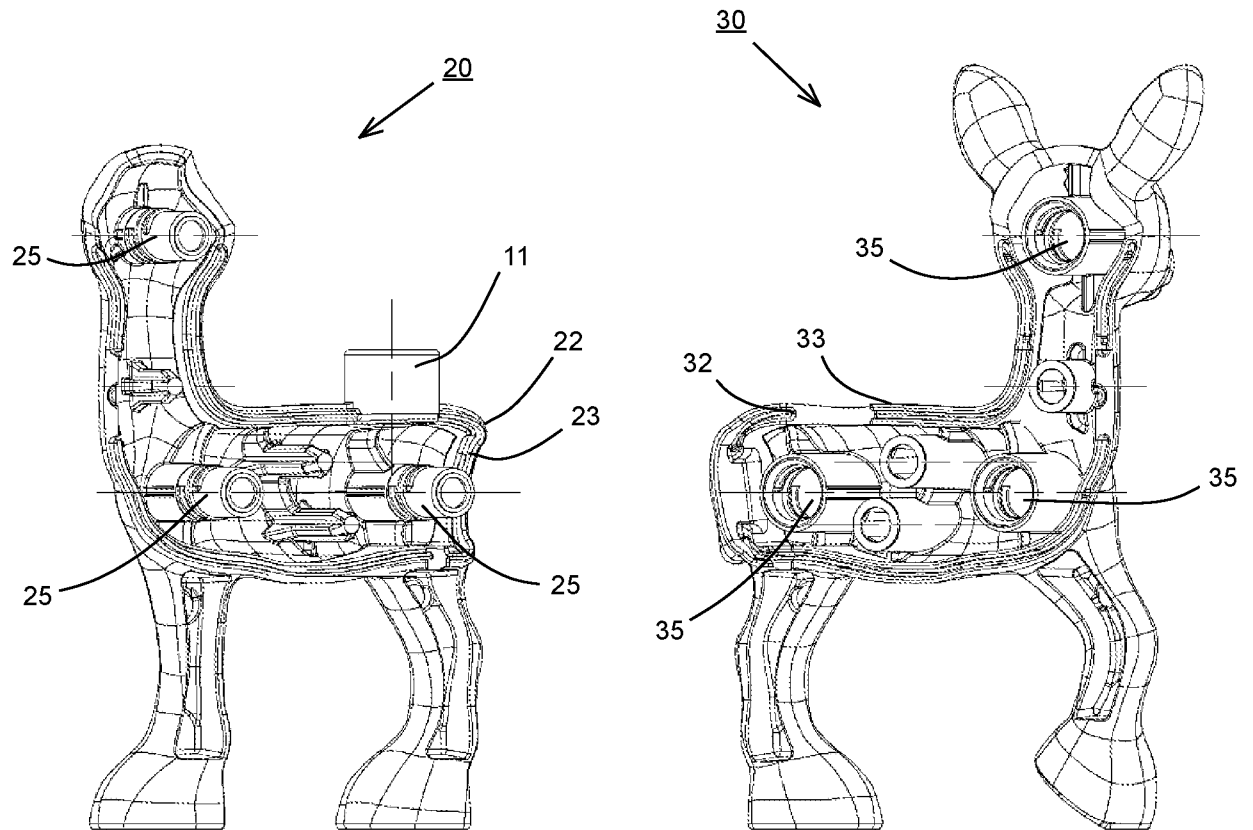


FIG. 3


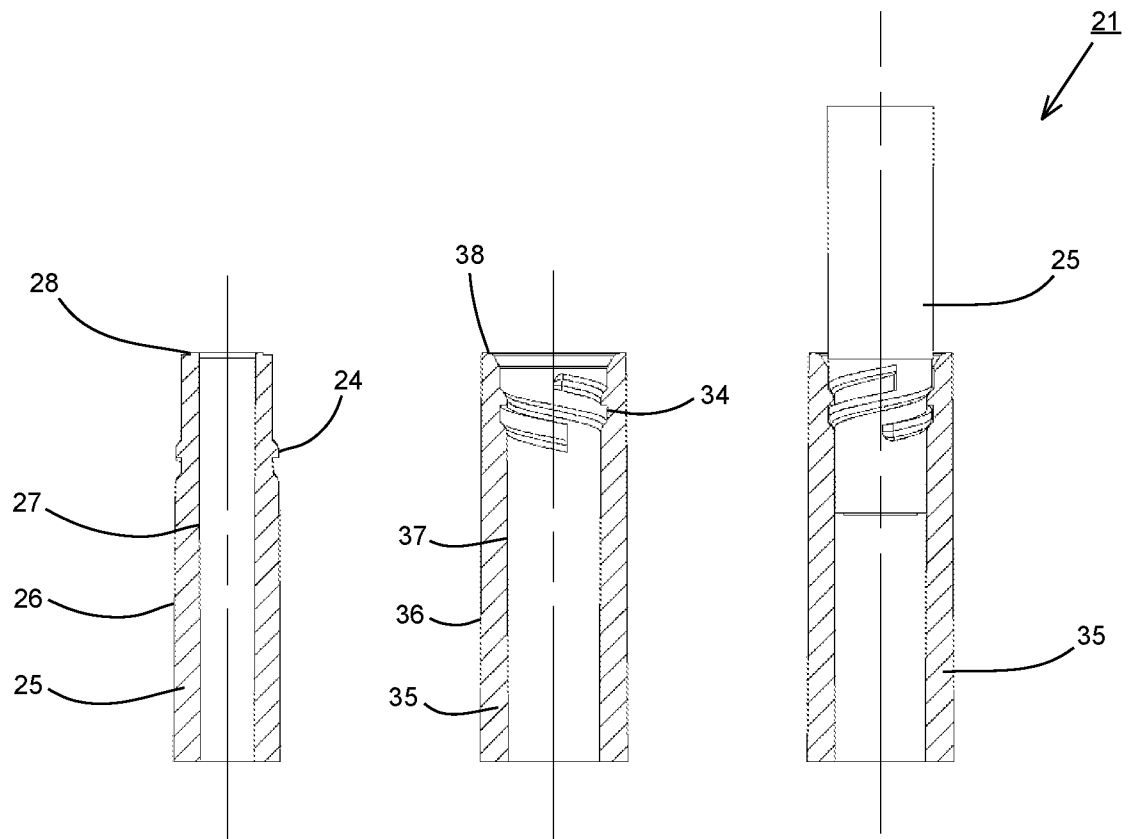


FIG. 4

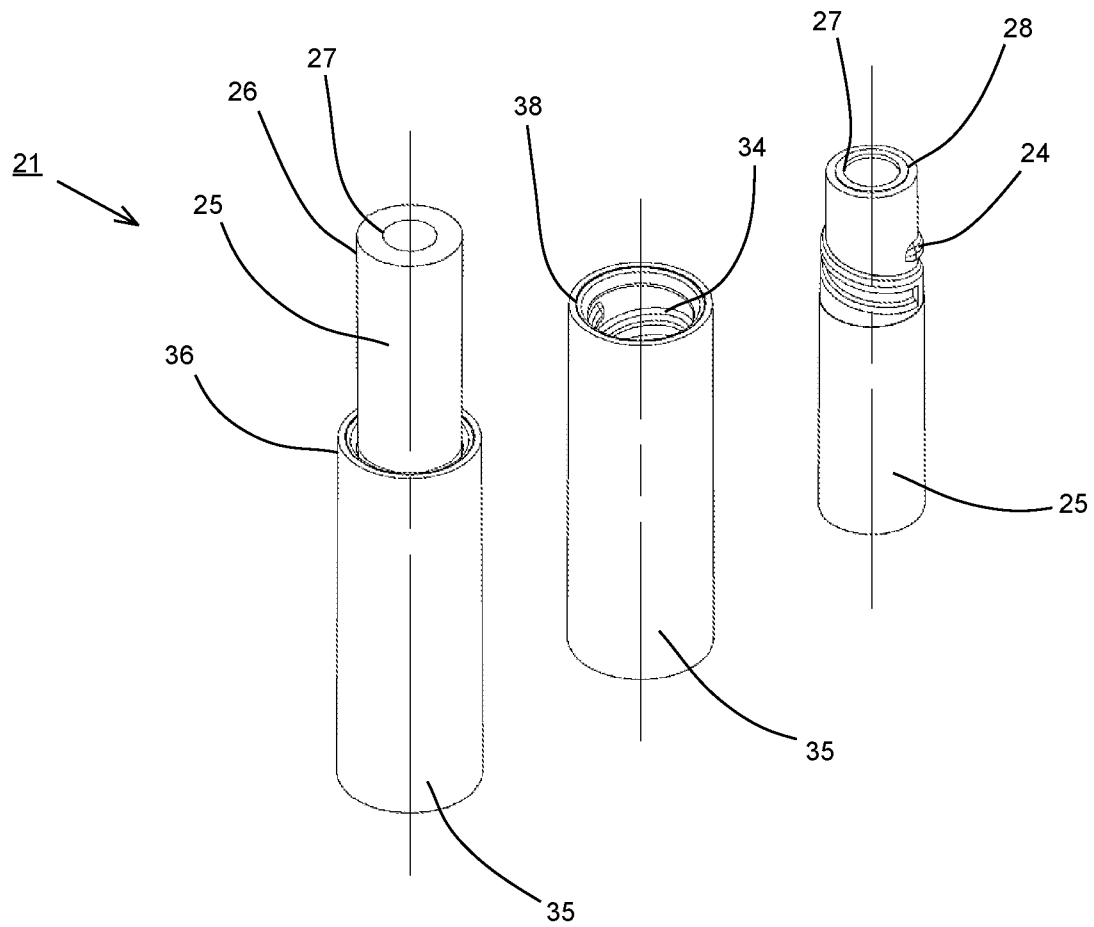

30

20

11

35

32

SECTION A-A

25

22

