




- (51) **International Patent Classification:**
H04R 19/00 (2006.01) *H04R 3/06* (2006.01)
- (21) **International Application Number:**
PCT/US2016/013859
- (22) **International Filing Date:**
19 January 2016 (19.01.2016)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
62/105,900 21 January 2015 (21.01.2015) US
- (71) **Applicant:** KNOWLES ELECTRONICS, LLC
[US/US]; 1151 Maplewood Drive, Itasca, Illinois 60143 (US).
- (72) **Inventors:** QUTUB, Sarmad; 681 Castlereia Lane, Des Plaines, Illinois 60016 (US). POPPER, Robert; 1011 Salim Place, Lemont, Illinois 60439 (US). KHAMHARN, Oddy; 212 Westmore Meyers Road, Lombard, Illinois 60148 (US).
- (74) **Agents:** SMITH, Troy, D. et al.; Foley & Lardner LLP, 3000 K Street, NW, 6th Floor, Washington, DC 20007-5109 (US).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

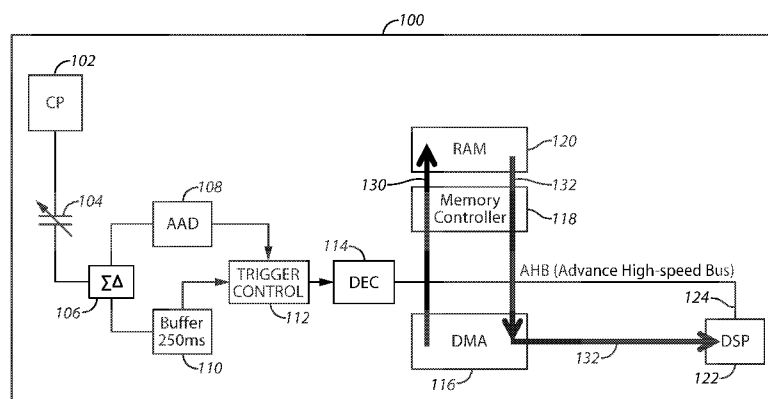(54) **Title:** LOW POWER VOICE TRIGGER FOR ACOUSTIC APPARATUS AND METHOD**FIG. 1**

(57) **Abstract:** An analog signal is received from an acoustic transducer. The analog signal is converted into digital data. A determination is made as to whether acoustic activity exists within the digital data. The digital data is stored in a temporary memory storage device and a count is maintained of an amount of digital data in the temporary memory storage device. When the count exceeds a predetermined threshold, at least some of the digital data is transmitted from the temporary memory storage device to a processor.

LOW POWER VOICE TRIGGER FOR ACOUSTIC APPARATUS AND METHOD**CROSS-REFERENCE TO RELATED APPLICATION**

[0001] This patent claims benefit under 35 U.S.C. §119(e) to United States Provisional Application No. 62/105,900 entitled “Low Power Voice Trigger for Acoustic Apparatus and Method” filed January 21, 2015, the content of which is incorporated herein by reference in its entirety.

TECHNICAL FIELD

[0002] This application relates to acoustic devices and, more specifically, to the operation of these devices.

BACKGROUND OF THE INVENTION

[0003] Different types of acoustic devices have been used through the years. One type of device is a microphone. In a microelectromechanical system (MEMS) microphone, a MEMS die includes a diaphragm and a back plate. The MEMS die is supported by a substrate and enclosed by a housing (e.g., a cup or cover with walls). A port may extend through the substrate (for a bottom port device) or through the top of the housing (for a top port device). In any case, sound energy traverses through the port, moves the diaphragm and creates a changing potential of the back plate, which creates an electrical signal. Microphones are deployed in various types of devices such as personal computers or cellular phones.

[0004] Microphones are used in various applications that utilize voice trigger applications. In previous approaches, an acoustic activity detector detects a voice signal and sends out a signal to wake up a digital signal processor (DSP) for the detection of key phrases in the voice. Once the key phrase is found, all input speech data can be processed. Consequently, any time that the acoustic activity detector is triggering, the DSP is constantly searching for key

phrases using power. Mobile and wearable devices have small batteries and can easily deplete these power levels are drained by the repeated triggering described above.

[0005] The problems of previous approaches have resulted in some user dissatisfaction with these previous approaches.

BRIEF DESCRIPTION OF THE DRAWINGS

[0006] For a more complete understanding of the disclosure, reference should be made to the following detailed description and accompanying drawings wherein:

[0007] FIG. 1 comprises a block diagram of a microphone that provides a low power operation for voice trigger operations according to various embodiments of the present invention;

[0008] FIG. 2 comprises a block diagram of state transition diagram showing the operation of a microphone that provides a low power operation for voice trigger operations according to various embodiments of the present invention;

[0009] FIG. 3 comprises a graph that shows power consumption levels during the operation of a microphone that provides a low power operation for voice trigger operations according to various embodiments of the present invention.

[0010] Skilled artisans will appreciate that elements in the figures are illustrated for simplicity and clarity. It will further be appreciated that certain actions and/or steps may be described or depicted in a particular order of occurrence while those skilled in the art will understand that such specificity with respect to sequence is not actually required. It will also be understood that the terms and expressions used herein have the ordinary meaning as is accorded to such terms and expressions with respect to their corresponding respective areas of inquiry and study except where specific meanings have otherwise been set forth herein.

DETAILED DESCRIPTION

[0011] The present approaches provide approaches for the low power operation of a microphone during voice triggering applications. The output of the acoustic activity detector inside of the microphone is stored in internal memory (e.g., a random access memory (RAM)) via direct memory access (DMA) techniques. When the memory device reaches a predetermined capacity, a digital signal processor (DSP) (or other processing device) is woken up and the stored data is clocked from the internal memory device to the DSP via DMA (e.g., at a high frequency) via some data bus (e.g., an advanced high-speed bus (AHB)).

[0012] Power consumption is reduced (especially in noisy environments) because in the approaches presented herein the DSP is periodically activated for processing small fragments of data very quickly to determine if a key phrase was detected. Also, the system is enabled to deactivate the DSP at times when acoustic activity is detected. Additionally, the present approaches allow for the periodic wake up and sleep of the DSP in noisy environments when the acoustic activity detector (AAD) would (in previous systems) be triggering.

[0013] In many of these embodiments, microphone output triggered by an acoustic activity detector (AAD) is clocked into memory. When the data input into the memory reaches a predetermined value, the data is clocked out of the memory at a high frequency to a digital signal processor (DSP) via a data bus. If any part of a predetermined phrase is found by the DSP, the DSP processes more data stored in the memory to determine if the key phrase was received. If the entire phrase is recovered, the entire system (e.g., the DSP and associated consumer electronic devices it may be coupled to) is awakened. If the entire phrase is not recovered, the DSP returns to a sleep (low power) mode of operation.

[0014] Referring now to FIG. 1, one example of a microphone (or microphone assembly) 100 is described. The microphone 100 includes a charge pump 102, a microelectromechanical system (MEMS) device 104, a sigma delta converter 106, an acoustic activity detector (AAD) module 108, a buffer 110, a trigger control module 112, a decimator 114, a direct memory access (DMA) control module 116, a memory controller 118, a memory 120 (e.g., a RAM), and a digital signal processor (DSP) 122. It will be appreciated that at least some of these components

may be disposed on an application specific integrated circuit (ASIC). It will also be appreciated that other sound transducers such as piezoelectric devices or others may be used in place of the MEMS device.

[0015] The charge pump 102 is a voltage or current source that is used to charge the MEMS device 104. The MEMS device 104 includes a diaphragm and a back plate, and converts sound energy into electrical signals. The sigma delta converter 106 converts analog electrical signals into pulse density modulation (PDM) data.

[0016] The AAD module 108 determines whether voice is detected in the incoming signal from the MEMS device 104. These functions may be accomplished by various techniques known to those skilled in the art. The buffer 110 stores data, and in one example provides 250ms of delay. The trigger control module 112 is triggered to release data when human voice is detected by the AAD module 108. The decimator 114 converts the PDM data into PCM data. The DMA control module 116 controls the flow of data to and from the memory 120, and to the DSP 122. The memory controller 118 keeps a record of the amount of data that the DMA control module has loaded into the memory 120 and informs the DMA control module 116 when this amount exceeds a predetermined value. The DSP 122 determines whether particular trigger words or phrases are present in the data.

[0017] It will be appreciated that these elements may be implemented in any combination of computer hardware and/or software. For instance, many if not all of these elements may be implemented using computer instructions executed on a processor. It will be further appreciated that these components may be disposed within a single assembly or covering structure.

[0018] In one example of the operation of the system of FIG. 1, charge pump 102 charges the MEMS device 104, which converts sound energy to an analog electrical signal. The analog electrical signal is converted into a digital PDM signal by the sigma delta converter 106. The converted signal is stored in the buffer 110. The AAD module 108 detects the presence of human voice in the signal and triggers the trigger control module 112 to release the data in the buffer 110 to the decimator 114. The decimator 114 converts the data into pulse code modulation (PCM) data. The DMA control module stores the data into memory 120 (shown by

path labeled 130). The memory controller 118 monitors the amount of data that has been stored in the memory 120. When the amount reaches a predetermined value, the DMA causes data to be transmitted in a burst from the memory 120 to the DSP 122 (this data flow is indicted by the arrows labeled 132). This data transfer is accomplished by a bus 124, which in one example is an advanced high-speed bus (AHB). Other examples are possible.

[0019] The DSP 122 looks for any part of the key phrase. If any part is detected (even if in the later half of the phrase), the DSP 122 looks further back in the data to see if the beginning of the phrase was recorded to correlate for key word recognition. The above steps may be repeated if the memory 120 reaches the predetermined threshold again. It will be appreciated that various types of digital data (e.g., PDM, PCM and SoundWire).

[0020] Referring now to FIG. 2, one example of a state transition diagram showing microphone operation is described. It will be appreciated that the state transitions shown in FIG. 2, utilize the components shown in FIG. 1. In this example, the system moves between a sensing mode state 202, a write-to-RAM state 204, a wake-up state 206, a key phrase recognition state 208, a look-back state 210, and a system wake-up state 212. At steps 202 and 204 the DSP is asleep.

[0021] Beginning with state 202, the system senses sound energy, for example, using a MEMS device (but other transducers such as piezoelectric transducers can also be used). When voice activity is determined by the AAD module, control moves to state 204 where the data is written to memory, for example, a RAM.

[0022] When RAM reaches a predetermined capacity, control continues at step 206, where the DSP is woken up and a burst of data is transmitted from the RAM to the DSP using the DMA control module and a data bus. When the DSP receives the data, control continues at step 208, where key phrase recognition is performed. When no part of the predetermined key phrase is determined, control returns to step 202. When part of the phrase is determined, control continues with step 210.

[0023] At step 210, the DSP looks back in RAM for the entire phrase (assuming step 208 did not find the whole phrase). If the rest of the phrase is not found, control returns to step 202.

If the phrase is found, the system is woken up to perform further processing since the key phrase was found.

[0024] Referring now to FIG. 3, one example of a graph showing the power levels used by the present approaches is described. As shown, DSP power amounts consumed (represented by the upwardly extending bars 302) represent the power used by the DSP when DMA transfer is used as described herein. The boxes labeled 304 represent power not used or consumed in the present approaches, but consumed in previous approaches (i.e., when DMA transfer was not used). The power amounts 304 are not consumed by the approaches described here because the DSP is not activated all the time (or most of the time) and searching for key phrases. In other words, power amounts 304 were used in previous systems, but not in the present approaches.

[0025] It will be appreciated that while the higher frequency processing of greater amounts of data will require more power at some small intervals in time, it will allow the processing of data in significantly less periods of time. And, this mode of operation uses significantly less power than previous approaches.

[0026] Put another way, although the peak values of amounts 302 are higher than the peak value of power amounts 304, peak values 302 are consumed over very small periods or intervals of time, while power amounts 304 are consumed over comparatively much greater and longer periods or intervals of time. Thus, the total power consumed by power amounts 302 is significantly less than the power consumed by amounts 304.

[0027] Also, this mode of operation requires significantly less power consumption than previous voice triggers in noisy situations or environments when ambient noise levels are constantly triggering the AAD module.

[0028] Preferred embodiments of this invention are described herein, including the best mode known to the inventors for carrying out the invention. It should be understood that the illustrated embodiments are exemplary only, and should not be taken as limiting the scope of the invention.

WHAT IS CLAIMED IS:

1. A method, comprising:

receiving an analog signal from an acoustic transducer;

converting the analog signal into digital data;

determining whether acoustic activity exists within the digital data;

when acoustic activity exists, storing the digital data in a temporary memory storage device and maintaining a count of an amount of digital data in the temporary memory storage device;

when the count exceeds a predetermined threshold, transmitting at least some of the digital data from the temporary memory storage device to a processor.
2. The method of claim 1, wherein the acoustic transducer is a micro electro mechanical system (MEMS) transducer.
3. The method of claim 1, further comprising storing at least some of the digital data in a buffer.
4. The method of claim 1, wherein the transmitting occurs over a high speed data bus.
5. The method of claim 1, wherein the temporary memory device is a random access memory (RAM).

6. The method of claim 1, wherein the digital data is PDM data at some places in a signal path.

7. The method of claim 1, wherein digital data is PCM data at some places in a signal path.

8. The method of claim 1, wherein the digital data is SoundWire data at some places in a signal path.

9. An apparatus, comprising:

- an acoustic transducer that is configured to convert acoustic energy into an analog signal;
- a converter coupled to the acoustic transducer that is configured to convert the analog signal into digital data;
- an acoustic activity detection (AAD) module that is coupled to the converter and configured to determine whether acoustic activity exists within the digital data, and when acoustic activity exists, causes transmission of the digital data;
- a temporary memory storage device coupled to the converter;
- a direct memory access (DMA) controller that causes the digital data to be stored in the temporary memory storage device;
- a memory controller coupled to the DMA controller, the temporary memory storage device, and the converter, the memory controller being configured to maintain a count of an amount of digital data in the temporary memory storage device;

such that when the count exceeds a predetermined threshold, the DMA controller causes the transmission of at least some of the digital data from the temporary memory storage device to a processor.

10. The apparatus of claim 9, wherein the acoustic transducer is a micro electro mechanical system (MEMS) transducer.

11. The apparatus of claim 9, further comprising a buffer configured to store at least some of the digital data.

12. The apparatus of claim 9, wherein the DMA controller, memory controller, converter, and processor are coupled via a high speed data bus.

13. The apparatus of claim 9, wherein the temporary memory device is a random access memory (RAM).

14. A method of operating an acoustic device, comprising:

sensing sound energy and converting the sound energy into data;

when acoustic activity is detected in the data, storing the data in a temporary memory storage device;

when the amount of data stored in the temporary memory storage device exceeds a predetermined threshold, waking up a digital signal processor and transmitting at least some of the data in a burst from the temporary memory storage device to the digital signal processor; and

at the digital signal processor, deterring whether a keyword is present in the data.

15. The method of claim 14, when a part of a keyword is found in the data, accessing the temporary memory storage device to determine whether the remaining part of the phrase is present.

16. The method of claim 15, further comprising when the whole phrase is detected in the data, activating the digital signal processor.

17. The method of claim 14, wherein the temporary memory device is a random access memory (RAM).

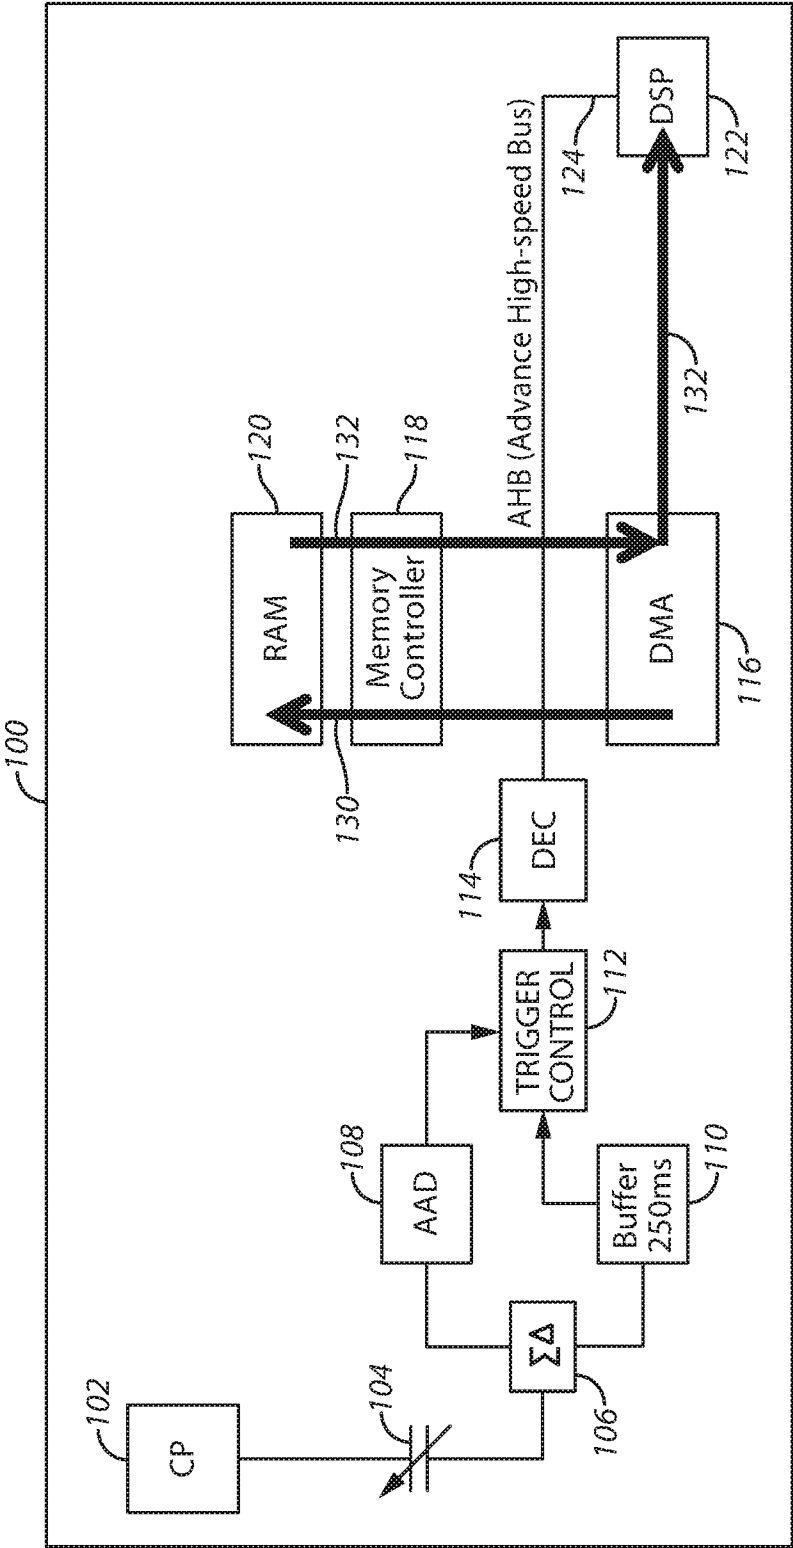


FIG. 1

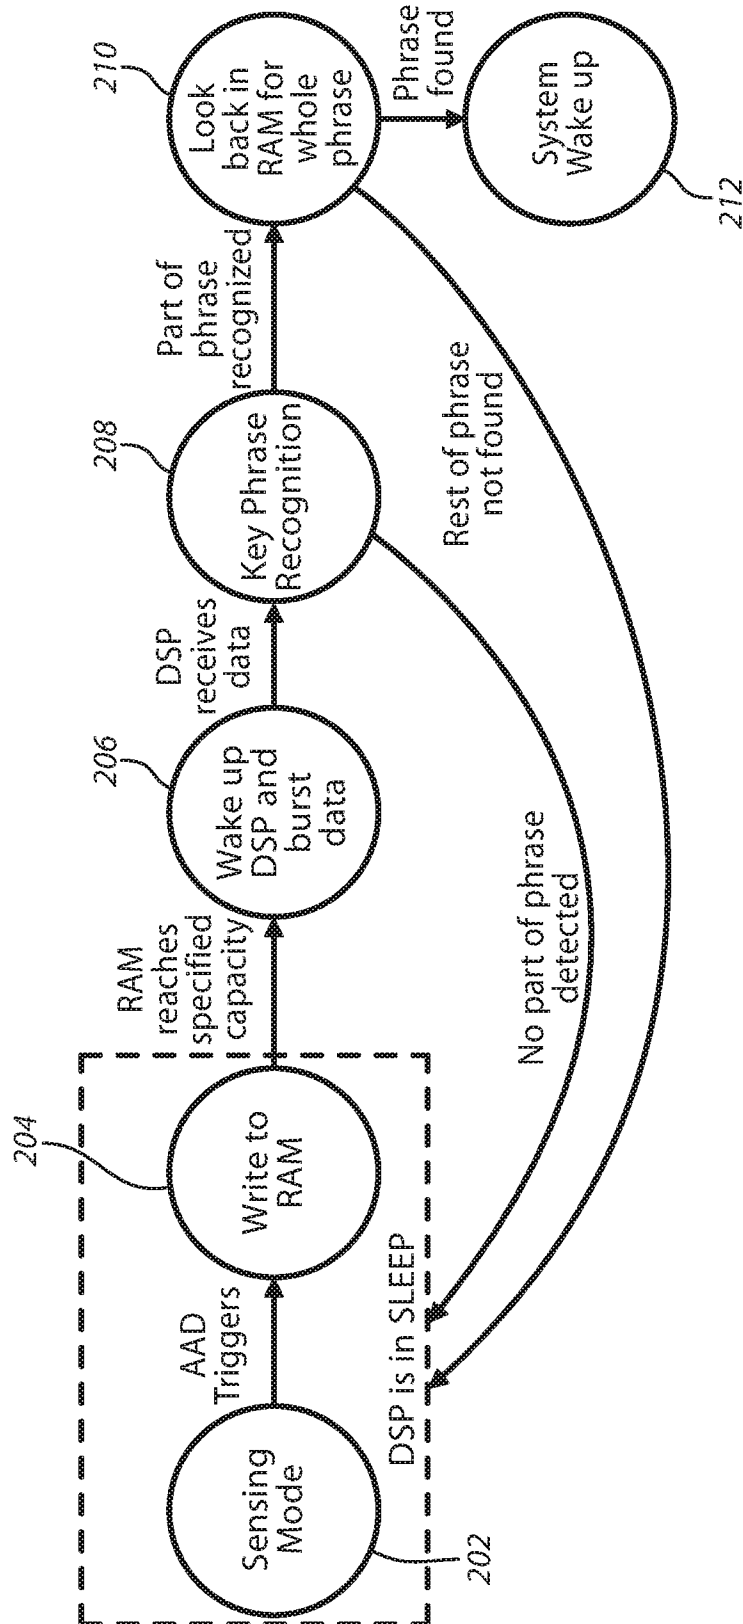


FIG. 2

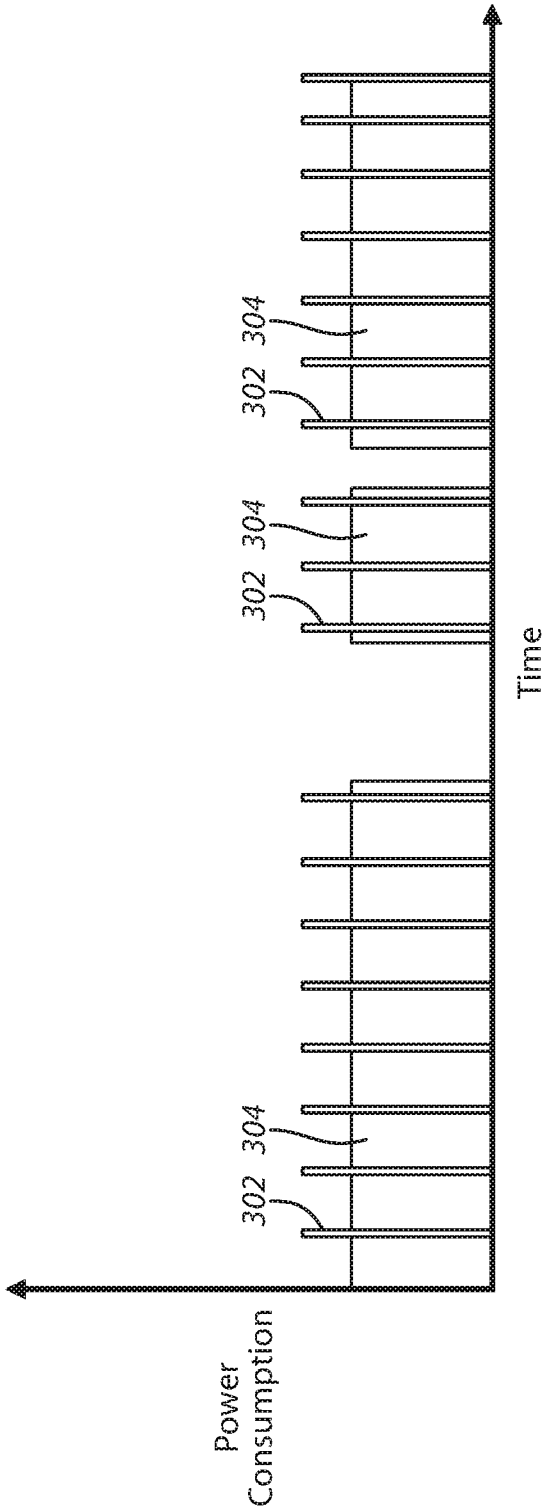


FIG. 3

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2016/013859**A. CLASSIFICATION OF SUBJECT MATTER****H04R 19/00(2006.01)i, H04R 3/06(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H04R 19/00; G10L 15/00; H04R 3/00; H04R 1/00; H03F 3/60; G06F 1/32; G10L 15/28; H04R 3/06

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: memory, storage, analog, digital, microphone, transducer, bus, speed, signal, pulse, modulation, converter

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2014-0348345 A1 (KNOWLES ELECTRONICS, LLC.) 27 November 2014 See paragraphs [0023]-[0053] and figures 1-5.	1-17
Y	US 2010-0131783 A1 (CHIH-HAO WENG et al.) 27 May 2010 See paragraphs [0005]-[0012], [0026]-[0033] and figures 4-6.	1-17
A	US 2014-0188470 A1 (JENNY CHANG et al.) 03 July 2014 See abstract, paragraphs [0025]-[0043] and figures 1-6.	1-17
A	US 2014-0064523 A1 (MICHAEL KROPFITSCH et al.) 06 March 2014 See abstract, paragraphs [0015]-[0030] and figures 1-2.	1-17
A	JP 2004-219728 A (MATSUSHITA ELECTRIC INDUSTRY CO., LTD.) 05 August 2004 See abstract, paragraphs [0014]-[0020] and figures 1-4.	1-17



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

28 April 2016 (28.04.2016)

Date of mailing of the international search report

29 April 2016 (29.04.2016)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office


189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

KIM, Sung Gon

Telephone No. +82-42-481-8746



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2016/013859

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2014-0348345 A1	27/11/2014	US 2015-0055799 A1 US 2015-0055803 A1 US 2015-0058001 A1 US 2015-043755 A1 US 2015-350774 A1 US 9111548 B2 US 9113263 B2 WO 2014-189931 A1 WO 2015-069878 A1	26/02/2015 26/02/2015 26/02/2015 12/02/2015 03/12/2015 18/08/2015 18/08/2015 27/11/2014 14/05/2015
US 2010-0131783 A1	27/05/2010	US 8412866 B2	02/04/2013
US 2014-0188470 A1	03/07/2014	None	
US 2014-0064523 A1	06/03/2014	CN 103686576 A DE 102013216305 A1 KR 10-2014-0029293 A US 9214911 B2	26/03/2014 06/03/2014 10/03/2014 15/12/2015
JP 2004-219728 A	05/08/2004	None	