



(86) Date de dépôt PCT/PCT Filing Date: 2002/11/15  
 (87) Date publication PCT/PCT Publication Date: 2003/05/30  
 (45) Date de délivrance/Issue Date: 2012/04/24  
 (85) Entrée phase nationale/National Entry: 2004/05/12  
 (86) N° demande PCT/PCT Application No.: US 2002/036782  
 (87) N° publication PCT/PCT Publication No.: 2003/045106  
 (30) Priorité/Priority: 2001/11/16 (US09/991,506)

(51) Cl.Int./Int.Cl. *H04W 12/02* (2009.01),  
*H04B 1/69* (2011.01), *H04L 9/22* (2006.01),  
*H04W 88/02* (2009.01), *H04W 88/08* (2009.01)


(72) Inventeurs/Inventors:  
 JAROSINSKI, TAD, US;  
 AGRE, DANIEL H., US;  
 CARTER, STEPHEN S., US;  
 IRANINEJAD, MEHRABAN, US;  
 ODENWALDER, JOSEPH P., US;  
 QUICK, ROY FRANKLIN, US;  
 WHEATLEY, CHARLES E., US

(73) Propriétaire/Owner:  
 QUALCOMM INCORPORATED, US

(74) Agent: SMART & BIGGAR

(54) Titre : CHIFFRAGE D'UNE SEQUENCE DE PSEUDO-BRUIT (PB) AVANT ETALEMENT D'UN SIGNAL DE COMMUNICATION

(54) Title: ENCRYPTING A PSEUDO-NOISE (PN) SEQUENCE BEFORE SPREADING A COMMUNICATION SIGNAL

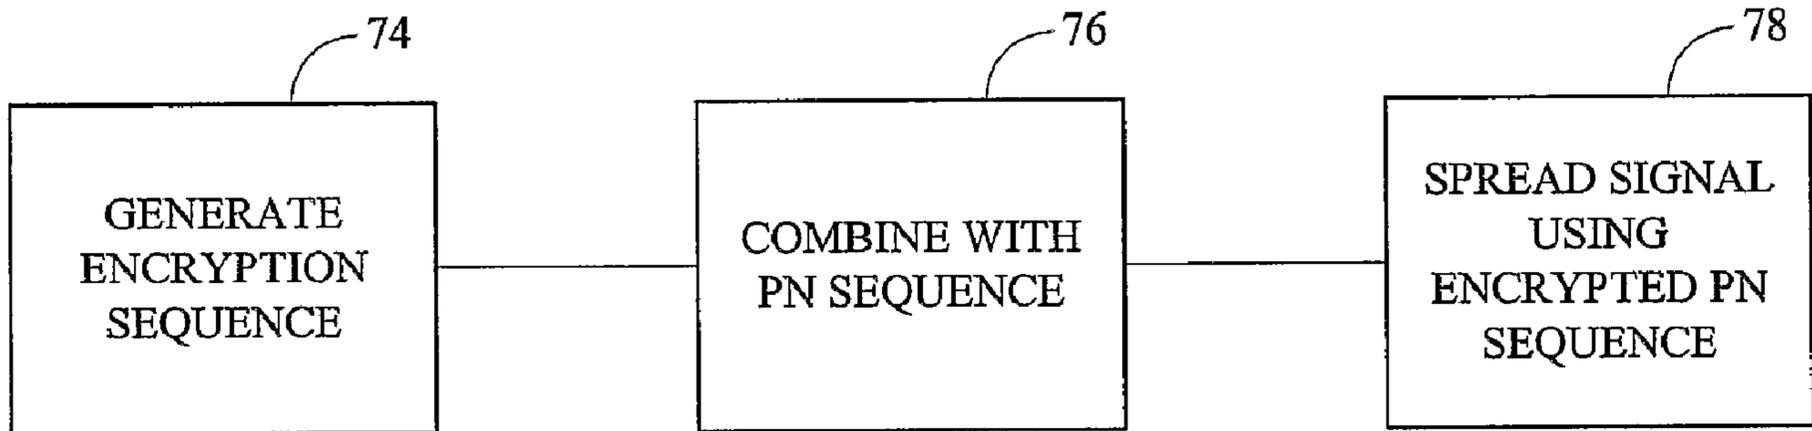

(57) Abrégé/Abstract:

A system and method for encrypting all channels of a wireless spread spectrum communication at the chip level. The PN sequence is encrypted with one or more encryption sequences and then used to spread the signal.

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau




(43) International Publication Date  
30 May 2003 (30.05.2003)

PCT

(10) International Publication Number  
**WO 03/045106 A1**

- (51) International Patent Classification<sup>7</sup>: **H04Q 7/38**, H04L 9/22
- (74) Agents: **WADSWORTH, Philip R.** et al.; QUALCOMM Incorporated, 5775 Morehouse Drive, San Diego, CA 92121 (US).
- (21) International Application Number: PCT/US02/36782
- (22) International Filing Date:  
15 November 2002 (15.11.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
09/991,506 16 November 2001 (16.11.2001) US
- (71) Applicant: **QUALCOMM INCORPORATED** [US/US];  
5775 Morehouse Drive, San Diego, CA 92121 (US).
- (72) Inventors: **JAROSINSKI, Tad**; 4165 Via Candidiz, #23, San Diego, CA 92130 (US). **AGRE, Daniel, H.**; 6937 Paseo Laredo, La Jolla, CA 92037 (US). **CARTER, Stephen, S.**; 8235 Hydra Lane, San Diego, CA 92126 (US). **IRANINEJAD, Mehraban**; 14946 Rancho Real, Del Mar, CA 92014 (US). **ODENWALDER, Joseph, P.**; 18176 Lago Vista, Rancho Santa Fe, CA 92067 (US). **QUICK, Roy, Franklin**; 1150 Barcelona Drive, San Diego, CA 92107 (US). **WHEATLEY, Charles, E.**; 570 Torrey Point Road, Del Mar, CA 92014 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**  
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ENCRYPTING A PSEUDO-NOISE (PN) SEQUENCE BEFORE SPREADING A COMMUNICATION SIGNAL

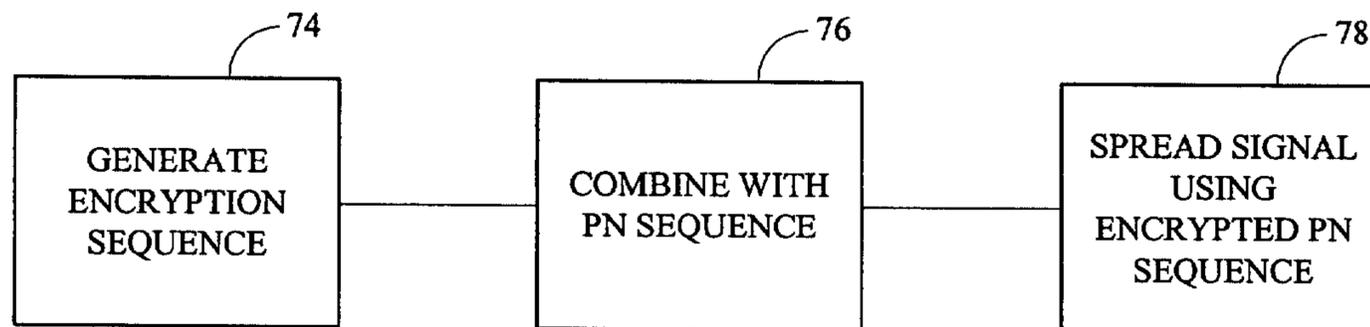

(57) Abstract: A system and method for encrypting all channels of a wireless spread spectrum communication at the chip level. The PN sequence is encrypted with one or more encryption sequences and then used to spread the signal.



WO 03/045106 A1

# ENCRYPTING A PSEUDO-NOISE (PN) SEQUENCE BEFORE SPREADING A COMMUNICATION SIGNAL

## FEDERAL RESEARCH STATEMENT

[0001] The U.S. Government has a paid-up license in this invention and the right in limited circumstances to require the patent owner to license others on reasonable terms as provided by the terms of Contract No. MDA904-99-9-0001 awarded by the National Security Agency (NSA).

### *I. Field of the Invention*

[0002] The present invention relates generally to the encryption of wireless communication, particularly as regards to spread spectrum communication such as but not limited CDMA and CDMA-type communications.

### *II. Background of the Invention*

[0003] Wireless terminals, such as but not limited to wireless telephones that communicate using Code Division Multiple Access (CDMA) spread spectrum modulation techniques, communicate over the air with system infrastructure using wireless over-the-air communication protocols, e.g., the CDMA protocols known as IS-95A, IS-95B, IS-2000, TD-SCDMA, Large Area Synchronous (LAS-CDMA), and W-CDMA. The system infrastructure, which can include base stations (BTS), base station controllers (BSC), and other components, connects the wireless terminal to another communication device, such as a land line or another wireless communication system.

[0004] To provide for secure communication using spread spectrum wireless systems, encryption principles can be used. For example, U.S. Patent No. 5,727,064 discloses a method for secure communication that encrypts frames of communication (the data symbols, or payload) using a nonlinear scrambler. The scrambler is coupled to the output of the long code generator to remove linearity from the long code sequence produced by the long code generator. Portions of the long code sequence subsequently are combined with the main data signal that is output by the bit interleaver, thereby encrypting frames of data prior to spreading the frames in accordance with spread spectrum communication principles.

[0005] According to the '064 patent, breaking a nonlinear encryption is more difficult to do than breaking an encryption using a linear scrambler. As recognized herein,

however, symbol-based encryption, even if nonlinear, remains vulnerable to eavesdropping because it is a relatively small and aligned data payload and is thus less cumbersome to break down and decrypt than a larger and non-aligned payload would be. Moreover, since the frames are encrypted in the above-mentioned patent, other system control channels, such as the synchronization and pilot channels are not encrypted. With the above considerations in mind, the present invention provides the solutions disclosed below.

### SUMMARY OF THE INVENTION

[0006] A method for encrypting spread spectrum wireless communication is disclosed in which the complex-valued scrambling code, e.g., a pseudorandom number (PN) sequence that is used for spreading or scrambling the signal, is encrypted by complex multiplication with data chip sequences. Hence, the present invention essentially encrypts the entire communication, at what amounts to the chip level. As a consequence, the entire communication and not just individual frames or symbols must be broken down and analyzed by an eavesdropper to break the encryption.

[0007] Accordingly, a method for secure wireless communication using spread spectrum principles includes generating at least one pseudorandom number (PN) sequence, and encrypting the PN sequence to render an encrypted PN sequence. Using the encrypted PN sequence, a communication signal is spread and encrypted as a by-product of the spreading operation.

[0008] In a preferred, non-limiting embodiment, the communication signal is received from data modulation circuitry that may include a Walsh modulator. The PN sequence can be encrypted by combining the PN sequence with an encryption sequence (for less preferred BPSK modulation) or two encryption sequences (in the case of QPSK modulation). More encryption sequences as necessary can be used for 8-PSK modulation, QAM-16 modulation, QAM-64 modulation, and so on.

[0009] In a particularly preferred, non-limiting embodiment, the encryption sequence is generated by a DES encryption, such as triple-DES. In this exemplary embodiment, the DES encryption receives input including at least one multi-bit key and at least one time-varying input, such as but not limited to a long code state. If desired, the key periodically can be refreshed.

74769-859

3

[0010] In another aspect, a wireless communication system includes a data modulation component that can include a channel coder that codes a communication signal for error correction to produce a coded signal, a bit interleaver for interleaving bits in the coded signal to produce an interleaved coded signal, and a Walsh modulator coupled to the bit interleaver to modulate the interleaved coded signal using a Walsh function. As set forth further below, a carrier modulator spreads the signal from the data modulation component with a pseudorandom number (PN) sequence that is encrypted with at least one encryption sequence.

According to one aspect of the present invention, there is provided a method for secure wireless communication using spread spectrum principles, comprising: generating at least one pseudorandom number (PN) sequence; generating at least one encryption sequence based on at least one of key and time-varying input; combining the PN sequence with said encryption sequence to render an encrypted PN sequence; and using the encrypted PN sequence to spread a communication signal.

According to another aspect of the present invention, there is provided an apparatus for secure wireless communication using spread spectrum principles, comprising: means for generating at least one pseudorandom number (PN) sequence; means for generating at least one encryption sequence based on at least one of key and time-varying input; means for combining the PN sequence with said encryption sequence to render an encrypted PN sequence; and means for using the encrypted PN sequence to spread a communication signal.

74769-859

3a

According to still another aspect of the present invention, there is provided an apparatus for secure wireless communication using spread spectrum principles, comprising: a pseudorandom number (PN) sequence generator  
5 configured to generate at least one PN sequence; an encryption sequence generator configured to generate at least one encryption sequence based on at least one of key and time-varying input and further configured to combine the PN sequence with the encryption sequence to render an  
10 encrypted PN sequence; and a spreader configured to use the encrypted PN sequence to spread a communication signal.

According to yet another aspect of the present invention, there is provided a processor for secure wireless communication using spread spectrum principles, said  
15 processor being configured to: generate at least one pseudorandom number (PN) sequence; generate at least one encryption sequence based on at least one of key and time-varying input; combine the PN sequence with said encryption sequence to render an encrypted PN sequence; and use the  
20 encrypted PN sequence to spread a communication signal.

According to a further aspect of the present invention, there is provided a computer-program product for secure wireless communication using spread spectrum principles, comprising: a computer-readable medium  
25 comprising instructions for causing a computer to: generate at least one encryption sequence based on at least one of key and time-varying input; combine the PN sequence with said encryption sequence to render an encrypted PN sequence; and use the encrypted PN sequence to spread a communication  
30 signal.

According to yet a further aspect of the present invention, there is provided a method for secure wireless

74769-859

3b

communication using spread spectrum principles comprising:  
generating at least one encryption sequence based on at  
least one of key and time-varying input; combining a PN  
sequence with the encryption sequence to render an encrypted  
5 PN sequence; and using the encrypted PN sequence to despread  
a received spread spectrum signal to render a despread  
signal.

According to still a further aspect of the present  
invention, there is provided an apparatus for secure  
10 wireless communication using spread spectrum principles  
comprising: an encryption sequence generator configured to  
generate at least one encryption sequence based on at least  
one of key and time-varying input; a PN sequence generator  
configured to combine a PN sequence with the encryption  
15 sequence to render an encrypted PN sequence; and a  
despreader configured to use the encrypted PN sequence to  
despread a received spread spectrum signal to render a  
despread signal.

According to another aspect of the present  
20 invention, there is provided an apparatus for secure  
wireless communication using spread spectrum principles  
comprising: means for generating at least one encryption  
sequence based on at least one of key and time-varying  
input; means for combining a PN sequence with the encryption  
25 sequence to render an encrypted PN sequence; and means for  
using the encrypted PN sequence to despread a received  
spread spectrum signal to render a despread signal.

According to yet another aspect of the present  
invention, there is provided a processor for secure wireless  
30 communication using spread spectrum principles, said  
processor being configured to: generate at least one  
encryption sequence based on at least one of key and time-

74769-859

3c

varying input; combine a PN sequence with the encryption sequence to render an encrypted PN sequence; and use the encrypted PN sequence to despread a received spread spectrum signal to render a despread signal.

5           According to another aspect of the present invention, there is provided a computer-program product for secure wireless communication using spread spectrum principles comprising: a computer-readable medium comprising instructions for causing a computer to: generate at least  
10 one encryption sequence based on at least one of key and time-varying input; combine a PN sequence with the encryption sequence to render an encrypted PN sequence; and use the encrypted PN sequence to despread a received spread spectrum signal to render a despread signal.

15           According to still another aspect of the present invention, there is provided a base station for secure wireless communication using spread spectrum principles, comprising: an antenna; a pseudorandom number (PN) sequence generator configured to generate at least one PN sequence;  
20 an encryption sequence generator configured to generate at least one encryption sequence based on at least one of key and time-varying input and further configured to combine the PN sequence with the encryption sequence to render an encrypted PN sequence; and a spreader configured to use the  
25 encrypted PN sequence to spread a communication signal transmitted over the antenna.

          According to yet another aspect of the present invention, there is provided a user terminal for secure wireless communication using spread spectrum principles,  
30 comprising: an antenna; a pseudorandom number (PN) sequence generator configured to generate at least one PN sequence; an encryption sequence generator configured to generate at

74769-859

3d

least one encryption sequence based on at least one of key and time-varying input and further configured to combine the PN sequence with the encryption sequence to render an encrypted PN sequence; and a spreader configured to use the encrypted PN sequence to spread a communication signal transmitted over the antenna.

According to a further aspect of the present invention, there is provided a base station for secure wireless communication using spread spectrum principles comprising: an antenna; an encryption sequence generator configured to generate at least one encryption sequence based on at least one of key and time-varying input; a PN sequence generator configured to combine a PN sequence with the encryption sequence to render an encrypted PN sequence; and a despreader configured to use the encrypted PN sequence to despread a spread spectrum signal received using the antenna to render a despread signal.

According to yet a further aspect of the present invention, there is provided a user terminal for secure wireless communication using spread spectrum principles comprising: an antenna; an encryption sequence generator configured to generate at least one encryption sequence based on at least one of key and time-varying input; a PN sequence generator configured to combine a PN sequence with the encryption sequence to render an encrypted PN sequence; and a despreader configured to use the encrypted PN sequence to despread a spread spectrum signal received using the antenna to render a despread signal.

- [0011] In yet another aspect, a computer program product includes means for encrypting a PN sequence, and means for providing the PN sequence to a spread spectrum communication device for use thereof in spreading or despreading a communication signal.
- [0012] In still another aspect, a chip for use in a communication device includes a data modulation component to produce a Walsh-modulated interleaved coded signal. A carrier modulator spreads the Walsh-modulated interleaved coded signal with a pseudorandom number (PN) sequence that is encrypted with at least one encryption sequence.
- [0013] In another aspect, a chip for use in a communication device includes a PN sequence generator receiving at least one encryption sequence. The PN sequence is combined with the encryption sequence and sent to a despreading component to despread a received spread spectrum communication signal using the combined sequence to render a despread signal. Additional components demodulate, deinterleave, and decode the signal.
- [0014] In another aspect, a method for secure wireless communication using spread spectrum principles includes receiving at least one encryption sequence, and using the encryption sequence to render an encrypted PN sequence. The method also includes using the encrypted PN sequence to despread a received spread spectrum signal to render a despread signal.
- [0015] The details of the present invention, both as to its structure and operation, can best be understood in reference to the accompanying drawings, in which like reference numerals refer to like parts, and in which:

**BRIEF DESCRIPTION OF THE DRAWINGS**

- [0016] Figure 1 is a block diagram of a presently preferred inventive wireless communication system;
- [0017] Figures 2A and 2B are block diagrams of the transmitting and receiving components, respectively, of a mobile station (MS) and/or the components of a base station (BTS) or other infrastructure component;
- [0018] Figure 3 is a block diagram of one preferred, non-limiting encryption sequence generator;
- [0019] Figure 4 is a schematic block diagram of a conventional mobile station that accesses a software layer to execute the present logic; and
- [0020] Figure 5 is flow chart of the present encryption logic.

**DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT**

- [0021] Referring initially to Figure 1, a system is shown, generally designated 10, for effecting communication between a wireless communication device 12, referred to herein as a "mobile station," and a telephony infrastructure 14 that includes, e.g., base stations (BTS) 16 (only one BTS 16 shown for clarity), base station controllers (BSC) 18, and additional infrastructure 20 in accordance with wireless communication principles known in the art.
- [0022] In accordance with the present invention, the system 10 uses spread spectrum techniques. Accordingly, the mobile station 12 can use an over the air (OTA) protocol such as CDMA or WCDMA to communicate with the infrastructure 14. In one non-limiting embodiment the mobile station 12 is a mobile telephone made by Kyocera, Samsung, or other manufacturer that uses Code Division Multiple Access (CDMA) principles and CDMA over-the-air (OTA) communication air interface and includes protocols such as defined in but not limited to IS-95A, IS-95B, WCDMA, cdma-2000, IX, IXEV-DO, EV-DV, TD-SDMA, LAS-CDMA, and others to communicate with the infrastructure 14. As is known in the art, IS-95A and IS-95B are examples of spread spectrum protocols that use BPSK data modulation, whereas WCDMA, as an example, is a spread spectrum protocols that uses QPSK data modulation, i.e., split data streams with "I" and "Q" branches.

[0023] For instance, the wireless communication systems to which the present invention can apply, in amplification to those noted above, include Personal Communications Service (PCS) and the following digital systems: CDMA, WCDMA, and hybrid Time Division Multiple Access (TDMA)/CDMA technologies. A CDMA cellular system is described in the Telecommunications Industry Association/Electronic Industries Association (TIA/EIA) Standard IS-95. Other communications systems are described in the International Mobile Telecommunications System 2000/Universal Mobile Telecommunications Systems (IMT-2000/UM), standards covering what are referred to as wideband CDMA (WCDMA), cdma2000 (such as, cdma2000 1x or 3x standards, for example), TD-SCDMA, or LAS-CDMA.

[0024] The present invention applies to any spread spectrum mobile station 12; for illustration it will be assumed that the mobile station 12 is a telephone. In general, wireless communication devices to which the present invention applies may include but are not limited to a wireless handset or telephone, a cellular phone, a data transceiver, or a paging and position determination receiver, and can be hand-held, or portable as in vehicle-mounted (including cars, trucks, boats, planes, trains), as desired. However, while wireless communication devices are generally viewed as being mobile, it is to be understood that the present invention can be applied to "fixed" units in some implementations. Also, the present invention applies to data modules or modems used to transfer voice and/or data information including digitized video information, and may communicate with other devices using wired or wireless links. Further, the present invention applies to wireless, peer-to-peer communications. Moreover, commands might be used to cause modems or modules to work in a predetermined coordinated or associated manner to transfer information over multiple communication channels simultaneously. Wireless communication devices are also sometimes referred to as user terminals, mobile stations, mobile units, subscriber units, mobile radios or radiotelephones, wireless units, or simply as "users" and "mobiles" in some communication systems.

[0025] Now referring to Figures 2A and 2B, the components of the MS 12 and/or BTS 16 can be seen. That is, either one or both of the MS 12 and BTS 16 can use the present encryption invention in transmission, i.e., either one or both of the uplink (transmissions from the MS 12) or downlink (transmissions from the BTS 16 to the MS 12) can be

encrypted with the same or different encrypted PN sequences. It should be noted that to further enhance security, frequency hopping may be employed. Also, not just the traffic channel, but other wireless channels such as pilot channels, synchronization or paging channels or access channels, can be encrypted. It is to be further understood that the BTS 16 can be combined in some systems with the BSC 18, or indeed in mobile switching center (MSC), gateway to a satellite system, or other infrastructure 14 component. Some or all of the components shown in Figure 2 can be embodied in a chip, generally designated 21, or in software as more fully disclosed below in relation to Figures 4 and 5.

[0026] As shown, the chip 21 can include a data modulation component 22 that can include one or more of the following. The component 22 can include a voice coder when the chip 21 is incorporated in a mobile station for encrypting an uplink. The voice coder functions in accordance with wireless communication principles known in the art to generate a data stream representative of a speaker's voice.

[0027] The data modulation component 22 can also include a channel coder that receives the data from the voice coder or other component and codes the signal for error correction in accordance with wireless communication principles known in the art. The coded signal is sent to a bit interleaver of the data modulation component 22 which rearranges the order of the bits to reduce the effect of burst errors. From the bit interleaver, the signal can be sent to a Walsh modulator (or spreader) which Walsh-modulates the signal in accordance with wireless communication principles known in the art by multiplying the signal with a Walsh function.

[0028] The Walsh-modulated signal is then sent to a carrier spreader, e.g., a quadrature carrier spreader or binary carrier spreader 30 which spreads the signal in accordance with spread spectrum communication principles known in the art using a PN sequence. Specifically, the spreader 30 uses an encrypted PN spreading sequence from a PN sequence generator 32 to spread and encrypt the signal. As discussed further below, the PN sequence generator 32 receives from an encryption sequence generator 34 an encryption sequence (when BPSK principles are used), or two encryption sequences (when QPSK principles are used), or as appropriate more than two sequences for 8 bit, 16 bit, and QAM systems. As discussed further below, the encryption sequence generator 34 receives keys.

[0029] Once spread and encrypted, the signal is sent to an impulse modulator 36 that receives a carrier signal to modulate the signal for transmission. The signal can be shaped by a wave shaper if desired and then sent to a transmitter for transmission using an antenna 42.

[0030] In addition to the above-described transmitter portion, the chip 21 can also include a receiver portion, if desired. That is, if desired both the uplink and downlink can be encrypted, or only one side of the communication channel need be encrypted. For completeness, Figure 2 shows a chip 21 that is configured with both a transmitter portion and receiver portion for two-way encryption.

[0031] Accordingly, a receiver antenna 44 is coupled to a processing/amplification component if desired in accordance with principles known in the art, and then the amplified signal is sent to an impulse demodulator 48 which receives a carrier signal for demodulation. The signal is then sent to a despreader 50 that can receive an encrypted PN sequence from the PN sequence generator 32 to despread the signal. It is to be understood that the encrypted PN sequence hypothesis for searching requires an a priori knowledge of estimated time from, e.g., GPS or other source of time information.

[0032] The signal is then processed by a data demodulation component 52 which can include a Walsh demodulator, a bit deinterleaver, and a channel decoder for respectively Walsh demodulating (or despreading) the signal, de-interleaving it, and decoding it in accordance with principles known in the art. When incorporated in a MS, the signal can be sent to a voice decoder to be transformed into an audible signal.

[0033] Having set forth the overall structure of one preferred, non-limiting chip 21, attention is now directed to Figure 3, which shows an exemplary encryption sequence generator. It is to be understood that while Figure 3 shows a circuit useful for QPSK encryption and, thus, shows two data streams and two encryption sequences, the principles of the present invention apply equally to BPSK (single stream) principles, as well as 8-PSK, 16-QAM, 64-QAM, and other schemes.

[0034] As shown, the spreader 30 can receive first and second data streams  $D_I$  and  $D_Q$  to produce respective first and second spread data streams using first and second encrypted PN sequences from the PN sequence generator 32. If desired, a HPSK component 53 can be interposed between the spreader 30 and PN sequence generator 32 to reduce peak to average performance. The first and second PN sequences are encrypted by combining

a PN sequence with first and second encryption sequences from the encryption sequence generator 34. In one non-limiting, exemplary embodiment, the combination is effected by an XOR operation, although other methods for combining the PN sequence with an encryption sequence can be used.

[0035] A presently preferred, non-limiting encryption sequence generator 34 is illustrated in Figure 3 as having a triple-DES component 60 which outputs first and second serial encryption sequences  $I_I$ ,  $I_Q$  based on one or more parallel bit inputs in accordance with triple-DES principles known in the art. Encryption components other than triple-DES, however, can be used.

[0036] In one illustrative, non-limiting embodiment, the inputs to the triple-DES can be any combination of select portions of a time varying input, such as but not limited to a long code state 62 with companion bits 64 if necessary, or any function thereof. Two sets of inputs such as but not limited to companion bits can be used to respectively establish the first and second encryption sequences  $I_I$ ,  $I_Q$ . Multiple sets of inputs can be used to establish the encryption sequences for a forward link  $I_I$ , forward link  $I_Q$ , reverse link  $I_I$ , and reverse link  $I_Q$ .

[0037] Also, secret keys 66 can be input to the triple-DES. These keys 66 can be periodically changed, i.e., refreshed, by means known in the art without service disruption, so that even if the keys 66 are decrypted by an eavesdropper (which would take considerable time, given the chip-level encryption of the present invention), by the time they are decrypted new keys 66 will have been issued, rendering the old keys worthless for further decryption by the eavesdropper. Sixty four, 128, or fewer or more parallel bits can be used as the input to the block ciphers.

[0038] In the case of decryption, the PN sequence of the PN sequence generator 32 is combined with the encryption sequences  $I_I$ ,  $I_Q$  and then used to despread the received data signal.

[0039] Figure 4 shows that alternatively to a chip 21, a conventional spread spectrum MS 70 might access a software layer 72 embodying the present invention. With the above overview of the present architecture in mind, it is to be understood that the present logic is executed on the architecture shown in Figure 4 in accordance with the flow chart of Figure 5. The flow charts herein illustrate the structure of the logic of the present invention as embodied in computer program software. Those skilled in the art

74769-859

9

will appreciate that the flow charts illustrate the structures of logic elements, such as computer program code elements or electronic logic circuits, that function according to this invention. Manifestly, the invention is practiced in its essential embodiment by a machine component that renders the logic elements in a form that instructs a digital processing apparatus (that is, a computer, controller, processor, etc.) to perform a sequence of function steps corresponding to those shown.

[0040] In other words, the logic may be embodied by a computer program that is executed by a processor within, e.g., the MS 70 as a series of computer- or control element-executable instructions. These instructions may reside, for example, in RAM or on a hard drive or optical drive, or the instructions may be stored on magnetic tape, electronic read-only memory, or other appropriate data storage device that can be dynamically changed or updated.

[0041] The logic shown in Figure 5 generates the encryption sequence or sequences at block 74 in accordance with the above-disclosed principles. Moving to block 76, the encryption sequence(s) are combined with the PN sequence generated by a PN sequence generator, and then the data signal is spread at block 78 using the encrypted PN sequence.

[0042] While the particular SYSTEM AND METHOD FOR ENCRYPTING SPREAD SPECTRUM CARRIER as herein shown and described in detail is fully capable of attaining the above-described objects of the invention, it is to be understood that it is the presently preferred embodiment of the present invention and is thus representative of the subject matter which is broadly contemplated by the present invention, that the scope of the present invention fully encompasses other embodiments which may become obvious to those skilled in the art, and that the scope of the present invention is accordingly to be limited by nothing other than the appended claims, in which reference to an element in the singular is not intended to mean "one and only one" unless explicitly so stated, but rather "one or more." All structural and functional equivalents to the elements of the above-described preferred embodiment that are known or later come to be known to those of ordinary skill in the art are intended to be encompassed by the present claims. Moreover, it is not necessary for a device or method to address each and every problem sought to be solved by the present invention, for it is to be encompassed by the present claims. Furthermore, no element,

74769-859

component, or method step in the present disclosure is intended to be dedicated to the public regardless of whether the element, component, or method step is explicitly recited in the claims.

74769-859

11

CLAIMS:

1. A method for secure wireless communication using spread spectrum principles, comprising:

5 generating at least one pseudorandom number (PN) sequence;

generating at least one encryption sequence based on at least one of key and time-varying input;

combining the PN sequence with said encryption sequence to render an encrypted PN sequence; and

10 using the encrypted PN sequence to spread a communication signal.

2. The method of claim 1, wherein the communication signal is received from a data modulation component including a Walsh modulator.

15 3. The method of claim 1, wherein the encryption sequence is generated by a data encryption standard (DES) component or a triple-DES component.

4. The method of claim 3, wherein the DES component or the triple-DES component receives at least one multi-bit  
20 key and at least one time-varying input.

5. The method of claim 4, wherein the at least one multi-bit key is periodically refreshed.

6. An apparatus for secure wireless communication using spread spectrum principles, comprising:

25 means for generating at least one pseudorandom number (PN) sequence;

74769-859

12

means for generating at least one encryption sequence based on at least one of key and time-varying input;

means for combining the PN sequence with said encryption sequence to render an encrypted PN sequence; and

means for using the encrypted PN sequence to spread a communication signal.

7. The apparatus of claim 6, wherein the communication signal is received from a data modulation component including a Walsh modulator.

8. The apparatus of claim 6, wherein the encryption sequence generating means comprises a data encryption standard (DES) component or a triple-DES component.

9. The apparatus of claim 8, wherein the DES component or the triple-DES component receives at least one multi-bit key and at least one time-varying input.

10. The apparatus of claim 9, wherein the at least one multi-bit key is periodically refreshed.

11. An apparatus for secure wireless communication using spread spectrum principles, comprising:

a pseudorandom number (PN) sequence generator configured to generate at least one PN sequence;

an encryption sequence generator configured to generate at least one encryption sequence based on at least one of key and time-varying input and further configured to combine the PN sequence with the encryption sequence to render an encrypted PN sequence; and

74769-859

13

a spreader configured to use the encrypted PN sequence to spread a communication signal.

12. The apparatus of claim 11, wherein the communication signal is received from a data modulation  
5 component including a Walsh modulator.

13. The apparatus of claim 11, wherein the encryption sequence generator comprises a data encryption standard (DES) component or a triple-DES component.

14. The apparatus of claim 13, wherein the DES  
10 component or the triple-DES component receives at least one multi-bit key and at least one time-varying input.

15. The apparatus of claim 14, wherein the at least one multi-bit key is periodically refreshed.

16. A processor for secure wireless communication  
15 using spread spectrum principles, said processor being configured to:

generate at least one pseudorandom number (PN) sequence;

20 generate at least one encryption sequence based on at least one of key and time-varying input;

combine the PN sequence with said encryption sequence to render an encrypted PN sequence; and

use the encrypted PN sequence to spread a communication signal.

74769-859

14

17. A computer-program product for secure wireless communication using spread spectrum principles, comprising:

a computer-readable medium comprising instructions for causing a computer to:

5 generate at least one encryption sequence based on at least one of key and time-varying input;

combine the PN sequence with said encryption sequence to render an encrypted PN sequence; and

10 use the encrypted PN sequence to spread a communication signal.

18. A method for secure wireless communication using spread spectrum principles comprising:

generating at least one encryption sequence based on at least one of key and time-varying input;

15 combining a PN sequence with the encryption sequence to render an encrypted PN sequence; and

using the encrypted PN sequence to despread a received spread spectrum signal to render a despread signal.

19. The method of claim 18 further comprising: sending  
20 the despread signal to a Walsh demodulator.

20. The method of claim 18, wherein the encryption sequence is generated by a data encryption standard (DES) component or a triple-DES component.

21. The method of claim 20, wherein the DES component  
25 or triple-DES component receives at least one multi-bit key and at least one time-varying input.

74769-859

15

22. The method of claim 21, wherein the multi-bit key is periodically refreshed.

23. The method of claim 21, wherein the time-varying input is at least one long code state.

5 24. An apparatus for secure wireless communication using spread spectrum principles comprising:

an encryption sequence generator configured to generate at least one encryption sequence based on at least one of key and time-varying input;

10 a PN sequence generator configured to combine a PN sequence with the encryption sequence to render an encrypted PN sequence; and

a despreader configured to use the encrypted PN sequence to despread a received spread spectrum signal to  
15 render a despread signal.

25. The apparatus of claim 24 further comprising: a Walsh demodulator configured to receive a despread signal.

26. The apparatus of claim 24, wherein the encryption sequence generator comprises a data encryption standard  
20 (DES) component or a triple-DES component.

27. The apparatus of claim 26, wherein the DES component or triple-DES component receives at least one multi-bit key and at least one time-varying input.

28. The apparatus of claim 27, wherein the multi-bit  
25 key is periodically refreshed.

29. The apparatus of claim 27, wherein the time-varying input is at least one long code state.

74769-859

16

30. An apparatus for secure wireless communication using spread spectrum principles comprising:

means for generating at least one encryption sequence based on at least one of key and time-varying  
5 input;

means for combining a PN sequence with the encryption sequence to render an encrypted PN sequence; and

means for using the encrypted PN sequence to despread a received spread spectrum signal to render a  
10 despread signal.

31. The apparatus of claim 30 further comprising:  
means for sending the despread signal to a Walsh demodulator.

32. The apparatus of claim 30, wherein the generating  
15 means comprises a data encryption standard (DES) component or a triple-DES component.

33. The apparatus of claim 32, wherein the DES component or triple-DES component receives at least one multi-bit key and at least one time-varying input.

20 34. The apparatus of claim 33, wherein the multi-bit key is periodically refreshed.

35. The apparatus of claim 33, wherein the time-varying input is at least one long code state.

36. A processor for secure wireless communication  
25 using spread spectrum principles, said processor being configured to:

generate at least one encryption sequence based on at least one of key and time-varying input;

74769-859

17

combine a PN sequence with the encryption sequence to render an encrypted PN sequence; and

use the encrypted PN sequence to despread a received spread spectrum signal to render a despread signal.

5 37. A computer-program product for secure wireless communication using spread spectrum principles comprising:

a computer-readable medium comprising instructions for causing a computer to:

10 generate at least one encryption sequence based on at least one of key and time-varying input;

combine a PN sequence with the encryption sequence to render an encrypted PN sequence; and

use the encrypted PN sequence to despread a received spread spectrum signal to render a despread signal.

15 38. The method of claim 1, wherein the communication signal comprises a data symbol, and the method further comprises using the encrypting PN sequence to spread the data symbol.

20 39. The apparatus of claim 6, wherein the communication signal comprises a data symbol, and the apparatus further comprises means for using the encrypting PN sequence to spread the data symbol.

25 40. The apparatus of claim 11 wherein the communication signal comprises a data symbol, and the spreader further configured to use the encrypting PN sequence to spread the data symbol.

74769-859

18

41. The method of claim 18, wherein the received spread spectrum signal comprises a data symbol, and the method further comprises using the encrypting PN sequence to despread the data symbol to render a despread data symbol.

5 42. The apparatus of claim 24, wherein the received spread spectrum signal comprises a data symbol, and the despreader further configured to use the encrypting PN sequence to despread the data symbol to render a despread data symbol.

10 43. The apparatus of claim 30, wherein the received spread spectrum signal comprises a data symbol, and the apparatus further comprises means for using the encrypting PN sequence to despread the data symbol to render a despread data symbol.

15 44. A base station for secure wireless communication using spread spectrum principles, comprising:

an antenna;

a pseudorandom number (PN) sequence generator configured to generate at least one PN sequence;

20 an encryption sequence generator configured to generate at least one encryption sequence based on at least one of key and time-varying input and further configured to combine the PN sequence with the encryption sequence to render an encrypted PN sequence; and

25 a spreader configured to use the encrypted PN sequence to spread a communication signal transmitted over the antenna.

74769-859

19

45. A user terminal for secure wireless communication using spread spectrum principles, comprising:

an antenna;

a pseudorandom number (PN) sequence generator  
5 configured to generate at least one PN sequence;

an encryption sequence generator configured to generate at least one encryption sequence based on at least one of key and time-varying input and further configured to combine the PN sequence with the encryption sequence to  
10 render an encrypted PN sequence; and

a spreader configured to use the encrypted PN sequence to spread a communication signal transmitted over the antenna.

46. A base station for secure wireless communication  
15 using spread spectrum principles comprising:

an antenna;

an encryption sequence generator configured to generate at least one encryption sequence based on at least one of key and time-varying input;

20 a PN sequence generator configured to combine a PN sequence with the encryption sequence to render an encrypted PN sequence; and

a desreader configured to use the encrypted PN sequence to despread a spread spectrum signal received using  
25 the antenna to render a despread signal.

74769-859

20

47. A user terminal for secure wireless communication using spread spectrum principles comprising:

an antenna;

an encryption sequence generator configured to  
5 generate at least one encryption sequence based on at least one of key and time-varying input;

a PN sequence generator configured to combine a PN sequence with the encryption sequence to render an encrypted PN sequence; and

10 a despreader configured to use the encrypted PN sequence to despread a spread spectrum signal received using the antenna to render a despread signal.

SMART & BIGGAR  
OTTAWA, CANADA  
  
PATENT AGENTS

1/4

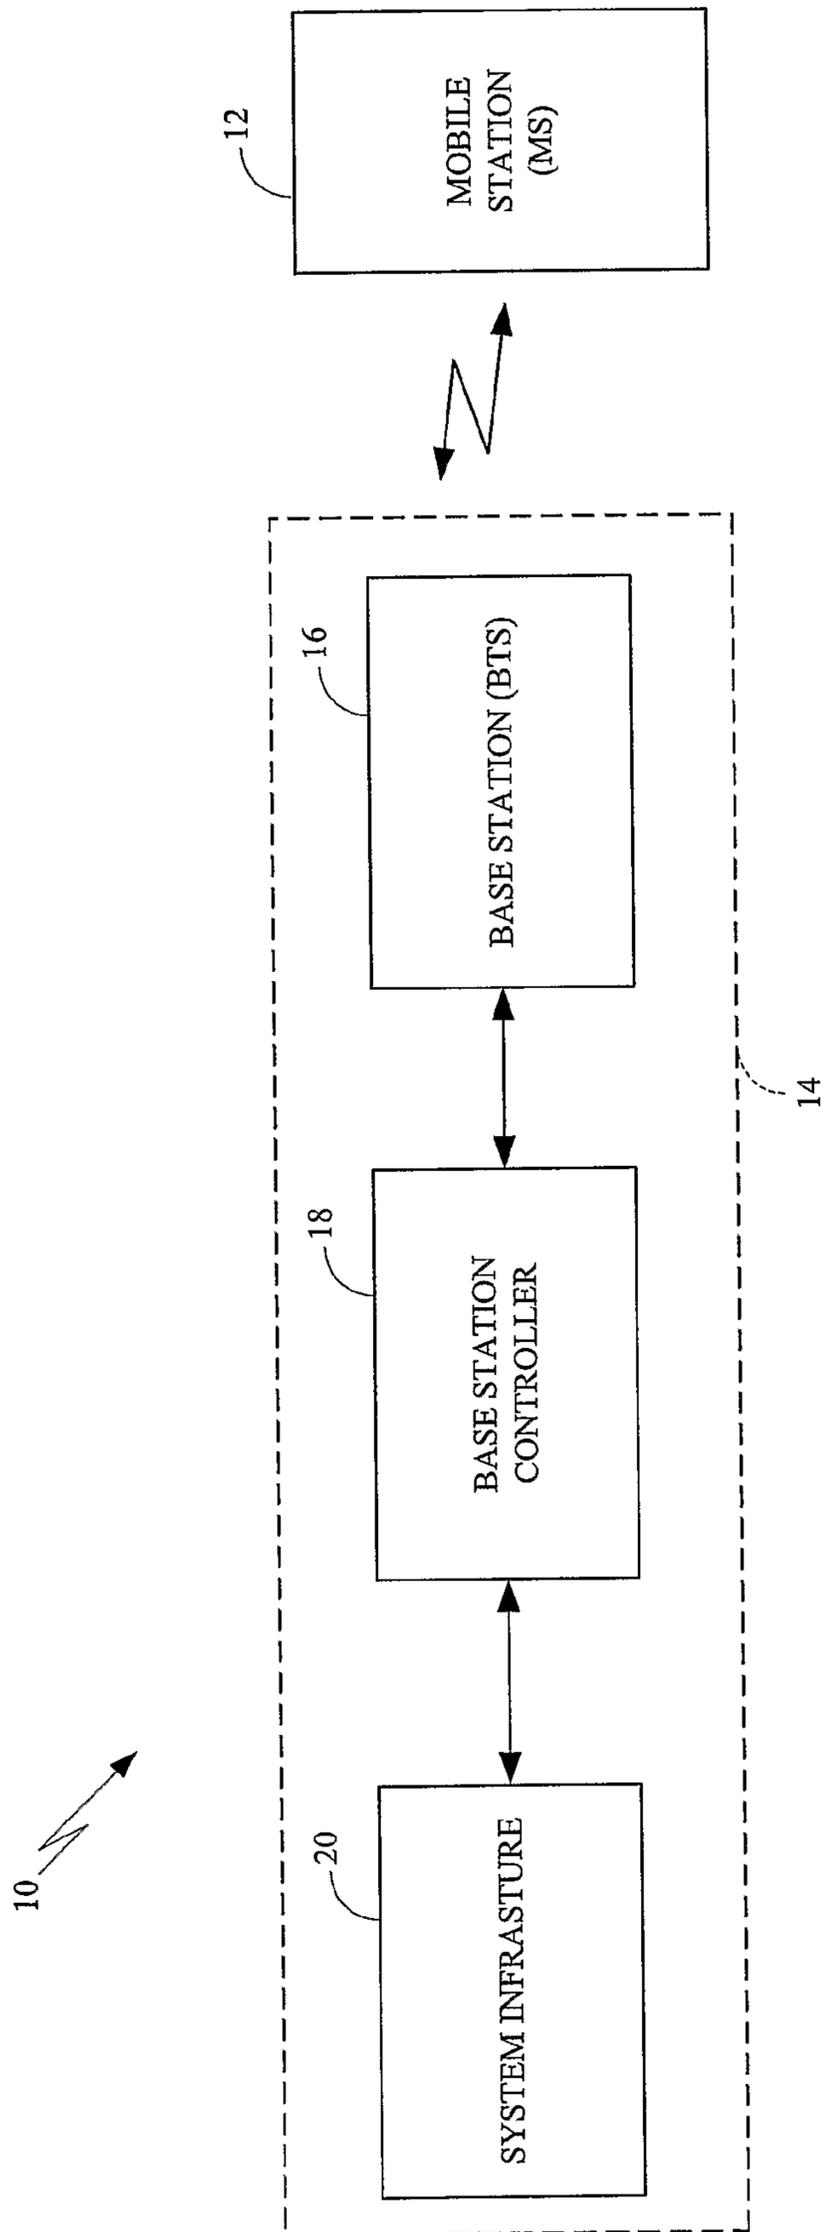


FIG. 1

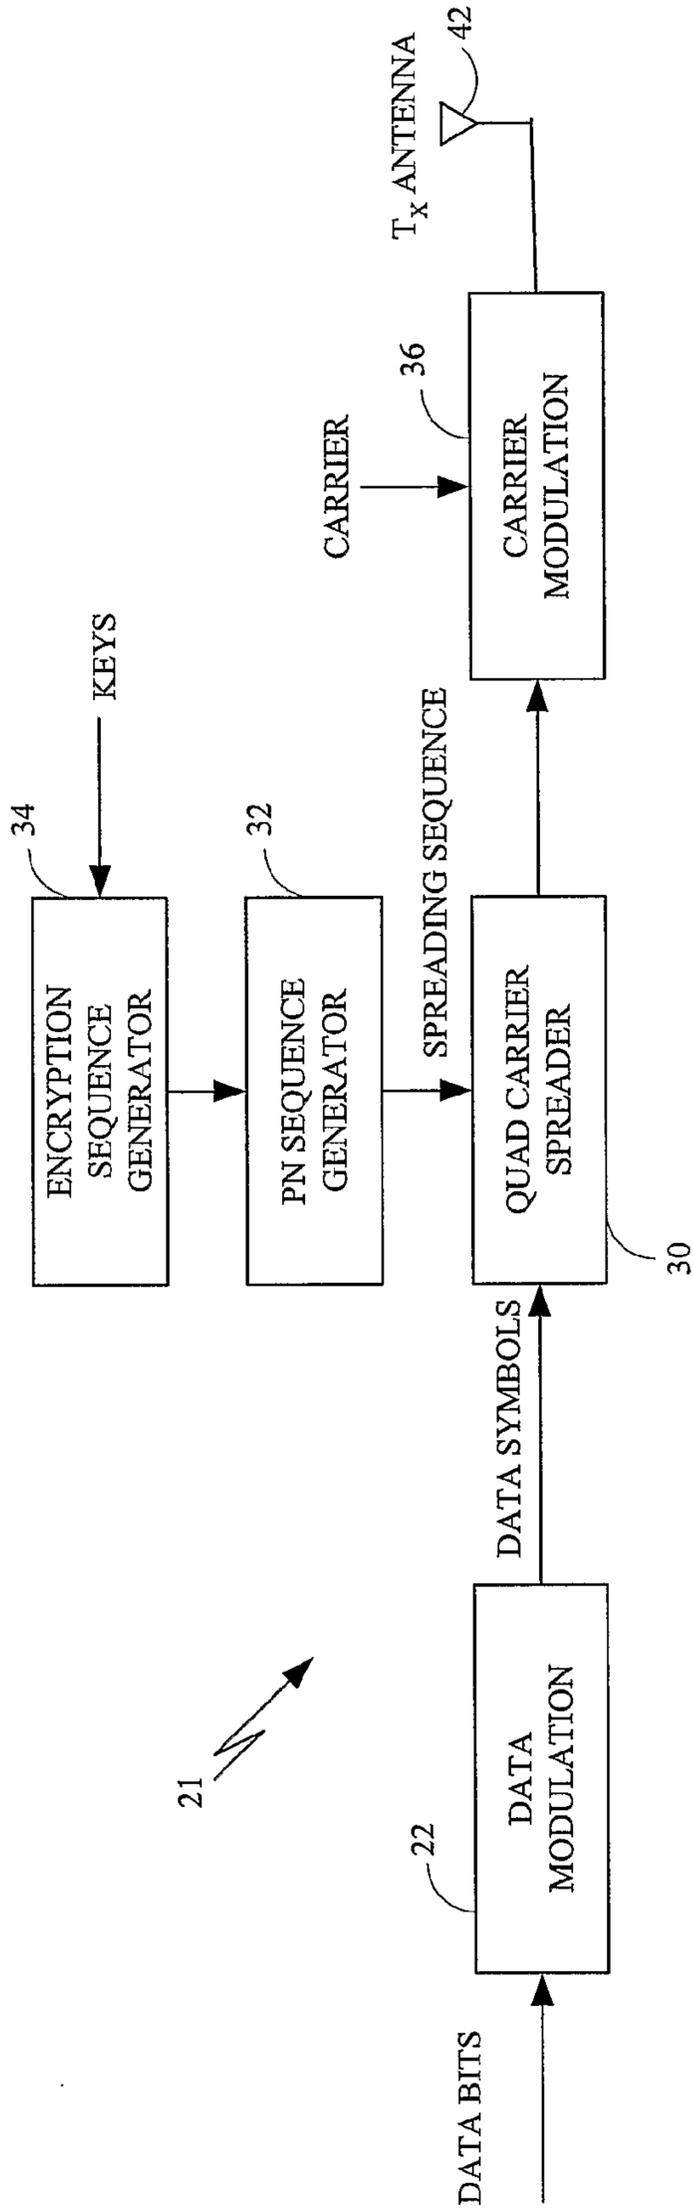


FIG. 2A

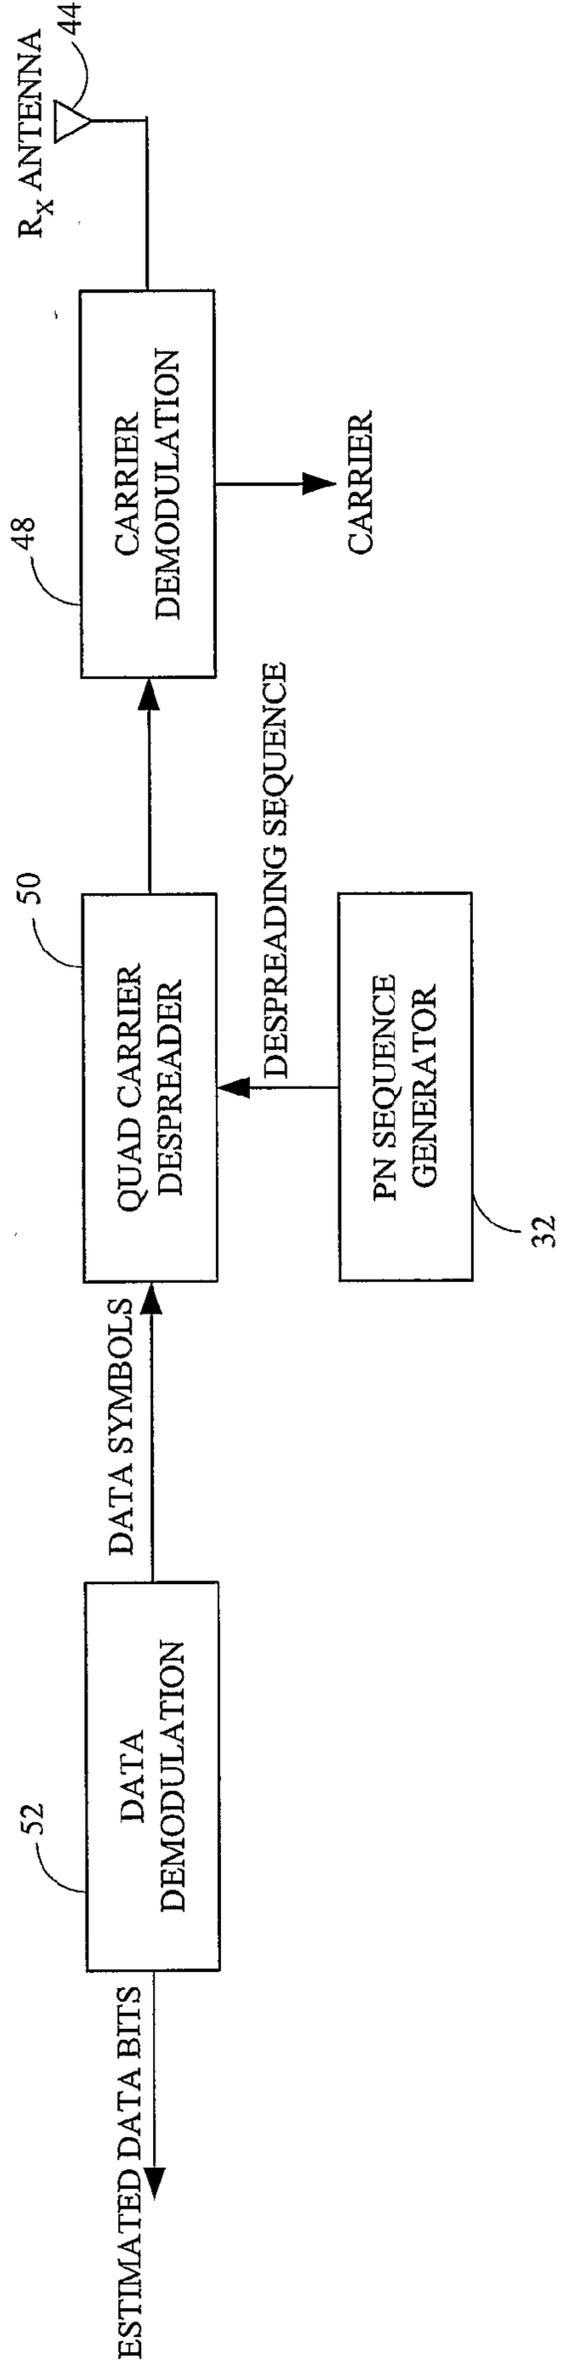


FIG. 2B

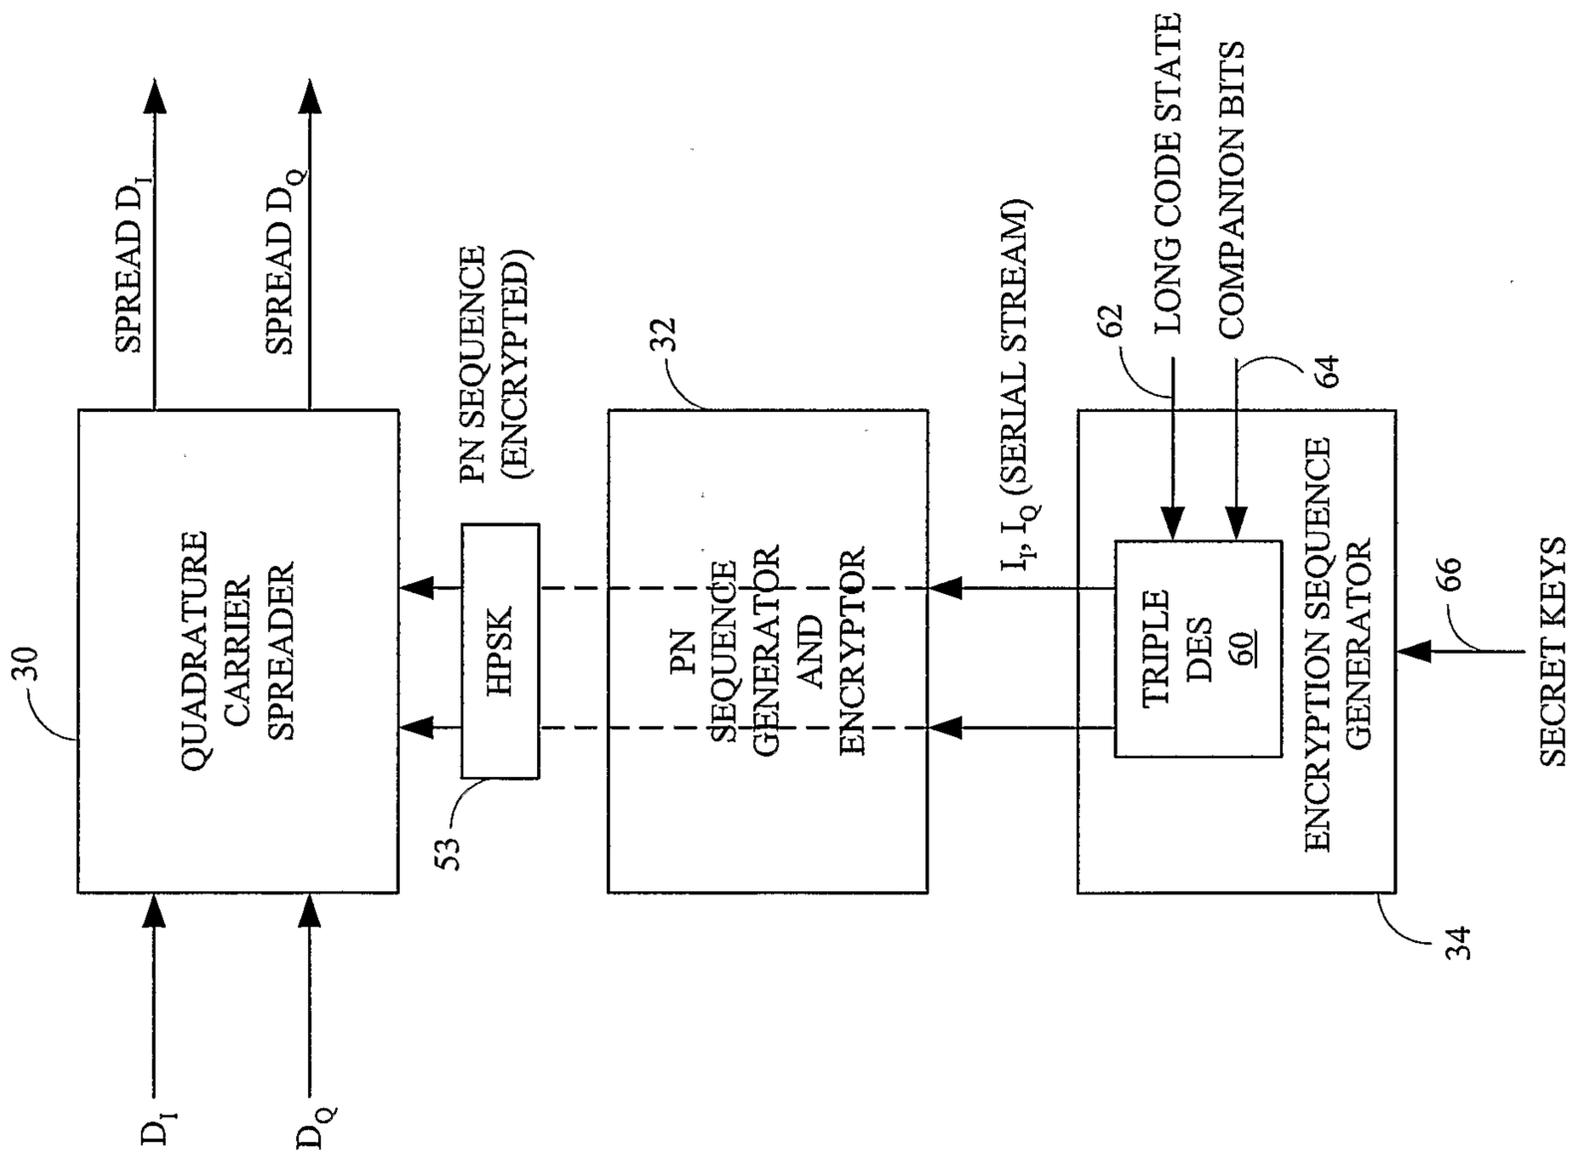


FIG. 3

**EXEMPLARY ENCRYPTION  
SEQUENCE GENERATOR**

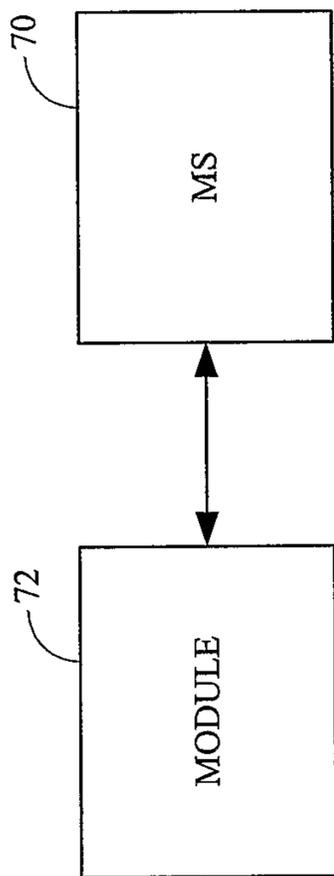


FIG. 4

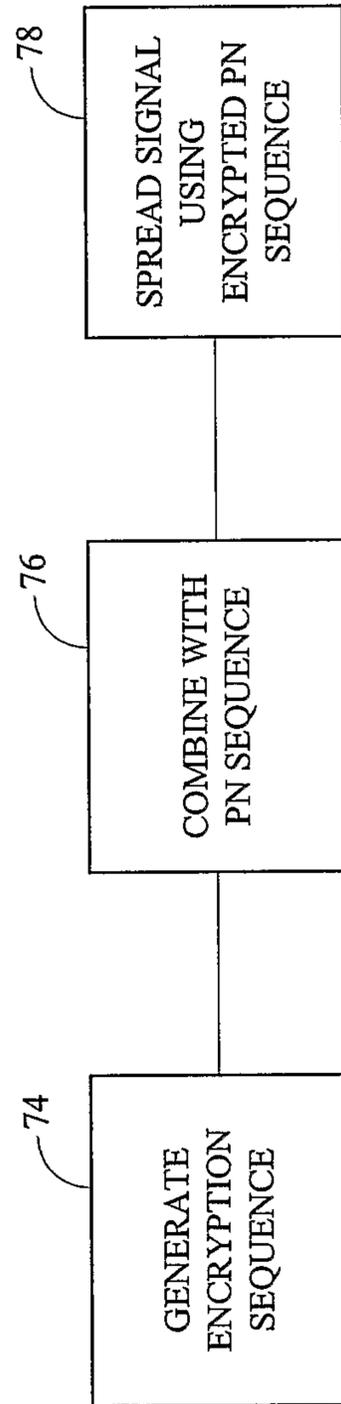


FIG. 5

74

```
graph LR; 74[74: GENERATE ENCRYPTION SEQUENCE] --> 76[76: COMBINE WITH PN SEQUENCE]; 76 --> 78[78: SPREAD SIGNAL USING ENCRYPTED PN SEQUENCE];
```

GENERATE  
ENCRYPTION  
SEQUENCE

76

COMBINE WITH  
PN SEQUENCE

78

SPREAD SIGNAL  
USING  
ENCRYPTED PN  
SEQUENCE