



(51) International Patent Classification:

H04J 3/14 (2006.01) *H04L 12/26* (2006.01)
H04J 3/16 (2006.01)

(21) International Application Number:

PCT/EP2010/056608

(22) International Filing Date:

12 May 2010 (12.05.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

09305624.0 30 June 2009 (30.06.2009) EP

(71) Applicant (for all designated States except US): **ALCATEL LUCENT** [FR/FR]; 54 Rue La Boétie, F-75008 Paris (FR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ANSORGE, Stefan** [DE/DE]; Kirchstr. 3 - 1, 73275 Ohmden (DE). **BEILHARZ, Siegfried** [DE/DE]; Schillerstr. 17, 71404 Korb (DE).

(74) Agent: **URLICHS, Stefan**; Lorenzstr. 10, 70435 Stuttgart (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- of inventorship (Rule 4.17(iv))

Published:

- with international search report (Art. 21(3))

(54) Title: METHOD AND APPARATUS FOR LINE LATENCY MEASUREMENT IN TRANSPORT NETWORKS

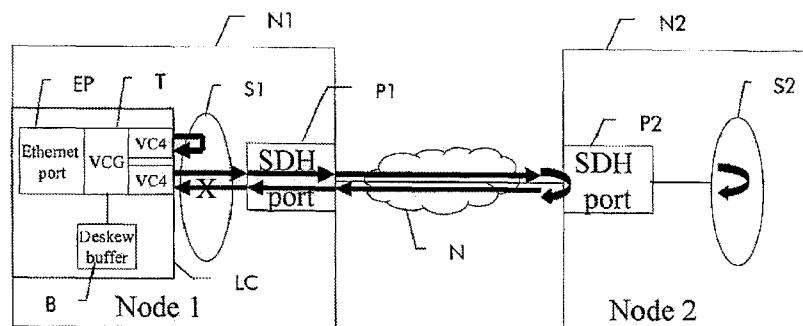


Fig. 1

(57) Abstract: In order to measure the latency of a particular transport service from end to end, a method of measuring the latency of a transport connection between a first network node (N1) and a second network node (N2) is provided, which makes use of a virtual concatenation function with a buffer (B) to compensate the differential delay between members in a received virtual concatenation group. In particular, the first network node (N1) creates a virtual concatenation group which has as members at least two multiplexing units (VC4_1, VC4_2). A first of the two (VC4_1) is used as a reference for the latency measurement. The second (VC4_2) is sent to the second network node (N2), where it is looped back to said first network node (N1). The first network node (N1), by using its buffer (B) available for re-aligning members of a virtual concatenation group, determines a latency difference between the first and second multiplexing units (VC4_1, VC4_2).



5

10 Method and Apparatus for Line Latency Measurement in Transport Networks

Field of the Invention

15 The present invention relates to the field of telecommunications and more particularly to a method and related apparatus for measuring the latency of a line in a transport network.

Background of the Invention

20

Latency requirements are a hard constraint for packet-based services. Such packet based services can be transported through transport networks like SDH/SONET/OTN or WDM networks. Transport network should therefore be aware of latency. Especially in the context of protection switching and

25

restoration, latency for an end-to-end packet service may change and hence result in service degradation or failure on the packet layer. Therefore transport services shall not exceed a maximum latency.

30

The latency of a transport service is based on switch time through nodes and the line length. The end-to-end latency is then given by the number of switching nodes multiplied by the switching time per node plus the latency of the sum line lengths.

The line length is typically not known, or if so, is known only roughly. The line length latency hence cannot be simply calculated from the light speed and fiber length. An additional impact on line length latency comes from intermediate transparent nodes like repeaters or WDM equipment introducing
5 their own latency. So latency is not just given by the cable length and the speed of light in a media but other unknown components must be considered as well.

Summary of the Invention

10

The inventors have recognized a need for end-to-end latency measurements in transport networks such as SDH/SONET. In transport networks, latency measurement on a given link or line is typically not available today. Either a test generator must be embedded into the system or an external measurement
15 device must be provided. Neither is generally available today. It is hence an object of the present invention, to provide a method and related apparatus that allows to measure the latency of a particular transport service from end to end, that is compatible with existing equipment.

20

These and other objects that appear below are achieved by a method of measuring the latency of a transport connection between a first network node and a second network node, which makes use of a virtual concatenation function with a buffer to compensate the differential delay between members in a received virtual concatenation group. In particular, the first network node
25 creates a virtual concatenation group which has at least two multiplexing units. A first of the two is used as a reference for the latency measurement. The second is sent to the second network node, where it is looped back to said first network node. The first network node switches the first multiplexing unit internally back to a line card, where the virtual concatenation group is
30 terminated and, by using its buffer available for re-aligning members of a virtual concatenation group, determines a latency difference between the first and second multiplexing units.

Brief Description of the Drawings

Preferred embodiments of the present invention will now be described with reference to the accompanying drawings in which

- 5 figure 1 shows a network node of a transport network performing end-to-end latency measurement to a far end network node;
- figure 2 shows a timing diagram of the latency measurement in figure 1;
- figure 3 shows a second embodiment of a network node performing end-to-end latency measurement to a far end network node;
- 10 figure 4 shows a timing diagram of the latency measurement in figure 3;
- figure 5 shows a third embodiment of a latency measurement of a line and segments thereof; and
- figure 6 shows a fourth embodiment where multiple lines are measured in parallel.

15

Detailed Description of the Invention

- The inventors have provided a mechanism to measure a line latency, which makes use of functions already available in existing network nodes, in
20 particular of the virtual concatenation function in SDH/SONET, OTN or WDM.

- In SDH networks, transport signals are structured into frames of equal length, which are termed Synchronous Transport Modules of type N (STM-N), where N can be 1, 4, 16, 64, 256, or even higher. An STM-N carries multiplexing units,
25 which are termed virtual containers (VC). The largest VC is the VC4 with a capacity of 140 MBit/s. An STM-1 carries one VC4, an STM-4 four VC4s and so on. These VCs transport client signals, which are termed tributaries. In order to provide larger transport capacity, two or more VCs can be linked. This is called a concatenation of VCs. In a contiguous concatenation, all
30 concatenated VCs must be transported within the same STM-N, while in a

virtual concatenation, the VCs can be transported independently and are reassembled at the terminating network node. Since the VCs can be transported independently from each other even over different network paths, they can experience different latency and hence a buffer must be provided at
5 the terminating network node to compensate for the skew between the individual VCs. This buffer is termed hereinafter the deskewing buffer.

The deskewing buffer bases on a common synchronization frame that is inserted for all members at the same time and verified at the sink side. The
10 differential delay can therefore be measured.

An idea of the inventors is to make use of the deskewing buffers for virtual concatenated signals, which are anyhow present on tributary line cards for packet services of existing network nodes. Therefore, in a first embodiment,
15 one member of a virtual concatenation is locally looped back while a second member is passed across a link under consideration. The link under consideration is line loop-backed on the far-end network node and switched to the same virtual concatenation group the first member is located. The latency between the two members equals roughly twice the line latency to be
20 measured. This allows line latency measurement without requiring any external measurement devices.

The latency measurement of first embodiment is shown schematically in figure 1. A first network node N1 contains a line card LC for tributary signals, a
25 switch matrix S1 and at least one output port P1 connected to an SDH network N. The tributary line card LC contains an Ethernet port EP for Ethernet client signals and a concatenation termination unit T. The concatenation termination unit T is connected to a deskewing buffer B. The tributary line card is connected to the switching matrix S1. The switching matrix S1 switches
30 multiplexing units at a granularity of VC4. A transmission connection is established from network node N1 through the SDH network N to a far-end terminating network node N2. Network node N2 has an SDH port P2 and a switching matrix S2.

Figure 1 shows the network nodes N1 and N2 in a simplified way and only those building blocks are shown which are used in the present embodiment for the latency measurement. It should be clear however, that real network nodes will have many more and also different kind of interfaces and will include further functional blocks such as lower level and higher level controllers, supervisory and management functions, signaling and management interfaces and many more.

The measurement setup is done in the following way:

- 10 – Two members of a virtual concatenation group VCG are used and compared.
- One member is locally switched back to the VCG group using a unidirectional cross connection.
- The second member is switched to the port under consideration.
- 15 The peer end of the port is placed into line loopback, when the link is not in service. Alternatively the VCG member can be locally switched back to the line in the switching matrix S2.

In particular, concatenation termination units T creates a virtual concatenation of two VC4s, i.e. a VC4-2v. The two concatenated virtual containers VC4 are send to the switch matrix S1. The first of the two VC4s is switched back by the switching matrix S1 to the same tributary line card LC, where it is stored in the deskewing buffer B. The second VC4 is switched from switching matrix S1 to SDH port P1 and transmitted through the SDH network N to network node N2. At network node N2, the second VC4 is received at SDH port P2. In SDH port P2, a line loopback function is activated to switch the second VC4 back to the line. Hence, the second VC4 is transmitted the same way back through network N to node N1, where it is received at the same port P1. From P1, the second VC4 is switched through switching matrix S1 back to tributary line card LC, where it is received at concatenation termination unit T. Concatenation termination unit T compares the latency of the first and second virtual containers to determine the latency of the line under consideration.

Figure 2 shows a timing diagram of the two virtual containers VC4_1, VC4_2. Both VC4 VC4_1 and VC4_2 are sent at the same time T_0 from tributary line card LC to switching matrix S1. Switching matrix S1 has a certain latency, which is typically the same for all signals to be switched. Hence, VC4_1 is
 5 received at time T_1 back at the tributary line card LC and VC4_2 is received at the same time T_1 at SDH port P1. SDH port P1 performs some processing and overhead termination functions, which introduce a port latency. At time T_2 , VC4_2 is sent to the transmission line. The transmission line add a certain line latency and VC4_2 is received at time T_3 at port P2 of network node N2. The
 10 loopback function adds a certain latency so that VC4_2 is sent at time T_4 back to the transmission line under consideration. The line latency is then added a second time for the way back and VC4_2 is received at time T_5 at port P1 of node N1. Port P1 adds again the port latency and switching matrix S1 adds the switching matrix latency, so that VC4_2 is received at time T_7 back at
 15 tributary line card LC. The time difference from T_1 till T_7 is the measured latency value.

Using typical, known latency values for the real line latency can be estimated therefrom. The switching time T_1 , T_7 through the switching matrix S1 is roughly
 20 15 μ s. The port latency T_2 on the egress side is roughly 5 μ s. T_3 , T_5 is the line latency. The loopback latency T_4 is very small, roughly a few μ s. The port latency T_6 at ingress side is again roughly 5 μ s. Thus the line latency can be calculated by

$$\begin{aligned} \text{Line latency} &= ((T_7 - T_1 \text{ measurement}) - (T_2 + T_6 + T_7 + T_4)) / 2 \\ 25 \quad &\approx ((T_7 - T_1 \text{ measurement}) - 20 \mu\text{s}) / 2 \end{aligned}$$

The above measurement method is compatible with nearly all existing equipment. Virtual concatenation is available on GE, 10GE and other tributary line cards for packet services. These cards provide also the measurement of
 30 differential delay. The granularity that can be measured in SDH frames is 125 μ s. The maximum range depends on the size of the deskewing buffer, which is for 1GE typically 15 ms, which corresponds to 120 frames and for 10GE Ethernet/MPLS tributary line cards typically 32 ms corresponding to 256 frames.

It should be understood that the above values for equipment an internal processing time are taken from a particular implementation and can be different for others. In general the buffer size is equipment specific and standard G.7041 allows a buffer size for the de-skewing buffer of up to 256 ms.

Due to frame measurement, the granularity is 125 us. Using an average light speed in medium of $0.2\text{m/ns} = 200\text{m}/\mu\text{s}$ this granularity compares to a line length of 25km. Since the line length is measured twice, the granularity of the measurement is 12,5 km of line length. The 20 μs latency due to equipment functions (T2, T6, T7, T4) is negligible in this context. With buffer capacity of 15ms corresponding to 120 frames, the total latency that can be measured is 2500 km. As line is measured twice the maximum line length is 1250 km. With buffer capacity of 32 ms corresponding to 256 frames the total length is 6400 km and the maximum line length can be 3200 km.

As the deskewing buffer is filled in linear way starting at buffer begin, in the cases of an overflow a "multi-cross" indicator may provide information how often the frame has been overflowed. When this function is available even much longer lines can be measured.

When the "multi-cross" indicator is not given a given line can be compared with another line already known, which will be described with reference to figure 3 in a second embodiment below.

The measurement is based on the availability of line cards on one side of the line which provide virtual concatenation functionality. The measurement further requires a free VCG on one card that can be used for measurement and it requires two VC4 on back-panel capacity in the same VCG. Instead of a free VCG, the measurement can also be done using an existing VCG, which is currently in service, by simply adding two separate VC4 that are not in service. Such an existing VCG will then have two additional members that are not activated.

In order to perform the measurement, the following configuration steps will be carried out: At node N2, the line loopback is configured. At node N1, the VCG at tributary line card LC is configured and the switching matrix S1 is
5 configured to switch one member to the SDH port P1 under consideration and the one member back to tributary line card LC. Then the measurement can be carried out and finally, the switch is released again at switching matrix S1, the VCG configured back into original condition and the line loopback at node
10 N2 released.

In order to support the above described measurement, a new maintenance command could preferably be defined that measures the differential delay between two members in a VCG.

15 The measurement can either be performed in a manual way in that the above configuration steps are performed by an operator manually, or the measurement can be automated by a single command which executes the measurement steps. In this case the SDH port under consideration will be specified and optionally also the VCG group to be used can be specified.

20 Measurement can be done on an idle line when no active traffic is currently being sent, or on an line with active traffic but where some capacity is available for an additional VC-4. In the former case, discovery may use line loopback since the port is not yet in service. For a measurement on a line with
25 active traffic, it would be preferable to use matrix loopback.

The setup and measurement steps can be synchronized and coordinated through a control plane, e.g. by GMPLS controllers which communicate with each other. For example the Link Management Protocol LMP of the GMPLS
30 protocol suit can be used to negotiating which side is measuring, initiate the line loopback or matrix loopback, and in case of matrix loopback which VC is used. Measurement can even be done as a maintenance action during a link is in service by using matrix loopback in the far-end network node N2.

Turning to figure 3, a second embodiment of line latency measurement will now be described, which uses a second line with known latency characteristics to verify with the line under consideration.

- 5 In this operation a test line is compared against a known line for example in cases where the multi-cross indication is not available. The setup changes in the following way: The first member of a concatenation group is switched to the known line. The second member is switched to the port under consideration. Either both peer ends of the two ports are placed into line
10 loopback, when link is not in service or the VCG member can be locally switched back to the line in the switching matrix. The latter is the preferred option for the known port.

15 In figure 3, first network node N1 has a tributary line card LC, a first SDH port P1, and a second SDH port P1'. Via SDH network N, network node N1 is connected from SDH port P1 to SDH port P2 of network node N2 and from port P1' to port P3 of network node N3. For this embodiment, it is assumed that the latency of the link between node N1 and N3 is known.

- 20 Concatenation termination unit T creates as in the first embodiment a virtual concatenation group with two VC4s and sends these to switching matrix S1. The first VC4 is switched to SDH port P1' and the second to SDH port P1. The first VC is received at port P3 of network node N3 and forwarded to switching matrix S3, where it is looped back to SDH port P3. The first VC4 hence travels
25 back through network N to port P1', from where it is switched back to tributary line card LC. The second VC4 is received at port P2 of network node N2, which has activated a line loopback function and hence the VC4 is sent back via network N to port P1, from where it is switched back to tributary line card LC, too. Concatenation termination unit T using its deskewing buffer B
30 determines the time difference between receipt of the two corresponding VC4.

The delta measured between the two lines must be taken into account together with the known latency of the known link. The delta can hence be negative or positive as long it is in the range of the buffer size.

Figure 4 shows a timing diagram of the measurement. At time T_0 , both VC4s VC4_1 and VC4_2 are sent from line card LC to switching matrix S1. After the switching latency, the VC4s are received at time T_1 at their respective SDH
5 ports P1, P1'. Since the port latency is usually the same for different ports, both VC4s are transmitted simultaneously at time T_2 to their respective transmission lines.

VC4_1 is received after time T_3 at port P3 and after lapse of a loopback
10 latency, which is essentially the ingress and egress port latency plus the switching latency of switching matrix S3 (due to the fact that node N3 has activated matrix loopback), VC4_1 is transmitted at time T_4 back to the transmission line. At time T_5 , it is received at port P1' and after adding port latency (T_6) and switching latency is received back at time T_7 at tributary line
15 card LC.

VC4_2 is received after time T_3' at port P2 of network node N2. The loopback latency of port P2 is then added and VC4_2 is transmitted at time T_4' back to the transmission line. At time T_5' it is received at port P1 and after port latency
20 and switching latency it is finally received back at the tributary line card LC at time T_7' . The measured latency is the difference between VC4_1 and VC4_2, i.e. the difference between T_7 and T_7' . With the known latency of the transmission line between N1 and N3, the latency of the transmission line under consideration can be easily determined.

25 The characteristics of the known transmission line can either be measured in advance using external measurement equipment or can be deduced using known geographical properties. It would also be possible that the known line is just a segment of the line to be measured or the other way round, that the
30 line to be measured is a segment of the known line. The invention allows hence allows to measure a line and all its segments.

Figure 5 shows a third embodiment of a measurement. In this embodiment, a virtual concatenation of three VC4 is formed at a first network node N1'. The

first element of the virtual concatenation is looped back locally. The second and third VC4 are transmitted via the same output port to a common optical line, which interconnects network element N1' via a second intermediate network element NE2' to a third network element NE3'. The second of the
5 three VC4 is looped back at network node NE2' and the third of the three VC4 is looped back at network node NE3'. This way, using more than two elements of a virtual concatenation, the line from NE1' to NE3' and the segment between NE1' and NE2' can be measured at the same time. Knowing the latency between NE1' and NE2' and between NE1' and NE3', the latency of
10 the segment between NE2' and NE3' can easily be calculated as the difference between the two. This approach can also be extended to a line with more than two segments using a concatenation of more than three VC4. It is hence possible to measure a line and all its segments in one step from a single place in the network.

15 Figure 6 shows yet a further embodiment. As in the before embodiment, a virtual concatenation of three VC4 is formed at a first network node N1''. The first element of the virtual concatenation is looped back locally. The second and third VC4 are transmitted via different output ports to two different optical
20 lines, which connect network element N1'' to a second intermediate network element NE2'' and to a third network element NE3'', respectively. The respective VC4s are looped back at network nodes NE2'', NE3'', respectively. This way, using more than two elements of a virtual concatenation at a time, the measurement of figure 1 can be performed in parallel to measure several
25 different lines at the same time. This way, using a virtual concatenation of N elements, it will be possible to measure N-1 lines in parallel from a single point in the network.

30 In order to measure a higher number of lines and segments in parallel from a single point in the network, it could be advantageous to use smaller multiplex units where available to have an even higher number of multiplex units available to form a virtual concatenation. It would be possible for example, to use the VC-3, which is the higher order multiplex unit in SONET (the ANSI

equivalent of SDH), and form a virtual concatenation VC-3nv of n VC-3 and locally loop back the different VC-3s.

As already discussed above, the configuration steps necessary to carry out the invention can be implemented in either a control plane element if the SDH network is equipped with a distributed GMPLS control plane or can be implemented into a central network management system. In the former case, each network node has a GMPLS controller and the GMPLS controller of network node N1 is equipped with a software extension that configures upon execution the network node N1 to perform the respective steps and is also capable to instruct the GMPLS controller of network node N2, respectively network nodes N2 and N3 to configure the loopback in either switching matrix or line card, depending on which alternative is chosen. Conversely, in the latter case, the central network management system is equipped with a software extension, which upon execution initiates the necessary configuration and measurement steps in all involved network nodes.

Those skilled in the art would readily recognize that steps of various above-described methods can be performed by programmed computers. Herein, some embodiments are also intended to cover program storage devices, e.g., digital data storage media, which are machine or computer readable and encode machine-executable or computer-executable programs of instructions, wherein said instructions perform some or all of the steps of said above-described methods. The program storage devices may be, e.g., digital memories, magnetic storage media such as a magnetic disks and magnetic tapes, hard drives, or optically readable digital data storage media. The embodiments are also intended to cover computers programmed to perform said steps of the above-described methods.

The description and drawings merely illustrate the principles of the invention. It will thus be appreciated that those skilled in the art will be able to devise various arrangements that, although not explicitly described or shown herein, embody the principles of the invention and are included within its spirit and scope. Furthermore, all examples recited herein are principally intended

expressly to be only for pedagogical purposes to aid the reader in understanding the principles of the invention and the concepts contributed by the inventor(s) to furthering the art, and are to be construed as being without limitation to such specifically recited examples and conditions. Moreover, all
5 statements herein reciting principles, aspects, and embodiments of the invention, as well as specific examples thereof, are intended to encompass equivalents thereof.

The above embodiments have been described in the context of networks and
10 network equipment of the well known Synchronous Digital Hierarchy (SDH). However, similar mechanisms of virtual concatenation also exist for instance in the Optical Transport Network (OTN) and the above described measurement principles can equally be applied in these and other networks, which provide
15 virtual concatenation of multiplexing units, in particular, in any kind of transport network which are based on circuit switching technology, time division multiplexing of multiplexing units of equal length, and which provide functionality equivalent to virtual concatenation as explained above. Moreover, underlying transport networks, which transports these concatenated TDM
20 services, such as WDM networks, can be measured in the described way.

5

10

Claims

1. A method of measuring the latency of a transport connection between a first network node (N1) and a second network node (N2), comprising the steps of:
- 15 of:
- at said first network node (N1), creating a virtual concatenation group comprising at least two multiplexing units (VC4_1, VC4_2);
 - using a first of the multiplexing units (VC4_1) as reference for a latency measurement;
 - 20 – sending a second of said multiplexing units (VC4_2) to the second network node (N2); and
 - at said first network node, determining a latency difference between said first and second multiplexing units (VC4_1, VC4_2) using a buffer (B) available in said first network node (N1) for re-aligning members of a
 - 25 virtual concatenation group,
- wherein
- said second multiplexing unit (VC4_2) is looped back at said second network node to said first network node (N1) and
 - said first multiplexing unit (VC4_1) is internally switched back to a line
 - 30 card, where the virtual concatenation group is terminated.

2. A method according to claim 1, wherein the latency of said transport connection to be measured is determined by subtracting a known equipment latency and dividing the remainder by 2.

5

3. A method according to claim 1, wherein said virtual concatenation group is an already existing virtual concatenation group to which said first and second multiplexing units (VC4_1, VC4_2) are added as inactive members.

10

4. A method according to claim 1, wherein the measurement is performed during said transmission connection is in service and wherein the loopback is performed in a switching matrix (S2) of said second network node (N2).

15

5. A method according to claim 1, wherein the measurement is performed during said transmission connection is out of service and wherein the loopback is performed through a line loopback function at a receiving port (P2) of said second network node (N2).

20

6. A method according to claim 1, wherein said virtual concatenation group is created on a line card for packet services (LC) of said first network node (N1) and wherein said line card for packet services (LC) also contains said buffer (B) for re-aligning members of a virtual concatenation group.

25

7. A method according to claim 1, further comprising an indicator capable of counting overflow events of said buffer (B), and wherein for each buffer overflow, a fixed value is added to the determined latency difference, which value corresponds to the size of the buffer (B).

30

8. A method according to claim 1, wherein multiple multiplexing units of a virtual concatenation group are used to measure the latency of a line and one or more segments along that line by looping back different multiplexing units of said virtual concatenation group at intermediate network nodes.

9. A method according to claim 1, wherein multiple elements of a virtual concatenation group are used to measure the latency of multiple lines in parallel.

5 10. A controller of a distributed control plane controlling a first network node (N1), wherein said controller comprises a function for measuring the latency of a transport connection between the first network node (N1) and a second network node (N2) and wherein upon execution, said function configures said first network node (N1)

- 10 – to create a virtual concatenation group comprising at least two multiplexing units (VC4_1, VC4_2);
- to use a first of the multiplexing units (VC4_1) as reference for a latency measurement; and
- to send a second of said multiplexing units (VC4_2) to a second network
- 15 node (N2);

wherein said function further instructs a second controller of said second network node (N2) to configure said second network node to loop said second multiplexing units (VC4_2) back to said first network node (N1) and wherein said function further configures said first network node (N1) to switch

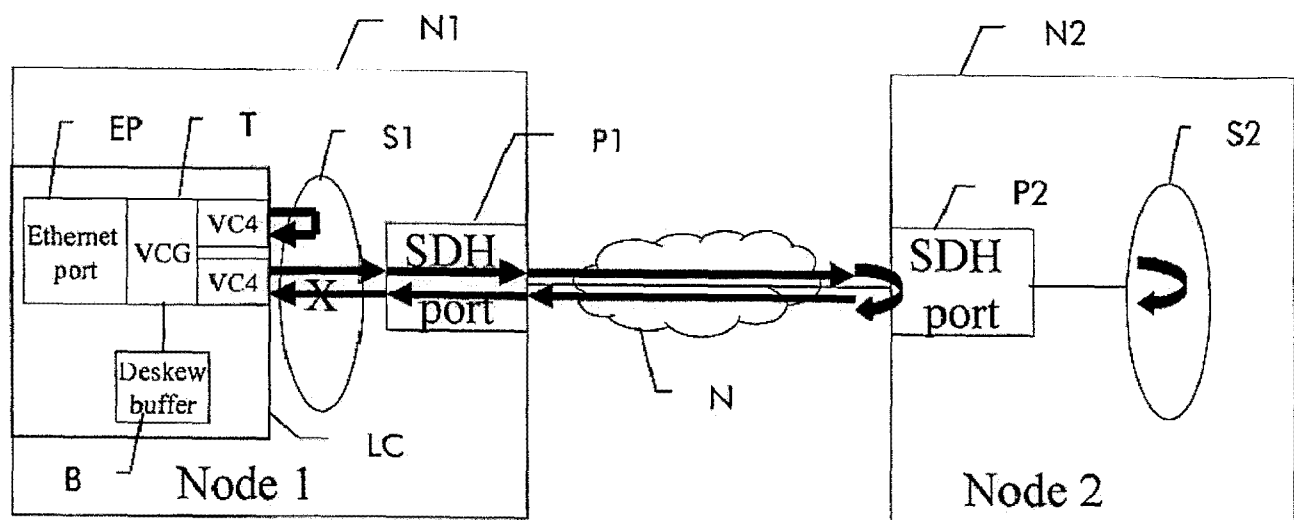
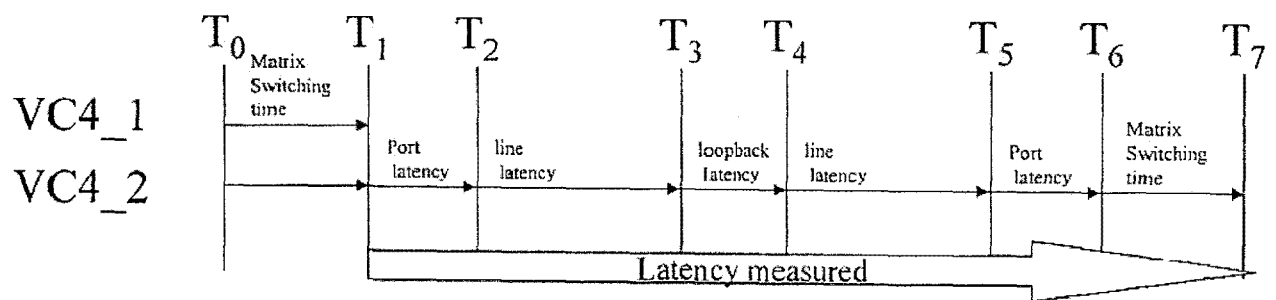
20 said first multiplexing unit (VC4_1) internally back to a line card, where the virtual concatenation group is terminated and to determine a latency difference between said first and second multiplexing units (VC4_1, VC4_2) using a buffer available in said first network node (N1) for re-aligning members of a virtual concatenation group.

25

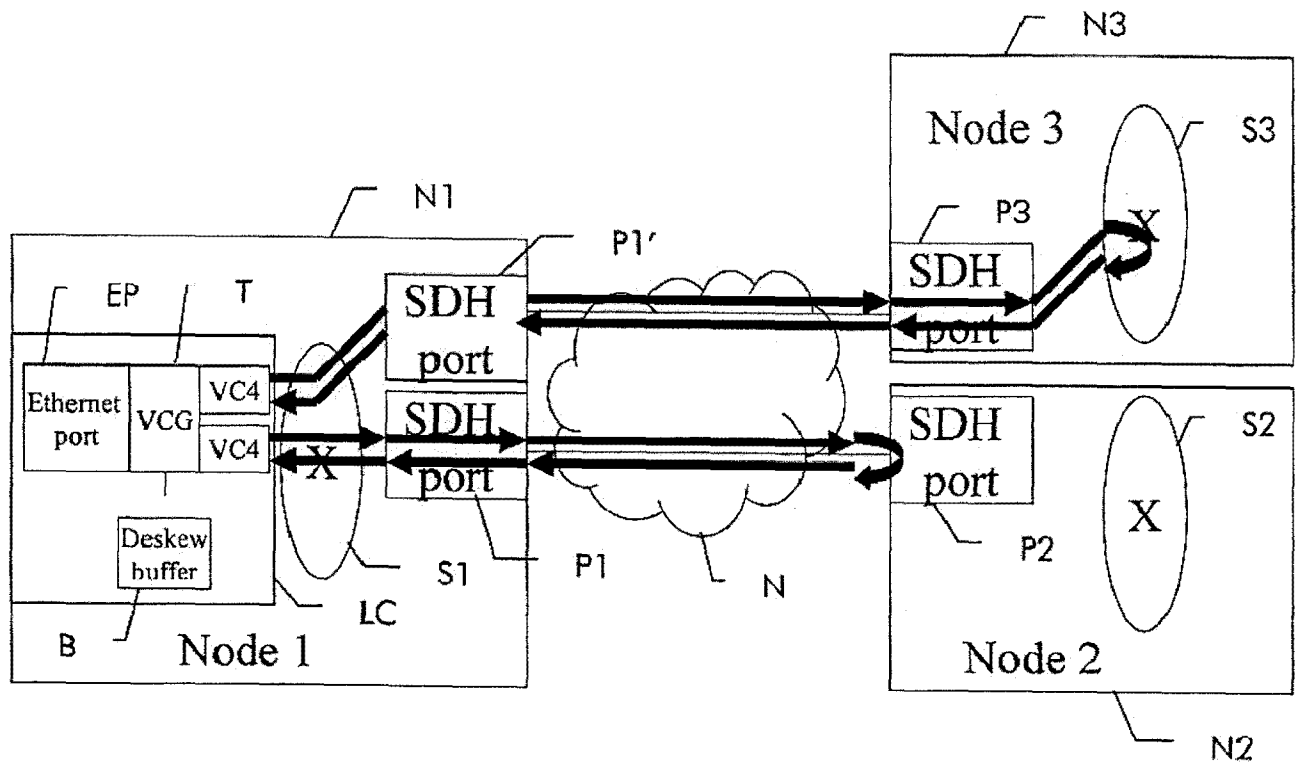
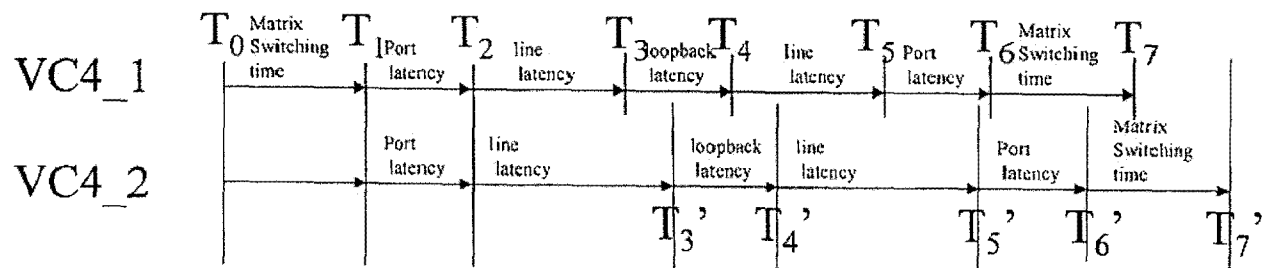
11. A controller according to claim 10, wherein said function makes use of a protocol of the Generalized Multi-Protocol Labels Switching protocol suite and in particular the Link Management Protocol to instruct said second controller.

30 12. A network management system comprising a maintenance function, which upon execution configures a first network element (N1) and a second network element (N2) to perform the steps of the method according to any of claims 1 to 10.

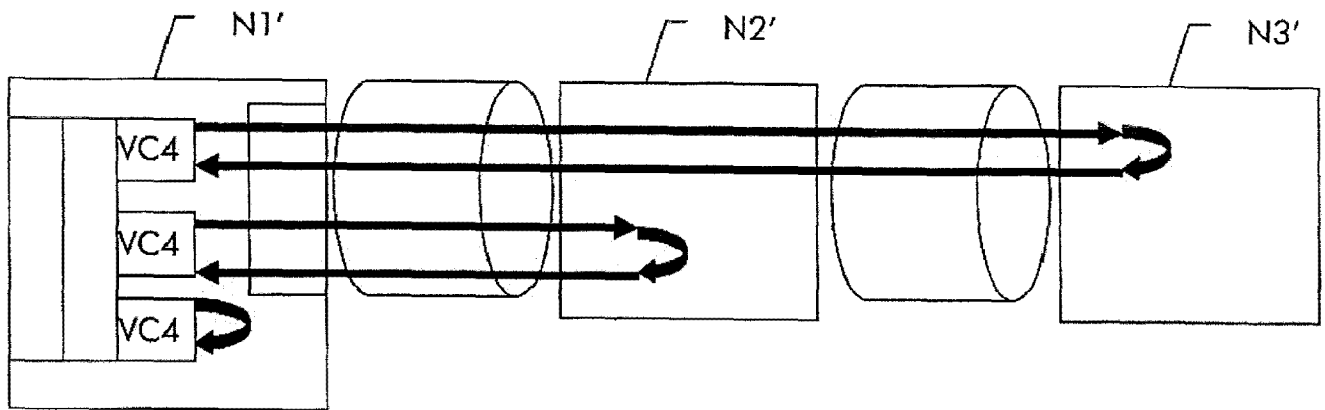
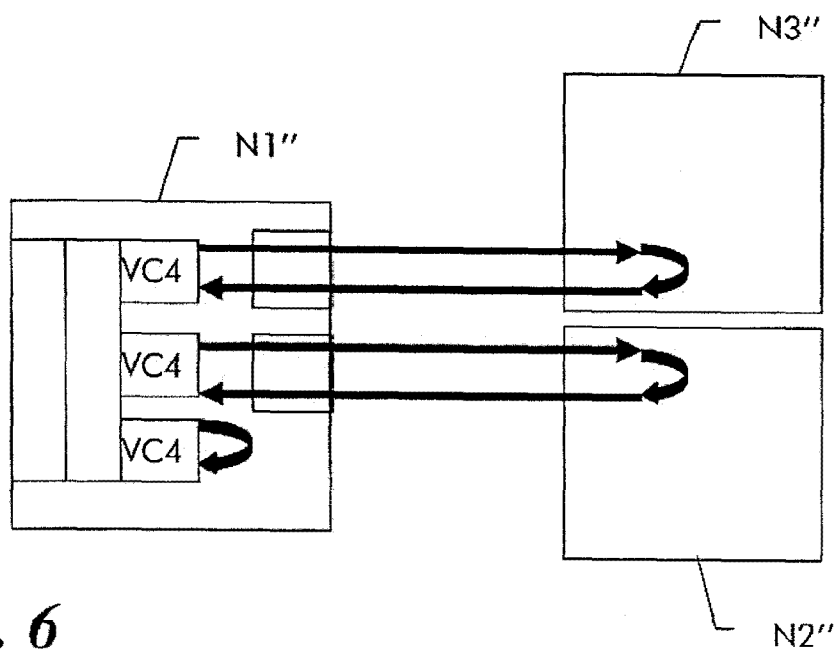
1/3

*Fig. 1**Fig. 2*

2/3

**Fig. 3****Fig. 4**

3/3

*Fig. 5**Fig. 6*

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2010/056608

A. CLASSIFICATION OF SUBJECT MATTER

INV. H04J3/14 H04J3/16 H04L12/26
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H04J H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2005/265251 A1 (ACHARYA SWARUP [US] ET AL) 1 December 2005 (2005-12-01) abstract paragraph [0006] paragraph [0009] - paragraph [0012] paragraph [0014] - paragraph [0022] paragraph [0030] - paragraph [0034] paragraph [0060] - paragraph [0064] claims 1-7; figures 1-6	1-12
A	WO 2004/068750 A (SAMSUNG ELECTRONICS CO LTD [KR]; KIM KYOU-SEUNG [KR]) 12 August 2004 (2004-08-12) abstract page 8, line 16 - page 9, line 34; figures 2-5 ----- -/-	1,10



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

7 June 2010

Date of mailing of the international search report

16/06/2010

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Jimenez Hernandez, P

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2010/056608

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 03/063396 A (AGILENT TECHNOLOGIES INC [US]; NAG ATANU [GB]; RHODES MARK [GB]; JOHNS) 31 July 2003 (2003-07-31) abstract; claims 1-4 paragraph [0008] - paragraph [0019] -----	1,10
A	JP 2000 332715 A (NIPPON ELECTRIC CO) 30 November 2000 (2000-11-30) abstract paragraph [0004] - paragraph [0010] -----	1,2
A	US 6 545 979 B1 (POULIN ANDRE [CA]) 8 April 2003 (2003-04-08) the whole document -----	1,2

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/EP2010/056608

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 2005265251	A1	01-12-2005	NONE	
WO 2004068750	A	12-08-2004	CN 1698295 A	16-11-2005
			JP 3950153 B2	25-07-2007
			JP 2006515489 T	25-05-2006
			KR 20040069873 A	06-08-2004
			US 2004184487 A1	23-09-2004
WO 03063396	A	31-07-2003	NONE	
JP 2000332715	A	30-11-2000	NONE	
US 6545979	B1	08-04-2003	NONE	