

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
27 May 2004 (27.05.2004)

PCT

(10) International Publication Number
WO 2004/044634 A1

(51) International Patent Classification⁷: **G02B 6/293**

(21) International Application Number:
PCT/US2003/036096

(22) International Filing Date:
12 November 2003 (12.11.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/425,939 13 November 2002 (13.11.2002) US

(71) Applicant (for all designated States except US): **BAT-TELLE MEMORIAL INSTITUTE** [US/US]; 505 King Avenue, Columbus, OH 43201-2693 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **LAUDO, John, S.** [US/US]; 2072 Flanders Court, Columbus, OH 43235 (US).

(74) Agents: **BEYER, James, E.** et al.; Dinsmore & Shohl LLP, One Dayton Centre, Suite 500, One South Main Street, Dayton, OH 45402-2023 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: OPTICAL WAVELENGTH DIVISION MUX/DEMUX WITH INTEGRATED OPTICAL AMPLIFIER

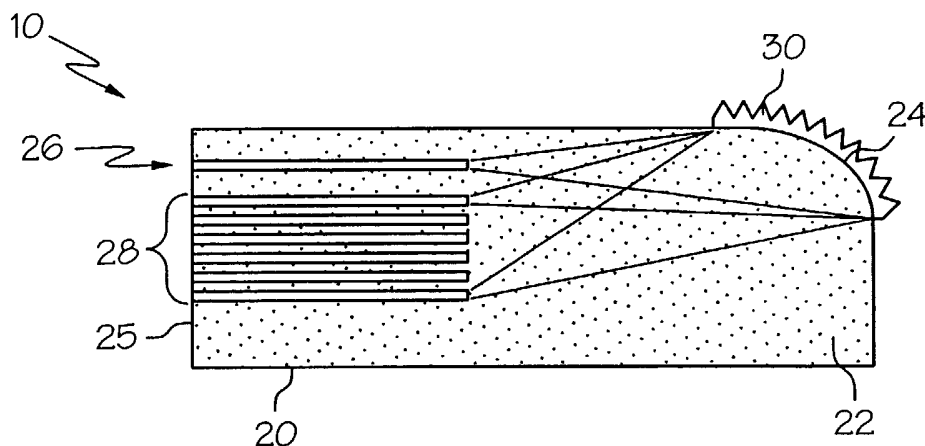

(57) Abstract: An integrated optical device is provided comprising a waveguide body, a spectral combiner/divider, a primary input/output channel, and a set of displaced input/output channels. The waveguide body comprises an optical amplification medium configured to amplify different spectral components of a multi-component optical signal propagating there through.



WO 2004/044634 A1

OPTICAL WAVELENGTH DIVISION MUX/DEMUX WITH INTEGRATED OPTICAL AMPLIFIER

The present invention relates generally to the propagation, direction, conditioning and other control of optical signals in optical devices and, more particularly, to the control of optical signals consisting of multiple spectral components. Modern telecommunications networks, for example, utilize a variety of optical components to affect control of multi-component optical signals. The present invention presents a scheme for addressing design and performance considerations related to handling multi-component optical signals of such networks.

For the purposes of defining and describing the present invention, it is noted that the use of the term "optical" throughout the present description and claims is not intended to define a limit to any particular wavelength or portion of the electromagnetic spectrum. Rather, the term "optical" is defined herein to cover any wavelength of electromagnetic radiation capable of propagating in a suitable signal propagating structure. For example, optical signals in the infrared regions of 850, 1350, 1400 and 1550 nm are commonly used in optical telecommunications.

The present inventors have recognized a need for an improved scheme for the control of optical signals in optical devices and, more particularly, for improved control of multi-component optical signals. This need is met by the present invention.

In accordance with one embodiment of the present invention, an integrated optical device is provided comprising a waveguide body, a spectral combiner/divider, a primary input/output channel, and a set of displaced input/output channels. The waveguide body is configured to permit propagation of an optical signal having multiple spectral components. At least a substantial portion of the waveguide body comprises an optical amplification medium configured to amplify different spectral components of the multi-component optical signal. The spectral combiner/divider is near a boundary of the waveguide body and is configured such that (i) a spatial distribution of an optical signal propagating to and from the spectral combiner/divider is a function of respective component wavelengths of the multi-component optical signal, and (ii) a substantial portion of the optical signal propagates through the optical amplification medium. The primary input/output channel and the set of displaced input/output channels are defined in the waveguide body. The

-2-

displacement of each of the displaced input/output channels from the primary input/output channel is defined at least in part by the spectral combiner/divider. A substantial portion of the optical signal in the primary input/output channel, the set of displaced input/output channels, or both, propagates through the optical amplification medium.

5 In accordance with another embodiment of the present invention, an integrated optical device is provided where the primary input/output channel defines a multidirectional path propagating through the optical amplification medium.

 In accordance with yet another embodiment of the present invention, an integrated optical device is provided where the primary input/output channel defines a configuration
10 designed to yield optical signal amplification sufficient to offset optical losses in the integrated optical device.

 In accordance with yet another embodiment of the present invention, an integrated optical device is provided comprising an erbium or ytterbium-doped glass slab waveguide body and a spectral combiner/divider. The waveguide body is configured to permit
15 propagation of an optical signal having multiple spectral components. The waveguide body is doped with sufficient erbium or ytterbium for amplification of different spectral components of the multi-component optical signal. The spectral combiner/divider is at a curved periphery of the waveguide body. The curved periphery and the spectral combiner/divider are configured such that the multi-component optical signal propagates
20 from an input/output face of the waveguide body, through the waveguide body to the spectral combiner/divider at the curved periphery of the waveguide body, back through the waveguide body, as reflected by the spectral combiner/divider, and to the input/output face of the waveguide body. A spatially condensed optical signal propagating from the input/output face of the waveguide body to the spectral combiner/divider, and from the
25 spectral combiner/divider to the input/output face, is spatially expanded by the spectral combiner/divider according to respective component wavelengths of the multi-component optical signal. A spatially expanded optical signal propagating from an input/output face of the waveguide body to the spectral combiner/divider, and from the spectral combiner/divider to the input/output face, is spatially condensed by the spectral
30 combiner/divider according to respective component wavelengths of the multi-component optical signal. The spatially condensed optical signal propagating between the

-3-

input/output face of the waveguide body and the spectral combiner/divider defines a primary input/output channel in the waveguide body. The spatially expanded optical signal propagating between the input/output face of the waveguide body and the spectral combiner/divider defines a set of displaced input/output channels in the waveguide body.

- 5 The displacement of each of the displaced input/output channels from the primary input/output channel along the input/output face is defined by the spectral combiner/divider.

In accordance with yet another embodiment of the present invention, a telecommunications or other type of optical network is provided comprising at least one
10 transmitter, at least one regenerator, and at least one receiver. The transmitter is configured to transmit an optical signal having multiple spectral components. The regenerator is configured to amplify the multi-component optical signal. The receiver is configured to receive the multi-component optical signal. The transmitter, regenerator, receiver, or combinations thereof, comprise one or more integrated optical devices
15 according to the present invention.

Accordingly, it is an object of the present invention to provide for improved propagation, direction, conditioning and other control of optical signals in optical devices and optical networks. Other objects of the present invention will be apparent in light of the description of the invention embodied herein.

20 In accordance with yet another embodiment of the invention, an optical sensor is provided which uses the evanescent tail of the waveguiding region to sense the attachment of particles or materials on the surface of the waveguide in a multi-channel format.

The following detailed description of specific embodiments of the present invention can be best understood when read in conjunction with the following drawings,
25 where like structure is indicated with like reference numerals and in which:

Fig. 1 is a schematic illustration of an integrated optical device in accordance with one embodiment of the present invention;

Figs. 2-5 are schematic illustrations of integrated optical devices in accordance with alternative embodiments of the present invention;

30 Fig. 6 is a schematic illustration of an integrated optical device in accordance with a further alternative embodiment of the present invention; and

Fig. 7 is a schematic illustration of an optical network.

Referring initially to Fig. 1, an integrated optical device **10** according to one embodiment of the present invention is illustrated schematically. The integrated optical device **10** comprises a waveguide body **20**, a spectral combiner/divider **30**, a primary
5 input/output channel **40**, and a set of displaced input/output channels **50**.

The waveguide body **20** is constructed of a material suitable for permitting propagation of an optical signal there through. For example, the waveguide body **20** may comprise silica or another glass, a polymeric material, or any other material suitable for propagation of optical signals having a plurality of different spectral components. Further,
10 the waveguide body is configured to amplify different spectral components of the multi-component optical signal. For example, the waveguide body **20**, or at least a substantial portion of it, may be doped with an optical amplification medium **22**. Although the illustrated embodiment shows a waveguide body **20** where substantially all of the waveguide body **20** comprises the optical amplification medium **22**, it is contemplated that
15 suitable selective presentation of the optical amplification medium **22** would allow for provision of the optical amplification medium **22** in a lesser portion or a mere majority of the waveguide body **20**.

The optical amplification medium receives light energy from an external source, e.g., a laser diode that pumps light into a fiber, and acts as a laser in its own right. The
20 external light energy raises the energy level of atoms in the optical amplification medium **22**, creating a population inversion of states. The population inversion of states is necessary for stimulated emission to occur. The emission stimulated in the optical amplification medium is coherent with and therefore amplifies the optical signal propagating through the waveguide body **20**. In this manner, the optical signal propagates
25 through the optical amplification medium **22** and may be subject to amplification by using, for example, a pump laser. Suitable dopants include erbium, neodymium, ytterbium, praseodymium, samarium, terbium, and other rare earth elements, transition metals, or other optically active elements. It is contemplated that the waveguide body may include other additives or dopants in addition to the optical amplification medium.

30 The spectral combiner/divider **30** is positioned near a boundary **24** of the waveguide body **20** and is configured to aid in multiplexing or demultiplexing the spectral

components of an optical signal. The spatial distribution of an optical signal propagating to and from the spectral combiner/divider **30** is a function of the respective component wavelengths of the multi-component optical signal. More specifically, a spatially condensed, multiplexed multi-component optical signal propagating from an input/output face **25** of the waveguide body **20** to the spectral combiner/divider **30** is spatially expanded by the spectral combiner/divider **30** according to the respective component wavelengths of the multi-component optical signal. The signal is then directed back to the input/output face **25** as a spatially expanded, demultiplexed optical signal. Similarly, a spatially expanded, demultiplexed optical signal propagating from the input/output face **25** to the spectral combiner/divider **30** is spatially condensed by the spectral combiner/divider **30** according to respective component wavelengths of the multi-component optical signal. The signal is then directed back to the input/output face **25** as a spatially condensed, multiplexed optical signal.

The spectral combiner/divider **30** may take the form of a reflective grating structure (e.g., a reflective diffraction grating), as is illustrated in Figs. 1-6. However, it is noted that any one or more of a plurality of suitable alternative structures may be employed to achieve spectral combination or division according to the present invention. For example, it is contemplated that an echelle grating, a holographically-formed reflective grating, a Rowland circle grating, a reflector stack, a wavelength selective interference filter, a flat specular reflection surface, a side-tap waveguide grating, a Bragg grating, and a super-dispersive prism formed by a photonic bandgap structure would all have utility in defining the spectral combiner/divider **30** of the present invention.

A primary input/output channel **26** and a set of displaced input/output channels **28** are defined in the waveguide body **20**. Each of the displaced input/output channels **28** are displaced from the primary input/output channel **26** by a distance and direction that is defined, at least in part, by the optical characteristics of the spectral combiner/divider **30**. For example, referring to the illustrated embodiments, where an optical signal to be demultiplexed is input through the input/output channel **26**, the spectral combiner/divider **30** spatially distributes the signal based upon wavelength differences of components in the signal. The displaced input/output channels **28** are positioned to receive individual ones of the spatially distributed signals.

-6-

The primary input output channel **26**, the spectral combiner/divider **30**, and the set of displaced input/output channels **28** define a folded optical path along which the optical signal propagates. In the illustrated embodiment, the waveguide body **20**, the spectral combiner/divider **30**, and the optical amplification medium are configured such that

5 substantially the entire optical signal propagating to the spectral combiner/divider **30** and substantially the entire optical signal propagating from the spectral combiner/divider **30** propagate through the optical amplification medium **22**. At least a portion of the optical signal propagating to and from the spectral combiner/divider **30** should propagate through the optical amplification medium **22**. In Figs. **1-3**, the optical amplification medium is

10 present along both legs of the folded optical path. In the embodiment of Fig. **6**, the optical amplification medium is present along all legs of the folded optical path. Of course, it is contemplated that the optical amplification medium **22** may be present along only one leg, or less than all legs, of the folded optical path.

In the embodiment illustrated in Figs. **1** and **4-6**, the spectral combiner/divider **30**

15 is formed at an interface with the boundary **24** of the waveguide body **20** by securing it to the boundary **24** of the waveguide body **20**. It may be preferable to provide for some type of optical coupling between the spectral combiner/divider **30** and the waveguide body **20**. As is illustrated in Fig. **3**, it is noted that the spectral combiner/divider **30** may be formed in the waveguide body **20** at the periphery of the body **20** or inland of the periphery.

20 Similarly, as is illustrated in Fig. **2**, the spectral combiner/divider **30** may be formed integral with the waveguide body **20**, as an extension of the waveguide body **20**.

Comparing Figs. **1** and **2**, it is noted that the primary input/output channel **26** and the set of displaced input/output channels **28** may be defined in the waveguide body **20** by input/output structure formed within the waveguide body or at an interface with the

25 waveguide body **20**. More specifically, in the embodiment of Fig. **1**, the primary input/output channel **26** and the set of displaced input/output channels **28** are defined in the waveguide body **20** by suitable ridge or buried waveguides or other optical signal propagating structure. In contrast, referring to Fig. **2** the primary input/output channel **26** and the set of displaced input/output channels **28** are merely defined in the waveguide

30 body **20** by suitable optical signal propagating structure (not shown) that is optically coupled to or formed at an interface with the waveguide body **20**. To clarify, it is noted

-7-

that a primary or displaced input/output channel may be “defined in” the waveguide body by providing input/output structure within the waveguide body, at an interface with the waveguide body, or coupled to the waveguide body.

Turning to Figs. 4 and 5, the primary input/output channel **26** may be presented as a multi-directional spiral waveguide **35** to maximize potential signal amplification and enhance the versatility of the integrated optical device **10** of the present invention. The spiral waveguide **35** may be configured to avoid crossing itself, as is illustrated in Fig. 4, or may be a folded spiral waveguide **35** that crosses itself at one or more points along the waveguide **35**, as is illustrated in Fig. 5. The resulting increase in waveguide length allows for increased amplification using external light energy from a pump source **45** in the form of, for example, a pump laser. The structure of the spiral waveguide and the manner in which it is formed is beyond the scope of the present invention but may be gleaned from conventional and yet to be developed teachings on the subject of planar waveguides.

The spiral waveguides **35** of Figs. 4 and 5 are well suited for tailoring the amplification of the optical signal to offset for optical losses of the integrated optical device **10** because the length of the optical path defined by the spiral waveguide **35** can be tailored to achieve optimum amplification. The level of amplification may be set to any desired value including a desired net gain value for the device. However, according to one embodiment of the present invention, the level of amplification is set to a value selected to offset optical losses, including but not limited to absorptive and insertion losses, throughout the optical device **10**. For example, the energy density of the light from the external light source used for pumping the optical amplification medium **22** may be significantly reduced in specific low pump density areas **47** of the device **10**. In these areas of relatively low pump density, the pump energy density may be too low to overcome the absorption losses attributable to the amplification medium, in which case the population inversion of states necessary for stimulated emission will not occur and absorptive optical losses will result. The effect of these optical losses can be offset by ensuring that the spiral waveguide **35** is positioned in relatively high pump density areas **49** and defines an optical path length in those areas that is sufficient to offset the losses in the relatively low pump density areas. Although the low and high pump density areas **47**,

49 are delineated in Figs. 4 and 5 with a clear demarcation between the two areas, the actual transition from one region to the next will be less definitely defined and may occur at a variety of locations in the device 10 depending partly upon the nature of the pump source.

5 The spiral waveguides illustrated in Figs. 4 and 5 are referred to herein as “multi-directional” waveguides because the waveguide itself travels in at least two different directions to increase its path length in relatively high pump density areas 49. It is contemplated that any suitable multi-directional waveguide configuration may be utilized in place of the spiral waveguides 35 of Figs. 4 and 5 to increase the available optical path
10 length in the areas 49 of relatively high pump density.

 Use of the spiral waveguide 35 also allows for the reduction of the dopant level of the optical amplification medium 22. Specifically, the dopant level of the entire optical device 10 may be reduced because the optical device 10 can be configured such that the spiral waveguide 35 defines an extended path length in areas of high pump density. Areas
15 of relatively low pump density thus contribute less absorptive loss to the device as a whole because of the reduced dopant level. It is contemplated that an optimum dopant level and spiral waveguide configuration may be achieved to offset the overall absorptive loss of the optical device 10 or, more specifically, to balance the absorptive loss and the optical signal amplification of the device 10.

20 A variety of factors affect the degree to which the optical signal amplification offset the optical losses, including, but not limited to: (i) the optical configuration of the primary input/output channel, including characteristics such as its optical path length, geometry, and position within the high pump density areas; (ii) the choice of amplification medium dopant and dopant level; (iii) the length of the optical path in the low pump
25 density area; and (iv) the overall device layout and configuration; and (iv) the curvature or focal length of the device. Any one or more of these factors can be utilized and controlled to achieve the gain/loss offset and balance described herein.

 Returning briefly to the embodiments of Figs. 1-3, where a substantially linear primary input/output channel 26 is utilized, it is contemplated that the dopant level in the
30 device 10 and the length and position of the primary input/output channel 26 may also be

optimized to achieve a desired gain or to offset or balance the overall optical loss of the optical device **10**.

Referring to Fig. 6, an alternative integrated optical device **10** according to the present invention is illustrated. The device **10** includes a partially transmissive reflector **40** positioned along the folded optical path defined by the primary input output channel **26**, the spectral combiner/divider **30**, and the set of displaced input/output channels **28**. An additional reflector **50** is provided at a curved periphery of the waveguide body **20** to enable redirection of an optical signal reflected by the partially transmissive reflector **40**. In this manner, first, second, and third folds are defined in the optical path and the optical signal is directed along an optical path that begins and ends at the input/output face **25** of the waveguide body **20**.

A detector **42** may be positioned along the optical path to detect that portion of the optical signal transmitted through the partially transmissive reflector **40**. In this manner, the partially transmissive reflector **40** and the detector **42** function as an optical signal monitor in the folded optical path. It is contemplated that alternative structure may be provided to yield a suitable optical signal monitor.

It is further contemplated that block element **40** may alternatively comprise an optical signal filter **40** in the form of a wavelength selective reflector or another type of suitable filter. In this manner, the integrated optical device may be employed to permit transmission or reflection of only selected wavelength portions of the optical signal. It is noted that an optical signal filter may be positioned at any one of a number of suitable positions along the folded optical path. It is further noted that an optical signal filter **40** may be employed with the detector **42** as a filtered optical signal monitor to detect portions of the optical signal in one or more specific wavelength bands.

Referring to Fig. 7, we note that integrated optical devices of the present invention may be employed in a telecommunications or other type of optical network **50**. Optical networks **50** typically comprise, among other things, transmitters **60**, regenerators **70**, and receivers **80**. The optical transmitter **60** is configured to transmit an optical signal having multiple spectral components. The regenerator **70** is used to amplify the multi-component optical signal generated by the transmitter **60**. The receiver **80** is configured to receive the multi-component optical signal generated by the transmitter and amplified by the

-10-

regenerator. A given optical network **50** will typically employ a plurality of transmitters **60**, regenerators **70**, and receivers **80** and each of these components may control the optical signal in a variety of ways. Integrated optical devices according to the present invention will have utility in such components where the functionality of the component
5 allows for, or requires, amplification of the optical signal as its spectral components are spatially expanded or condensed.

Typically, in telecommunications and other types of optical networks, an optical transmitter **60** will require multiplexing or spatial condensing of the spectral components of an optical signal while an optical receiver **80** will require demultiplexing or spatial
10 expansion of an optical signal. Accordingly, it is contemplated that use of a multiplexing integrated optical device according to the present invention would be advantageous in the context of an optical transmitter **60** of an optical network. Similarly, it is contemplated that use of a demultiplexing integrated optical device according to the present invention, which can reduce the optical signal losses incurred by typical demultiplexers, would be
15 advantageous in the context of an optical receiver **80**. It is further contemplated that use of an integrated optical device according to the present invention may also be advantageous in the context of an optical regenerator **70**. More specifically, where the transmitter **60** comprises an integrated optical device according to the present invention, the primary input/output channel **26** of the optical device is coupled to an input channel of the
20 regenerator **70** or the receiver **80**. Where the receiver **80** comprises an integrated optical device according to the present invention, the primary input/output channel **26** of the device is coupled to an output channel of the regenerator **70** or the transmitter.

It is further contemplated that an integrated optical device according to the present invention may be employed as an optical sensor by utilizing the evanescent tail of the
25 waveguiding region of the waveguide body **20** to sense the attachment of particles or materials on the surface of the waveguide body **20**. Specifically, particles or materials present on the surface of the waveguiding region will lead to attenuation of the evanescent field. This attenuation can be detected at the output of the device as changes in the output spectrum or otherwise. The nature of the attenuation will be indicative of the presence of
30 certain particles or materials, i.e., chemical materials, biological material, inorganic or organic materials, etc. The set of displaced input/output channels **28** of the waveguide

-11-

body 20 can effectively provide particle or material sensing in a multi-channel format.

It is noted that terms like “preferably,” “commonly,” and “typically” are not utilized herein to limit the scope of the claimed invention or to imply that certain features are critical, essential, or even important to the structure or function of the claimed
5 invention. Rather, these terms are merely intended to highlight alternative or additional features that may or may not be utilized in a particular embodiment of the present invention.

For the purposes of describing and defining the present invention it is noted that the term “substantially” is utilized herein to represent the inherent degree of uncertainty
10 that may be attributed to any quantitative comparison, value, measurement, or other representation. The term “substantially” is also utilized herein to represent the degree by which a quantitative representation may vary from a stated reference without resulting in a change in the basic function of the subject matter at issue.

Having described the invention in detail and by reference to specific embodiments
15 thereof, it will be apparent that modifications and variations are possible without departing from the scope of the invention defined in the appended claims. More specifically, although some aspects of the present invention are identified herein as preferred or particularly advantageous, it is contemplated that the present invention is not necessarily limited to these preferred aspects of the invention.

20

CLAIMS

1. An integrated optical device comprising:
 - 5 a waveguide body configured to permit propagation of an optical signal having multiple spectral components, wherein at least a substantial portion of said waveguide body comprises an optical amplification medium configured to amplify different spectral components of said multi-component optical signal;
a spectral combiner/divider near a boundary of said waveguide body, wherein said
10 spectral combiner/divider is configured such that
 - a spatial distribution of an optical signal propagating to and from said spectral combiner/divider is a function of respective component wavelengths of said multi-component optical signal, and
a substantial portion of said optical signal propagates through said
15 optical amplification medium; and
 - a primary input/output channel defined in said waveguide body and a set of displaced input/output channels defined in said waveguide body, wherein
 - a displacement of each of said displaced input/output channels from said primary input/output channel is defined at least in part by said spectral
20 combiner/divider, and
 - a substantial portion of said optical signal in at least one of said primary input/output channel and said set of displaced input/output channels propagates through said optical amplification medium.
- 25 2. An integrated optical device as claimed in claim 1 wherein said waveguide body comprises an erbium or ytterbium-doped glass slab waveguide body doped sufficiently for amplification of different spectral components of said multi-component optical signal.
3. An integrated optical device as claimed in claim 1 wherein said spectral
30 combiner/divider is secured to said boundary of said waveguide body.

-13-

4. An integrated optical device as claimed in claim 1 wherein said spectral combiner/divider is formed at an interface with said boundary of said waveguide body.
5. An integrated optical device as claimed in claim 1 wherein said spectral
5 combiner/divider is formed in said waveguide body.
6. An integrated optical device as claimed in claim 1 wherein said spectral combiner/divider is optically coupled to said boundary of said waveguide body.
- 10 7. An integrated optical device as claimed in claim 1 wherein said spectral combiner/divider is formed integral with said waveguide body as an extension of said waveguide body.
8. An integrated optical device as claimed in claim 1 wherein said spectral
15 combiner/divider comprises a reflective grating structure.
9. An integrated optical device as claimed in claim 8 wherein said grating structure is secured to said waveguide body at a curved interface with said waveguide body.
- 20 10. An integrated optical device as claimed in claim 1 wherein said spectral combiner/divider comprises at least one component selected from: a reflective grating structure, an echelle grating, a holographically-formed reflective grating, a Rowland circle grating, a reflector stack, a wavelength selective interference filter, a flat specular reflection surface, a side-tap waveguide grating, a Bragg grating, and a super-dispersive
25 prism, a volume phase grating, and combinations thereof.
11. An integrated optical device as claimed in claim 1 wherein said primary input output channel, said spectral combiner/divider, and said set of displaced input/output channels define a folded optical path along which said optical signal propagates.

-14-

12. An integrated optical device as claimed in claim 11 wherein said integrated optical device further comprises a partially transmissive reflector positioned along said optical path.
- 5 13. An integrated optical device as claimed in claim 12 wherein said spectral combiner/divider defines a first fold in said optical path and said partially transmissive reflector defines a second fold in said optical path.
- 10 14. An integrated optical device as claimed in claim 13 wherein said integrated optical device further comprises an additional reflector defining a third fold in said optical path.
- 15 15. An integrated optical device as claimed in claim 14 wherein said first, second, and third folds in said optical paths are such that said primary input/output channel and said set of displaced input/output channels are defined on a common face of said waveguide body.
16. An integrated optical device as claimed in claim 14 wherein said spectral combiner/divider and said additional reflector are formed at a curved periphery of said waveguide body.
- 20 17. An integrated optical device as claimed in claim 12 wherein said partially transmissive reflector is formed in said waveguide body.
18. An integrated optical device as claimed in claim 11 wherein said integrated optical device further comprises an optical signal monitor positioned along said optical path.
- 25 19. An integrated optical device as claimed in claim 18 wherein said optical signal monitor comprises a partially transmissive reflector and a detector positioned to receive a portion of said optical signal partially transmitted through said reflector.
- 30 20. An integrated optical device as claimed in claim 11 wherein said integrated optical device further comprises an optical signal filter positioned along said optical path.

21. An integrated optical device as claimed in claim 20 wherein said optical signal filter comprises a wavelength selective reflector.
- 5 22. An integrated optical device as claimed in claim 1 wherein said primary input/output channel defines a multidirectional path propagating through said optical amplification medium.
23. An integrated optical device as claimed in claim 22 wherein said multidirectional path
10 comprises a spiral component.
24. An integrated optical device as claimed in claim 22 wherein said multidirectional path comprises a folded spiral component.
- 15 25. An integrated optical device as claimed in claim 1 wherein said primary input/output channel defines a configuration designed to yield optical signal amplification sufficient to offset optical losses in said integrated optical device.
26. An integrated optical device as claimed in claim 25 wherein a magnitude of said offset
20 is sufficient to balance said signal amplification and said optical losses.
27. An integrated optical device as claimed in claim 25 wherein said configuration of said input/output channel relates to a position of said input/output channel relative to a high pump density region of said integrated optical device.
25
28. An integrated optical device as claimed in claim 27 wherein:
said integrated optical device further comprises a pump source; and
said high pump density region is defined by said pump source.

29. An integrated optical device as claimed in claim 1 wherein said integrated optical device is configured to enable balance of optical signal amplification and optical losses attributable to said integrated optical device.

5 30. An integrated optical device as claimed in claim 29 wherein said balance of said optical signal amplification and said optical losses is a function of one or more of:
an optical configuration of said primary input/output channel;
a doping level of said optical amplification medium; and
an optical length of said optical signal propagating to and from said spectral
10 combiner/divider.

31. An integrated optical device as claimed in claim 28 wherein said balance of said optical signal amplification and said optical losses is a function of:
an optical configuration of said primary input/output channel;
15 a doping level of said optical amplification medium; and
an optical length of said optical signal propagating to and from said spectral combiner/divider.

32. An integrated optical device as claimed in claim 1 wherein a surface of said
20 waveguide body is configured as a sensing region and said waveguide body is configured such that matter present in said sensing region results in attenuation of an optical signal propagating in said waveguide body.

33. An integrated optical device as claimed in claim 32 wherein said waveguide body is
25 configured such that a plurality of waveguide channels corresponding to said displaced input/output channels pass through said sensing region.

34. An integrated optical device as claimed in claim 32 wherein said waveguide body is
configured such that a primary waveguide channel corresponding to said primary
30 input/output channel passes through said sensing region.

1/3

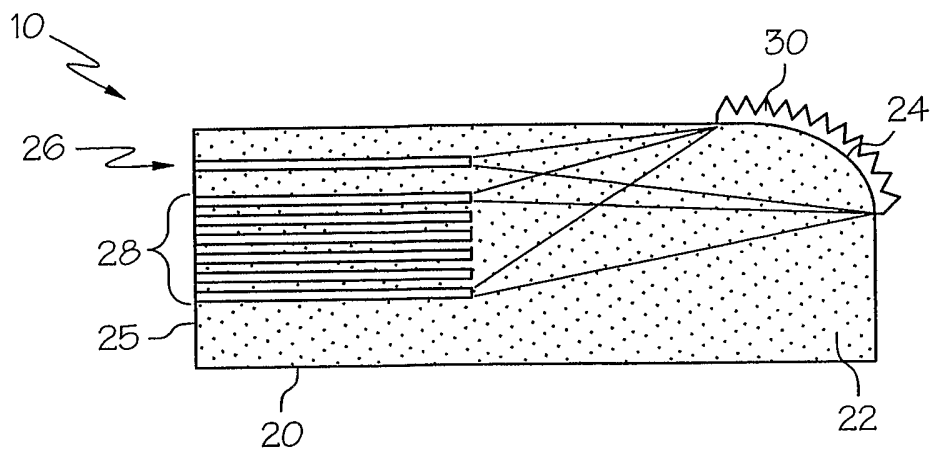


FIG. 1

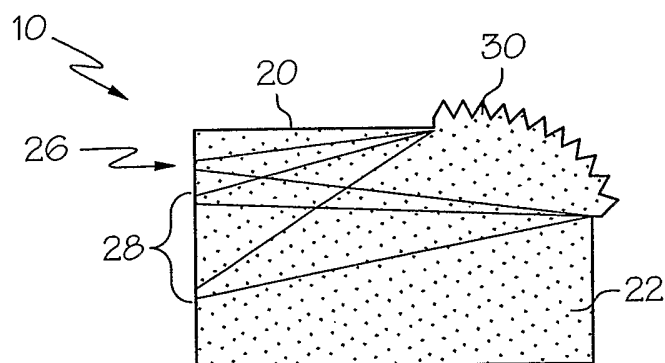


FIG. 2

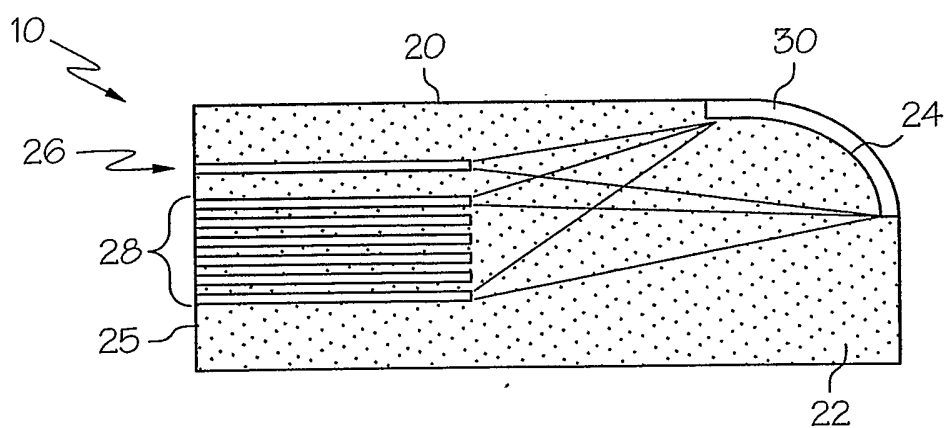


FIG. 3

2 / 3

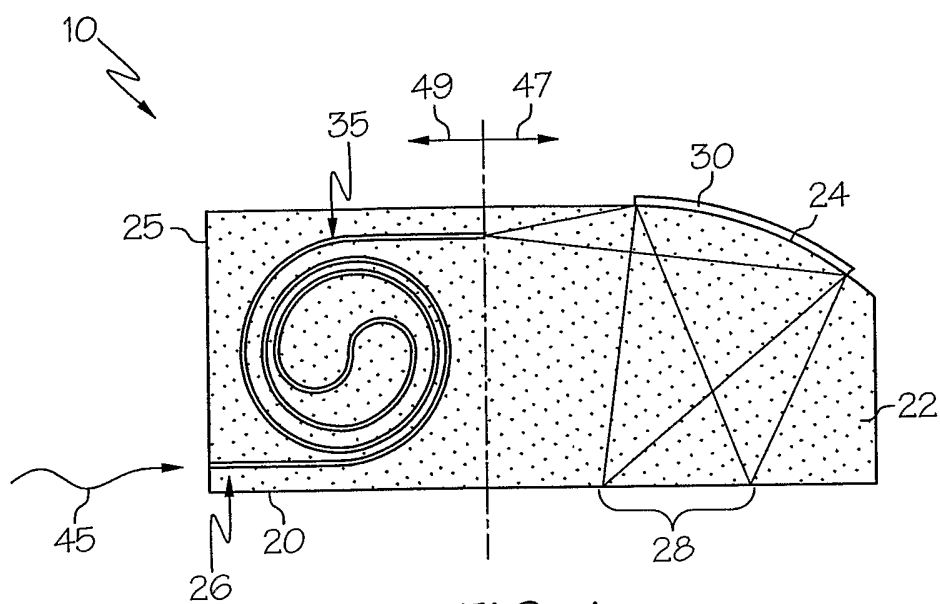


FIG. 4

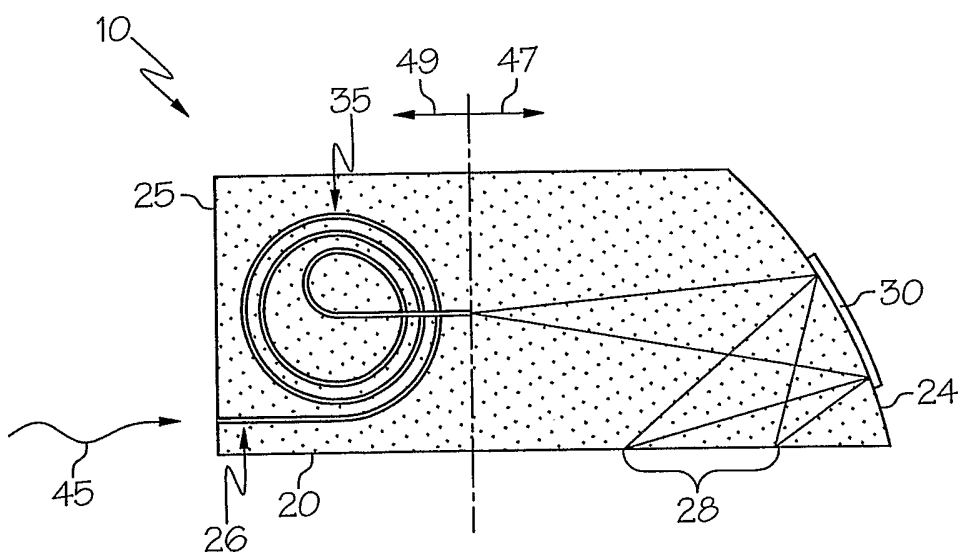


FIG. 5

3 / 3

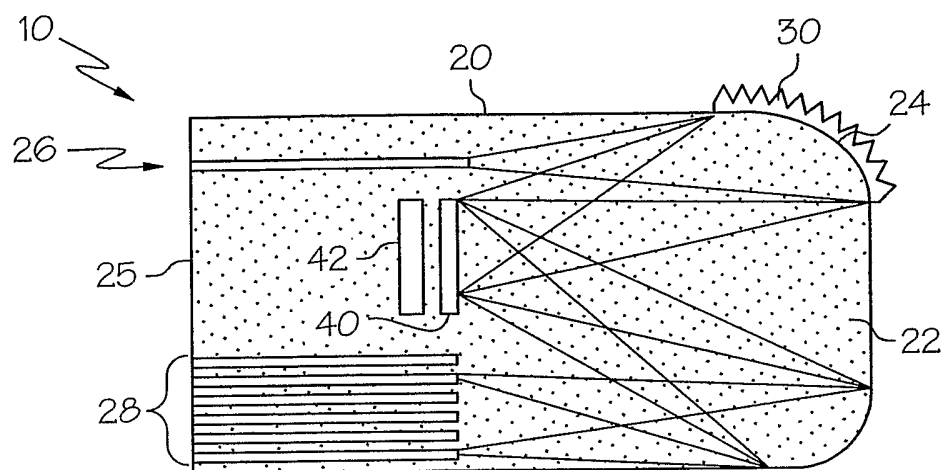


FIG. 6

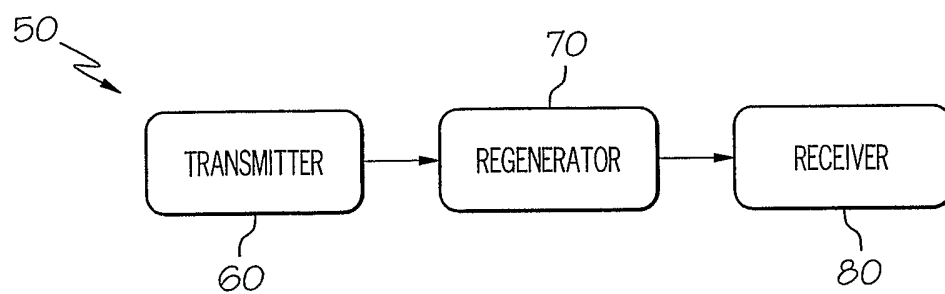


FIG. 7

INTERNATIONAL SEARCH REPORT

Int ☐ al Application No
PCT/US 03/36096

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G02B6/293

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G02B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	DE 42 05 750 A (SIEMENS AG) 26 August 1993 (1993-08-26) figure 1	1-34
Y	POGUNTKE K R ET AL: "DESIGN OF A MULTISTRIPE ARRAY GRATING INTEGRATED CAVITY (MAGIC) LASER" JOURNAL OF LIGHTWAVE TECHNOLOGY, IEEE. NEW YORK, US, vol. 11, no. 12, 1 December 1993 (1993-12-01), pages 2191-2200, XP000422683 ISSN: 0733-8724 figure 2	1-34

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

° Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

26 March 2004

Date of mailing of the international search report

08/04/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Orignac, X

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 03/36096

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 02 37151 A (SCHOTT GLAS ;GERSTNER KLAUS (DE); KAELEBER TOBIAS (DE); PAWLOWSKI E) 10 May 2002 (2002-05-10) page 7, line 19 - line 21 figure 3 ---	2
Y	GB 2 027 546 A (STANDARD TELEPHONES CABLES LTD) 20 February 1980 (1980-02-20) abstract ---	12-19
Y	ASGHARI M ET AL: "Demonstration of an integrated multichannel grating cavity laser for WDM applications" ELECTRONICS LETTERS, IEE STEVENAGE, GB, vol. 30, no. 20, 29 September 1994 (1994-09-29), pages 1674-1675, XP006001141 ISSN: 0013-5194 figure 1 ---	14-16
Y	POLMAN A: "Exciting erbium-doped planar optical amplifier materials" THIN FILMS FOR OPTICAL WAVEGUIDE DEVICES AND MATERIALS FOR OPTICAL LIMITING. SYMPOSIA (MATERIALS RESEARCH SOCIETY SYMPOSIUM PROCEEDINGS VOL.597), THIN FILMS FOR OPTICAL WAVEGUIDE DEVICES AND MATERIALS FOR OPTICAL LIMITING. SYMPOSIA, BOSTON, MA, USA, , pages 3-14, XP002274545 2000, Warrendale, PA, USA, Mater. Res. Soc, USA ISBN: 1-55899-505-6 figure 2A ---	22-24
A	US 6 339 664 B1 (PARKER MICHAEL CHARLES ET AL) 15 January 2002 (2002-01-15) figure 26 ---	1
A	ISHII H ET AL: "ZERO INSERTION LOSS OPERATIONS IN MONOLITHICALLY INTEGRATED WDM CHANNEL SELECTORS" IEEE PHOTONICS TECHNOLOGY LETTERS, IEEE INC. NEW YORK, US, vol. 11, no. 2, February 1999 (1999-02), pages 242-244, XP000803438 ISSN: 1041-1135 figure 1 ---	1

-/--

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 03/36096

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	PARRIAUX O ET AL: "NORMALIZED ANALYSIS FOR THE SENSITIVITY OPTIMIZATION OF INTEGRATED OPTICAL EVANESCENT-WAVE SENSORS" JOURNAL OF LIGHTWAVE TECHNOLOGY, IEEE. NEW YORK, US, vol. 16, no. 4, 1 April 1998 (1998-04-01), pages 573-582, XP000768962 ISSN: 0733-8724 the whole document	32-34
A	WIKI M ET AL: "Novel integrated optical sensor based on a grating coupler triplet" BIOSENSORS & BIOELECTRONICS, 15 NOV. 1998, ELSEVIER, UK, vol. 13, no. 11, pages 1181-1185, XP002274546 ISSN: 0956-5663 the whole document	32-34
A	COTTIER K ET AL: "Thickness-modulated waveguides for integrated optical sensing" OPTICAL FIBERS AND SENSORS FOR MEDICAL APPLICATIONS II, SAN JOSE, CA, USA, 22-23 JAN. 2002, vol. 4616, pages 53-63, XP002274547 Proceedings of the SPIE - The International Society for Optical Engineering, 2002, SPIE-Int. Soc. Opt. Eng, USA ISSN: 0277-786X the whole document	32-34

INTERNATIONAL SEARCH REPORT

Information on patent family members

In: onal Application No

PCT/US 03/36096

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 4205750	A	26-08-1993	DE 4205750 A1	26-08-1993
WO 0237151	A	10-05-2002	AU 2180102 A	15-05-2002
			CA 2427434 A1	30-04-2003
			WO 0237151 A1	10-05-2002
			EP 1334389 A1	13-08-2003
			AU 2620501 A	14-05-2001
			CA 2387309 A1	10-05-2001
			EP 1211528 A2	05-06-2002
			JP 2003513326 T	08-04-2003
			US 2002089711 A1	11-07-2002
GB 2027546	A	20-02-1980	AU 4949579 A	14-02-1980
			DE 2931530 A1	28-02-1980
			FR 2433190 A1	07-03-1980
			JP 55025098 A	22-02-1980
			NL 7905912 A	12-02-1980
US 6339664	B1	15-01-2002	GB 2334594 A	25-08-1999
			AU 2630599 A	06-09-1999
			CN 1297537 T	30-05-2001
			EP 1060424 A1	20-12-2000
			WO 9942872 A1	26-08-1999
			JP 2002504704 T	12-02-2002
			US 2002061168 A1	23-05-2002