



- | | |
|--|---|
| (51) International Patent Classification:
<i>H01R 35/04</i> (2006.01) | (74) Agent: OLSEN, Arlen, L.; Schmeiser, Olsen & Watts, LLP, 22 Century Hill Drive, Suite 302, Latham, NY 12110 (US). |
| (21) International Application Number:
PCT/IB2018/051568 | (81) Designated States <i>(unless otherwise indicated, for every kind of national protection available):</i> AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW. |
| (22) International Filing Date:
09 March 2018 (09.03.2018) | (84) Designated States <i>(unless otherwise indicated, for every kind of regional protection available):</i> ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, |
| (25) Filing Language: English | |
| (26) Publication Language: English | |
| (30) Priority Data:
2,961,248 17 March 2017 (17.03.2017) CA | |
| (71) Applicant: CABLE GEAR HOLDINGS LLC [US/US];
19415 S. Stone Lane, Katy, Texas 77449 (US). | |
| (72) Inventor: HASAN, Faruq; 3468 Uplands Drive, Ottawa, Ontario K1V 9M4 (CA). | |

(54) Title: ELECTRICAL PLUG AND ADAPTER WITH RETRACTABLE PRONGS

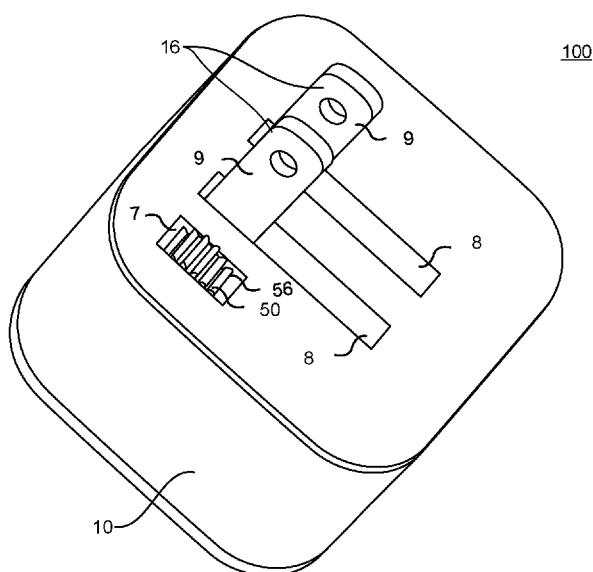


FIG. 1

(57) Abstract: An electrical plug or power adapter is described which includes a housing and a plurality of retractable prongs forming at least one retractable prong set. The prongs of each prong set are rotatable simultaneously between a retracted position in which the prongs are positioned within the housing and a deployed position in which the prongs extend out of the housing to be inserted into an electrical outlet. The electrical plug or adapter includes at least one gear-based driving mechanism coupled to a corresponding retractable prong set for driving the simultaneous rotation of the prongs of the prong set. The gear-based driving mechanism includes a driver accessible from the housing for actuation of the corresponding gear-based driving mechanism.

EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*
- *in black and white; the international application as filed contained color or greyscale and is available for download from PATENTSCOPE*

ELECTRICAL PLUG AND ADAPTER WITH RETRACTABLE PRONGS

CROSS REFERENCE TO RELATED APPLICATIONS

5 [0001] This application claims the benefit of priority based on Canadian Application No. 2,961,248, filed on March 17, 2017, entitled, "Electrical Plug and Adapter with Retractable Prongs", the disclosure of which is hereby incorporated by reference herein.

TECHNICAL FIELD

[0002] The present description relates generally to electrical plugs and adapters and, more particularly, to electrical plugs and adapters with retractable prongs.

BACKGROUND

10 [0003] Electrical plugs and power adapters are common portable appliances for enabling connections between electrically operated devices and standard alternating current (AC) power supplies. A typical electrical plug or adapter can include two or three prongs to be inserted in a compatible power socket employed in a residential or commercial building. The configuration and dimensions of the prongs used in a country are governed by national standards and
15 regulations which can differ from country to country.

[0004] The trend towards more-compact electronic devices has driven a shift towards more compact and versatile plugs and adapters. Collapsible plugs and adapters have become favorable because the use of retractable prongs can allow for a reduction of the shipping size and a better protection of the prongs from damage when not in use. However, conventional
20 collapsible plugs and adapters may require the prongs to be manipulated directly by hands, have significant part counts, and can be difficult to use.

[0005] There is a general desire for electrical plugs and adapters that can provide better usability and/or versatility, especially in an international context.

SUMMARY

25 [0006] The following presents a simplified summary of some aspects or embodiments of the invention in order to provide a basic understanding of the invention. This summary is not an extensive overview of the invention. It is not intended to identify key or critical elements of the invention or to delineate the scope of the invention. Its sole purpose is to present some embodiments of the invention in a simplified form as a prelude to the more detailed description
30 that is presented later.

[0007] According to one aspect of the description, an electrical plug is described. The electrical plug comprises a housing; a retractable prong set including a plurality of prongs, the plurality of prongs being rotatable simultaneously between a retracted position in which the plurality of prongs are positioned within the housing and a deployed position in which the plurality of prongs extend out of the housing to be inserted into an electrical outlet; and a gear-based driving mechanism coupled to the retractable prong set for driving the plurality of prongs to simultaneously rotate between the retracted position and the deployed position. The gear-based driving mechanism includes a driver accessible from the housing for actuation of the gear-based driving mechanism.

[0008] According to another aspect of the description, the electrical plug comprises a housing; a first retractable prong set including a first plurality of prongs, the first plurality of prongs being rotatable simultaneously between a retracted position in which the first plurality of prongs are positioned within the housing and a deployed position in which the first plurality of prongs extend out of the housing to be inserted into a first electrical outlet; a second retractable prong set including a second plurality of prongs, the second plurality of prongs being movable simultaneously between a retracted position in which the second plurality of prongs are positioned within the housing and a deployed position in which the second plurality of prongs extend out of the housing to be inserted into a second electrical outlet; a first gear-based driving mechanism coupled to the first retractable prong set for driving the first plurality of prongs to simultaneously rotate between the retracted position and the deployed position, and a second gear-based driving mechanism coupled to the second retractable prong set for driving the second plurality of prongs to simultaneously move between the retracted position and the deployed position. The first gear-based driving mechanism includes a first driver accessible from the housing for actuation of the first gear-based driving mechanism and the second gear-based driving mechanism includes a second driver accessible from the housing for actuation of the second gear-based driving mechanism.

[0009] According to another aspect of the description, the electrical plug comprises a housing; a plurality of retractable prong sets, each retractable prong set including a plurality of prongs rotatable simultaneously between a retracted position in which the corresponding prongs are positioned within the housing and a deployed position in which the corresponding prongs extend out of the housing to be inserted into an electrical outlet; and a plurality of gear-based driving mechanisms corresponding to the plurality of retractable prong sets, each gear-based driving mechanism coupled to the corresponding retractable prong set for driving the plurality of prongs of the corresponding retractable prong set simultaneously between the retracted

position and the deployed position. Each gear-based driving mechanism includes a driver accessible from the housing for actuation of the corresponding gear-based driving mechanism.

[0010] According to another aspect of the description, a power adapter is described. The power adapter comprises a housing; a retractable prong set including a plurality of prongs, the plurality of prongs being rotatable simultaneously between a retracted position in which the plurality of prongs are positioned within the housing and a deployed position in which the plurality of prongs extend out of the housing to be inserted into an electrical outlet; and a gear-based driving mechanism coupled to the retractable prong set for driving the plurality of prongs to simultaneously rotate between the retracted position and the deployed position. The gear-based driving mechanism includes a driver accessible from the housing for actuation of the gear-based driving mechanism. The power adapter can further comprise a plurality of receptacles for receiving compatible external prongs.

[0011] **BRIEF DESCRIPTION OF THE DRAWINGS**

[0012] These and other features of the disclosure will become more apparent from the description in which reference is made to the following appended drawings.

[0013] FIG. 1 is a perspective view of an electrical plug according to a first embodiment of the description, showing a single prong set in a deployed position;

[0014] FIG. 2 is a perspective view of the electrical plug shown in FIG. 1, with a portion of the housing removed to show an internal structure of the electrical plug;

[0015] FIG. 3 is a perspective view of an electrical plug according to a second embodiment of the description, showing a single prong set in a deployed position;

[0016] FIG. 4 is a perspective view of the electrical plug shown in FIG. 3, with a portion of the housing removed to show an internal structure of the electrical plug;

[0017] FIG. 5 is a perspective view of an electrical plug according to a third embodiment of the description, showing a driver gear on the side of the housing;

[0018] FIG. 6 is a perspective view of an internal structure of the electrical plug shown in FIG. 5;

[0019] FIG. 7 is a perspective view of an electrical plug according to a fourth embodiment of the description, showing a driver gear on the side of the housing;

[0020] FIG. 8 is a perspective view of an internal structure of the electrical plug shown in FIG. 7;

[0021] FIG. 9 is a perspective view of an electrical plug according to a fifth embodiment of the description, showing a single prong set in a deployed position;

5 [0022] FIG. 10 is a perspective view of the electrical plug shown in FIG. 9, with a portion of the housing removed to show an internal structure of the electrical plug;

[0023] FIG. 11 is a top plan view of the electrical plug shown in FIG. 9 in the deployed position;

[0024] FIG. 12 is a top plan view of the electrical plug shown in FIG. 9 in a retracted position;

10 [0025] FIG. 13 is a perspective view of an electrical plug according to a sixth embodiment of the description, showing a driver gear on the side of the housing;

[0026] FIG. 14 is a perspective view of an internal structure of the electrical plug shown in FIG. 13;

15 [0027] FIG. 15 is a perspective view of an electrical plug according to a seventh embodiment of the description, showing three prong sets in the deployed position, viewed from the top of the housing;

[0028] FIG. 16 is a perspective view of the electrical plug shown in FIG. 15, viewed from the bottom of the housing.

20 [0029] FIG. 17 is a perspective view of an internal structure of the electrical plug shown in FIG. 15, viewed from the top of the housing;

[0030] FIG. 18 is a perspective view of an internal structure of the electrical plug shown in FIG. 15, viewed from the bottom of the housing;

25 [0031] FIG. 19 is a perspective view of an electrical plug according to an eighth embodiment of the description, showing three prong sets in the deployed position, viewed from the top of the housing;

[0032] FIG. 20 is a perspective view of the electrical plug shown in FIG. 19, viewed from the bottom of the housing;

[0033] FIG. 21 is a perspective view of an internal structure of the electrical plug shown in FIG. 19;

[0034] FIG. 22 is a side view of the internal structure of the electrical plug shown in FIG. 21;

5 [0035] FIG. 23 is a perspective view of an electrical plug according to a ninth embodiment of the description, showing three prong sets in the deployed position, viewed from the top of the housing;

[0036] FIG. 24 is a perspective view of the electrical plug shown in FIG. 23, viewed from the bottom of the housing;

[0037] FIG. 25 is a side view of an internal structure of the electrical plug shown in FIG. 23;

10 [0038] FIG. 26 is a perspective view of the internal structure of the electrical plug shown in FIG. 23;

[0039] FIG. 27 is a perspective view of a prong with a modified base, according to an embodiment of the disclosure;

[0040] FIG. 28 is a front plan view of the prong shown in FIG.27;

15 [0041] FIG. 29 is a side plan view of the prong shown in FIG.27;

[0042] FIG. 30 is a side plan view of the prong shown in FIG.27, mating with a busbar, according to an embodiment of the disclosure;

[0043] FIG. 31 is a front plan view of the prong shown in FIG.27, where the busbar is mated with a side of the base of the prong, according to another embodiment of the disclosure;

20 [0044] FIG. 32 is a side plan view of the mating mechanism shown in FIG.27;

[0045] FIG. 33 is a perspective view of a prong with a modified base, according to an embodiment of the disclosure;

[0046] FIG. 34 is a front plan view of the prong shown in FIG.33;

[0047] FIG. 35 is a side plan view of the prong shown in FIG.33;

[0048] FIG. 36 is a side plan view of the prong shown in FIG.33, mating with a busbar, according to an embodiment of the disclosure.

[0049] FIG. 37 is a front plan view of the prong shown in FIG.33, where the busbar is mated with a side of the base of the prong, according to another embodiment of the disclosure;

5 [0050] FIG. 38 is a side plan view of the mating mechanism shown in FIG.37;

[0051] FIG. 39 is a perspective view of a prong with a modified base, according to an embodiment of the disclosure;

[0052] FIG. 40 is a front plan view of the prong shown in FIG.39;

[0053] FIG. 41 is a side plan view of the prong shown in FIG.39;

10 [0054] FIG. 42 is a side plan view of the prong shown in FIG.39, mating with a busbar, according to an embodiment of the disclosure.

[0055] FIG. 43 is a front plan view of the prong shown in FIG.39, where the bus bar is mated with a side of the base of the prong, according to another embodiment of the disclosure;

[0056] FIG. 44 is a side view of the mating mechanism shown in FIG.39;

15 [0057] FIG. 45 is a top plan view of a Type G prong set and a mating mechanism between one prong and busbars, according to an embodiment of the disclosure;

[0058] FIG. 46 is a top plan view of a Type C prong and a mating mechanism between one prong and busbars, according to an embodiment of the disclosure;

20 [0059] FIG. 47 is a top plan view of a Type A prong set and a mating mechanism between one prong and busbars, according to an embodiment of the disclosure;

[0060] FIG. 48 is a perspective view of an electrical adapter, viewed from the bottom of the housing, according to an embodiment of the disclosure.

DETAILED DESCRIPTION

25 [0061] The following detailed description contains, for the purposes of explanation, numerous specific embodiments, implementations, examples and details in order to provide a thorough understanding of the invention. It is apparent, however, that the embodiments may be

practiced without these specific details or with an equivalent arrangement. In other instances, some well-known structures and devices may be omitted in order to avoid unnecessarily obscuring the illustration of the embodiments. It should be understood that the following descriptions are not intended to limit the embodiments only to the described implementations and techniques, or the illustrated exemplary designs and implementations. To the contrary, it is intended to cover alternatives, modifications, and equivalents as can be included within the scope of the described embodiments.

[0062] Various embodiments of present description relate to electrical plugs and power adapters, and more particularly, to electrical plugs and power adapters with retractable prongs.

[0063] An electrical plug or power adapter is used for connecting an electrically operated device to an electrical outlet or receptacle in a residential or commercial building. An electrical plug typically includes two or three prongs working as a unit (referred to as a prong set) to be inserted in a compatible power socket for power connection. The two or three prongs are typically shaped and configured according to national standards and regulations. For purposes of illustration, the following description will make reference to prong sets compatible with particular IEC standard types, including the IEC Standard Type G used in the United Kingdom (UK) (referred to as a Type G prong set), IEC Standard Type A used in the United States (US) (referred to as a Type A prong set), and IEC Standard Types C/E used in the European Union (EU) (referred to as a Type E/C prong set). The Type A and Type C/E prong sets each has two prongs, whilst the Type G prong set has three prongs. It should be understood that while prong sets of particular types are used for demonstration of the embodiments, the electrical plugs of the present description are not intended to limit only to the prong sets as described or illustrated, but can be applied to other prong sets with prongs of different numbers, shapes and/or dimensions.

[0064] As will be described in more detail below, an electrical plug or power adapter according to the embodiments of the description includes a housing and a plurality of retractable prongs forming at least one retractable prong set. The prongs of each prong set are rotatable simultaneously between a retracted position in which the prongs are positioned within the housing and a deployed position in which the prongs extend out of the housing to be inserted into an electrical outlet. The electrical plug or power adapter further includes at least one gear-based driving mechanism coupled to a corresponding retractable prong set for driving the simultaneous rotation of the prongs of the prong set. The gear-based driving mechanism includes a driver which can be accessed from the housing for actuation of the gear-based

driving mechanism. The driver can take the form of a driver gear, disc, or other wheel-like part that when rotated or otherwise manipulated by the user transfers motion to other parts of the gear-based driving mechanism. By manipulating the driver, the user can retract and deploy the corresponding prong set without any direct contact with the prongs. Each gear-based driving mechanism can include a gear or a series of gears. Various types of gears can be employed for the purpose of the description, including but not limited to spur, bevel, sprocket and spiral gears.

[0065] According to the embodiments of the description, the driver can be arranged to be accessible from a same or different side of the housing from which the corresponding prongs extend out of. In some embodiments, the electrical plug or power adapter includes a single retractable prong set. In other embodiments, the electrical plug or power adapter includes multiple retractable prong sets, each being driven by a corresponding driver to move between the retracted position and the deployed position. The multiple retractable prong sets can be arranged to be deployable from the same side of the housing, or from different sides of the housing. Various mating mechanisms are configured to allow for an effective electrical connection for the prongs, including using busbars and/or prongs with modified bases. When the prong set comes into the deployed position, the mating mechanism allows for an effective connection for the prongs. As the prong set moves from the deployed position to the retracted position, the prongs of the prong set become disconnected electrically to ensure safety. While various embodiments show electrical plugs, or power plugs, it is understood that the described structure can also apply to electrical adapters, or power adapters. In the case of an adapter, one side of the housing can include a plurality of receptacles for receiving compatible external prongs.

[0066] Referring to FIG. 1, an electrical plug **100** is shown according to a first embodiment of the description. The electrical plug **100** includes a housing **10** for accommodating a retractable Type A prong set **16**. The Type A prong set **16** includes two generally rectangular prongs **9** configured according to the IEC Type A standard used in the US. The two prongs **9** can be rotated simultaneously as a unit between a retracted position in which the prongs **9** are stowed within neutral slots **8** of the housing **10** and a deployed position in which the prongs **9** extend out of the neutral slots **8** of the housing **10**. In FIG.1, the prong set **16** is shown in the deployed position and can be readily inserted into an external electrical outlet or receptacle (not shown). The simultaneous rotation of the prongs **9** of the prong set **16** can be driven by manipulating a driver **56** accessible through a slot **7** of the housing **10**. In this particular embodiment, the

driver 56 is a spur gear 50 arranged to be accessible through a same side of the housing 10 as the neutral slots 8 from which the prongs 9 extend out of.

[0067] FIG. 2 illustrates an internal structure of the electrical plug 100 shown in FIG. 1. As shown in FIG. 2, the prongs 9 of the prong set 16 are mounted to a shaft 61. The spur gear 50 is coupled to the shaft 61 and can be rotatable with respect to a same axis X as the shaft 61. To retract or deploy the prong set 16, a user can rotate the spur gear 50 with respect to the axis X which in turn rotates the shaft 61 and simultaneously rotates the prongs 9 mounted to the shaft 61 with respect to the same axis X.

[0068] The prongs 9 are connected to the external power source through busbars 12 and cable barrels 13 fixed to the busbars 12. The cable barrels 13 can facilitate connection 57 by means of wires. As will be described in more detail below, the base of the prong 9 can include a tapered surface 72 for an improved mating mechanism 69 with the busbar 12. When the prong set 16 comes into the deployed position, the improved mating mechanism 69 allows for an effective connection for the prongs 9. When the prong set 16 moves from the deployed position to the retracted position, the prongs 9 of the prong set 16 become disconnected from the busbars 12 cutting any electricity supply.

[0069] FIG. 3 illustrates an electrical plug 200 according to a second embodiment of the description. In this embodiment, the electrical plug 200 includes a retractable Type C prong set 17. The Type C prong set 17 includes two round prongs 9 configured according to the IEC Type C standard used in the EU and is mounted as part of a prong assembly 20 housing an insulated shaft 21. The two prongs 9 can be rotated simultaneously as a unit between a retracted position in which the prongs 9 are stowed within neutral slots 6, 8 of the housing 10 and a deployed position in which the prongs 9 extend out of the neutral slots 6, 8 of the housing 10. It should be understood that the neutral slots 6, 8 are dimensioned to stow the insulated shaft 21 and the prongs 9, respectively. The simultaneous rotation of the prongs 9 of the prong set 17 can be driven by manipulation of a driver 56 accessible from the housing 10. In this particular embodiment, the driver 56 can be a spur gear 50 arranged to be accessible through a slot 7 on a same side of the housing 10 as the neutral slots 6, 8 from which the prongs 9 extend out of.

[0070] FIG. 4 illustrates an internal structure of the electrical plug 200 shown in FIG. 3. Different from the first embodiment, the prongs 9 of the prong set 17 are mounted as part of the prong assembly 20, which is a mechanism for housing one or more prongs for simultaneous rotation. Using prong assemblies for mounting of the prongs can be advantageous in that

additional features, such as latching mechanisms, RFID, magnets, and/or switches, can be easily added to the prong assemblies without the need for additional driving arrangements.

[0071] As shown in FIG. 4, the driver 56 is coupled to the prong assembly 20 and can be rotatable with respect to the same axis X as the prong assembly 20. To retract or deploy the prong set 17, a user can rotate the driver 56 with respect to the axis X which in turn rotates the prong assembly 20 and simultaneously rotates the prongs 9 mounted on the prong assembly 20 with respect to the same axis X.

[0072] According to the above described embodiments, one single gear is employed to achieve the simultaneous retraction and deployment of the prongs in a prong set. As will become apparent from the following description, a series of gears can be employed for driving of the prongs of a prong set simultaneously. According to the first and second embodiments, the driver 56 is arranged axially parallel to the rotation axis X of the prong set 16, 17. According to other embodiments of the description, it may be desirable to rotate the prongs from a driver that is arranged axially perpendicular to the rotation axis of the prong set.

[0073] FIG. 5 illustrates an electrical plug 100' according to a third embodiment of the description. Similar to the first embodiment, the prong set 16 includes two generally rectangular prongs 9 configured according to the IEC Type A standard. However, instead of providing an access of the driver 56 on the same side of the housing 10 from which the prongs 9 extend out of, the driver 56 according to this embodiment is arranged on a different side of the housing 10, as shown in FIG.5. In this embodiment, the driver 56 is a bevel gear 51, axially disposed perpendicular to the rotation axis of the prong set 16.

[0074] FIG. 6 illustrates an internal structure of the electrical plug 100' shown in FIG. 5. As shown in FIG. 6, the prongs 9 of the prong set 16 are mounted to a shaft 61. The bevel gear 56 can be acted upon by the user to rotate with respect to an axis Y perpendicular to the rotation axis X of the prong set 16. To retract or deploy the prong set 16, a user can rotate the bevel gear 51 with respect to the axis Y which in turn rotates the shaft 61 with respect to the axis X and simultaneously rotates the prongs 9 mounted to the shaft 61.

[0075] FIG. 7 illustrates an electrical plug 200' according to a fourth embodiment of the description. Similar to the second embodiment, the prong set 17 includes two round prongs 9 configured according to the IEC Type C standard. However, instead of providing an access of the driver 56 on the same side of the housing 10 from which the prongs 9 extend out of, the driver 56 according to this embodiment is arranged on a different side of the housing 10, as

shown in FIG.7. Similar to the third embodiment, the driver 56 is a bevel gear 51, axially disposed perpendicular to the rotation axis of the prong set 17.

[0076] FIG. 8 illustrates an internal structure of the electrical plug 200' shown in FIG. 7. As shown in FIG. 8, the prongs 9 of the prong set 17 are mounted as part of a prong assembly 20. The driver 56 can acted upon by the user to rotate around an axis Y perpendicular to the rotation axis X of the prong set 17. To retract or deploy the prong set 17, the user can rotate the bevel gear 51 with respect to the axis Y which in turn rotates the prong assembly 20 with respect to the axis X and simultaneously rotates the prongs 9 mounted as part of the prong assembly 20.

[0077] Referring to FIG. 9, an electrical plug 300 is shown according to a fifth embodiment of the description. In this embodiment the electrical plug 300 includes a retractable Type G prong set 18. The Type G prong set 18 includes two line and neutral prongs 9a and one earth prong 9b forming an isosceles triangle, the prongs 9a, 9b being configured according to the IEC Type G standard used in the UK. An earth slot 5 and line and neutral slots 8 are dimensioned to stow the earth prong 9b and line and neutral prongs 9a, respectively. The three prongs 9a, 9b can be rotated simultaneously as a unit between a retracted position in which the prongs 9a, 9b are stowed within the slots 5, 8 of the housing 10 and a deployed position in which the prongs 9a, 9b extend out of the slots 5, 8 of the housing 10. The simultaneous rotation of the prong set 18 can be driven by manipulation of a driver 56 through a slot 7 of the housing 10. In this particular embodiment, the driver 56 is a spur gear 50 and arranged to be accessible through a same side of the housing 10 as the slots 5, 8 from which the prongs 9a, 9b extend out of.

[0078] FIG. 10 illustrates an internal structure of the electrical plug 300 shown in FIG. 9. As shown in FIG. 10, the prongs 9a, 9b of the prong set 18 are mounted to two elbow shafts 60 which are axially parallel to each other. The two elbow shafts 60 are coupled to a series of gears, which are collectively referred to as a gear drivetrain 55. The gear drivetrain 55 can operate to rotate the two elbow shafts 60 simultaneously. As shown in FIG.9, the gear drivetrain 55 includes a sprocket gear 53 for reversing the rotation direction of the driver 56 with respect to the balance of the gear drivetrain 55. This way, through manipulation of the driver 56 around the rotation axis X of the prong set 18, the two elbow shafts 60 can be rotated simultaneously in opposite directions, thereby folding or unfolding the prongs 9a, 9b mounted to the elbow shafts 60 simultaneously towards or away from the center of the housing 10.

[0079] The prongs 9a, 9b are connected to an external power source (not shown) through busbars 12 and cable barrels 13 fixed to the busbars 12. The cable barrels 13 can facilitate

connection 57 by means of wires. As will be described in more detail below, the bottom of the prong 9a, 9b can have a modified prong side 73 for a side mating mechanism with the busbar 12. When the prong set 18 comes into the deployed position, the side mating mechanism allows for an effective connection for the prongs 9a, 9b. When the prong set 18 moves from the
5 deployed position to the retracted position, the prongs 9a, 9b of the prong set 18 become disconnected from the busbars 12 cutting any electricity supply.

[0080] As shown in the FIG. 10, the electrical plug 300 employs elbow shafts 60 to couple the prongs 9a, 9b to the gear drivetrain 55. FIG. 11 is a top plan view of the electrical plug 300 in the deployed position; and FIG. 12 is a top plan view of the electrical plug 300 in the retracted
10 position. As illustrated in FIG. 12, when the prongs 9a, 9b are in the retracted position, the use of elbow shafts 60 enables the prongs 9a, 9b to be stowed without contacting the shafts 60.

[0081] According to the IEC Type G standard, the earth prong 9b is longer than the horizontal distance between the earth prong 9b and the line and neutral prongs 9a. Accordingly it would be difficult to use straight shafts to mount the prongs 9a, 9b because when the prongs 9a, 9b are
15 in the retracted position, the earth prong 9b would come into contact with a straight shaft. The use of elbow shaped shafts 60 avoids this issue and allows for easy deployment and retraction of the prongs without interfering other parts of the plug.

[0082] FIG. 13 illustrates an electrical plug 300' according to a sixth embodiment of the description. Similar to the fifth embodiment, the electrical plug 300' includes prongs 9a, 9b
20 configured according to the IEC Type G standard. However, instead of providing an access of the driver 56 on the same side of the housing 10 from which the prongs 9a, 9b extend out of, the driver 56 according to this embodiment is arranged on a different side of the housing 10, as shown in FIG. 13. Similar to the third and fourth embodiments, the driver 56 is a bevel gear 51, axially disposed perpendicular to the rotation axis of the prong set 16.

[0083] FIG. 14 illustrates an internal structure of the electrical plug 300' shown in FIG. 13. As shown in FIG. 14 and similar to the fifth embodiment, the prongs 9a, 9b of the prong set 18 are mounted to two elbow shafts 60 which are axially parallel to each other. The two elbow shafts 60 are coupled to the gear drivetrain 55. The bevel gear 51 can be acted upon to rotate around the Y axis which drives the gears in the drivetrain 55 to rotate around the X axis. With the two
25 elbow shafts 60 rotating simultaneously in opposite directions, the prongs 9a, 9b mounted to the elbow shafts 60 can be folded and unfolded at the same time towards or away from the center of the housing 10.
30

[0084] By way of the gear-based driving mechanism, the electrical plug according to the present description can accommodate not only a single retractable prong set, but also multiple retractable prong sets. Each prong set can be driven by a corresponding driver to move between the retracted position and the deployed position.

5 [0085] Referring to FIG. 15, an electrical plug 400 with multiple retractable prong sets is shown, according to a seventh embodiment of the description. As shown in FIG. 15, the electrical plug 400 includes three prong sets 16, 17, 18 accommodated in the same housing 10, where the Type A prong set 16, the Type C prong set 17, and the Type G prong set 18. According to this embodiment, all three prong sets 16, 17, 18 are retractable and can be
10 arranged to be deployed from a same side of the housing 10. Each prong set 16, 17, 18 can be driven by a corresponding gear-based driving mechanism to move between the retracted position and the deployed position. From the view shown in FIG. 15, a driver 56a is shown for driving of the prong set 18 and is arranged to be accessed from a same side of the housing 10 from which the prongs 9a, 9b extend out of. In this embodiment, the driver 56a is a spur gear.

15 [0086] FIG. 16 shows the electrical plug 400 viewed from the bottom of the housing 10. As can be seen from FIG. 16, the electrical plug 400 further includes a driver gear 56b and a driver gear 56c for driving the prong set 16 and the prong set 17, respectively. In this embodiment, the driver gears 56b and 56c are both spur gears.

20 [0087] FIG. 17 is a perspective view of an internal structure of the electrical plug 400, viewed from the top of the housing 10. FIG. 18 is a perspective view of an internal structure of the electrical plug 400, viewed from the bottom of the housing 10.

25 [0088] The driving mechanism of the prong set 18 is similar to that described in relation to the fifth embodiment. According to this embodiment, each prong set 16, 17 is mounted on a corresponding platform 59 supported by supporting guides 58. The platform 59 can be moved vertically up or down, through a threaded hole 54 and a spiral shaft 52 functioning as a guided post. To effect movement of each prong set 16, 17, a driver 56b, 56c can be acted upon by the
30 user to cause rotation of the corresponding spiral shaft 52. Depending on the direction of rotation of the driver 56b, 56c, the spiral shaft 52 can move the platform 59 vertically up or down thereby deploying or retracting the corresponding prong set 16, 17 mounted on the platform 59.

[0089] Busbars 12 are provided in the electrical plug 400 to enable correct connections for the prongs of each prong set 16, 17, 18 when they come into the deployed position. The prongs of

the prong set **16, 17, 18** become disconnected from the busbars **12** when they move from the deployed position to the retracted position.

[0090] While this embodiment illustrates the multiple prong sets being deployable from the same side of the housing **10**, it may be desirable to have multiple prong sets deployable from multiple sides of the housing **10**, depending on the preferable dimensions of the electrical plug.

[0091] FIG. **19** is a perspective view of an electrical plug **500** according to an eighth embodiment of the description, viewed from the top of the housing **10**. FIG. **20** is a perspective view of the electrical plug **500**, viewed from the bottom of the housing **10**.

[0092] As can be seen from FIGS. **19** and **20**, the electrical plug **500** also includes three prong sets **16, 17, 18** accommodated in the same housing **10**. Different from the seventh embodiment, the Type G prong set **18** is deployable from one side of the housing **10**, whilst the Type C prong set **17** and Type A prong set **16** are deployable from an opposite side of the housing **10**. Three drivers **56a, 56b, 56c** are provided for driving the prong sets **18, 16, 17** respectively. In this embodiment, each driver **56a, 56b, 56c** is a spur gear and arranged to be accessible from a same side of the housing **10** from which its corresponding prong set **18, 16, 17** extend out of.

[0093] FIG. **21** is a perspective view of an internal structure of the electrical plug **500**. FIG. **22** is a side view of the internal structure. The driving mechanisms of the Type A, C, G prong sets **16, 17, 18** are similar to those described above. According to this embodiment, because prong sets are configured on multiple sides of the housing **10**, a secondary set of busbars **14** can be used to supply the prong sets **16, 17** from an opposite of the housing **10**. The prong sets **16, 17, 18** can be powered from a same external source or from different external sources. In the case of powering the three prong sets **16, 17, 18** from a same external source, the secondary busbars **14** can be connected to the primary busbars **12** through connecting busbars **15**. Alternatively, it would be possible to supply the prong sets **16, 17, 18** on different sides from different external sources by providing a connecting mechanism (not shown), such as barrel plugs **13**, to the secondary busbars **14**. As the electrical plug according to the embodiment enables powering of different prong sets from different external sources, the electrical plug can be provided without any cable and used as a conduit. The electrical plug can connect to different sources when necessary, adding versatility to its use.

[0094] FIG. **23** is a perspective view of an electrical plug **500'** according to a ninth embodiment of the description, viewed from the top of the housing **10**. FIG. **24** is a perspective view of the electrical plug **500'**, viewed from the bottom of the housing **10**.

[0095] In this embodiment, the Type G prong set **18** and the Type A prong set **16** are deployable from one side of the housing **10**, whilst a Type E prong set **17** is deployable from an opposite side of the housing **10**. Compared to the Type C prong set **17** discussed above, the prong assembly **20** of the Type E prong set further includes an additional female receptacle **19** for mating with an earth prong protruding from a compatible Type E socket. The Type E prong set is configured according to the IEC Type E standard used in the EU.

[0096] The electrical plug **500'** includes three drivers **56a, 56b, 56c** for driving the prong sets **18, 16, 17** respectively. Similar to the third and fourth embodiments, each driver **56a, 56b, 56c** in this embodiment can be a bevel gear and arranged to be accessed from a side of the housing **10** different from which its corresponding prong set **18, 16, 17** extend out of.

[0097] According to various embodiments described above, when the prongs are in the deployed position, the prongs are connected to the external power source(s) through busbars. The base of each prong can be modified to provide an improved mating mechanism between the prong and the busbar(s). There are many factors that may be considered for configuring the electrical connections between the prongs and the busbars, including for example, space constraints, axial positions, and/or robust performance.

[0098] A number of mating mechanisms are provided in this description to improve electrical connections between the prongs and the busbars. Although it is possible to engage the busbars with prongs without any modification, the following modified prongs can allow for more secure connections with the busbars, and allow flexibility in arrangement. When the prong set comes into the deployed position, the mating mechanism allows for an effective connection for the prongs. When the prong set moves from the deployed position to the retracted position, the prongs of the prong set become disconnected from any electricity supply.

[0099] FIG. 27 shows a prong **9** with a base **80** of the prong being modified to have a tapered surface **72**, according to an embodiment of the description. The base **80** of the prong **9** is also enlarged leaving space on sides **73** of the base for electrical contact with the busbar(s). FIG. 28 provides a front plan view of the prong **9** shown in FIG.27 and FIG. 29 illustrates a corresponding side plan view.

[00100] FIG. 30 illustrates an example of a mating mechanism **69**, in which the prong **9** shown in FIG.27 when deployed is mated with a busbar **12** having a corresponding tapered surface complementing the tapered surface **72**. Such an angled mating mechanism creates an enlarged connection surface and can achieve a more effective connection. It also restricts further rotation

of the prong(s) in a given direction. Examples of the angled mating mechanism are shown in FIGS. 2, 6, and 14.

[00101] Also, the mating mechanism 69 can allow for side contact with the busbar 12 where two flat surfaces of the conductors 12 and 80 come into contact with one another. FIG. 31 is another example of the mating mechanism 69, where the busbar 12 is mated with the side 73 of the modified base 80 of the prong 9. FIG. 32 illustrates its corresponding side plan view.

[00102] FIG. 33 shows a prong 9 with a base 80 of the prong 9 being modified to have a conductive protrusion 70, according to an embodiment of the description. The base 80 of the prong 9 is also enlarged leaving space on sides 73 of the base for contacts with the busbar(s). FIG. 33 provides a front plan view of the prong 9 shown in FIG. 33 and FIG. 34 illustrates a corresponding side plan view.

[00103] FIG. 35 illustrates an example of a mating mechanism 69 in which the prong 9 shown in FIG. 33 when deployed is mated with a busbar 12 having a corresponding recessed surface complementing the protrusion 70. Such a distended mating mechanism allows for a strong bond between the two conductors 12 and 80.

[00104] Also, the mating mechanism 69 can allow for side contact with the busbar 12 where two flat surfaces of the conductors 12 and 80 come into contact with one another. FIG. 37 is another example of the mating mechanism 69, where the busbar 12 is mated with the side 73 of the modified base 80 of the prong 9. FIG. 38 illustrates its corresponding side plan view.

[00105] FIG. 39 shows a prong 9 with a base 80 of the prong 9 being modified to have a recess 71, according to an embodiment of the description. The base 80 of the prong 9 is also enlarged leaving space on sides 73 of the base for contacts with the busbar(s). FIG. 40 provides a front plan view of the prong 9 shown in FIG. 39 and FIG. 41 illustrates a corresponding side plan view.

[00106] FIG. 42 illustrates an example of a mating mechanism 69 in which the prong 9 shown in FIG. 39 when deployed is mated with a busbar 12 having a corresponding protrusion complementing the recess 71. Such a recessed mating mechanism is similar to a handshake or a clasp, which allows for multiple faces of contact between the two conductors 12 and 80.

[00107] Also, the mating mechanism 69 can allow for side contact with the busbar 12 where two flat surfaces of the conductors 12 and 80 come in contact with another. FIG. 43 is another

example of the mating mechanism 69, where the busbar 12 is mated with the side 73 of the modified base 80 of the prong 9. FIG. 44 illustrates its corresponding side plan view.

[00108] Since the modified base 80 of the prong 9 as described above can be accessible from the side 73, it is possible to have the mating mechanism arranged from one of the four sides 73 of the modified base 80.

[00109] FIGS. 45, 46 and 47 illustrate the side mating mechanism applying to the Type G prong set 18, Type C prong set 17, and Type A prong set 16, respectively, according to an embodiment of the description. As illustrated in FIGS. 45, 46 and 47, the busbar 12 can be electrically connected to any side 73 of the modified base 80. The busbar 12 connection is only shown with respect to the left side prong in each of the prong set 16, 17, 18, but omitted with respect to the other prong(s) for simplicity. Also in this embodiment, it is noted that for each modified base 80, the base 80 is enlarged with respect to three of the four sides 73. This is to reduce the height dimension when the prongs are retracted. An example of a side mating mechanism is also shown in FIG. 10 in relation to the Type G prong set 18.

[00110] While the above embodiments are illustrated in the form of an electrical plug, the described structure can also be applied to a power adapter.

[00111] FIG. 48 illustrates a perspective view of a power adapter 600, according to an embodiment of the disclosure. Similar to the above described embodiments, the power adapter 600 can include at least one set 18 of retractable prongs simultaneously rotatable between a retracted position in which the prongs are positioned within the housing and a deployed position in which the prongs extend out of the housing to be inserted into an electrical outlet.

[00112] The power adapter 600 further includes at least one gear-based driving mechanism coupled to a corresponding retractable prong set 18 for driving the simultaneous rotation of the prongs of the prong set, as described above. The gear-based driving mechanism includes a driver (not shown in this view) which can be accessed from the housing for actuation of the gear-based driving mechanism. As shown in FIG. 48, one side of the housing 10 can include a plurality of receptacles 23 for receiving compatible prongs (not shown). While in this embodiment, the adapter includes a Type G retractable prong set 18, it should be understood that retractable prong set(s) of other type(s) can be used instead or in addition to the Type G prong set, and may be arranged on different side(s) of the housing, as described above. The prongs can be mounted to a shaft, or as part of a prong assembly.

[00113] The gear-based driving mechanism as described in the embodiments of the description allows for the retraction and deployment of a spatially displaced multi-prong set. The prong set can rotate in and out of a plane, or move vertically in the same plane. A driver can be acted upon to effect the simultaneous movement or rotation of all prongs in the same prong set. The driver can be arranged on the same, adjacent, or opposite planes from which the corresponding prongs extend out of.

[00114] By moving all the prongs of a prong set simultaneously through manipulation of the driver, the prong set can be easily deployed for use without any direct contact from the hands of the user with the prongs. Various embodiments can also provide compact and versatile power plugs with multi-country functionality where prong sets of different types can be accommodated and deployed using a single housing.

[00115] While various embodiments illustrate the use of the gear drivetrain 55 to rotate two shafts simultaneously, it should be apparent that the gear drivetrain 55 can be easily modified to drive more than two shafts or prong assemblies simultaneously. As well, the gear-based driving mechanism can be modified to drive prong set(s) of other types with more than two parallel arranged prongs (e.g., IEC standard Types B, D, F, H through O, and/or US standard SRDT, NEMA 5,6,7,10,11,14,15,18 Types).

[00116] As well, while busbars and barrel clamps are used for the purpose of the electrical connection, it should be understood that other arrangements, such as other types of wire arrangements, U-clamps, soldering, cable lugs, and/or other bolt-on or screw arrangement may also be used in addition or instead of the busbars and barrel clamps described.

[00117] While several embodiments have been provided in the present disclosure, it should be understood that the disclosed systems and methods might be embodied in many other specific forms without departing from the scope of the present disclosure. The present examples are to be considered as illustrative and not restrictive, and the intention is not to be limited to the details given herein. For example, the various elements or components may be combined or integrated in another system or certain features may be omitted, or not implemented.

WHAT IS CLAIMED IS:

1. An electrical plug comprising:

a housing;

5 a retractable prong set including a plurality of prongs, the plurality of prongs being rotatable simultaneously between a retracted position in which the plurality of prongs are positioned within the housing and a deployed position in which the plurality of prongs extend out of the housing to be inserted into an electrical outlet; and

10 a gear-based driving mechanism coupled to the retractable prong set for driving the plurality of prongs to simultaneously rotate between the retracted position and the deployed position, wherein the gear-based driving mechanism includes a driver accessible from the housing for actuation of the gear-based driving mechanism.

2. The electrical plug according to claim 1, wherein the plurality of prongs are rotatable with respect to a first axis, and the driver is arranged to be rotatable with respect to the first axis.

3. The electrical plug according to claim 1, wherein the plurality of prongs are rotatable with respect to a first axis, and the driver is arranged to be rotatable with respect to a second axis perpendicular to the first axis.

4. The electrical plug according to claim 1, wherein the gear-based driving mechanism comprises a series of gears coupled to each other for driving the plurality of prongs simultaneously.

5. The electrical plug according to claim 1, wherein the plurality of prongs are coupled to the gear-based driving mechanism through at least one elbow shaft.

6. The electrical plug according to claim 1, further comprising a plurality of retractable prong sets, each retractable prong set including a plurality of prongs movable simultaneously between a retracted position in which the corresponding prongs are positioned within the housing and a deployed position in which the corresponding prongs extend out of the housing to be inserted into an electrical outlet; and wherein

the gear-based driving mechanism includes a plurality of drivers accessible from the housing, each driver coupled to the corresponding retractable prong set for driving the prongs simultaneously between the retracted position and the deployed position.

7. The electrical plug according to claim 6, wherein the multiple retractable prong sets are arranged to be deployed from a same side of the housing.

5 8. The electrical plug according to claim 6, wherein the multiple retractable prong sets are arranged to be deployed from at least two sides of the housing.

9. The electrical plug according to claim 1, further comprising a prong assembly for housing at least two prongs of the prong set.

10

10. The electrical plug according to claim 9, wherein the prong assembly includes a female receptacle for mating with a compatible protrusion from a corresponding socket.

15

11. The electrical plug according to claim 1, further comprising at least one busbar for electrically connecting the prong set to an external power source when in the deployed position.

12. The electrical plug according to claim 11, wherein a base of the prong has a tapered surface for mating with the busbar.

20

13. The electrical plug according to claim 11, wherein a base of the prong has a protrusion for mating with the busbar.

14. The electrical plug according to claim 11, wherein a base of the prong has a recess for mating with the busbar.

25

15. The electrical plug according to claim 11, wherein the prong has an enlarged base and the busbar is electrically connected to a side of the base of the prong when in the deployed position.

30

16. An electrical plug comprising:
a housing;

a first retractable prong set including a first plurality of prongs, the first plurality of prongs being rotatable simultaneously between a retracted position in which the first plurality of prongs are positioned within the housing and a deployed position in which the first plurality of prongs extend out of the housing to be inserted into a first electrical outlet;

35

a second retractable prong set including a second plurality of prongs, the second plurality of prongs being movable simultaneously between a retracted position in which the second plurality of prongs are positioned within the housing and a deployed position in which the second plurality of prongs extend out of the housing to be inserted into a second electrical outlet;

a first gear-based driving mechanism coupled to the first retractable prong set for driving the first plurality of prongs to simultaneously rotate between the retracted position and the deployed position, wherein the first gear-based driving mechanism includes a first driver accessible from the housing for actuation of the first gear-based driving mechanism, and

a second gear-based driving mechanism coupled to the second retractable prong set for driving the second plurality of prongs to simultaneously move between the retracted position and the deployed position, wherein the second gear-based driving mechanism includes a second driver accessible from the housing for actuation of the second gear-based driving mechanism.

17. An electrical plug comprising:

a housing;

a plurality of retractable prong sets, each retractable prong set including a plurality of prongs rotatable simultaneously between a retracted position in which the corresponding prongs are positioned within the housing and a deployed position in which the corresponding prongs extend out of the housing to be inserted into an electrical outlet; and

a plurality of gear-based driving mechanisms corresponding to the plurality of retractable prong sets, each gear-based driving mechanism coupled to the corresponding retractable prong set for driving the plurality of prongs of the corresponding retractable prong set simultaneously between the retracted position and the deployed position, wherein each gear-based driving mechanism includes a driver accessible from the housing for actuation of the corresponding gear-based driving mechanism.

18. The electrical plug according to claim 17, further comprising a plurality of busbars for electrically connecting the plurality of prong sets to a same external power source when in the deployed position.

19. The electrical plug according to claim 17, further comprising a plurality of busbars for electrically connecting the plurality of prong sets to different external power sources when in the deployed position.

20. The electrical plug according to claim 17, wherein the prong has an enlarged base and the plug further comprises a plurality of busbars, at least one of the busbars being electrically connected to a side of the base of the prong when in the deployed position.

5 21. An electrical adapter comprising:
a housing;

a retractable prong set including a plurality of prongs, the plurality of prongs being rotatable simultaneously between a retracted position in which the plurality of prongs are positioned within the housing and a deployed position in which the plurality of prongs extend
10 out of the housing to be inserted into an electrical outlet;

a gear-based driving mechanism coupled to the retractable prong set for driving the plurality of prongs to simultaneously rotate between the retracted position and the deployed position, wherein the gear-based driving mechanism includes a driver accessible from the housing for actuation of the gear-based driving mechanism; and

15 a plurality of receptacles for receiving compatible external prongs.

22. The electrical adapter according to claim 21, further comprising a plurality of retractable prong sets, each retractable prong set including a plurality of prongs movable simultaneously between a retracted position in which the corresponding prongs are positioned within the housing and a deployed position in which the corresponding prongs extend out of the
20 housing to be inserted into an electrical outlet; and wherein

the gear-based driving mechanism includes a plurality of drivers accessible from the housing, each driver coupled to the corresponding retractable prong set for driving the prongs simultaneously between the retracted position and the deployed position.

25

23. The electrical adapter according to claim 21, further comprising a prong assembly for housing at least two prongs of the prong set.

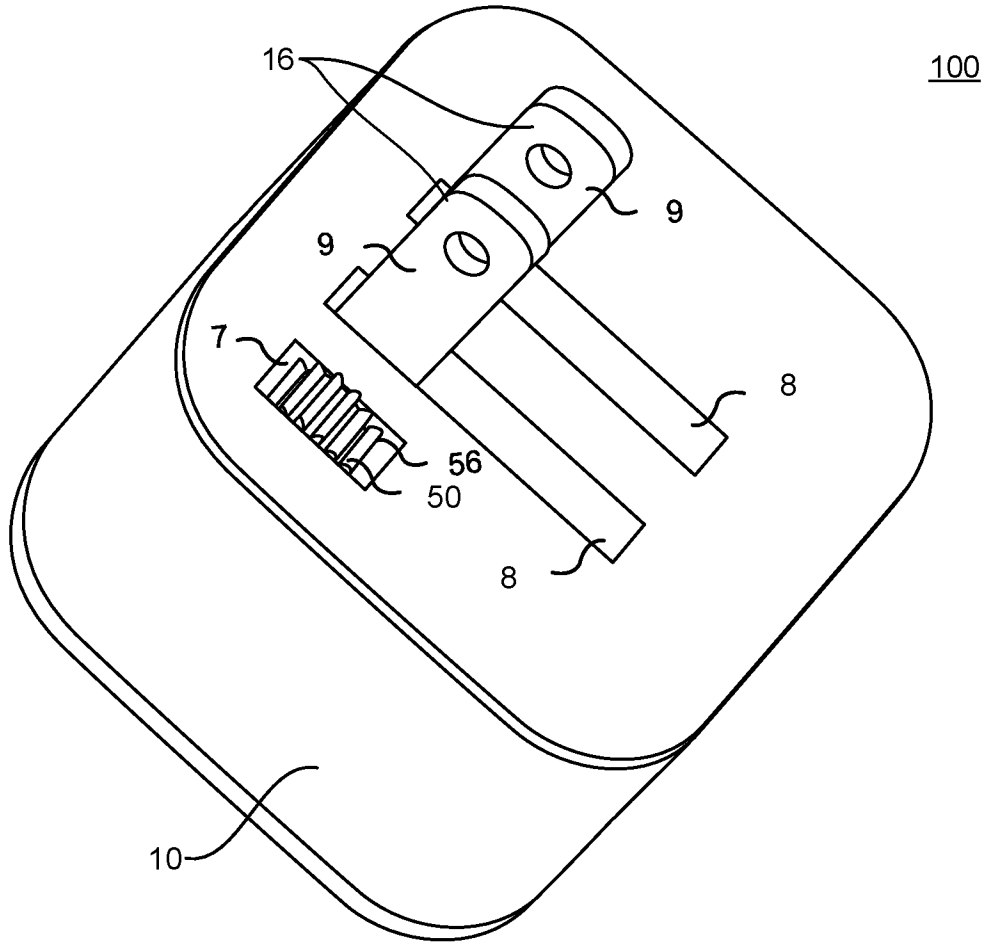


FIG. 1

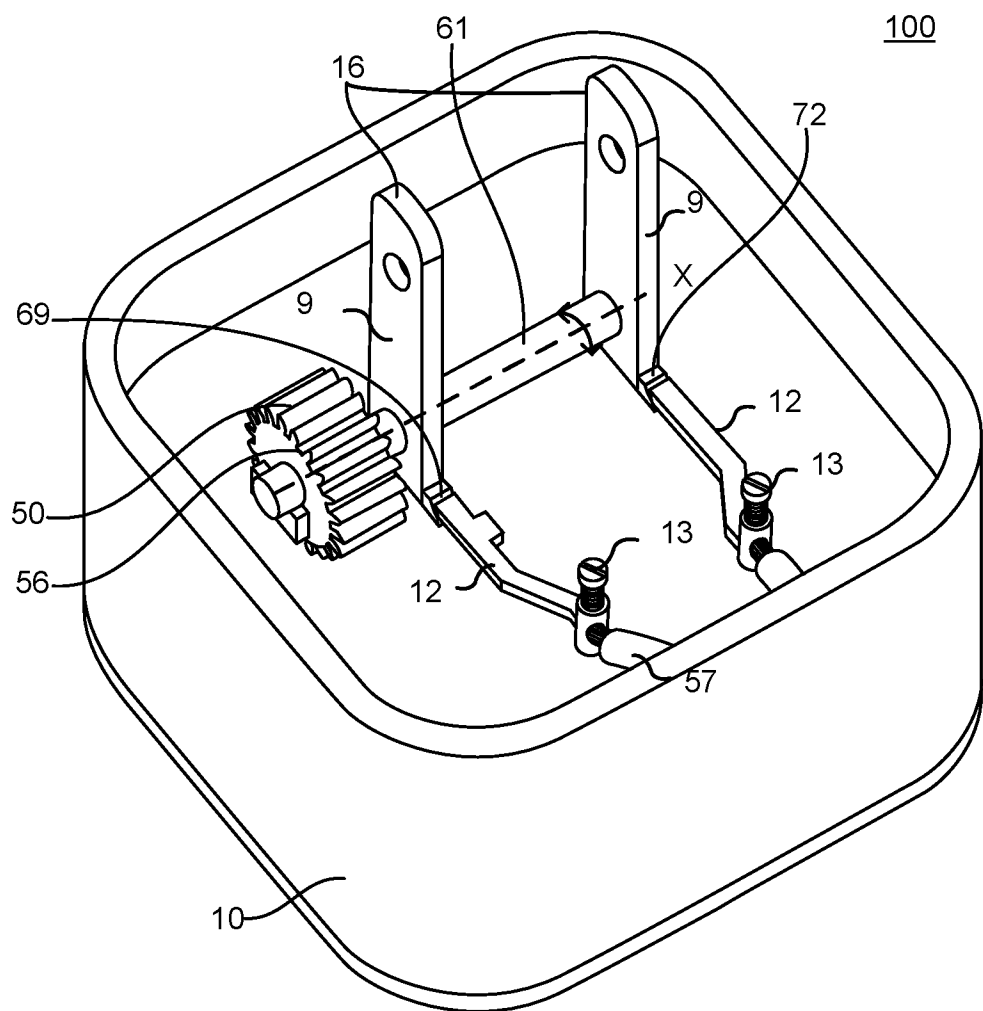


FIG. 2

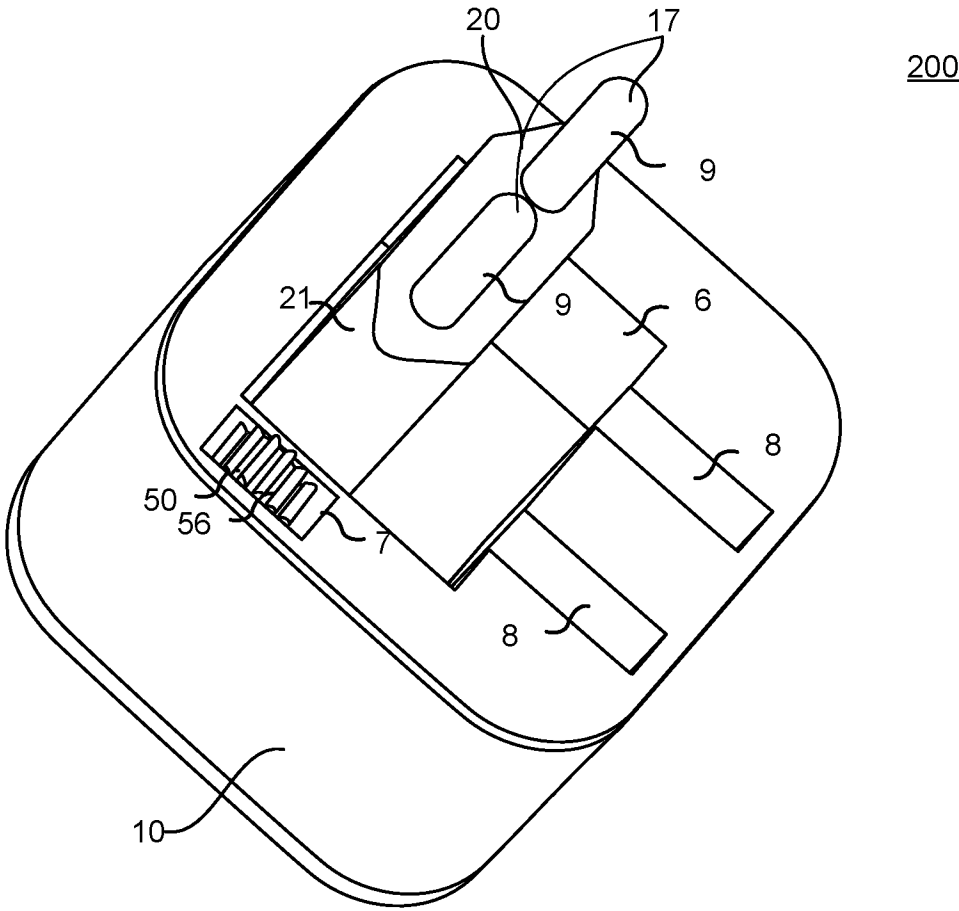


FIG. 3

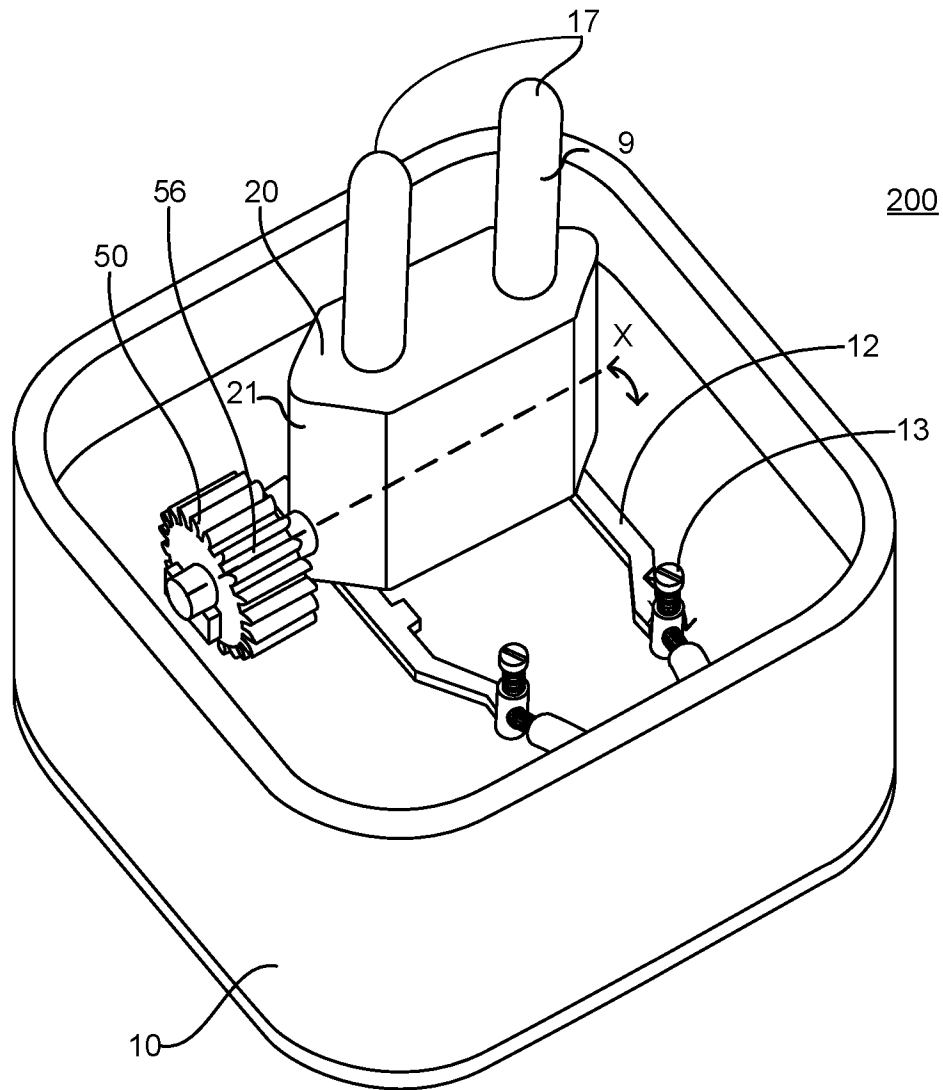


FIG. 4

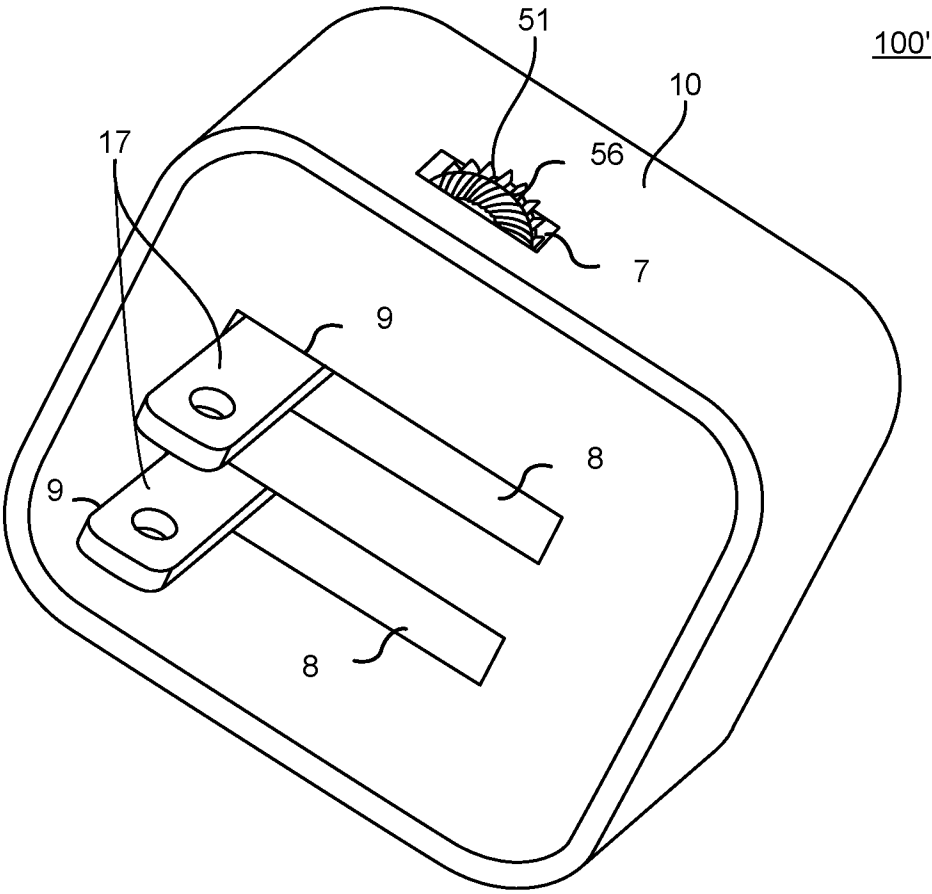


FIG. 5

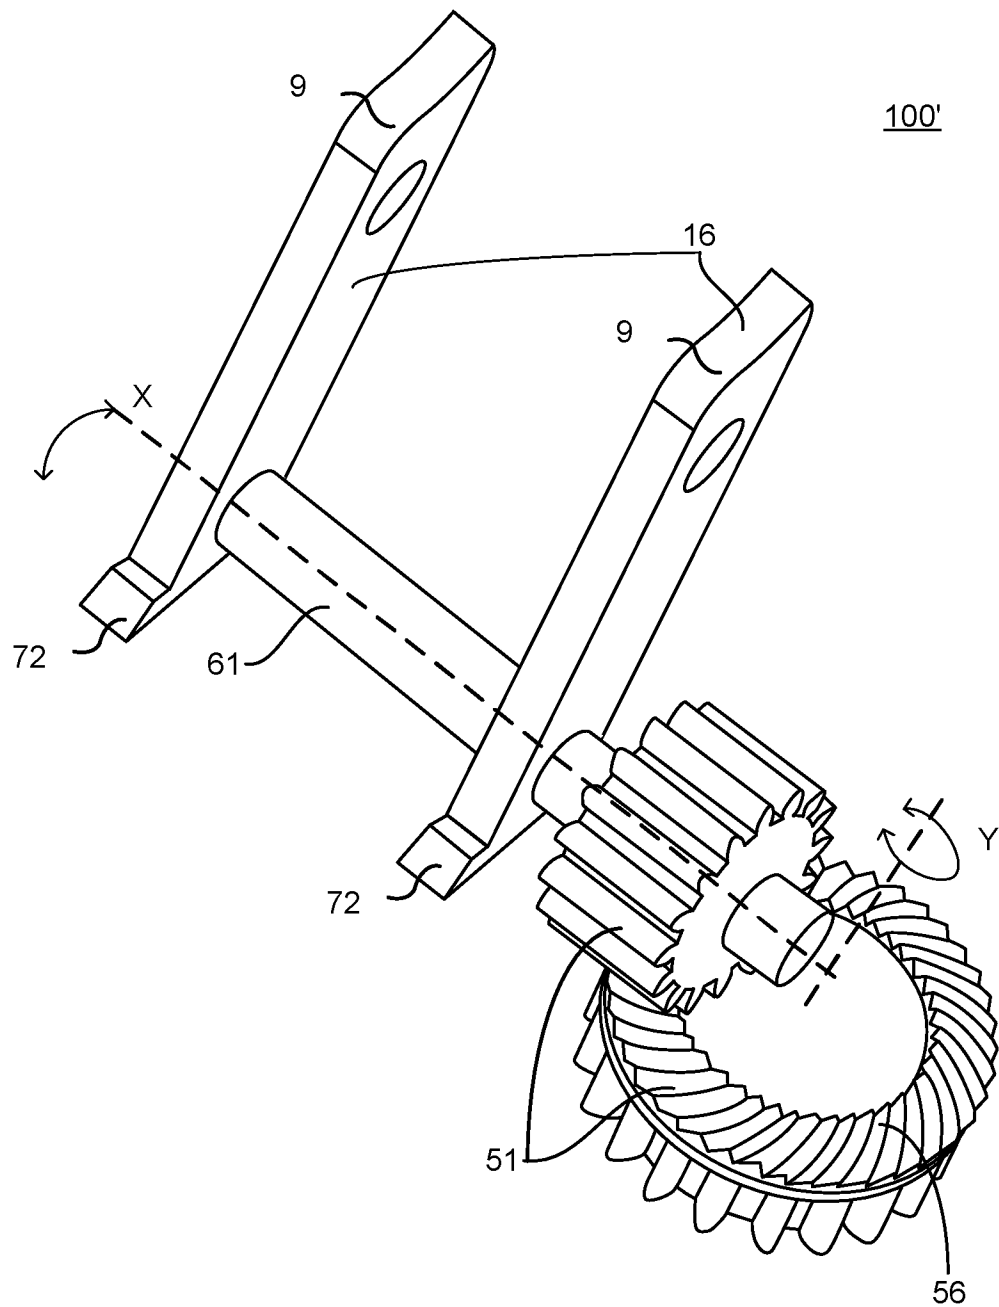


FIG. 6

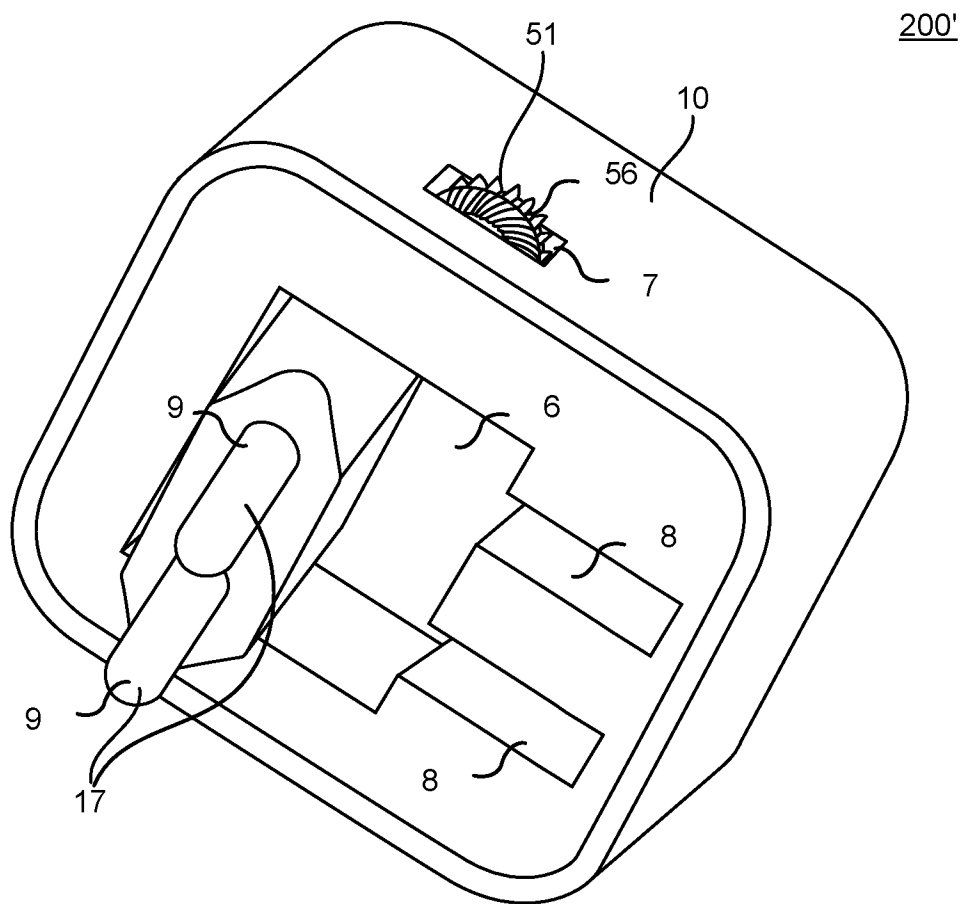


FIG. 7

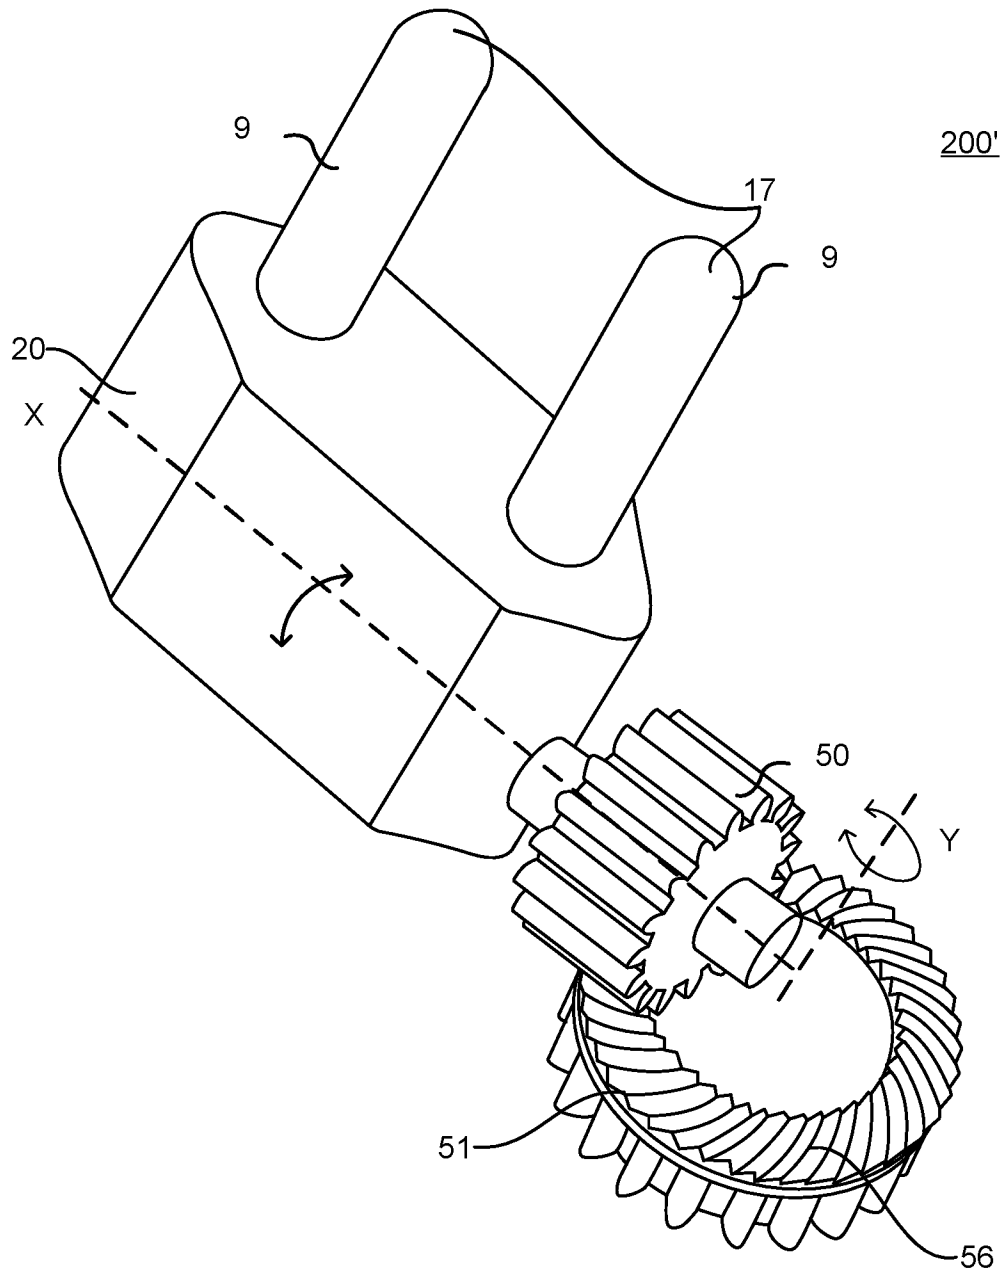


FIG. 8

300

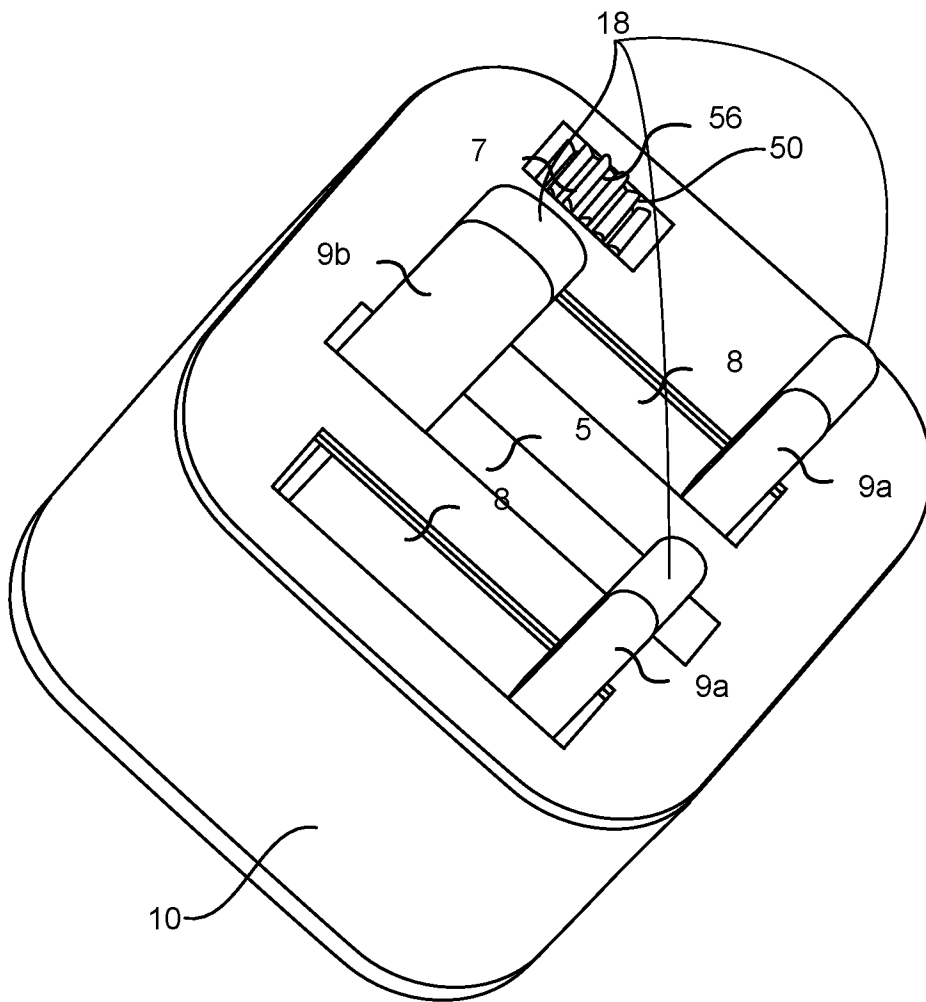


FIG. 9

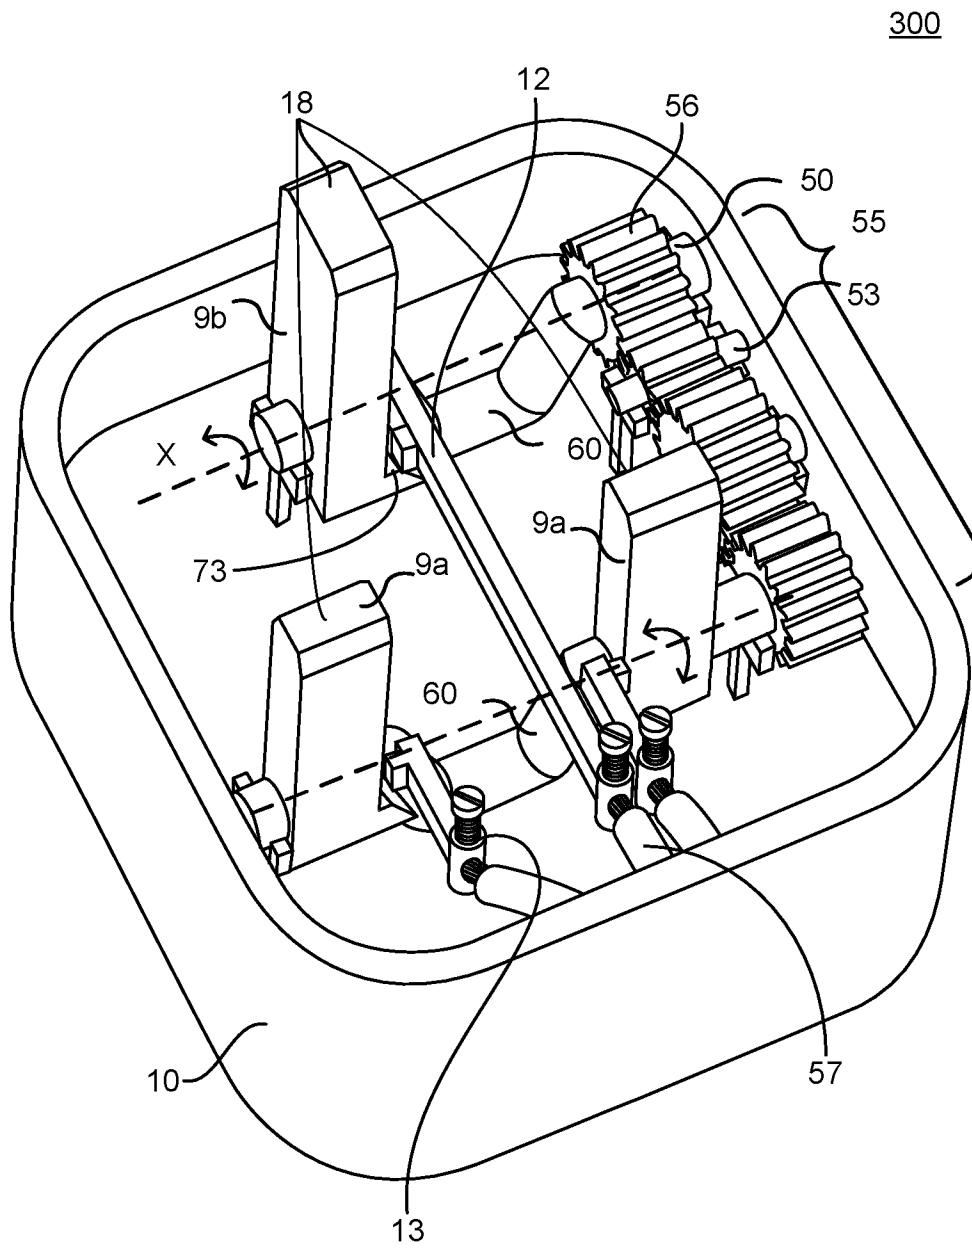


FIG. 10

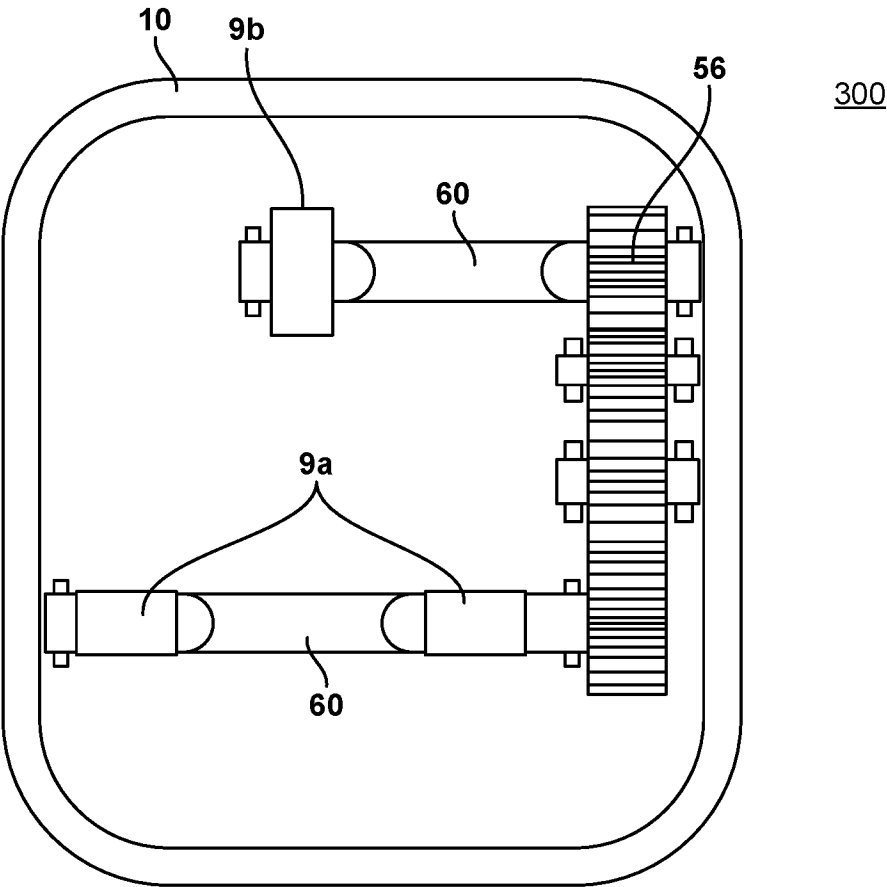


FIG. 11

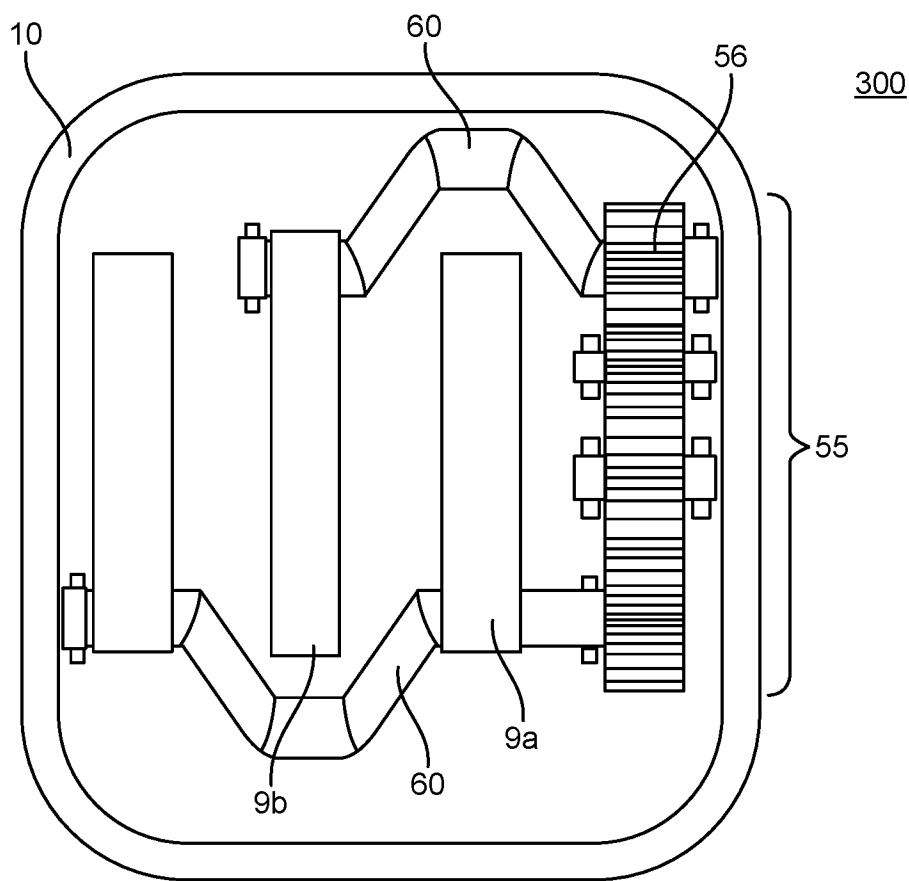


FIG. 12

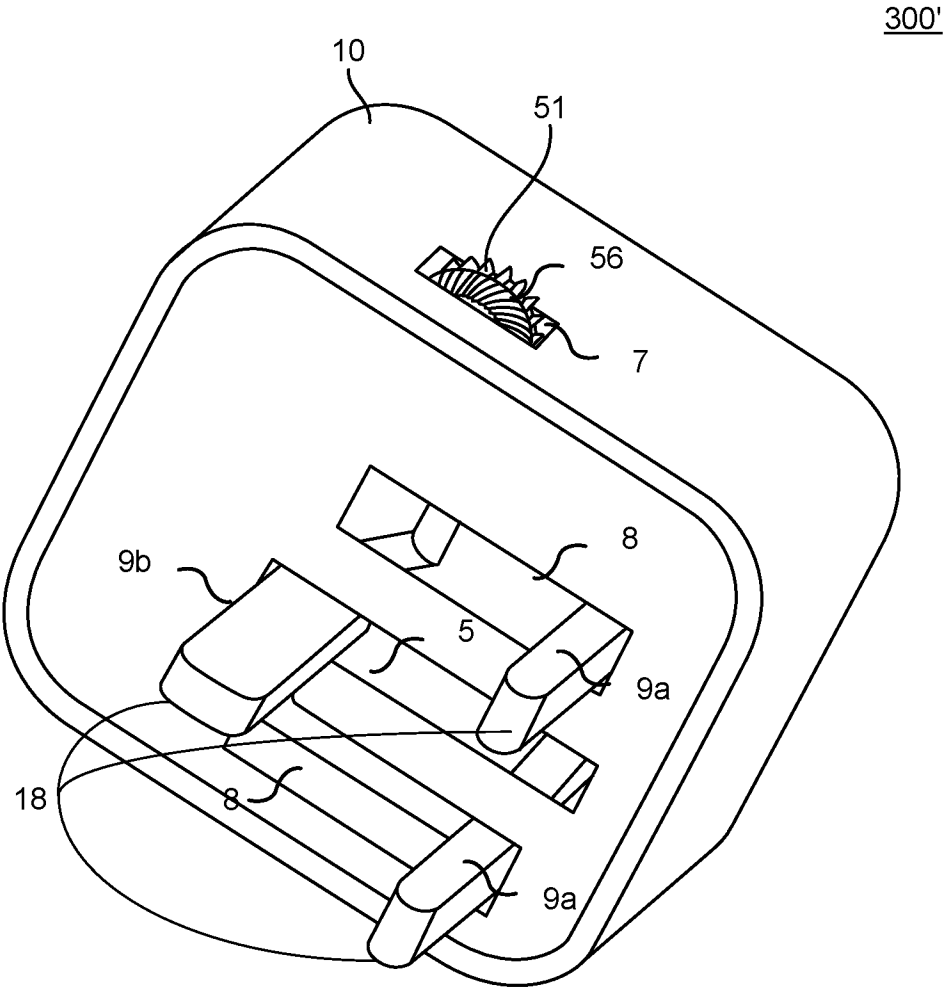


FIG. 13

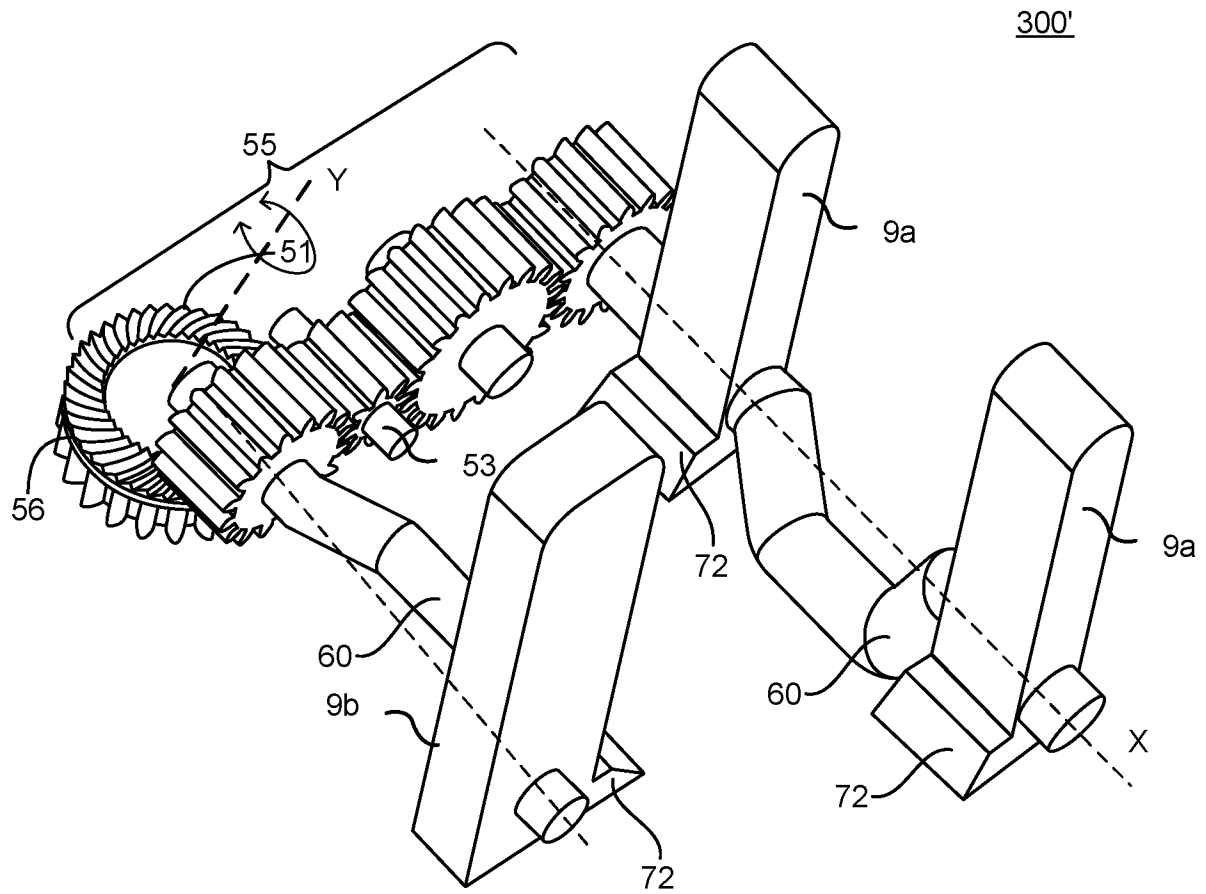


FIG. 14

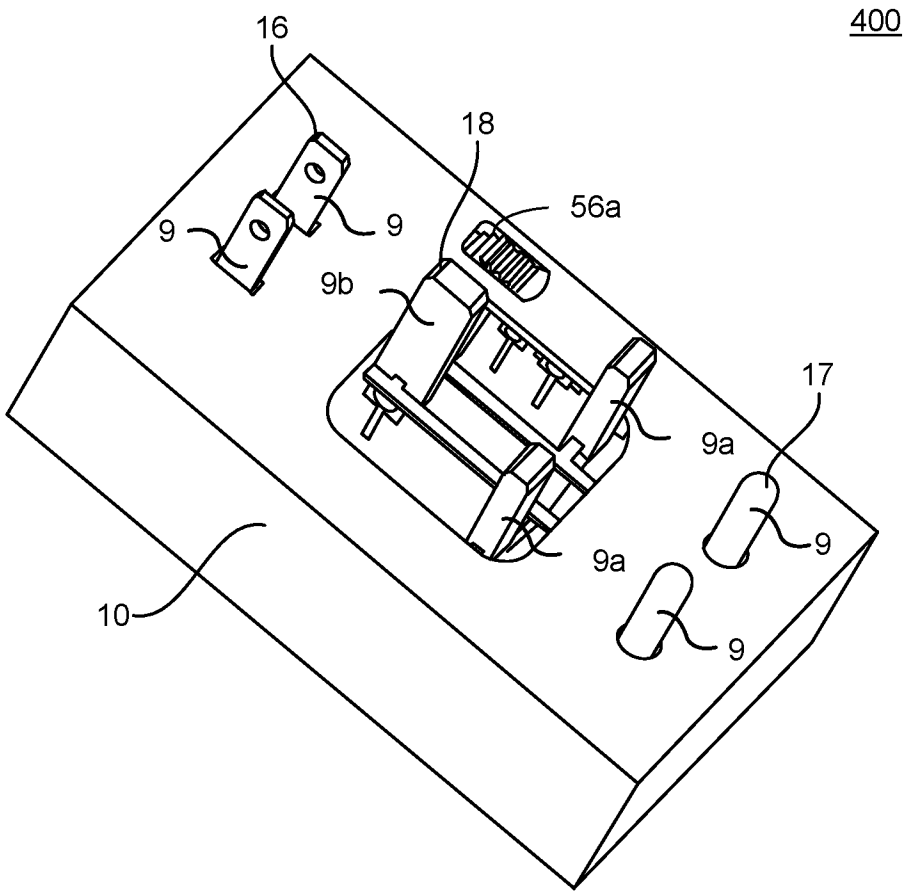


FIG. 15

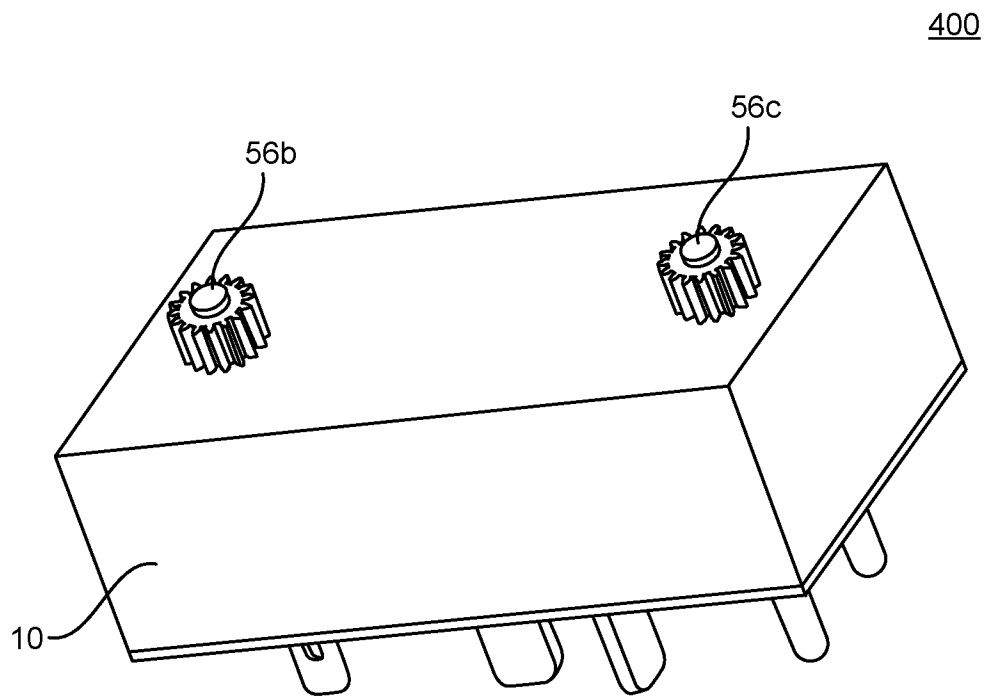


FIG. 16

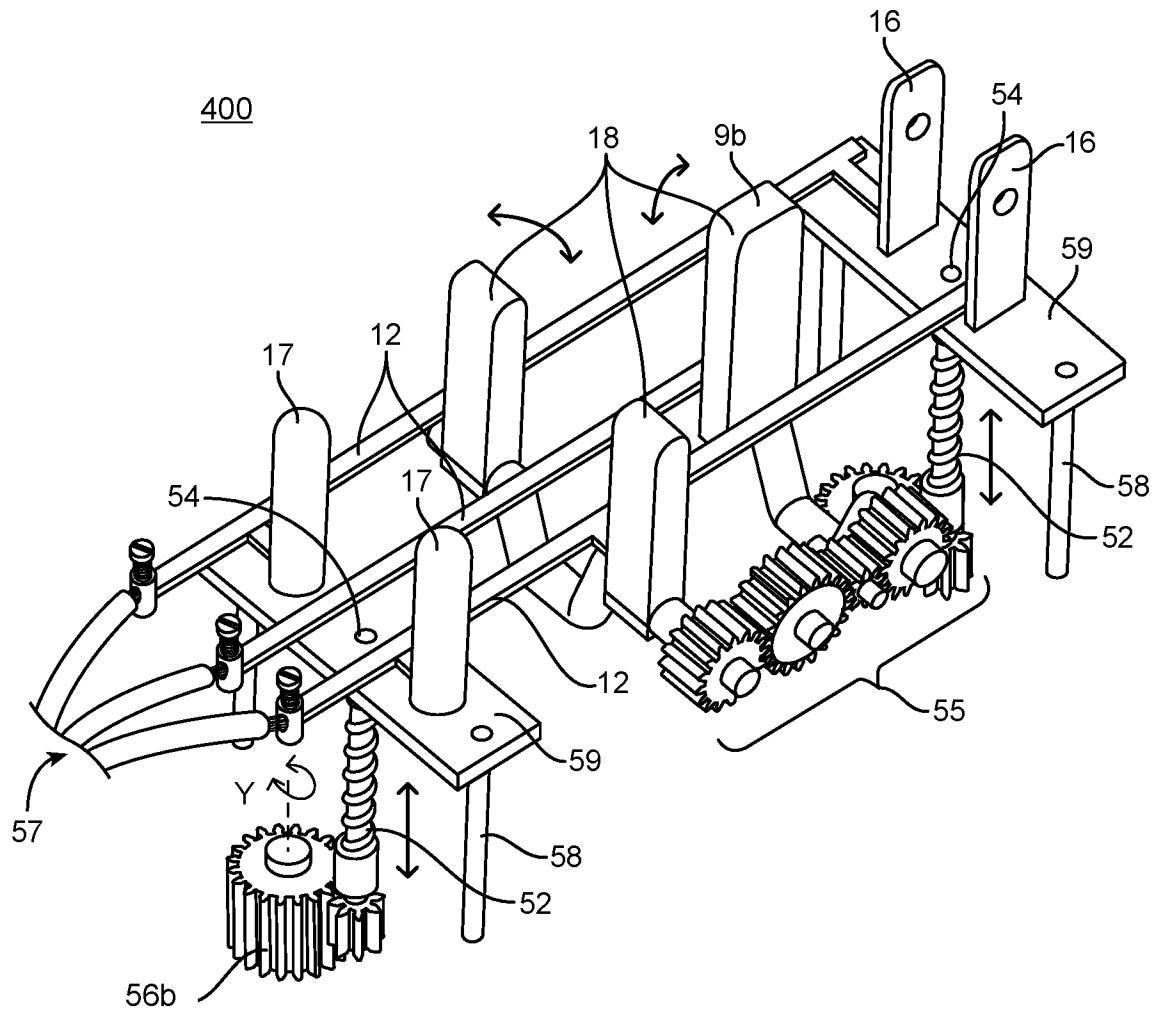


FIG. 17

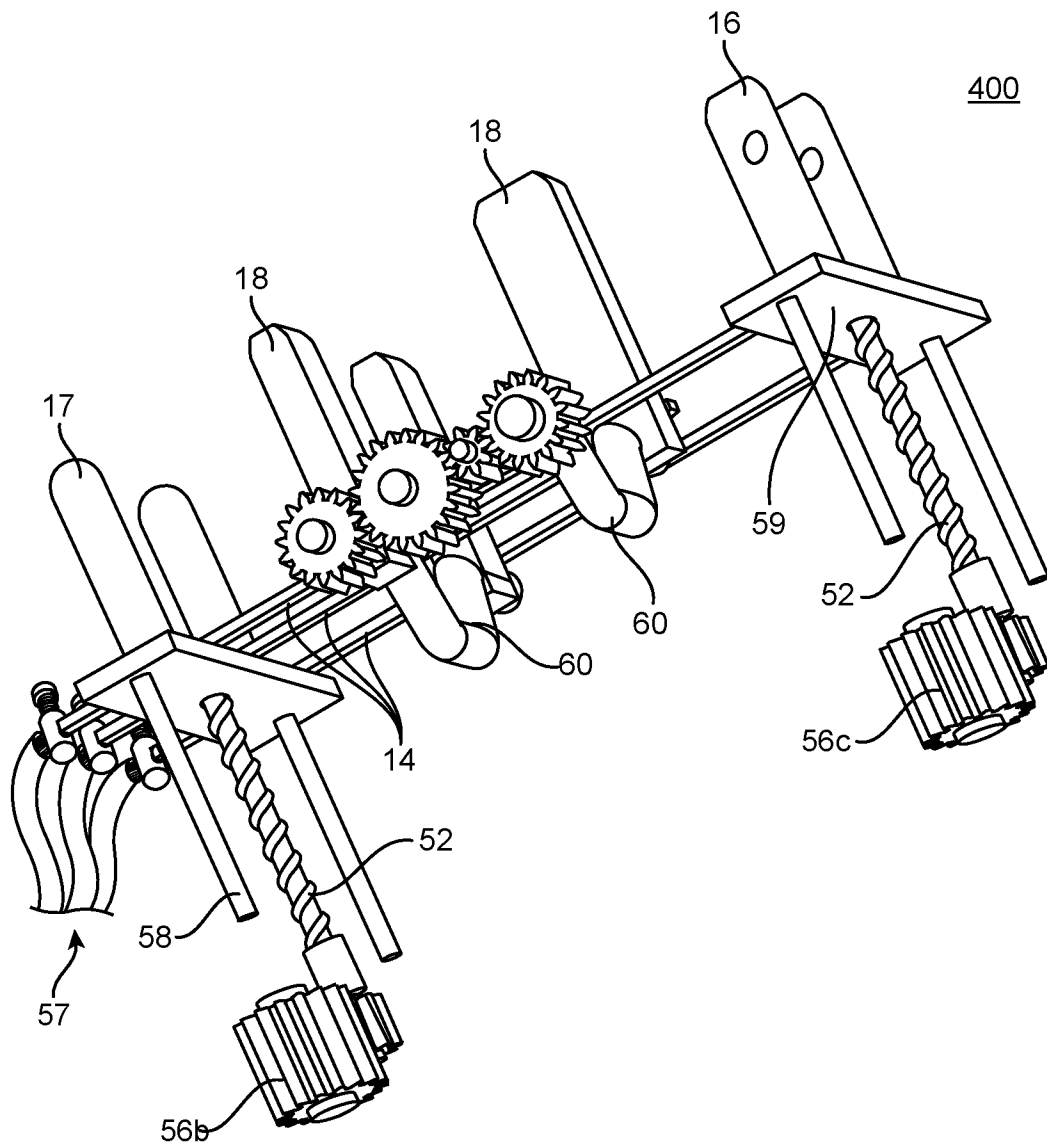


FIG. 18

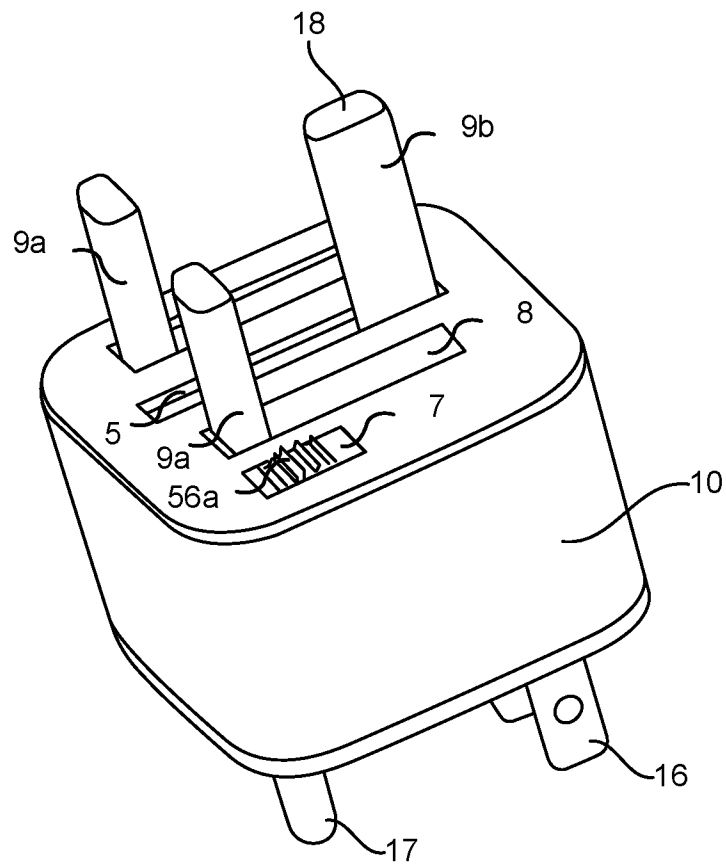


FIG. 19

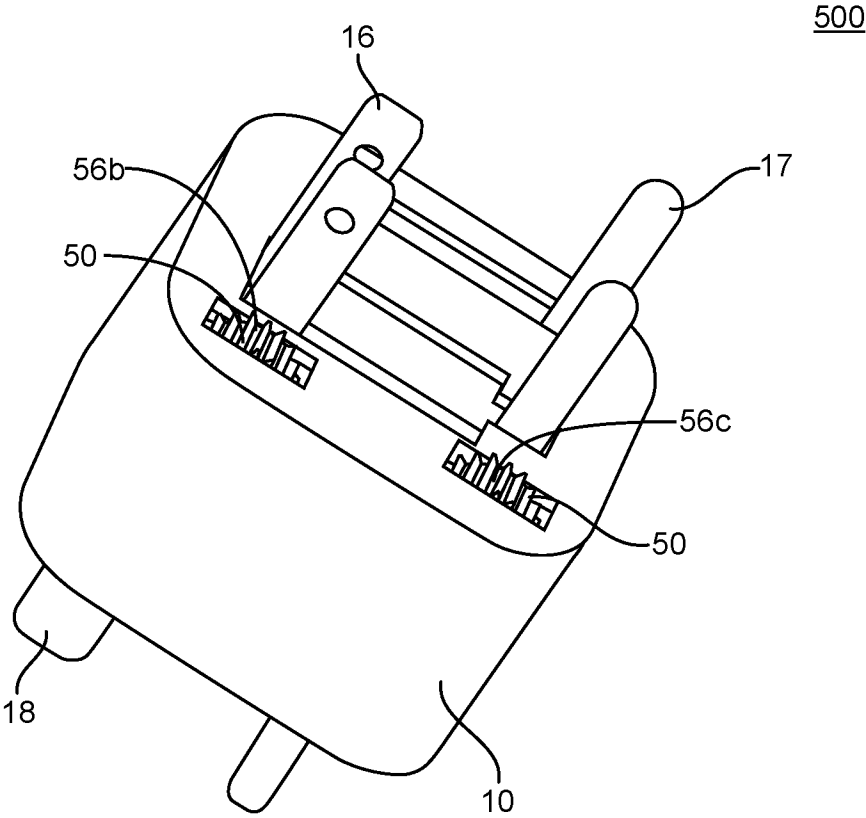


FIG. 20

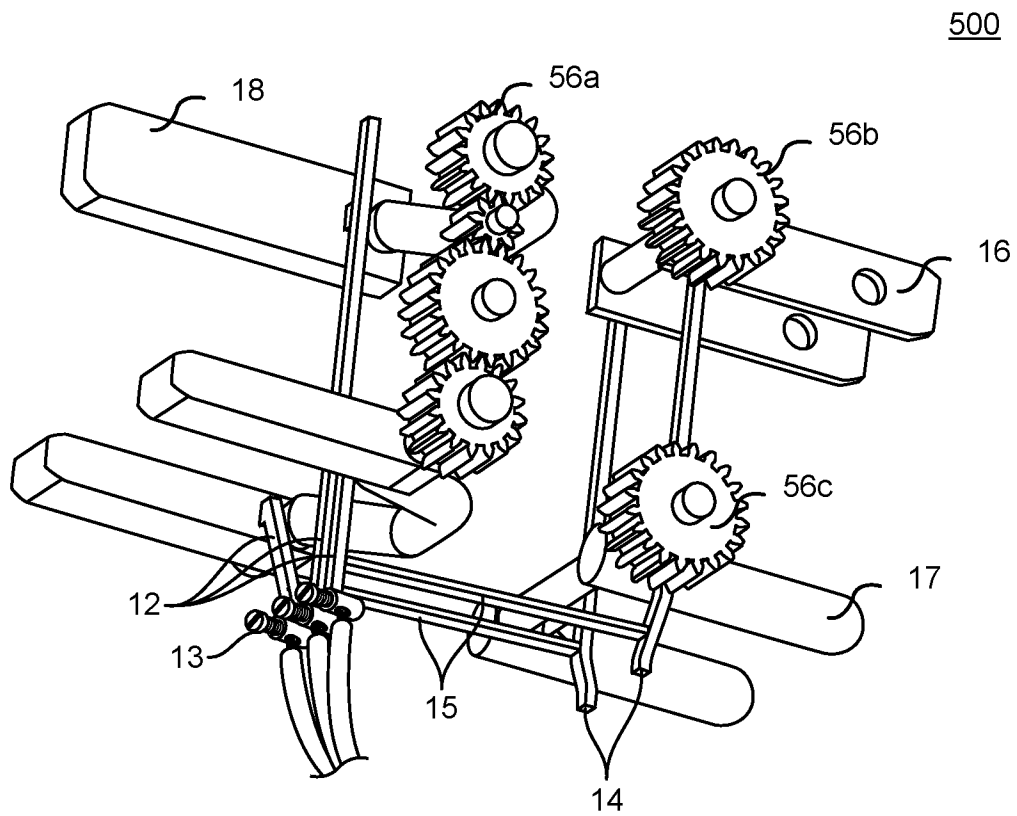


FIG. 21

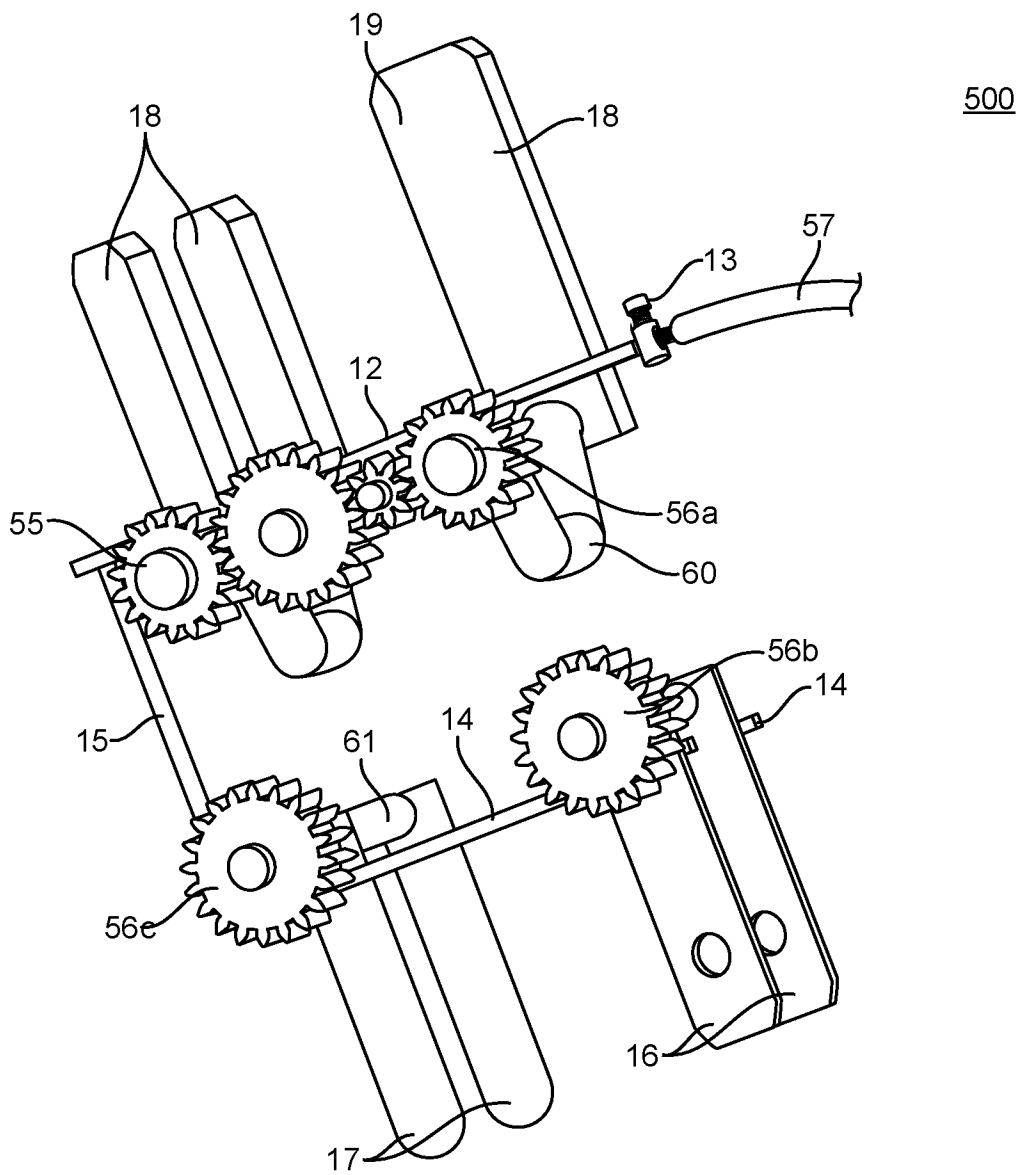


FIG. 22

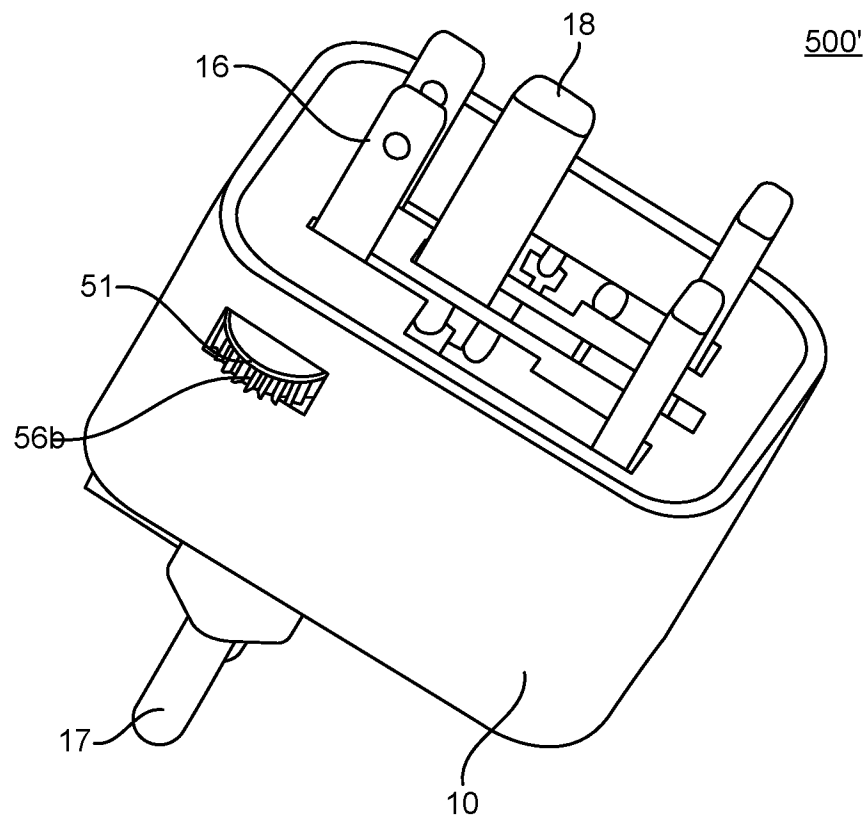


FIG. 23

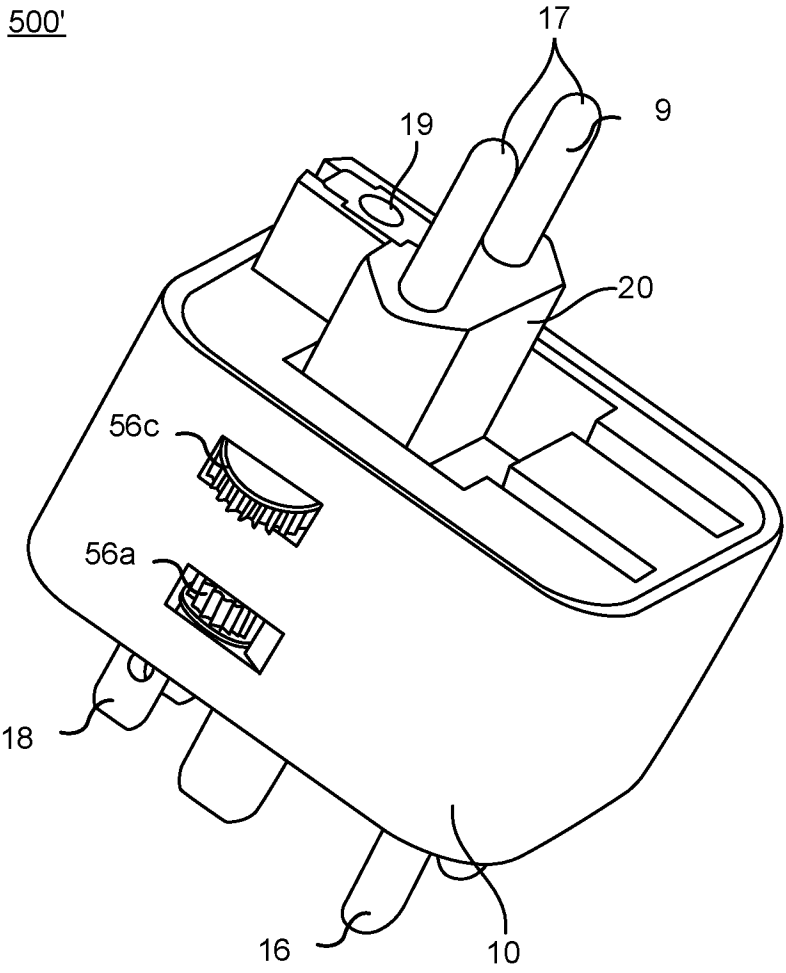


FIG. 24

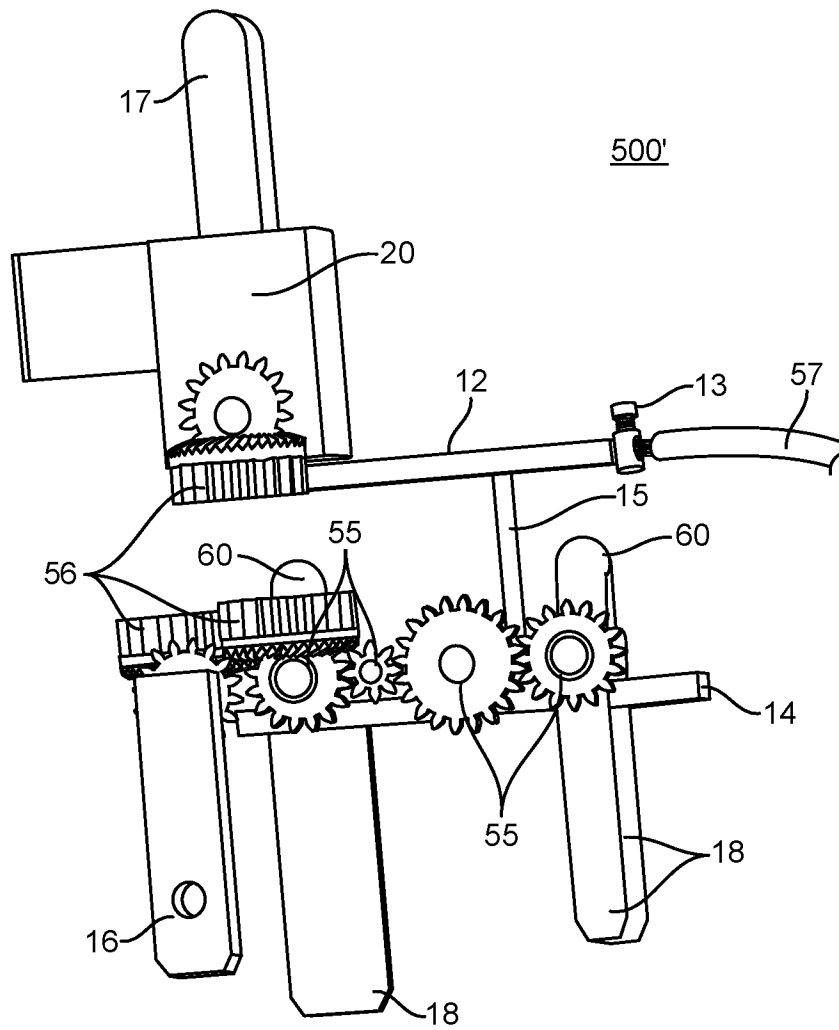


FIG. 25

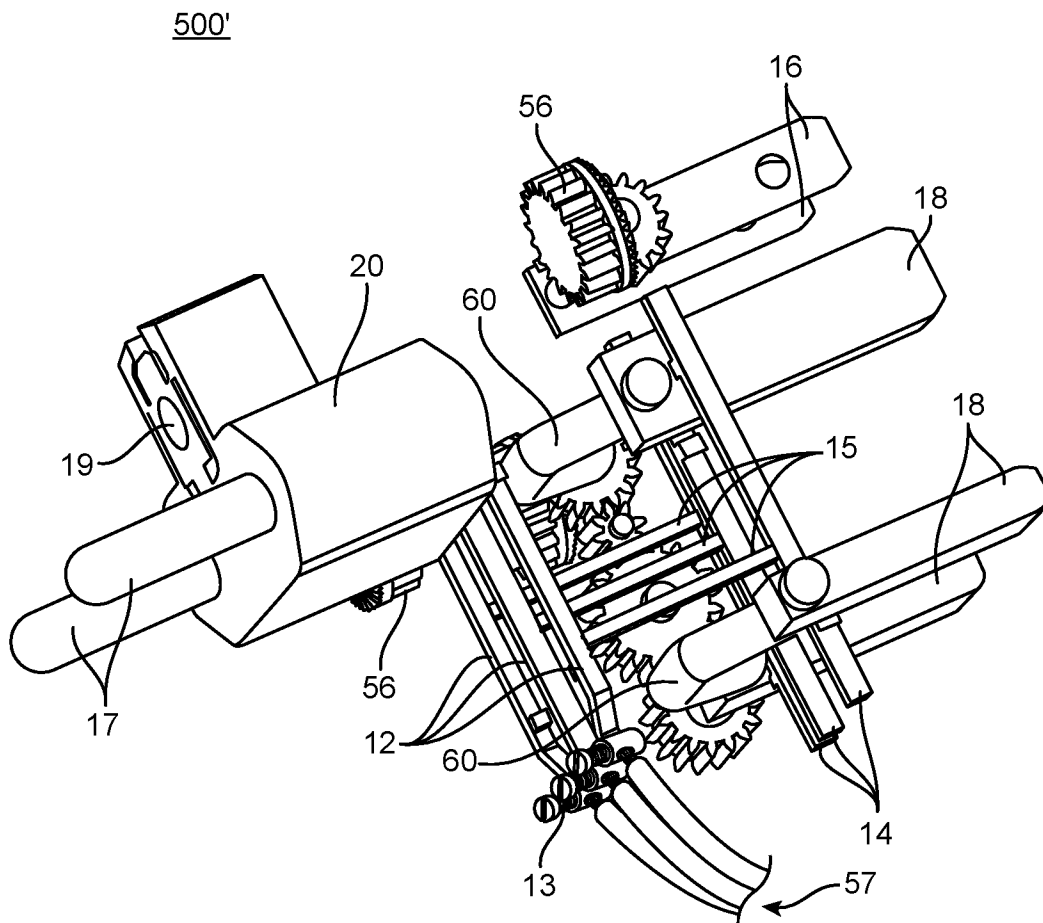


FIG. 26

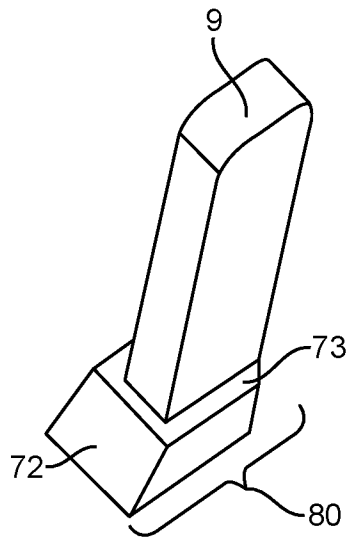


FIG. 27

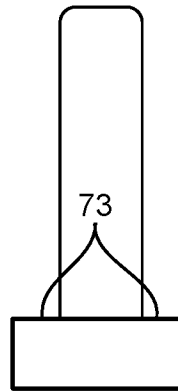


FIG. 28

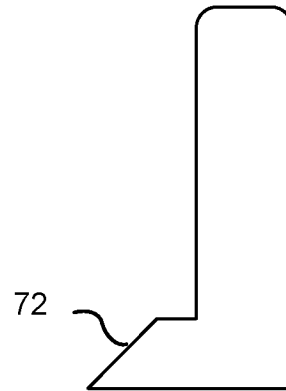


FIG. 29

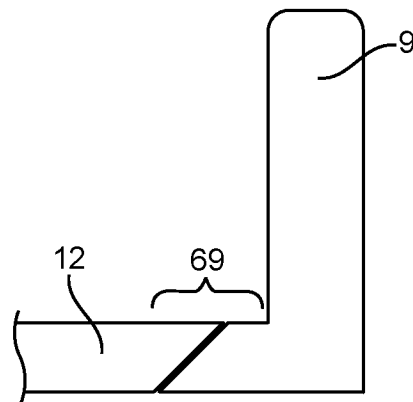


FIG. 30

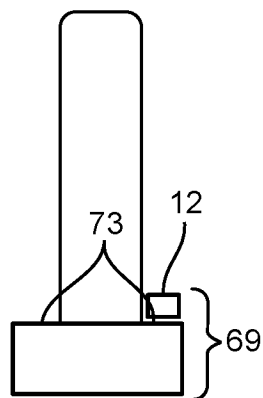


FIG. 31

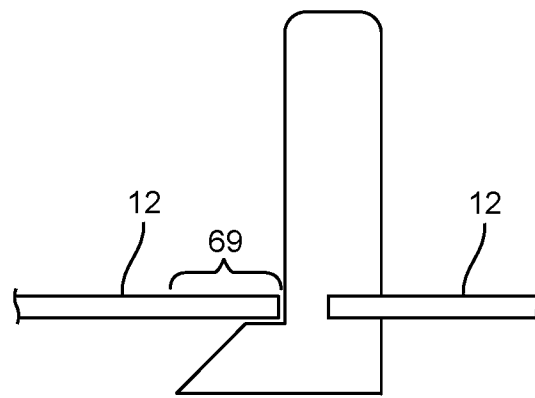


FIG. 32

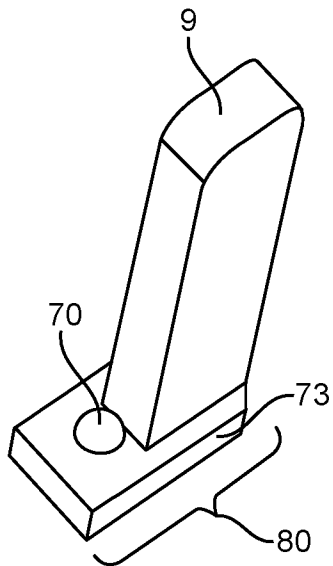


FIG. 33

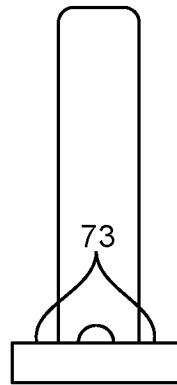


FIG. 34

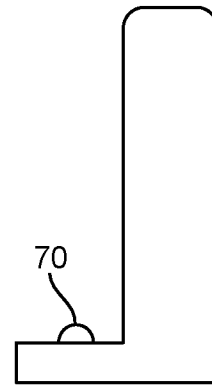


FIG. 35

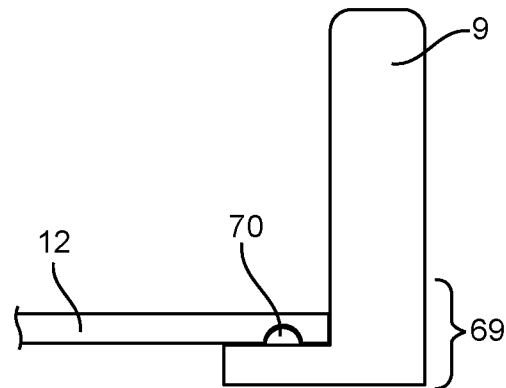


FIG. 36

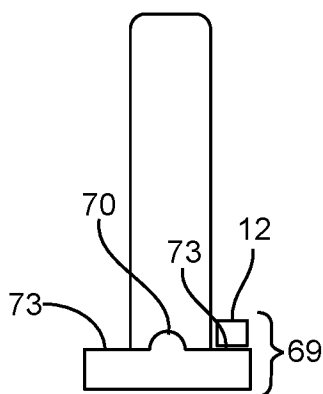


FIG. 37

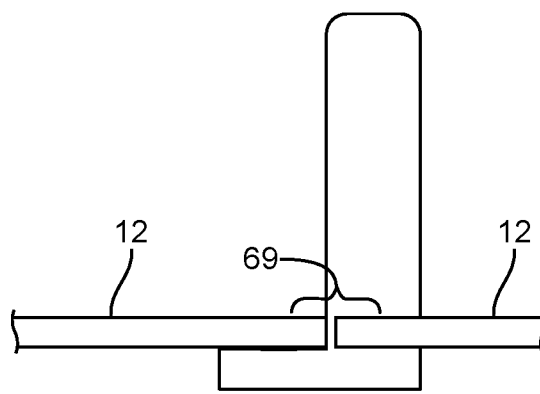


FIG. 38

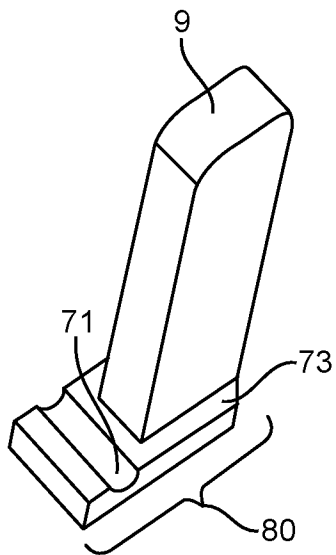


FIG. 39

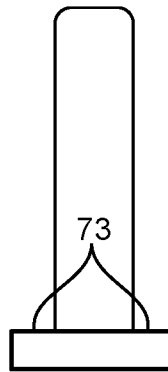


FIG. 40



FIG. 41

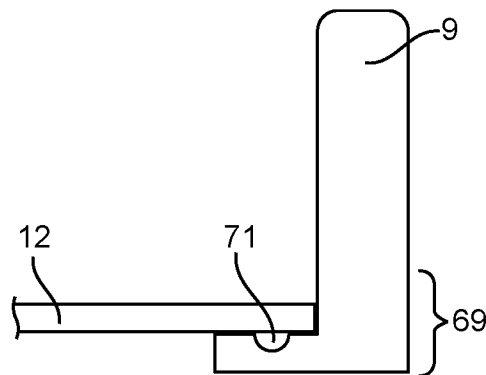


FIG. 42

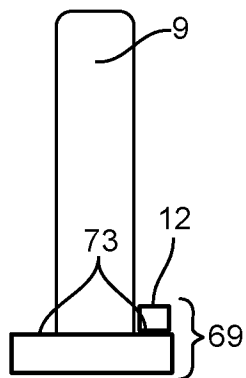


FIG. 43

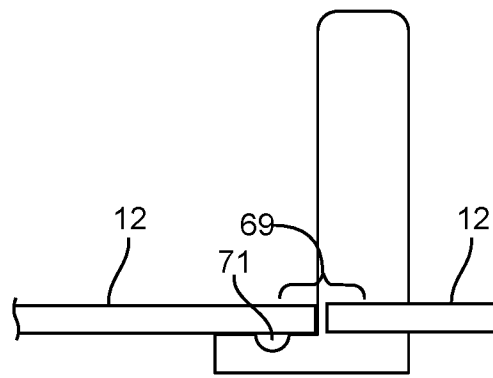


FIG. 44

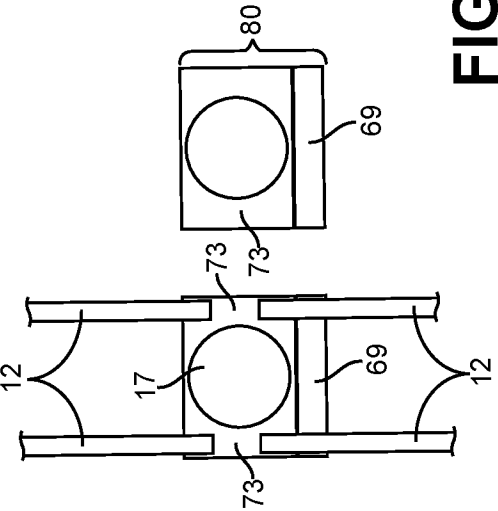


FIG. 46

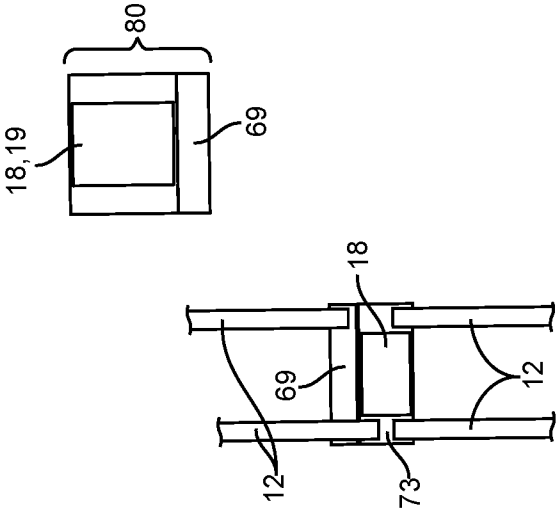


FIG. 45

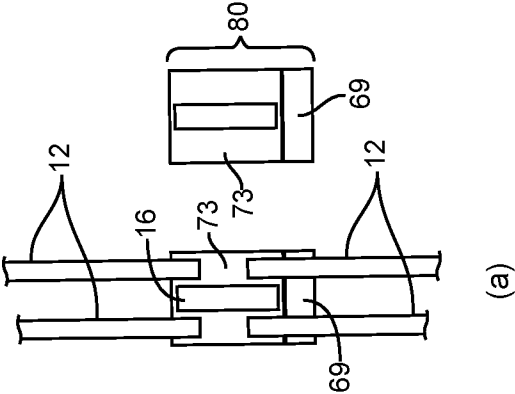


FIG. 47

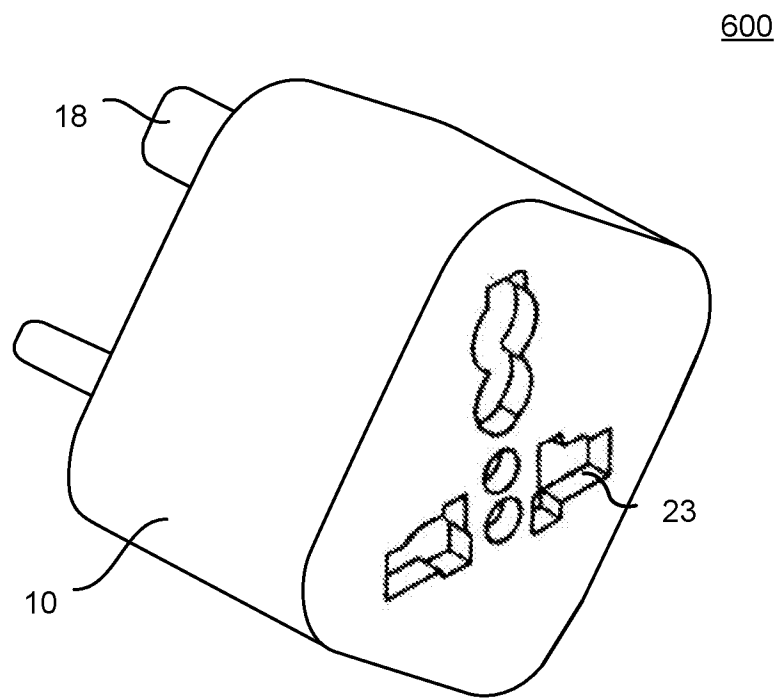


FIG. 48

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 18/51568

A. CLASSIFICATION OF SUBJECT MATTER
IPC(8) - H01R 35/04 (2018.01)
CPC - H01R 35/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

See Search History Document

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

See Search History Document

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

See Search History Document

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X --- Y --- A	US 8,096,817 B2 (LEE et al.) 17 January 2012 (17.01.2012), entire document, especially Fig 1-2, 6; col 1, ln 15-17; col 2, ln 31-37, 40-44, 62-64; col 3, ln 15-20, 22-25, 29-38; col 4, ln 42-49	1-2, 4, 9, 11-15, 21, 23 ----- 10 ----- 3, 5-8, 16-20, 22
Y	US 8,469,730 B2 (GARB et al.) 25 June 2013 (25.06.2013), entire document, especially Fig 25, 27; col 16, ln 51-53, 56-59; col 18, ln 32-40	10
A	US 6,939,150 B1 (LANNI) 06 September 2005 (06.09.2005), entire document, especially Fig 1-3; col 3, ln 6-15; col 4, ln 46-48, 61-65; col 5, ln 23-34	3, 5-8, 16-20, 22
A	US 9,331,441 B2 (APPLE INC.) 03 May 2016 (03.05.2016), entire document, especially Fig 1-6; col 3, ln 56-65; col 4, ln 49-55	3, 5-8, 16-20, 22
X, P	CA 2961248 A1 (CABLE GEAR HOLDINGS LLC) 22 June 2017 (22.06.2017), entire document	1-23
A	US 9,130,384 B2 (PRONG, INC.) 08 September 2015 (08.09.2015), entire document	1-23
A	US 8,366,461 B2 (LEE et al.) 05 February 2013 (05.02.2013), entire document	1-23

☐ Further documents are listed in the continuation of Box C.

☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

19 June 2018

Date of mailing of the international search report

10 JUL 2018

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-8300

Authorized officer:

Lee W. Young

PCT Helpdesk: 571-272-4300

PCT OSP: 571-272-7774