




(86) Date de dépôt PCT/PCT Filing Date: 2016/09/08
(87) Date publication PCT/PCT Publication Date: 2017/08/10
(45) Date de délivrance/Issue Date: 2023/10/03
(85) Entrée phase nationale/National Entry: 2018/08/03
(86) N° demande PCT/PCT Application No.: CN 2016/098403
(87) N° publication PCT/PCT Publication No.: 2017/133243
(30) Priorité/Priority: 2016/02/06 (CN201610081070.3)

(51) Cl.Int./Int.Cl. *H04N 19/52* (2014.01)
(72) Inventeurs/Inventors:
CHEN, HUANBANG, CN;
LIN, SIXIN, CN;
YANG, HAITAO, CN
(73) Propriétaire/Owner:
HUAWEI TECHNOLOGIES CO., LTD., CN
(74) Agent: GOWLING WLG (CANADA) LLP

(54) Titre : PROCÉDE ET DISPOSITIF DE CODAGE/DECODAGE D'IMAGE
(54) Title: IMAGE ENCODING METHOD AND APPARATUS, AND IMAGE DECODING METHOD AND APPARATUS

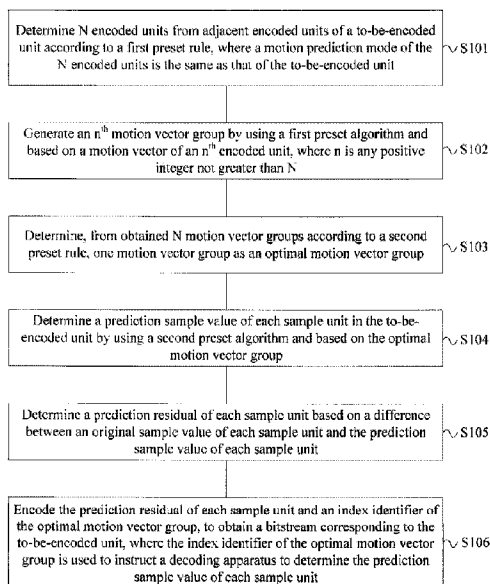

(57) Abrégé/Abstract:

An image encoding method and apparatus and an image decoding method and apparatus are provided, to improve accuracy of encoding and decoding. The image encoding method includes: determining N encoded units from adjacent encoded units of a to-be-encoded unit according to a first preset rule, where a motion prediction mode of the N encoded units is the same as that of the to-be-encoded unit; generating an nth motion vector group by using a first preset algorithm and based on a motion vector of an nth encoded unit, where n comprises any positive integer not greater than N; determining, from obtained N motion vector groups according to a second preset rule, one motion vector group as an optimal motion vector group; determining a prediction sample value of each sample unit in the to-be-encoded unit by using a second preset algorithm and based on the optimal motion vector group; determining a prediction residual of each sample unit based on a difference between an original sample value of each sample unit and the prediction sample value of each sample unit; and encoding the prediction residual of each sample unit and an index identifier of the optimal motion vector group, to obtain a bitstream corresponding to the to-be-encoded unit.

ABSTRACT

An image encoding method and apparatus and an image decoding method and apparatus are provided, to improve accuracy of encoding and decoding. The image encoding method includes: determining N encoded units from adjacent encoded units of a to-be-encoded unit
5 according to a first preset rule, where a motion prediction mode of the N encoded units is the same as that of the to-be-encoded unit; generating an nth motion vector group by using a first preset algorithm and based on a motion vector of an nth encoded unit, where n comprises any positive integer not greater than N; determining, from obtained N motion vector groups according to a second preset rule, one motion vector group as an optimal motion vector group;
10 determining a prediction sample value of each sample unit in the to-be-encoded unit by using a second preset algorithm and based on the optimal motion vector group; determining a prediction residual of each sample unit based on a difference between an original sample value of each sample unit and the prediction sample value of each sample unit; and encoding the prediction residual of each sample unit and an index identifier of the optimal motion vector group, to
15 obtain a bitstream corresponding to the to-be-encoded unit.

IMAGE ENCODING METHOD AND APPARATUS, AND IMAGE DECODING METHOD AND APPARATUS

TECHNICAL FIELD

[0001] Embodiments of the present invention relate to image processing technologies, and
5 in particular, to an image encoding method and apparatus and an image decoding method and
apparatus.

BACKGROUND

[0002] Video multimedia applications, such as video conferencing, video surveillance, and
web television, are widely applied in life and work. Therefore, increasingly high requirements
10 are imposed on video image quality, video image transmission, and video image storage, and
an image encoding technology emerges accordingly. In the image encoding technology, video
image data can be encoded to reduce redundant information of the video image data, facilitate
video image transmission and storage, and ensure video image quality.

[0003] In an existing image encoding method, an encoding scheme based on inter-frame
15 prediction may be used. A motion vector of a to-be-encoded unit is determined based on a
motion vector of an adjacent encoded unit of the to-be-encoded unit, and a prediction sample
value of the to-be-encoded unit is determined based on the motion vector of the to-be-encoded
unit. Further, a residual between an original sample value of the to-be-encoded unit and the
prediction sample value is encoded, to obtain a bitstream of the to-be-encoded unit.

20 [0004] A motion correlation between the adjacent encoded unit and the to-be-encoded unit
also causes impact on the motion vector of the to-be-encoded unit. Therefore, the motion vector
of the to-be-encoded unit that is determined in the existing image encoding method is not
accurate enough, resulting in relatively low accuracy of image encoding.

SUMMARY

[0005] Embodiments of the present invention provide an image encoding method and apparatus and an image decoding method and apparatus, to improve accuracy of image encoding and decoding.

5 [0006] An embodiment of the present invention provides an image encoding method, including:

determining N encoded units from adjacent encoded units of a to-be-encoded unit according to a first preset rule, where a motion prediction mode of the N encoded units is the same as that of the to-be-encoded unit, and N is a positive integer;

10 generating an n^{th} motion vector group by using a first preset algorithm and based on a motion vector of an n^{th} encoded unit, where n comprises any positive integer not greater than N;

determining, from obtained N motion vector groups according to a second preset rule, one motion vector group as an optimal motion vector group;

15 determining a prediction sample value of each sample unit in the to-be-encoded unit by using a second preset algorithm and based on the optimal motion vector group;

determining a prediction residual of each sample unit based on a difference between an original sample value of each sample unit and the prediction sample value of each sample unit; and

20 encoding the prediction residual of each sample unit and an index identifier of the optimal motion vector group, to obtain a bitstream corresponding to the to-be-encoded unit, where the index identifier of the optimal motion vector group is used to instruct a decoding apparatus to determine the prediction sample value of each sample unit.

[0007] Optionally, the generating an n^{th} motion vector group by using a first preset algorithm and based on a motion vector of an n^{th} encoded unit may include:

determining motion vector predictors of M control points of the to-be-encoded unit by using the first preset algorithm and based on the motion vector of the n^{th} encoded unit, sample coordinates of the n^{th} encoded unit, and sample coordinates of the M control points; and

generating the n^{th} motion vector group based on the motion vector predictors of the

M control points, where M is a positive integer determined based on the motion prediction mode of the to-be-encoded unit.

[0008] Optionally, the M control points include an upper-left vertex and an upper-right vertex of the to-be-encoded unit; and

- 5 the determining motion vector predictors of M control points of the to-be-encoded unit by using the first preset algorithm and based on the motion vector of the n^{th} encoded unit, sample coordinates of the n^{th} encoded unit, and sample coordinates of the M control points includes:

- determining a motion vector predictor (v_{x0}, v_{y0}) of the upper-left vertex of the to-be-encoded unit by using the following formula (1) and based on a motion vector (v_{x2}, v_{y2}) of an upper-left vertex of the n^{th} encoded unit, a motion vector (v_{x3}, v_{y3}) of an upper-right vertex of the n^{th} encoded unit, a motion vector (v_{x4}, v_{y4}) of a lower-left vertex of the n^{th} encoded unit, sample coordinates (x_2, y_2) of the upper-left vertex of the n^{th} encoded unit, sample coordinates (x_3, y_3) of the upper-right vertex of the n^{th} encoded unit, sample coordinates (x_4, y_4) of the lower-left vertex of the n^{th} encoded unit, and sample coordinates (x_0, y_0) of the upper-left vertex of the to-be-encoded unit:

$$\begin{cases} v_{x0} = v_{x3} + \frac{(y_3 - y_0) \times (v_{x4} - v_{x2})}{(y_4 - y_2)} \\ v_{y0} = v_{y3} + \frac{(y_3 - y_0) \times (v_{y4} - v_{y2})}{(y_4 - y_2)} \end{cases} \quad \text{formula (1); and}$$

- determining a motion vector predictor (v_{x1}, v_{y1}) of the upper-right vertex of the to-be-encoded unit by using the following formula (2) and based on the motion vector (v_{x2}, v_{y2}) of the upper-left vertex of the n^{th} encoded unit, the motion vector (v_{x3}, v_{y3}) of the upper-right vertex of the n^{th} encoded unit, the sample coordinates (x_2, y_2) of the upper-left vertex of the n^{th} encoded unit, the sample coordinates (x_3, y_3) of the upper-right vertex of the n^{th} encoded unit, the motion vector predictor (v_{x0}, v_{y0}) of the upper-left vertex of the to-be-encoded unit,

the sample coordinates (x_0, y_0) of the upper-left vertex of the to-be-encoded unit, and sample coordinates (x_1, y_1) of the upper-left vertex of the to-be-encoded unit:

$$\begin{cases} v_{x1} = v_{x0} + \frac{(x_1 - x_0) \times (v_{x3} - v_{x2})}{(x_3 - x_2)} \\ v_{y1} = v_{y0} + \frac{(x_1 - x_0) \times (v_{y3} - v_{y2})}{(x_3 - x_2)} \end{cases} \quad \text{formula (2).}$$

[0009] Optionally, the determining, from obtained N motion vector groups according to a second preset rule, one motion vector group as an optimal motion vector group may include:

sorting the N motion vector groups according to a preset sorting rule, to generate a candidate motion vector queue;

if N is greater than or equal to a preset value, determining a preset quantity of motion vector groups in the front of the candidate motion vector queue;

10 determining a matching error between each of the preset quantity of motion vector groups in the front and the to-be-encoded unit; and

determining one motion vector group with a smallest matching error as the optimal motion vector group.

[0010] Optionally, the preset sorting rule includes a descending order of the N encoded units.

[0011] Optionally, the determining, from obtained N motion vector groups according to a second preset rule, one motion vector group as an optimal motion vector group may include:

sorting the N motion vector groups according to a preset sorting rule;

15 if N is less than a preset value, generating Q motion vector groups, where a sum of N and Q is greater than or equal to the preset value, and Q is a positive integer;

adding the Q motion vector groups to the end of the N motion vector groups, to generate a candidate motion vector queue;

determining a preset quantity of motion vector groups in the front of the candidate motion vector queue;

25 determining a matching error between each of the preset quantity of motion vector groups in the front and the to-be-encoded unit; and

determining one motion vector group with a smallest matching error as the optimal

motion vector group.

[0012] Optionally, the generating Q motion vector groups may include:

determining, from the adjacent encoded units, an encoded unit corresponding to an m^{th} control point in the to-be-encoded unit, where a distance between the encoded unit
5 corresponding to the m^{th} control point and the m^{th} control point is less than or equal to a preset distance, and m comprises any positive integer not greater than M;

determining a motion vector of the encoded unit corresponding to the m^{th} control point as a motion vector predictor of the m^{th} control point; and

generating the Q motion vector groups based on the motion vector predictors of the
10 M control points.

[0013] Alternatively, the generating Q motion vector groups may include:

determining, from the adjacent encoded units, an encoded unit corresponding to an m^{th} control point in the to-be-encoded unit, where a distance between the encoded unit
corresponding to the m^{th} control point and the m^{th} control point is less than or equal to a preset
15 distance, and m comprises any positive integer not greater than M;

determining a motion vector of the encoded unit corresponding to the m^{th} control point as a first motion vector predictor of the m^{th} control point;

generating K first motion vector groups based on first motion vector predictors of
the M control points;

20 determining a motion vector of a j^{th} encoded unit in the adjacent encoded units as a second motion vector predictor of the m^{th} control point, where j is any one of 1, ..., or J, J is a quantity of the adjacent encoded units, and J is a positive integer;

generating L second motion vector groups based on second motion vector predictors
of the M control points; and

25 adding the K first motion vector groups to the end of the L second motion vector groups, to generate the Q motion vector groups.

[0014] Optionally, the adding the Q motion vector groups to the end of the N motion vector groups, to generate a candidate motion vector queue may include:

determining an eigenvalue corresponding to a q^{th} motion vector group, where q
30 comprises any positive integer not greater than Q;

sorting the Q motion vector groups in ascending order based on eigenvalues corresponding to the Q motion vector groups; and

adding the sorted Q motion vector groups to the end of the sorted N motion vector groups, to generate the candidate motion vector queue.

5 **[0015]** Optionally, the determining an eigenvalue corresponding to a q^{th} motion vector group includes:

 determining a difference between components, in one prediction direction, of motion vector predictors, in the q^{th} motion vector group, of adjacent control points in the M control points;

10 comparing an absolute value of the difference with a preset component threshold, where the preset component threshold is a range of the to-be-encoded unit in the prediction direction; and

 if the absolute value of the difference is less than or equal to the preset component threshold, determining the eigenvalue corresponding to the q^{th} motion vector group.

15 **[0016]** Optionally, the determining an eigenvalue corresponding to a q^{th} motion vector group may include:

 determining, from the adjacent encoded units, an encoded unit corresponding to another control point, where a distance between the encoded unit corresponding to the another control point and the another control point is less than or equal to the preset distance, and the
20 another control point is any control point other than the M control points in the to-be-encoded unit;

 determining a motion vector of the encoded unit corresponding to the another control point as a motion vector predictor of the another control point; and

 determining the eigenvalue corresponding to the q^{th} motion vector group by using a
25 third preset algorithm and based on the motion vector predictor of the another control point and motion vector predictors, in the q^{th} motion vector group, of the M control points.

[0017] Optionally, the motion prediction mode of the to-be-encoded unit includes a translation motion prediction mode or an affine motion prediction mode.

[0018] An embodiment of the present invention further provides an image decoding method,
30 including:

determining N decoded units from adjacent decoded units of a to-be-decoded unit according to a first preset rule, where a motion prediction mode of the N decoded units is the same as that of the to-be-decoded unit, and N is a positive integer;

generating an n^{th} motion vector group by using a first preset algorithm and based on a motion vector of an n^{th} decoded unit, where n comprises any positive integer not greater than N;

decoding a bitstream corresponding to the to-be-decoded unit, to obtain a prediction residual of each sample unit and an index identifier of an optimal motion vector group;

determining the optimal motion vector group in N motion vector groups based on the index identifier of the optimal motion vector group;

determining a prediction sample value of each sample unit in the to-be-decoded unit by using a second preset algorithm and based on the optimal motion vector group; and

determining a reconstruction sample value of each sample unit based on a sum of the prediction sample value of each sample unit and the prediction residual of each sample unit.

[0019] Optionally, the generating an n^{th} motion vector group by using a first preset algorithm and based on a motion vector of an n^{th} decoded unit may include:

determining motion vector predictors of M control points of the to-be-decoded unit by using the first preset algorithm and based on the motion vector of the n^{th} decoded unit, sample coordinates of the n^{th} decoded unit, and sample coordinates of the M control points; and

generating the n^{th} motion vector group based on the motion vector predictors of the M control points, where M is a positive integer determined based on the motion prediction mode of the to-be-decoded unit.

[0020] Optionally, the M control points include an upper-left vertex and an upper-right vertex of the to-be-decoded unit; and

the determining motion vector predictors of M control points of the to-be-decoded unit by using the first preset algorithm and based on the motion vector of the n^{th} decoded unit, sample coordinates of the n^{th} decoded unit, and sample coordinates of the M control points includes:

determining a motion vector predictor (v_{x0}, v_{y0}) of the upper-left vertex of the to-

be-decoded unit by using the following formula (1) and based on a motion vector (v_{x2}, v_{y2}) of an upper-left vertex of the n^{th} decoded unit, a motion vector (v_{x3}, v_{y3}) of an upper-right vertex of the n^{th} decoded unit, a motion vector (v_{x4}, v_{y4}) of a lower-left vertex of the n^{th} decoded unit, sample coordinates (x_2, y_2) of the upper-left vertex of the n^{th} decoded unit, sample coordinates (x_3, y_3) of the upper-right vertex of the n^{th} decoded unit, sample coordinates (x_4, y_4) of the lower-left vertex of the n^{th} decoded unit, and sample coordinates (x_0, y_0) of the upper-left vertex of the to-be-decoded unit:

$$\begin{cases} v_{x0} = v_{x3} + \frac{(y_3 - y_0) \times (v_{x4} - v_{x2})}{(y_4 - y_2)} \\ v_{y0} = v_{y3} + \frac{(y_3 - y_0) \times (v_{y4} - v_{y2})}{(y_4 - y_2)} \end{cases} \quad \text{formula (1); and}$$

determining a motion vector predictor (v_{x1}, v_{y1}) of the upper-right vertex of the to-be-decoded unit by using the following formula (2) and based on the motion vector (v_{x2}, v_{y2}) of the upper-left vertex of the n^{th} decoded unit, the motion vector (v_{x3}, v_{y3}) of the upper-right vertex of the n^{th} decoded unit, the sample coordinates (x_2, y_2) of the upper-left vertex of the n^{th} decoded unit, the sample coordinates (x_3, y_3) of the upper-right vertex of the n^{th} decoded unit, the motion vector predictor (v_{x0}, v_{y0}) of the upper-left vertex of the to-be-decoded unit, the sample coordinates (x_0, y_0) of the upper-left vertex of the to-be-decoded unit, and sample coordinates (x_1, y_1) of upper-left vertex of the to-be-decoded unit:

$$\begin{cases} v_{x1} = v_{x0} + \frac{(x_1 - x_0) \times (v_{x3} - v_{x2})}{(x_3 - x_2)} \\ v_{y1} = v_{y0} + \frac{(x_1 - x_0) \times (v_{y3} - v_{y2})}{(x_3 - x_2)} \end{cases} \quad \text{formula (2).}$$

[0021] Optionally, the determining the optimal motion vector group in N motion vector groups based on the index identifier of the optimal motion vector group may include:

sorting the N motion vector groups according to a preset sorting rule, to generate a

candidate motion vector queue;

if N is greater than or equal to a preset value, determining a preset quantity of motion vector groups in the front of the candidate motion vector queue; and

determining the optimal motion vector group in the preset quantity of motion vector groups in the front based on the index identifier of the optimal motion vector group.

[0022] Optionally, the preset sorting rule includes a descending order of the N decoded units.

[0023] Optionally, the determining the optimal motion vector group in N motion vector groups based on the index identifier of the optimal motion vector group may include:

10 sorting the N motion vector groups according to a preset sorting rule;

if N is less than a preset value, generating Q motion vector groups, where a sum of N and Q is greater than or equal to the preset value, and Q is a positive integer;

adding the Q motion vector groups to the end of the N motion vector groups, to generate a candidate motion vector queue;

15 determining a preset quantity of motion vector groups in the front of the candidate motion vector queue; and

determining the optimal motion vector group in the preset quantity of motion vector groups in the front based on the index identifier of the optimal motion vector group.

[0024] Optionally, the generating Q motion vector groups includes:

20 determining, from the adjacent decoded units, a decoded unit corresponding to an m^{th} control point in the to-be-decoded unit, where a distance between the decoded unit corresponding to the m^{th} control point and the m^{th} control point is less than or equal to a preset distance, and m comprises any positive integer not greater than M;

determining a motion vector of the decoded unit corresponding to the m^{th} control point as a motion vector predictor of the m^{th} control point; and

generating the Q motion vector groups based on the motion vector predictors of the M control points.

[0025] Alternatively, the generating Q motion vector groups includes:

30 determining, from the adjacent decoded units, a decoded unit corresponding to an m^{th} control point in the to-be-decoded unit, where a distance between the decoded unit

corresponding to the m^{th} control point and the m^{th} control point is less than or equal to a preset distance, and m comprises any positive integer not greater than M ;

determining a motion vector of the decoded unit corresponding to the m^{th} control point as a first motion vector predictor of the m^{th} control point;

5 generating K first motion vector groups based on first motion vector predictors of the M control points;

determining a motion vector of a j^{th} decoded unit in the adjacent decoded units as a second motion vector predictor of the m^{th} control point, where j is any one of $1, \dots, \text{or } J$, J is a quantity of the adjacent decoded units, and J is a positive integer;

10 generating L second motion vector groups based on second motion vector predictors of the M control points; and

adding the K first motion vector groups to the end of the L second motion vector groups, to generate the Q motion vector groups.

[0026] Optionally, the adding the Q motion vector groups to the end of the N motion vector groups, to generate a candidate motion vector queue includes:

determining an eigenvalue corresponding to a q^{th} motion vector group, where q comprises any positive integer not greater than Q ;

sorting the Q motion vector groups in ascending order based on eigenvalues corresponding to the Q motion vector groups; and

20 adding the sorted Q motion vector groups to the end of the sorted N motion vector groups, to generate the candidate motion vector queue.

[0027] Optionally, the determining an eigenvalue corresponding to a q^{th} motion vector group includes:

25 determining a difference between components, in one prediction direction, of motion vector predictors, in the q^{th} motion vector group, of adjacent control points in the M control points;

comparing an absolute value of the difference with a preset component threshold, where the preset component threshold is a range of the to-be-decoded unit in the prediction direction; and

30 if the absolute value of the difference is less than or equal to the preset component

threshold, determining the eigenvalue corresponding to the q^{th} motion vector group.

[0028] Optionally, the determining an eigenvalue corresponding to a q^{th} motion vector group includes:

5 determining, from the adjacent decoded units, a decoded unit corresponding to another control point, where a distance between the decoded unit corresponding to the another control point and the another control point is less than or equal to the preset distance, and the another control point is any control point other than the M control points in the to-be-decoded unit;

10 determining a motion vector of the decoded unit corresponding to the another control point as a motion vector predictor of the another control point; and

determining the eigenvalue corresponding to the q^{th} motion vector group by using a third preset algorithm and based on the motion vector predictor of the another control point and motion vector predictors, in the q^{th} motion vector group, of the M control points.

15 [0029] Optionally, the motion prediction mode of the to-be-decoded unit includes a translation motion prediction mode or an affine motion prediction mode.

[0030] An embodiment of the present invention further provides an image encoding apparatus, including:

20 a determining module, configured to determine N encoded units from adjacent encoded units of a to-be-encoded unit according to a first preset rule, where a motion prediction mode of the N encoded units is the same as that of the to-be-encoded unit, and N is a positive integer;

a calculation module, configured to generate an n^{th} motion vector group by using a first preset algorithm and based on a motion vector of an n^{th} encoded unit determined by the determining module, where n comprises any positive integer not greater than N, where

25 the determining module is further configured to determine, from N motion vector groups obtained by the calculation module and according to a second preset rule, one motion vector group as an optimal motion vector group; and

the calculation module is further configured to: determine a prediction sample value of each sample unit in the to-be-encoded unit by using a second preset algorithm and based on
30 the optimal motion vector group determined by the determining module, and determine a

prediction residual of each sample unit based on a difference between an original sample value of each sample unit and the prediction sample value of each sample unit; and

an encoding module, configured to encode the prediction residual of each sample unit and an index identifier of the optimal motion vector group, to obtain a bitstream
5 corresponding to the to-be-encoded unit, where the index identifier of the optimal motion vector group is used to instruct a decoding apparatus to determine the prediction sample value of each sample unit.

[0031] Optionally, the calculation module is specifically configured to: determine motion vector predictors of M control points of the to-be-encoded unit by using the first preset
10 algorithm and based on the motion vector of the n^{th} encoded unit determined by the determining module, sample coordinates of the n^{th} encoded unit, and sample coordinates of the M control points; and generate the n^{th} motion vector group based on the motion vector predictors of the M control points, where M is a positive integer determined based on the motion prediction mode of the to-be-encoded unit.

15 [0032] Optionally, the M control points include an upper-left vertex and an upper-right vertex of the to-be-encoded unit;

the calculation module is specifically configured to determine a motion vector predictor (v_{x0}, v_{y0}) of the upper-left vertex of the to-be-encoded unit by using the following
formula (1) and based on a motion vector (v_{x2}, v_{y2}) of an upper-left vertex of the n^{th} encoded
20 unit determined by the determining module, a motion vector (v_{x3}, v_{y3}) of an upper-right vertex of the n^{th} encoded unit, a motion vector (v_{x4}, v_{y4}) of a lower-left vertex of the n^{th} encoded unit, sample coordinates (x_2, y_2) of the upper-left vertex of the n^{th} encoded unit, sample coordinates (x_3, y_3) of the upper-right vertex of the n^{th} encoded unit, sample coordinates (x_4, y_4) of the lower-left vertex of the n^{th} encoded unit, and sample coordinates (x_0, y_0) of
25 the upper-left vertex of the to-be-encoded unit:

$$\begin{cases} v_{x0} = v_{x3} + \frac{(y_3 - y_0) \times (v_{x4} - v_{x2})}{(y_4 - y_2)} \\ v_{y0} = v_{y3} + \frac{(y_3 - y_0) \times (v_{y4} - v_{y2})}{(y_4 - y_2)} \end{cases} \quad \text{formula (1); and}$$

the calculation module is further configured to determine a motion vector predictor (v_{x1}, v_{y1}) of the upper-right vertex of the to-be-encoded unit by using the following formula (2) and based on the motion vector (v_{x2}, v_{y2}) of the upper-left vertex of the n^{th} encoded unit determined by the determining module, the motion vector (v_{x3}, v_{y3}) of the upper-right vertex of the n^{th} encoded unit, the sample coordinates (x_2, y_2) of the upper-left vertex of the n^{th} encoded unit, the sample coordinates (x_3, y_3) of the upper-right vertex of the n^{th} encoded unit, the motion vector predictor (v_{x0}, v_{y0}) of the upper-left vertex of the to-be-encoded unit, the sample coordinates (x_0, y_0) of the upper-left vertex of the to-be-encoded unit, and sample coordinates (x_1, y_1) of the upper-left vertex of the to-be-encoded unit:

$$\begin{cases} v_{x1} = v_{x0} + \frac{(x_1 - x_0) \times (v_{x3} - v_{x2})}{(x_3 - x_2)} \\ v_{y1} = v_{y0} + \frac{(x_1 - x_0) \times (v_{y3} - v_{y2})}{(x_3 - x_2)} \end{cases} \quad \text{formula (2).}$$

[0033] Optionally, the determining module is specifically configured to: sort the N motion vector groups according to a preset sorting rule, to generate a candidate motion vector queue; if N is greater than or equal to a preset value, determine a preset quantity of motion vector groups in the front of the candidate motion vector queue; determine a matching error between each of the preset quantity of motion vector groups in the front and the to-be-encoded unit; and determine one motion vector group with a smallest matching error as the optimal motion vector group.

[0034] Optionally, the preset sorting rule includes a descending order of the N encoded units.

[0035] Optionally, the determining module is further configured to: sort the N motion vector groups according to a preset sorting rule; if N is less than a preset value, generate Q

motion vector groups, where a sum of N and Q is greater than or equal to the preset value, and Q is a positive integer; add the Q motion vector groups to the end of the N motion vector groups, to generate a candidate motion vector queue; determine a preset quantity of motion vector groups in the front of the candidate motion vector queue; determine a matching error between each of the preset quantity of motion vector groups in the front and the to-be-encoded unit; and determine one motion vector group with a smallest matching error as the optimal motion vector group.

[0036] Optionally, the determining module is further configured to: determine, from the adjacent encoded units, an encoded unit corresponding to an m^{th} control point in the to-be-encoded unit, where a distance between the encoded unit corresponding to the m^{th} control point and the m^{th} control point is less than or equal to a preset distance, and m comprises any positive integer not greater than M; determine a motion vector of the encoded unit corresponding to the m^{th} control point as a motion vector predictor of the m^{th} control point; and generate the Q motion vector groups based on the motion vector predictors of the M control points.

[0037] Optionally, the determining module is further configured to: determine, from the adjacent encoded units, an encoded unit corresponding to an m^{th} control point in the to-be-encoded unit, where a distance between the encoded unit corresponding to the m^{th} control point and the m^{th} control point is less than or equal to a preset distance, and m comprises any positive integer not greater than M; determine a motion vector of the encoded unit corresponding to the m^{th} control point as a first motion vector predictor of the m^{th} control point; generate K first motion vector groups based on first motion vector predictors of the M control points; determine a motion vector of a j^{th} encoded unit in the adjacent encoded units as a second motion vector predictor of the m^{th} control point, where j is any one of 1, ..., or J, J is a quantity of the adjacent encoded units, and J is a positive integer; generate L second motion vector groups based on second motion vector predictors of the M control points; and add the K first motion vector groups to the end of the L second motion vector groups, to generate the Q motion vector groups.

[0038] Optionally, the determining module is further configured to: determine an eigenvalue corresponding to a q^{th} motion vector group, where q comprises any positive integer not greater than Q; sort the Q motion vector groups in ascending order based on eigenvalues corresponding to the Q motion vector groups; and add the sorted Q motion vector groups to the

end of the sorted N motion vector groups, to generate the candidate motion vector queue.

[0039] Optionally, the determining module is further configured to: determine a difference between components, in one prediction direction, of motion vector predictors, in the q^{th} motion vector group, of adjacent control points in the M control points; compare an absolute value of the difference with a preset component threshold, where the preset component threshold is a range of the to-be-encoded unit in the prediction direction; and if the absolute value of the difference is less than or equal to the preset component threshold, determine the eigenvalue corresponding to the q^{th} motion vector group.

[0040] Optionally, the determining module is further configured to: determine, from the adjacent encoded units, an encoded unit corresponding to another control point, where a distance between the encoded unit corresponding to the another control point and the another control point is less than or equal to the preset distance, and the another control point is any control point other than the M control points in the to-be-encoded unit; determine a motion vector of the encoded unit corresponding to the another control point as a motion vector predictor of the another control point; and determine the eigenvalue corresponding to the q^{th} motion vector group by using a third preset algorithm and based on the motion vector predictor of the another control point and motion vector predictors, in the q^{th} motion vector group, of the M control points.

[0041] Optionally, the motion prediction mode of the to-be-encoded unit includes a translation motion prediction mode or an affine motion prediction mode.

[0042] An embodiment of the present invention further provides an image decoding apparatus, including:

a determining module, configured to determine N decoded units from adjacent decoded units of a to-be-decoded unit according to a first preset rule, where a motion prediction mode of the N decoded units is the same as that of the to-be-decoded unit, and N is a positive integer;

a calculation module, configured to generate an n^{th} motion vector group by using a first preset algorithm and based on a motion vector of an n^{th} decoded unit determined by the determining module, where n comprises any positive integer not greater than N; and

a decoding module, configured to decode a bitstream corresponding to the to-be-

decoded unit, to obtain a prediction residual of each sample unit and an index identifier of an optimal motion vector group, where

the determining module is further configured to determine the optimal motion vector group in N motion vector groups based on the index identifier of the optimal motion vector group that is determined by the decoding module; and

the calculation module is further configured to: determine a prediction sample value of each sample unit in the to-be-decoded unit by using a second preset algorithm and based on the optimal motion vector group determined by the determining module, and determine a reconstruction sample value of each sample unit based on a sum of the prediction sample value of each sample unit and the prediction residual of each sample unit.

[0043] Optionally, the calculation module is specifically configured to: determine motion vector predictors of M control points of the to-be-decoded unit by using the first preset algorithm and based on the motion vector of the n^{th} decoded unit determined by the determining module, sample coordinates of the n^{th} decoded unit, and sample coordinates of the M control points; and generate the n^{th} motion vector group based on the motion vector predictors of the M control points, where M is a positive integer determined based on the motion prediction mode of the to-be-decoded unit.

[0044] Optionally, the M control points include an upper-left vertex and an upper-right vertex of the to-be-decoded unit;

the calculation module is specifically configured to determine a motion vector predictor (v_{x0}, v_{y0}) of the upper-left vertex of the to-be-decoded unit by using the following formula (1) and based on a motion vector (v_{x2}, v_{y2}) of an upper-left vertex of the n^{th} decoded unit determined by the determining module, a motion vector (v_{x3}, v_{y3}) of an upper-right vertex of the n^{th} decoded unit, a motion vector (v_{x4}, v_{y4}) of a lower-left vertex of the n^{th} decoded unit, sample coordinates (x_2, y_2) of the upper-left vertex of the n^{th} decoded unit, sample coordinates (x_3, y_3) of the upper-right vertex of the n^{th} decoded unit, sample coordinates (x_4, y_4) of the lower-left vertex of the n^{th} decoded unit, and sample coordinates (x_0, y_0) of

the upper-left vertex of the to-be-decoded unit:

$$\begin{cases} v_{x0} = v_{x3} + \frac{(y_3 - y_0) \times (v_{x4} - v_{x2})}{(y_4 - y_2)} \\ v_{y0} = v_{y3} + \frac{(y_3 - y_0) \times (v_{y4} - v_{y2})}{(y_4 - y_2)} \end{cases} \quad \text{formula (1); and}$$

specifically, the calculation module is further configured to determine a motion vector predictor (v_{x1}, v_{y1}) of the upper-right vertex of the to-be-decoded unit by using the following formula (2) and based on the motion vector (v_{x2}, v_{y2}) of the upper-left vertex of the n^{th} decoded unit determined by the determining module, the motion vector (v_{x3}, v_{y3}) of the upper-right vertex of the n^{th} decoded unit, the sample coordinates (x_2, y_2) of the upper-left vertex of the n^{th} decoded unit, the sample coordinates (x_3, y_3) of the upper-right vertex of the n^{th} decoded unit, the motion vector predictor (v_{x0}, v_{y0}) of the upper-left vertex of the to-be-decoded unit, the sample coordinates (x_0, y_0) of the upper-left vertex of the to-be-decoded unit, and sample coordinates (x_1, y_1) of the upper-left vertex of the to-be-decoded unit:

$$\begin{cases} v_{x1} = v_{x0} + \frac{(x_1 - x_0) \times (v_{x3} - v_{x2})}{(x_3 - x_2)} \\ v_{y1} = v_{y0} + \frac{(x_1 - x_0) \times (v_{y3} - v_{y2})}{(x_3 - x_2)} \end{cases} \quad \text{formula (2).}$$

[0045] Optionally, the determining module is further configured to: sort the N motion vector groups according to a preset sorting rule, to generate a candidate motion vector queue; if N is greater than or equal to a preset value, determine a preset quantity of motion vector groups in the front of the candidate motion vector queue; and determine the optimal motion vector group in the preset quantity of motion vector groups in the front based on the index identifier of the optimal motion vector group.

[0046] Optionally, the preset sorting rule includes a descending order of the N decoded units.

[0047] Optionally, the determining module is further configured to: sort the N motion vector groups according to a preset sorting rule; if N is less than a preset value, generate Q

motion vector groups, where a sum of N and Q is greater than or equal to the preset value, and Q is a positive integer; add the Q motion vector groups to the end of the N motion vector groups, to generate a candidate motion vector queue; determine a preset quantity of motion vector groups in the front of the candidate motion vector queue; and determine the optimal motion vector group in the preset quantity of motion vector groups in the front based on the index identifier of the optimal motion vector group.

[0048] Optionally, the determining module is further configured to: determine, from the adjacent decoded units, a decoded unit corresponding to an m^{th} control point in the to-be-decoded unit, where a distance between the decoded unit corresponding to the m^{th} control point and the m^{th} control point is less than or equal to a preset distance, and m comprises any positive integer not greater than M; determine a motion vector of the decoded unit corresponding to the m^{th} control point as a motion vector predictor of the m^{th} control point; and generate the Q motion vector groups based on the motion vector predictors of the M control points.

[0049] Optionally, the determining module is further configured to: determine, from the adjacent decoded units, a decoded unit corresponding to an m^{th} control point in the to-be-decoded unit, where a distance between the decoded unit corresponding to the m^{th} control point and the m^{th} control point is less than or equal to a preset distance, and m comprises any positive integer not greater than M; determine a motion vector of the decoded unit corresponding to the m^{th} control point as a first motion vector predictor of the m^{th} control point; generate K first motion vector groups based on first motion vector predictors of the M control points; determine a motion vector of a j^{th} decoded unit in the adjacent decoded units as a second motion vector predictor of the m^{th} control point, where j is any one of 1, ..., or J, J is a quantity of the adjacent decoded units, and J is a positive integer; generate L second motion vector groups based on second motion vector predictors of the M control points; and add the K first motion vector groups to the end of the L second motion vector groups, to generate the Q motion vector groups.

[0050] Optionally, the determining module is further configured to: determine an eigenvalue corresponding to a q^{th} motion vector group, where q comprises any positive integer not greater than Q; sort the Q motion vector groups in ascending order based on eigenvalues corresponding to the Q motion vector groups; and add the sorted Q motion vector groups to the end of the sorted N motion vector groups, to generate the candidate motion vector queue.

[0051] Optionally, the determining module is further configured to: determine a difference between components, in one prediction direction, of motion vector predictors, in the q^{th} motion vector group, of adjacent control points in the M control points; compare an absolute value of the difference with a preset component threshold, where the preset component threshold is a range of the to-be-decoded unit in the prediction direction; and if the absolute value of the difference is less than or equal to the preset component threshold, determine the eigenvalue corresponding to the q^{th} motion vector group.

[0052] Optionally, the determining module is further configured to: determine, from the adjacent decoded units, a decoded unit corresponding to another control point, where a distance between the decoded unit corresponding to the another control point and the another control point is less than or equal to the preset distance, and the another control point is any control point other than the M control points in the to-be-decoded unit; determine a motion vector of the decoded unit corresponding to the another control point as a motion vector predictor of the another control point; and determine the eigenvalue corresponding to the q^{th} motion vector group by using a third preset algorithm and based on the motion vector predictor of the another control point and motion vector predictors, in the q^{th} motion vector group, of the M control points.

[0053] Optionally, the motion prediction mode of the to-be-decoded unit includes a translation motion prediction mode or an affine motion prediction mode.

[0054] An embodiment of the present invention further provides an image encoding apparatus, including a processor, a memory, a communications interface, and a bus, where the processor is connected to the memory and the communications interface by using the bus;

the memory is configured to store an instruction; and

the processor is configured to execute the instruction, and when the processor executes the instruction stored in the memory, the processor performs any one of the foregoing image encoding methods.

[0055] An embodiment of the present invention further provides an image decoding apparatus, including a processor, a memory, a communications interface, and a bus, where the processor is connected to the memory and the communications interface by using the bus;

the memory is configured to store an instruction; and

the processor is configured to execute the instruction, and when the processor executes the instruction stored in the memory, the processor performs any one of the foregoing image decoding methods.

[0056] According to the image encoding method and apparatus and the image decoding method and apparatus in the embodiments of the present invention, the N encoded units may be determined from the adjacent encoded units of the to-be-encoded unit according to the first preset rule, where the motion prediction mode of the N encoded units is the same as that of the to-be-encoded unit, and N is a positive integer; the n^{th} motion vector group is generated by using the first preset algorithm and based on the motion vector of the n^{th} encoded unit, where n comprises any positive integer not greater than N; one motion vector group is determined, as the optimal motion vector group, from the obtained N motion vector groups according to the second preset rule; the prediction sample value of each sample unit in the to-be-encoded unit is determined by using the second preset algorithm and based on the optimal motion vector group; the prediction residual of each sample unit is determined based on the difference between the original sample value of each sample unit and the prediction sample value of each sample unit; and the prediction residual of each sample unit and the index identifier of the optimal motion vector group are encoded to obtain the bitstream corresponding to the to-be-encoded unit, where the index identifier of the optimal motion vector group is used to instruct the decoding apparatus to determine the prediction sample value of each sample unit. Because the motion prediction mode of the N encoded units is the same as that of the to-be-encoded unit, a motion correlation between the N encoded units and the to-be-encoded unit is relatively high. In addition, the optimal motion vector group is determined from the N motion vector groups that are determined based on motion vectors of the N encoded units. Therefore, the prediction sample value, determined based on the optimal motion vector group, of each sample unit in the to-be-encoded unit is more accurate, and encoding accuracy is higher.

BRIEF DESCRIPTION OF DRAWINGS

[0057] To describe technical solutions in embodiments of the present invention or in the prior art more clearly, the following briefly describes the accompanying drawings required for

describing the embodiments or the prior art. Apparently, the accompanying drawings in the following description show some embodiments of the present invention, and persons of ordinary skill in the art may still derive other drawings from these accompanying drawings without creative efforts.

5 **[0058]** FIG. 1 is a flowchart of an image encoding method according to Embodiment 1 of the present invention;

[0059] FIG. 2 is a schematic structural diagram of a to-be-encoded unit and adjacent encoded units in the image encoding method according to Embodiment 1 of the present invention;

10 **[0060]** FIG. 3 is a flowchart of an image encoding method according to Embodiment 2 of the present invention;

[0061] FIG. 4 is a flowchart of an image decoding method according to Embodiment 3 of the present invention;

[0062] FIG. 5 is a schematic structural diagram of an image encoding apparatus according to Embodiment 4 of the present invention;

[0063] FIG. 6 is a schematic structural diagram of an image decoding apparatus according to Embodiment 5 of the present invention;

[0064] FIG. 7 is a schematic structural diagram of an image encoding apparatus according to Embodiment 6 of the present invention; and

20 **[0065]** FIG. 8 is a schematic structural diagram of an image decoding apparatus according to Embodiment 7 of the present invention.

DESCRIPTION OF EMBODIMENTS

[0066] To make the objectives, technical solutions, and advantages of the embodiments of the present invention clearer, the following clearly and completely describes the technical solutions in the embodiments of the present invention with reference to the accompanying drawings in the embodiments of the present invention. Apparently, the described embodiments are some but not all of the embodiments of the present invention. All other embodiments obtained by persons of ordinary skill in the art based on the embodiments of the present

25

invention without creative efforts shall fall within the protection scope of the present invention.

[0067] An image encoding method and apparatus and an image decoding method and apparatus provided in the present invention may be applied to scenarios such as satellite and terrestrial television broadcasting systems, video conferencing, security surveillance, medical demonstration, classroom recording and broadcasting, and court hearing systems. Motion prediction is performed on a to-be-processed unit of a video image by using an inter-frame prediction mode, and the video image is encoded or decoded based on a result of the motion prediction. According to the image encoding method and apparatus, a prediction sample value of each sample unit in a to-be-encoded unit in the video image may be obtained by motion prediction, and a difference between the prediction sample value of each sample unit and an original sample value of each sample unit is encoded to obtain a bitstream corresponding to the to-be-encoded unit, so that storage or transmission of an image corresponding to the to-be-encoded unit is implemented through storage or transmission of the bitstream corresponding to the to-be-encoded unit. Correspondingly, according to the image decoding method and apparatus, a prediction sample value of each sample unit in a to-be-decoded unit in the video image may be obtained by motion prediction, a bitstream corresponding to the to-be-decoded unit is decoded to obtain a difference between a prediction sample value of each sample unit of the to-be-decoded unit and an original sample value of each sample unit, and further, a reconstruction sample value of each sample unit is obtained based on the difference and the prediction sample value, so that an image corresponding to the to-be-decoded unit may be obtained based on the reconstruction sample value of each sample unit. For example, the bitstream corresponding to the to-be-decoded unit may be transmitted by an image encoding apparatus and received by the image decoding apparatus, or may be obtained by the image decoding apparatus from a storage device, where the bitstream in the storage device may be stored in the storage device by the image decoding apparatus.

[0068] Embodiment 1 of the present invention provides an image encoding method. The image encoding method may be performed by an image encoding apparatus. For example, the image encoding apparatus may be integrated, in a form of software and/or hardware, in an electronic device with an image processing function. For example, the electronic device may be an intelligent terminal, a personal computer, a consumer electronic product, or a video server.

FIG. 1 is a flowchart of an image encoding method according to Embodiment 1 of the present invention. As shown in FIG. 1, the method may include the following steps.

[0069] S101: Determine N encoded units from adjacent encoded units of a to-be-encoded unit according to a first preset rule, where a motion prediction mode of the N encoded units is the same as that of the to-be-encoded unit.

[0070] Specifically, the to-be-encoded unit may be a coding unit (CU for short) in a High Efficiency Video Coding (HEVC for short) standard and a subsequent coding standard. In the HEVC standard, a maximum coding unit may be a coding tree unit (CTU for short), and each CTU may be divided per level to obtain smaller CUs. A size of the CU may include four levels, such as four levels of 64x64, 32x32, 16x16, and 8x8. A CU at the 64x64 level includes 64x64 samples, a CU at the 32x32 level includes 32x32 samples, a CU at the 16x16 level includes 16x16 samples, and a CU at the 8x8 level includes 8x8 samples. The to-be-encoded unit may be a coding unit corresponding to any one of the four levels of 64x64, 32x32, 16x16, and 8x8.

[0071] Different coding units in a frame of image of a video image are independent from each other. The different coding units may be the same or may be different. To be specific, in each frame of image, the image encoding apparatus may perform encoding per each coding unit, and motion prediction modes used for encoding the different coding units may be the same or may be different. The image encoding apparatus may perform motion prediction on each sample unit in a coding unit by using a motion prediction mode of the coding unit, to determine a prediction sample value of each sample unit and further implement encoding. The motion prediction mode may be used to determine a motion vector of a control point in the coding unit, and further determine the prediction sample value of each sample unit in the coding unit. For example, the sample unit may include a sample or a sample block, where the sample block may include a plurality of samples.

[0072] The adjacent encoded units of the to-be-encoded unit may be encoded units in locations adjacent to boundaries of the to-be-encoded unit.

[0073] The determining N encoded units from adjacent encoded units of a to-be-encoded unit according to a first preset rule in S101 may include: traversing the adjacent encoded units of the to-be-encoded unit in a preset traversal sequence, to determine the N encoded units, in the adjacent encoded units, whose motion prediction mode is the same as that of the to-be-

encoded unit. The traversing the adjacent encoded units may be: determining whether a motion prediction mode of the adjacent encoded units is the same as that of the to-be-encoded unit. A motion prediction mode of an encoded unit is certain, and therefore the motion prediction mode of the adjacent encoded units may be a motion prediction mode used when encoding is performed on the adjacent encoded units. The motion prediction mode of the to-be-encoded unit is a motion prediction mode that can be used for prediction.

[0074] After the determining N encoded units from adjacent encoded units of a to-be-encoded unit according to a first preset rule in S101, the method may further include:

determining indication information corresponding to the motion prediction mode.

10 [0075] If the motion prediction mode includes an affine motion prediction mode, indication information corresponding to the affine motion prediction mode may be determined, for example, a syntactic element affine-merge-flag, and the affine-merge-flag is set to 1.

[0076] If the motion prediction mode includes the affine motion prediction mode but none of the adjacent encoded units has a same motion prediction mode as that of the to-be-encoded unit, the affine-merge-flag may be set to 0.

15 [0077] For example, if the motion prediction mode of the to-be-encoded unit may be the affine motion prediction mode, the image encoding apparatus may traverse the adjacent encoded units of the to-be-encoded unit in the preset traversal sequence, and determine N encoded units, in the adjacent encoded units, whose motion prediction mode is the affine motion prediction mode. The affine motion prediction mode may also be referred to as an affine transformation motion prediction mode. The preset traversal sequence may be a traversal sequence of all adjacent encoded units of the to-be-encoded unit. For example, each of the N encoded units may be a 4x4 unit.

20 [0078] FIG. 2 is a schematic structural diagram of a to-be-encoded unit and adjacent encoded units in the image encoding method according to Embodiment 1 of the present invention. As shown in FIG. 2, for example, the adjacent encoded units of the to-be-encoded unit may include an encoded unit A, an encoded unit B, an encoded unit C, an encoded unit D, and an encoded unit E. If the motion prediction mode of the to-be-encoded unit is the affine motion prediction mode, there may be a plurality of control points, for example, two control points, in the to-be-encoded unit. For example, the two control points may be an upper-left

30

vertex of the to-be-encoded unit and an upper-right vertex of the to-be-encoded unit. The upper-left vertex of the to-be-encoded unit may be represented as a sample unit 0, and the upper-right vertex of the to-be-encoded unit may be represented as a sample unit 1.

[0079] The image encoding apparatus may sequentially traverse the encoded unit A and the encoded unit B in a first prediction direction, and find a first encoded unit in the first prediction direction whose motion prediction mode is the affine motion prediction mode, for example, the encoded unit B; and sequentially traverse the encoded unit C, the encoded unit D, and the encoded unit E in a second prediction direction, and find a first encoded unit whose motion prediction mode is the affine motion prediction mode, for example, the encoded unit D.

10 [0080] Alternatively, the image encoding apparatus may sequentially traverse the encoded unit A, the encoded unit B, the encoded unit C, the encoded unit D, and the encoded unit E, and find a first encoded unit whose motion prediction mode is the affine motion prediction mode, for example, the encoded unit B.

[0081] S102: Generate an n^{th} motion vector group by using a first preset algorithm and based on a motion vector of an n^{th} encoded unit, where n comprises any positive integer not greater than N .

[0082] Optionally, the generating an n^{th} motion vector group by using a first preset algorithm and based on a motion vector of an n^{th} encoded unit in S102 may include:

20 determining motion vector predictors of M control points of the to-be-encoded unit by using the first preset algorithm and based on the motion vector of the n^{th} encoded unit, sample coordinates of the n^{th} encoded unit, and sample coordinates of the M control points, where M is a positive integer determined based on the motion prediction mode of the to-be-encoded unit; and

25 generating the n^{th} motion vector group based on the motion vector predictors of the M control points.

[0083] Specifically, the M control points may include a sample unit in a vertex location of the to-be-encoded unit. If the motion prediction mode of the to-be-encoded unit is the affine motion prediction mode, M may be greater than 1, and the M control points may include M vertexes of the to-be-encoded unit.

30 [0084] For example, if the motion prediction mode of the to-be-encoded unit is the affine

motion prediction mode, M may be 2, and the M control points may include the upper-left vertex of the to-be-encoded unit and the upper-right vertex of the to-be-encoded unit. The upper-left vertex of the to-be-encoded unit may be a sample unit 0 in FIG. 2, and the upper-right vertex of the to-be-encoded unit may be a sample unit 1 in FIG. 2. For example, the n^{th} encoded unit in the N encoded units that is determined in S101 may be the encoded unit B in FIG. 2. The following provides descriptions by using the encoded unit B as an example. At least two sample units in the encoded unit B in FIG. 2 may be three sample units: an upper-left vertex of the encoded unit B, an upper-right vertex of the encoded unit B, and a lower-left vertex of the encoded unit B. The upper-left vertex of the encoded unit B may be a sample unit 2, the upper-right vertex of the encoded unit B may be represented as a sample unit 3, and the lower-left vertex of the encoded unit B may be represented as a sample unit 4.

[0085] The determining motion vector predictors of M control points of the to-be-encoded unit by using the first preset algorithm and based on the motion vector of the n^{th} encoded unit, sample coordinates of the n^{th} encoded unit, and sample coordinates of the M control points may include:

determining a motion vector predictor (v_{x0}, v_{y0}) of the upper-left vertex of the to-be-encoded unit by using the following formula (1) and based on a motion vector (v_{x2}, v_{y2}) of an upper-left vertex of the n^{th} encoded unit, a motion vector (v_{x3}, v_{y3}) of an upper-right vertex of the n^{th} encoded unit, a motion vector (v_{x4}, v_{y4}) of a lower-left vertex of the n^{th} encoded unit, sample coordinates (x_2, y_2) of the upper-left vertex of the n^{th} encoded unit, sample coordinates (x_3, y_3) of the upper-right vertex of the n^{th} encoded unit, sample coordinates (x_4, y_4) of the lower-left vertex of the n^{th} encoded unit, and sample coordinates (x_0, y_0) of the upper-left vertex of the to-be-encoded unit:

$$\begin{cases} v_{x0} = v_{x3} + \frac{(y_3 - y_0) \times (v_{x4} - v_{x2})}{(y_4 - y_2)} \\ v_{y0} = v_{y3} + \frac{(y_3 - y_0) \times (v_{y4} - v_{y2})}{(y_4 - y_2)} \end{cases} \quad \text{formula (1); and}$$

determining a motion vector predictor (v_{x1}, v_{y1}) of the upper-right vertex of the to-

be-encoded unit by using the following formula (2) and based on the motion vector (v_{x2}, v_{y2}) of the upper-left vertex of the n^{th} encoded unit, the motion vector (v_{x3}, v_{y3}) of the upper-right vertex of the n^{th} encoded unit, the sample coordinates (x_2, y_2) of the upper-left vertex of the n^{th} encoded unit, the sample coordinates (x_3, y_3) of the upper-right vertex of the n^{th} encoded unit, the motion vector predictor (v_{x0}, v_{y0}) of the upper-left vertex of the to-be-encoded unit, the sample coordinates (x_0, y_0) of the upper-left vertex of the to-be-encoded unit, and sample coordinates (x_1, y_1) of the upper-left vertex of the to-be-encoded unit:

$$\begin{cases} v_{x1} = v_{x0} + \frac{(x_1 - x_0) \times (v_{x3} - v_{x2})}{(x_3 - x_2)} \\ v_{y1} = v_{y0} + \frac{(x_1 - x_0) \times (v_{y3} - v_{y2})}{(x_3 - x_2)} \end{cases} \quad \text{formula (2).}$$

[0086] S103: Determine, from obtained N motion vector groups according to a second preset rule, one motion vector group as an optimal motion vector group.

[0087] Optionally, the determining, from obtained N motion vector groups according to a second preset rule, one motion vector group as an optimal motion vector group in S103 may include:

sorting the N motion vector groups according to a preset sorting rule, to generate a candidate motion vector queue;

if N is greater than or equal to a preset value, determining a preset quantity of motion vector groups in the front of the candidate motion vector queue;

determining a matching error between each of the preset quantity of motion vector groups in the front and the to-be-encoded unit; and

determining one motion vector group with a smallest matching error as the optimal motion vector group.

[0088] Specifically, the preset sorting rule may include a descending order of the N encoded units.

[0089] For example, a size of each of the N encoded units may be a product of a horizontal width and a vertical height of each encoded unit. For example, the size of each of the N encoded

units may be determined based on the following formula (3):

$$S_i = W_i \times H_i \quad \text{formula (3)}$$

where S_i is the size of each encoded unit, W_i is the horizontal width of each encoded unit, H_i is the vertical height of each encoded unit, and i is an identifier of each encoded unit.

[0090] For example, if N is 2, the N encoded units may be the encoded unit B and the encoded unit D shown in FIG. 2.

[0091] A size of the encoded unit B may be S_B . S_B is a product of W_B and H_B . W_B is a horizontal width of the encoded unit B. H_B is a vertical height of the encoded unit B. A size of the encoded unit D may be S_D . S_D is a product of W_D and H_D . W_D is a horizontal width of the encoded unit D. H_D is a vertical height of the encoded unit D. For example, if the encoded unit B is larger than the encoded unit D, the traversal sequence may be represented as B > D.

[0092] For example, an index identifier corresponding to a motion vector group, in the candidate motion vector queue, generated based on the encoded unit B may be 1. For example, an index identifier corresponding to a motion vector group, in the candidate motion vector queue, generated based on the encoded unit D may be 2.

[0093] For example, if N is 10, in other words, the candidate motion vector queue includes 10 motion vector groups, the preset quantity of motion vector groups in the front of the candidate motion vector queue may be first five motion vector groups in the 10 motion vector groups.

[0094] Optionally, selecting the optimal motion vector group from the preset quantity of motion vector groups in the front of the candidate motion vector queue may be: determining a matching error between each of the preset quantity of motion vector groups in the front and the to-be-encoded unit; and determining one motion vector group that has a smallest matching error with the to-be-encoded unit as the optimal motion vector group.

[0095] The determining a matching error between each of the preset quantity of motion

vector groups in the front and the to-be-encoded unit may be: determining, based on the motion vector group, a prediction sample value of a sample unit, in the to-be-encoded unit, corresponding to the motion vector group;

5 determining a rate distortion cost (RD Cost for short) corresponding to the motion vector group based on a sum of squared differences (SSD for short) or a sum of absolute differences (SAD for short) between the prediction sample value of the sample unit corresponding to the motion vector group and an original sample value of the sample unit; and

determining the matching error between the motion vector group and the to-be-encoded unit based on the rate distortion cost corresponding to the motion vector group.

10 [0096] Specifically, the determining, based on the motion vector group, a prediction sample value of a sample unit, in the to-be-encoded unit, corresponding to the motion vector group in the foregoing step may include: determining a motion vector predictor of the sample unit based on the motion vector group, and further determining the rate distortion cost corresponding to the motion vector group based on the motion vector predictor of the sample unit.

15 [0097] For example, using the SAD as an example, the image encoding apparatus may determine the rate distortion cost corresponding to the motion vector group by using the following formula (4) and based on a bit rate corresponding to the to-be-encoded unit and an SAD between the prediction sample value of the sample unit corresponding to the motion vector group and the original sample value of the sample unit:

20
$$J = SAD + \lambda R \quad \text{formula (4)}$$

where J is the rate distortion cost corresponding to the motion vector group, SAD is the SAD between the prediction sample value of the sample unit corresponding to the motion vector group and the original sample value of the sample unit, R is the bit rate corresponding to the to-be-encoded unit, and λ is a Lagrange multiplier and is a preset
25 constant.

[0098] S104: Determine a prediction sample value of each sample unit in the to-be-encoded unit by using a second preset algorithm and based on the optimal motion vector group.

[0099] Optionally, the determining a prediction sample value of each sample unit in the to-be-encoded unit by using a second preset algorithm and based on the optimal motion vector group in S104 may include:
30

determining a motion vector predictor of each sample unit in the to-be-encoded unit by using the second preset algorithm and based on the motion vector predictors, in the optimal motion vector group, of the M control points and sample coordinates of each sample unit; and

determining, in a preset reference frame, the prediction sample value of each sample unit based on the motion vector predictor of each sample unit.

[0100] For example, if the motion prediction mode of the to-be-encoded unit is the affine motion prediction mode, as shown in FIG. 2, there may be two control points in the to-be-encoded unit: the upper-left vertex of the to-be-encoded unit and the upper-right vertex of the to-be-encoded unit.

[0101] For example, the image encoding apparatus may determine the motion vector predictor of each sample unit in the to-be-encoded unit by using the following formula (5) and based on motion vector predictors, in the optimal motion vector group, of the two control points and the sample coordinates of each sample unit:

$$\begin{cases} v_x = \frac{(v_{x1} - v_{x0})}{w} x - \frac{(v_{y1} - v_{y0})}{w} y + v_{x0} \\ v_y = \frac{(v_{y1} - v_{y0})}{w} x + \frac{(v_{x1} - v_{x0})}{w} y + v_{y0} \end{cases} \quad \text{formula (5)}$$

where (v_x, v_y) is the motion vector predictor of each sample unit, where v_x is a horizontal component of the motion vector predictor of each sample unit, and v_y is a vertical component of the motion vector predictor of each sample unit; (x, y) are the sample coordinates of each sample unit, where x is a horizontal sample coordinate of each sample unit, and y is a vertical sample coordinate of each sample unit; and w is a horizontal width of the to-be-encoded unit.

[0102] S105: Determine a prediction residual of each sample unit based on a difference between an original sample value of each sample unit and the prediction sample value of each sample unit.

[0103] S106: Encode the prediction residual of each sample unit and an index identifier of the optimal motion vector group, to obtain a bitstream corresponding to the to-be-encoded unit, where the index identifier of the optimal motion vector group is used to instruct a decoding

apparatus to determine the prediction sample value of each sample unit.

[0104] Specifically, in S106, encoding may be performed after transformation and quantization are sequentially performed on the prediction residual of each sample unit and the index identifier of the optimal motion vector group, to obtain the bitstream corresponding to the to-be-encoded unit.

[0105] The transformation may be any one of Karhunen-Loève Transform (KLT for short), Discrete Fourier Transform, Discrete Cosine Transform (DCT for short), and the like. The encoding may be entropy encoding.

[0106] Optionally, in S106, the prediction residual of each sample unit, the index identifier of the optimal motion vector group, and an index identifier of the preset reference frame may be encoded to obtain the bitstream corresponding to the to-be-encoded unit.

[0107] Optionally, in S106, the prediction residual of each sample unit, the index identifier of the optimal motion vector group, an index identifier of the preset reference frame, and the indication information corresponding to the motion prediction mode of the to-be-encoded unit may be encoded to obtain the bitstream corresponding to the to-be-encoded unit.

[0108] Because the N encoded units are encoded units, in the adjacent encoded units of the to-be-encoded unit, that have a same motion prediction mode, a motion correlation between the N encoded units and the to-be-encoded unit is relatively high. Because the N motion vector groups are determined based on motion vectors of the N encoded units, the motion vector predictor, determined based on the optimal motion vector group in the N motion vector groups, of each sample unit in the to-be-encoded unit are more accurate, so that encoding precision is higher.

[0109] In addition, the optimal motion vector group may be determined from the preset quantity of motion vector groups in the front of the candidate motion vector queue, and the candidate motion vector queue is generated based on the sorted N motion vector groups. Therefore, the index identifier of the optimal motion vector group in the candidate motion vector queue is relatively small, so that a quantity of bits used to encode the index identifier of the optimal motion vector group is relatively small, and encoding efficiency is improved.

[0110] According to the image encoding method provided in Embodiment 1 of the present invention, the N encoded units may be determined from the adjacent encoded units of the to-

be-encoded unit according to the first preset rule, where the motion prediction mode of the N encoded units is the same as that of the to-be-encoded unit; the n^{th} motion vector group is generated by using the first preset algorithm and based on the motion vector of the n^{th} encoded unit, where n comprises any positive integer not greater than N; one motion vector group is determined, as the optimal motion vector group, from the obtained N motion vector groups according to the second preset rule; the prediction sample value of each sample unit in the to-be-encoded unit is determined by using the second preset algorithm and based on the optimal motion vector group; the prediction residual of each sample unit is determined based on the difference between the original sample value of each sample unit and the prediction sample value of each sample unit; and the prediction residual of each sample unit and the index identifier of the optimal motion vector group are encoded, to obtain the bitstream corresponding to the to-be-encoded unit. Because the motion prediction mode of the N encoded units is the same as that of the to-be-encoded unit, the motion correlation between the N encoded units and the to-be-encoded unit is relatively high. In addition, the optimal motion vector group is determined from the N motion vector groups that are determined based on the motion vectors of the N encoded units. Therefore, the prediction sample value, determined based on the optimal motion vector group, of each sample unit in the to-be-encoded unit is more accurate, so that accuracy of image encoding is higher.

[0111] Embodiment 2 of the present invention further provides an image encoding method. FIG. 3 is a flowchart of an image encoding method according to Embodiment 2 of the present invention. As shown in FIG. 3, according to the method, the determining, from obtained N motion vector groups according to a second preset rule, one motion vector group as an optimal motion vector group in S103 in the foregoing embodiment may include the following steps.

[0112] S301: Sort the N motion vector groups according to a preset sorting rule.

[0113] For example, the preset sorting rule may be an ascending or descending order of the N encoded units.

[0114] S302: If N is less than a preset value, generate Q motion vector groups, where a sum of N and Q is greater than or equal to the preset value, and Q is a positive integer.

[0115] If N is less than the preset value, the Q motion vector groups need to be further generated to ensure a quantity of motion vector groups in the candidate motion vector queue,

so as to ensure accuracy of the selected optimal motion vector group.

[0116] Optionally, the generating Q motion vector groups in S302 may include:

determining, from the adjacent encoded units, an encoded unit corresponding to an m^{th} control point in the to-be-encoded unit, where a distance between the encoded unit
5 corresponding to the m^{th} control point and the m^{th} control point is less than or equal to a preset distance, and m comprises any positive integer not greater than M ;

determining a motion vector of the encoded unit corresponding to the m^{th} control point as a motion vector predictor of the m^{th} control point; and

generating the Q motion vector groups based on the motion vector predictors of the
10 M control points.

[0117] For example, as shown in FIG. 2, if the adjacent encoded units include the encoded unit A, the encoded unit B, the encoded unit C, the encoded unit D, and the encoded unit E, and there are two control points in the to-be-encoded unit, an encoded unit, in the adjacent encoded units, corresponding to the upper-left vertex of the to-be-encoded unit may include the encoded
15 unit C, and an encoded unit, in the adjacent encoded units, corresponding to the upper-right vertex of the to-be-encoded unit may include the encoded unit D and the encoded unit E.

[0118] For example, if the encoded unit corresponding to the upper-left vertex of the to-be-encoded unit may include the encoded unit C, a motion vector predictor of the upper-left vertex may be v_0^C . v_0^C may be a motion vector predictor, of the upper-left vertex, determined based
20 on a motion vector of the encoded unit C.

[0119] For example, if the encoded unit corresponding to the upper-right vertex of the to-be-encoded unit may include the encoded unit D and the encoded unit E, a motion vector predictor of the upper-right vertex may be v_1^D , and another motion vector predictor of the upper-right vertex may be v_1^E . v_1^D may be a motion vector predictor, of the upper-right
25 vertex, determined based on a motion vector of the encoded unit D. v_1^E may be a motion vector predictor, of the upper-right vertex, determined based on a motion vector of the encoded unit E.

[0120] The Q motion vector groups may include two motion vector groups: (v_0^C, v_1^D) and

(v_0^C, v_1^E) . For example, Q may be 2.

[0121] Alternatively, the generating Q motion vector groups in S302 may include:

determining, from the adjacent encoded units, an encoded unit corresponding to an m^{th} control point in the to-be-encoded unit, where a distance between the encoded unit
5 corresponding to the m^{th} control point and the m^{th} control point is less than or equal to a preset distance, and m comprises any positive integer not greater than M;

determining a motion vector of the encoded unit corresponding to the m^{th} control point as a first motion vector predictor of the m^{th} control point;

generating K first motion vector groups based on first motion vector predictors of
10 the M control points;

determining a motion vector of a j^{th} encoded unit in the adjacent encoded units as a second motion vector predictor of the m^{th} control point, where j is any one of 1, ..., or J, J is a quantity of the adjacent encoded units, and J is a positive integer;

generating L second motion vector groups based on second motion vector predictors
15 of the M control points; and

adding the K first motion vector groups to the end of the L second motion vector groups, to generate the Q motion vector groups.

[0122] Specifically, the Q motion vector groups may be generated in a plurality of times. For example, the K first motion vector groups are generated, and then the L second motion
20 vector groups are generated.

[0123] S303: Add the Q motion vector groups to the end of the N motion vector groups, to generate a candidate motion vector queue.

[0124] S304: Determine a preset quantity of motion vector groups in the front of the candidate motion vector queue.

25 [0125] An implementation process of determining a preset quantity of motion vector groups in the front of the candidate motion vector queue in S304 is similar to that in Embodiment 1. Details are not described herein again.

[0126] S305: Determine a matching error between each of the preset quantity of motion vector groups in the front and the to-be-encoded unit.

[0127] A specific implementation process of determining a matching error between each motion vector group and the to-be-encoded unit in S305 is similar to that in Embodiment 1. Details are not described herein again.

[0128] S306: Determine one motion vector group with a smallest matching error as the
5 optimal motion vector group.

[0129] Optionally, the adding the Q motion vector groups to the end of the N motion vector groups, to generate a candidate motion vector queue in S303 may include:

determining an eigenvalue corresponding to a q^{th} motion vector group, where q comprises any positive integer not greater than Q;

10 sorting the Q motion vector groups in ascending order based on eigenvalues corresponding to the Q motion vector groups; and

adding the sorted Q motion vector groups to the end of the sorted N motion vector groups, to generate the candidate motion vector queue.

[0130] Optionally, the determining an eigenvalue corresponding to a q^{th} motion vector
15 group may include:

determining a difference between components, in one prediction direction, of motion vector predictors, in the q^{th} motion vector group, of adjacent control points in the M control points;

20 comparing an absolute value of the difference with a preset component threshold, where the preset component threshold is a range of the to-be-encoded unit in the prediction direction; and

if the absolute value of the difference is less than or equal to the preset component threshold, determining the eigenvalue corresponding to the q^{th} motion vector group.

[0131] Specifically, the preset component threshold may be determined based on a
25 horizontal width of the to-be-encoded unit in a horizontal prediction direction, or the preset component threshold may be determined based on a vertical height of the to-be-encoded unit in a vertical prediction direction.

[0132] For example, if the M control points of the to-be-encoded unit include in the upper-left vertex of the to-be-encoded unit and the upper-right vertex, as shown in FIG. 2, the Q

motion vector groups may include two motion vector groups: (v_0^C, v_1^D) and (v_0^C, v_1^E) , where v_0^C is a motion vector predictor of the upper-left vertex of the to-be-encoded unit, and both v_1^D and v_1^E are motion vector predictors of the upper-right vertex of the to-be-encoded unit.

[0133] For example, in this embodiment, the difference between the components, in one prediction direction, of the motion vector predictors of the adjacent control points in the M control points may be compared with the preset component threshold based on the following formula (6):

$$\begin{cases} |v_{x0}^i - v_{x1}^j| \leq \frac{w}{2} \\ |v_{y0}^i - v_{y1}^j| \leq \frac{h}{2} \end{cases} \quad \text{formula (6)}$$

where v_{x0}^i is a component, in the horizontal prediction direction, of the motion vector predictor of the upper-left vertex; v_{y0}^i is a component, in the vertical prediction direction, of the motion vector predictor of the upper-left vertex; v_{x1}^j is a component, in the horizontal prediction direction, of the motion vector predictor of the upper-right vertex; v_{y1}^j is a component, in the vertical prediction direction, of the motion vector predictor of the upper-right vertex; i may be C , and j may be any one of D and E ; w is the horizontal width of the to-be-encoded unit; and h is the vertical height of the to-be-encoded unit.

[0134] If i is C , j is any one of D and E , an absolute value of a difference between v_{x0}^i and v_{x1}^j is less than or equal to $\frac{w}{2}$, and an absolute value of a difference between v_{y0}^i and v_{y1}^j is less than or equal to $\frac{h}{2}$, the motion vector groups (v_0^C, v_1^D) and (v_0^C, v_1^E) are sorted.

[0135] Optionally, the determining an eigenvalue corresponding to a q^{th} motion vector group may include:

determining, from the adjacent encoded units, an encoded unit corresponding to another control point, where a distance between the encoded unit corresponding to the another control point and the another control point is less than or equal to the preset distance, and the

another control point is any control point other than the M control points in the to-be-encoded unit;

determining a motion vector of the encoded unit corresponding to the another control point as a motion vector predictor of the another control point; and

5 determining the eigenvalue corresponding to the q^{th} motion vector group by using a third preset algorithm and based on the motion vector predictor of the another control point and motion vector predictors, in the q^{th} motion vector group, of the M control points.

[0136] For example, if the M control points in the to-be-encoded unit may include the upper-left vertex and the upper-right vertex of the to-be-encoded unit, the another control point
10 may be the lower-left vertex of the to-be-encoded unit, for example, a sample unit 5 of the to-be-encoded unit in FIG. 2.

[0137] The encoded unit corresponding to the another control point may include the encoded unit A and the encoded unit B. Therefore, a motion vector of the encoded unit A may be determined as a motion vector predictor v_5^A of the another control point, and a motion
15 vector of the encoded unit B may be determined as a motion vector predictor v_5^B of the another control point.

[0138] For example, in this embodiment, the eigenvalue corresponding to the q^{th} motion vector group may be determined by using the following formula (7) and based on the motion vector predictor of the another control point and motion vector predictors, in the q^{th} motion
20 vector group, of the M control points:

$$D(v) = \text{abs} \left((v_{x1}^j - v_{x0}^i) \times h - (v_{y5}^k - v_{y0}^i) \times w \right) + \text{abs} \left((v_{y1}^j - v_{y0}^i) \times h + (v_{x5}^k - v_{x0}^i) \times w \right)$$

formula (7)

where $D(V)$ is the eigenvalue corresponding to the q^{th} motion vector group; abs is an absolute value function; v_{x5}^k is a component, in the horizontal prediction direction, of
25 the motion vector predictor of the another control point such as the lower-left vertex; v_{y5}^k is a component, in the vertical prediction direction, of the motion vector predictor of the another control point such as the lower-left vertex; and k may be any one of A and B .

[0139] Optionally, the motion prediction mode of the to-be-encoded unit may include a

translation motion prediction mode or the affine motion prediction mode.

[0140] If the motion prediction mode of the to-be-encoded unit includes the translation motion prediction mode, the quantity of the control points, namely, M, may be 1. If the motion prediction mode of the to-be-encoded unit includes the affine motion prediction mode, the
5 quantity of the control points, namely, M, may be greater than 1.

[0141] Embodiment 2 of the present invention provides a plurality of implementation processes of determining the candidate motion vector queue. Therefore, it can be better ensured that the prediction sample value, determined based on the optimal motion vector group selected from the candidate motion vector queue, of each sample unit in the to-be-encoded unit is more
10 accurate, so that the encoding precision is higher, the quantity of bits used to encode the index identifier of the optimal motion vector group is relatively small, and the encoding efficiency is improved.

[0142] Embodiment 3 of the present invention provides an image decoding method. The image decoding method is a decoding method corresponding to the foregoing image encoding method. The image decoding method may be performed by an image decoding apparatus. For
15 example, the image decoding apparatus may be integrated, in a form of software and/or hardware, in an electronic device with an image processing function. For example, the electronic device may be an intelligent terminal, a personal computer, a consumer electronic product, or a video server. FIG. 4 is a flowchart of an image decoding method according to Embodiment 3 of the present invention. As shown in FIG. 4, the method may include the
20 following steps.

[0143] S401: Determine N decoded units from adjacent decoded units of a to-be-decoded unit according to a first preset rule, where a motion prediction mode of the N decoded units is the same as that of the to-be-decoded unit.

25 [0144] A specific implementation process of S401 is similar to that of S101 in the foregoing embodiment. Details are not described herein again.

[0145] Before the determining N decoded units from adjacent decoded units of a to-be-decoded unit according to first preset rule in S401, the method may further include:

determining the motion prediction mode of the to-be-decoded unit.

30 [0146] Specifically, the determining the motion prediction mode of the to-be-decoded unit

may include: parsing a syntactic element corresponding to the to-be-decoded unit, to obtain the motion prediction mode of the to-be-decoded unit. If a syntactic element affine-merge-flag obtained after the parsing is 1, the motion prediction mode of the to-be-decoded unit is an affine motion prediction mode. If a syntactic element affine-merge-flag obtained after the parsing is

5 0, the motion prediction mode of the to-be-decoded unit is a translation motion prediction mode.

[0147] S402: Generate an n^{th} motion vector group by using a first preset algorithm and based on a motion vector of an n^{th} decoded unit, where n comprises any positive integer not greater than N .

[0148] A specific implementation process of S402 is similar to that of S102 in the foregoing

10 embodiment. Details are not described herein again.

[0149] S403: Decode a bitstream corresponding to the to-be-decoded unit, to obtain a prediction residual of each sample unit and an index identifier of an optimal motion vector group.

[0150] Specifically, in S403, the bitstream corresponding to the to-be-decoded unit may be

15 decoded, de-quantization and inverse transformation are sequentially performed on information obtained after the decoding, and further, the prediction residual of each sample unit and the index identifier of the optimal motion vector group are obtained. The inverse transformation may be inverse transformation corresponding to the transformation in S106 in the foregoing embodiment. The de-quantization may be de-quantization corresponding to the quantization in

20 S106 in the foregoing embodiment. The decoding may be decoding corresponding to the encoding in S106, for example, decoding corresponding to the entropy encoding.

[0151] S404: Determine the optimal motion vector group in N motion vector groups based on the index identifier of the optimal motion vector group.

[0152] The index identifier of the optimal motion vector group may be an index number of

25 the optimal motion vector group in the N motion vector groups.

[0153] S405: Determine a prediction sample value of each sample unit in the to-be-decoded unit by using a second preset algorithm and based on the optimal motion vector group.

[0154] A process of determining a prediction sample value of each sample unit in the to-be-decoded unit in S405 may be similar to that of S104 in the foregoing embodiment. Details

30 are not described herein again.

[0155] S406: Determine a reconstruction sample value of each sample unit based on a sum of the prediction sample value of each sample unit and the prediction residual of each sample unit.

[0156] Optionally, the generating an n^{th} motion vector group by using a first preset algorithm and based on a motion vector of an n^{th} decoded unit in S402 may include:

determining motion vector predictors of M control points of the to-be-decoded unit by using the first preset algorithm and based on the motion vector of the n^{th} decoded unit, sample coordinates of the n^{th} decoded unit, and sample coordinates of the M control points; and

generating the n^{th} motion vector group based on the motion vector predictors of the M control points, where M is a positive integer determined based on the motion prediction mode of the to-be-decoded unit.

[0157] Optionally, the M control points include an upper-left vertex and an upper-right vertex of the to-be-decoded unit.

[0158] The determining motion vector predictors of M control points of the to-be-decoded unit by using the first preset algorithm and based on the motion vector of the n^{th} decoded unit, sample coordinates of the n^{th} decoded unit, and sample coordinates of the M control points may include:

determining a motion vector predictor (v_{x0}, v_{y0}) of the upper-left vertex of the to-be-decoded unit by using the following formula (1) and based on a motion vector (v_{x2}, v_{y2}) of an upper-left vertex of the n^{th} decoded unit, a motion vector (v_{x3}, v_{y3}) of an upper-right vertex of the n^{th} decoded unit, a motion vector (v_{x4}, v_{y4}) of a lower-left vertex of the n^{th} decoded unit, sample coordinates (x_2, y_2) of the upper-left vertex of the n^{th} decoded unit, sample coordinates (x_3, y_3) of the upper-right vertex of the n^{th} decoded unit, sample coordinates (x_4, y_4) of the lower-left vertex of the n^{th} decoded unit, and sample coordinates (x_0, y_0) of the upper-left vertex of the to-be-decoded unit:

$$\begin{cases} v_{x0} = v_{x3} + \frac{(y_3 - y_0) \times (v_{x4} - v_{x2})}{(y_4 - y_2)} \\ v_{y0} = v_{y3} + \frac{(y_3 - y_0) \times (v_{y4} - v_{y2})}{(y_4 - y_2)} \end{cases} \quad \text{formula (1); and}$$

determining a motion vector predictor (v_{x1}, v_{y1}) of the upper-right vertex of the to-be-decoded unit by using the following formula (2) and based on the motion vector (v_{x2}, v_{y2}) of the upper-left vertex of the n^{th} decoded unit, the motion vector (v_{x3}, v_{y3}) of the upper-right vertex of the n^{th} decoded unit, the sample coordinates (x_2, y_2) of the upper-left vertex of the n^{th} decoded unit, the sample coordinates (x_3, y_3) of the upper-right vertex of the n^{th} decoded unit, the motion vector predictor (v_{x0}, v_{y0}) of the upper-left vertex of the to-be-decoded unit, the sample coordinates (x_0, y_0) of the upper-left vertex of the to-be-decoded unit, and sample coordinates (x_1, y_1) of the upper-left vertex of the to-be-decoded unit:

$$\begin{cases} v_{x1} = v_{x0} + \frac{(x_1 - x_0) \times (v_{x3} - v_{x2})}{(x_3 - x_2)} \\ v_{y1} = v_{y0} + \frac{(x_1 - x_0) \times (v_{y3} - v_{y2})}{(x_3 - x_2)} \end{cases} \quad \text{formula (2).}$$

[0159] Optionally, the determining the optimal motion vector group in N motion vector groups based on the index identifier of the optimal motion vector group in S404 may include:

sorting the N motion vector groups according to a preset sorting rule, to generate a candidate motion vector queue;

15 if N is greater than or equal to a preset value, determining a preset quantity of motion vector groups in the front of the candidate motion vector queue; and

determining the optimal motion vector group in the preset quantity of motion vector groups in the front based on the index identifier of the optimal motion vector group.

[0160] Optionally, the preset sorting rule includes a descending order of the N decoded units.

[0161] Alternatively, the determining the optimal motion vector group in N motion vector groups based on the index identifier of the optimal motion vector group in S404 may include:

sorting the N motion vector groups according to a preset sorting rule;
 if N is less than a preset value, generating Q motion vector groups, where a sum of N and Q is greater than or equal to the preset value, and Q is a positive integer;
 adding the Q motion vector groups to the end of the N motion vector groups, to
 5 generate a candidate motion vector queue;
 determining a preset quantity of motion vector groups in the front of the candidate motion vector queue; and
 determining the optimal motion vector group in the preset quantity of motion vector groups in the front based on the index identifier of the optimal motion vector group.

10 **[0162]** Optionally, the generating Q motion vector groups may include:
 determining, from the adjacent decoded units, a decoded unit corresponding to an m^{th} control point in the to-be-decoded unit, where a distance between the decoded unit corresponding to the m^{th} control point and the m^{th} control point is less than or equal to a preset distance, and m comprises any positive integer not greater than M;
 15 determining a motion vector of the decoded unit corresponding to the m^{th} control point as a motion vector predictor of the m^{th} control point; and
 generating the Q motion vector groups based on the motion vector predictors of the M control points.

[0163] Optionally, the generating Q motion vector groups may include:
 20 determining, from the adjacent decoded units, a decoded unit corresponding to an m^{th} control point in the to-be-decoded unit, where a distance between the decoded unit corresponding to the m^{th} control point and the m^{th} control point is less than or equal to a preset distance, and m comprises any positive integer not greater than M;
 determining a motion vector of the decoded unit corresponding to the m^{th} control
 25 point as a first motion vector predictor of the m^{th} control point;
 generating K first motion vector groups based on first motion vector predictors of the M control points;
 determining a motion vector of a j^{th} decoded unit in the adjacent decoded units as a second motion vector predictor of the m^{th} control point, where j is any one of 1, ..., or J, J is a
 30 quantity of the adjacent decoded units, and J is a positive integer;

generating L second motion vector groups based on second motion vector predictors of the M control points; and

adding the K first motion vector groups to the end of the L second motion vector groups, to generate the Q motion vector groups.

5 **[0164]** Optionally, the adding the Q motion vector groups to the end of the N motion vector groups, to generate a candidate motion vector queue may include:

 determining an eigenvalue corresponding to a q^{th} motion vector group, where q comprises any positive integer not greater than Q;

 sorting the Q motion vector groups in ascending order based on eigenvalues
10 corresponding to the Q motion vector groups; and

 adding the sorted Q motion vector groups to the end of the sorted N motion vector groups, to generate the candidate motion vector queue.

[0165] Optionally, the determining an eigenvalue corresponding to a q^{th} motion vector group includes:

15 determining a difference between components, in one prediction direction, of motion vector predictors, in the q^{th} motion vector group, of adjacent control points in the M control points;

 comparing an absolute value of the difference with a preset component threshold, where the preset component threshold is a range of the to-be-decoded unit in the prediction
20 direction; and

 if the absolute value of the difference is less than or equal to the preset component threshold, determining the eigenvalue corresponding to the q^{th} motion vector group.

[0166] Optionally, the determining an eigenvalue corresponding to a q^{th} motion vector group may include:

25 determining, from the adjacent decoded units, a decoded unit corresponding to another control point, where a distance between the decoded unit corresponding to the another control point and the another control point is less than or equal to the preset distance, and the another control point is any control point other than the M control points in the to-be-decoded unit;

30 determining a motion vector of the decoded unit corresponding to the another

control point as a motion vector predictor of the another control point; and

determining the eigenvalue corresponding to the q^{th} motion vector group by using a third preset algorithm and based on the motion vector predictor of the another control point and motion vector predictors, in the q^{th} motion vector group, of the M control points.

5 [0167] Optionally, the motion prediction mode of the to-be-decoded unit includes the translation motion prediction mode or the affine motion prediction mode. If the motion prediction mode of the to-be-decoded unit includes the translation motion prediction mode, the quantity of the control points is 1. If the motion prediction mode of the to-be-decoded unit includes the affine motion prediction mode, the quantity of the control points is greater than 1.

10 [0168] The image decoding method provided in Embodiment 3 of the present invention is a decoding method corresponding to the image encoding method in Embodiment 1 and Embodiment 2. A beneficial effect of the image decoding method is similar to that of the foregoing embodiments. Details are not described herein again.

[0169] Embodiment 4 of the present invention provides an image encoding apparatus. FIG. 15 5 is a schematic structural diagram of an image encoding apparatus according to Embodiment 4 of the present invention. As shown in FIG. 5, the image encoding apparatus 500 includes a determining module 501, a calculation module 502, and an encoding module 503.

[0170] The determining module 501 is configured to determine N encoded units from adjacent encoded units of a to-be-encoded unit according to a first preset rule, where a motion 20 prediction mode of the N encoded units is the same as that of the to-be-encoded unit, and N is a positive integer.

[0171] The calculation module 502 is configured to generate an n^{th} motion vector group by using a first preset algorithm and based on a motion vector of an n^{th} encoded unit determined by the determining module 501, where n comprises any positive integer not greater than N.

25 [0172] The determining module 501 is further configured to determine, from N motion vector groups obtained by the calculation module 502 and according to a second preset rule, one motion vector group as an optimal motion vector group.

[0173] The calculation module 502 is further configured to: determine a prediction sample value of each sample unit in the to-be-encoded unit by using a second preset algorithm and 30 based on the optimal motion vector group determined by the determining module, and

determine a prediction residual of each sample unit based on a difference between an original sample value of each sample unit and the prediction sample value of each sample unit.

[0174] The encoding module 503 is configured to encode the prediction residual of each sample unit and an index identifier of the optimal motion vector group, to obtain a bitstream
5 corresponding to the to-be-encoded unit, where the index identifier of the optimal motion vector group is used to instruct a decoding apparatus to determine the prediction sample value of each sample unit.

[0175] Optionally, the calculation module 502 is specifically configured to: determine motion vector predictors of M control points of the to-be-encoded unit by using the first preset
10 algorithm and based on the motion vector of the n^{th} encoded unit determined by the determining module 501, sample coordinates of the n^{th} encoded unit, and sample coordinates of the M control points; and generate the n^{th} motion vector group based on the motion vector predictors of the M control points, where M is a positive integer determined based on the motion prediction mode of the to-be-encoded unit.

15 [0176] Optionally, the M control points include an upper-left vertex and an upper-right vertex of the to-be-encoded unit;

the calculation module 502 is specifically configured to determine a motion vector predictor (v_{x0}, v_{y0}) of the upper-left vertex of the to-be-encoded unit by using the following formula (1) and based on a motion vector (v_{x2}, v_{y2}) of an upper-left vertex of the n^{th} encoded
20 unit determined by the determining module 501, a motion vector (v_{x3}, v_{y3}) of an upper-right vertex of the n^{th} encoded unit, a motion vector (v_{x4}, v_{y4}) of a lower-left vertex of the n^{th} encoded unit, sample coordinates (x_2, y_2) of the upper-left vertex of the n^{th} encoded unit, sample coordinates (x_3, y_3) of the upper-right vertex of the n^{th} encoded unit, sample coordinates (x_4, y_4) of the lower-left vertex of the n^{th} encoded unit, and sample coordinates
25 (x_0, y_0) of the upper-left vertex of the to-be-encoded unit:

$$\begin{cases} v_{x0} = v_{x3} + \frac{(y_3 - y_0) \times (v_{x4} - v_{x2})}{(y_4 - y_2)} \\ v_{y0} = v_{y3} + \frac{(y_3 - y_0) \times (v_{y4} - v_{y2})}{(y_4 - y_2)} \end{cases} \quad \text{formula (1); and}$$

the calculation module 502 is further configured to determine a motion vector predictor (v_{x1}, v_{y1}) of the upper-right vertex of the to-be-encoded unit by using the following formula (2) and based on the motion vector (v_{x2}, v_{y2}) of the upper-left vertex of the n^{th} encoded unit determined by the determining module 501, the motion vector (v_{x3}, v_{y3}) of the upper-right vertex of the n^{th} encoded unit, the sample coordinates (x_2, y_2) of the upper-left vertex of the n^{th} encoded unit, the sample coordinates (x_3, y_3) of the upper-right vertex of the n^{th} encoded unit, the motion vector predictor (v_{x0}, v_{y0}) of the upper-left vertex of the to-be-encoded unit, the sample coordinates (x_0, y_0) of the upper-left vertex of the to-be-encoded unit, and sample coordinates (x_1, y_1) of the upper-left vertex of the to-be-encoded unit:

$$\begin{cases} v_{x1} = v_{x0} + \frac{(x_1 - x_0) \times (v_{x3} - v_{x2})}{(x_3 - x_2)} \\ v_{y1} = v_{y0} + \frac{(x_1 - x_0) \times (v_{y3} - v_{y2})}{(x_3 - x_2)} \end{cases} \quad \text{formula (2).}$$

[0177] Optionally, the determining module 501 is specifically configured to: sort the N motion vector groups according to a preset sorting rule, to generate a candidate motion vector queue; if N is greater than or equal to a preset value, determine a preset quantity of motion vector groups in the front of the candidate motion vector queue; determine a matching error between each of the preset quantity of motion vector groups in the front and the to-be-encoded unit; and determine one motion vector group with a smallest matching error as the optimal motion vector group.

[0178] Optionally, the preset sorting rule includes a descending order of the N encoded units.

[0179] Optionally, the determining module 501 is further configured to: sort the N motion vector groups according to a preset sorting rule; if N is less than a preset value, generate Q

motion vector groups, where a sum of N and Q is greater than or equal to the preset value, and Q is a positive integer; add the Q motion vector groups to the end of the N motion vector groups, to generate a candidate motion vector queue; determine a preset quantity of motion vector groups in the front of the candidate motion vector queue; determine a matching error between
5 each of the preset quantity of motion vector groups in the front and the to-be-encoded unit; and determine one motion vector group with a smallest matching error as the optimal motion vector group.

[0180] Optionally, the determining module 501 is further configured to: determine, from the adjacent encoded units, an encoded unit corresponding to an m^{th} control point in the to-be-
10 encoded unit, where a distance between the encoded unit corresponding to the m^{th} control point and the m^{th} control point is less than or equal to a preset distance, and m comprises any positive integer not greater than M; determine a motion vector of the encoded unit corresponding to the m^{th} control point as a motion vector predictor of the m^{th} control point; and generate the Q motion vector groups based on the motion vector predictors of the M control points.

15 [0181] Optionally, the determining module 501 is further configured to: determine, from the adjacent encoded units, an encoded unit corresponding to an m^{th} control point in the to-be-encoded unit, where a distance between the encoded unit corresponding to the m^{th} control point and the m^{th} control point is less than or equal to a preset distance, and m comprises any positive integer not greater than M; determine a motion vector of the encoded unit corresponding to the
20 m^{th} control point as a first motion vector predictor of the m^{th} control point; generate K first motion vector groups based on first motion vector predictors of the M control points; determine a motion vector of a j^{th} encoded unit in the adjacent encoded units as a second motion vector predictor of the m^{th} control point, where j is any one of 1, ..., or J, J is a quantity of the adjacent encoded units, and J is a positive integer; generate L second motion vector groups based on
25 second motion vector predictors of the M control points; and add the K first motion vector groups to the end of the L second motion vector groups, to generate the Q motion vector groups.

[0182] Optionally, the determining module 501 is further configured to: determine an eigenvalue corresponding to a q^{th} motion vector group, where q comprises any positive integer not greater than Q; sort the Q motion vector groups in ascending order based on eigenvalues
30 corresponding to the Q motion vector groups; and add the sorted Q motion vector groups to the

end of the sorted N motion vector groups, to generate the candidate motion vector queue.

[0183] Optionally, the determining module 501 is further configured to: determine a difference between components, in one prediction direction, of motion vector predictors, in the q^{th} motion vector group, of adjacent control points in the M control points; compare an absolute value of the difference with a preset component threshold, where the preset component threshold is a range of the to-be-encoded unit in the prediction direction; and if the absolute value of the difference is less than or equal to the preset component threshold, determine the eigenvalue corresponding to the q^{th} motion vector group.

[0184] Optionally, the determining module 501 is further configured to: determine, from the adjacent encoded units, an encoded unit corresponding to another control point, where a distance between the encoded unit corresponding to the another control point and the another control point is less than or equal to the preset distance, and the another control point is any control point other than the M control points in the to-be-encoded unit; determine a motion vector of the encoded unit corresponding to the another control point as a motion vector predictor of the another control point; and determine the eigenvalue corresponding to the q^{th} motion vector group by using a third preset algorithm and based on the motion vector predictor of the another control point and motion vector predictors, in the q^{th} motion vector group, of the M control points.

[0185] Optionally, the motion prediction mode of the to-be-encoded unit includes a translation motion prediction mode or an affine motion prediction mode.

[0186] The image encoding apparatus provided in Embodiment 4 of the present invention may be configured to perform the image encoding method in any one of Embodiment 1 or Embodiment 2. A specific implementation process and a beneficial effect are similar to those of the foregoing embodiments. Details are not described herein again.

[0187] Embodiment 5 of the present invention further provides an image decoding apparatus. FIG. 6 is a schematic structural diagram of an image decoding apparatus according to Embodiment 5 of the present invention. As shown in FIG. 6, the image decoding apparatus 600 may include a determining module 601, a calculation module 602, and a decoding module 603.

[0188] The determining module 601 is configured to determine N decoded units from

adjacent decoded units of a to-be-decoded unit according to a first preset rule, where a motion prediction mode of the N decoded units is the same as that of the to-be-decoded unit, and N is a positive integer.

5 [0189] The calculation module 602 is configured to generate an n^{th} motion vector group by using a first preset algorithm and based on a motion vector of an n^{th} decoded unit determined by the determining module 601, where n comprises any positive integer not greater than N.

[0190] The decoding module 603 is configured to decode a bitstream corresponding to the to-be-decoded unit, to obtain a prediction residual of each sample unit and an index identifier of an optimal motion vector group.

10 [0191] The determining module 601 is further configured to determine the optimal motion vector group in N motion vector groups based on the index identifier of the optimal motion vector group that is determined by the decoding module 603.

[0192] The calculation module 602 is further configured to: determine a prediction sample value of each sample unit in the to-be-decoded unit by using a second preset algorithm and
15 based on the optimal motion vector group determined by the determining module 601, and determine a reconstruction sample value of each sample unit based on a sum of the prediction sample value of each sample unit and the prediction residual of each sample unit.

[0193] Optionally, the calculation module 602 is specifically configured to: determine motion vector predictors of M control points of the to-be-decoded unit by using the first preset
20 algorithm and based on the motion vector of the n^{th} decoded unit determined by the determining module 601, sample coordinates of the n^{th} decoded unit, and sample coordinates of the M control points; and generate the n^{th} motion vector group based on the motion vector predictors of the M control points, where M is a positive integer determined based on the motion prediction mode of the to-be-decoded unit.

25 [0194] Optionally, the M control points include an upper-left vertex and an upper-right vertex of the to-be-decoded unit;

the calculation module 602 is specifically configured to determine a motion vector predictor (v_{x0}, v_{y0}) of the upper-left vertex of the to-be-decoded unit by using the following formula (1) and based on a motion vector (v_{x2}, v_{y2}) of an upper-left vertex of the n^{th} decoded

unit determined by the determining module 601, a motion vector (v_{x3}, v_{y3}) of an upper-right vertex of the n^{th} decoded unit, a motion vector (v_{x4}, v_{y4}) of a lower-left vertex of the n^{th} decoded unit, sample coordinates (x_2, y_2) of the upper-left vertex of the n^{th} decoded unit, sample coordinates (x_3, y_3) of the upper-right vertex of the n^{th} decoded unit, sample coordinates (x_4, y_4) of the lower-left vertex of the n^{th} decoded unit, and sample coordinates (x_0, y_0) of the upper-left vertex of the to-be-decoded unit:

$$\begin{cases} v_{x0} = v_{x3} + \frac{(y_3 - y_0) \times (v_{x4} - v_{x2})}{(y_4 - y_2)} \\ v_{y0} = v_{y3} + \frac{(y_3 - y_0) \times (v_{y4} - v_{y2})}{(y_4 - y_2)} \end{cases} \quad \text{formula (1); and}$$

specifically, the calculation module 602 is further configured to determine a motion vector predictor (v_{x1}, v_{y1}) of the upper-right vertex of the to-be-decoded unit by using the following formula (2) and based on the motion vector (v_{x2}, v_{y2}) of the upper-left vertex of the n^{th} decoded unit determined by the determining module 601, the motion vector (v_{x3}, v_{y3}) of the upper-right vertex of the n^{th} decoded unit, the sample coordinates (x_2, y_2) of the upper-left vertex of the n^{th} decoded unit, the sample coordinates (x_3, y_3) of the upper-right vertex of the n^{th} decoded unit, the motion vector predictor (v_{x0}, v_{y0}) of the upper-left vertex of the to-be-decoded unit, the sample coordinates (x_0, y_0) of the upper-left vertex of the to-be-decoded unit, and sample coordinates (x_1, y_1) of the upper-left vertex of the to-be-decoded unit:

$$\begin{cases} v_{x1} = v_{x0} + \frac{(x_1 - x_0) \times (v_{x3} - v_{x2})}{(x_3 - x_2)} \\ v_{y1} = v_{y0} + \frac{(x_1 - x_0) \times (v_{y3} - v_{y2})}{(x_3 - x_2)} \end{cases} \quad \text{formula (2).}$$

[0195] Optionally, the determining module 601 is further configured to: sort the N motion vector groups according to a preset sorting rule, to generate a candidate motion vector queue; if N is greater than or equal to a preset value, determine a preset quantity of motion vector

groups in the front of the candidate motion vector queue; and determine the optimal motion vector group in the preset quantity of motion vector groups in the front based on the index identifier of the optimal motion vector group.

5 [0196] Optionally, the preset sorting rule includes a descending order of the N decoded units.

[0197] Optionally, the determining module 601 is further configured to: sort the N motion vector groups according to a preset sorting rule; if N is less than a preset value, generate Q motion vector groups, where a sum of N and Q is greater than or equal to the preset value, and Q is a positive integer; add the Q motion vector groups to the end of the N motion vector groups,
10 to generate a candidate motion vector queue; determine a preset quantity of motion vector groups in the front of the candidate motion vector queue; and determine the optimal motion vector group in the preset quantity of motion vector groups in the front based on the index identifier of the optimal motion vector group.

[0198] Optionally, the determining module 601 is further configured to: determine, from
15 the adjacent decoded units, a decoded unit corresponding to an m^{th} control point in the to-be-decoded unit, where a distance between the decoded unit corresponding to the m^{th} control point and the m^{th} control point is less than or equal to a preset distance, and m comprises any positive integer not greater than M; determine a motion vector of the decoded unit corresponding to the m^{th} control point as a motion vector predictor of the m^{th} control point; and generate the Q motion
20 vector groups based on the motion vector predictors of the M control points.

[0199] Optionally, the determining module 601 is further configured to: determine, from the adjacent decoded units, a decoded unit corresponding to an m^{th} control point in the to-be-decoded unit, where a distance between the decoded unit corresponding to the m^{th} control point and the m^{th} control point is less than or equal to a preset distance, and m comprises any positive
25 integer not greater than M; determine a motion vector of the decoded unit corresponding to the m^{th} control point as a first motion vector predictor of the m^{th} control point; generate K first motion vector groups based on first motion vector predictors of the M control points; determine a motion vector of a j^{th} decoded unit in the adjacent decoded units as a second motion vector predictor of the m^{th} control point, where j is any one of 1, ..., or J, J is a quantity of the adjacent
30 decoded units, and J is a positive integer; generate L second motion vector groups based on

second motion vector predictors of the M control points; and add the K first motion vector groups to the end of the L second motion vector groups, to generate the Q motion vector groups.

[0200] Optionally, the determining module 601 is further configured to: determine an eigenvalue corresponding to a q^{th} motion vector group, where q comprises any positive integer not greater than Q; sort the Q motion vector groups in ascending order based on eigenvalues corresponding to the Q motion vector groups; and add the sorted Q motion vector groups to the end of the sorted N motion vector groups, to generate the candidate motion vector queue.

[0201] Optionally, the determining module 601 is further configured to: determine a difference between components, in one prediction direction, of motion vector predictors, in the q^{th} motion vector group, of adjacent control points in the M control points; compare an absolute value of the difference with a preset component threshold, where the preset component threshold is a range of the to-be-decoded unit in the prediction direction; and if the absolute value of the difference is less than or equal to the preset component threshold, determine the eigenvalue corresponding to the q^{th} motion vector group.

[0202] Optionally, the determining module 601 is further configured to: determine, from the adjacent decoded units, a decoded unit corresponding to another control point, where a distance between the decoded unit corresponding to the another control point and the another control point is less than or equal to the preset distance, and the another control point is any control point other than the M control points in the to-be-decoded unit; determine a motion vector of the decoded unit corresponding to the another control point as a motion vector predictor of the another control point; and determine the eigenvalue corresponding to the q^{th} motion vector group by using a third preset algorithm and based on the motion vector predictor of the another control point and motion vector predictors, in the q^{th} motion vector group, of the M control points.

[0203] Optionally, the motion prediction mode of the to-be-decoded unit includes a translation motion prediction mode or an affine motion prediction mode.

[0204] The image decoding apparatus provided in Embodiment 5 of the present invention may perform the image decoding method provided in Embodiment 3. A specific implementation process and a beneficial effect are similar to those of the foregoing embodiment.

Details are not described herein again.

[0205] Embodiment 6 of the present invention provides an image encoding apparatus. FIG. 7 is a schematic structural diagram of an image encoding apparatus according to Embodiment 6 of the present invention. As shown in FIG. 7, the image encoding apparatus 700 includes a processor 701, a memory 702, a communications interface 703, and a bus 704. The processor 701 is connected to the memory 702 and the communications interface 703 by using the bus 704.

[0206] The memory 702 is configured to store an instruction.

[0207] The processor 701 is configured to execute the instruction. When the processor 701 executes the instruction stored in the memory 702, the processor 701 performs the image encoding method in any one of Embodiment 1 or Embodiment 2.

[0208] The image encoding apparatus provided in Embodiment 6 of the present invention may perform the image encoding method provided in Embodiment 1 or Embodiment 2. A specific implementation process and a beneficial effect are similar to those of the foregoing embodiments. Details are not described herein again.

[0209] Embodiment 7 of the present invention provides an image decoding apparatus. FIG. 8 is a schematic structural diagram of an image decoding apparatus according to Embodiment 7 of the present invention. As shown in FIG. 8, the image decoding apparatus 800 may include a processor 801, a memory 802, a communications interface 803, and a bus 804. The processor 801 is connected to the memory 802 and the communications interface 803 by using the bus 804.

[0210] The memory 802 is configured to store an instruction.

[0211] The processor 801 is configured to execute the instruction. When the processor 801 executes the instruction stored in the memory 802, the processor 801 performs the image decoding method in Embodiment 3.

[0212] The image decoding apparatus provided in Embodiment 7 of the present invention may perform the image decoding method provided in Embodiment 3. A specific implementation process and a beneficial effect are similar to those of the foregoing embodiment. Details are not described herein again.

[0213] Persons of ordinary skill in the art may understand that all or some of the steps of the method embodiments may be implemented by a program instructing relevant hardware. The

program may be stored in a computer-readable storage medium. When the program runs, the steps of the method embodiments are performed. The foregoing storage medium includes any medium that can store program code, such as a ROM, a RAM, a magnetic disk, or an optical disc.

- 5 [0214] Finally, it should be noted that the foregoing embodiments are merely intended for describing the technical solutions of the present invention, but not for limiting the present invention. Although the present invention is described in detail with reference to the foregoing embodiments, persons of ordinary skill in the art should understand that they may still make modifications to the technical solutions described in the foregoing embodiments or make
- 10 equivalent replacements to some or all technical features thereof, without departing from the scope of the technical solutions of the embodiments of the present invention.

CLAIMS

1. An image encoding method, comprising:

determining N encoded units from adjacent encoded units of a to-be-encoded unit according to a first preset rule, wherein a motion prediction mode of the N encoded units is the same as that of the to-be-encoded unit, and N is 2, and the N encoded units comprise one encoded unit in an upper direction of the to-be-encoded unit and one encoded unit in a left direction of the to-be-encoded unit;

generating an n^{th} motion vector group by using a first preset algorithm and based on a motion vector of an n^{th} encoded unit, wherein n comprises any positive integer not greater than N;

determining, from obtained N motion vector groups according to a second preset rule, one motion vector group as an optimal motion vector group;

determining a prediction sample value of each sample unit in the to-be-encoded unit by using a second preset algorithm and based on the optimal motion vector group;

determining a prediction residual of each sample unit based on a difference between an original sample value of each sample unit and the prediction sample value of each sample unit; and

encoding the prediction residual of each sample unit and an index identifier of the optimal motion vector group, to obtain a bitstream corresponding to the to-be-encoded unit, wherein the index identifier of the optimal motion vector group is used to instruct a decoding apparatus to determine the prediction sample value of each sample unit.

2. The method according to claim 1, wherein the generating an n^{th} motion vector group by using a first preset algorithm and based on a motion vector of an n^{th} encoded unit comprises:

determining motion vector predictors of M control points of the to-be-encoded unit by using the first preset algorithm and based on the motion vector of the n^{th} encoded unit, sample coordinates of the n^{th} encoded unit, and sample coordinates of the M control points, wherein M is a positive integer determined based on the motion prediction mode of the to-be-encoded unit; and

generating the n^{th} motion vector group based on the motion vector predictors of the M control points.

3. The method according to claim 2, wherein the M control points comprise an upper-left vertex and an upper-right vertex of the to-be-encoded unit; and

the determining motion vector predictors of M control points of the to-be-encoded unit by using the first preset algorithm and based on the motion vector of the n^{th} encoded unit, sample coordinates of the n^{th} encoded unit, and sample coordinates of the M control points comprises:

determining a motion vector predictor (v_{x0}, v_{y0}) of the upper-left vertex of the to-be-encoded unit by using the following formula (1) and based on a motion vector (v_{x2}, v_{y2}) of an upper-left vertex of the n^{th} encoded unit, a motion vector (v_{x3}, v_{y3}) of an upper-right vertex of the n^{th} encoded unit, a motion vector (v_{x4}, v_{y4}) of a lower-left vertex of the n^{th} encoded unit, sample coordinates (x_2, y_2) of the upper-left vertex of the n^{th} encoded unit, sample coordinates (x_3, y_3) of the upper-right vertex of the n^{th} encoded unit, sample coordinates (x_4, y_4) of the lower-left vertex of the n^{th} encoded unit, and sample coordinates (x_0, y_0) of the upper-left vertex of the to-be-encoded unit:

$$\begin{cases} v_{x0} = v_{x3} + \frac{(y_3 - y_0) \times (v_{x4} - v_{x2})}{(y_4 - y_2)} \\ v_{y0} = v_{y3} + \frac{(y_3 - y_0) \times (v_{y4} - v_{y2})}{(y_4 - y_2)} \end{cases} \quad \text{formula (1); and}$$

determining a motion vector predictor (v_{x1}, v_{y1}) of the upper-right vertex of the to-be-encoded unit by using the following formula (2) and based on the motion vector (v_{x2}, v_{y2}) of the upper-left vertex of the n^{th} encoded unit, the motion vector (v_{x3}, v_{y3}) of the upper-right vertex of the n^{th} encoded unit, the sample coordinates (x_2, y_2) of the upper-left vertex of the n^{th} encoded unit, the sample coordinates (x_3, y_3) of the upper-right vertex of the n^{th} encoded unit, the motion vector predictor (v_{x0}, v_{y0}) of the upper-left vertex of the to-be-encoded unit, the sample coordinates (x_0, y_0) of the upper-left vertex of the to-be-encoded unit, and sample

coordinates (x_1, y_1) of the upper-right vertex of the to-be-encoded unit:

$$\begin{cases} v_{x1} = v_{x0} + \frac{(x_1 - x_0) \times (v_{x3} - v_{x2})}{(x_3 - x_2)} \\ v_{y1} = v_{y0} + \frac{(x_1 - x_0) \times (v_{y3} - v_{y2})}{(x_3 - x_2)} \end{cases} \quad \text{formula (2).}$$

4. The method according to claim 2 or 3, wherein the determining, from obtained N motion vector groups according to a second preset rule, one motion vector group as an optimal motion vector group comprises:

 sorting the N motion vector groups according to a preset sorting rule, to generate a candidate motion vector queue;

 if N is greater than or equal to a preset value, determining a preset quantity of motion vector groups in the front of the candidate motion vector queue;

 determining a matching error between each of the preset quantity of motion vector groups in the front and the to-be-encoded unit; and

 determining one motion vector group with a smallest matching error as the optimal motion vector group.

5. The method according to claim 4, wherein the preset sorting rule comprises a descending order of the N encoded units.

6. The method according to claim 2 or 3, wherein the determining, from obtained N motion vector groups according to a second preset rule, one motion vector group as an optimal motion vector group comprises:

 sorting the N motion vector groups according to a preset sorting rule;

 if N is less than a preset value, generating Q motion vector groups, wherein a sum of N and Q is greater than or equal to the preset value, and Q is a positive integer;

 adding the Q motion vector groups to the end of the N motion vector groups, to generate a candidate motion vector queue;

 determining a preset quantity of motion vector groups in the front of the candidate motion vector queue;

 determining a matching error between each of the preset quantity of motion vector groups in the front and the to-be-encoded unit; and

determining one motion vector group with a smallest matching error as the optimal motion vector group.

7. The method according to claim 6, wherein the generating Q motion vector groups comprises:

determining, from the adjacent encoded units, an encoded unit corresponding to an m^{th} control point in the to-be-encoded unit, wherein a distance between the encoded unit corresponding to the m^{th} control point and the m^{th} control point is less than or equal to a preset distance, and m comprises any positive integer not greater than M;

determining a motion vector of the encoded unit corresponding to the m^{th} control point as a motion vector predictor of the m^{th} control point; and

generating the Q motion vector groups based on the motion vector predictors of the M control points.

8. The method according to claim 6, wherein the generating Q motion vector groups comprises:

determining, from the adjacent encoded units, an encoded unit corresponding to an m^{th} control point in the to-be-encoded unit, wherein a distance between the encoded unit corresponding to the m^{th} control point and the m^{th} control point is less than or equal to a preset distance, and m comprises any positive integer not greater than M;

determining a motion vector of the encoded unit corresponding to the m^{th} control point as a first motion vector predictor of the m^{th} control point;

generating K first motion vector groups based on first motion vector predictors of the M control points;

determining a motion vector of a j^{th} encoded unit in the adjacent encoded units as a second motion vector predictor of the m^{th} control point, wherein j is any one of 1, ..., or J, J is a quantity of the adjacent encoded units, and J is a positive integer;

generating L second motion vector groups based on second motion vector predictors of the M control points; and

adding the K first motion vector groups to the end of the L second motion vector groups, to generate the Q motion vector groups.

9. The method according to any one of claims 6 to 8, wherein the adding the Q motion

vector groups to the end of the N motion vector groups, to generate a candidate motion vector queue comprises:

determining an eigenvalue corresponding to a q^{th} motion vector group, wherein q comprises any positive integer not greater than Q ;

sorting the Q motion vector groups in ascending order based on eigenvalues corresponding to the Q motion vector groups; and

adding the sorted Q motion vector groups to the end of the sorted N motion vector groups, to generate the candidate motion vector queue.

10. The method according to claim 9, wherein the determining an eigenvalue corresponding to a q^{th} motion vector group comprises:

determining a difference between components, in one prediction direction, of motion vector predictors, in the q^{th} motion vector group, of adjacent control points in the M control points;

comparing an absolute value of the difference with a preset component threshold, wherein the preset component threshold is a range of the to-be-encoded unit in the prediction direction; and

if the absolute value of the difference is less than or equal to the preset component threshold, determining the eigenvalue corresponding to the q^{th} motion vector group.

11. The method according to claim 9 or 10, wherein the determining an eigenvalue corresponding to a q^{th} motion vector group comprises:

determining, from the adjacent encoded units, an encoded unit corresponding to another control point, wherein a distance between the encoded unit corresponding to the another control point and the another control point is less than or equal to the preset distance, and the another control point is any control point other than the M control points in the to-be-encoded unit;

determining a motion vector of the encoded unit corresponding to the another control point as a motion vector predictor of the another control point; and

determining the eigenvalue corresponding to the q^{th} motion vector group by using a third preset algorithm and based on the motion vector predictor of the another control point and motion vector predictors, in the q^{th} motion vector group, of the M control points.

12. The method according to any one of claims 1 to 11, wherein the motion prediction

mode of the to-be-encoded unit comprises a translation motion prediction mode or an affine motion prediction mode.

13. An image decoding method, comprising:

determining N decoded units from adjacent decoded units of a to-be-decoded unit according to a first preset rule, wherein a motion prediction mode of the N decoded units is the same as that of the to-be-decoded unit, and N is 2, and the N decoded units comprise one decoded unit in an upper direction of the to-be-decoded unit and one decoded unit in a left direction of the to-be-decoded unit;

generating an n^{th} motion vector group by using a first preset algorithm and based on a motion vector of an n^{th} decoded unit, wherein n comprises any positive integer not greater than N;

decoding a bitstream corresponding to the to-be-decoded unit, to obtain a prediction residual of each sample unit and an index identifier of an optimal motion vector group;

determining the optimal motion vector group in N motion vector groups based on the index identifier of the optimal motion vector group;

determining a prediction sample value of each sample unit in the to-be-decoded unit by using a second preset algorithm and based on the optimal motion vector group; and

determining a reconstruction sample value of each sample unit based on a sum of the prediction sample value of each sample unit and the prediction residual of each sample unit.

14. The method according to claim 13, wherein the generating an n^{th} motion vector group by using a first preset algorithm and based on a motion vector of an n^{th} decoded unit comprises:

determining motion vector predictors of M control points of the to-be-decoded unit by using the first preset algorithm and based on the motion vector of the n^{th} decoded unit, sample coordinates of the n^{th} decoded unit, and sample coordinates of the M control points, wherein M is a positive integer determined based on the motion prediction mode of the to-be-decoded unit; and

generating the n^{th} motion vector group based on the motion vector predictors of the M control points.

15. The method according to claim 14, wherein the M control points comprise an upper-left vertex and an upper-right vertex of the to-be-decoded unit; and

the determining motion vector predictors of M control points of the to-be-decoded unit by using the first preset algorithm and based on the motion vector of the n^{th} decoded unit, sample coordinates of the n^{th} decoded unit, and sample coordinates of the M control points comprises:

determining a motion vector predictor (v_{x0}, v_{y0}) of the upper-left vertex of the to-be-decoded unit by using the following formula (1) and based on a motion vector (v_{x2}, v_{y2}) of an upper-left vertex of the n^{th} decoded unit, a motion vector (v_{x3}, v_{y3}) of an upper-right vertex of the n^{th} decoded unit, a motion vector (v_{x4}, v_{y4}) of a lower-left vertex of the n^{th} decoded unit, sample coordinates (x_2, y_2) of the upper-left vertex of the n^{th} decoded unit, sample coordinates (x_3, y_3) of the upper-right vertex of the n^{th} decoded unit, sample coordinates (x_4, y_4) of the lower-left vertex of the n^{th} decoded unit, and sample coordinates (x_0, y_0) of the upper-left vertex of the to-be-decoded unit:

$$\begin{cases} v_{x0} = v_{x3} + \frac{(y_3 - y_0) \times (v_{x4} - v_{x2})}{(y_4 - y_2)} \\ v_{y0} = v_{y3} + \frac{(y_3 - y_0) \times (v_{y4} - v_{y2})}{(y_4 - y_2)} \end{cases} \quad \text{formula (1); and}$$

determining a motion vector predictor (v_{x1}, v_{y1}) of the upper-right vertex of the to-be-decoded unit by using the following formula (2) and based on the motion vector (v_{x2}, v_{y2}) of the upper-left vertex of the n^{th} decoded unit, the motion vector (v_{x3}, v_{y3}) of the upper-right vertex of the n^{th} decoded unit, the sample coordinates (x_2, y_2) of the upper-left vertex of the n^{th} decoded unit, the sample coordinates (x_3, y_3) of the upper-right vertex of the n^{th} decoded unit, the motion vector predictor (v_{x0}, v_{y0}) of the upper-left vertex of the to-be-decoded unit, the sample coordinates (x_0, y_0) of the upper-left vertex of the to-be-decoded unit, and sample coordinates (x_1, y_1) of the upper-left vertex of the to-be-decoded unit:

$$\begin{cases} v_{x1} = v_{x0} + \frac{(x_1 - x_0) \times (v_{x3} - v_{x2})}{(x_3 - x_2)} \\ v_{y1} = v_{y0} + \frac{(x_1 - x_0) \times (v_{y3} - v_{y2})}{(x_3 - x_2)} \end{cases} \quad \text{formula (2).}$$

16. The method according to claim 14 or 15, wherein the determining the optimal motion vector group in N motion vector groups based on the index identifier of the optimal motion vector group comprises:

 sorting the N motion vector groups according to a preset sorting rule, to generate a candidate motion vector queue;

 if N is greater than or equal to a preset value, determining a preset quantity of motion vector groups in the front of the candidate motion vector queue; and

 determining the optimal motion vector group in the preset quantity of motion vector groups in the front based on the index identifier of the optimal motion vector group.

17. The method according to claim 16, wherein the preset sorting rule comprises a descending order of the N decoded units.

18. The method according to claim 14 or 15, wherein the determining the optimal motion vector group in N motion vector groups based on the index identifier of the optimal motion vector group comprises:

 sorting the N motion vector groups according to a preset sorting rule;

 if N is less than a preset value, generating Q motion vector groups, wherein a sum of N and Q is greater than or equal to the preset value, and Q is a positive integer;

 adding the Q motion vector groups to the end of the N motion vector groups, to generate a candidate motion vector queue;

 determining a preset quantity of motion vector groups in the front of the candidate motion vector queue; and

 determining the optimal motion vector group in the preset quantity of motion vector groups in the front based on the index identifier of the optimal motion vector group.

19. The method according to claim 18, wherein the generating Q motion vector groups comprises:

 determining, from the adjacent decoded units, a decoded unit corresponding to an m^{th}

control point in the to-be-decoded unit, wherein a distance between the decoded unit corresponding to the m^{th} control point and the m^{th} control point is less than or equal to a preset distance, and m comprises any positive integer not greater than M ;

determining a motion vector of the decoded unit corresponding to the m^{th} control point as a motion vector predictor of the m^{th} control point; and

generating the Q motion vector groups based on the motion vector predictors of the M control points.

20. The method according to claim 18, wherein the generating Q motion vector groups comprises:

determining, from the adjacent decoded units, a decoded unit corresponding to an m^{th} control point in the to-be-decoded unit, wherein a distance between the decoded unit corresponding to the m^{th} control point and the m^{th} control point is less than or equal to a preset distance, and m comprises any positive integer not greater than M ;

determining a motion vector of the decoded unit corresponding to the m^{th} control point as a first motion vector predictor of the m^{th} control point;

generating K first motion vector groups based on first motion vector predictors of the M control points;

determining a motion vector of a j^{th} decoded unit in the adjacent decoded units as a second motion vector predictor of the m^{th} control point, wherein j is any one of $1, \dots, \text{or } J$, J is a quantity of the adjacent decoded units, and J is a positive integer;

generating L second motion vector groups based on second motion vector predictors of the M control points; and

adding the K first motion vector groups to the end of the L second motion vector groups, to generate the Q motion vector groups.

21. The method according to any one of claims 18 to 20, wherein the adding the Q motion vector groups to the end of the N motion vector groups, to generate a candidate motion vector queue comprises:

determining an eigenvalue corresponding to a q^{th} motion vector group, wherein q comprises any positive integer not greater than Q ;

sorting the Q motion vector groups in ascending order based on eigenvalues corresponding

to the Q motion vector groups; and

adding the sorted Q motion vector groups to the end of the sorted N motion vector groups, to generate the candidate motion vector queue.

22. The method according to claim 21, wherein the determining an eigenvalue corresponding to a q^{th} motion vector group comprises:

determining a difference between components, in one prediction direction, of motion vector predictors, in the q^{th} motion vector group, of adjacent control points in the M control points;

comparing an absolute value of the difference with a preset component threshold, wherein the preset component threshold is a range of the to-be-decoded unit in the prediction direction; and

if the absolute value of the difference is less than or equal to the preset component threshold, determining the eigenvalue corresponding to the q^{th} motion vector group.

23. The method according to claim 21 or 22, wherein the determining an eigenvalue corresponding to a q^{th} motion vector group comprises:

determining, from the adjacent decoded units, a decoded unit corresponding to another control point, wherein a distance between the decoded unit corresponding to the another control point and the another control point is less than or equal to the preset distance, and the another control point is any control point other than the M control points in the to-be-decoded unit;

determining a motion vector of the decoded unit corresponding to the another control point as a motion vector predictor of the another control point; and

determining the eigenvalue corresponding to the q^{th} motion vector group by using a third preset algorithm and based on the motion vector predictor of the another control point and motion vector predictors, in the q^{th} motion vector group, of the M control points.

24. The method according to any one of claims 13 to 23, wherein the motion prediction mode of the to-be-decoded unit comprises a translation motion prediction mode or an affine motion prediction mode.

25. An image encoding apparatus, comprising:

a determining module, configured to determine N encoded units from adjacent encoded units of a to-be-encoded unit according to a first preset rule, wherein a motion prediction mode

of the N encoded units is the same as that of the to-be-encoded unit, and N is 2, and the N encoded units comprise one encoded unit in an upper direction of the to-be-encoded unit and one encoded unit in a left direction of the to-be-encoded unit;

a calculation module, configured to generate an n^{th} motion vector group by using a first preset algorithm and based on a motion vector of an n^{th} encoded unit determined by the determining module, wherein n comprises any positive integer not greater than N, wherein

the determining module is further configured to determine, from N motion vector groups obtained by the calculation module and according to a second preset rule, one motion vector group as an optimal motion vector group; and

the calculation module is further configured to: determine a prediction sample value of each sample unit in the to-be-encoded unit by using a second preset algorithm and based on the optimal motion vector group determined by the determining module, and determine a prediction residual of each sample unit based on a difference between an original sample value of each sample unit and the prediction sample value of each sample unit; and

an encoding module, configured to encode the prediction residual of each sample unit and an index identifier of the optimal motion vector group, to obtain a bitstream corresponding to the to-be-encoded unit, wherein the index identifier of the optimal motion vector group is used to instruct a decoding apparatus to determine the prediction sample value of each sample unit.

26. The image encoding apparatus according to claim 25, wherein

the calculation module is specifically configured to: determine motion vector predictors of M control points of the to-be-encoded unit by using the first preset algorithm and based on the motion vector of the n^{th} encoded unit determined by the determining module, sample coordinates of the n^{th} encoded unit, and sample coordinates of the M control points; and generate the n^{th} motion vector group based on the motion vector predictors of the M control points, wherein M is a positive integer determined based on the motion prediction mode of the to-be-encoded unit.

27. The image encoding apparatus according to claim 26, wherein the M control points comprise an upper-left vertex and an upper-right vertex of the to-be-encoded unit;

the calculation module is specifically configured to determine a motion vector predictor

(v_{x0}, v_{y0}) of the upper-left vertex of the to-be-encoded unit by using the following formula (1) and based on a motion vector (v_{x2}, v_{y2}) of an upper-left vertex of the n^{th} encoded unit determined by the determining module, a motion vector (v_{x3}, v_{y3}) of an upper-right vertex of the n^{th} encoded unit, a motion vector (v_{x4}, v_{y4}) of a lower-left vertex of the n^{th} encoded unit, sample coordinates (x_2, y_2) of the upper-left vertex of the n^{th} encoded unit, sample coordinates (x_3, y_3) of the upper-right vertex of the n^{th} encoded unit, sample coordinates (x_4, y_4) of the lower-left vertex of the n^{th} encoded unit, and sample coordinates (x_0, y_0) of the upper-left vertex of the to-be-encoded unit:

$$\begin{cases} v_{x0} = v_{x3} + \frac{(y_3 - y_0) \times (v_{x4} - v_{x2})}{(y_4 - y_2)} \\ v_{y0} = v_{y3} + \frac{(y_3 - y_0) \times (v_{y4} - v_{y2})}{(y_4 - y_2)} \end{cases} \quad \text{formula (1); and}$$

the calculation module is further configured to determine a motion vector predictor (v_{x1}, v_{y1}) of the upper-right vertex of the to-be-encoded unit by using the following formula (2) and based on the motion vector (v_{x2}, v_{y2}) of the upper-left vertex of the n^{th} encoded unit determined by the determining module, the motion vector (v_{x3}, v_{y3}) of the upper-right vertex of the n^{th} encoded unit, the sample coordinates (x_2, y_2) of the upper-left vertex of the n^{th} encoded unit, the sample coordinates (x_3, y_3) of the upper-right vertex of the n^{th} encoded unit, the motion vector predictor (v_{x0}, v_{y0}) of the upper-left vertex of the to-be-encoded unit, the sample coordinates (x_0, y_0) of the upper-left vertex of the to-be-encoded unit, and sample coordinates (x_1, y_1) of the upper-left vertex of the to-be-encoded unit:

$$\begin{cases} v_{x1} = v_{x0} + \frac{(x_1 - x_0) \times (v_{x3} - v_{x2})}{(x_3 - x_2)} \\ v_{y1} = v_{y0} + \frac{(x_1 - x_0) \times (v_{y3} - v_{y2})}{(x_3 - x_2)} \end{cases} \quad \text{formula (2).}$$

28. The image encoding apparatus according to claim 26 or 27, wherein

the determining module is specifically configured to: sort the N motion vector groups according to a preset sorting rule, to generate a candidate motion vector queue; if N is greater than or equal to a preset value, determine a preset quantity of motion vector groups in the front of the candidate motion vector queue; determine a matching error between each of the preset quantity of motion vector groups in the front and the to-be-encoded unit; and determine one motion vector group with a smallest matching error as the optimal motion vector group.

29. The apparatus according to claim 28, wherein the preset sorting rule comprises a descending order of the N encoded units.

30. The apparatus according to claim 26 or 27, wherein

the determining module is further configured to: sort the N motion vector groups according to a preset sorting rule; if N is less than a preset value, generate Q motion vector groups, wherein a sum of N and Q is greater than or equal to the preset value, and Q is a positive integer; add the Q motion vector groups to the end of the N motion vector groups, to generate a candidate motion vector queue; determine a preset quantity of motion vector groups in the front of the candidate motion vector queue; determine a matching error between each of the preset quantity of motion vector groups in the front and the to-be-encoded unit; and determine one motion vector group with a smallest matching error as the optimal motion vector group.

31. The image encoding apparatus according to claim 30, wherein

the determining module is further configured to: determine, from the adjacent encoded units, an encoded unit corresponding to an m^{th} control point in the to-be-encoded unit, wherein a distance between the encoded unit corresponding to the m^{th} control point and the m^{th} control point is less than or equal to a preset distance, and m comprises any positive integer not greater than M; determine a motion vector of the encoded unit corresponding to the m^{th} control point as a motion vector predictor of the m^{th} control point; and generate the Q motion vector groups based on the motion vector predictors of the M control points.

32. The image encoding apparatus according to claim 30, wherein

the determining module is further configured to: determine, from the adjacent encoded units, an encoded unit corresponding to an m^{th} control point in the to-be-encoded unit, wherein a distance between the encoded unit corresponding to the m^{th} control point and the m^{th} control point is less than or equal to a preset distance, and m comprises any positive integer not greater

than M; determine a motion vector of the encoded unit corresponding to the m^{th} control point as a first motion vector predictor of the m^{th} control point; generate K first motion vector groups based on first motion vector predictors of the M control points; determine a motion vector of a j^{th} encoded unit in the adjacent encoded units as a second motion vector predictor of the m^{th} control point, wherein j is any one of 1, ..., or J, J is a quantity of the adjacent encoded units, and J is a positive integer; generate L second motion vector groups based on second motion vector predictors of the M control points; and add the K first motion vector groups to the end of the L second motion vector groups, to generate the Q motion vector groups.

33. The image encoding apparatus according to any one of claims 30 to 32, wherein the determining module is further configured to: determine an eigenvalue corresponding to a q^{th} motion vector group, wherein q comprises any positive integer not greater than Q; sort the Q motion vector groups in ascending order based on eigenvalues corresponding to the Q motion vector groups; and add the sorted Q motion vector groups to the end of the sorted N motion vector groups, to generate the candidate motion vector queue.

34. The image encoding apparatus according to claim 33, wherein the determining module is further configured to: determine a difference between components, in one prediction direction, of motion vector predictors, in the q^{th} motion vector group, of adjacent control points in the M control points; compare an absolute value of the difference with a preset component threshold, wherein the preset component threshold is a range of the to-be-encoded unit in the prediction direction; and if the absolute value of the difference is less than or equal to the preset component threshold, determine the eigenvalue corresponding to the q^{th} motion vector group.

35. The image encoding apparatus according to claim 33 or 34, wherein the determining module is further configured to: determine, from the adjacent encoded units, an encoded unit corresponding to another control point, wherein a distance between the encoded unit corresponding to the another control point and the another control point is less than or equal to the preset distance, and the another control point is any control point other than the M control points in the to-be-encoded unit; determine a motion vector of the encoded unit corresponding to the another control point as a motion vector predictor of the another control point; and determine the eigenvalue corresponding to the q^{th} motion vector group by using a

third preset algorithm and based on the motion vector predictor of the another control point and motion vector predictors, in the q^{th} motion vector group, of the M control points.

36. The image encoding apparatus according to any one of claims 25 to 35, wherein the motion prediction mode of the to-be-encoded unit comprises a translation motion prediction mode or an affine motion prediction mode.

37. An image decoding apparatus, comprising:

a determining module, configured to determine N decoded units from adjacent decoded units of a to-be-decoded unit according to a first preset rule, wherein a motion prediction mode of the N decoded units is the same as that of the to-be-decoded unit, and N is 2, and the N decoded units comprise one decoded unit in an upper direction of the to-be-decoded unit and one decoded unit in a left direction of the to-be-decoded unit;

a calculation module, configured to generate an n^{th} motion vector group by using a first preset algorithm and based on a motion vector of an n^{th} decoded unit determined by the determining module, wherein n comprises any positive integer not greater than N; and

a decoding module, configured to decode a bitstream corresponding to the to-be-decoded unit, to obtain a prediction residual of each sample unit and an index identifier of an optimal motion vector group, wherein

the determining module is further configured to determine the optimal motion vector group in N motion vector groups based on the index identifier of the optimal motion vector group that is determined by the decoding module; and

the calculation module is further configured to: determine a prediction sample value of each sample unit in the to-be-decoded unit by using a second preset algorithm and based on the optimal motion vector group determined by the determining module; and determine a reconstruction sample value of each sample unit based on a sum of the prediction sample value of each sample unit and the prediction residual of each sample unit.

38. The image decoding apparatus according to claim 37, wherein

the calculation module is specifically configured to: determine motion vector predictors of M control points of the to-be-decoded unit by using the first preset algorithm and based on the motion vector of the n^{th} decoded unit determined by the determining module, sample coordinates of the n^{th} decoded unit, and sample coordinates of the M control points; and

generate the n^{th} motion vector group based on the motion vector predictors of the M control points, wherein M is a positive integer determined based on the motion prediction mode of the to-be-decoded unit.

39. The image decoding apparatus according to claim 38, wherein the M control points comprise an upper-left vertex and an upper-right vertex of the to-be-decoded unit;

the calculation module is specifically configured to determine a motion vector predictor (v_{x0}, v_{y0}) of the upper-left vertex of the to-be-decoded unit by using the following formula (1) and based on a motion vector (v_{x2}, v_{y2}) of an upper-left vertex of the n^{th} decoded unit determined by the determining module, a motion vector (v_{x3}, v_{y3}) of an upper-right vertex of the n^{th} decoded unit, a motion vector (v_{x4}, v_{y4}) of a lower-left vertex of the n^{th} decoded unit, sample coordinates (x_2, y_2) of the upper-left vertex of the n^{th} decoded unit, sample coordinates (x_3, y_3) of the upper-right vertex of the n^{th} decoded unit, sample coordinates (x_4, y_4) of the lower-left vertex of the n^{th} decoded unit, and sample coordinates (x_0, y_0) of the upper-left vertex of the to-be-decoded unit:

$$\begin{cases} v_{x0} = v_{x3} + \frac{(y_3 - y_0) \times (v_{x4} - v_{x2})}{(y_4 - y_2)} \\ v_{y0} = v_{y3} + \frac{(y_3 - y_0) \times (v_{y4} - v_{y2})}{(y_4 - y_2)} \end{cases} \quad \text{formula (1); and}$$

specifically, the calculation module is further configured to determine a motion vector predictor (v_{x1}, v_{y1}) of the upper-right vertex of the to-be-decoded unit by using the following formula (2) and based on the motion vector (v_{x2}, v_{y2}) of the upper-left vertex of the n^{th} decoded unit determined by the determining module, the motion vector (v_{x3}, v_{y3}) of the upper-right vertex of the n^{th} decoded unit, the sample coordinates (x_2, y_2) of the upper-left vertex of the n^{th} decoded unit, the sample coordinates (x_3, y_3) of the upper-right vertex of the n^{th} decoded unit, the motion vector predictor (v_{x0}, v_{y0}) of the upper-left vertex of the to-be-decoded unit, the sample coordinates (x_0, y_0) of the upper-left vertex of the to-be-decoded

unit, and sample coordinates (x_1, y_1) of the upper-left vertex of the to-be-decoded unit:

$$\begin{cases} v_{x1} = v_{x0} + \frac{(x_1 - x_0) \times (v_{x3} - v_{x2})}{(x_3 - x_2)} \\ v_{y1} = v_{y0} + \frac{(x_1 - x_0) \times (v_{y3} - v_{y2})}{(x_3 - x_2)} \end{cases} \quad \text{formula (2).}$$

40. The image decoding apparatus according to claim 38 or 39, wherein

the determining module is further configured to: sort the N motion vector groups according to a preset sorting rule, to generate a candidate motion vector queue; if N is greater than or equal to a preset value, determine a preset quantity of motion vector groups in the front of the candidate motion vector queue; and determine the optimal motion vector group in the preset quantity of motion vector groups in the front based on the index identifier of the optimal motion vector group.

41. The image decoding apparatus according to claim 40, wherein the preset sorting rule comprises a descending order of the N decoded units.

42. The image decoding apparatus according to claim 40 or 41, wherein

the determining module is further configured to: sort the N motion vector groups according to a preset sorting rule; if N is less than a preset value, generate Q motion vector groups, wherein a sum of N and Q is greater than or equal to the preset value, and Q is a positive integer; add the Q motion vector groups to the end of the N motion vector groups, to generate a candidate motion vector queue; determine a preset quantity of motion vector groups in the front of the candidate motion vector queue; and determine the optimal motion vector group in the preset quantity of motion vector groups in the front based on the index identifier of the optimal motion vector group.

43. The image decoding apparatus according to claim 42, wherein

the determining module is further configured to: determine, from the adjacent decoded units, a decoded unit corresponding to an m^{th} control point in the to-be-decoded unit, wherein a distance between the decoded unit corresponding to the m^{th} control point and the m^{th} control point is less than or equal to a preset distance, and m comprises any positive integer not greater than M; determine a motion vector of the decoded unit corresponding to the m^{th} control point as a motion vector predictor of the m^{th} control point; and generate the Q motion vector groups

based on the motion vector predictors of the M control points.

44. The image decoding apparatus according to claim 42, wherein

the determining module is further configured to: determine, from the adjacent decoded units, a decoded unit corresponding to an m^{th} control point in the to-be-decoded unit, wherein a distance between the decoded unit corresponding to the m^{th} control point and the m^{th} control point is less than or equal to a preset distance, and m comprises any positive integer not greater than M; determine a motion vector of the decoded unit corresponding to the m^{th} control point as a first motion vector predictor of the m^{th} control point; generate K first motion vector groups based on first motion vector predictors of the M control points; determine a motion vector of a j^{th} decoded unit in the adjacent decoded units as a second motion vector predictor of the m^{th} control point, wherein j is any one of 1, ..., or J, J is a quantity of the adjacent decoded units, and J is a positive integer; generate L second motion vector groups based on second motion vector predictors of the M control points; and add the K first motion vector groups to the end of the L second motion vector groups, to generate the Q motion vector groups.

45. The image decoding apparatus according to any one of claims 42 to 44, wherein

the determining module is further configured to: determine an eigenvalue corresponding to a q^{th} motion vector group, wherein q comprises any positive integer not greater than Q; sort the Q motion vector groups in ascending order based on eigenvalues corresponding to the Q motion vector groups; and add the sorted Q motion vector groups to the end of the sorted N motion vector groups, to generate the candidate motion vector queue.

46. The image decoding apparatus according to claim 45, wherein

the determining module is further configured to: determine a difference between components, in one prediction direction, of motion vector predictors, in the q^{th} motion vector group, of adjacent control points in the M control points; compare an absolute value of the difference with a preset component threshold, wherein the preset component threshold is a range of the to-be-decoded unit in the prediction direction; and if the absolute value of the difference is less than or equal to the preset component threshold, determine the eigenvalue corresponding to the q^{th} motion vector group.

47. The image decoding apparatus according to claim 45 or 46, wherein

the determining module is further configured to: determine, from the adjacent decoded

units, a decoded unit corresponding to another control point, wherein a distance between the decoded unit corresponding to the another control point and the another control point is less than or equal to the preset distance, and the another control point is any control point other than the M control points in the to-be-decoded unit; determine a motion vector of the decoded unit corresponding to the another control point as a motion vector predictor of the another control point; and determine the eigenvalue corresponding to the q^{th} motion vector group by using a third preset algorithm and based on the motion vector predictor of the another control point and motion vector predictors, in the q^{th} motion vector group, of the M control points.

48. The image decoding apparatus according to any one of claims 37 to 47, wherein the motion prediction mode of the to-be-decoded unit comprises a translation motion prediction mode or an affine motion prediction mode.

49. An image encoding apparatus, comprising a processor, a memory, a communications interface, and a bus, wherein the processor is connected to the memory and the communications interface by using the bus;

the memory is configured to store an instruction; and

the processor is configured to execute the instruction, and when the processor executes the instruction stored in the memory, the processor performs the image encoding method according to any one of claims 1 to 12.

50. An image decoding apparatus, comprising a processor, a memory, a communications interface, and a bus, wherein the processor is connected to the memory and the communications interface by using the bus;

the memory is configured to store an instruction; and

the processor is configured to execute the instruction, and when the processor executes the instruction stored in the memory, the processor performs the image decoding method according to any one of claims 13 to 24.

51. An image decoding method, comprising:

determining N decoded units from adjacent decoded units of a to-be-decoded unit according to a first preset rule, wherein a motion prediction mode of the N decoded units is the same as that of the to-be-decoded unit, and N is 2, and the N decoded units comprise one decoded unit in an upper direction of the to-be-decoded unit and one decoded unit in a left

direction of the to-be-decoded unit;

generating a quantity N of motion vector groups by using a first preset algorithm based on motion vectors of the N decoded units;

determining an optimal motion vector group based on the N motion vector groups;

determining a reconstruction sample value of each sample unit based on the optimal motion vector group.

52. The image decoding method according to claim 51, wherein the motion prediction mode is affine motion prediction; the determining N decoded units from adjacent decoded units of a to-be-decoded unit according to a first preset rule comprising:

determining a first decoded unit whose motion prediction mode is the affine motion prediction mode according to a first order in the upper direction as the decoded unit in the upper direction; and,

determining a first decoded unit whose motion prediction mode is the affine motion prediction mode according to a second order in the left direction as the decoded unit in the left direction.

53. The image decoding method according to claim 51 or 52, wherein the determining an optimal motion vector group based on the N motion vector groups comprising:

obtaining an index identifier of an optimal motion vector group;

determining the optimal motion vector group that corresponds to the index identifier from the N motion vector groups.

54. An image decoding apparatus, comprising:

a determining module, configured to determine N decoded units from adjacent decoded units of a to-be-decoded unit according to a first preset rule, wherein a motion prediction mode of the N decoded units is the same as that of the to-be-decoded unit, and N is 2, and the N decoded units comprise one decoded unit in an upper direction of the to-be-decoded unit and one decoded unit in a left direction of the to-be-decoded unit;

a calculation module, configured to generate a quantity N of motion vector groups by using a first preset algorithm based on motion vectors of the N decoded units; and

the determining module is further configured to determine an optimal motion vector group based on the N motion vector groups; and

the calculation module is further configured to determine a reconstruction sample value of each sample unit based on the optimal motion vector group.

55. The image decoding apparatus according to claim 54, wherein, the motion prediction mode is affine motion prediction; the determining module is further configured to:

determine a first decoded unit whose motion prediction mode is the affine motion prediction mode according to a first order in the upper direction as the decoded unit in the upper direction; and,

determine a first decoded unit whose motion prediction mode is the affine motion prediction mode according to a second order in the left direction as the decoded unit in the left direction.

56. The image decoding apparatus according to claim 54 or 55, further comprising:

a decoding module, configured to decode a bitstream corresponding to the to-be-decoded unit, to obtain an index identifier of an optimal motion vector group; and

the determining module is further configured to determine the optimal motion vector group that corresponds to the index identifier from the N motion vector groups.

57. An image decoding method, wherein the method comprises:

determining a first decoded unit from adjacent decoded units on a left side of a to-be-decoded unit;

determining a second decoded unit from adjacent decoded units above the to-be-decoded unit, wherein a motion prediction mode of the first decoded unit and the second decoded unit is the same as that of the to-be-decoded unit;

determining first motion vector predictors of M control points based on motion vectors of a plurality of vertexes of the first decoded unit, sample coordinates of the plurality of vertexes of the first decoded unit, and sample coordinates of the M control points of the to-be-decoded unit, and generating a first motion vector group based on the first motion vector predictors of the M control points;

determining second motion vector predictors of the M control points based on motion vectors of a plurality of vertexes of the second decoded unit, sample coordinates of the plurality of vertexes of the second decoded unit, and the sample coordinates of the M control points of

the to-be-decoded unit, and generating a second motion vector group based on the second motion vector predictors of the M control points;

determining a target motion vector group from a plurality of motion vector groups, wherein the plurality of motion vector groups comprise the first motion vector group and the second motion vector group; and

predicting the to-be-decoded unit based on the target motion vector group.

58. The method according to claim 57, wherein the motion prediction mode comprises an affine motion prediction mode.

59. The method according to claim 57 or 58, wherein the determining a first decoded unit from adjacent decoded units on a left side of a to-be-decoded unit comprises:

determining, from two adjacent decoded units on the left side of the to-be-decoded unit, a decoded unit that is ranked first and that is found according to a first sequence and whose motion prediction mode is the same as that of the to-be-decoded unit as the first decoded unit; and

the determining a second decoded unit from adjacent decoded units above the to-be-decoded unit comprises:

determining, from three adjacent decoded units above the to-be-decoded unit, a decoded unit that is ranked first and that is found according to a second sequence and whose motion prediction mode is the same as that of the to-be-decoded unit as the second decoded unit.

60. The method according to any one of claims 57 to 59, wherein the determining a target motion vector group from a plurality of motion vector groups comprises:

generating Q motion vector groups, wherein Q is a first value; and

determining the target motion vector group from the Q motion vector groups, the first motion vector group, and the second motion vector group.

61. The method according to claim 60, wherein $Q + 2$ is greater than or equal to a preset value.

62. The method according to claim 60 or 61, wherein the generating Q motion vector groups comprises:

based on motion vectors of decoded units respectively corresponding to the M control points of the to-be-decoded unit,

generating the Q motion vector groups.

63. The method according to any one of claims 57 to 62, wherein the determining a target motion vector group from a plurality of motion vector groups comprises:

obtaining an index identifier of an optimal motion vector group; and

determining the target motion vector group from the plurality of motion vector groups based on the index identifier of the optimal motion vector group.

64. The method according to any one of claims 57 to 63, wherein M is a positive integer determined based on the motion prediction mode of the to-be-decoded unit.

65. The method according to any one of claims 57 to 64, wherein the determining first motion vector predictors of M control points based on motion vectors of a plurality of vertexes of the first decoded unit, sample coordinates of the plurality of vertexes of the first decoded unit, and sample coordinates of the M control points of the to-be-decoded unit comprises:

determining a motion vector predictor (v_{x0}, v_{y0}) of an upper-left vertex of the to-be-decoded unit by using the following formula (1) and based on a motion vector (v_{x2}, v_{y2}) of an upper-left vertex of the first decoded unit, a motion vector (v_{x3}, v_{y3}) of an upper-right vertex of the first decoded unit, a motion vector (v_{x4}, v_{y4}) of a lower-left vertex of the first decoded unit, sample coordinates (x_2, y_2) of the upper-left vertex of the first decoded unit, sample coordinates (x_3, y_3) of the upper-right vertex of the first decoded unit, sample coordinates (x_4, y_4) of the lower-left vertex of the first decoded unit, and sample coordinates (x_0, y_0) of the upper-left vertex of the to-be-decoded unit, wherein the upper-left vertex of the to-be-decoded unit belongs to the M control points;

$$\begin{cases} v_{x0} = v_{x3} + \frac{(y_3 - y_0) \times (v_{x4} - v_{x2})}{(y_4 - y_2)} \\ v_{y0} = v_{y3} + \frac{(y_3 - y_0) \times (v_{y4} - v_{y2})}{(y_4 - y_2)} \end{cases} \quad \text{formula (1).}$$

66. The method according to any one of claims 57 to 64, wherein the determining second motion vector predictors of the M control points based on motion vectors of a plurality of vertexes of the second decoded unit, sample coordinates of the plurality of vertexes of the second decoded unit, and the sample coordinates of the M control points of the to-be-decoded

unit comprises:

determining a motion vector predictor (v_{x0}, v_{y0}) of an upper-left vertex of the to-be-decoded unit by using the following formula (1) and based on a motion vector (v_{x2}, v_{y2}) of an upper-left vertex of the second decoded unit, a motion vector (v_{x3}, v_{y3}) of an upper-right vertex of the second decoded unit, a motion vector (v_{x4}, v_{y4}) of a lower-left vertex of the second decoded unit, sample coordinates (x_2, y_2) of the upper-left vertex of the second decoded unit, sample coordinates (x_3, y_3) of the upper-right vertex of the second decoded unit, sample coordinates (x_4, y_4) of the lower-left vertex of the second decoded unit, and sample coordinates (x_0, y_0) of the upper-left vertex of the to-be-decoded unit, wherein the upper-left vertex of the to-be-decoded unit belongs to the M control points;

$$\begin{cases} v_{x0} = v_{x3} + \frac{(y_3 - y_0) \times (v_{x4} - v_{x2})}{(y_4 - y_2)} \\ v_{y0} = v_{y3} + \frac{(y_3 - y_0) \times (v_{y4} - v_{y2})}{(y_4 - y_2)} \end{cases} \quad \text{formula (1).}$$

67. An image encoding method, comprising:

determining a first encoded unit from adjacent encoded units on a left side of a to-be-encoded unit;

determining a second encoded unit from adjacent encoded units above the to-be-encoded unit, wherein a motion prediction mode of the first encoded unit and the second encoded unit is the same as that of the to-be-encoded unit;

determining first motion vector predictors of M control points based on motion vectors of a plurality of vertexes of the first encoded unit, sample coordinates of the plurality of vertexes of the first encoded unit, and sample coordinates of the M control points of the to-be-encoded unit, and generating a first motion vector group based on the first motion vector predictors of the M control points;

determining second motion vector predictors of the M control points based on motion vectors of a plurality of vertexes of the second encoded unit, sample coordinates of the plurality of vertexes of the second encoded unit, and the sample coordinates of the M control points of

the to-be-encoded unit, and generating a second motion vector group based on the second motion vector predictors of the M control points;

determining a target motion vector group from a plurality of motion vector groups, wherein the plurality of motion vector groups comprise the first motion vector group and the second motion vector group; and

predicting the to-be-encoded unit based on the target motion vector group.

68. The method according to claim 67, wherein the motion prediction mode comprises an affine motion prediction mode.

69. The method according to claim 67 or 68, wherein the determining a first encoded unit from adjacent encoded units on a left side of a to-be-encoded unit comprises:

determining, from two adjacent encoded units on the left side of the to-be-encoded unit, an encoded unit that is ranked first and that is found according to a first sequence and whose motion prediction mode is the same as that of the to-be-encoded unit as the first encoded unit; and

the determining a second encoded unit from adjacent encoded units above the to-be-encoded unit comprises:

determining, from three adjacent encoded units above the to-be-encoded unit, an encoded unit that is ranked first and that is found according to a second sequence and whose motion prediction mode is the same as that of the to-be-encoded unit as the second encoded unit.

70. The method according to any one of claims 67 to 69, wherein the determining a target motion vector group from a plurality of motion vector groups comprises:

generating Q motion vector groups, wherein Q is a first value; and

determining the target motion vector group from the Q motion vector groups, the first motion vector group, and the second motion vector group.

71. The method according to claim 70, wherein $Q + 2$ is greater than or equal to a preset value.

72. The method according to any one of claims 70 to 71, wherein the generating Q motion vector groups comprises:

based on motion vectors of encoded units respectively corresponding to the M control points of the to-be-encoded unit,

generating the Q motion vector groups.

73. The method according to any one of claims 67 to 72, wherein the method further comprises:

determining an index identifier of the target motion vector group based on the plurality of motion vector groups and the target motion vector group; and

encoding the index identifier into a bitstream.

74. The method according to any one of claims 67 to 73, wherein M is a positive integer determined based on the motion prediction mode of the to-be-encoded unit.

75. The method according to any one of claims 67 to 74, wherein the determining first motion vector predictors of M control points based on motion vectors of a plurality of vertexes of the first encoded unit, sample coordinates of the plurality of vertexes of the first encoded unit, and sample coordinates of the M control points of the to-be-encoded unit comprises:

determining a motion vector predictor (v_{x0}, v_{y0}) of an upper-left vertex of the to-be-encoded unit by using the following formula (1) and based on a motion vector (v_{x2}, v_{y2}) of an upper-left vertex of the first encoded unit, a motion vector (v_{x3}, v_{y3}) of an upper-right vertex of the first encoded unit, a motion vector (v_{x4}, v_{y4}) of a lower-left vertex of the first encoded unit, sample coordinates (x_2, y_2) of the upper-left vertex of the first encoded unit, sample coordinates (x_3, y_3) of the upper-right vertex of the first encoded unit, sample coordinates (x_4, y_4) of the lower-left vertex of the first encoded unit, and sample coordinates (x_0, y_0) of the upper-left vertex of the to-be-encoded unit, wherein the upper-left vertex of the to-be-encoded unit belongs to the M control points;

$$\begin{cases} v_{x0} = v_{x3} + \frac{(y_3 - y_0) \times (v_{x4} - v_{x2})}{(y_4 - y_2)} \\ v_{y0} = v_{y3} + \frac{(y_3 - y_0) \times (v_{y4} - v_{y2})}{(y_4 - y_2)} \end{cases} \quad \text{formula (1).}$$

76. The method according to any one of claims 67 to 74, wherein the determining second motion vector predictors of the M control points based on motion vectors of a plurality of vertexes of the second encoded unit, sample coordinates of the plurality of vertexes of the

second encoded unit, and the sample coordinates of the M control points of the to-be-encoded unit comprises:

determining a motion vector predictor (v_{x0}, v_{y0}) of an upper-left vertex of the to-be-encoded unit by using the following formula (1) and based on a motion vector (v_{x2}, v_{y2}) of an upper-left vertex of the second encoded unit, a motion vector (v_{x3}, v_{y3}) of an upper-right vertex of the second encoded unit, a motion vector (v_{x4}, v_{y4}) of a lower-left vertex of the second encoded unit, sample coordinates (x_2, y_2) of the upper-left vertex of the second encoded unit, sample coordinates (x_3, y_3) of the upper-right vertex of the second encoded unit, sample coordinates (x_4, y_4) of the lower-left vertex of the second encoded unit, and sample coordinates (x_0, y_0) of the upper-left vertex of the to-be-encoded unit, wherein the upper-left vertex of the to-be-encoded unit belongs to the M control points;

$$\begin{cases} v_{x0} = v_{x3} + \frac{(y_3 - y_0) \times (v_{x4} - v_{x2})}{(y_4 - y_2)} \\ v_{y0} = v_{y3} + \frac{(y_3 - y_0) \times (v_{y4} - v_{y2})}{(y_4 - y_2)} \end{cases} \quad \text{formula (1).}$$

77. An image decoding apparatus, comprising:

a determining module, configured to determine a first decoded unit from adjacent decoded units on a left side of a to-be-decoded unit; and further configured to determine a second decoded unit from adjacent decoded units above the to-be-decoded unit, wherein a motion prediction mode of the first decoded unit and the second decoded unit is the same as that of the to-be-decoded unit; and

a calculation module, configured to determine first motion vector predictors of M control points based on motion vectors of a plurality of vertexes of the first decoded unit, sample coordinates of the plurality of vertexes of the first decoded unit, and sample coordinates of the M control points of the to-be-decoded unit, and generate a first motion vector group based on the first motion vector predictors of the M control points; and further configured to determine second motion vector predictors of the M control points based on motion vectors of a plurality of vertexes of the second decoded unit, sample coordinates of the plurality of vertexes of the

second decoded unit, and the sample coordinates of the M control points of the to-be-decoded unit, and generate a second motion vector group based on the second motion vector predictors of the M control points; wherein

the determining module is further configured to determine a target motion vector group from a plurality of motion vector groups, wherein the plurality of motion vector groups comprise the first motion vector group and the second motion vector group; and

the calculation module is further configured to predict the to-be-decoded unit based on the target motion vector group.

78. The apparatus according to claim 77, wherein the motion prediction mode comprises an affine motion prediction mode.

79. The apparatus according to claim 77 or 78, wherein the determining module is specifically configured to:

determine, from two adjacent decoded units on the left side of the to-be-decoded unit, a decoded unit that is ranked first and that is found according to a first sequence and whose motion prediction mode is the same as that of the to-be-decoded unit as the first decoded unit; and

determine, from three adjacent decoded units above the to-be-decoded unit, a decoded unit that is ranked first and that is found according to a second sequence and whose motion prediction mode is the same as that of the to-be-decoded unit as the second decoded unit.

80. The apparatus according to any one of claims 77 to 79, wherein the determining module is specifically configured to:

generate Q motion vector groups, wherein Q is a first value, and $Q + 2$ is greater than or equal to a preset value; and

determine the target motion vector group from the Q motion vector groups, the first motion vector group, and the second motion vector group.

81. The apparatus according to any one of claims 77 to 80, wherein the determining module is further specifically configured to:

based on motion vectors of decoded units respectively corresponding to the M control points of the to-be-decoded unit,

generate the Q motion vector groups.

82. The apparatus according to any one of claims 77 to 81, wherein the determining module

is specifically configured to:

obtain an index identifier of an optimal motion vector group; and

determine the target motion vector group from the plurality of motion vector groups based on the index identifier of the optimal motion vector group.

83. The apparatus according to any one of claims 77 to 82, wherein M is a positive integer determined based on the motion prediction mode of the to-be-decoded unit.

84. The apparatus according to any one of claims 77 to 83, wherein the calculation module is specifically configured to:

determine a motion vector predictor (v_{x0}, v_{y0}) of an upper-left vertex of the to-be-decoded unit by using the following formula (1) and based on a motion vector (v_{x2}, v_{y2}) of an upper-left vertex of the first decoded unit, a motion vector (v_{x3}, v_{y3}) of an upper-right vertex of the first decoded unit, a motion vector (v_{x4}, v_{y4}) of a lower-left vertex of the first decoded unit, sample coordinates (x_2, y_2) of the upper-left vertex of the first decoded unit, sample coordinates (x_3, y_3) of the upper-right vertex of the first decoded unit, sample coordinates (x_4, y_4) of the lower-left vertex of the first decoded unit, and sample coordinates (x_0, y_0) of the upper-left vertex of the to-be-decoded unit, wherein the upper-left vertex of the to-be-decoded unit belongs to the M control points; or

determine a motion vector predictor (v_{x0}, v_{y0}) of an upper-left vertex of the to-be-decoded unit by using the following formula (1) and based on a motion vector (v_{x2}, v_{y2}) of an upper-left vertex of the second decoded unit, a motion vector (v_{x3}, v_{y3}) of an upper-right vertex of the second decoded unit, a motion vector (v_{x4}, v_{y4}) of a lower-left vertex of the second decoded unit, sample coordinates (x_2, y_2) of the upper-left vertex of the second decoded unit, sample coordinates (x_3, y_3) of the upper-right vertex of the second decoded unit, sample coordinates (x_4, y_4) of the lower-left vertex of the second decoded unit, and sample coordinates (x_0, y_0) of the upper-left vertex of the to-be-decoded unit, wherein the upper-left

vertex of the to-be-decoded unit belongs to the M control points;

$$\begin{cases} v_{x0} = v_{x3} + \frac{(y_3 - y_0) \times (v_{x4} - v_{x2})}{(y_4 - y_2)} \\ v_{y0} = v_{y3} + \frac{(y_3 - y_0) \times (v_{y4} - v_{y2})}{(y_4 - y_2)} \end{cases} \quad \text{formula (1).}$$

85. An image encoding apparatus, comprising:

a determining module, configured to determine a first encoded unit from adjacent encoded units on a left side of a to-be-encoded unit; and further configured to determine a second encoded unit from adjacent encoded units above the to-be-encoded unit, wherein a motion prediction mode of the first encoded unit and the second encoded unit is the same as that of the to-be-encoded unit; and

a calculation module, configured to determine first motion vector predictors of M control points based on motion vectors of a plurality of vertexes of the first encoded unit, sample coordinates of the plurality of vertexes of the first encoded unit, and sample coordinates of the M control points of the to-be-encoded unit, and generate a first motion vector group based on the first motion vector predictors of the M control points; and further configured to determine second motion vector predictors of the M control points based on motion vectors of a plurality of vertexes of the second encoded unit, sample coordinates of the plurality of vertexes of the second encoded unit, and the sample coordinates of the M control points of the to-be-encoded unit, and generate a second motion vector group based on the second motion vector predictors of the M control points; wherein

the determining module is further configured to determine a target motion vector group from a plurality of motion vector groups, wherein the plurality of motion vector groups comprise the first motion vector group and the second motion vector group; and

the calculation module is further configured to predict the to-be-encoded unit based on the target motion vector group.

86. The apparatus according to claim 85, wherein the motion prediction mode comprises an affine motion prediction mode.

87. The apparatus according to claim 85 or 86, wherein the determining module is specifically configured to:

determine, from two adjacent encoded units on the left side of the to-be-encoded unit, an encoded unit that is ranked first and that is found according to a first sequence and whose motion prediction mode is the same as that of the to-be-encoded unit as the first encoded unit; and

determine, from three adjacent encoded units above the to-be-encoded unit, an encoded unit that is ranked first and that is found according to a second sequence and whose motion prediction mode is the same as that of the to-be-encoded unit as the second encoded unit.

88. The apparatus according to any one of claims 85 to 87, wherein the determining module is specifically configured to:

generate Q motion vector groups, wherein Q is a first value, and $Q + 2$ is greater than or equal to a preset value; and

determine the target motion vector group from the Q motion vector groups, the first motion vector group, and the second motion vector group.

89. The apparatus according to any one of claims 85 to 88, wherein the determining module is specifically configured to:

based on motion vectors of encoded units respectively corresponding to the M control points of the to-be-encoded unit,

generate the Q motion vector groups.

90. The apparatus according to any one of claims 85 to 89, wherein the apparatus further comprises an encoding module, configured to determine an index identifier of the target motion vector group based on the plurality of motion vector groups and the target motion vector group, and encode the index identifier into a bitstream.

91. The apparatus according to any one of claims 85 to 90, wherein M is a positive integer determined based on the motion prediction mode of the to-be-encoded unit.

92. The apparatus according to any one of claims 85 to 91, wherein the calculation module is specifically configured to:

determine a motion vector predictor (v_{x0}, v_{y0}) of an upper-left vertex of the to-be-encoded unit by using the following formula (1) and based on a motion vector (v_{x2}, v_{y2}) of an upper-left vertex of the first encoded unit, a motion vector (v_{x3}, v_{y3}) of an upper-right vertex

of the first encoded unit, a motion vector (v_{x4}, v_{y4}) of a lower-left vertex of the first encoded unit, sample coordinates (x_2, y_2) of the upper-left vertex of the first encoded unit, sample coordinates (x_3, y_3) of the upper-right vertex of the first encoded unit, sample coordinates (x_4, y_4) of the lower-left vertex of the first encoded unit, and sample coordinates (x_0, y_0) of the upper-left vertex of the to-be-encoded unit, wherein the upper-left vertex of the to-be-encoded unit belongs to the M control points; or

determine a motion vector predictor (v_{x0}, v_{y0}) of an upper-left vertex of the to-be-encoded unit by using the following formula (1) and based on a motion vector (v_{x2}, v_{y2}) of an upper-left vertex of the second encoded unit, a motion vector (v_{x3}, v_{y3}) of an upper-right vertex of the second encoded unit, a motion vector (v_{x4}, v_{y4}) of a lower-left vertex of the second encoded unit, sample coordinates (x_2, y_2) of the upper-left vertex of the second encoded unit, sample coordinates (x_3, y_3) of the upper-right vertex of the second encoded unit, sample coordinates (x_4, y_4) of the lower-left vertex of the second encoded unit, and sample coordinates (x_0, y_0) of the upper-left vertex of the to-be-encoded unit, wherein the upper-left vertex of the to-be-encoded unit belongs to the M control points;

$$\begin{cases} v_{x0} = v_{x3} + \frac{(y_3 - y_0) \times (v_{x4} - v_{x2})}{(y_4 - y_2)} \\ v_{y0} = v_{y3} + \frac{(y_3 - y_0) \times (v_{y4} - v_{y2})}{(y_4 - y_2)} \end{cases} \quad \text{formula (1).}$$

93. An image decoding method, wherein the method comprises:

determining a first decoded unit from adjacent decoded units on a left side of a to-be-decoded unit;

determining a second decoded unit from adjacent decoded units above the to-be-decoded unit, wherein a motion prediction mode of the first decoded unit and the second decoded unit is the same as that of the to-be-decoded unit;

determining first motion vector predictors of M control points based on motion vectors of

a plurality of vertexes of the first decoded unit, sample coordinates of the plurality of vertexes of the first decoded unit, and sample coordinates of the M control points of the to-be-decoded unit, and generating a first motion vector predictor group based on the first motion vector predictors of the M control points;

determining second motion vector predictors of the M control points based on motion vectors of a plurality of vertexes of the second decoded unit, sample coordinates of the plurality of vertexes of the second decoded unit, and the sample coordinates of the M control points of the to-be-decoded unit, and generating a second motion vector predictor group based on the second motion vector predictors of the M control points;

determining a target motion vector predictor group from a plurality of motion vector predictor groups, wherein the plurality of motion vector predictor groups comprise the first motion vector predictor group and the second motion vector predictor group; and

predicting the to-be-decoded unit based on the target motion vector predictor group.

94. The method according to claim 93, wherein the motion prediction mode comprises an affine motion prediction mode.

95. The method according to claim 93 or 94, wherein the determining a first decoded unit from adjacent decoded units on a left side of a to-be-decoded unit comprises:

determining, from two adjacent decoded units on the left side of the to-be-decoded unit, a decoded unit that is ranked first and that is found according to a first sequence and whose motion prediction mode is the same as that of the to-be-decoded unit as the first decoded unit; and

the determining a second decoded unit from adjacent decoded units above the to-be-decoded unit comprises:

determining, from three adjacent decoded units above the to-be-decoded unit, a decoded unit that is ranked first and that is found according to a second sequence and whose motion prediction mode is the same as that of the to-be-decoded unit as the second decoded unit.

96. The method according to any one of claims 93 to 95, wherein the determining a target motion vector predictor group from a plurality of motion vector predictor groups comprises:

generating Q motion vector predictor groups, wherein Q is a first value; and

determining the target motion vector predictor group from the Q motion vector predictor groups, the first motion vector predictor group, and the second motion vector predictor group.

97. The method according to claim 96, wherein $Q + 2$ is greater than or equal to a preset value.

98. The method according to claim 96 or 97, wherein the generating Q motion vector predictor groups comprises:

based on motion vectors of decoded units respectively corresponding to the M control points of the to-be-decoded unit,

generating the Q motion vector predictor groups.

99. The method according to any one of claims 93 to 98, wherein the determining a target motion vector predictor group from a plurality of motion vector predictor groups comprises:

obtaining an index identifier of an optimal motion vector predictor group; and

determining the target motion vector predictor group from the plurality of motion vector predictor groups based on the index identifier of the optimal motion vector predictor group.

100. The method according to any one of claims 93 to 99, wherein M is a positive integer determined based on the motion prediction mode of the to-be-decoded unit.

101. The method according to any one of claims 93 to 100, wherein the determining first motion vector predictors of M control points based on motion vectors of a plurality of vertexes of the first decoded unit, sample coordinates of the plurality of vertexes of the first decoded unit, and sample coordinates of the M control points of the to-be-decoded unit comprises:

determining a motion vector predictor (v_{x0}, v_{y0}) of an upper-left vertex of the to-be-decoded unit by using the following formula (1) and based on a motion vector (v_{x2}, v_{y2}) of an upper-left vertex of the first decoded unit, a motion vector (v_{x3}, v_{y3}) of an upper-right vertex of the first decoded unit, a motion vector (v_{x4}, v_{y4}) of a lower-left vertex of the first decoded unit, sample coordinates (x_2, y_2) of the upper-left vertex of the first decoded unit, sample coordinates (x_3, y_3) of the upper-right vertex of the first decoded unit, sample coordinates (x_4, y_4) of the lower-left vertex of the first decoded unit, and sample coordinates (x_0, y_0) of the upper-left vertex of the to-be-decoded unit, wherein the upper-left vertex of the to-be-decoded unit belongs to the M control points;

$$\begin{cases} v_{x0} = v_{x3} + \frac{(y_3 - y_0) \times (v_{x4} - v_{x2})}{(y_4 - y_2)} \\ v_{y0} = v_{y3} + \frac{(y_3 - y_0) \times (v_{y4} - v_{y2})}{(y_4 - y_2)} \end{cases} \quad \text{formula (1).}$$

102. The method according to any one of claims 93 to 101, wherein the determining second motion vector predictors of the M control points based on motion vectors of a plurality of vertexes of the second decoded unit, sample coordinates of the plurality of vertexes of the second decoded unit, and the sample coordinates of the M control points of the to-be-decoded unit comprises:

determining a motion vector predictor (v_{x0}, v_{y0}) of an upper-left vertex of the to-be-decoded unit by using the following formula (1) and based on a motion vector (v_{x2}, v_{y2}) of an upper-left vertex of the second decoded unit, a motion vector (v_{x3}, v_{y3}) of an upper-right vertex of the second decoded unit, a motion vector (v_{x4}, v_{y4}) of a lower-left vertex of the second decoded unit, sample coordinates (x_2, y_2) of the upper-left vertex of the second decoded unit, sample coordinates (x_3, y_3) of the upper-right vertex of the second decoded unit, sample coordinates (x_4, y_4) of the lower-left vertex of the second decoded unit, and sample coordinates (x_0, y_0) of the upper-left vertex of the to-be-decoded unit, wherein the upper-left vertex of the to-be-decoded unit belongs to the M control points;

$$\begin{cases} v_{x0} = v_{x3} + \frac{(y_3 - y_0) \times (v_{x4} - v_{x2})}{(y_4 - y_2)} \\ v_{y0} = v_{y3} + \frac{(y_3 - y_0) \times (v_{y4} - v_{y2})}{(y_4 - y_2)} \end{cases} \quad \text{formula (1).}$$

103. An image encoding method, comprising:

determining a first encoded unit from adjacent encoded units on a left side of a to-be-encoded unit;

determining a second encoded unit from adjacent encoded units above the to-be-encoded unit, wherein a motion prediction mode of the first encoded unit and the second encoded unit is the same as that of the to-be-encoded unit;

determining first motion vector predictors of M control points based on motion vectors of a plurality of vertexes of the first encoded unit, sample coordinates of the plurality of vertexes of the first encoded unit, and sample coordinates of the M control points of the to-be-encoded unit, and generating a first motion vector predictor group based on the first motion vector predictors of the M control points;

determining second motion vector predictors of the M control points based on motion vectors of a plurality of vertexes of the second encoded unit, sample coordinates of the plurality of vertexes of the second encoded unit, and the sample coordinates of the M control points of the to-be-encoded unit, and generating a second motion vector predictor group based on the second motion vector predictors of the M control points;

determining a target motion vector predictor group from a plurality of motion vector predictor groups, wherein the plurality of motion vector predictor groups comprise the first motion vector predictor group and the second motion vector predictor group; and

predicting the to-be-encoded unit based on the target motion vector predictor group.

104. The method according to claim 103, wherein the motion prediction mode comprises an affine motion prediction mode.

105. The method according to claim 103 or 104, wherein the determining a first encoded unit from adjacent encoded units on a left side of a to-be-encoded unit comprises:

determining, from two adjacent encoded units on the left side of the to-be-encoded unit, an encoded unit that is ranked first and that is found according to a first sequence and whose motion prediction mode is the same as that of the to-be-encoded unit as the first encoded unit; and

the determining a second encoded unit from adjacent encoded units above the to-be-encoded unit comprises:

determining, from three adjacent encoded units above the to-be-encoded unit, an encoded unit that is ranked first and that is found according to a second sequence and whose motion prediction mode is the same as that of the to-be-encoded unit as the second encoded unit.

106. The method according to any one of claims 103 to 105, wherein the determining a target motion vector predictor group from a plurality of motion vector predictor groups comprises:

generating Q motion vector predictor groups, wherein Q is a first value; and
determining the target motion vector predictor group from the Q motion vector predictor groups, the first motion vector predictor group, and the second motion vector predictor group.

107. The method according to claim 106, wherein $Q + 2$ is greater than or equal to a preset value.

108. The method according to any one of claims 106 to 107, wherein the generating Q motion vector predictor groups comprises:

based on motion vectors of encoded units respectively corresponding to the M control points of the to-be-encoded unit,

generating the Q motion vector predictor groups.

109. The method according to any one of claims 103 to 108, wherein the method further comprises:

determining an index identifier of the target motion vector predictor group based on the plurality of motion vector predictor groups and the target motion vector predictor group; and

encoding the index identifier into a bitstream.

110. The method according to any one of claims 103 to 109, wherein M is a positive integer determined based on the motion prediction mode of the to-be-encoded unit.

111. The method according to any one of claims 103 to 110, wherein the determining first motion vector predictors of M control points based on motion vectors of a plurality of vertexes of the first encoded unit, sample coordinates of the plurality of vertexes of the first encoded unit, and sample coordinates of the M control points of the to-be-encoded unit comprises:

determining a motion vector predictor (v_{x0}, v_{y0}) of an upper-left vertex of the to-be-encoded unit by using the following formula (1) and based on a motion vector (v_{x2}, v_{y2}) of an upper-left vertex of the first encoded unit, a motion vector (v_{x3}, v_{y3}) of an upper-right vertex of the first encoded unit, a motion vector (v_{x4}, v_{y4}) of a lower-left vertex of the first encoded unit, sample coordinates (x_2, y_2) of the upper-left vertex of the first encoded unit, sample coordinates (x_3, y_3) of the upper-right vertex of the first encoded unit, sample coordinates

(x_4, y_4) of the lower-left vertex of the first encoded unit, and sample coordinates (x_0, y_0) of the upper-left vertex of the to-be-encoded unit, wherein the upper-left vertex of the to-be-encoded unit belongs to the M control points;

$$\begin{cases} v_{x0} = v_{x3} + \frac{(y_3 - y_0) \times (v_{x4} - v_{x2})}{(y_4 - y_2)} \\ v_{y0} = v_{y3} + \frac{(y_3 - y_0) \times (v_{y4} - v_{y2})}{(y_4 - y_2)} \end{cases} \quad \text{formula (1).}$$

112. The method according to any one of claims 103 to 110, wherein the determining second motion vector predictors of the M control points based on motion vectors of a plurality of vertexes of the second encoded unit, sample coordinates of the plurality of vertexes of the second encoded unit, and the sample coordinates of the M control points of the to-be-encoded unit comprises:

determining a motion vector predictor (v_{x0}, v_{y0}) of an upper-left vertex of the to-be-encoded unit by using the following formula (1) and based on a motion vector (v_{x2}, v_{y2}) of an upper-left vertex of the second encoded unit, a motion vector (v_{x3}, v_{y3}) of an upper-right vertex of the second encoded unit, a motion vector (v_{x4}, v_{y4}) of a lower-left vertex of the second encoded unit, sample coordinates (x_2, y_2) of the upper-left vertex of the second encoded unit, sample coordinates (x_3, y_3) of the upper-right vertex of the second encoded unit, sample coordinates (x_4, y_4) of the lower-left vertex of the second encoded unit, and sample coordinates (x_0, y_0) of the upper-left vertex of the to-be-encoded unit, wherein the upper-left vertex of the to-be-encoded unit belongs to the M control points;

$$\begin{cases} v_{x0} = v_{x3} + \frac{(y_3 - y_0) \times (v_{x4} - v_{x2})}{(y_4 - y_2)} \\ v_{y0} = v_{y3} + \frac{(y_3 - y_0) \times (v_{y4} - v_{y2})}{(y_4 - y_2)} \end{cases} \quad \text{formula (1).}$$

113. An image decoding apparatus, comprising:

a determining module, configured to determine a first decoded unit from adjacent decoded units on a left side of a to-be-decoded unit; and further configured to determine a second

decoded unit from adjacent decoded units above the to-be-decoded unit, wherein a motion prediction mode of the first decoded unit and the second decoded unit is the same as that of the to-be-decoded unit; and

a calculation module, configured to determine first motion vector predictors of M control points based on motion vectors of a plurality of vertexes of the first decoded unit, sample coordinates of the plurality of vertexes of the first decoded unit, and sample coordinates of the M control points of the to-be-decoded unit, and generate a first motion vector predictor group based on the first motion vector predictors of the M control points; and further configured to determine second motion vector predictors of the M control points based on motion vectors of a plurality of vertexes of the second decoded unit, sample coordinates of the plurality of vertexes of the second decoded unit, and the sample coordinates of the M control points of the to-be-decoded unit, and generate a second motion vector predictor group based on the second motion vector predictors of the M control points; wherein

the determining module is further configured to determine a target motion vector predictor group from a plurality of motion vector predictor groups, wherein the plurality of motion vector predictor groups comprise the first motion vector predictor group and the second motion vector predictor group; and

the calculation module is further configured to predict the to-be-decoded unit based on the target motion vector predictor group.

114. The apparatus according to claim 113, wherein the motion prediction mode comprises an affine motion prediction mode.

115. The apparatus according to claim 113 or 114, wherein the determining module is specifically configured to:

determine, from two adjacent decoded units on the left side of the to-be-decoded unit, a decoded unit that is ranked first and that is found according to a first sequence and whose motion prediction mode is the same as that of the to-be-decoded unit as the first decoded unit; and

determine, from three adjacent decoded units above the to-be-decoded unit, a decoded unit that is ranked first and that is found according to a second sequence and whose motion prediction mode is the same as that of the to-be-decoded unit as the second decoded unit.

116. The apparatus according to any one of claims 113 to 115, wherein the determining

module is specifically configured to:

generate Q motion vector predictor groups, wherein Q is a first value, and Q + 2 is greater than or equal to a preset value; and

determine the target motion vector predictor group from the Q motion vector predictor groups, the first motion vector predictor group, and the second motion vector predictor group.

117. The apparatus according to claim 116, wherein the determining module is further specifically configured to:

based on motion vectors of decoded units respectively corresponding to the M control points of the to-be-decoded unit,

generate the Q motion vector predictor groups.

118. The apparatus according to any one of claims 113 to 117, wherein the determining module is specifically configured to:

obtain an index identifier of an optimal motion vector predictor group; and

determine the target motion vector predictor group from the plurality of motion vector predictor groups based on the index identifier of the optimal motion vector predictor group.

119. The apparatus according to any one of claims 113 to 118, wherein M is a positive integer determined based on the motion prediction mode of the to-be-decoded unit.

120. The apparatus according to any one of claims 113 to 119, wherein the calculation module is specifically configured to:

determine a motion vector predictor (v_{x0}, v_{y0}) of an upper-left vertex of the to-be-decoded unit by using the following formula (1) and based on a motion vector (v_{x2}, v_{y2}) of an upper-left vertex of the first decoded unit, a motion vector (v_{x3}, v_{y3}) of an upper-right vertex of the first decoded unit, a motion vector (v_{x4}, v_{y4}) of a lower-left vertex of the first decoded unit, sample coordinates (x_2, y_2) of the upper-left vertex of the first decoded unit, sample coordinates (x_3, y_3) of the upper-right vertex of the first decoded unit, sample coordinates (x_4, y_4) of the lower-left vertex of the first decoded unit, and sample coordinates (x_0, y_0) of the upper-left vertex of the to-be-decoded unit, wherein the upper-left vertex of the to-be-

decoded unit belongs to the M control points; or

determine a motion vector predictor (v_{x0}, v_{y0}) of an upper-left vertex of the to-be-decoded unit by using the following formula (1) and based on a motion vector (v_{x2}, v_{y2}) of an upper-left vertex of the second decoded unit, a motion vector (v_{x3}, v_{y3}) of an upper-right vertex of the second decoded unit, a motion vector (v_{x4}, v_{y4}) of a lower-left vertex of the second decoded unit, sample coordinates (x_2, y_2) of the upper-left vertex of the second decoded unit, sample coordinates (x_3, y_3) of the upper-right vertex of the second decoded unit, sample coordinates (x_4, y_4) of the lower-left vertex of the second decoded unit, and sample coordinates (x_0, y_0) of the upper-left vertex of the to-be-decoded unit, wherein the upper-left vertex of the to-be-decoded unit belongs to the M control points;

$$\begin{cases} v_{x0} = v_{x3} + \frac{(y_3 - y_0) \times (v_{x4} - v_{x2})}{(y_4 - y_2)} \\ v_{y0} = v_{y3} + \frac{(y_3 - y_0) \times (v_{y4} - v_{y2})}{(y_4 - y_2)} \end{cases} \quad \text{formula (1).}$$

121. An image encoding apparatus, comprising:

a determining module, configured to determine a first encoded unit from adjacent encoded units on a left side of a to-be-encoded unit; and further configured to determine a second encoded unit from adjacent encoded units above the to-be-encoded unit, wherein a motion prediction mode of the first encoded unit and the second encoded unit is the same as that of the to-be-encoded unit; and

a calculation module, configured to determine first motion vector predictors of M control points based on motion vectors of a plurality of vertexes of the first encoded unit, sample coordinates of the plurality of vertexes of the first encoded unit, and sample coordinates of the M control points of the to-be-encoded unit, and generate a first motion vector predictor group based on the first motion vector predictors of the M control points; and further configured to determine second motion vector predictors of the M control points based on motion vectors of a plurality of vertexes of the second encoded unit, sample coordinates of the plurality of vertexes of the second encoded unit, and the sample coordinates of the M control points of the

to-be-encoded unit, and generate a second motion vector predictor group based on the second motion vector predictors of the M control points; wherein

the determining module is further configured to determine a target motion vector predictor group from a plurality of motion vector predictor groups, wherein the plurality of motion vector predictor groups comprise the first motion vector predictor group and the second motion vector predictor group; and

the calculation module is further configured to predict the to-be-encoded unit based on the target motion vector predictor group.

122. The apparatus according to claim 121, wherein the motion prediction mode comprises an affine motion prediction mode.

123. The apparatus according to claim 121 or 122, wherein the determining module is specifically configured to:

determine, from two adjacent encoded units on the left side of the to-be-encoded unit, an encoded unit that is ranked first and that is found according to a first sequence and whose motion prediction mode is the same as that of the to-be-encoded unit as the first encoded unit; and

determine, from three adjacent encoded units above the to-be-encoded unit, an encoded unit that is ranked first and that is found according to a second sequence and whose motion prediction mode is the same as that of the to-be-encoded unit as the second encoded unit.

124. The apparatus according to any one of claims 121 to 123, wherein the determining module is specifically configured to:

generate Q motion vector predictor groups, wherein Q is a first value, and $Q + 2$ is greater than or equal to a preset value; and

determine the target motion vector predictor group from the Q motion vector predictor groups, the first motion vector predictor group, and the second motion vector predictor group.

125. The apparatus according to claim 124, wherein the determining module is specifically configured to:

based on motion vectors of encoded units respectively corresponding to the M control points of the to-be-encoded unit,

generate the Q motion vector predictor groups.

126. The apparatus according to any one of claims 121 to 125, wherein the apparatus

further comprises an encoding module, configured to determine an index identifier of the target motion vector predictor group based on the plurality of motion vector predictor groups and the target motion vector predictor group, and encode the index identifier into a bitstream.

127. The apparatus according to any one of claims 121 to 126, wherein M is a positive integer determined based on the motion prediction mode of the to-be-encoded unit.

128. The apparatus according to any one of claims 121 to 127, wherein the calculation module is specifically configured to:

determine a motion vector predictor (v_{x0}, v_{y0}) of an upper-left vertex of the to-be-encoded unit by using the following formula (1) and based on a motion vector (v_{x2}, v_{y2}) of an upper-left vertex of the first encoded unit, a motion vector (v_{x3}, v_{y3}) of an upper-right vertex of the first encoded unit, a motion vector (v_{x4}, v_{y4}) of a lower-left vertex of the first encoded unit, sample coordinates (x_2, y_2) of the upper-left vertex of the first encoded unit, sample coordinates (x_3, y_3) of the upper-right vertex of the first encoded unit, sample coordinates (x_4, y_4) of the lower-left vertex of the first encoded unit, and sample coordinates (x_0, y_0) of the upper-left vertex of the to-be-encoded unit, wherein the upper-left vertex of the to-be-encoded unit belongs to the M control points; or

determine a motion vector predictor (v_{x0}, v_{y0}) of an upper-left vertex of the to-be-encoded unit by using the following formula (1) and based on a motion vector (v_{x2}, v_{y2}) of an upper-left vertex of the second encoded unit, a motion vector (v_{x3}, v_{y3}) of an upper-right vertex of the second encoded unit, a motion vector (v_{x4}, v_{y4}) of a lower-left vertex of the second encoded unit, sample coordinates (x_2, y_2) of the upper-left vertex of the second encoded unit, sample coordinates (x_3, y_3) of the upper-right vertex of the second encoded unit, sample coordinates (x_4, y_4) of the lower-left vertex of the second encoded unit, and sample coordinates (x_0, y_0) of the upper-left vertex of the to-be-encoded unit, wherein the upper-left vertex of the to-be-encoded unit belongs to the M control points;

$$\begin{cases} v_{x0} = v_{x3} + \frac{(y_3 - y_0) \times (v_{x4} - v_{x2})}{(y_4 - y_2)} \\ v_{y0} = v_{y3} + \frac{(y_3 - y_0) \times (v_{y4} - v_{y2})}{(y_4 - y_2)} \end{cases} \quad \text{formula (1).}$$

129. A storage medium, wherein the storage medium comprises a bitstream generated by using the method according to any one of claims 67 to 76 or claims 103 to 112, or the bitstream obtained through decoding by using the method according to any one of claims 57 to 66 or claims 93 to 102.

130. An image processing apparatus, comprising a processor, a memory, a communications interface, and a bus, wherein the processor is connected to the memory and the communications interface by using the bus, the memory is configured to store an instruction, the processor is configured to execute the instruction, and when the processor executes the instruction stored in the memory, the processor is enabled to perform the encoding method according to any one of claims 67 to 76 or claims 103 to 112, or the decoding method according to any one of claims 57 to 66 or claims 93 to 102.

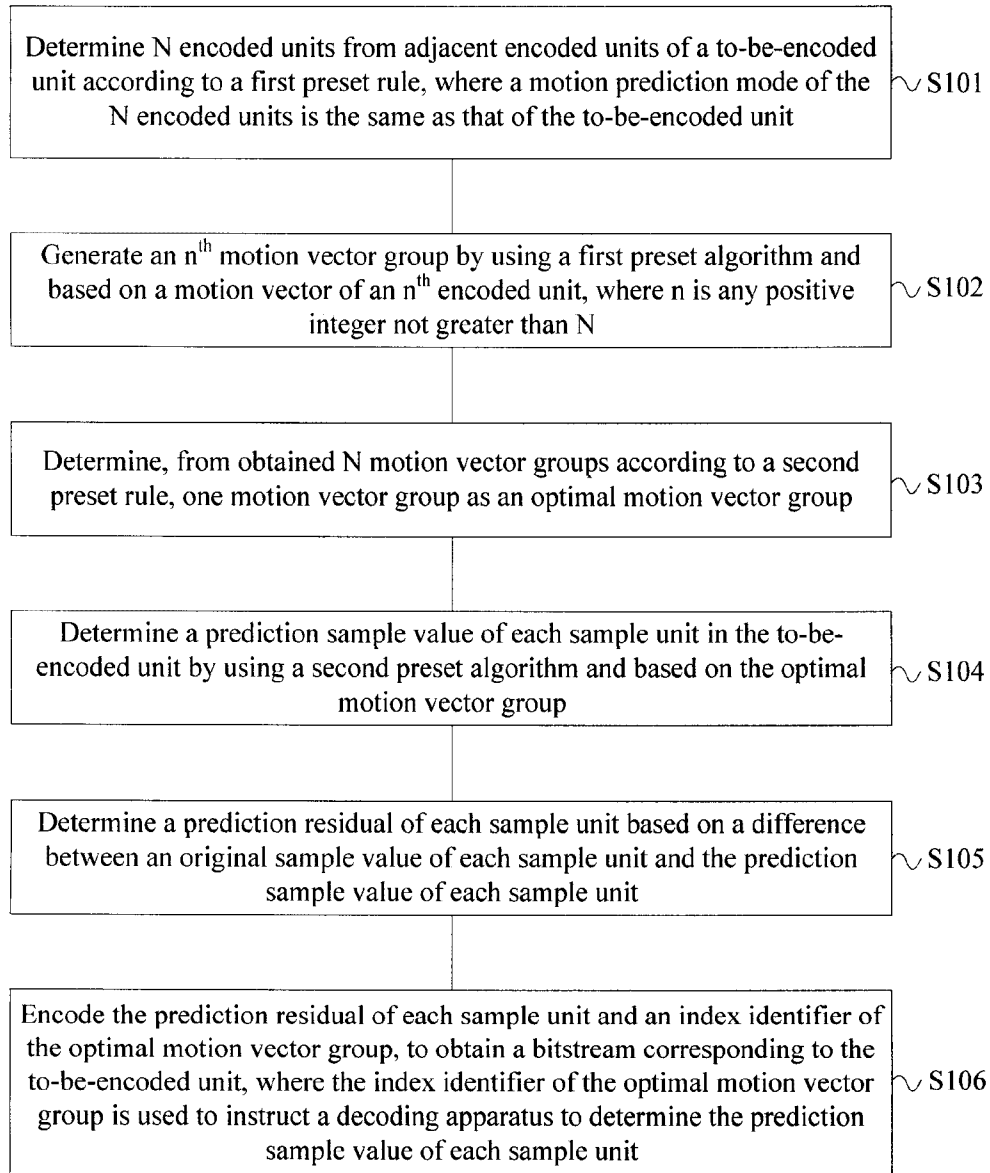


FIG. 1

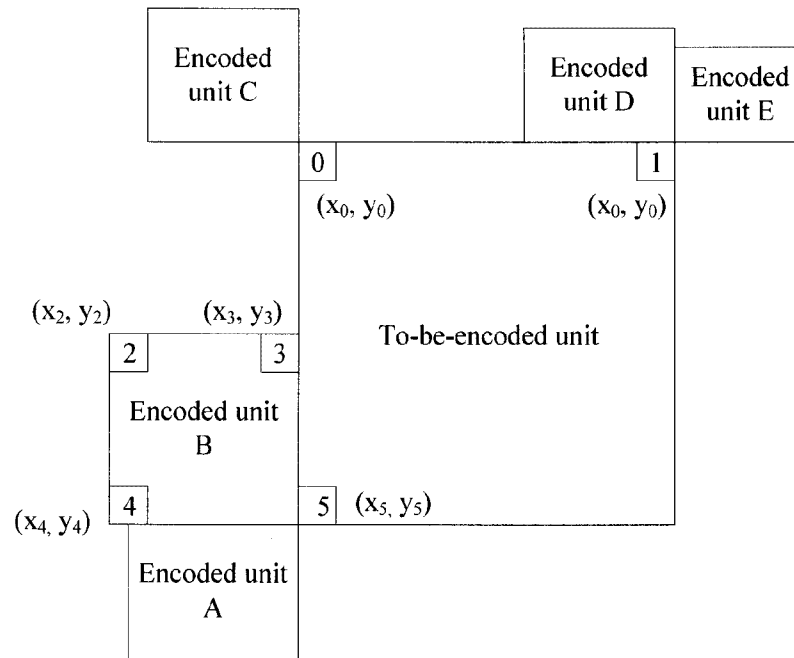


FIG. 2

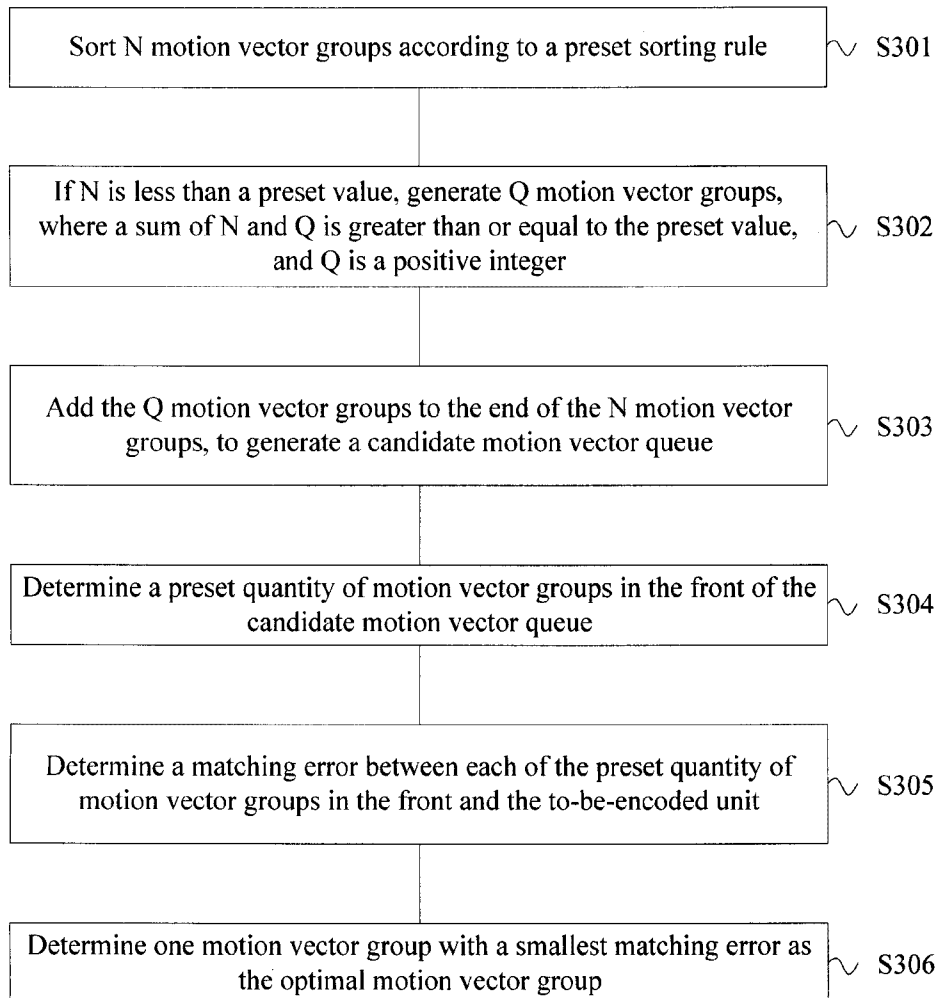


FIG. 3

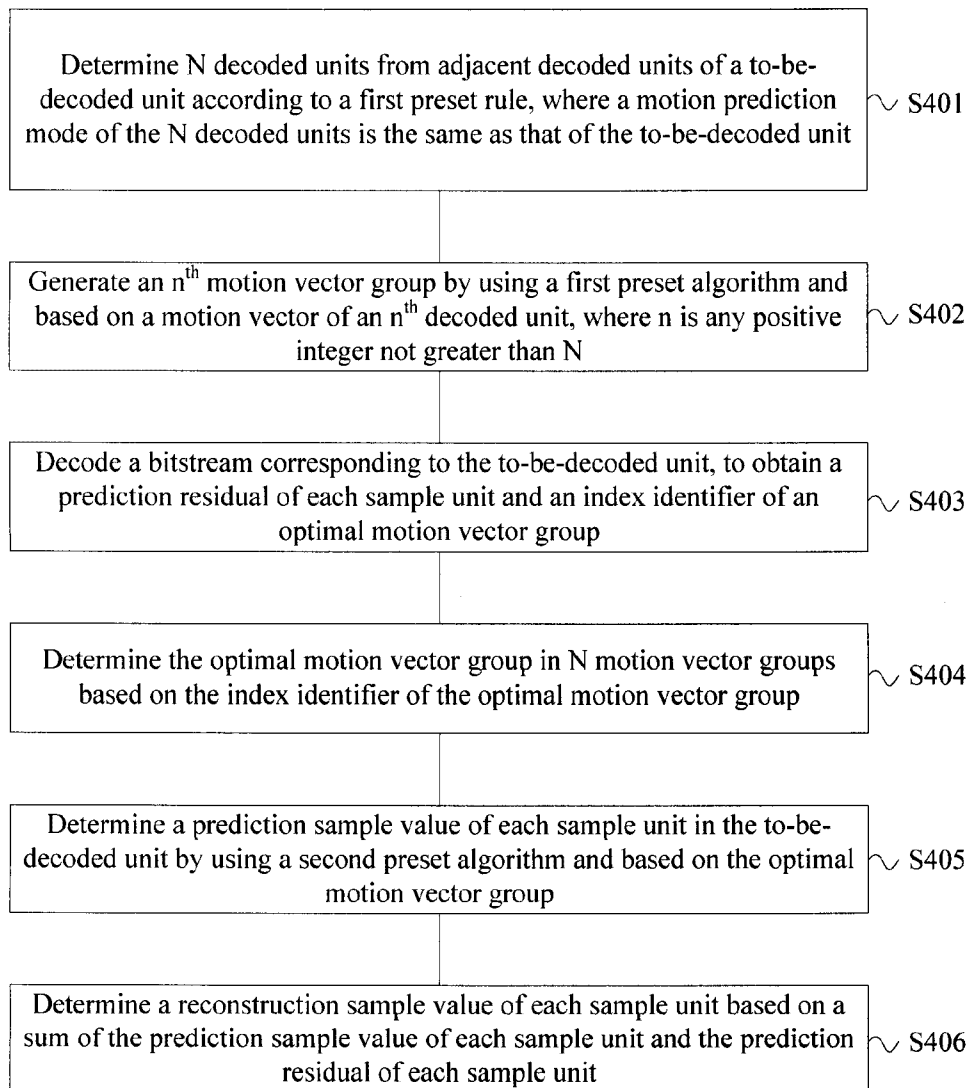


FIG. 4

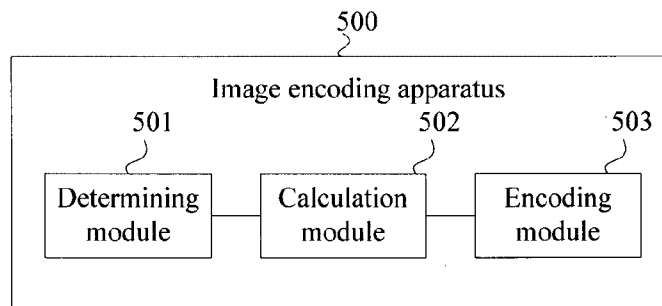


FIG. 5

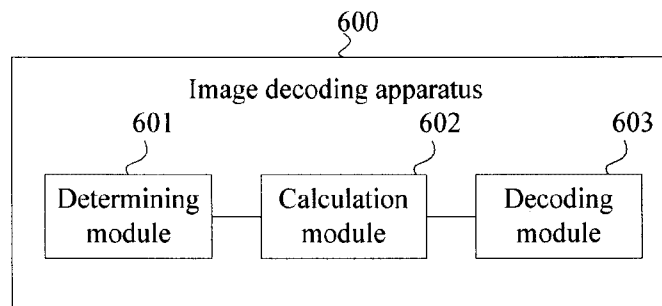


FIG. 6

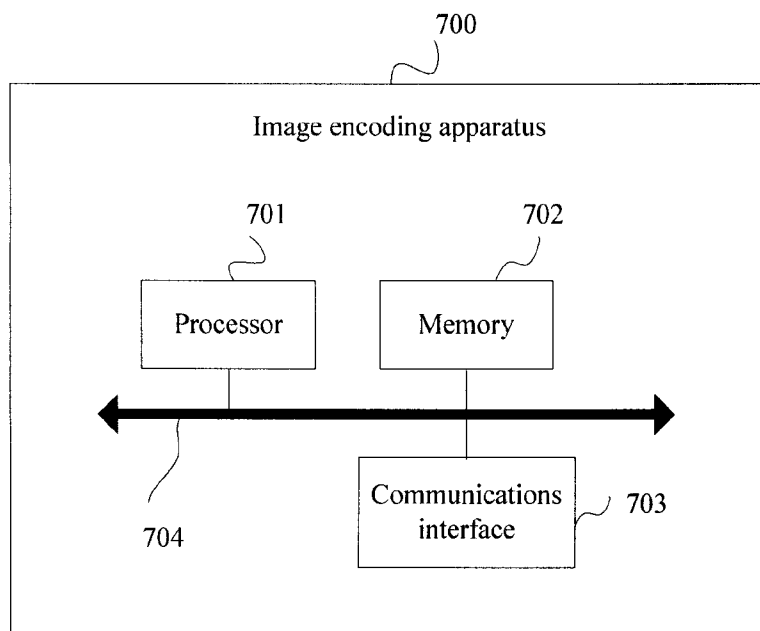


FIG. 7

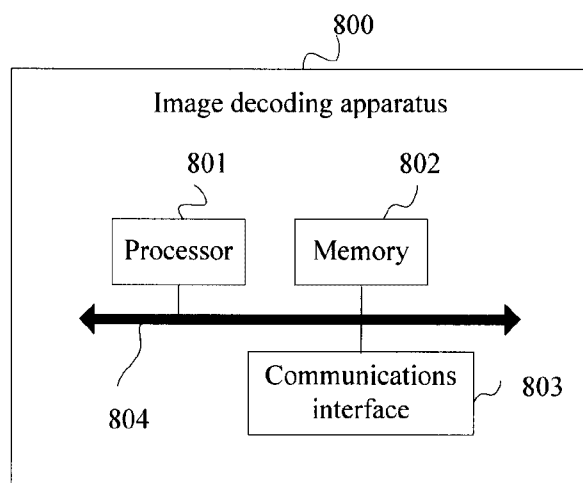


FIG. 8

Determine N encoded units from adjacent encoded units of a to-be-encoded unit according to a first preset rule, where a motion prediction mode of the N encoded units is the same as that of the to-be-encoded unit

~ S101

Generate an n^{th} motion vector group by using a first preset algorithm and based on a motion vector of an n^{th} encoded unit, where n is any positive integer not greater than N

~ S102

Determine, from obtained N motion vector groups according to a second preset rule, one motion vector group as an optimal motion vector group

~ S103

Determine a prediction sample value of each sample unit in the to-be-encoded unit by using a second preset algorithm and based on the optimal motion vector group

~ S104

Determine a prediction residual of each sample unit based on a difference between an original sample value of each sample unit and the prediction sample value of each sample unit

~ S105

Encode the prediction residual of each sample unit and an index identifier of the optimal motion vector group, to obtain a bitstream corresponding to the to-be-encoded unit, where the index identifier of the optimal motion vector group is used to instruct a decoding apparatus to determine the prediction sample value of each sample unit

~ S106