




(86) Date de dépôt PCT/PCT Filing Date: 2002/10/30
 (87) Date publication PCT/PCT Publication Date: 2003/06/05
 (45) Date de délivrance/Issue Date: 2010/08/24
 (85) Entrée phase nationale/National Entry: 2004/05/19
 (86) N° demande PCT/PCT Application No.: AT 2002/000303
 (87) N° publication PCT/PCT Publication No.: 2003/045587
 (30) Priorité/Priority: 2001/11/29 (AT GM 924/2001)

(51) Cl.Int./Int.Cl. *B07B 1/28* (2006.01),
B07B 1/46 (2006.01), *B07B 1/48* (2006.01)
 (72) Inventeur/Inventor:
ANIBAS, FRANZ, AT
 (73) Propriétaire/Owner:
BINDER + CO. AKTIENGESELLSCHAFT, AT
 (74) Agent: OGILVY RENAULT LLP/S.E.N.C.R.L.,S.R.L.

(54) Titre : DISPOSITIF CRIBLEUR
 (54) Title: SIFTING DEVICE

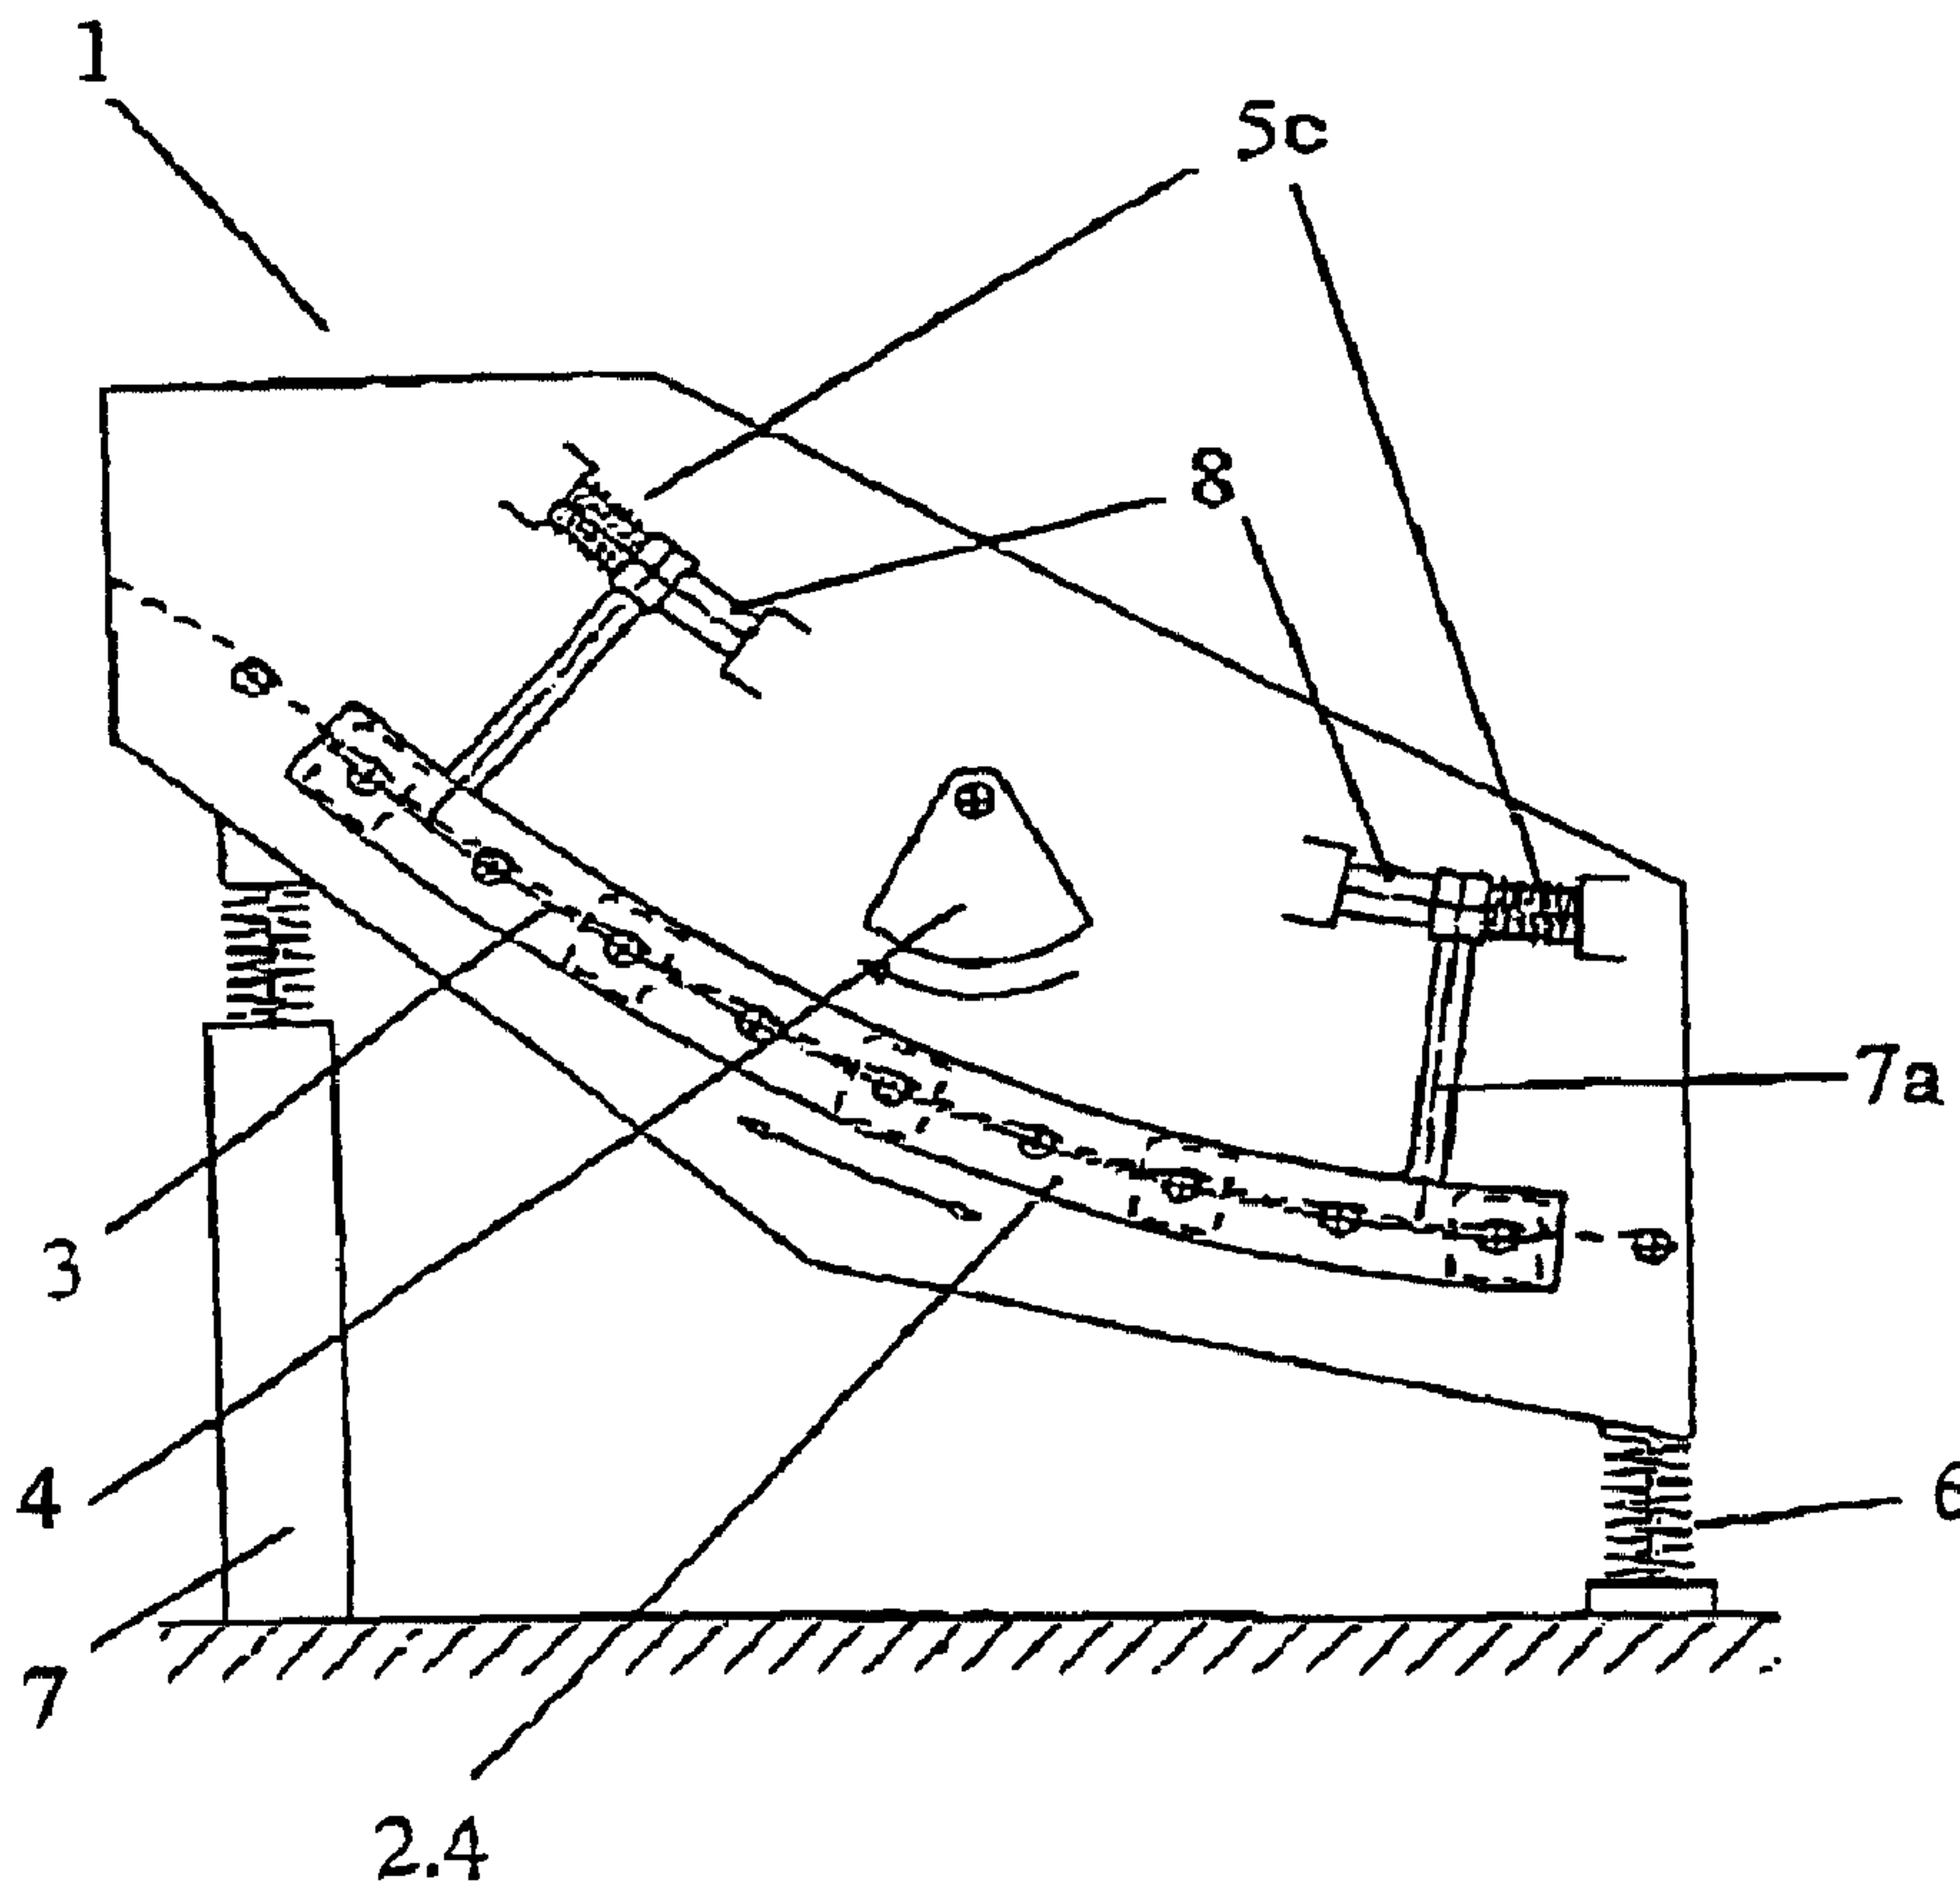

(57) Abrégé/Abstract:

A sifting device for a sieve box having: a) a drive coupled to the sieve box; b) a fundamental oscillation system having a plurality of substantially horizontal first transverse carriers coupled to the sieve box; c) a supplementary oscillation system coupled to the sieve

(57) **Abrégé(suite)/Abstract(continued):**

box, the system having: i) at least two curved receiving parts positioned parallel to a set of faces on the sieve box; ii) a plurality of substantially horizontal second transverse carriers; iii) a plurality of stretchable sieve liner strips; d) a pendulum axle; e) a plurality of pendulum arms coupled to said pendulum axle, , wherein a height difference between the centers of gravity of two sequential transverse carriers is greater in a feeding side section than in a discharge side section such that the oscillation system is pivotally mounted around said pendulum axle on pendulum arms to form a sieve surface as a curved plane formed by stretchable sieve liner strips.

ABSTRACT

A sifting device for a sieve box having: a) a drive coupled to the sieve box; b) a fundamental oscillation system having a plurality of substantially horizontal first transverse carriers coupled to the sieve box; c) a supplementary oscillation system coupled to the sieve box, the system having: i) at least two curved receiving parts positioned parallel to a set of faces on the sieve box; ii) a plurality of substantially horizontal second transverse carriers; iii) a plurality of stretchable sieve liner strips; d) a pendulum axle; e) a plurality of pendulum arms coupled to said pendulum axle, , wherein a height difference between the centers of gravity of two sequential transverse carriers is greater in a feeding side section than in a discharge side section such that the oscillation system is pivotally mounted around said pendulum axle on pendulum arms to form a sieve surface as a curved plane formed by stretchable sieve liner strips.

Sifting device:

In known sifting devices of this type, sieve mats are used, which are alternately tensioned and relaxed in sections over the sieve surface. This is performed mechanically, for example, two movably implemented oscillation systems, such as sieve boxes, being set in oscillation in relation to one another by an eccentric drive using transverse carriers. The plastic sieve liner strips are connected in this case on one end to the transverse carriers of the first sieve box and, on the other end, to the transverse carriers of the second sieve box. Through the opposing oscillations of the two sieve boxes in relation to one another, and therefore of the particular transverse carriers, the plastic sieve liner strips are alternately tensioned and relaxed. In this way, the product to be sifted is separated into the individual fractions. Through the continuous tensioning and releasing, the sifting covers clean themselves again and again and good separation is possible even with sifting product which is difficult to sift.

However, since the sifting product is not subjected to any acceleration in the conveyance direction of the sifting machine through the oscillation, these sifting machines are also placed at

a relatively large slant, so that the sifting product may be conveyed by gravity.

Other known sifting machines include a sieve box having transverse carriers to which an oscillating frame having further transverse carriers is elastically coupled. In these sifting machines, the individual sieve liner strips are connected on one end to the transverse carriers of the sieve box and on the other end to the transverse carriers of the oscillating frame. The sieve box is typically caused to oscillate by being excited by the force of an unbalanced drive and may be referred to as a fundamental oscillation system. Through the oscillation of the sieve box, the oscillating frame elastically coupled to this sieve box is caused to oscillate with corresponding tuning of its oscillation system (mass-spring), and thus represents a supplementary oscillation system. Through the oscillation of the sieve box, the product to be sifted is also subjected to acceleration in the conveyance direction of the sifting machine, so that the product is also conveyed solely by the machine. Slanted placement of the sifting machine is therefore not absolutely necessary, and/or only a significantly lesser slant is necessary.

Through the alternating tensioning and releasing of the sieve mats, which are installed in such sifting devices over the sifting length, these mats clean themselves again and again from jammed grain and caking which is caused by fine, damp sifting product.

Banana sieves represent another embodiment. This refers to sifting devices in which the sieve surface is divided into individual sieve surface sections over the sifting length, each of these sieve surface sections having a different slant within the sifting

machine. Such constructions are preferably selected if larger feed quantities are to be separated according to grain size and the cutpoint is relatively close to the largest grain of the feed product. The advantage of such sifting machines is that it is possible to keep the dumping height of the sifting product essentially the same over the entire length of the sifting machine through the differing slants and thus the different conveyance speeds of the product to be sifted, although there is less and less material to be conveyed and sifted on the sifting plane due to the sifting and the passage of the fine fraction through the screen fabric. Uniform dumping height of the sifting product is of great advantage for effective sifting, since otherwise the particles close to the cutpoint only jump on the sifting plane toward the end of the sifting machine and do not have the possibility of making their way through a mesh of the screen fabric.

Sifting machines of this kind are known from, e.g., EP 0 197 191, EP 1 142 651 and WO 92/00148.

The object of the present invention is to combine the advantages of these two sifting devices. This is done in that, in a way known per se, in a sifting machine which is caused to oscillate by an unbalanced drive, for example, a supplementary oscillation system is installed which is excited by the oscillation of the sifting machine and, in this way, sieve mats, which are connected on one end to the sifting machine and on the other end to the second oscillation system, are alternately tensioned and relaxed. In order to now additionally achieve the effect of the banana sieve, the second oscillation system, which is excited by the oscillation of the sifting machine. The sieve surface, which

always represents a plane in all known tensioning shaft sifters, is implemented as a curved plane in the new sifting device, particularly as a segment of a cylinder surface. The sieve surface thus has a greater slant on the feeding side than on the discharge side, which, in addition to the known favorable tensioning shaft sieve movement, also provides the advantage of a banana sieve. Through this shape of the sieve surface it is possible to provide a supplementary oscillation system by installing spring elements, which may be brought into a type of pendulum oscillation through the oscillation of the sifting machine, through which the tensioning shaft sieve effect is achieved very simply. The characterizing features of Claims 3 through 11 relate to advantageous embodiments of an oscillation system of this type.

The present invention will now be described in greater detail on the basis of the attached figures.

Figures 1 through 3 show different embodiments of the coupling of the supplementary oscillation system to the sieve boxes of the fundamental oscillation system in outline and

Figures 4 and 5 show different arrangements of decisive components of both oscillation systems in outline.

Figure 1 schematically shows the construction of such a sifting machine. In this case, the sieve box (1), which includes the sieve faces 1.1, 1.2, between them, and the first transverse carriers

1.3, which connect the sieve faces, is supported via spring elements 6 on brackets. These are caused to oscillate by an unbalanced drive 4. A support device 1.4 is installed on the sieve box, which has a pendulum axle 2.2 (a shaft, for example) for a pendulum-like construction 2 on its upper end. This pendulum-like construction 2 includes the pendulum arms 2.1 and the receiving parts 2.4 for the second transverse carriers 2.3, movable in relation to the sieve box 1, which pass through the sieve boxes through window-like openings 1.6. The transverse carriers 1.3 and 2.3 may be positioned in such a way that they may be understood as surface lines of a cylinder surface whose axis corresponds to the pendulum axle 2.2. The strip-shaped sieve mats 3 are tensioned between the transverse carriers 1.3 and 2.3. Furthermore, spring elements 5a may be installed between the sieve box 1 and the pendulum-like construction 2 in order to be able to influence the amplitude of the pendulum oscillation in relation to the fundamental oscillation of the sieve box 1. Through the oscillating movement of the sieve box 1, the pendulum-like construction 2 is also excited to oscillate and, through suitable selection of the dimensions and/or through the additional installation of spring elements, the amplitude of the pendulum-like construction 2 may be influenced. The sifting device is charged at the feeding side A with sifting product, the unsifted product leaving the sifting device at the discharge side B.

A further embodiment is shown in Figure 2. In this case, the receiving parts 2.4 are guided in guide elements 8 via spacer elements 7a. In order to obtain an oscillation system in this case, it is necessary to install spring elements 5c on the guide elements or to position them on or near the receiving parts 2.4, as shown in Figure 4.

Furthermore, positioning the receiving parts 2.4 either outside (see schematic illustration in Figure 4) or inside (see Figure 5) the sieve faces 1.1 and/or 1.2 is provided depending on the separating task. Figure 9 shows a sifting machine according to Figure 5, however, instead of the unbalanced exciter 4, a linear oscillator 4.1 of known construction having a double unbalanced drive with opposing unbalanced weights is mounted on the sieve box 1 as the oscillation exciter. The sifting device according to the present invention thus combines the advantages of a tensioning shaft sieve with those of a banana sieve and is especially suitable for sifting products which are difficult to sift.

CLAIMS:

1. A sifting device for a sieve box comprising:
 - a) a drive coupled to the sieve box;
 - b) a fundamental oscillation system having a plurality of substantially horizontal first transverse carriers coupled to the sieve box;
 - c) a supplementary oscillation system coupled to the sieve box, the system comprising:
 - i) at least two curved receiving parts positioned essentially parallel to a set of faces on the sieve box;
 - ii) a plurality of substantially horizontal second transverse carriers which are coupled to each other in their end regions via said at least two curved receiving parts, and positioned substantially parallel to said plurality of substantially horizontal first transverse carriers and which are each positioned between at least two of said plurality of substantially horizontal first transverse carriers;
 - iii) a plurality of stretchable sieve liner strips for coupling said plurality of substantially horizontal second transverse carriers together and wherein said at least two curved receiving parts have distributed fixations for coupling together said plurality of substantially horizontal second transverse carriers;
 - d) a pendulum axle;

e) a plurality of pendulum arms coupled to said pendulum axle, said pendulum arms being movably coupled to the sieve box and also coupled to said at least two curved receiving parts,

wherein a transverse carrier that is closer to a feeding side is higher than a subsequent transverse carrier which is closer to a discharge side, and wherein said sifting device is in the form of at least two sections, wherein a height difference between the centers of gravity of two sequential transverse carriers is greater in a feeding side section than in a discharge side section such that said oscillation system is pivotally mounted around said pendulum axle via said pendulum arms to form a sieve surface as a curved plane formed by said stretchable sieve liner strips.

2. The sifting device according to claim 1, further comprising elastic elements, wherein said at least two receiving parts, are mounted on the sieve box via a plurality of elastic elements.

3. The sifting device according to claim 2, wherein said elastic elements are leaf springs.

4. The sifting device according to claim 2, wherein said elastic elements are spring elements.

5. The sifting device according to claim 1, further comprising hinge rods and spring elements, wherein said at least two

receiving parts, are mounted on the sieve box via said hinge rods, which are hingedly mounted on the sieve box, and wherein said additional spring elements connect said at least two receiving parts to the sieve box and are positioned on a set of faces of said at least two receiving parts and act essentially in an axial direction of said receiving parts.

6. The sifting device according to claim 5, further comprising spacer elements wherein the guiding of said spacer elements along the guide elements is supported by said spring elements, which act between said spacer elements and the sieve box.

7. The sifting device according to claim 1, further comprising spacer elements and curved guide elements, wherein said at least two receiving parts, are mounted on the sieve box via said spacer elements, which are displaceably mounted on said curved guide elements, which are connected to the sieve box.

8. The sifting device according to claim 1, wherein the said second transverse carriers are connected to two of said at least two curved receiving parts, which are attached via pendulum arms to said pendulum axle, which is mounted in a support device, which is connected fixed to the sieve box.

9. The sifting device according to claim 8, further comprising spring elements, wherein said pendulum arms are connected to the sieve box via said spring elements.

10. The sifting device according to claim 1, wherein said drive is in the form of an oscillation exciter, which is in the form of an unbalanced drive having a single unbalanced weight.

11. The sifting device as in claim 1, wherein said drive is in the form of an oscillation exciter in the form of a double unbalanced drive.

12. The device as in claim 11, wherein said double unbalanced drive includes at least two unbalanced weights.

13. The device as in claim 11 wherein said double unbalanced drive includes at least two unbalanced motors.

14. The device as in claim 11, wherein said double unbalanced drive is in the form of a drive having a magnetic oscillating drive that is mounted on the sieve box and an eccentric drive that is mounted between the sieve box and the supplementary oscillation system.

15. A sifting device for a sieve box consisting of:

a) a drive coupled to the sieve box;

b) a fundamental oscillation system having a plurality of

substantially horizontal first transverse carriers coupled to the sieve box;

c) a supplementary oscillation system coupled to the sieve box, the system comprising:

i) at least two curved receiving parts positioned essentially parallel to a set of faces on the sieve box;

ii) a plurality of substantially horizontal second transverse carriers which are coupled to each other in their end regions and positioned substantially parallel to said plurality of substantially horizontal first transverse carriers and which are each positioned between at least two of said plurality of substantially horizontal first transverse carriers;

iii) a plurality of stretchable sieve liner strips for coupling said plurality of substantially horizontal second transverse carriers together and wherein said at least two curved receiving parts have distributed fixations for coupling together said plurality of substantially horizontal second transverse carriers;

d) a pendulum axle;

e) two pendulum arms coupled to said pendulum axle, said pendulum arms being movably coupled to the sieve box and also coupled to said at least two curved receiving parts,

wherein a transverse carrier that is closer to a feeding side is higher than a subsequent transverse carrier which is

closer to a discharge side, and wherein said sifting device is in the form of at least two sections, wherein a height difference between the centers of gravity of two sequential transverse carriers is greater in a feeding side section than in a discharge side section such that said oscillation system is pivotally mounted around said pendulum axle via said pendulum arms to form a sieve surface as a curved plane formed by said stretchable sieve liner strips.

1/4


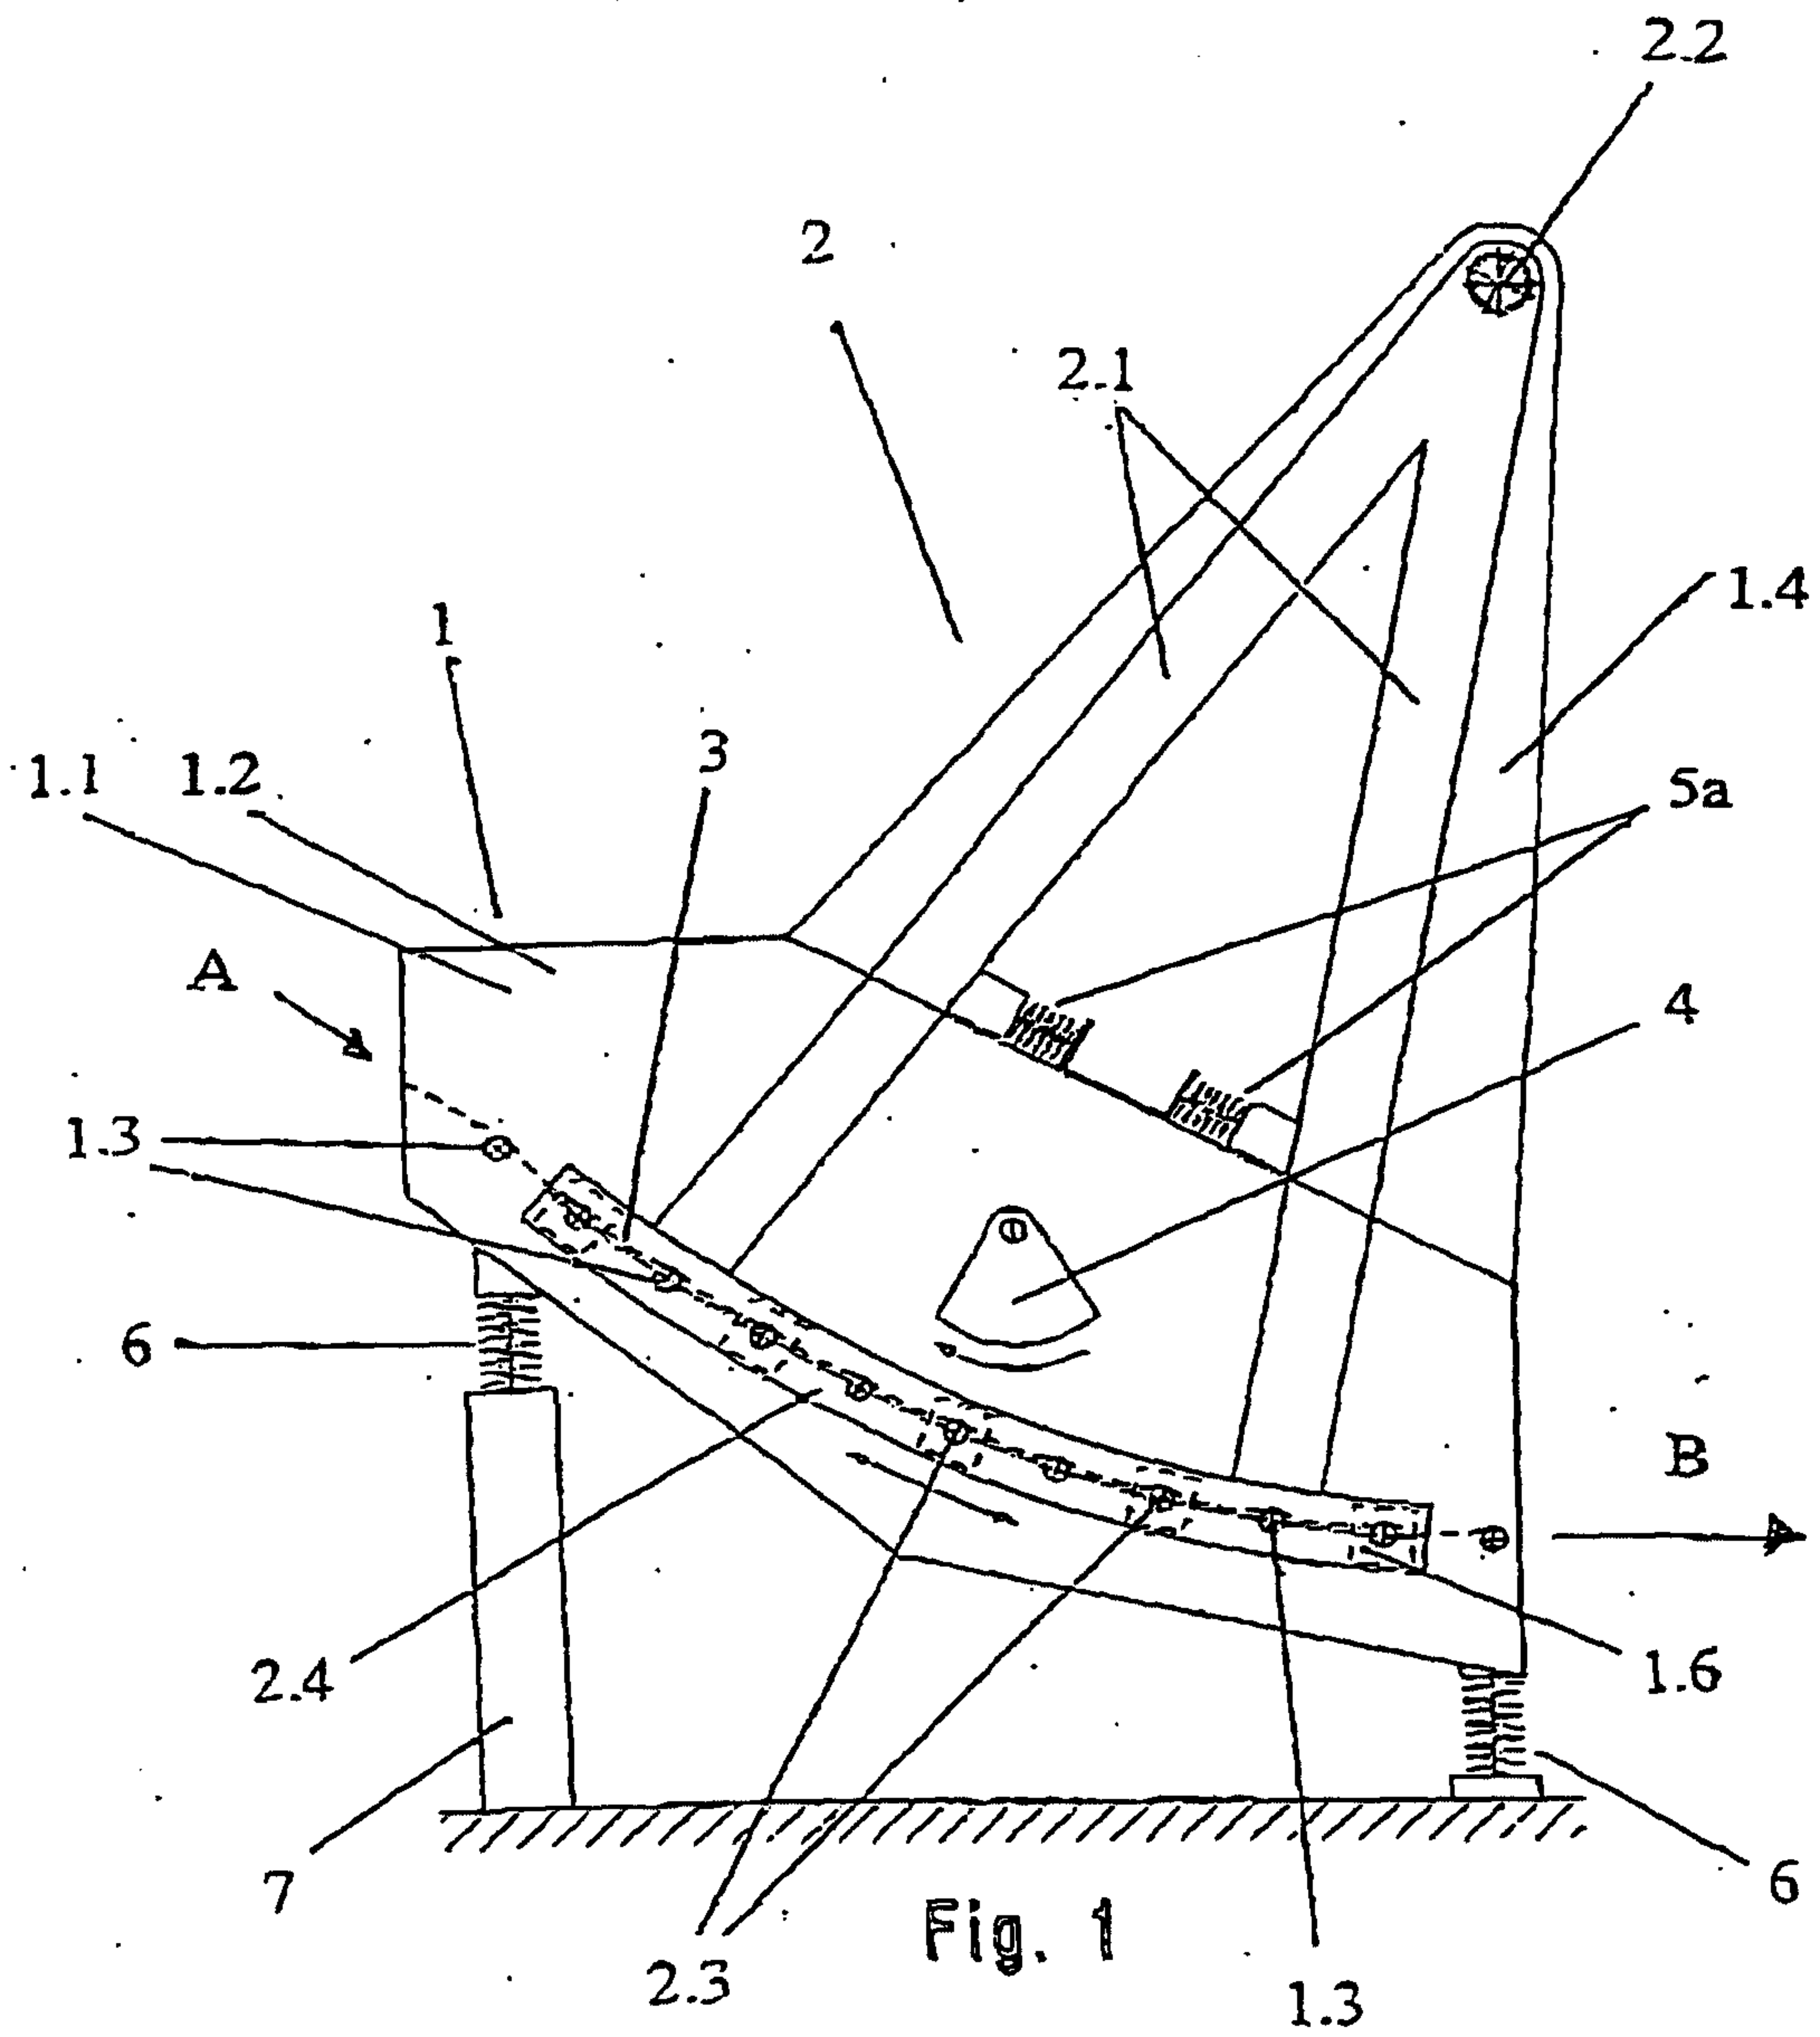


Fig. 1

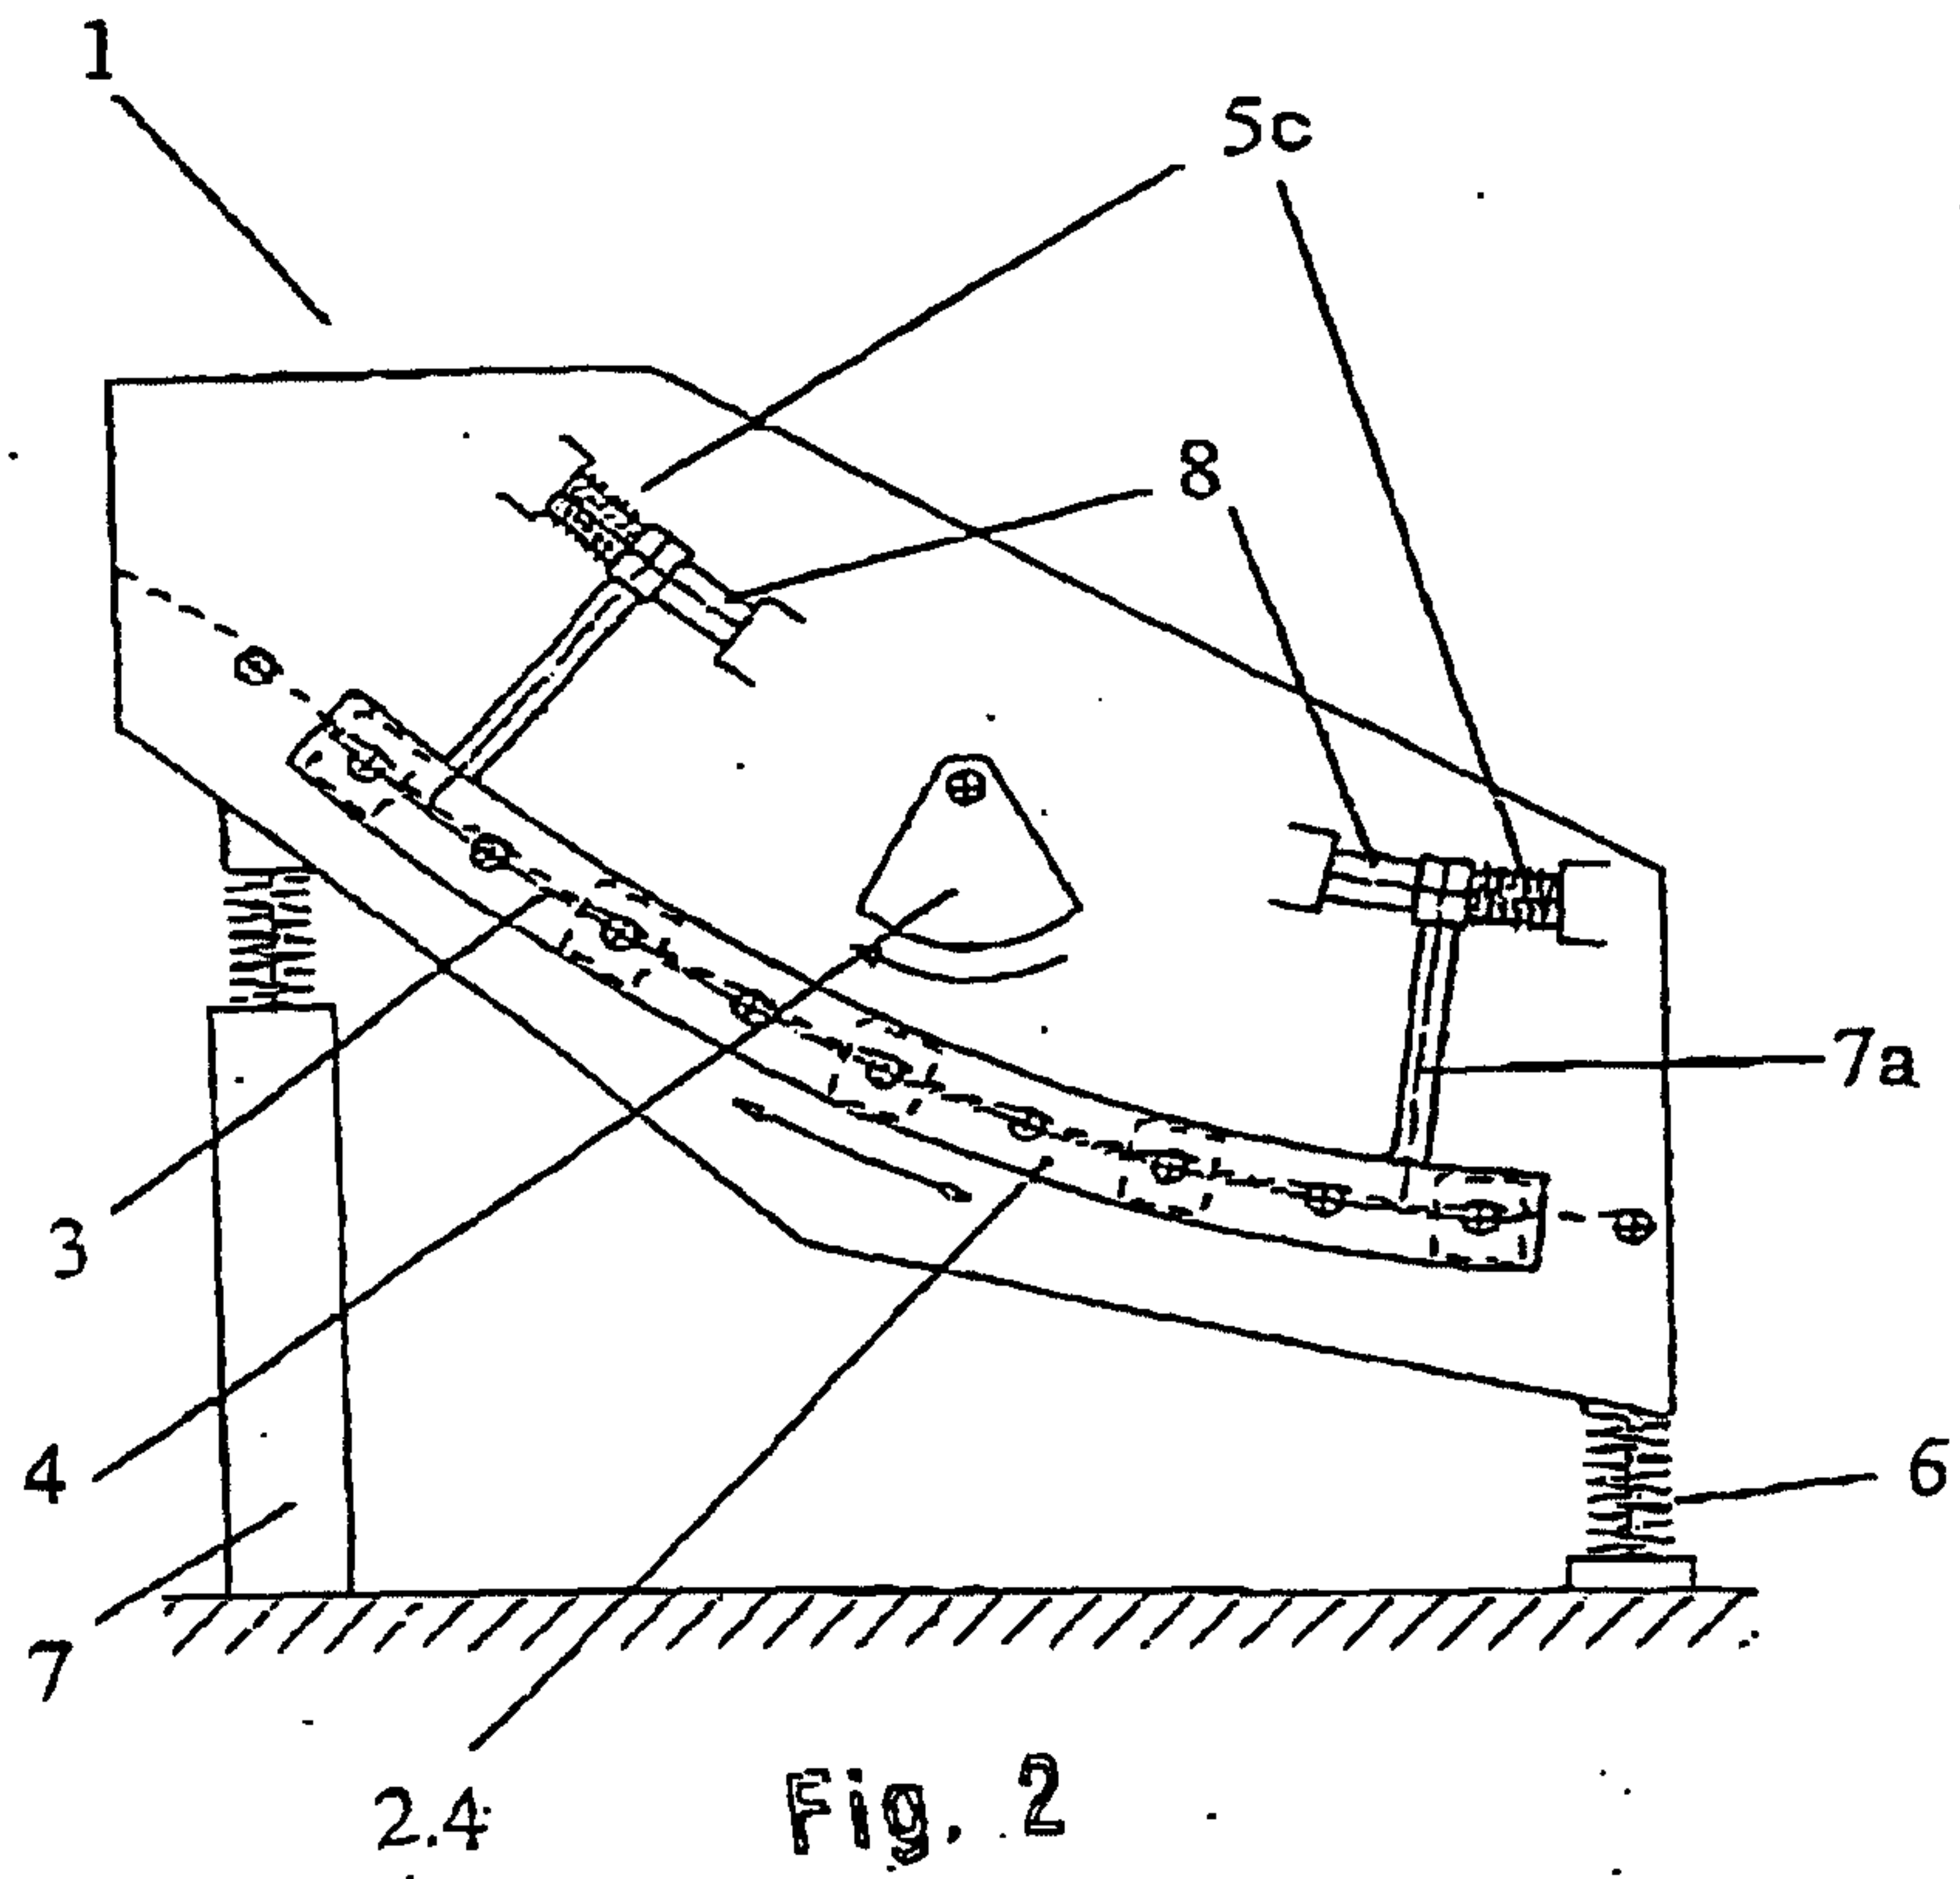

3/4

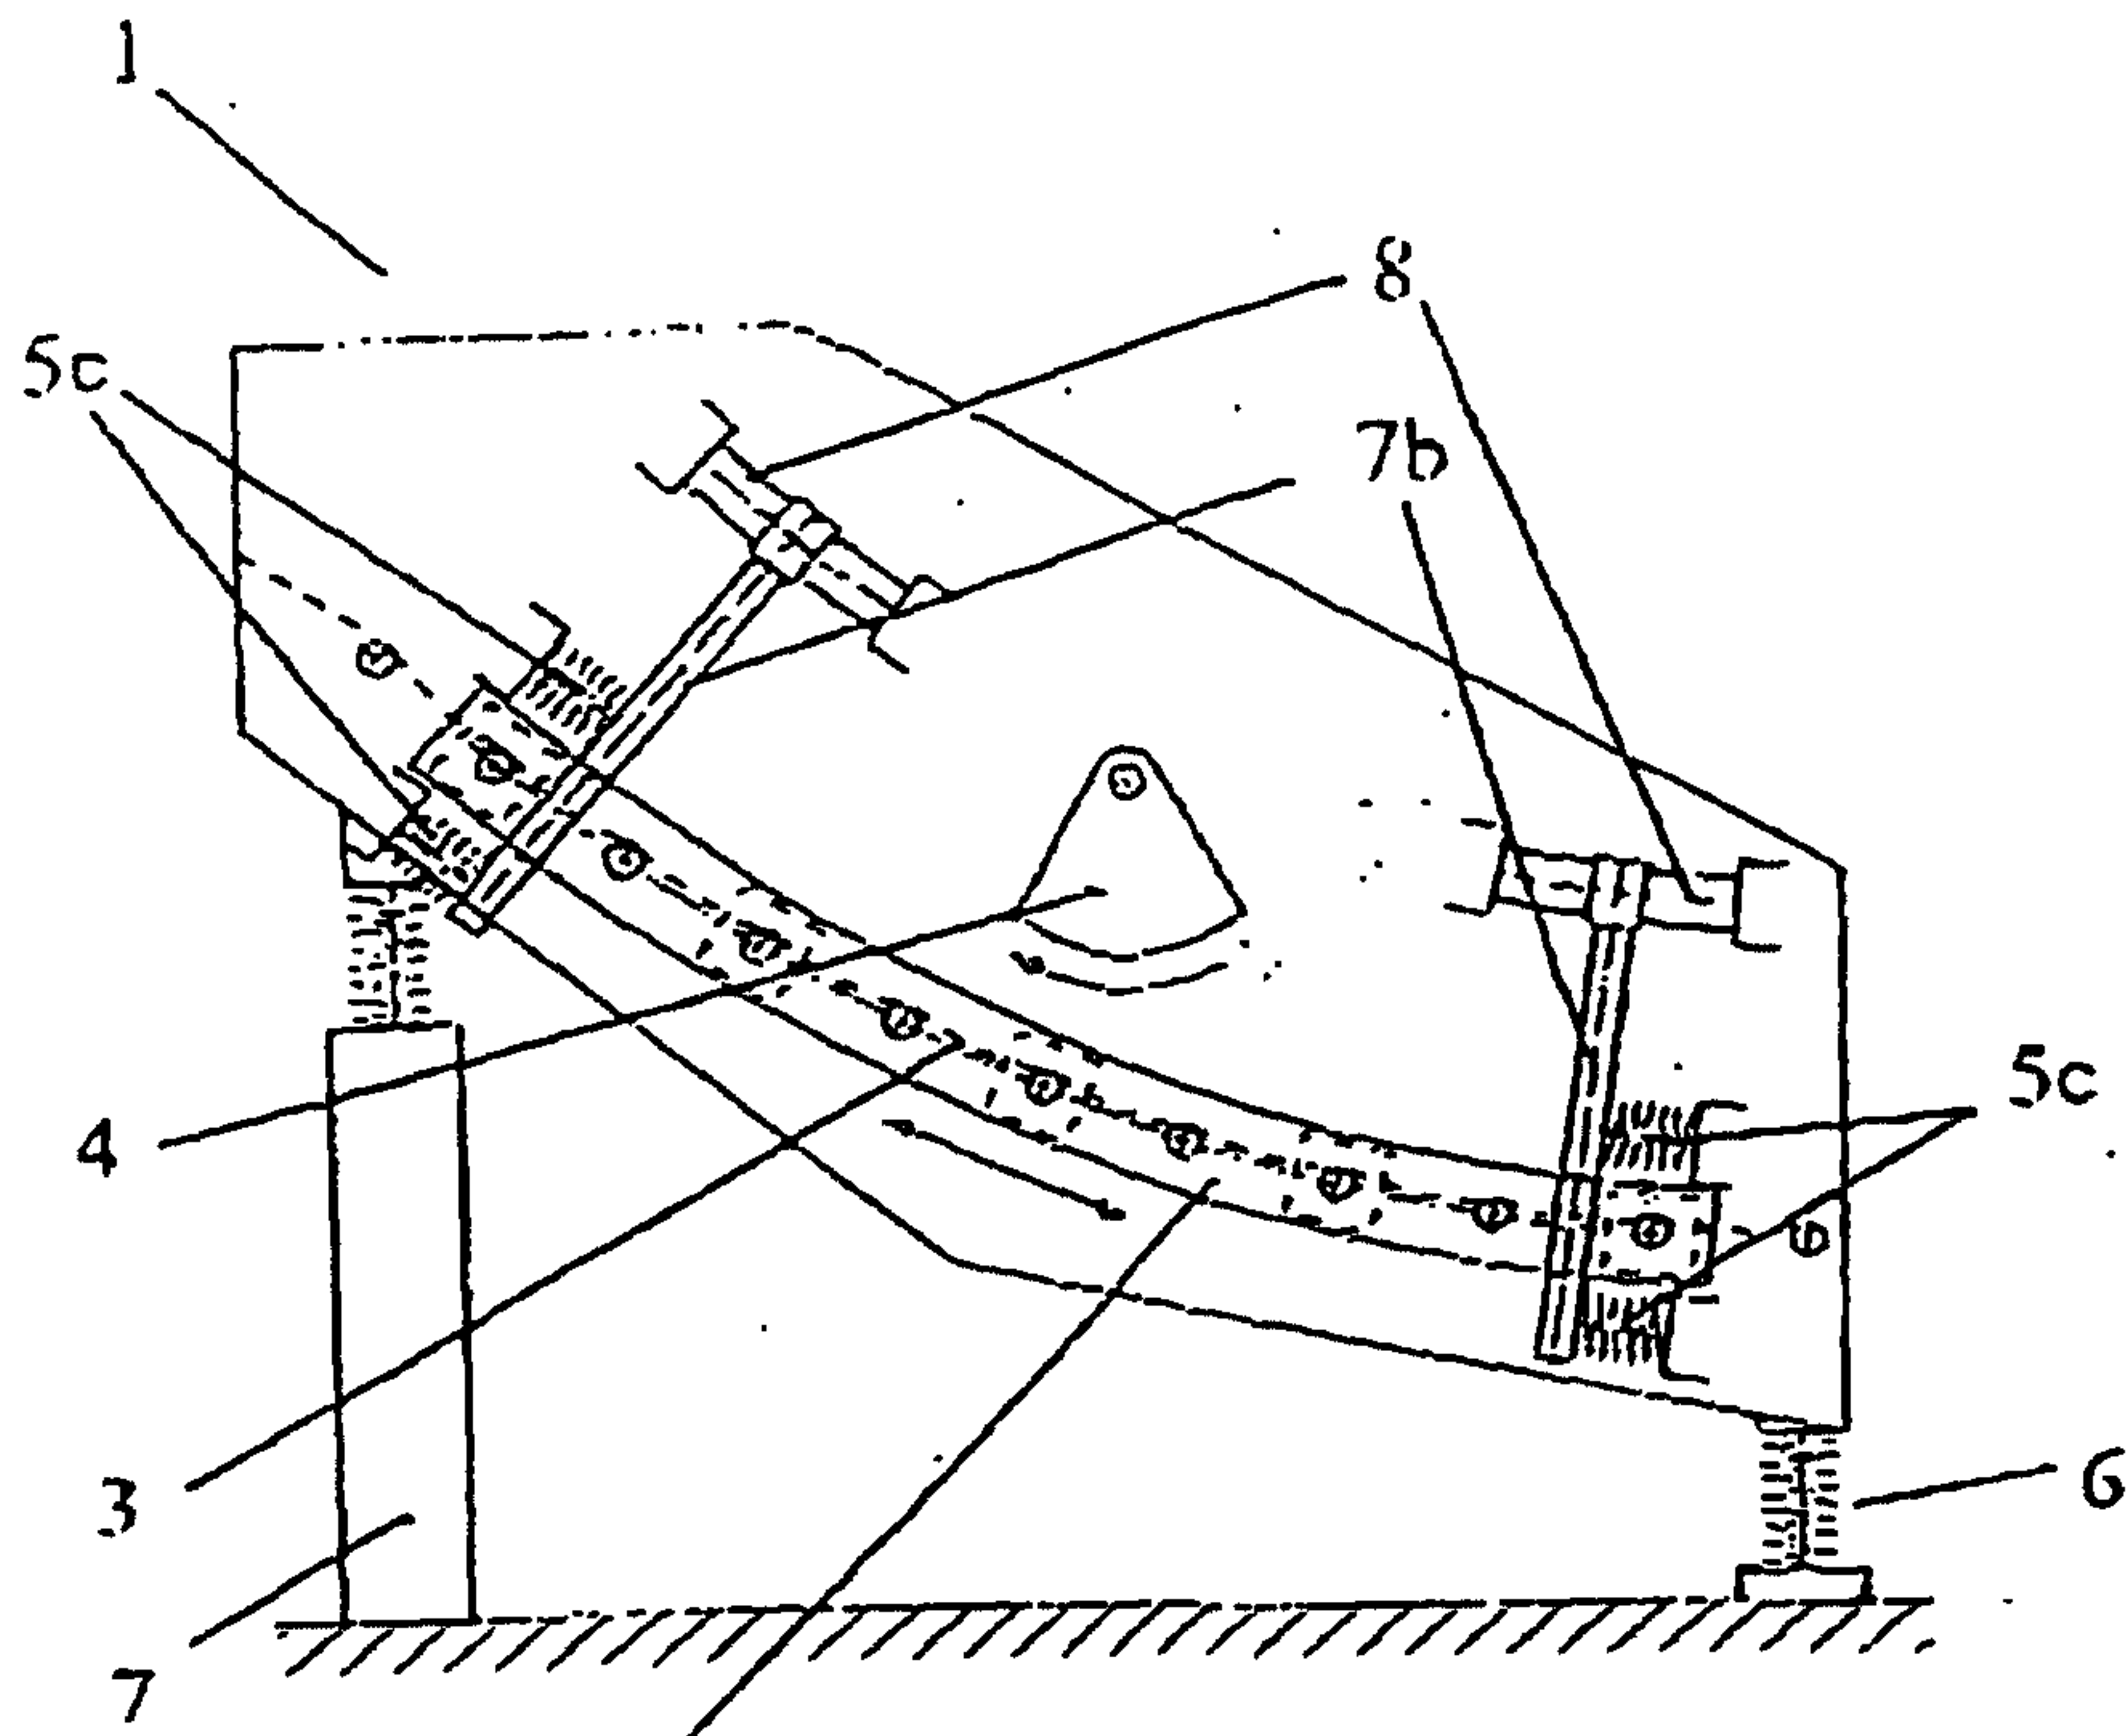


Fig. 3

4/4

