



US 20150198914A1

(19) **United States**(12) **Patent Application Publication**
WATANABE et al.(10) **Pub. No.: US 2015/0198914 A1**(43) **Pub. Date: Jul. 16, 2015**(54) **TRANSFER DEVICE AND IMAGE FORMING APPARATUS**(52) **U.S. Cl.**
CPC **G03G 15/1685** (2013.01)(71) Applicant: **FUJI XEROX CO., LTD**, Tokyo (JP)(72) Inventors: **Sho WATANABE**, Kanagawa (JP);
Yoshiyuki TOMINAGA, Kanagawa (JP)(73) Assignee: **FUJI XEROX CO., LTD**, Tokyo (JP)(21) Appl. No.: **14/466,483**(22) Filed: **Aug. 22, 2014**(30) **Foreign Application Priority Data**

Jan. 15, 2014 (JP) 2014-005185

Publication Classification(51) **Int. Cl.**
G03G 15/01 (2006.01)(57) **ABSTRACT**

A transfer device includes a transfer body having an endless structure and to which an image is transferred while the transfer body is rotated; a first transfer portion that transfers an image formed with toner containing metallic pigment to a surface of the transfer body by applying a transfer current; a second transfer portion that is disposed on the upstream side of the first transfer portion in the rotation direction of the transfer body and transfers an image formed with toner not containing metallic pigment to the surface of the transfer body by applying a transfer current; and a support member that is grounded and disposed on the downstream side of the first transfer portion in the rotation direction of the transfer body, the support member being in contact with the back surface of the transfer body to support the transfer body.

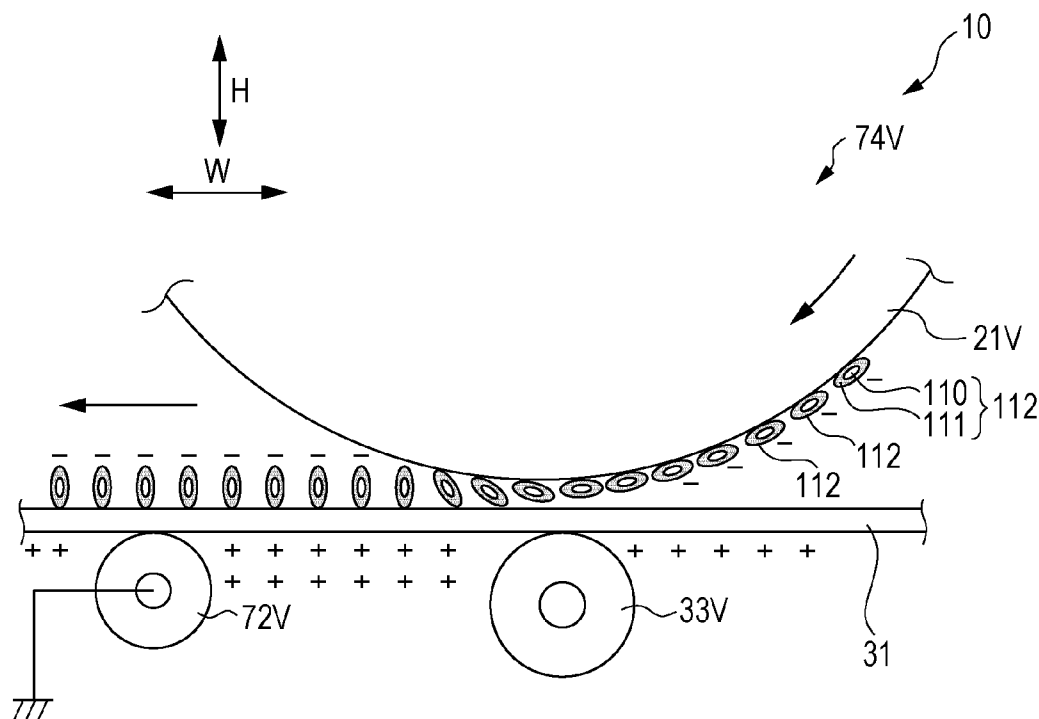


FIG. 1A

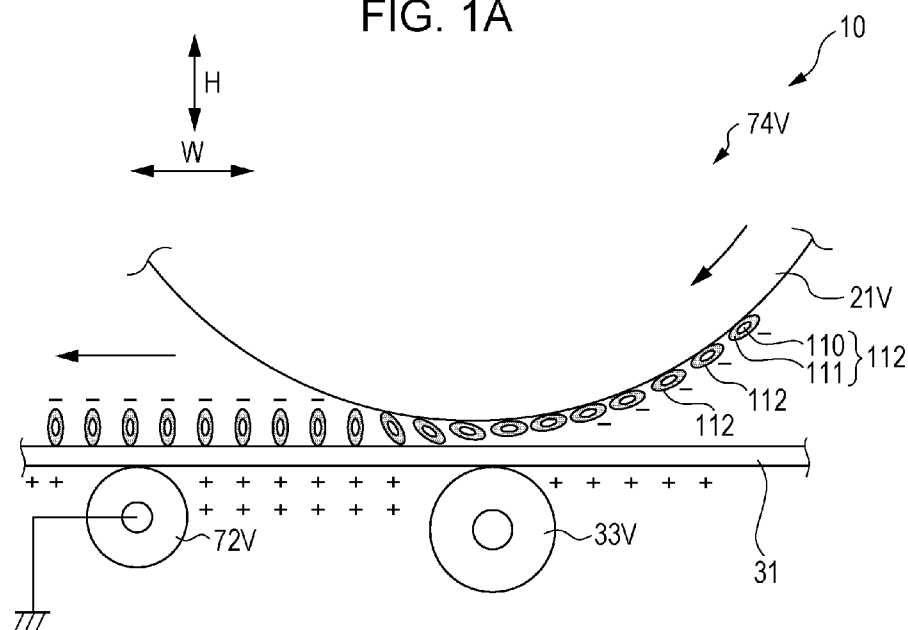


FIG. 1B

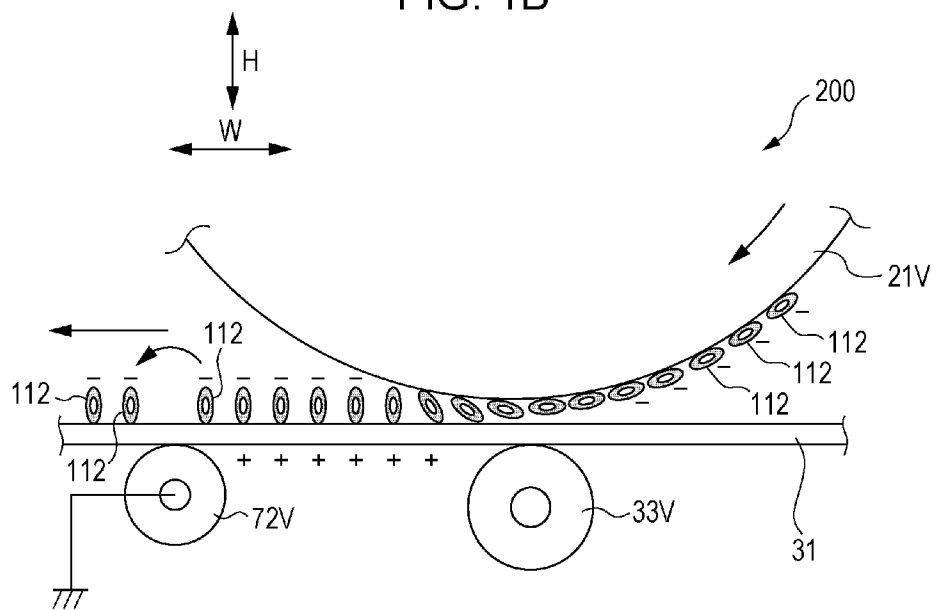


FIG. 2

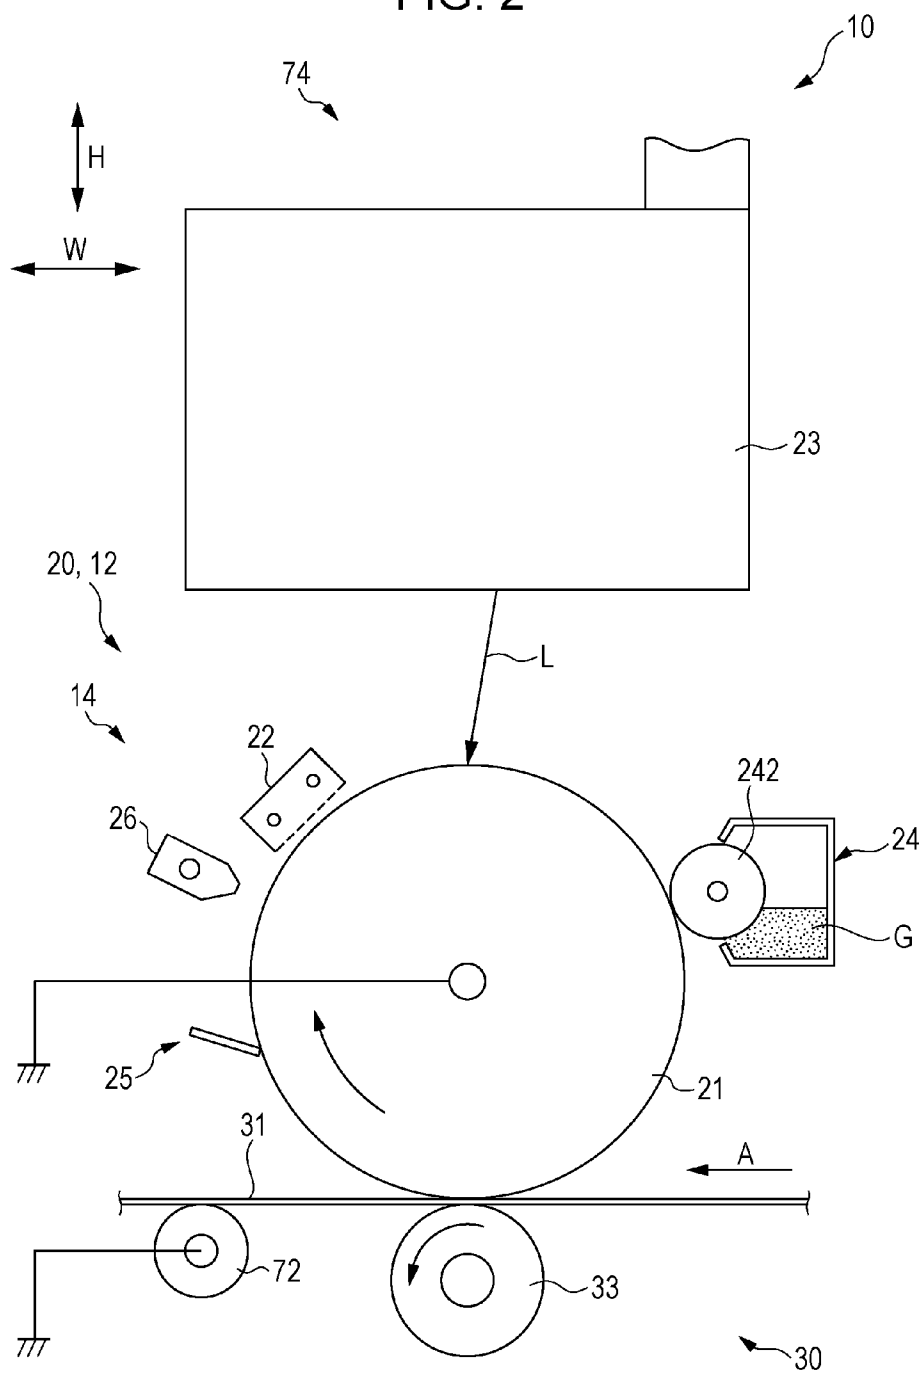


FIG. 3A

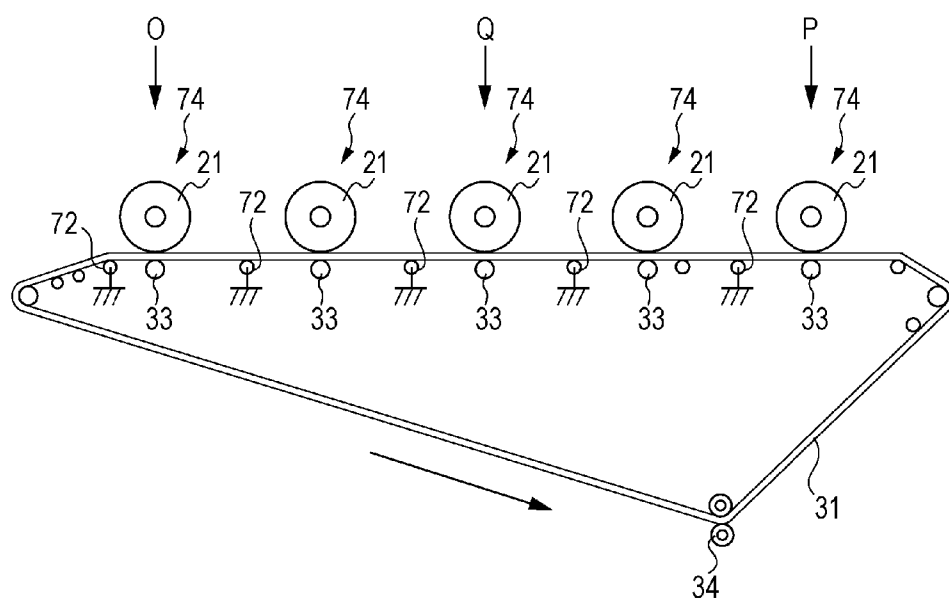


FIG. 3B

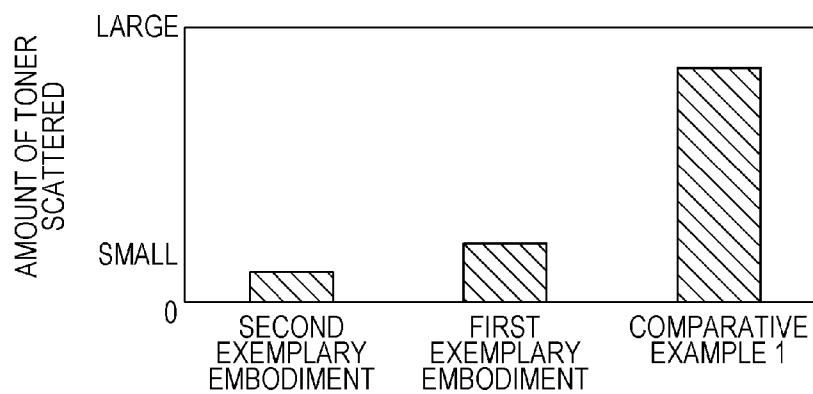


FIG. 4A

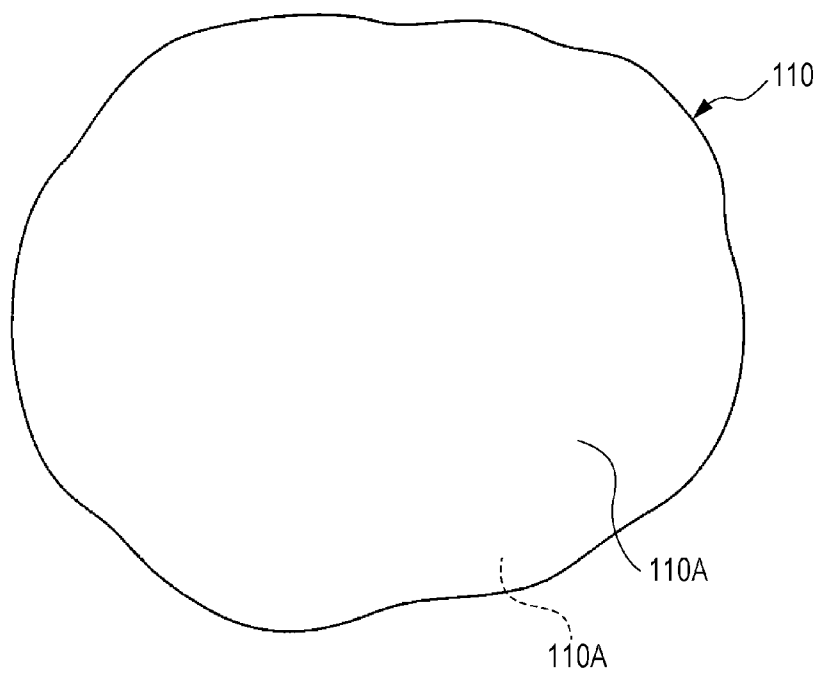


FIG. 4B

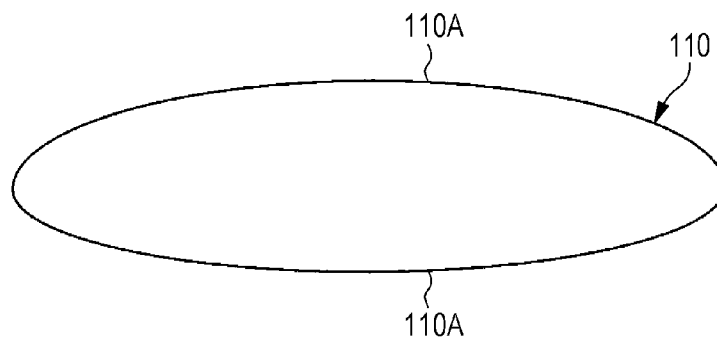


FIG. 5

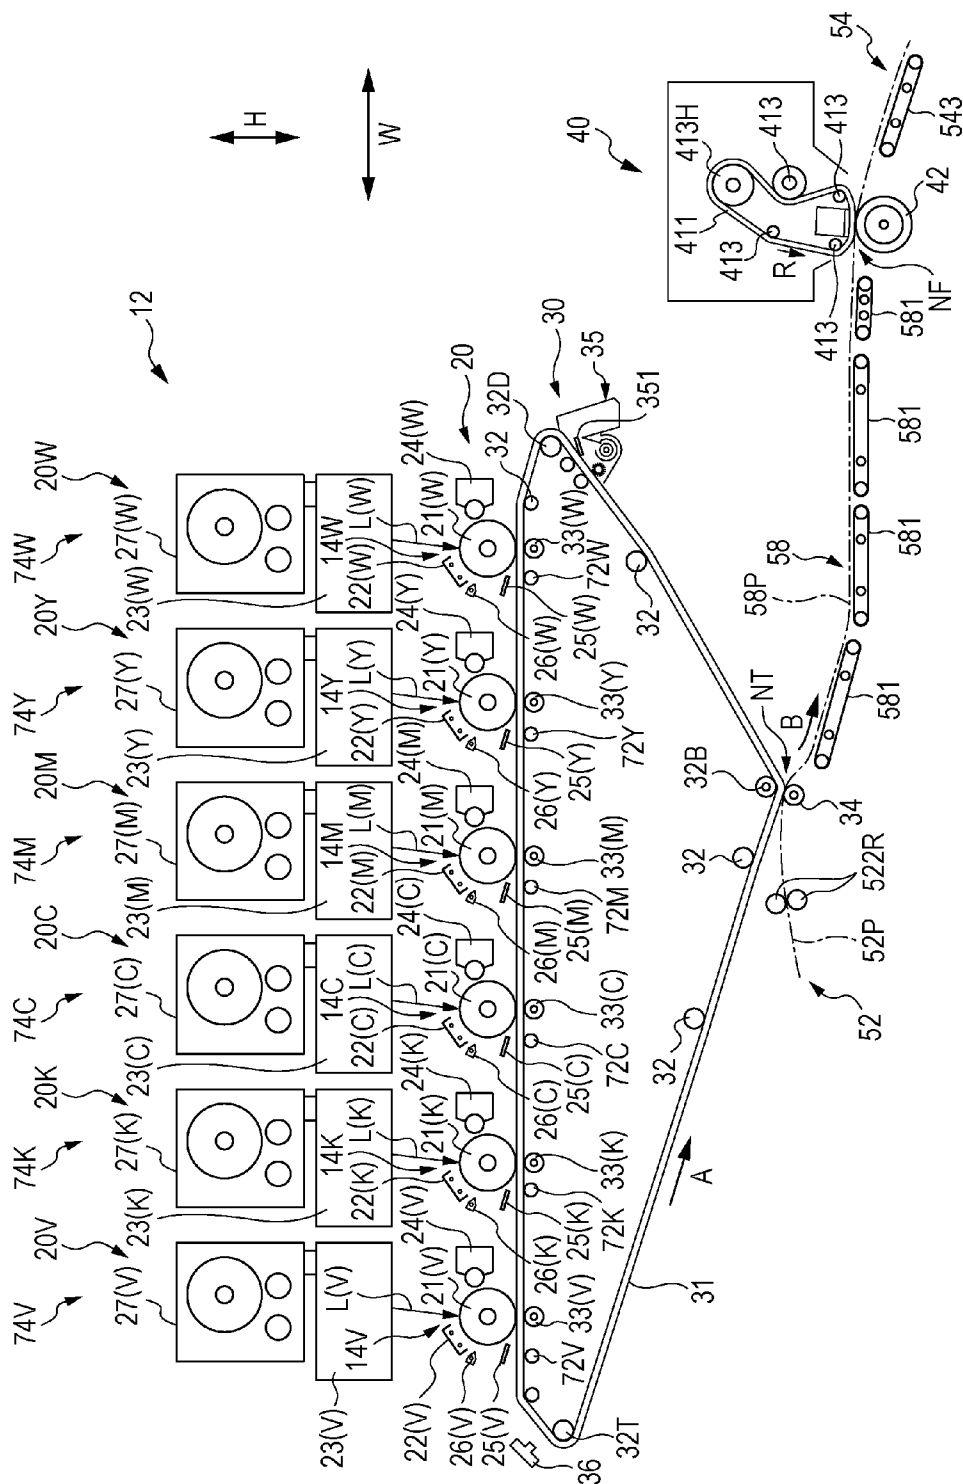


FIG. 6

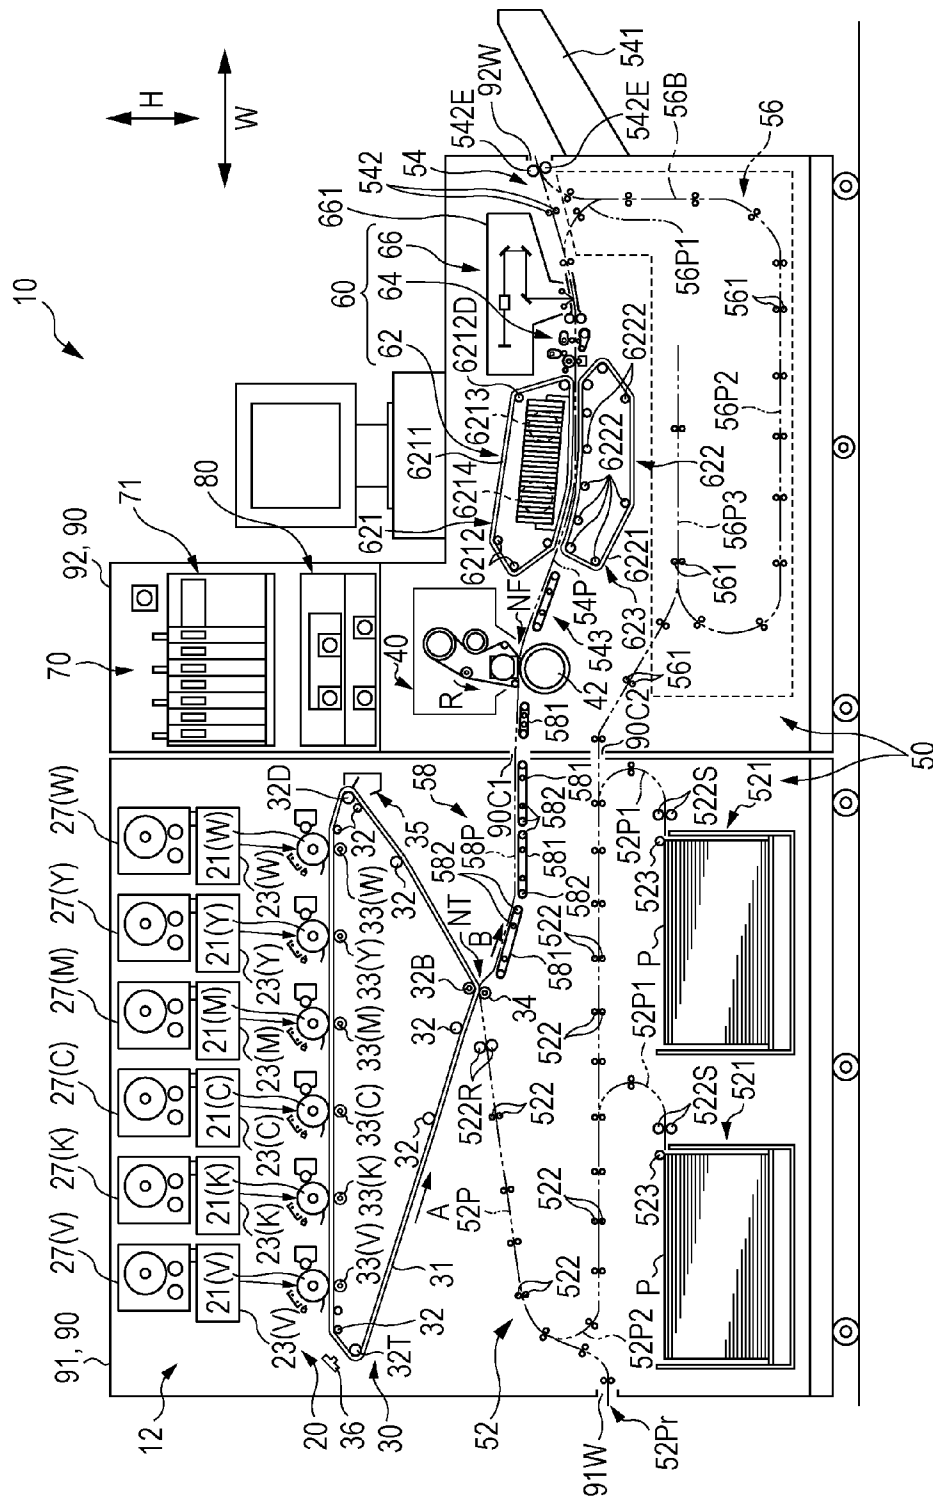


FIG. 7


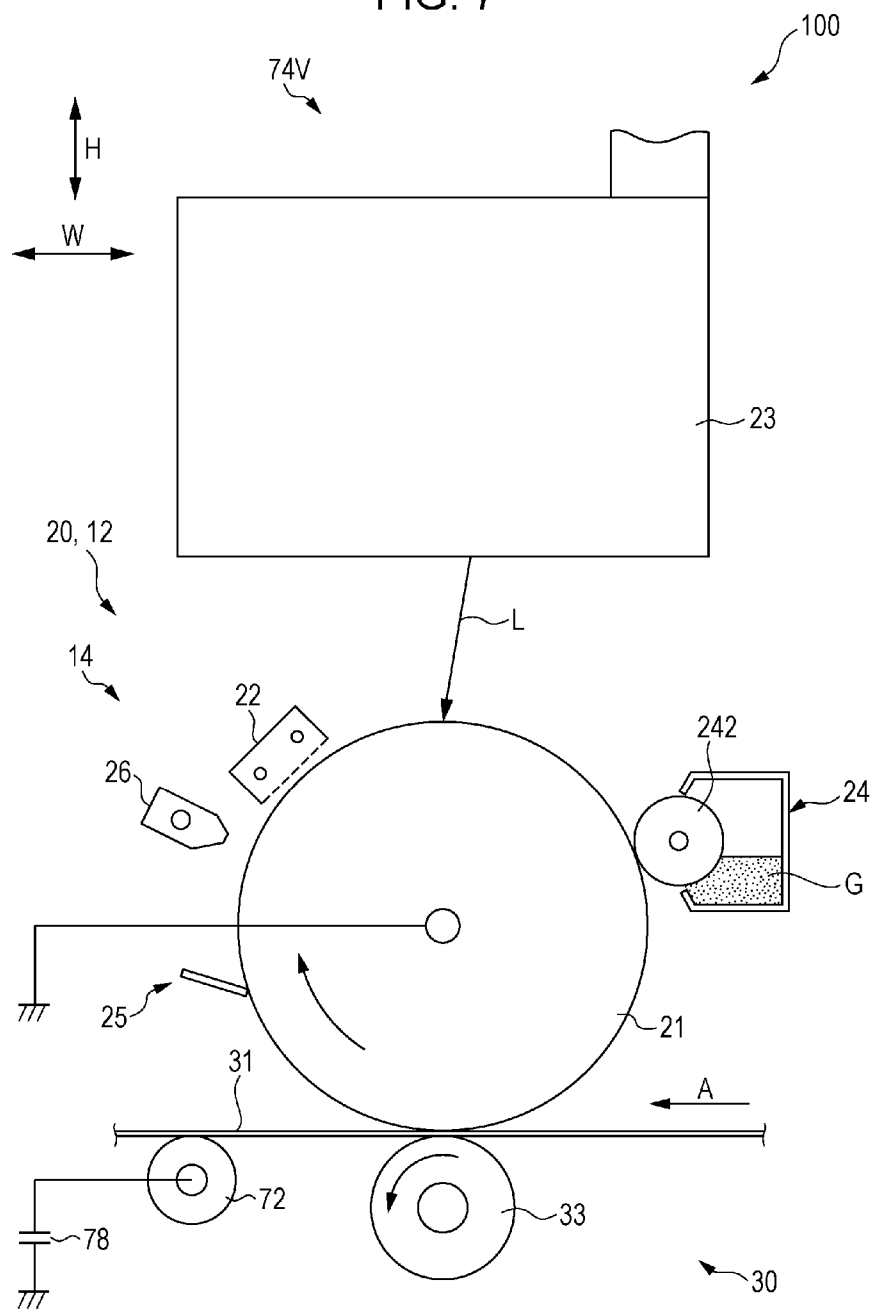


FIG. 8

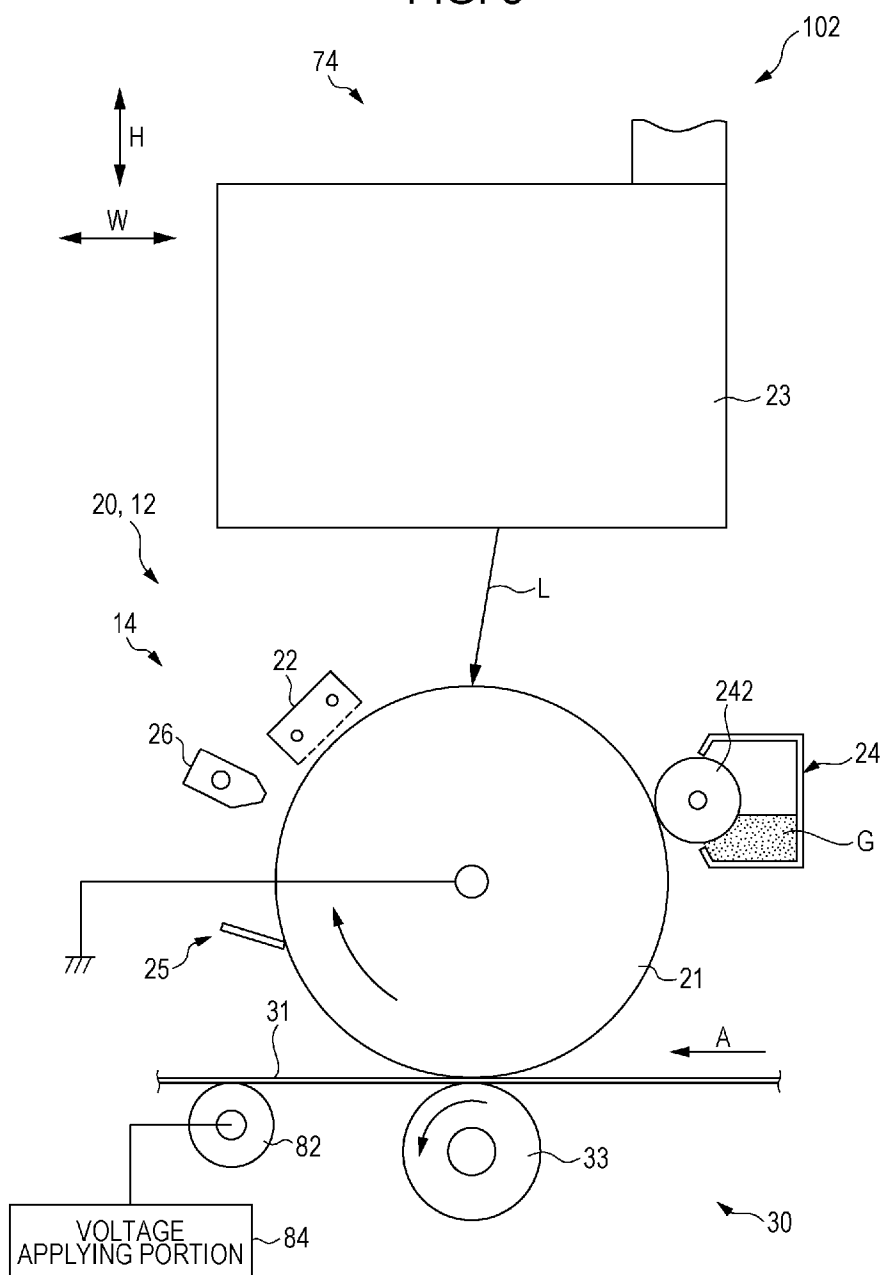

TRANSFER DEVICE AND IMAGE FORMING APPARATUS

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application is based on and claims priority under 35 USC 119 from Japanese Patent Application No. 2014-005185 filed Jan. 15, 2014.

BACKGROUND

Technical Field

[0002] The present invention relates to a transfer device and an image forming apparatus.

SUMMARY

[0003] According to an aspect of the invention, there is provided a transfer device including a transfer body having an endless structure and to which an image is transferred while the transfer body is rotated; a first transfer portion that transfers an image formed with toner containing metallic pigment to a surface of the transfer body by applying a transfer current; a second transfer portion that is disposed on the upstream side of the first transfer portion in the rotation direction of the transfer body and transfers an image formed with toner not containing metallic pigment to the surface of the transfer body by applying a transfer current; and a support member that is grounded and disposed on the downstream side of the first transfer portion in the rotation direction of the transfer body, the support member being in contact with the back surface of the transfer body to support the transfer body.

BRIEF DESCRIPTION OF THE DRAWINGS

[0004] Exemplary embodiments of the present invention will be described in detail based on the following figures, wherein:

[0005] FIGS. 1A and 1B are front views showing the vicinity of a grounded roller of a transfer device according to a first exemplary embodiment of the present invention;

[0006] FIG. 2 is a diagram showing the configuration of a transfer portion etc. of the transfer device according to the first exemplary embodiment of the present invention;

[0007] FIGS. 3A and 3B respectively are a diagram showing the configuration of the transfer portion, a transfer belt, etc. that are used to evaluate an image forming apparatus according to the first exemplary embodiment of the present invention, and a diagram showing the evaluation results;

[0008] FIGS. 4A and 4B are a plan view and a side view, respectively, of a metallic pigment contained in a metallic toner used in the image forming apparatus according to the first exemplary embodiment of the present invention;

[0009] FIG. 5 is a diagram showing the configuration of an image forming section of the image forming apparatus according to the first exemplary embodiment of the present invention;

[0010] FIG. 6 is a schematic diagram showing the configuration of the image forming apparatus according to the first exemplary embodiment of the present invention;

[0011] FIG. 7 is a diagram showing the configuration of a transfer portion etc. of a transfer device according to a second exemplary embodiment of the present invention; and

[0012] FIG. 8 is a diagram showing the configuration of a transfer portion etc. of a transfer device according to a third exemplary embodiment of the present invention.

DETAILED DESCRIPTION

First Exemplary Embodiment

[0013] An example of a transfer device and image forming apparatus according to a first exemplary embodiment of the present invention will be described below with reference to FIGS. 1A to 6. Note that, in the respective drawings, the arrow H indicates the vertical direction, which corresponds to the height direction of the apparatus, and the arrow W indicates the horizontal direction, which corresponds to the width direction of the apparatus. Overall Configuration of Image Forming Apparatus

[0014] FIG. 6 is a schematic diagram showing the overall configuration of an image forming apparatus 10, as viewed from the front. As shown in FIG. 6, the image forming apparatus 10 includes an image forming section 12 that forms an image on a sheet member P, serving as a recording medium, by using electrophotographic system; a medium transport device 50 that transports the sheet member P; and a post-processing section 60 that performs post-processing etc. on the sheet member P on which an image has been formed.

[0015] The image forming apparatus 10 further includes a controller 70 that controls the above-mentioned devices and sections and a power supply unit 80 described below, and a power supply unit 80 that supplies power to the above-mentioned devices and sections, including the controller 70.

[0016] Furthermore, the image forming section 12 includes toner-image forming sections 20 that form toner images, a transfer device 30 that transfers the toner images formed in the toner-image forming sections 20 to a sheet member P, and a fixing device 40 that fixes the toner image transferred to the sheet member P onto the sheet member P.

[0017] The medium transport device 50 includes a medium feeding portion 52 that supplies a sheet member P to the image forming section 12, and a medium discharge portion 54 that discharges the sheet member P having a toner image formed thereon. The medium transport device 50 further includes a medium returning portion 56 that is used when an image is formed on each side of the sheet member P, and an intermediate transport portion 58 described below.

[0018] The post-processing section 60 includes a medium cooling unit 62 that cools a sheet member P to which a toner image has been transferred in the image forming section 12, a straightening device 64 that straightens a curled sheet member P, and an image inspection portion 66 that inspects an image formed on the sheet member P. The components of the post-processing section 60 are disposed in the medium discharge portion 54 of the medium transport device 50.

[0019] The components of the image forming apparatus 10, except for a discharged-medium receiving portion 541 constituting the medium discharge portion 54 of the medium transport device 50, are accommodated in a housing 90. The housing 90 according to this exemplary embodiment is separated into two parts, namely, a first housing 91 and a second housing 92, which are side-by-side in the apparatus width direction. This configuration contributes to a reduction in the transportation unit of the image forming apparatus 10 in the apparatus width direction.

[0020] The first housing 91 accommodates the principal part of the image forming section 12, except for the fixing

device **40** described below, and the medium feeding portion **52**. The second housing **92** accommodates the fixing device **40**, which constitutes the image forming section **12**; the medium discharge portion **54**, except for the discharged-medium receiving portion **541**; the medium cooling unit **62**; the image inspection portion **66**; the medium returning portion **56**; the controller **70**; and the power supply unit **80**. The first housing **91** and the second housing **92** are coupled together with fastening members, such as bolts and nuts (not shown). A communication opening **90C1**, through which a sheet member **P** is transported from a transfer nip **NT** in the image forming section **12** to a fixing nip **NF** (described below), and a communication path **90C2**, through which the sheet member **P** is transported from the medium returning portion **56** to the medium feeding portion **52**, are provided between the first housing **91** and the second housing **92** that are coupled together.

Image Forming Section

[0021] As has been described above, the image forming section **12** includes the toner-image forming sections **20**, the transfer device **30**, and the fixing device **40**. There are multiple toner-image forming sections **20** so that toner images of different colors are formed. In this exemplary embodiment, six toner-image forming sections **20** are provided corresponding to a first special color (**V**), a second special color (**W**), yellow (**Y**), magenta (**M**), cyan (**C**), and black (**K**). The letters (**V**), (**W**), (**Y**), (**M**), (**C**), and (**K**) shown in FIG. **6** indicate the above-mentioned colors. The transfer device **30** transfers six colors of toner images from the transfer belt **31**, which is an example of a transfer body and to which the six colors of toner images have been first-transferred in a superposed manner, to a sheet member **P** at the transfer nip **NT** (a detailed description will be given below).

[0022] In this exemplary embodiment, the first special color (**V**) is, for example, silver, which uses toner containing flat pigment for adding metallic shine to an image. The second special color (**W**) is a corporate color specific to a user, which is more frequently used than the other colors. Details of the silver toner and the control of the respective portions by the controller **70** when an image is to be formed using the silver toner will be described below.

Toner-Image Forming Section

[0023] The toner-image forming sections **20** for the respective colors basically have the same configuration, except for the toners they use. Therefore, image forming units **14** for the respective colors will be described below without distinction. As shown in FIG. **2**, each image forming unit **14** of the toner-image forming section **20** includes a photoconductor drum **21**, which is an example of an image carrier; a charger **22**; an exposure device **23**; a developing device **24**, which is an example of a developing unit; a cleaning device **25**; and a static eliminator **26**.

Photoconductor Drum

[0024] The photoconductor drum **21** is formed in a cylindrical shape, is grounded, and is rotated about its own shaft by a driving device (not shown). The photoconductor drum **21** has, for example, a negatively charged photosensitive layer on the surface thereof. As shown in FIG. **6**, the photoconductor drums **21** for the respective colors are arranged in a straight line in the apparatus width direction, as viewed from the front.

Charger

[0025] As shown in FIG. **2**, the charger **22** negatively charges the surface (photosensitive layer) of the photoconductor drum **21**. In this exemplary embodiment, the charger **22** is a scorotron charger of a corona discharge type (non-contact charging type).

Exposure Device

[0026] The exposure device **23** forms an electrostatic latent image on the surface of the photoconductor drum **21**. More specifically, the exposure device **23** radiates modulated exposure light **L** to the surface of the photoconductor drum **21** that has been charged by the charger **22**, according to image data received from an image signal processing portion **71** (see FIG. **6**) constituting the controller **70**. Due to the radiation of the exposure light **L** by the exposure device **23**, an electrostatic latent image is formed on the surface of the photoconductor drum **21**.

Developing Device

[0027] The developing device **24** develops the electrostatic latent image formed on the surface of the photoconductor drum **21** with developer **G** containing toner, thereby forming a toner image on the surface of the photoconductor drum **21**. The toner is supplied from a toner cartridge **27**, which contains the toner, to the developing device **24**.

Cleaning Device

[0028] The cleaning device **25** is blade-shaped so that it scrapes off the toner remaining on the surface of the photoconductor drum **21** after the toner image has been transferred to the transfer device **30**.

Static Eliminator

[0029] The static eliminator **26** removes static electricity by radiating light to the photoconductor drum **21** after the transfer. Thus, the charging history on the surface of the photoconductor drum **21** is deleted.

Transfer Device

[0030] The transfer device **30** first-transfers toner images on the photoconductor drums **21** for the respective colors to the transfer belt **31** in a superposed manner, and then second-transfers the superposed toner image to a sheet member **P**. A detailed description will be given below.

Transfer Belt

[0031] As shown in FIG. **5**, the transfer belt **31** is an endless belt wound around multiple rollers **32** so as to be held in a certain orientation. In this exemplary embodiment, the transfer belt **31** is held in an inverted obtuse triangular orientation elongated in the apparatus width direction in front view. Of the multiple rollers **32**, a roller **32D** shown in FIG. **5** serves as a driving roller that drives the transfer belt **31** in an arrow **A** direction, using the power supplied by a motor (not shown).

[0032] Furthermore, of the multiple rollers **32**, a roller **32T** shown in FIG. **5** serves as a tension roller that applies tension to the transfer belt **31**. Of the multiple rollers **32**, a roller **32B** shown in FIG. **5** serves as an opposing roller for a second transfer roller **34** (described below). The lower apex portion of the transfer belt **31**, which is held in an inverted obtuse

triangular orientation as described above, is wound around this roller **32B**. The surface of the transfer belt **31** is in contact with the photoconductor drums **21** for the respective colors from below, at the upper peripheral portion extending in the apparatus width direction in the above-described orientation.

First Transfer Roller

[0033] First transfer rollers **33**, which are an example of a transfer member, that transfer toner images on the respective photoconductor drums **21** to the transfer belt **31** are arranged inside the transfer belt **31**. The first transfer rollers **33** are disposed so as to oppose the corresponding photoconductor drums **21** with the transfer belt **31** therebetween. Furthermore, a power supply portion (not shown) applies a transfer bias voltage (positive voltage) of an opposite polarity to the polarity of the toner (in this exemplary embodiment, for example, negative) to the first transfer rollers **33**. Due to the application of this transfer bias voltage, the toner images formed on the photoconductor drums **21** are transferred to the transfer belt **31**.

[0034] As has been described above, a transfer portion **74V**, which is an example of a first transfer portion, that transfers an image formed with toner containing flat metallic pigment to the transfer belt **31** by applying a transfer current includes a first transfer roller **33V**. Furthermore, transfer portions **74K**, **74C**, **74M**, **74Y**, and **74W**, which are an example of a second transfer portion, that transfer images formed with toner not containing flat metallic pigment to the transfer belt **31** by applying a transfer current include the first transfer rollers **33K**, **33C**, **33M**, **33Y**, and **33W**, respectively.

Second Transfer Roller

[0035] Furthermore, the transfer device **30** includes the second transfer roller **34** that transfers a superposed toner image formed on the transfer belt **31** to a sheet member **P**. The second transfer roller **34** is arranged to face the roller **32B** with the transfer belt **31** therebetween, forming the transfer nip **NT** between the second transfer roller **34** and the transfer belt **31**. Sheet members **P** are fed from the medium feeding portion **52** to this transfer nip **NT** at appropriate timing. A power supply portion (not shown) applies a transfer bias voltage (positive voltage) having an opposite polarity to the polarity of the toner to the second transfer roller **34**. Due to the application of this transfer bias voltage, the toner image is transferred from the transfer belt **31** to the sheet member **P** passing through the transfer nip **NT**.

Cleaning Device

[0036] The transfer device **30** further includes a cleaning device **35** that cleans the transfer belt **31** after the second transfer. The cleaning device **35** is disposed on the downstream side of the position where the second transfer is performed (transfer nip **NT**) and on the upstream side of the position where the first transfer is performed, in the rotation direction of the transfer belt **31**. The cleaning device **35** includes a blade **351** that scrapes off the toner remaining on the surface of the transfer belt **31**.

[0037] Furthermore, a static eliminator (not shown) that removes static electricity from the transfer belt **31** is provided next to the cleaning device **35**.

Fixing Device

[0038] The fixing device **40** fixes a toner image transferred to a sheet member **P** in the transfer device **30** onto the sheet member **P**. In this exemplary embodiment, the fixing device **40** fixes the toner image onto the sheet member **P** by applying pressure while heating the toner image at the fixing nip **NF**, which is formed between a fixing belt **411** wound around multiple rollers **413** and a pressure roller **42**. Note that a roller **413H** is a heating roller that accommodates, for example, a heater therein and is rotated by a driving force transmitted from a motor (not shown). Thus, the fixing belt **411** is rotated in an arrow **R** direction.

[0039] The pressure roller **42** is also rotated by a driving force transmitted from a motor (not shown), at the same peripheral velocity as the fixing belt **411**. The fixing temperature, fixing pressure, and fixing time etc. of the fixing device **40** controlled by the controller **70** will be described in detail below.

Medium Transport Device

[0040] As shown in FIG. 6, the medium transport device **50** includes the medium feeding portion **52**, the medium discharge portion **54**, the medium returning portion **56**, and the intermediate transport portion **58**.

Medium Feeding Portion

[0041] The medium feeding portion **52** includes containers **521** in which a stack of sheet members **P** is stored. In this exemplary embodiment, two containers **521** are arranged side-by-side in the apparatus width direction, below the transfer device **30**.

[0042] Medium supply paths **52P** extending from the containers **521** to the transfer nip **NT** (second transfer position) are formed by multiple transport roller pairs **522** and guides (not shown), etc. Each medium supply path **52P** is bent in the apparatus width direction at two bent portions **52P1** and **52P2** and extends upward to the transfer nip **NT**, forming a substantially **S** shape.

[0043] Feeding rollers **523** that feed the top sheets of the sheet members **P** stored in the containers **521** are provided above the containers **521**. Among the multiple transport roller pairs **522**, transport roller pairs **522S** located on the most upstream side in the sheet transport direction serve as separation rollers that separate the sheet members **P** fed in a stacked manner from the containers **521** by the feeding rollers **523** into individual sheet members **P**. Furthermore, among the multiple transport roller pairs **522**, a transport roller pair **522R** located immediately upstream of the transfer nip **NT** in the sheet transport direction is operated so as to match the timing of transporting a toner image on the transfer belt **31** and the timing of transporting a sheet member **P**.

[0044] The medium feeding portion **52** further includes an auxiliary transport path **52Pr**. The auxiliary transport path **52Pr** extends from an opening **91W** provided in a wall of the first housing **91** opposite from a wall adjacent to the second housing **92** and joins the bent portion **52P2** of the medium supply path **52P**. The auxiliary transport path **52Pr** is a transport path that is used to feed a sheet member **P**, fed from an optional recording medium feeding device (not shown) provided adjacent to the opening **91W** in the first housing **91**, to the image forming section **12**.

Intermediate Transport Portion

[0045] As shown in FIG. 5, the intermediate transport portion 58 is disposed between the transfer nip NT in the transfer device 30 and the fixing nip NF in the fixing device 40 and includes multiple belt transport members 581 each formed of an endless transport belt wound around rollers.

[0046] The transport members 581 transport a sheet member P by rotating the transport belts, while sucking air (negative pressure suction) from the inside to make the sheet member P adhere to the surfaces of the transport belts.

Medium Discharge Portion

[0047] As shown in FIG. 6, the medium discharge portion 54 discharges a sheet member P onto which a toner image has been fixed by the fixing device 40 in the image forming section 12 to the outside of the housing 90 from a discharge port 92W provided in a wall of the second housing 92 opposite from a wall adjacent to the first housing 91.

[0048] The medium discharge portion 54 includes the discharged-medium receiving portion 541 that receives the sheet member P discharged from the discharge port 92W.

[0049] The medium discharge portion 54 includes a medium discharge path 54P along which a sheet member P is transported from the fixing device 40 (fixing nip NF) to the discharge port 92W. The medium discharge path 54P includes a belt transport member 543, multiple roller pairs 542, and guides (not shown) etc. Among the multiple roller pairs 542, a roller pair 542E that is disposed on the most downstream side in a sheet discharge direction serves as discharge rollers that discharge the sheet member P onto the discharged-medium receiving portion 541.

Medium Returning Portion

[0050] The medium returning portion 56 includes multiple roller pairs 561. The multiple roller pairs 561 form a reversing path 56P into which a sheet member P having passed through the image inspection portion 66 is fed when an image is to be formed also on the other side of the sheet member P. The reversing path 56P includes a diverging path 56P1, a transport path 56P2, and a reversing path 56P3. The diverging path 56P1 diverges from the medium discharge path 54P. The transport path 56P2 sends a sheet member P received from the diverging path 56P1 into the medium supply path 52P. The reversing path 56P3 is provided at an intermediate position of the transport path 56P2 and reverses a sheet member P by changing the direction in which the sheet member P is transported along the transport path 56P2 (i.e., switchback transportation).

Post-Processing Section

[0051] The medium cooling unit 62, the straightening device 64, and the image inspection portion 66, which constitute the post-processing section 60, are arranged on the upstream side, in the sheet discharge direction, of a diverging portion of the diverging path 56P1 of the medium discharge path 54P of the medium discharge portion 54, in sequence from the upstream side in the discharge direction.

Medium Cooling Unit

[0052] The medium cooling unit 62 includes a heat-absorbing device 621 that absorbs the heat of a sheet member P, and a pressing device 622 that presses the sheet member P onto

the heat-absorbing device 621. The heat-absorbing device 621 is disposed above the medium discharge path 54P, and the pressing device 622 is disposed below the medium discharge path 54P.

[0053] The heat-absorbing device 621 includes an endless heat-absorbing belt 6211, multiple rollers 6212 that support the heat-absorbing belt 6211, a heat sink 6213 disposed inside the heat-absorbing belt 6211, and a fan 6214 for cooling the heat sink 6213.

[0054] The heat-absorbing belt 6211 is in contact with the sheet member P at the outer circumferential surface thereof so as to be able to exchange heat. Among the multiple rollers 6212, a roller 6212D serves as a driving roller that transmits a driving force to the heat-absorbing belt 6211. The heat sink 6213 is in sliding contact with the inner circumferential surface of the heat-absorbing belt 6211, over a predetermined area along the medium discharge path 54P.

[0055] The pressing device 622 includes an endless pressing belt 6221 and multiple rollers 6222 that support the pressing belt 6221. The pressing belt 6221 is wound around the multiple rollers 6222. The pressing device 622 transports the sheet member P in cooperation with the heat-absorbing belt 6211 by pressing the sheet member P onto the heat-absorbing belt 6211 (heat sink 6213).

Straightening Device

[0056] The straightening device 64 is provided on the downstream side of the medium cooling unit 62 in the medium discharge portion 54. The straightening device 64 straightens a curled sheet member P received from the medium cooling unit 62.

Image Inspection Portion

[0057] An in-line sensor 661, which constitutes the principal part of the image inspection portion 66, is disposed on the downstream side of the straightening device 64 in the medium discharge portion 54. The in-line sensor 661 detects the presence/absence and level of toner intensity defect, image defect, image position defect, etc. in a fixed toner image, on the basis of light emitted to and reflected from the sheet member P.

Image Forming Operation (Action) of Image Forming Apparatus

[0058] Next, the outline of an image forming process and subsequent post-processing process performed on a sheet member P by the image forming apparatus 10 will be described.

[0059] As shown in FIG. 6, upon receipt of an image forming instruction, the controller 70 activates the toner-image forming sections 20, the transfer device 30, and the fixing device 40. As a result, as shown in FIG. 5, the photoconductor drums 21 and developing rollers 242 of the developing devices 24 of the image forming units 14 for the respective colors are rotated, and the transfer belt 31 is rotated. Furthermore, the pressure roller 42 is rotated, and the fixing belt 411 is rotated. In synchronization with these operations, the controller 70 activates the medium transport device 50 etc.

[0060] As a result, the photoconductor drums 21 for the respective colors are charged by the chargers 22 while being rotated. Furthermore, the controller 70 sends image data processed by the image signal processing portion to the exposure devices 23. The exposure devices 23 emit exposure light L according to the image data to expose the charged photocon-

ductor drums **21**. As a result, electrostatic latent images are formed on the surfaces of the photoconductor drums **21**. The electrostatic latent images formed on the respective photoconductor drums **21** are developed with developer supplied from the developing devices **24**. In this way, toner images of the first special color (V), second special color (W), yellow (Y), magenta (M), cyan (C), and black (K) are formed on the corresponding photoconductor drums **21** for the respective colors.

[0061] The toner images of the respective colors, formed on the photoconductor drums **21** for the respective colors, are sequentially transferred to the rotating transfer belt **31** due to the application of transfer bias voltages via the first transfer rollers **33** for the respective colors.

[0062] More specifically, transfer bias voltages are applied to the first transfer rollers **33**, and transfer currents flow from the first transfer rollers **33** to the photoconductor drums **21**. Then, the transfer belt **31** is positively charged, and toner images formed of negatively charged toner are transferred to the transfer belt **31**.

[0063] In this manner, a superposed toner image, in which six colors of toner images are superposed on one another, is formed on the transfer belt **31**. This superposed toner image is transported to the transfer nip NT by the rotating transfer belt **31**.

[0064] As shown in FIG. 6, the transport roller pair **522R** of the medium feeding portion **52** feeds a sheet member P to the transfer nip NT at the same time when the superposed toner image is transported thereto. When a transfer bias voltage is applied at the transfer nip NT, the superposed toner image is transferred from the transfer belt **31** to the sheet member P.

[0065] The sheet member P to which the toner image has been transferred is transported from the transfer nip NT in the transfer device **30** to the fixing nip NF in the fixing device **40** by the intermediate transport portion **58**. The fixing device **40** applies heat and pressure to the sheet member P passing through the fixing nip NF. As a result, the toner image transferred to the sheet member P is fixed.

[0066] The sheet member P discharged from the fixing device **40** is transported toward the discharged-medium receiving portion **541** outside the apparatus by the medium discharge portion **54**, while being processed by the post-processing section **60**. The sheet member P heated in the fixing process is first cooled by the medium cooling unit **62**. Then, the sheet member P is straightened by the straightening device **64**. Then, the toner image fixed to the sheet member P is inspected by the image inspection portion **66** for the presence/absence and level of toner intensity defect, image defect, image position defect, etc. Finally, the sheet member P is discharged onto the medium discharge portion **54**.

[0067] On the other hand, when an image is to be formed on a non-image surface (a surface on which no image is formed) of the sheet member P (i.e., when double-sided printing is to be performed), the controller **70** switches the transport path for the sheet member P after passing the image inspection portion **66** from the medium discharge path **54P** of the medium discharge portion **54** to the diverging path **56P1** of the medium returning portion **56**. By doing so, the sheet member P is reversed via the reversing path **56P** and is sent to the medium supply path **52P**. An image is formed (fixed) on the back surface of the sheet member P through the same process as the image forming process performed on the front surface. Then, the sheet member P goes through the same process as that performed on the front surface after image

formation and is discharged onto the discharged-medium receiving portion **541** outside the apparatus by the medium discharge portion **54**.

Configuration of Relevant Part

[0068] Next, the position of the transfer portions **74** for the respective colors, silver toner particles **112** used as the first special color (V), etc. will be described.

Position of Transfer Portion

[0069] As shown in FIG. 5, the transfer portions **74** for colors other than silver (hereinbelow, simply “other colors”) are arranged on the upstream side of the transfer portion **74V** for silver, in the rotation direction of the transfer belt **31**. In other words, the transfer portion **74V** for silver is located on the most downstream side of all the transfer portions **74**, in the rotation direction of the transfer belt **31**.

Silver Toner

[0070] As shown in FIG. 1A, silver toner particles **112** used as the first special color (V) each are composed of pigment **110**, which is an example of flat metallic pigment, and binder resin **111** covering the pigment **110**. Thus, the toner particles **112** are also flat. The toner particles **112** are used to add metallic shine to an image.

[0071] The pigment **110** is formed of aluminum. If the pigment **110** placed on a flat surface is viewed from the side, as shown in FIG. 4B, the pigment **110** is larger in the horizontal direction than in the height direction.

[0072] Furthermore, if the pigment **110** shown in FIG. 4B is viewed from above, as shown in FIG. 4A, the pigment **110** is wider than that as viewed from the side. The pigment **110** placed on a flat surface (see FIG. 4B) has a pair of reflection surfaces **110A** (flat surfaces) facing up and down. In this manner, the pigment **110** is flat.

[0073] Note that the other toners used as the second special color (W), yellow (Y), magenta (M), cyan (C), and black (K) include pigment (for example, organic or inorganic pigment) that does not contain flat metallic pigment, and binder resin.

Other Configurations

[0074] As shown in FIGS. 2 and 1A, grounded rollers **72** that are grounded and are in contact with the back surface of the transfer belt **31** to support the transfer belt **31** are provided on the downstream side, in the rotation direction of the transfer belt **31**, of the transfer portions **74** for the respective colors. The grounded rollers **72** serve as so-called surface lifting rollers.

[0075] As has been described above, due to the transfer currents flowing from the first transfer rollers **33** to the photoconductor drums **21**, the transfer belt **31** is positively charged, causing negatively charged toner to be transferred to the positively charged transfer belt **31**. However, because the grounded rollers **72** that are in contact with the back surface of the transfer belt **31** are grounded, the charge of the transfer belt **31** escapes through the grounded rollers **72**. Hence, the positive charge amount at portions of the transfer belt **31** in contact with the grounded rollers **72** is small (decreases). Furthermore, because the electrical conductivity of the toner particles **112** containing the metallic pigment **110** is higher than that of toner not containing metallic pigment, the negative charge amount of the toner particles **112** is small. Therefore, the toner particles **112** containing the metallic pigment

110 may be scattered over the transfer belt **31** when passing the portion of the transfer belt **31** that is in contact with the grounded roller **72V**, which is an example of a support member and is disposed on the downstream side of the transfer portion **74V** for silver.

[0076] Now, scattering of the toner particles **112** containing the metallic pigment **110** that have been transferred to the transfer belt **31** will be described by comparing an image forming apparatus **200** according to a comparative example and the image forming apparatus **10** according to this exemplary embodiment.

[0077] In the image forming apparatus **200** according to the comparative example, the transfer portion **74V** for silver is located on the most upstream side of all the transfer portions **74** in the rotation direction of the transfer belt **31**. Hence, as shown in FIG. 1B, a portion of the transfer belt **31** that has no static electricity after removal of static electricity by a static eliminating member (not shown) is charged for the first time when facing the first transfer roller **33V**.

[0078] Because a portion of the transfer belt **31** to which the toner particles **112** are transferred has faced the first transfer roller **33** only once, the charge amount of that portion is smaller than that in a case where that portion has faced the first transfer roller **33** more than once. Therefore, the toner particles **112** transferred to the transfer belt **31** are scattered over the transfer belt **31** when passing the grounded roller **72V**. In particular, because the toner particles **112** are flat, the contact area between the toner particles **112** and the transfer belt **31** is small when the toner particles **112** are standing upright on the transfer belt **31**, as shown in FIG. 1B, compared with a state in which the toner particles **112** lie flat. Thus, the toner particles **112** are easily scattered over the transfer belt **31**.

[0079] In contrast, in the image forming apparatus **10** according to the exemplary embodiment, the transfer portions **74** for the other colors are disposed on the upstream side of the transfer portion **74V** for silver in the rotation direction of the transfer belt **31**. In this exemplary embodiment, the transfer portion **74V** for silver is disposed on the most downstream side of all the transfer portions **74** in the rotation direction of the transfer belt **31**. Therefore, as shown in FIG. 1A, a portion of the transfer belt **31** that has already been positively charged is further charged by a transfer current when facing the first transfer roller **33V**.

[0080] Because a portion of the transfer belt **31** to which the toner particles **112** are transferred has faced the first transfer rollers **33** several times, the charge amount of that portion is greater than that in a case where that portion has faced the first transfer roller **33** only once. Therefore, scattering of the toner particles **112** transferred to the transfer belt **31** over the transfer belt **31**, occurring when passing the grounded roller **72V**, is suppressed.

Evaluation

[0081] Next, scattering of toner over the transfer belt **31** is evaluated while changing the position of the transfer portion **74V** for silver.

Position of Evaluation

[0082] As shown in FIG. 3A, five transfer portions **74** are provided along the transfer belt **31**, and the transfer portion **74V** for silver is disposed at the position described below. Note that the transfer portions **74** shown in FIG. 3A are

illustrated only with the photoconductor drums **21** and the first transfer rollers **33**; illustration of the other members is omitted.

(1) Comparative Example

[0083] The transfer portion **74V** is disposed on the most upstream side in the rotation direction of the transfer belt **31** (i.e., the position on the extreme right side in FIG. 3A (Position P)).

(2) First Exemplary Embodiment

[0084] The transfer portion **74V** is disposed as the third transfer portion from the upstream end in the rotation direction of the transfer belt **31** (i.e., the middle position in FIG. 3A (position Q)).

(3) Second Exemplary Embodiment

[0085] The transfer portion **74V** is disposed on the most downstream side in the rotation direction of the transfer belt **31** (i.e., the position on the extreme left side in FIG. 3A (position O)).

Conditions and Specifications of Evaluation

- [0086] 1. Environment
- [0087] Temperature/Humidity: 28 [° C.]/85 [%RH]
- [0088] 2. First Transfer Roller
- [0089] Outside Diameter: $\phi 28$ [mm]
- [0090] Roller Resistance When a Voltage of 1000 [V] Is Applied: 7.7 [Log Ω]
- [0091] First Transfer Current: 45 [μ A]
- [0092] Metal Shaft Covered with a Conducting Rubber Layer
- [0093] 3. Intermediate Transfer Belt
- [0094] Volume Resistance When a Voltage of 500 [V] Is Applied: 12.0 [Log $\Omega \cdot \text{cm}$] (measured using a UR probe)
- [0095] Seamless Belt Composed of Polyimide and Carbon Black Dispersed Therein
- [0096] 4. Grounded Roller
- [0097] Outside Diameter: 18 [mm]
- [0098] Material: Aluminum

Method of Evaluation

- [0099] 1. Toner is recovered from the transfer belt after passing the grounded roller. More specifically, toner on the transfer belt is recovered by using a transparent tape (Scotch "Toumei bishoku" (manufactured by Sumitomo 3M Limited)).
- [0100] 2. A piece of transparent tape to which toner is adhered is attached to a coated paper (OS coated paper W 127 [g/m²]).
- [0101] 3. The piece of transparent tape attached to the coated paper is scanned by using a scanner (EPSON ES-10000G) and is converted into image data (resolution: 400 dpi, BMP).
- [0102] 4. The image data is converted into two-gradation image data to obtain the scattering area of the toner (the amount of toner scattered).

Evaluation Results

[0103] The evaluation results are shown in a bar chart in FIG. 3B. The vertical axis of the bar chart shows the amount of toner scattered as a result of using the grounded roller **72V**.

[0104] As shown in FIG. 3B, the amount of toner scattered decreases in sequence of Comparative Example 1, the first exemplary embodiment, and the second exemplary embodiment. That is, the amount of toner scattered is largest in Comparative Example 1 and is smallest in the second exemplary embodiment.

Summary of the Configuration of the Relevant Part

[0105] As is understood from the evaluation results above, due to the portion of the transfer belt 31 to which the silver toner particles 112 are transferred facing the first transfer rollers 33 several times, the charge amount of that portion increases. Hence, scattering of the toner particles 112 transferred to the transfer belt 31 over the transfer belt 31, occurring when passing the grounded roller 72V, is suppressed.

[0106] In particular, by disposing the transfer portion 74V on the most downstream side, scattering of the toner particles 112 transferred to the transfer belt 31 is effectively suppressed.

Second Exemplary Embodiment

[0107] Next, an example of a transfer device and image forming apparatus according to a second exemplary embodiment of the present invention will be described with reference to FIG. 7. Note that the same components as those of the first exemplary embodiment will be denoted by the same reference numerals, and a description thereof will be omitted; a configuration different from that of the first exemplary embodiment will be described.

[0108] As shown in FIG. 7, an image forming apparatus 100 according to the second exemplary embodiment includes a resistor 78. The grounded roller 72V is grounded via the resistor 78.

[0109] Due to this configuration, the charge amount of the transfer belt 31 escaping through the grounded roller 72V is smaller than that in the case without the resistor 78. Thus, scattering of the toner particles 112 transferred to the transfer belt 31 over the transfer belt 31 when passing the grounded roller 72V is effectively suppressed.

[0110] Note that the resistor 78 is provided to achieve high-resistance grounding, and has an electric resistance of, for example, 20 [MΩ] or more.

Third Exemplary Embodiment

[0111] Next, an example of a transfer device and image forming apparatus according to a third exemplary embodiment of the present invention will be described with reference to FIG. 8. Note that the same components as those of the first exemplary embodiment will be denoted by the same reference numerals, and a description thereof will be omitted; a configuration different from that of the first exemplary embodiment will be described.

[0112] As shown in FIG. 8, an image forming apparatus 102 according to the third exemplary embodiment includes a support roller 82, which is an example of a support member, that comes into contact with the back surface of the transfer belt 31 to support the transfer belt 31.

[0113] More specifically, the support roller 82 that comes into contact with the back surface of the transfer belt 31 to support the transfer belt 31 is provided on the downstream side of the transfer portion 74V (an example of the first

transfer portion) in the rotation direction of the transfer belt 31. This support roller 82 serves as a so-called surface lifting roller.

[0114] The image forming apparatus 102 further includes a voltage applying portion 84 that applies, to the support roller 82, such a voltage that causes the toner particles 112, containing the pigment 110, to be electrostatically attracted to the transfer belt 31 (i.e., a positive voltage: a voltage having the opposite polarity to the charged toner).

[0115] Thus, scattering of the toner particles 112 transferred to the transfer belt 31 over the transfer belt 31 when passing the support roller 82 is effectively suppressed.

[0116] Furthermore, the transfer portion 74V is disposed on the downstream side of the transfer portions 74 for the other colors in the rotation direction of the transfer belt 31. Thus, the voltage applied to the support roller 82 to suppress scattering of the toner particles 112 over the transfer belt 31 is smaller than that in a case where the transfer portion 74V is disposed on the upstream side of the transfer portions 74 for the other colors.

[0117] Although specific exemplary embodiments of the present invention have been described in detail, the present invention is not limited to these exemplary embodiments, and it is obvious for those skilled in the art that various other exemplary embodiments are possible within a scope of the present invention. For example, the number of the transfer portions 74 for the other colors, which is more than one in the first and second exemplary embodiments, may be one.

[0118] Furthermore, although the transfer portion 74V for silver is disposed on the most downstream side in the rotation direction of the transfer belt 31 in the first and second exemplary embodiments, it is only necessary that at least one of the transfer portions 74 for the other colors is disposed on the upstream side of the transfer portion 74V for silver in the rotation direction of the transfer belt 31.

[0119] Furthermore, although the transfer portion 74V for silver is disposed on the most downstream side in the rotation direction of the transfer belt 31 in the third exemplary embodiment, the transfer portion 74V for silver may be disposed, for example, on the most upstream side in the rotation direction of the transfer belt 31, or it may be disposed at an intermediate position.

[0120] Furthermore, although the image forming apparatus 102 has the transfer portions 74 for the other colors in the third exemplary embodiment, the transfer portions 74 for the other colors do not necessarily have to be provided.

[0121] Furthermore, although the pigment 110 has a flat shape in the above-described exemplary embodiments, the pigment 110 may have another shape, such as, for example, a ball shape.

[0122] The foregoing description of the exemplary embodiments of the present invention has been provided for the purposes of illustration and description. It is not intended to be exhaustive or to limit the invention to the precise forms disclosed. Obviously, many modifications and variations will be apparent to practitioners skilled in the art. The embodiments were chosen and described in order to best explain the principles of the invention and its practical applications, thereby enabling others skilled in the art to understand the invention for various embodiments and with the various modifications as are suited to the particular use contemplated. It is intended that the scope of the invention be defined by the following claims and their equivalents.

What is claimed is:

1. A transfer device comprising:
 - a transfer body having an endless structure and to which an image is transferred while the transfer body is rotated;
 - a first transfer portion that transfers an image formed with toner containing metallic pigment to a surface of the transfer body by applying a transfer current;
 - a second transfer portion that is disposed on the upstream side of the first transfer portion in the rotation direction of the transfer body and transfers an image formed with toner not containing metallic pigment to the surface of the transfer body by applying a transfer current; and
 - a support member that is grounded and disposed on the downstream side of the first transfer portion in the rotation direction of the transfer body, the support member being in contact with the back surface of the transfer body to support the transfer body.
2. The transfer device according to claim 1, wherein the transfer device includes a plurality of the second transfer portions, and wherein all the second transfer portions are disposed on the upstream side of the first transfer portion in the rotation direction of the transfer body.
3. The transfer device according to claim 1, wherein the support member is grounded via a resistor.
4. The transfer device according to claim 1, wherein the metallic pigment is flat metallic pigment.
5. A transfer device comprising:
 - a transfer body having an endless structure and to which an image is transferred while the transfer body is rotated;
 - a first transfer portion that transfers an image formed with toner containing metallic pigment to a surface of the transfer body by applying a transfer current; and
 - a support member which is disposed on the downstream side of the first transfer portion in the rotation direction of the transfer body, the support member being in contact with the back surface of the transfer body, and to which a voltage having an opposite polarity to the polarity of the toner is applied.
6. The transfer device according to claim 5, further comprising a second transfer portion that is disposed on the upstream side of the first transfer portion in the rotation direction of the transfer body and transfers an image formed with toner not containing metallic pigment to the surface of the transfer body by applying a transfer current.
7. The transfer device according to claim 6, wherein the transfer device includes a plurality of the second transfer portions, and wherein all the second transfer portions are disposed on the upstream side of the first transfer portion in the rotation direction of the transfer body.
8. The transfer device according to claim 5, wherein the metallic pigment is flat metallic pigment.
9. An image forming apparatus comprising:
 - the transfer device according to claim 1; and
 - a medium transfer portion that transfers an image transferred to the transfer body of the transfer device to a recording medium.

* * * * *