

(19) **DANMARK**

(10) **DK/EP 2106562 T3**



(12)

Oversættelse af
europæisk patentskrift

Patent- og
Varemærkestyrelsen

-
- (51) Int.Cl.: **G 02 B 6/38 (2006.01)**
- (45) Oversættelsen bekendtgjort den: **2015-06-01**
- (80) Dato for Den Europæiske Patentmyndigheds bekendtgørelse om meddelelse af patentet: **2015-03-11**
- (86) Europæisk ansøgning nr.: **08713473.0**
- (86) Europæisk indleveringsdag: **2008-01-03**
- (87) Den europæiske ansøgnings publiceringsdag: **2009-10-07**
- (86) International ansøgning nr.: **US2008050126**
- (87) Internationalt publikationsnr.: **WO2008091720**
- (30) Prioritet: **2007-01-24 US 657403**
- (84) Designerede stater: **AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MT NL NO PL PT RO SE SI SK TR**
- (73) Patenthaver: **ADC Telecommunications, Inc., 13625 Technology Drive, Eden Prairie, MN 55344-2252, USA**
- (72) Opfinder: **LU, Yu, 12251 Princeton Avenue, Eden Prairie, MN 55347, USA**
REAGAN, Randy, P.O. Box 752, Morris Plains, NJ 07950, USA
- (74) Fuldmægtig i Danmark: **MURGITROYD & COMPANY, Scotland House, 165-169 Scotland Street, Glasgow G5 8PL, Storbritannien**
- (54) Benævnelse: **Mekanisk grænsefladekonverter til fiberoptisk stik**
- (56) Fremdragne publikationer:
WO-A-2005/072395
US-A- 4 907 853

DESCRIPTION

[0001] This application claims priority to U.S. Utility Patent Application Serial No. 11/657,403 filed on 24 January 2007.

Technical Field

[0002] The present disclosure relates to fiber optic data transmission, and more particularly to fiber optic cable connection systems.

Background

[0003] Fiber optic cables are widely used to transmit light signals for high speed data transmission. A fiber optic cable typically includes: (1) an optical fiber or optical fibers; (2) a buffer or buffers that surrounds the fiber or fibers; (3) a strength layer that surrounds the buffer or buffers; and (4) an outer jacket. Optical fibers function to carry optical signals. A typical optical fiber includes an inner core surrounded by a cladding that is covered by a coating. Buffers (e.g., loose or tight buffer tubes) typically function to surround and protect coated optical fibers. Strength layers add mechanical strength to fiber optic cables to protect the internal optical fibers against stresses applied to the cables during installation and thereafter. Example strength layers include aramid yarn, steel and epoxy reinforced glass roving. Outer jackets provide protection against damage caused by crushing, abrasions, and other physical damage. Outer jackets also provide protection against chemical damage (e.g., ozone, alkali, acids).

[0004] Fiber optic cable connection systems are used to facilitate connecting and disconnecting fiber optic cables in the field without requiring a splice. A typical fiber optic cable connection system for interconnecting two fiber optic cables includes fiber optic connectors mounted at the ends of the fiber optic cables, and an adapter for mechanically and optically coupling the fiber optic connectors together. Fiber optic connectors generally include ferrules that support the ends of the optical fibers of the fiber optic cables. The end faces of the ferrules are typically polished and are often angled. The adapter includes co-axially aligned ports (i.e., receptacles) for receiving the fiber optic connectors desired to be interconnected. The adapter includes an internal sleeve that receives and aligns the ferrules of the fiber optic connectors when the connectors are inserted within the ports of the adapter. With the ferrules and their associated fibers aligned within the sleeve of the adapter, a fiber optic signal can pass from one fiber to the next. The adapter also typically has a mechanical fastening arrangement (e.g., a snap-fit arrangement) for mechanically retaining the fiber optic connectors within the adapter. One example of an existing fiber optic connection system is described in U.S. Patent Nos. 6,579,014, 6,648,520, and 6,899,467.

[0005] Fiber optic cable connection systems are frequently being upgraded to improve performance, ease of use, and circuit density. For an upgrade to be practical, it is desirable for the upgraded fiber optic connection system to be compatible with existing fiber optic connection system components that are already installed in the field. For example, it is desirable for upgraded fiber optic connectors to be able to interface with existing fiber optic adapters that may already be installed in the field. This type of compatibility is often called "reverse" or "backward" compatibility. Backward compatibility is advantageous because a service provider is not required to replace all of the fiber optic connectors and fiber optic adapters within their network every time an upgrade in fiber optic connection equipment is implemented. Backward compatibility also allows field technicians to maintain a stock of only the newer components, as opposed to both old and new components.

[0006] WO2005072395 discloses a fiber optic connector assembly comprising:

a converter including a converter housing defining an internal passage; the first end of the converter housing including two paddles; a first external threaded coupling nut rotatably mounted about an exterior of the converter housing;

and a fiber optic connector including a connector housing, a ferrule assembly, and a coupling, which is mounted about an exterior of the connector housing such that the plug portion of the fiber optic connector projects through an opening in the converter housing and is disposed between the two paddles of the converter housing.

Summary

[0007] One aspect of the present disclosure relates to a fiber optic connector mechanical interface converter for allowing a fiber optic connector to be backward compatible with an existing fiber optic adapter configuration.

[0008] A variety of additional aspects will be set forth in the description that follows. The inventive aspects can relate to individual features and to combinations of features. It is to be understood that both the forgoing general description and the following detailed description are exemplary and explanatory only and are not restrictive of the broad inventive concepts upon which the embodiments disclosed herein are based.

Brief Description of the Drawings

[0009]

Figure 1 is a perspective view of a backward compatibility converter used to allow a connector to mechanically interface with an existing adapter;

Figure 2 is a partially exploded view of the backward compatibility converter with the fiber optic connector mounted therein;

Figure 3 is a cross-sectional view the housing of the backward compatibility converter of Figures 1 and 2;

Figure 4 is a cross-sectional view showing the fiber optic connector of Figures 1 and 2 aligned with the backward compatibility converter of Figures 1 and 2; and

Figure 5 is a cross-sectional view showing the fiber optic connector of Figures 1 and 2 inserted within the backward compatibility converter of Figures 1 and 2.

Detailed Description

[0010] Figure 1 shows a backward compatibility converter 20 having features that are examples of inventive aspects in accordance with the principles of the present disclosure. The backward compatibility converter 20 is configured to make a fiber optic connector 22 backward compatible with an existing fiber optic adapter 24. When the fiber optic connector 22 is inserted within the backward compatibility converter 20, the backward compatibility converter 20 provides the fiber optic connector 22 with a mechanical interface that is compatible with the mechanical interface of the fiber optic adapter 24. Thus, by using the backward compatibility converter 20, the fiber optic connector 22 can be inserted into and interlocked with the fiber optic adapter 24. In this way, the fiber optic adapter 24 can be used to optically connect the fiber optic connector 22 to another fiber optic connector.

[0011] The fiber optic adapter 24 includes a first port 23 for receiving a first fiber optic connector and an opposite second port 25 for receiving a second fiber optic connector. Internal threads 27 are defined within the first port 23. An adapter sleeve (not shown) for aligning the ferrules of the connectors is positioned within the fiber optic adapter 24. When the first and second connectors are mounted within the first and second ports 23, 25, the ferrules of the first and second connectors are received in the adapter sleeve and axially aligned with one another such that optical signals can be transferred between the first and second connectors. Further details regarding the fiber optic adapter 24 are disclosed in U.S. Patent No. 6,579,014 that is hereby incorporated by reference in its entirety.

[0012] As shown at Figures 1 and 4, the fiber optic connector 22 includes a connector housing 100 adapted to be mounted at the end of a fiber optic cable 200. The connector housing 100 includes a first end 102 and a second end 104. The first end 102 defines a plug portion 105 at which a ferrule assembly 106 is mounted. The ferrule assembly 106 includes a ferrule 108 for supporting an optical fiber 201. The ferrule assembly 106 also includes a spring 112 (see Figures 4 and 5) for biasing the ferrule 108 in a direction of connector insertion 113. The fiber optic cable 200 is mechanically connected to the second end 104 of the connector housing 100. The fiber optic cable 200 includes at least one optical fiber 201 that extends through the connector housing 100 and has an end portion mounted within the ferrule 108. A flexible boot 114 (shown at Figures 4 and 5) can be positioned over the interface between the fiber optic cable 200 and the second end 104 of the connector housing 100.

[0013] Referring to Figures 1 and 2, the fiber optic connector 22 also includes a coupling nut 120 rotatably mounted about the exterior of the connector housing 100. The coupling nut 120 includes an exteriorly threaded portion 122 and a gripping portion 124. The gripping portion 124 allows the coupling nut 120 to be manually grasped so that the coupling nut can easily be manually

turned about the exterior of the connector housing 100. One end of the coupling nut 120 is shown including an end wall 126.

[0014] As shown in Figures 4 and 5, the fiber optic connector 22 also includes a sealing member 128 (e.g., a flexible o-ring) mounted within a groove 130 defined around a circumference/periphery of the connector housing 100. The groove 130 is located at a region of the connector housing 100 defined between exterior shoulders 132, 134. Further details regarding the fiber optic connector 22 are provided in application Serial No. not yet received, entitled "Hardened Fiber Optic Connector", filed on a date concurrent herewith, and having attorney docket no. 2316.2460US01, which is hereby incorporated by reference in its entirety.

[0015] Referring to Figures 2 and 3, the backward compatibility converter 20 includes a converter housing 26 defining a central passage 32 for receiving the fiber optic connector 22. The backward compatibility converter 20 also includes a coupling nut 40 rotatably mounted on the converter housing 26 for use in mechanically retaining the backward compatibility converter within the first port 23 of the fiber optic adapter 24. The backward compatibility converter 20 further includes a sealing member 70 (e.g., a flexible -ring seal) mounted about the periphery/outer circumference of the converter housing 26 for providing an environmental seal between the fiber optic adapter 24 and the converter housing 26 when the backward compatibility converter 20 is secured within the first port 23 of the fiber optic adapter 24.

[0016] Referring to Figure 4, the converter housing 26 of the backward compatibility converter 20 includes a first end 28 and an opposite second end 30. The converter housing 26 defines a central axis 31 that extends through the converter housing 26 from the first end 28 to the second end 30. The central passage 32 extends through the converter housing 26 along the central axis 31. The first end 28 of the converter housing 26 is configured to be mechanically compatible with the first port 23 of the fiber optic adapter 24. For example, the first end 28 of the converter housing 26 can have a shape that complements, mates with or is otherwise mechanically compatible with the shape of the first port 23 of the fiber optic adapter 24. The second end 30 of the converter housing 26 is configured to allow the plug portion 105 of the fiber optic connector 22 to be inserted into the central passage 32. The converter housing 26 also defines an exterior, circumferential groove 42 that extends about the periphery of the converter housing 26. The sealing member 70 of the backward compatibility converter 20 is mounted in the circumferential groove 42. An exterior shoulder 77 is located at the exterior of the converter housing 26 adjacent to the sealing member 70.

[0017] As indicated above, the first end 28 of the converter housing 26 has mechanical characteristics that are compatible with the internal shape of the first port 23 defined by the fiber optic adapter 24. For example, the first end 28 includes an end wall 54 defining a first opening 56, and also includes a pair of paddles 58 that project outwardly from the end wall 54 along the direction of connector insertion 113. The paddles 58 are positioned on opposite sides of the central axis 31 of the converter housing 26 and have inner surfaces 59 that oppose one another. Open side gaps 62 are defined between the paddles 58.

[0018] Referring to Figure 3, the second end 30 of the converter housing 26 defines a second opening 64 for allowing the plug portion 105 of the fiber optic connector 22 to be inserted into the central passage 32 through the second end 30 of the converter housing 26. The central passage 32 extends from the second opening 64 through the converter housing 26 to the first opening 56. Within the central passage 32, the converter housing 26 defines a radial shoulder 66 that provides a diameter reduction from a gripping portion receptacle 68 to an internally threaded portion 90. The central passage 32 is also defined by a circumferential sealing surface 72 located between the internally threaded portion 90 and the first opening 56. The sealing surface 72 extends from the internally threaded portion 90 to a shoulder defined by a first side 73 of the end wall 54. A second side 75 of the end wall 54 faces in the direction of connector insertion 113.

[0019] The coupling nut 40 of the backward compatibility converter 20 is mounted at the second end 30 of the converter housing 26 and is free to rotate about the exterior of the converter housing 26 (e.g., about the central axis 31). The coupling nut 40 includes an externally threaded portion 46 and a gripping portion 48. An end wall 49 of the coupling nut 40 is located adjacent one end of the threaded portion 46. The gripping portion 48 has a larger outer diameter than the threaded portion 46. The gripping portion 48 defines a plurality of longitudinal depressions or finger grooves 50 for facilitating grasping the gripping portion 48. The threaded portion 46 is sized to be threaded within the internal threads 27 defined within the first port 23 of the fiber optic adapter 24 to secure the backward compatibility converter 20 to the fiber optic adapter 24. A user can thread the threaded portion 46 of the coupling nut 40 into the internal threads 27 of the fiber optic adapter 24 by inserting the threaded portion 46 into the first port 23 of the fiber optic adapter 24 and manually turning the coupling nut 40 about the converter housing 26 to thread the threaded portion 46 into the first port 23. The gripping portion 48 facilitates gripping and manually turning the coupling nut 40. In one embodiment, the coupling nut 40 can withstand a pullout force of at least 100 pounds when threaded in the first port 23.

[0020] To use the backward compatibility converter 20, the fiber optic connector 22 is inserted into the central passage 32 through the second opening 64. The fiber optic connector 22 is inserted into the central passage 32 until the plug portion 105 projects through the first opening 56 and shoulder 134 of the fiber optic connector 22 abuts against the first surface 73 of the end wall 54. As so positioned, a tapered region of the fiber optic connector 22 nests within the sealing surface 72 defined within the

central passage 32 of the converter housing 26. Additionally, the sealing member 128 forms a seal between the connector housing 100 and the sealing surface 72 of the converter housing 26. Thereafter, the coupling nut 120 of the fiber optic connector 22 is threaded into the internally threaded portion 90 of the converter housing 26 until the shoulders 132, 134 of the fiber optic connector housing 100 are compressed between the first side 73 and the end wall 126 of the coupling nut 120, and the gripping portion 124 of the coupling nut 120 is within the gripping portion receptacle 68. With the fiber optic connector 22 mounted within the backward compatibility converter 20, the plug portion 105 of the fiber optic connector 22 projects axially outwardly from second side 75 of the end wall 54 and is positioned at a location between the paddles 58.

[0021] Once the fiber optic connector 22 is mounted within the backward compatibility converter 20, the combined components can be coupled to the fiber optic adapter 24. For example, the first end 28 of the backward compatibility converter 20 can be inserted within the first port 23 of the fiber optic adapter 24. As so inserted, the ferrule 108 is received within a corresponding adapter sleeve positioned within the fiber optic adapter 24, and the paddles 58 are received within corresponding receptacles within the fiber optic adapter 24. Additionally, the sealing member 70 is positioned to provide a circumferential seal between the converter housing 26 and the fiber optic adapter 24. To insure that the fiber optic connector 22 is fully inserted within the fiber optic adapter 24, the threaded portion 46 of the coupling nut 40 is preferably threaded into the internal threads 27 of the fiber optic adapter 24. Threading of the threaded portion 46 into the internal threads 27 can be done manually by grasping the gripping portion 48 and manually turning the coupling nut 40. The coupling nut 40 can be turned until the end 49 of the coupling nut 40 abuts against the exterior shoulder 77 of the converter housing 26. In this manner, the coupling nut 40 firmly secures the fiber optic connector 22 within the fiber optic adapter 24. By unthreading the coupling nut 40 from the fiber optic adapter 24, and axially pulling the backward compatibility converter 20 from the fiber optic adapter 24, the backward compatibility converter 20 and the fiber optic connector 22 can be disconnected from the fiber optic adapter 24. Similarly, the fiber optic connector 22 can be removed from the backward compatibility converter 20 by unthreading the coupling nut 120 and axially pulling the fiber optic connector 22 outwardly from the converter housing 26.

[0022] From the foregoing detailed description, it will be evident that modifications and variations can be made in the devices of the disclosure without departing from the invention defined in the appended claims. For example, while the present disclosure shows the backward compatibility converter used with single fiber connectors adapters, the backward compatibility converter can also be used with multi-fiber (i.e., multi-termination) fiber optic connectors and adapters.

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- [US65740307A \[0001\]](#)
- [US6579014B \[0004\] \[0011\]](#)
- [US6848520B \[0004\]](#)
- [US6899467B \[0004\]](#)
- [WO2005072395A \[0006\]](#)

Krav

1. En bagudkompatibel fiberoptisk stikenhed omfattende:
en bagudkompatibel konverter (20) inklusive:
 - 5 et konverterhus (26) med en første ende (28) positioneret modsat i forhold til den anden ende (30), den første ende af konverterhuset inklusive en endevæg (54) definerer en første åbning (56), den anden ende (30) af konverterhuset definerer en anden åbning (64), konverterhuset definerer en intern passage (32), som strækker sig gennem konverterhuset (26) fra den første åbning (56) til den anden åbning (64);
 - 10 den første ende (28) af konverterhuset (26) inklusive to vinger (58), som stikker frem udefter fra endevæggen (54), vingerne er positioneret i modsatte sider i forhold til den første åbning (56) og inklusive indvendige overflader (59) modsat hinanden; konverterhuset (26) definerer interne gevind (90) placeret i den interne passage (32); og
 - 15 en første koblingsmøtrik (40) roterbart monteret omkring konverterhuset (26) udvendigt tilstødende den anden ende (30) af konverterhuset (26), den første koblingsmøtrik (40) inklusive udvendige gevind (46); og
 - et fiberoptisk stik (22) inklusive:
 - 20 et stikhus (100) med en første ende (102), som definerer en stikdel (105) og en anden ende (104) til kobling til et fiberoptisk kabel (200);
 - et ferrulelement (106), som er monteret på stikdelen (105) på stikhuset (100), inklusive en ferrul (108) til montering af en optisk fiber (201) fra det fiberoptiske kabel; og
 - en anden koblingsmøtrik (120), som er monteret omkring stikhuset (100) udvendigt, inklusive et sæt udvendige gevind (122), hvor
 - 25 udvendige gevind for den anden koblingsmøtrik er i gevindindgreb med de indvendige gevind (90) i konverterhuset (26), så stikdelen (105) i det fiberoptiske stik (22) stikker frem gennem den første åbning (56) i konverterhuset (26) og er anbragt mellem de to vinger (58) i konverterhuset (26).
- 30 2. Den bagudkompatible fiberoptiske stikenhed ifølge krav 1, hvor den bagudkompatible konverter (20) omfatter en tætningsdel (70) monteret omkring konverterhuset (26) udvendigt i en position mellem den første koblingsmøtrik (40) og den første ende (28) af konverterhuset.
- 35 3. Den bagudkompatible fiberoptiske stikenhed ifølge krav 1, hvor det fiberoptiske stik (22) omfatter en tætningsdel (128), som er monteret omkring stikhuset (100) udvendigt og i tætningsindgreb med en tætningsoverflade (72) i konverterhuset (26).

4. Den bagudkompatible fiberoptiske stikenhed ifølge krav 1, hvor den anden koblingsmøtrik (120) i det fiberoptiske stik omfatter en gribedel (124).
5. Den bagudkompatible fiberoptiske stikenhed ifølge krav 1, hvor ferrulelementet (106) i det fiberoptiske stik (22) omfatter en fjeder (112) til at formagnetisere ferrulen (108) i en retning af stikindføringen (113).
6. Den bagudkompatible fiberoptiske stikenhed ifølge krav 1, hvor den bagudkompatible konverter (20) omfatter åbne sidegab (62) defineret mellem de to vinger (58).
7. Den bagudkompatible fiberoptiske stikenhed ifølge krav 1, hvor den første koblingsmøtrik (40) i den bagudkompatible konverter (20) omfatter en gribedel (48).
8. Den bagudkompatible fiberoptiske stikenhed ifølge krav 7, hvor gribedelen (48) definerer et flertal af fordybninger på langs (50).
9. Den bagudkompatible fiberoptiske stikenhed ifølge krav 4, hvor gribedelen (124) definerer et flertal af fordybninger på langs.
10. Den bagudkompatible fiberoptiske stikenhed ifølge krav 4, hvor gribedelen (124) har en udvendig diameter, som er større end en udvendig diameter for sættet af udvendige gevind i den anden koblingsmøtrik (120).
11. Den bagudkompatible fiberoptiske stikenhed ifølge krav 7, hvor gribedelen (48) har en udvendig diameter, som er større end en udvendig diameter for de udvendige gevind i den første koblingsmøtrik (40).

DRAWINGS

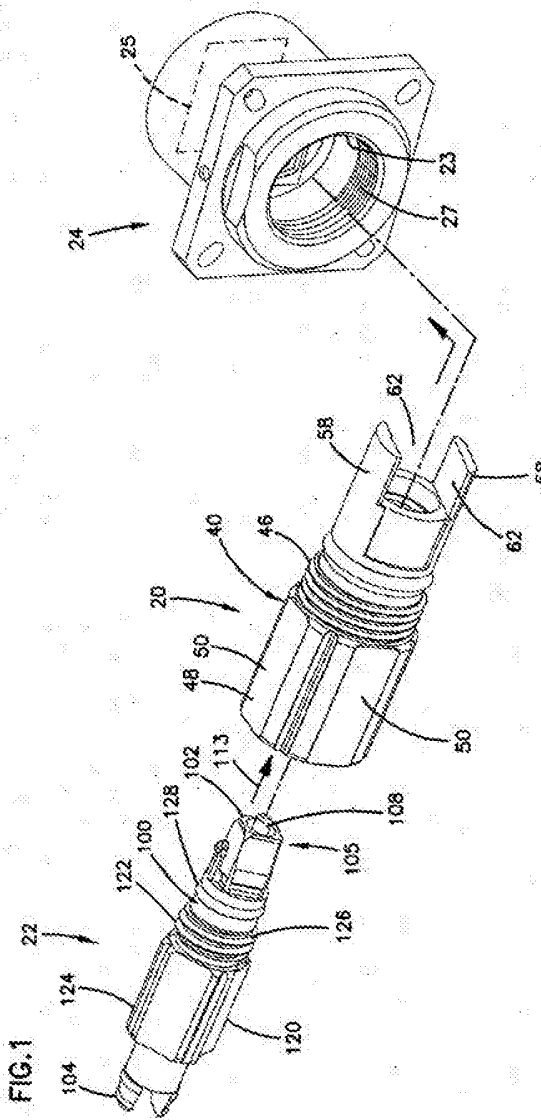
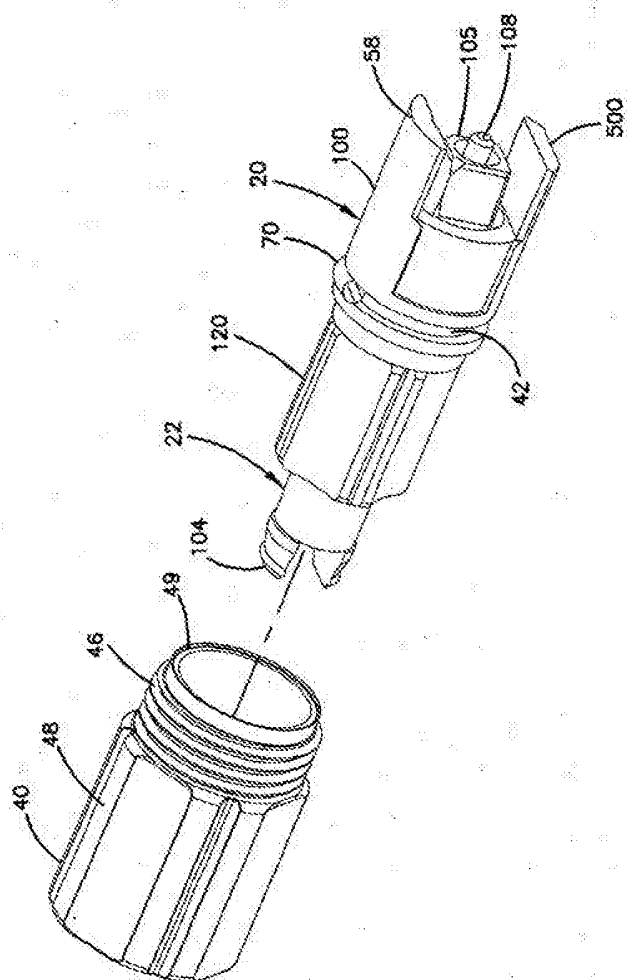


FIG.2



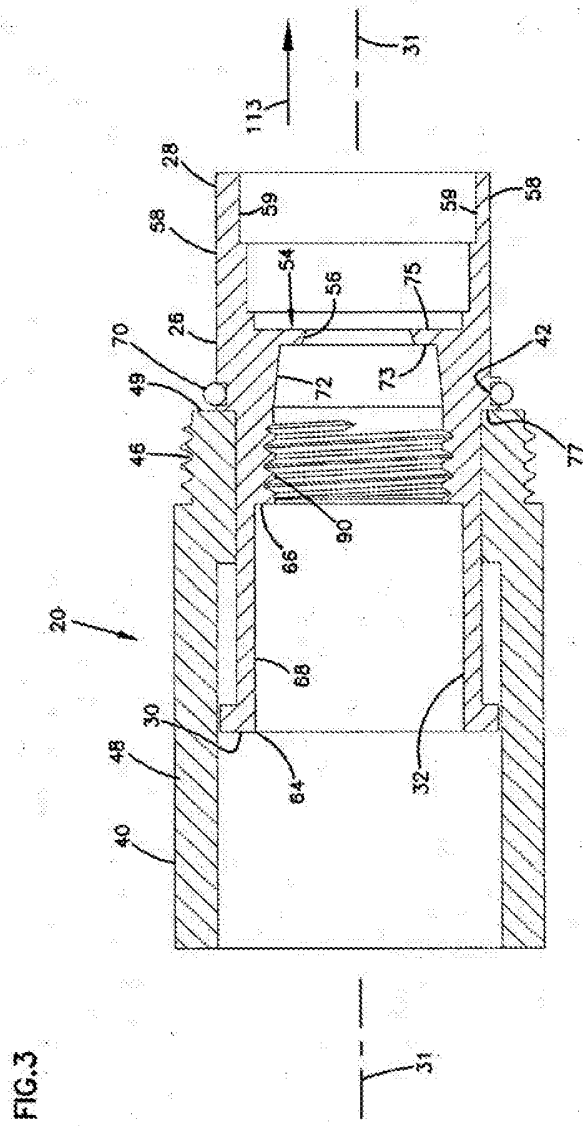


FIG. 4

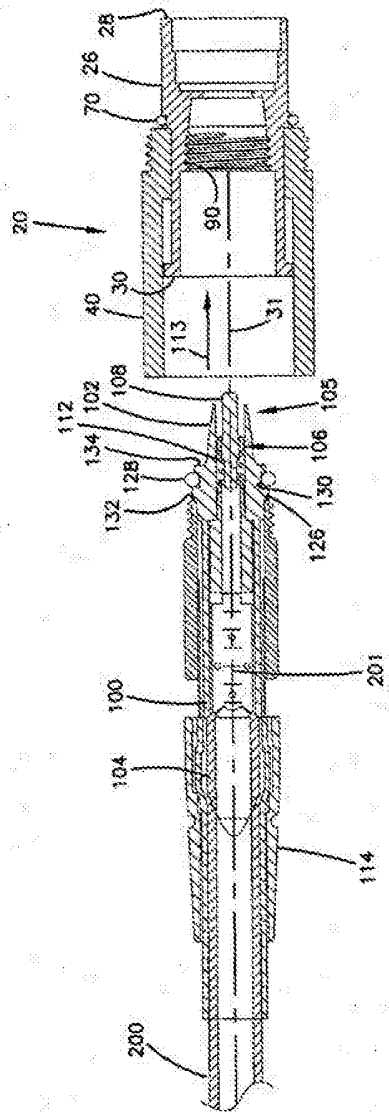


FIG.5

