

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
25 June 2009 (25.06.2009)

PCT

(10) International Publication Number
WO 2009/076740 A1

(51) International Patent Classification:
H01L 31/042 (2006.01) *H01L 31/05* (2006.01)
H01L 31/048 (2006.01)

(21) International Application Number:
PCT/CA2007/002301

(22) International Filing Date:
18 December 2007 (18.12.2007)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **DAY4 ENERGY INC.** [CA/CA]; #101-5898 Trapp Avenue, Burnaby, British Columbia v3N 5G4 (CA).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **RUBIN, Leonid, Borisovich** [RU/CA]; 1603-6188 Patterson Avenue, Burnaby, British Columbia V5H 2N1 (CA). **NEBUSOV, Valery, Michailovich** [RU/CA]; 302 - 6366 Cassie Avenue, Burnaby, British Columbia V5H 2W5 (CA).

(74) Agents: **KNOX, John, W.** et al.; Fetherstonhaugh & Co., Vancouver Centre, Suite 2200, 650 West Georgia Street, Box 11560, Vancouver, British Columbia V6B 4N8 (CA).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

(54) Title: PHOTOVOLTAIC MODULE WITH EDGE ACCESS TO PV STRINGS, INTERCONNECTION METHOD, APPARATUS, AND SYSTEM

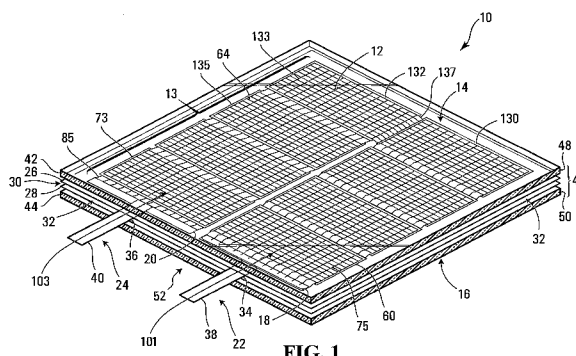


FIG. 1

(57) Abstract: A photovoltaic module apparatus with edge access to PV strings includes a plurality of PV cells arranged in a planar array having a front side and a back side, the plurality of PV cells being electrically connected together in at least one string having a positive terminal and a negative terminal. Positive and negative conductors are connected to the positive and negative terminals respectively and front and back encapsulating sheets are disposed on the front and back sides of the array to form a sub-laminate comprised of the array and the front and back encapsulating sheets. Each of the positive and negative conductors has a respective portion extending from the positive and negative terminals respectively, between the front and back encapsulating sheets. Front and back protectors are disposed on the front and back encapsulating sheets respectively to form a laminate comprising the sub-laminate and the front and back protectors. First and second terminating portions of the positive and negative conductors extend outwardly from the outer perimeter edge of the laminate. A frame including a frame member having a holder for holding an electrical connector to which the terminating portions are connected may be provided about at least one portion of the outer perimeter edge of the laminate.

PHOTOVOLTAIC MODULE WITH EDGE ACCESS TO PV STRINGS, INTERCONNECTION METHOD, APPARATUS, AND SYSTEM

BACKGROUND OF THE INVENTION

5 This invention relates to photovoltaic (PV) modules and more particularly to configuring PV cells within a PV module to permit conductors associated with a string or strings of PV cells to extend from a perimeter edge of the PV module in which they are installed.

10 The design and production of PV modules comprised of crystalline silicon PV cells has remained virtually unchanged for more than thirty years. A typical PV cell comprises semiconductor material with at least one p-n junction and front and back side surfaces having current collecting electrodes. When a conventional crystalline PV cell is illuminated, it generates an electric current
15 of about **34** mA/cm² at about **0.6 - 0.62V**. A plurality of PV cells are typically electrically interconnected in series and/or in parallel strings to form a PV module that produces higher voltages and/or currents than a single PV cell.

PV cells may be interconnected in strings by means of metallic tabs, made for
20 example from tinned copper. A typical PV module may comprise **36-100** PV series interconnected cells, for example, and these may be combined into typically **2 to 4** PV strings to achieve higher voltages than would be obtainable with a single PV cell.

25 In PV modules comprising series-interconnected PV cells, the module only performs optimally when all the series interconnected PV cells are illuminated with approximately similar light intensity. However, if even one PV cell within the series of PV cells is shaded, while all other cells are illuminated, the entire PV module is adversely affected resulting in a substantial decrease in power
30 output from the PV module. It was demonstrated ("Numerical Simulation of Photovoltaic Generators with Shaded Cells", V. Quaschnig and R. Hanitsch, **30th** Universities Power Engineering Conference, Greenwich, Sept. **5-7, 1995**,

-2-

p.p. 583-586) that a Photovoltaic module comprising **36** PV cells loses up to **70%** of the generated power when only **75%** of one PV cell is shaded. In addition to temporary power loss, the module may be permanently damaged as a result of cell shading because when a PV cell is shaded, the cell acts as a large resistor rather than a power generator. In this situation, the other cells in the module drive current through this large resistor which results in heating of the shaded cell which may increase the cell temperature to **160°C** or higher and this can damage the shaded PV cell and the entire PV module if a temperature of this magnitude persists. In order to reduce the risk of PV module damage due to excessive heating in the event of shading, practically all PV modules employ by-pass diodes (BPD) connected across an entire panel or across strings in a panel. Bypass diodes effectively "short out" a single string or an entire module containing shaded cells. Although this approach causes the power generated in the shorted string to be completely lost, it allows the rest of the system to continue producing power and also reduces the heating of the shaded cell.

Since PV modules are generally expected to operate outdoors for typically **25** years without degradation, their construction must withstand various weather and environmental conditions. Typical PV module construction involves the use of a transparent sheet of low iron tempered glass covered with a sheet of polymeric encapsulant material such as ethylene vinyl acetate or thermoplastic material such as urethane on a front side of the module, for example. An array of PV cells is placed onto the polymeric encapsulant material in such a way that the front sides of the cells face the transparent glass sheet. A back side of the array is covered with an additional layer of encapsulant material and a back sheet layer of weather protecting material, such as Tedlar® by DuPont, or a glass sheet. The additional layer of encapsulant material and the back sheet layer typically have openings to provide for electrical conductors connected to PV strings in the module to be passed through the back encapsulant layer and back sheet of weather protecting material to provide for connection to an electrical circuit. For a PV

-3-

module having an array of two strings of PV cells, typically four conductors are arranged to pass through the openings so that they are all in proximity with each other so they can be terminated in a junction box mounted on the back sheet layer. The glass, encapsulant layers, cells and back sheet layer are typically vacuum laminated to eliminate air bubbles and to protect the PV cells from moisture penetration from the front and back sides and also from the edges. The electrical interconnections of PV strings and connections to bypass diodes are made in the junction box. The junction box is sealed on the back side of the PV module.

In some existing PV modules, an aluminum frame extends around the perimeter of the PV module and protects against damage, provides mechanical strength against wind and snow loads and facilitates mounting of the module to a support. A plurality of supports may be provided to support a plurality of PV modules and such PV modules are typically connected together by cables connected between junction boxes of adjacent modules. Installation of PV modules in this manner can be quite expensive.

The fabrication of the PV modules described above is quite complicated and expensive. Lay up of the PV module before lamination requires a separate step of "bussing" in which the cells are connected in strings by soldering thin busses between them. This increases production costs and limits production capacity.

In addition, locating a junction box on an outer surface of the back sheet of a PV module requires the formation of the above described openings through the back side encapsulant sheet and back side protection sheet which also increases the cost of production and can render the module susceptible to moisture penetration. In addition, the cost of the junction box is significant to the overall cost of PV module. Furthermore, since the junction box typically has a small volume and is made of hermetically sealed plastic, the bypass diodes can become very hot, when a string or module is shaded, which can

-4-

result in substantial heating inside the junction box and this heat can be transferred to the adjacent PV cells. Therefore there is a risk that the temperature inside the junction box may exceed a safe level resulting in damage to one or more cells in the PV module.

5

US Patent No. **6,870,087 B1**, **2005**, entitled: Assembly Method and Apparatus for Photovoltaic Module, to Patrick Gallagher describes a PV module that comprises only one string of PV cells. Outlet cables are connected to terminal PV cells. These cables are used for electrical connection of one PV module to another in the field. The PV cells string is mounted in a box-like structure comprised of an upper pan and lower pan. The lower pan defines a conduit for the flow of air beneath the PV string. A set of such PV modules is mounted in a sun tracking assembly.

10

15

US Patent Publication **2007/0102038 A1**, published May **10, 2007** to Kirschning relates to a holding element for photovoltaic modules for fastening a photovoltaic module to a holding device and to a process for the electrical connection of the PV module to the holding element. A conventional junction box is equipped with at least one connecting element provided for inserting onto/into a receiving area of the holding element. This allows direct electric power transfer from the junction box to the holding element, eliminating conventional cables that are normally freely suspended on the back side of PV modules and exposed to wind and weather. The holding element also facilitates the interconnecting neighboring PV modules using receiving elements on the edges of neighboring PV modules thus enabling easy plug-and play interconnection of adjacent PV modules.

20

25

SUMMARY OF THE INVENTION

The present invention may provide for more optimal and less costly PV module fabrication, by eliminating bus bar soldering for interconnection of PV strings within the PV module active area, thereby simplifying and increasing production capacity of PV module lay-up before lamination. The present

30

-5-

invention may also eliminate the need for a conventional junction box on the rear surface of the module, thereby decreasing the complexity and cost of PV module production.

- 5 The present invention may also simplify PV module interconnection thereby decreasing the cost of PV module installation.

10 In accordance with one aspect of the invention, there is provided a PV module. The apparatus includes a plurality of PV cells arranged in a planar array having a front side and a back side, the plurality of PV cells being electrically connected together in at least one string having a positive terminal and a negative terminal for supplying electrical energy to a load. The apparatus also includes positive and negative conductors connected to the positive and negative terminals respectively. The apparatus further includes

15 front and back encapsulating sheets disposed on the front and back sides of the array to form a sub-laminate comprised of the array and the front and back encapsulating sheets, the sub-laminate having a first outer perimeter edge. Each of the positive and negative conductors has a respective portion extending from the positive and negative terminals respectively, between the

20 front and back encapsulating sheets and has first and second terminating portions respectively extending outwardly from the first outer perimeter edge of the sub-laminate. The apparatus further includes front and back protectors disposed on the front and back encapsulating sheets respectively to form a laminate comprising the sub-laminate and the front and back protectors. The

25 front and back protectors have second and third outer perimeter edges respectively generally coterminous with the first outer perimeter edge and defining an outer perimeter edge of the laminate. The first and second terminating portions extend outwardly from the outer perimeter edge of the laminate.

30

The first and second terminating portions may extend from opposite edge portions of the outer perimeter edge of the laminate.

-6-

The first and second terminating portions may extend from a common edge portion of the outer perimeter edge of the laminate.

- 5 The array may be electrically connected into a plurality of subset strings, each subset string having a positive terminal and a negative terminal and may include conductors disposed entirely between the first and second encapsulating sheets, operably configured to electrically connect the subset strings together, the positive and negative conductors being electrically
10 connected to first and last subset strings of the subset strings that are electrically connected together.

- 15 The array may be electrically connected into a plurality of subset strings, each subset string having a positive terminal and a negative terminal and may include conductors disposed outside the outer perimeter edge of the laminate operably configured to electrically connect the subset strings together, the positive and negative conductors being electrically connected to first and last subset strings of the subset strings that are electrically connected together.

- 20 The apparatus may further include a frame surrounding the outer perimeter edge of the laminate, the frame having a holder operably configured to hold electrical connectors, the first and second terminating portions of the positive and negative conductors extending into the holder.

- 25 The apparatus may further include first and second electrical connectors disposed in the holder, the first and second terminating portions being connected to the first and second electrical connectors respectively.

- 30 The apparatus may further include third and fourth electrical connectors in the holder such that the third and fourth electrical connectors are accessible externally of the holder, the third and fourth electrical connectors being

-7-

electrically connected to the first and second connectors respectively, to enable the array to be connected to a load.

5 The frame may include a plurality of frame members connected together, wherein each frame member holds a respective portion of the outer perimeter edge of the laminate.

10 The frame members may have end portions having integral openings therein and may include corner connectors operably configured to be received in the integral openings to connect adjacent frame members together.

At least one of the frame members may have a holder for holding a plurality of electrical connectors.

15 The array may be electrically connected into a plurality of subset strings, each subset string having a positive terminal and a negative terminal and respective conductors extending from the positive and negative terminals the respective conductors each having a terminating portion extending outwardly of the outer perimeter of the laminate and extending into the holder.

20 The apparatus may further include a plurality of electrical connectors in the holder, the terminating portions of the conductors being connected to respective electrical connectors in the holder.

25 The apparatus may further include a bypass diode in the holder and electrically connected to a pair of electrical connectors associated with a subset string of PV cells, to protect the subset string of PV cells from excessive electrical current when the subset string is not producing electric current.

30 The apparatus may further include a protector operably configured to protect the electrical connectors from weather.

-8-

The apparatus may further include a frame member having a receptacle and a first opening adjacent the receptacle and in communication with the receptacle, at least a portion of the outer perimeter edge of the laminate being in the receptacle and whereby at least one of the first and second terminating portions extends across a portion of the outer perimeter edge of the laminate and across a portion of a back side of the laminate in the receptacle and extends through the first opening to facilitate connection of the at least one of the first and second terminating portions to an electrical connector adjacent the back side of the laminate and adjacent the outer perimeter edge of the laminate.

The frame member may have a mounting portion, adjacent the receptacle, for mounting an electrical connector holder to the frame member, the mounting portion being disposed generally parallel to the laminate such that when the electrical connector holder is mounted to the mounting portion, the electrical connector holder extends generally outwardly away from the back side of the laminate.

The first opening may be in the mounting portion.

The apparatus may further include an electrical connector holder on the mounting portion, for holding at least one electrical connector, the electrical connector holder being positioned on the mounting portion such that the at least one of the first and second terminating portions can extend through the first opening into the electrical connector holder and into the electrical connector held therein.

The electrical connector holder may be integral with the electrical connector mount.

-9-

The mounting portion may have a plurality of openings for receiving corresponding terminating portions.

5 The apparatus may further include an electrical connector holder including a plurality of walls defining a plurality of compartments, the plurality of walls including a bottom wall, the bottom wall having pairs of openings in each compartment, each pair of openings being disposed about a respective pair of openings of the plurality of openings in the mounting portion, and each
10 compartment comprising a pair of electrical connectors, whereby positive and negative terminating portions of respective strings of PV cells in the laminate extend through respective openings in the mounting portion and through the pair of openings associated with a respective compartment and wherein the first and second terminating portions may be connected to the respective pair of electrical connectors in the compartment associated with the openings
15 through which the first and second terminating portions extend.

The apparatus may further include bypass diodes connected between respective connectors of the pairs of the electrical connectors associated with
20 respective compartments.

At least some of the walls may have passageways between adjacent compartments.

25 The passageways may have wires extending therethrough for connecting the electrical connectors of adjacent compartments.

The wires may connect the electrical connectors of adjacent compartments such that the strings of PV cells are electrically connected in a series string having positive and negative terminals and the apparatus may further include
30 first and second pairs of externally accessible electrical connectors, each pair being on an opposite side of the electrical connector holder and adjacent a respective side of the laminate, one connector of each pair being electrically

-10-

connected together, and one connector of each pair being connected to a respective one of the positive and negative terminals of the series string of PV cells.

5 The first and second pairs of externally accessible connectors may have coplanar connection axes that extend generally in a plane parallel to a plane of the laminate.

10 The mounting portion may have a plurality of openings therein for receiving respective terminating portions of respective strings of PV cells within the laminate therethrough.

15 The apparatus may further include a plurality of electrical connector holders on the mounting portion, each electrical connector holder having a respective pair of electrical connectors and each electrical connector holder being located over a respective pair of openings in the mounting portion to enable the respective terminating portions of respective strings of PV cells to extend through respective openings of the pairs of openings, into respective electrical connector holders for connection to the electrical connectors therein.

20 The electrical connector holders may have end walls with end openings therein and conduits may extend between end openings of adjacent electrical connector holders.

25 The apparatus may further include wires extending through the conduits to electrically connect the electrical connectors in adjacent electrical connector holders.

30 The wires may connect the electrical connectors of adjacent electrical connector holders such that the strings of PV cells are electrically connected in a series string having positive and negative terminals and the apparatus may further include first and second pairs of externally accessible electrical

-11-

connectors, each pair being on respective electrical connector holders on opposite sides of the laminate, one connector of each pair being electrically connected together, and one connector of each pair being connected to a respective one of the positive and negative terminals of the series string of PV cells.

The first and second pairs of externally accessible connectors may have coplanar connection axes that extend generally in a plane parallel to a plane of the laminate.

In accordance with another aspect of the invention, there is provided a frame apparatus for a PV module. The apparatus includes an elongate body having first and second opposite ends and a module holder between the first and second opposite ends, the module holder being operably configured to hold an edge portion of an outer perimeter edge of the PV module. The apparatus also includes first and second frame connectors disposed at the first and second ends respectively, the first and second frame connectors being operably configured to receive and hold a frame connector element operably configured to connect two adjacent frame members together. The apparatus further includes an electrical connector holder adjacent the module holder, operably configured to hold at least one electrical connector. The apparatus also includes an opening extending between the module holder and the electrical connector holder, the opening being operably configured to receive therethrough at least one conductor extending from the outer perimeter edge of the PV module such that at least one conductor can extend from the outer perimeter edge of the PV module into the module holder and from the module holder into an electrical connector in the electrical connector holder, in a continuous curve.

The elongate body may include first and second parallel spaced apart walls forming the module holder and third and fourth parallel spaced apart walls forming the electrical connector holder, the first and second parallel spaced

-12-

apart walls extending in a direction opposite to the third and fourth parallel spaced apart walls.

5 The body may comprise an inner wall between the first and second parallel spaced apart walls and the third and fourth spaced apart walls, the first and second parallel spaced apart walls and the third wall defining an edge space in which a portion of the outer perimeter edge portion of the PV module can be received and the third and fourth parallel spaced apart walls and the inner wall defining an electrical connector space in which at least one electrical
10 connector may be mounted, the opening being disposed in the inner wall.

The apparatus may further include first and second transverse walls extending between the third and fourth walls, the third and fourth parallel spaced apart walls further defining the electrical connector space.

15 The apparatus may further include first and second connector mounts on the first and second transverse walls respectively operably configured to mount first and second electrical connectors to the first and second transverse walls respectively.

20 The apparatus may further include a removable cover operably configured to cooperate with the third and fourth walls and the first and second transverse walls to enclose the electrical connector space.

25 In accordance with another aspect of the invention, there is provided a frame apparatus for a PV module including a laminate having an outer perimeter edge and at least first and second terminating conductors extending from the outer perimeter edge. The apparatus includes a frame member having a receptacle and a first opening adjacent the receptacle and in communication
30 with the receptacle. At least a portion of the outer perimeter edge of the laminate is in the receptacle and at least one of the first and second terminating conductors extends across a portion of the outer perimeter edge

-13-

of the laminate and across a portion of a back side of the laminate, in the receptacle. The apparatus further includes at least one of the first and second terminating portions extending through the first opening to facilitate connection of at least one of the first and second terminating conductors to an electrical connector adjacent the back side of the laminate and adjacent the outer perimeter edge of the laminate.

The frame member may have a mounting portion, adjacent the receptacle, for mounting an electrical connector holder to the frame member, the mounting portion being disposed generally parallel to the laminate such that when the electrical connector holder is mounted to the mounting portion, the electrical connector holder extends generally outwardly away from the back side of the laminate.

The first opening may be in the mounting portion.

The apparatus may further include an electrical connector holder on the mounting portion, for holding at least one electrical connector, the electrical connector holder being positioned on the mounting portion such that at least one of the first and second terminating conductors can extend through the first opening into the electrical connector holder and into the electrical connector held therein.

The electrical connector holder may be integral with the electrical connector mount.

The mounting portion may have a plurality of openings for receiving respective terminating conductors.

The apparatus may further include an electrical connector holder including a plurality of walls defining a plurality of compartments, the plurality of walls including a bottom wall, the bottom wall having pairs of openings in each

-14-

compartment, each pair of openings being disposed about a respective pair of openings of the plurality of openings in the mounting portion, and each compartment comprising a pair of electrical connectors, whereby positive and negative terminating conductor of respective strings of PV cells in the laminate extend through respective openings in the mounting portion and into a respective compartment and wherein the first and second terminating conductors are connected to the respective pair of electrical connectors in the compartment associated with the openings through which the first and second terminating portions extend.

The apparatus may further include bypass diodes connected between respective connectors of the pairs of the electrical connectors associated with respective the compartments.

At least some of the walls may have passageways between adjacent compartments.

The passageways may have wires extending therethrough for connecting the electrical connectors of adjacent compartments.

The wires may connect the electrical connectors of adjacent compartments such that the strings of PV cells are electrically connected in a series string having positive and negative terminals and the apparatus may further include first and second pairs of externally accessible electrical connectors, each pair being on an opposite side of the electrical connector holder and adjacent a respective edge of the laminate, one connector of each pair being electrically connected together, and one connector of each pair being connected to a respective one of the positive and negative terminating conductors of the series string of PV cells.

-15-

The first and second pairs of externally accessible connectors may have coplanar connection axes that extend generally in a plane parallel to a plane of the laminate.

- 5 The mounting portion may have a plurality of openings therein for receiving respective terminating portions of respective strings of PV cells within the laminate therethrough.

- 10 The apparatus may further include a plurality of electrical connector holders on the mounting portion, each electrical connector holder having a respective pair of electrical connectors and each electrical connector holder being located over a respective pair of openings in the mounting portion to enable the respective terminating conductors portions of respective strings of PV cells to extend through respective openings of the pairs of openings, into
15 respective electrical connector holders for connection to the electrical connectors therein.

- 20 The electrical connector holders may have end walls with end openings therein and conduits may extend between end openings of adjacent electrical connector holders.

- 25 The apparatus may further include wires extending through the conduits to electrically connect the electrical connectors in adjacent electrical connector holders.

- 30 The wires may connect the electrical connectors of adjacent electrical connector holders such that the strings of PV cells are electrically connected in a series string having positive and negative terminating conductors and the apparatus may further include first and second pairs of externally accessible electrical connectors, each pair being on respective electrical connector holders on opposite edges of the laminate, one connector of each pair being electrically connected together, and one connector of each pair being

-16-

connected to a respective one of the positive and negative terminating conductors of the series string of PV cells.

5 The first and second pairs of externally accessible connectors may have coplanar connection axes that extend generally in a plane parallel to a plane of the laminate.

10 In accordance with another aspect of the invention, there is provided a frame system for a PV module. The system includes a plurality of frame members, operably configured to surround and hold an outer perimeter edge of the PV module. Each frame member includes an elongate body having first and second opposite ends and a module holder between the first and second opposite ends, the module holder being operably configured to hold a respective edge portion of the outer perimeter edge of the PV module. Each
15 frame member also includes first and second frame connectors disposed at the first and second ends respectively, the first and second frame connectors being operably configured to receive and hold a frame connector element operably configured to connect two adjacent frame members together. At least one of the plurality of frame members includes an electrical connector
20 holder adjacent the module holder, operably configured to hold at least one electrical connector, and an opening extending between the module holder and the electrical connector holder, the opening being operably configured to receive therethrough at least one conductor extending from the outer perimeter edge of the PV module such that at least one conductor can extend
25 from the outer perimeter edge of the PV module into the module holder and from the module holder into an electrical connector in the electrical connector holder, in a continuous curve.

30 In accordance with another aspect of the invention, there is provided a method for making a PV module. The method involves arranging a plurality of PV cells in a planar array, the planar array having a front side and a back side. The method also involves electrically connecting the plurality of PV cells

-17-

together in at least one string having a positive terminal and a negative terminal. The method further involves connecting positive and negative conductors to the positive and negative terminals respectively. The method also involves affixing front and back encapsulating sheets on the front and back sides respectively of the array, to form a sub-laminate comprised of the planar array and the front and back encapsulating sheets, the sub-laminate having a first outer perimeter edge, the front and back encapsulating sheets being affixed such that each of the positive and negative conductors has a respective portion extending from the positive and negative terminals respectively, between the front and back encapsulating sheets and such that first and second terminating portions of the positive and negative conductors respectively extend outwardly from the first outer perimeter edge of the sub-laminate to facilitate connection to the positive and negative conductors to an external circuit. The method further involves affixing front and back protectors on opposite sides of the sub-laminate to form a laminate comprising the sub-laminate and the front and back protectors, the front and back protectors having second and third outer perimeter edges respectively generally coterminous with the first outer perimeter edge and defining an outer perimeter edge of the laminate, the first and second terminating portions extending outwardly from the outer perimeter edge of the laminate.

The method may involve causing the first and second terminating portions to extend from opposite edge portions of the outer perimeter edge of the laminate.

The method may involve causing the first and second terminating portions to extend from a common edge portion of the outer perimeter edge of the laminate.

The method may involve electrically connecting subsets of the array of PV cells into separate subset strings, each subset string having a positive terminal and a negative terminal and causing the subset strings to be

-18-

electrically connected together by respective conductors disposed entirely between the first and second encapsulating sheets, the positive and negative conductors being electrically connected to first and last subset strings of the subset strings that are electrically connected together.

5

The method may involve electrically connecting subsets of the array of PV cells into separate subset strings, each subset string having a positive terminal and a negative terminal and causing the subset strings to be electrically connected together by respective conductors disposed outside the outer perimeter edge of the laminate, the positive and negative conductors being electrically connected to first and last subset strings of the subset strings that are electrically connected together.

10

15

The method may involve surrounding the outer perimeter edge of the laminate with a frame having an integral holder operably configured to hold first and second electrical connectors.

20

The method may involve causing the first and second terminating portions of the positive and negative conductors to extend into the holder, and connecting the first and second terminating portions to the first and second electrical connectors respectively.

25

The method may involve connecting the first and second electrical connectors to third and fourth electrical connectors on the holder, the third and fourth electrical connectors having portions externally of the holder to enable the array to be electrically connected to a load.

30

Surrounding the laminate with a frame may involve connecting a plurality of frame members together such that each of the frame members holds a respective portion of the outer perimeter edge of the laminate.

-19-

Connecting the plurality of frame members together may involve corner connectors with openings integrally formed in respective frame members.

5 The method may involve electrically connecting subsets of the array of PV cells into separate subset strings, each subset string having a positive terminal and a negative terminal.

10 The method may involve connecting each positive and negative terminal of each string to a respective conductor having a respective terminating portion extending into the holder.

The method may involve connecting respective terminating portions of the conductors to a respective electrical connector disposed in the holder.

15 The method may involve installing a bypass diode in the holder and electrically connecting the bypass diode to a pair of electrical connectors associated with a subset string of PV cells to protect the subset string of PV cells from excessive electrical current when the subset string is not generating electric current.

20 The method may involve protecting the electrical connectors in the holder from weather.

25 The method may involve bending at least one of the first and second terminating portions to extend across a portion of the outer perimeter edge of the laminate and across a portion of a back side of the laminate.

30 The method may involve receiving a portion of the outer perimeter edge of the laminate in a receptacle of a frame member having a first electrical connector such that the at least one of the first and second terminating portions extends through an opening in the frame member to facilitate connection of the at least one of the first and second terminating portions to the first electrical connector

-20-

when the outer perimeter edge of the laminate is fully received in the receptacle.

5 The method may involve connecting at least one of the first and second terminating portions to the electrical connector.

The method may involve holding the first electrical connector in a holder on the frame member.

10 Holding the first electrical connector may involve holding the first electrical connector in a holder disposed on the frame member to extend away from the back side of the laminate when the outer perimeter edge of the laminate is received in the receptacle.

15 The method may involve connecting the first electrical connector to a second electrical connector having at least a portion extending out of the holder to facilitate connection of the second electrical connector to a load.

20 In accordance with another aspect of the invention, there is provided a method of framing a PV module. The method involves surrounding and holding an outer perimeter edge of the PV module with a plurality of frame members. The method also involves surrounding connecting frame members together by receiving portions of frame connector elements in respective frame connectors of adjacent frame members. The method further involves
25 holding causing module holders extending between first and second opposite end portions of respective frame members to hold respective edge portions of the outer perimeter edge of the PV module. The method also involves causing at least one conductor extending from an outer perimeter edge of the PV module to extend into the module holder of one of the plurality of frame
30 members and into an electrical connector disposed in an electrical connector holder on an outer portion of the one of the plurality of frame members.

-21-

Causing the conductor to extend into the module holder may involve causing at least one conductor to extend in a continuous curve from the outer edge of the PV module to the electrical connector.

5 The method may involve connecting the electrical connector to an externally accessible terminal mounted on one of the plurality of frame members to enable the PV module to be connected to a load.

10 The method may involve covering the electrical connector holder to protect the electrical connectors from weather.

15 Causing the conductor to extend into the module holder may involve causing a plurality of conductors extending from an outer perimeter edge of the PV module to extend into the module holder of one of the plurality of frame members and into respective electrical connectors disposed in an electrical connector holder on an outer portion of one of the plurality of frame members.

20 The method may involve connecting the respective electrical connectors to respective externally accessible terminals mounted on one of the plurality of frame members to enable the PV module to be connected to a load.

25 The method may involve installing a bypass diode in the electrical connector holder and connecting the bypass diode to two adjacent electrical connectors to provide for current bypassing of a string of PV cells in the PV module.

30 The method may involve covering the electrical connector holder to protect the electrical connectors and the bypass diode from weather.

Other aspects and features of the present invention will become apparent to those ordinarily skilled in the art upon review of the following description of specific embodiments of the invention in conjunction with the accompanying figures.

BRIEF DESCRIPTION OF THE DRAWINGS

In drawings which illustrate embodiments of the invention,

- 5 Figure 1 is an isometric view of a laminated PV module comprising a plurality of PV cells in accordance with a first embodiment of the invention;
- 10 Figure 2A is an isometric view of first and second PV cells interconnected by electrodes and illustrates a positive terminal of the PV module;
- Figure 2B is an isometric view of third and fourth PV cells interconnected by electrodes and illustrates a negative terminal of the PV module;
- 15 Figure 3A is a cross-sectional view of the first and second PV cells, interconnecting electrodes and the positive terminal shown in Figure 2A, within the PV module;
- 20 Figure 3B is a cross-sectional view of the third and fourth PV cells, interconnecting electrodes and the negative terminal shown in Figure 2B within the PV module;
- 25 Figure 4 is an isometric view of a PV module comprising an alternate way of connecting end PV cells of adjacent strings of PV cells, according to a second embodiment of the invention;
- 30 Figure 5 is an isometric view of a PV module having terminating portions of respective strings of PV cells extending from opposite edge portions of an outer perimeter edge of the PV module, according to a third embodiment of the invention;

-23-

Figure 6 is an isometric view of a PV module comprising an alternate way of connecting the end PV cells of adjacent strings of PV cells shown in Figure 5, according to a fourth embodiment of the invention;

5

Figure 7 is an isometric view of the PV module shown in Figure 1 connected to a frame that facilitates termination of electrical conductors of the PV cells in the module, at an outer perimeter edge of the PV module;

10

Figure 8 is a fragmented cross-sectional view of a frame member that facilitates holding electrical connectors adjacent the outer perimeter edge of the PV module;

15

Figure 9 is an isometric view of a corner connector for connecting adjacent frame members together;

Figure 10 is an isometric view of a PV module incorporating a frame having two holders for electrical connectors at opposite ends of the panel, according to another embodiment of the invention;

20

Figure 11 is an end view of a PV module according to another embodiment of the invention showing externally accessible electrical connectors on opposite side edges of the PV module;

25

Figure 12 is an end view of a PV module according to another embodiment of the invention showing externally accessible electrical connectors on opposite sides of the PV module, the electrical connectors having connection axes lying in a plane parallel to the plane of the PV module;

30

-24-

Figure 13 is an end view of a PV module according to another embodiment of the invention, wherein the PV module has a plurality of strings of PV cells, each string having terminating conductors accessible at the same end of the module and externally accessible connectors at opposite side edges of the module;

Figure 14 is an end view of a PV module according to another embodiment of the invention, wherein the PV module has a plurality of strings of PV cells, each string having terminating conductors accessible at the same end of the module and externally accessible connectors at opposite sides of the module, the electrical connectors having connection axes lying in a plane parallel to the plane of the PV module;

Figure 15 is an isometric view of PV modules such as shown in Figures 11 or 13 having co-operating mating pairs of connectors and alignment pins and openings facilitating direct side-by-side connection of adjacent PV modules without the use of jumper wires between adjacent PV modules;

Figure 16 is a schematic diagram showing a series connection of a plurality of PV modules of the type shown in Figure 15;

Figure 17 is a schematic diagram showing a series connection of a plurality of PV modules shown connected together by a plurality of pairs of jumper wires;

Figure 18 is a fragmented cross-sectional view of a frame member having a electrical connector holder that extends away from the back surface of the PV module;

-25-

Figure 19 is an exploded view of a frame member and electrical connector holder for use in a PV module having a plurality of strings of PV cells;

5 Figure 20 is a perspective view of the apparatus shown in Figure 19;

Figure 21 is a rear view of first and second PV modules employing the electrical connector holder shown in Figures 19 and 20, connected together by jumper wires;

10

Figure 22 is a fragmented perspective view of a frame member similar to that shown in Figure 19 but with a plurality of separate electrical connector holders mounted thereon.

15

DETAILED DESCRIPTION

Referring to Figure 1, a PV module apparatus according to a first embodiment of the invention is shown generally at 10. The apparatus 10 includes a plurality of PV cells shown generally at 12 arranged in a planar array 13 having a front side 14 and a back side 16. The PV cells are electrically connected together to form at least one string. In the embodiment shown the PV cells are connected together to form a string of 8 PV cells, having a positive terminal 18 and a negative terminal 20 for supplying electrical energy to a load. Positive and negative conductors 22 and 24 are connected to the positive and negative terminals 18 and 20 respectively. The apparatus further includes front and back encapsulating sheets 26 and 28 disposed on the front and back sides 14 and 16 respectively of the array 13 to form a sub-laminate 30 comprised of the array and the front and back encapsulating sheets. The sub-laminate 30 has a first outer perimeter edge 32 that extends all the way around the sub-laminate.

30

Each of the positive and negative conductors 22 and 24 has a respective portion 34 and 36 extending from the positive and negative terminals 18 and

-26-

20 respectively, between the front and back encapsulating sheets **26** and **28**. The positive and negative conductors **22** and **24** have first and second terminating portions **38** and **40** respectively, that extend outwardly from the first outer perimeter edge **32** of the sub-laminate **30**.

5

Front and back protectors **42** and **44** respectively, are disposed on the front and back encapsulating sheets **26** and **28** to form a laminate **46** comprising the sub-laminate **30** and the front and back protectors. The front and back protectors **42** and **44** have second and third perimeter edges **48** and **50** respectively that extend all the way around the front and back protectors respectively and which are generally co-terminus with the first outer perimeter edge **32** of the sub-laminate. Thus, the first outer perimeter edge **32** of the sub-laminate **30** and the second and third outer perimeter edges **48** and **50** define an outer perimeter edge **52** of the laminate **46**. The first and second terminating portions **38** and **40** extend outwardly from the outer perimeter edge **52** of the laminate **46**.

10

15

20

25

In the embodiment shown in Figure 1, the PV cells **12** are crystalline silicon PV cells having a thickness in a range of between about **0.1** mm and about **0.25** mm and a square area of about **5** cm by about **8** cm. The encapsulating sheets **26** and **28** may be ethylene vinyl acetate or thermoplastic material such as polyvinyl-butylal or polyvinyl-urethane. The front and back protectors **42** and **44** may include respective transparent sheets of low iron tempered glass. The back protector **44** may alternatively include a sheet of electrically insulating, weather protecting material, such as Tedlar® by DuPont. Alternatively, the back protector may be formed of conventional tempered or non-tempered window glass.

30

Referring to Figures **2A** and **2B**, the way in which adjacent PV cells are connected and final cells in the string are terminated is shown. In Figure **2A**, first and second PV cells are shown generally at **60** and **62** respectively. The PV cells **60** and **62** are positioned side by side and in this embodiment, have

-27-

a plurality of screen printed current collecting fingers **64** formed to extend across the front side surfaces **61** and **71** thereof. Back side surfaces (not shown) of the PV cells **60** and **62** are formed to include a back side electrode which may be a planar electrode produced by aluminum or silver-aluminum screen printing on a rear side of the PV cell as is well-known in the art. Thus, the back side surface of each PV cell **60** and **62** is essentially a planar conductor extending generally the full surface of the back side of each PV cell.

The PV cells **60** and **62** are connected together using first and second electrodes, shown generally at **66** and **67** of the type generally described in European Patent No. **1,547,158** to Rubin et al.

Referring to Figure **3A**, the first electrode **66** includes an electrically insulating optically transparent film **70** having a surface **72** on which a layer of adhesive is provided for securing the film to the back side surface **69** of the PV cell **60**. A plurality of substantially parallel electrically conductive wires, only one of which is shown at **74** in Figure **3A**, are embedded into the adhesive layer such that the wires **74** are secured to the film **70** and such that a part of a surface of each of the embedded wires protrudes from the adhesive layer. The part of the surface of each of the embedded wires **74** that protrudes from the adhesive layer is at least partially coated with a coating comprising an alloy having a low melting point to provide for soldering of the embedded wires to the electrically conductive surface of the PV cell **60**. The wires **74** are connected together by bus bars **76** and **78** disposed at opposite ends of the electrode. The bus bars **76** and **78** may be formed from respective elongate strips of tinned copper foil to which the ends of the wires **74** are secured by a low melting point alloy such as may be provided by a thin layer of solder. Thus, the bus bar **76** connects all of the first ends of the wires **74** together, and bus bar **78** connects all of the second ends of the wires **74** together. A surface **80** of the bus bar **76** is in direct contact with the back side surface **69** of the first PV cell **60** and the portions of the wire **74** that are covered with the

-28-

low melting point alloy are connected to the back side surface **69** by heating and pressing the first electrode **66** against the back side surface such that the low melting point alloy melts and solders the wires **74** to the back side surface, while the adhesive secures the film **70** to portions of the back side surface that are not contacted by the coated portions of the wires **74**.

The second electrode **67**, is similar to the first electrode **66** and is placed on the front side surface **71** of the second PV cell **62** with non-adhesive embedded portions **92** of wires **94** in contact with the front side surface **71**. First ends **96** of the wires **94** are connected together by the bus bar **78** that is in electrical contact with the second ends of the wires **74** of the first electrode **66**.

In essence, the first electrode **66** faces upwardly and is in electrical contact with the back side surface **69** of the first PV cell **60** and the second electrode **67** faces downwardly and is in electrical contact with the front side surface **71** of the second PV cell. The first and second electrodes **66** and **67** are connected together by the bus bar **78** and thus connect the back side surface **69** of the first PV cell **60** to the front side surface **71** of the second PV cell **62**. This method of connecting adjacent PV cells together is repeated for each adjacent pair of PV cells to connect the PV cells together electrically in a series string.

The first PV cell in a string may be considered to be that PV cell that is electrically nearest the positive terminal of the string and the last PV cell in a string may be considered to be that PV cell that is electrically nearest the negative terminal of the string. Therefore, in the embodiment shown in Figures 1-3B, PV cell **60** is the first PV cell of the string and PV cell **73** is the last PV cell of the string.

Referring to Figures 2A and 3A, the first PV cell **60** is connected to the positive terminal **18** of the string by an electrode **75** similar to the electrode **67**

-29-

described above. This electrode **75** includes an optically transparent film **77** having wires, one of which is shown at **79** embedded in adhesive on the film such that portions of the wires coated with a low melting point alloy protrude from the adhesive and are secured to the front surface of the first PV cell **60**.
5 Common end portions of the wires **79** are electrically connected, such as by soldering, to a bus bar **81**, which in this embodiment is a strip of copper foil that acts as the positive terminal **18** for the string. Another strip of copper foil **83** is electrically connected to the bus bar **81** again by soldering, such that the strip of copper foil extends at a right angle to the bus bar and it is this strip of copper foil that acts as the positive conductor **22** having the extending portion **34** between the front and back encapsulating sheets **26** and **28** and the terminating portion **38** that extends outwardly of the outer perimeter edge **52** of the laminate **46**.
10

Referring to Figures **2B** and **3B**, the last PV cell **73** is connected to the negative terminal **20** of the string by an electrode **85** similar to the electrode **66** described above. This electrode **85** includes a film **87** that can be, but need not be, optically transparent, having wires, one of which is shown at **89** embedded in adhesive on the film such that portions of the wires coated with a low melting point alloy protrude from the adhesive and are secured to the back surface **91** of the last PV cell **73**. Common end portions of the wires **89** are electrically connected such as by soldering to a bus bar **93**, which in this embodiment is a strip of copper foil that acts as the negative terminal **20** for the string. Another strip of copper foil **95** is electrically connected to the bus bar **93** again by soldering, such that the strip of copper foil extends at a right angle to the bus bar **93** and it is this strip of copper foil that acts as the negative conductor **24** having the extending portion **36** between the front and back encapsulating sheets **26** and **28** and the terminating portion **40** that extends outwardly of the outer perimeter edge **52** of the laminate **46**.
20
25
30

Referring to Figures **3A** and **3B**, it can be seen that the first and last PV cells **60** and **73** in a string have special "terminating" electrodes **75** and **85** on front

-30-

and rear surfaces respectively thereof. Otherwise, the electrode arrangements that connect adjacent PV cell together are the same for each remaining PV cell in the string.

5 Referring back to Figure 1, the PV cells are arranged in first and second parallel spaced apart rows **101** and **103** with the first and last PV cells **60** and **73** being the first cells in each row. Each row **101** and **103** also has final PV cells, which in this embodiment are labeled **130** and **132** respectively. In order to connect the two adjacently located final PV cells **130** and **132** in each
10 row **101** and **103**, the final PV cell **132** in the second row **103** is positioned in the array such that parallel screen printed fingers **133** thereon extend at right angles to the screen printed fingers **64** of the adjacent PV cell **135** in the second row **103** and at right angles to the screen printed fingers **64** of the final PV cell **130** in the first row. This allows an electrode **137** similar to that shown
15 at **67** in Figure 2A to extend between the final PV cells **130** and **132** in the first and second rows **101** and **103**.

Since the back surfaces each of the PV cells in the string is a planar electrode, the orientation of the wires on the electrode that contacts them is
20 irrelevant. Therefore, by placing the final PV cell **132** of the second row such that the screen printed fingers on that cell are at right angles to the screen printed fingers of the final PV cell **130** in the first row, the wires on the electrode extending from the adjacent PV cell **135** can still make contact with the entire back side surface of the final cell **132** in the second row and the
25 wires on the electrode **137** can contact all of the screen printed fingers on the final cell **132** in the second row, and contact the entire back side surface of the final cell **130** in the first row **101**.

Alternatively, as shown in Figure 4, electrode **137** of Figure 1 can be
30 eliminated and replaced with terminating electrodes **139** and **141** of the type shown in Figures 3A and 3B on the final PV cells **130** and **132** in each row to form two distinct string portions and these terminating electrodes can be

-31-

connected together within the laminate to electrically connect the two string portions together. For example, a terminating electrode of the type shown in Figure 3B can be connected to the back side of the final PV cell **130** of the first row **101** such that an extending portion **140** thereof extends away from the final PV cell and a terminating electrode of the type shown in Figure 3A can be connected to the front side of the final PV cell in the second row **103**. Of course, the final PV cell **132** would not be oriented such that its screen printed fingers are at right angles to the screen printed fingers of the remaining cells, but rather it would be oriented such that its screen printed fingers will extend in the same direction as the screen printed fingers of all of the other PV cells in the array.

With terminating electrodes **139** and **141** connected to the final PV cells **130** and **132** in each row, the terminating portions **140** and **142** extend parallel to each other. In addition, the terminating portion **140** will act as a negative terminal for the first string portion and the terminating portion **142** will act as a positive terminal for the second string portion. Therefore, to electrically connect the first and second string portions together in series, a strip of copper foil such as shown at **146** is connected such as by soldering to the terminating portions **140** and **142**. The use of copper foil for the terminating portions **140** and **142** and to connect the terminating portions together keeps the thickness of the materials used in this area to a minimum, lessening the risk of voids in the laminate **46**.

The total number of strings is limited by the size of the PV module. Typically the number of strings will not exceed **10**. The number of PV cells per string depends on the generated power and as will be appreciated later, the type of bypass diode that should be sufficient to dissipate heat when the PV cell(s) in the string is (are) shaded. Desirably the total number of 6-inch crystalline silicon PV cells in two interconnected series PV strings should not exceed **24**.

-32-

Referring to Figure 5, the PV module shown in Figure 4 can be divided into two separately accessible strings of PV modules by extending the terminating portions **140** and **142** out through an end edge portion **150** of the outer perimeter edge **52**, opposite the first common edge portion **134** from which the previously mentioned positive and negative terminating portions **38** and **40** extend. Thus, a first string of PV cells is shown generally at **152** and a second string is shown generally at **154**. In this embodiment, the terminating portion **38** acts as a positive terminating portion for the first string **152** and the terminating portion **140** acts as the negative terminating portion for the first string. Similarly, the terminating portion **142** acts as the positive terminating portion for the second string **154** while the terminating portion **40** acts as the negative terminating portion for the second string. Again the outer perimeter edge **52** of the laminate is completely sealed and only the terminating portions **38**, **40**, **140**, and **142** extend outwardly therefrom.

Referring to Figure 6, the terminating portions **140** and **142** shown in Figure 5, may be connected externally of the laminate **46** by an external bus bar **160** formed of a thin copper foil, for example, by soldering the external bus bar to the terminating portions **140** and **142**. Alternatively, the bus bar **160** could be connected to the terminating portions **38** and **40**.

The embodiment of Figure 6 allows the PV cells to occupy substantially most of the overall PV module area thus improving its efficiency in terms of generated power per occupied area. This design also eliminates one production step namely bus bar soldering inside the PV laminate which can decrease production cost and increase production throughput.

Referring to Figure 7, the laminate **46** of Figure 1 is shown surrounded by a frame **200** surrounding the outer perimeter edge **52** of the laminate. In the embodiment shown, the frame comprises a plurality of frame members **202**, **204**, **206**, and **208** that are connected together to surround the entire perimeter of the laminate **46**. The first frame member **202** has a holder shown

-33-

generally at **210**, operably configured to hold electrical connectors. In this embodiment the holder **210** holds first and second electrical connectors **212** and **214**. The first and second terminating portions **38** and **40** are connected to the first and second electrical connectors **212** and **214** respectively. Third and fourth electrical connectors **216** and **218** are disposed on the holder **210** and are accessible externally of the holder and are connected to the first and second electrical connectors **212** and **214** respectively, to enable the string of PV cells in the laminate **46** to be connected to a load.

A fragmented cross-sectional view of the first frame member **202** is shown in Figure **8**. In this embodiment, the first frame member **202** includes a main web portion **220** to which is connected first and second parallel spaced apart portions **222** and **224** respectively. Each of the first and second parallel spaced apart portions **222** and **224** have inwardly and outwardly extending portions **226**, **227** and **228**, **229** respectively. In this embodiment, the inwardly extending portion **228** of the second parallel spaced apart portion **224** is longer than the inwardly extending portion **226** of the first parallel spaced apart portion **222**. The outwardly extending portions **227** and **229** have the same length to permit a cover **230** to be connected thereto to protect the electrical connectors in the electrical connector holder from weather.

The web portion **220** and the outwardly extending portions **227** and **229** are arranged to form a longitudinal channel seen best at **232** in Figure **8** and act as the holder **210** for holding the first and second electrical connectors. A small opening **245** may be provided in the outwardly extending portion **229** to provide for escape of any condensed moisture from the holder **210**.

Still referring to Figure **8**, in the embodiment shown, the first frame member **202** also includes a third parallel portion **234** parallel to and, between the inwardly extending portions **226** and **228** of the first and second parallel spaced apart portions **222** and **224**. A distance between a first surface **236** of the third parallel portion **234** and a second surface **238** of the first parallel

-34-

spaced apart portion **222** is about equal to the thickness of the laminate **46** to enable the common edge portion **134** of the outer perimeter edge (**52**) of the laminate **46** to be received between the surface **236** and the surface **238**. Thus, the surfaces **236** and **238** and the web portion **220** define a receptacle for receiving and holding the common edge portion **134** of the outer perimeter edge of the laminate **46**. Liquid sealant material, for example, may be applied between the surfaces **238** and **236** and the front and back sides of the laminate **46** to seal the common edge portion **134** in the receptacle.

An opening **240** is provided in the web portion **220** to enable the terminating portion **38** of the positive conductor **22** to be received through the opening **240** when the common edge portion **134** is fully received in the receptacle formed by the surfaces **236** and **238** and the web portion. This enables the terminating portion **38** to extend into the channel **232** formed by the holder **210**. A rubber Mylar® or propylene grommet **242**, for example, may be installed in the opening **240** to eliminate the possibility that the terminating portion **38** can make electrical contact with the web portion **220**, especially where the web portion or the entire first frame member **202** is formed of a metallic material such as an aluminum extrusion. In addition, or alternatively, the terminating portion may be partially covered with an insulating material such as Mylar®, polypropylene or another polymeric material at least at the point it passes through the opening **244**, while leaving a suitably sized portion free of insulating material to facilitate connection of the terminating portion to the electrical connector **212**. Desirably, the insulating material should be able to withstand a dielectric stress of about **8kV**. Alternatively the frame member **202** may be formed from an insulating material, such as a plastic extrusion, in which case the grommet **242** may not be required for electrical insulation but may be desirable to provide a soft edge on which the terminating portion **38** may rest.

In this embodiment, the first electrical connector **212** is of the type provided by Multi-Contact AG of Basel, Switzerland and includes an opening **244** for

-35-

receiving the terminating portion **38**. Opposing springs **246** and **248** of the electrical connector **212** are disposed inside the opening and are biased towards each other. The terminating portion **38** is pushed into the opening **244** and between the springs **246** and **248** such that the springs grasp opposite sides of the terminating portion and thus secure it mechanically while providing an electrical connection to the terminating portion. A wire shown best at **250** in Figure **7** is electrically connected to the electrical connector **212** and is further connected to the third electrical connector **216** disposed externally of the holder **210** to provide for electrical connection of the terminating portion **38** to the third electrical connector.

Referring back to Figure **8**, desirably, the electrical connector **212** is positioned inside the channel **232** in a position such that the terminating portion **38** extends in a continuous curve from the common edge portion **134** to the electrical connector **212**.

Still referring to Figure **8**, the first frame member **202** further includes a parallel web portion **260** that together with respective portions **262**, **264**, and **266** co-operate to define an opening **268** operably configured to receive a portion of an interlocking corner connector, as shown at **270** in Figure **9**, to connect adjacent frame members together. For example, referring to Figure **9**, a first end portion **272** of the first frame member **202** is shown and a second end portion **274** of the fourth frame member **208** is shown. Cross-sectional configurations of the first and fourth frame members are extended out using broken lines as shown at **276** and **278** respectively to show how the corner key co-operates with respective openings in the frame members.

The first opening **268** in the first frame member **202** is shown ready to receive a first portion **280** of the corner connector **270**. A similar opening **282** of the fourth frame member **208** is shown ready to receive a second portion **284** of the corner connector **270**. The first and second portions **280** and **284** of the corner connector **270** are disposed at right angles to each other and the first

-36-

and fourth frame members have end edges **286** and **288** that are disposed at a **45** degree angle to the longitudinal axes of the first and fourth frame members **202** and **208** such that when the first and second portions **280** and **284** of the corner connector **270** are fully received in the openings **268** and **282** respectively, the end edges **286** and **288** of the corresponding frame members **202** and **208** are in abutment and the frame members are disposed at right angles to each other.

In the embodiment shown, the portions **280** and **284** of the corner connector **270** are formed such that at least one surface thereof has a plurality of grooves, one of which is shown at **292**, and ridges, one of which is shown at **294**, to facilitate gripping the respective frame member to which the corresponding portion **280** and **284** is associated.

Referring back to Figure **7**, a bypass diode **300** may optionally be connected between the first and second electrical connectors **212** and **214** to provide for shading protection of the PV cells in the array in the event that the array is connected to a system of PV modules and the PV module shown in Figure **7** becomes shaded. Thus the connector holder **210** also serves as a diode holder to hold a bypass diode for protecting the PV module.

The first frame member **202** described in connection with Figure **7** would be suitable for use with the laminate **46** shown in Figures **1** or **4**.

The laminates shown in Figures **5** and **6** may also be surrounded by frame members using the corner connector **270** for connecting adjacent frame members together.

To facilitate use of the frame members with the laminates shown in Figures **5** and **6**, a frame arrangement similar to that shown in Figure **7** may be used with the exception that the frame member **206** opposite the frame member **202** in Figure **7** is replaced with a fifth frame member **203** similar to that of the

-37-

first frame member **202**, as shown in Figure **10**. In this embodiment, the fifth frame member **203** has a connector holder **320** in which electrical connectors **285** and **287** similar to those shown at **212** and **214** in Figure **10** are located to receive terminating portions **140** and **142** respectively. Thus, in this embodiment there would be first and second strings **152** and **154** of PV cells, each having positive and negative terminating portions (**38**, **142**, and **140**, **40**) and corresponding electrical connectors **212**, **287** and **285**, **214** at opposite ends of the PV module. The electrical connectors **287** and **285** may be connected to respective externally accessible electrical connectors, shown generally at **322**, to facilitate electrically connecting the individual strings to external loads or to other strings within an adjacent PV module.

If there is no need to connect the individual strings to external loads or other strings outside the PV module, the externally accessible electrical connector **322** can be eliminated and a wire may be connected between the electrical connectors **285** and **287** to connect the first and second strings **152** and **154** together.

If the laminate shown in Figure **6** were used with the frame configuration shown in Figure **10**, the bus bar **160** may be disposed within the second frame electrical connector holder **320** and there need not be any electrical connectors in the second frame holder. Where the holder **320** is formed of a conductive material, it will be appreciated that the bus bar **160** should be insulated therefrom, such as by covering relevant portions of the terminating portions **140** and **142** and the bus bar **160** with an electrically insulating material such as Mylar, for example.

Referring back to Figure **7**, a particular connector arrangement is shown whereby the first and second electrical connectors **212** and **214** are connected to the positive and negative terminating portions respectively of a single string of PV cells and a bypass diode **300** is connected across the positive and negative terminating portions **38** and **40** to provide shading

-38-

protection for the overall PV module. The first and second electrical connectors **212** and **214** are electrically connected by wires to third and fourth electrical connectors **216** and **218** which are, in this embodiment, externally accessible from a side edge of the frame member and hence the PV module.

5

Alternative connector arrangements to those shown in Figure 7 may be provided, as shown in Figures 11 and 12 for example. In Figure 11, the holder **210** of the first frame member of Figure 8 is configured to hold first and second connectors **402** and **404**. In this embodiment the first and second connectors **402** and **404** are connected to third and fourth externally accessible connectors **406** and **408** respectively. The third and fourth externally accessible connectors **406** and **408** are disposed on opposite sides of the holder **210** and thus are accessible from opposite side edges of the PV module. The apparatus further includes fifth and sixth electrical connectors **410** and **412** disposed adjacent the third and fourth connectors **406** and **408** respectively and thus are also accessible from respective opposite side edges of the PV module.

10

15

20

In this embodiment the fifth and sixth connectors **410** and **412** are connected together by a wire **414**. The third and fifth connectors **406** and **410** thus form a first pair **462** of externally accessible connectors at a first side of the PV module and the fourth and sixth connectors **408** and **412** form a second pair **464** of externally accessible connectors at a second, opposite side of the PV module.

25

A jumper shown generally at **416** may be used at either side of the PV module to jumper the pair **462** or **464** of electrical connectors at that side, if desired. For example, in the embodiment shown, the jumper **416** is used to connect together the first pair **462** so that external electrical access to the module is provided by the second pair **464**. Alternatively, external electrical access can be provided by the first pair **462** by simply installing the jumper on the second pair **464**.

30

-39-

Referring to Figure 12, an alternative connector arrangement is shown. In this embodiment, the first and second connectors **402** and **404** and the positive and negative terminating portions **38** and **40** are positioned in the same locations as shown in Figure 11, however the connectors **406**, **408**, **410** and **412** are positioned on a back side **405** of the connector holder **210** rather than on side edges of the frame member and PV module, such that connection axes **407**, **409**, **411**, and **413** of the connectors **406**, **408**, **410**, and **412** lie in a common plane parallel to a plane of the PV module.

Referring to Figure 13, the PV module may comprise a plurality of strings of PV cells, each associated with a respective pair **420**, **422**, **424**, **426**, and **428** of positive and negative terminating conductors **430** and **432**. Each positive and negative terminating conductor **430** and **432** is connected to a respective electrical connector **434** and **436**. The electrical connector **434** associated with the positive terminating conductor **430** of the first string is connected to a first externally accessible electrical connector **438** on a first side edge of the frame member. The electrical connector **436** associated with the negative terminating conductor **432** of the final pair **428** is connected to a second externally accessible electrical connector **440** on a second, opposite side edge of the frame member. In between the first and last strings, the remaining strings are connected in series by connecting jumper wires **442** between respective electrical connectors **434**, **436** associated with the positive and negative terminating conductors **430** and **432** of adjacent strings. To provide for shading protection of each individual string, bypass diodes shown at **444** are electrically connected between the electrical connectors **434** and **436** associated with a respective string.

In this embodiment, the apparatus further includes third and fourth externally accessible electrical connectors **446** and **448** disposed on opposite sides of the module, adjacent the first and second externally accessible electrical connectors **438** and **440** respectively and connected by a wire **449** to each

-40-

other. The first and third externally accessible electrical connectors **438** and **446** thus act as a first pair **462** of electrical connectors for the PV module and the second and fourth externally accessible electrical connectors **440** and **448** act as a second pair **464** of electrical connectors for the PV module.

5

The pairs **462** and **464** of connectors at opposite ends of the PV module permit a jumper such as shown at **416** in Figure **11** to be used at either end of the PV module to enable the pair of connectors at the opposite end to be used for electrical access to the PV module as described in connection with Figure **11**.

10

The embodiment shown in Figure **13** permits a plurality of strings of PV cells to be individually accessible through their respective positive and negative terminating conductors **430** and **432** and individual bypass diodes **444** can be associated with each respective string to thereby protect the strings from damage that may result due to shading.

15

Referring to Figure **14**, the externally accessible electrical connectors **438**, **440**, **446** and **448** are disposed on a rear facing edge **441** of the frame member rather than on end edges as shown in Figure **13**. Again the connectors **438**, **440**, **446**, and **448** have connection axes **439**, **443**, **447** and **445** that lie in a common plane parallel to the plane of the PV module. By placing these connectors **438**, **440**, **446**, and **448** on the rear facing edge, adjacent PV modules may be positioned closer together than they can be using the apparatus shown in Figure **13**. It will be appreciated that on the opposite edge of the PV module, the strings are interconnected in a similar manner, but without bypass diodes.

20

25

Referring to Figure **15**, a pair of PV modules such as shown at **470** and **472** may be connected together by placing the PV modules side by side as shown such that respective pairs **462** and **464** of connectors on respective PV modules **470** and **472** are aligned with each other and engaged. To facilitate

30

-41-

this alignment and engagement, pins such as shown at **476** and **478** on an edge of PV module **470** are received in receptacles **480** and **482** respectively of the adjacent module **472**.

5 The jumper **416** may be connected to the pair **462** of connectors on the second module **472** thereby enabling electrical access to the positive and negative terminals of the system of PV modules to be provided by the pair **464** of connectors on the first PV module **470**. Referring to Figure **16**, it will be appreciated that a plurality of PV modules may be connected together in the way shown in Figure **15**, as shown generally at **450** in Figure **16**. In this embodiment, each PV module **452**, **454**, **456**, **458**, and **460** has first and second pairs **462** and **464** of connectors on opposite sides of each PV module. Respective male and female connectors of each pair **462** and **464** are connected to corresponding mating ones of the pair of connectors of the adjacent PV module except for the first and final PV modules **452** and **460** in which the pair of connectors on opposite sides of respective ones of the first and final PV module **452** and **460** are un-terminated. Either of these pairs **462** or **464** may be terminated by a jumper **416** to connect the plurality of PV modules **452** to **460** together, in series. This provides a convenient way of connecting the panels together and facilitates maintenance on the PV modules. The configuration shown in Figure **16** however does not permit any one of the PV modules in the system, such as PV module **456**, to be easily removed because all of the modules on each side or at least one side of the PV module to be removed must be pushed aside to make room to allow the connectors on the PV module being removed to be disengaged. This can be overcome by use of the embodiments shown in Figure **12**, **14**, or **17** for example, where jumper wires connect adjacent PV modules together.

Referring to Figure **17**, the PV modules **452**, **454**, **456**, **458** and **460** shown in Figure **16** may alternatively be connected together in series using a plurality of pairs **471**, **473**, **475** and **477** of jumper wires having connectors complementary to corresponding connectors on adjacent PV modules in the

-42-

series. In this embodiment, the PV modules electrically connected in series need not be physically located adjacent each other and in a common plane as in the embodiment shown in Figure 15.

5 Referring to Figure 18, a frame member according to an alternate embodiment of the invention is shown generally at 500. This frame member has a receptacle shown generally at 502 and a first opening 504 adjacent the receptacle and in communication with the receptacle. A portion 506 of the outer perimeter edge 52 of the laminate 46 is received in the receptacle 502.
10 At least one of the first and second terminating portions is shown generally at 508 and since the terminating portion extends from the outer perimeter edge 52 of the laminate 46, a portion 510 of the terminating portion extends across a portion 512 of the outer perimeter edge 52 of the laminate 46 and across a portion 514 of the back side 516 of the laminate in the receptacle 502 and
15 extends through the first opening 504 to facilitate connection of the terminating portion 508 to an electrical connector 518 adjacent a back side 516 of the laminate 46 and adjacent the outer perimeter edge 52.

In this embodiment, the receptacle 502 is formed by forming a generally U-shaped channel in the frame member. The U-shaped channel has first and
20 second parallel leg portions 520 and 522 and a connecting portion 524 extending therebetween. The first and second parallel leg portions 520 and 522 are spaced apart about the same thickness as the laminate 46 so that the edge portion of the laminate is snugly received in the receptacle 502.

25 In this embodiment, the frame member 500 has a mounting portion 526 adjacent the receptacle 502 for mounting an electrical connector holder 528 to the frame member 500. The mounting portion 526 is disposed generally parallel to the laminate 46 such that when the electrical connector holder 528
30 is mounted to the mounting portion 526, or integrally formed therewith, the electrical connector holder extends generally outwardly, away from the back side 516 of the laminate 46 as indicated by arrow 530. In this embodiment,

-43-

the electrical connector holder **528** is integral with the frame member **520** and mounting portion **526** and has a plurality of walls, three of which are shown at **532**, **534**, and **536** that define a cavity **538** in which the electrical connector **518** is held.

5

It will be appreciated that the electrical connector holder **528** is positioned on the mounting portion **526** such that at least one of the first and second terminating portions (**508**) can extend through the first opening **504** and into the electrical connector holder and into the electrical connector held therein.

10

In this embodiment the electrical connector includes a first terminator **540** for receiving the terminating portion **508** therein, and includes a second terminator shown generally at **542** for receiving a wire **544** therein. First and second externally accessible connectors **546** and **548** are mounted to the wall **536** and lie in a plane **550** that is parallel to a plane of the back side surface **516** of the laminate. The wire **544** is connected to the first externally accessible connector **546** and a second wire **552** is connected to the second externally accessible electrical connector.

15

20

It will be appreciated that a mirror image of the structure shown in Figure **18** extends symmetrically opposite the structure shown and thus provides for termination of the second terminating portion in a similar manner and provides for additional connectors similar to connectors **546** and **548** wherein the wire **552** is connected to at least one of the additional connectors and a wire similar to that shown at **544** is connected to the other of the similar connectors to connectors **546** and **548** to provide for connection to the second terminating portion. It will be appreciated that the structure shown in Figure **18** and the mirror image thereof may be suitable for a PV cell having a single string of PV cells with only first and second terminating portions of the type shown at **508**.

25

30

In a case where the PV module has more than one string of PV cells, such as **3** strings, the structure shown in Figure **18** is replicated and additional

-44-

openings are provided in the mounting portion, accordingly as shown in Figure 19.

Referring to Figure 19, a frame apparatus similar to that shown in Figure 18 for use with PV modules having a plurality of strings is shown generally at 560 and includes a receptacle 562 and a mounting portion 564 having a plurality of openings 566, 568, 570, 572, 574, and 576 all spaced apart appropriately to receive first and second terminating portions 578, 580, 582, 584, 586, and 588, of respective strings of PV cells in the PV module. As can be seen, the terminating portions 578, 580, 582, 584, 586, and 588 extend through openings 566, 568, 570, 572, 574, and 576 respectively. It will be appreciated that in each case, since the terminating portions 578 emanate from the outer perimeter edge 52 of the laminate 46, each terminating portion follows a path similar to that shown in Figure 18 where a portion of the terminating portion extends across a portion of the outer perimeter edge of the laminate and across a portion of the back side of the laminate in order to extend through a respective opening 566, 568, 570, 572, 574, and 576.

In the embodiment shown in Figure 19, a unitary electrical connector holder 590 is shown in exploded view but is received on the mounting portion 564 as shown in Figure 20, for example, or is integral with the mounting portion.

Referring to Figure 20, the electrical connector holder 590 has a plurality of walls 592, 594, 596, 598, 600, 602, 604, 606, 608, and 610 that define a plurality of compartments, in this embodiment first, second and third compartments 612, 614, and 616, each associated with a respective string of PV cells. The compartments 612, 614, and 616 are disposed about respective pairs of openings and in this embodiment the first compartment 612 is disposed about openings 574 and 576, the second compartment 614 is disposed about openings 570 and 572, and the third compartment 616 is disposed about openings 566 and 568 such that when the terminating portions 578 – 588 extend through the openings 566 – 576, they are disposed

-45-

inside a compartment associated with the corresponding string of PV cells. Thus for example, first and second terminating portions **578** and **580** extend into the third compartment **616** through openings **566** and **568**. The third compartment **616** has first and second electrical connectors **620** and **622** to which the first and second terminating portions **578** and **580** are terminated. In general, each compartment comprises a pair of electrical connectors and the positive and negative terminating portions of respective strings of PV cells in the laminate **46** extend through respective openings of the pair of openings associated with the compartment and are connected to the respective pair of electrical connectors associated with the compartment.

In the embodiment shown, bypass diodes such as shown at **630**, **632**, and **634** are connected between respective connectors of the pairs of electrical connectors associated with respective compartments and thus the bypass diodes are connected across the positive and negative terminating portions of respective strings to thereby protect the respective strings from acting as a current sink in the event the string is shaded.

In the embodiment shown, at least some of the walls defining the compartments have passageways extending between adjacent compartments and in this embodiment walls **596** and **604** have first and second passage ways **640**, **642**, **644**, and **645** respectively. The passage ways **640** and **644** have wires **646** and **648** extending therethrough for connecting the electrical connectors of adjacent compartments together. This facilitates connection of the strings of PV cells in series for example.

Still referring to Figure **20**, the electrical connector holder **590** further includes first and second pairs **650** and **652** respectively of externally accessible electrical connectors. Each pair is on an opposite side of the electrical connector holder **590** and is therefor positioned adjacent a respective side of the laminate **46**. One connector of each pair, for example connectors **654** and **656**, is connected to the electrical connector **658** and **660** respectively of the

-46-

first and third compartments **612** and **616** as these connectors act as the positive and negative terminals of the series string of PV cells formed by connecting the cells together using the wires **646** and **648**. In the embodiment shown, the first and second pairs **650** and **652** of externally accessible connectors have co-planar connections axes **670**, **672**, **674**, and **676** that extend generally in a plane parallel to a plane of the laminate **46**.

Finally, cover members **680**, **682**, and **684** may be provided to co-operate with flange portions **686**, **688**, and **690** respectively to seal the first, second and third compartments **612**, **614**, and **616** respectively to protect the connectors disposed therein and other components disposed therein from weather.

Referring to Figure **21**, two PV modules employing the frame member shown in Figure **20** are shown generally at **700**. A first PV module is shown generally at **702** and a second PV module is shown generally at **704**. Both of the first and second PV modules **702** and **704** are fitted with frame members of the type shown at **560** in Figure **20**. For simplicity, these frame members are labeled **706** and **708** respectively. It will be appreciated that the planar view shown illustrates the back sides of the PV modules **702** and **704**. First, second and third strings of PV cells of the first PV module are shown generally at **710**, **712**, and **714** respectively. The positive and negative terminals of each respective string are shown at **716**, **718**, **720**, **722**, **724**, and **726** and bypass diodes **715**, **717**, and **719** are connected across respective strings **710**, **712**, and **714**. The strings are connected together by wires **646** and **648** to form a single series string of PV cells having a positive terminal provided by terminal **716** and a negative terminal provided by terminal **726**. The positive terminal **716** is connected to a first externally accessible electrical connector **654** and the negative terminal **726** is connected to another externally accessible electrical connector **674**. Therefore, from outside of the PV module, externally accessible electrical connector **654** acts as the positive terminal for the PV module and externally accessible electrical connector **674** acts as the negative terminal for the PV module. The

-47-

remaining connectors of each pair are connected together by a single wire **730**.

5 The second PV module **704** is configured similarly such that it has a positive externally accessible electrical connector **732** and a negative externally accessible electrical connector **734**. Again the remaining connectors **736** and **738** are connected together by a single wire **740**.

10 To connect the first and second PV modules together, a first jumper **750** is connected between the externally accessible electrical connector **674** of the first PV module **702** and the externally accessible electrical connector **732** of the second PV module **704**. A second jumper **752** is connected between the remaining adjacent connectors to connect wire **730** to wire **740**. In addition, a third jumper **754** is connected between the negative terminal **734** of the
15 second PV module **704** and the other terminal **738** to connect the negative terminal of the second PV module, which now acts as the negative terminal of the overall system, to the wires **730** and **740** to cause the externally accessible electrical connector **756** adjacent the externally accessible electrical connector **654** to act as the negative terminal for the overall system.
20 Connector **654** acts as the positive terminal for the overall system. Because all of the externally accessible connectors are disposed to have a connection axis generally parallel to the plane of the laminates of each of the PV modules **702** and **704**, the jumpers **750**, **752**, and **754** generally lie in a plane parallel to the planes of the PV modules thus do not interfere with the positioning of
25 inside edges **760** and **762** of the PV modules, enabling the inside edges to abut each other and eliminating any need to space apart the PV modules in order to remove any one PV module from the system.

30 If desired, the inside edge **760** of the first PV module **702** may be provided with small receptacles such as shown at **764** and **766** for receiving corresponding projections **768** and **770** for aligning the first and second PV modules **702** and **704** in a common plane. It will be appreciated that the

-48-

receptacles **764**, **766** and projections **768**, **770** are just one of a plurality of ways of aligning the first and second PV modules **702** and **704** in a co-planar arrangement.

5 Referring to Figure **22**, a frame member according to an alternative embodiment of the invention is shown generally at **800** and includes the same mounting portion **564** as shown in Figure **19**, however in this embodiment there is provided a plurality of electrical connector holders shown generally at **802**, **804**, and **806**. Each electrical connector holder has a
10 respective pair of electrical connectors **808** and **810**, for example and each electrical holder is located over a respective pair of openings in the mounting portion **564**. For example the first electrical connector holder is located over openings **574** and **576**. The second electrical connector holder is located over openings **570** and **572** and the third electrical connector holder is located over
15 openings **566** and **568**. Thus, the respective terminating portions of respective strings of PV cells can extend through respective openings of the pairs of openings into respective electrical connector holders which may be considered to be associated with respective strings of PV cells of the PV module.

20 In this embodiment, each of the electrical connector holders **802**, **804**, and **806** has a respective end wall **840** and **842** having a frangible portion **844** and **846** that may be broken out, as desired to provide an opening through the corresponding end wall **840** and **842**. This facilitates the insertion of conduits
25 such as shown at **850** and **852** between adjacent electrical connector holders such as between the first and second holders **802** and **804** and the second and third holders **804** and **806**.

30 In the embodiment shown, the conduits are provided by rubber grommets having opposed flanges **854** and **856** disposed at opposite ends of a neck portion **858** whereby the flanges are disposed against inside surfaces of walls **842** and **845** respectively and the neck portion **858** extends through the

-49-

openings created by breaking the frangible portions **844** and adjacent electrical connector holders. The use of rubber grommets as conduits **850** and **852** facilitates installation of the grommets after the separate electrical connector holders **802**, **804**, and **806** are fastened to the mounting portion **564** and provide generally weather tight seals that prevent moisture ingress.

The electrical connector holders **802**, **804**, and **806** may further be provided with frangible portions such as shown at **860** and **862** on opposite ends thereof to facilitate selectively mounting externally accessible electrical connectors such as shown at **866** and **867** in frangible portions **860**. The frangible portions **860** can be used on the first electrical connector holder **802** and the frangible portions **862** can be used on the third electrical connector holder **806** to facilitate mounting of the first and second pairs of externally accessible electrical connectors **890** and **892** disposed on opposite sides of the PV module.

Wires such as shown at **894** and **896** act to connect respective strings of PV cells in series and these wires extend through the conduits **850** and **852** between the first and second electrical connector holders **802** and **804** and the second and third electrical connectors **804** and **806** respectively. In addition a wire **898** is connected between one connector of each pair **890** and **892** of the externally accessible electrical connectors to provide for use of the PV module in a manner similar to that depicted in Figure **21**, for example.

Finally, each electrical connector holder **802**, **804**, and **806** is provided with a respective cover **900**, **902**, and **904** to provide for generally weather tight sealing of the corresponding electrical connector holders. It will be appreciated that the use of the separate electrical connector holders **802**, **804**, and **806** in Figure **22** simplifies the manufacturing process in that a single style of electrical connector holder with frangible portions as shown may be fabricated such as by injection molding plastic to provide one of the indicated electrical connector holders. The same mold can be used to make any

-50-

number of electrical connector holders of this type and thus any number of electrical holders may be positioned end to end as shown in Figure 22 to provide for termination of the positive and negative terminating portions of each string of PV cells in the laminate. The frangible portions 844, 846, 860, and 862 can be punched out as needed, depending upon the position of the electrical connector on the frame member.

In each of the embodiments shown herein it will be appreciated that conductors connected to positive and negative terminals of strings of PV cells are brought out through the outer perimeter edge of the laminate with which they are associated and terminated in an electrical connector disposed on a frame member of a frame surrounding the laminate. This eliminates the need for a junction box as is used in the prior art and allows a bypass diode to be mounted at an edge of the PV module. Furthermore, especially where the frame member is made of a heat conductive material, heat generated in the bypass diode is conducted to the electrical connectors which are connected to the frame member, which facilitates dissipation of heat through the frame and any mounting apparatus to which is it connected. This may be contrasted with the dissipation of heat through a junction box mounted on the back of the PV module as in the prior art, where this type of heat dissipation can significantly increase the temperature of the PV cells adjacent the junction box.

While specific embodiments of the invention have been described and illustrated, such embodiments should be considered illustrative of the invention only and not as limiting the invention as construed in accordance with the accompanying claims.

-51-

**THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE
PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:**

1. A PV module apparatus comprising:

5

a plurality of PV cells arranged in a planar array having a front side and a back side, said plurality of PV cells being electrically connected together in at least one string having a positive terminal and a negative terminal for supplying electrical energy to a load;

10

positive and negative conductors connected to said positive and negative terminals respectively;

15

front and back encapsulating sheets disposed on said front and back sides of said array to form a sub-laminate comprised of said array and said front and back encapsulating sheets, said sub-laminate having a first outer perimeter edge;

20

each of said positive and negative conductors having a respective portion extending from said positive and negative terminals respectively, between said front and back encapsulating sheets and having first and second terminating portions respectively extending outwardly from said first outer perimeter edge of said sub-laminate; and

25

30

front and back protectors disposed on said front and back encapsulating sheets respectively to form a laminate comprising said sub-laminate and said front and back protectors, said front and back protectors having second and third outer perimeter edges respectively generally coterminous with said first outer perimeter edge and defining an outer perimeter edge of said

-52-

laminate, said first and second terminating portions extending outwardly from said outer perimeter edge of said laminate.

- 5 2. The apparatus of claim 1 wherein said first and second terminating portions extend from opposite edge portions of said outer perimeter edge of said laminate.
- 10 3. The apparatus of claim 1 wherein said first and second terminating portions extend from a common edge portion of said outer perimeter edge of said laminate.
- 15 4. The apparatus of claim 1 wherein said array is electrically connected into a plurality of subset strings, each subset string having a positive terminal and a negative terminal and further comprising conductors disposed entirely between said first and second encapsulating sheets, operably configured to electrically connect said subset strings together, said positive and negative conductors being electrically connected to first and last subset strings of said subset strings that are electrically connected together.
- 20 5. The apparatus of claim 1 wherein said array is electrically connected into a plurality of subset strings, each subset string having a positive terminal and a negative terminal and further comprising conductors disposed outside said outer perimeter edge of said laminate operably configured to electrically connect said subset strings together, said positive and negative conductors being electrically connected to first and last subset strings of said subset strings that are electrically connected together.
- 25 6. The apparatus of claim 1 further comprising:
- 30

-53-

a frame surrounding said outer perimeter edge of said laminate, said frame having a holder operably configured to hold electrical connectors, said first and second terminating portions of said positive and negative conductors extending into said holder;

5

first and second electrical connectors disposed in said holder, said first and second terminating portions being connected to said first and second electrical connectors respectively; and

10

third and fourth electrical connectors in said holder such that said third and fourth electrical connectors are accessible externally of said holder, said third and fourth electrical connectors being electrically connected to said first and second connectors respectively, to enable said array to be connected to a load.

15

7. The apparatus of claim 6 wherein said frame comprises a plurality of frame members connected together, wherein each frame member holds a respective portion of said outer perimeter edge of said laminate.

20

8. The apparatus of claim 7 wherein said frame members have end portions having integral openings therein and further comprising corner connectors operably configured to be received in said integral openings to connect adjacent frame members together.

25

9. The apparatus of claim 6 wherein at least one of said frame members has a holder for holding a plurality of electrical connectors.

30

10. The apparatus of claim 9 wherein said array is electrically connected into a plurality of subset strings, each subset string having a positive terminal and a negative terminal and respective conductors extending

-54-

from said positive and negative terminals said respective conductors each having a terminating portion extending outwardly of said outer perimeter of said laminate and extending into said holder.

- 5 **11.** The apparatus of claim **10** further comprising a plurality of electrical connectors in said holder, said terminating portions of said conductors being connected to respective electrical connectors in said holder.
- 10 **12.** The apparatus of claim **11** further comprising a bypass diode in said holder and electrically connected to a pair of electrical connectors associated with a subset string of PV cells, to protect said subset string of PV cells from excessive electrical current when said subset string is not producing electric current.
- 15 **13.** The apparatus of claim **6** further comprising a protector operably configured to protect said electrical connectors from weather.
- 20 **14.** The apparatus of claim **1** further comprising a frame member having a receptacle and a first opening adjacent said receptacle and in communication with said receptacle, at least a portion of said outer perimeter edge of said laminate being in said receptacle and whereby at least one of said first and second terminating portions extends across a portion of said outer perimeter edge of said laminate and across a portion of a back side of said laminate in said receptacle and
- 25 extends through said first opening to facilitate connection of said at least one of said first and second terminating portions to an electrical connector adjacent said back side of said laminate and adjacent said outer perimeter edge of said laminate.
- 30 **15.** The apparatus of claim **14** wherein said frame member has a mounting portion, adjacent said receptacle, for mounting an electrical connector holder to said frame member, said mounting portion being disposed

-55-

generally parallel to said laminate such that when the electrical connector holder is mounted to said mounting portion, said electrical connector holder extends generally outwardly away from said back side of said laminate.

5

16. The apparatus of claim **15** wherein said first opening is in said mounting portion.

10

17. The apparatus of claim **16** further comprising an electrical connector holder on said mounting portion, for holding at least one electrical connector, said electrical connector holder being positioned on said mounting portion such that said at least one of said first and second terminating portions can extend through said first opening into said electrical connector holder and into the electrical connector held therein.

15

18. The apparatus of claim **17** wherein said electrical connector holder is integral with said electrical connector mount.

20

19. The apparatus of claim **15** wherein said mounting portion has a plurality of openings for receiving corresponding terminating portions.

25

20. The apparatus of claim **19** further comprising an electrical connector holder comprising a plurality of walls defining a plurality of compartments, said plurality of walls including a bottom wall, said bottom wall having pairs of openings in each compartment, each said pair of openings being disposed about a respective pair of openings of said plurality of openings in said mounting portion, and each compartment comprising a pair of electrical connectors, whereby positive and negative terminating portions of respective strings of PV cells in said laminate extend through respective openings in said mounting portion and through said pair of openings associated with a

30

-56-

respective said compartment and wherein said first and second terminating portions are connected to the respective pair of electrical connectors in the compartment associated with the openings through which the first and second terminating portions extend.

5

21. The apparatus of claim **20** further comprising bypass diodes connected between respective connectors of said pairs of said electrical connectors associated with respective said compartments.

10

22. The apparatus of claim **21** wherein at least some of said walls have passageways between adjacent compartments.

15

23. The apparatus of claim **22** wherein said passageways have wires extending therethrough, for connecting the electrical connectors of adjacent compartments.

20

24. The apparatus of claim **23** wherein said wires connect said electrical connectors of adjacent compartments such that said strings of PV cells are electrically connected in a series string having positive and negative terminals and wherein said apparatus further comprises first and second pairs of externally accessible electrical connectors, each pair being on an opposite side of said electrical connector holder and adjacent a respective side of said laminate, one connector of each pair being electrically connected together, and one connector of each pair being connected to a respective one of said positive and negative terminals of said series string of PV cells.

25

25. The apparatus of claim **24** wherein said first and second pairs of externally accessible connectors have coplanar connection axes that extend generally in a plane parallel to a plane of said laminate.

30

-57-

26. The apparatus of claim **15** wherein said mounting portion has a plurality of openings therein for receiving respective terminating portions of respective strings of PV cells within said laminate therethrough.

5

27. The apparatus of claim **26** further comprising a plurality of electrical connector holders on said mounting portion, each electrical connector holder having a respective pair of electrical connectors and each electrical connector holder being located over a respective pair of openings in said mounting portion to enable said respective terminating portions of respective strings of PV cells to extend through respective openings of said pairs of openings, into respective electrical connector holders for connection to said electrical connectors therein.

10

28. The apparatus of claim **27** wherein said electrical connector holders have end walls with end openings therein and wherein conduits extend between end openings of adjacent electrical connector holders.

15

29. The apparatus of claim **28** further comprising wires extending through said conduits to electrically connect said electrical connectors in adjacent electrical connector holders.

20

30. The apparatus of claim **29** wherein said wires connect said electrical connectors of adjacent electrical connector holders such that said strings of PV cells are electrically connected in a series string having positive and negative terminals and wherein said apparatus further comprises first and second pairs of externally accessible electrical connectors, each pair being on respective electrical connector holders on opposite sides of said laminate, one connector of each pair being electrically connected together, and one connector of each pair being connected to a respective one of said positive and negative terminals of said series string of PV cells.

25

30

-58-

31. The apparatus of claim 30 wherein said first and second pairs of externally accessible connectors have coplanar connection axes that extend generally in a plane parallel to a plane of said laminate.

5

32. A frame apparatus for a PV module, the apparatus comprising:

an elongate body having first and second opposite ends and a module holder between said first and second opposite ends, said module holder being operably configured to hold an edge portion of an outer perimeter edge of the PV module;

10

first and second frame connectors disposed at said first and second ends respectively, said first and second frame connectors being operably configured to receive and hold a frame connector element operably configured to connect two adjacent said frame members together;

15

an electrical connector holder adjacent said module holder, operably configured to hold at least one electrical connector;

20

an opening extending between said module holder and said electrical connector holder, said opening being operably configured to receive therethrough at least one conductor extending from the outer perimeter edge of the PV module such that the at least one conductor can extend from the outer perimeter edge of the PV module into the module holder and from the module holder into an electrical connector in the electrical connector holder, in a continuous curve.

25

30

33. The apparatus of claim 32 wherein said elongate body includes first and second parallel spaced apart walls forming said module holder and

-59-

third and fourth parallel spaced apart walls forming said electrical connector holder, said first and second parallel spaced apart walls extending in a direction opposite to said third and fourth parallel spaced apart walls.

5

10

- 34.** The apparatus of claim **33** wherein said body comprises an inner wall between said first and second parallel spaced apart walls and said third and fourth spaced apart walls, said first and second parallel spaced apart walls and said third wall defining an edge space in which a portion of the outer perimeter edge portion of the PV module can be received and said third and fourth parallel spaced apart walls and said inner wall defining an electrical connector space in which at least one electrical connector may be mounted, said opening being disposed in said inner wall.

15

- 35.** The apparatus of claim **33** further comprising first and second transverse walls extending between said third and fourth walls, said third and fourth parallel spaced apart walls further defining said electrical connector space.

20

- 36.** The apparatus of claim **35** further comprising first and second connector mounts on said first and second transverse walls respectively operably configured to mount first and second electrical connectors to said first and second transverse walls respectively.

25

- 37.** The apparatus of claim **35** further comprising a removable cover operably configured to cooperate with said third and fourth walls and said first and second transverse walls to enclose said electrical connector space.

30

- 38.** A frame apparatus for a PV module comprising a laminate having an outer perimeter edge and at least first and second terminating

-60-

conductors extending from said outer perimeter edge, the apparatus comprising:

5 a frame member having a receptacle and a first opening adjacent said receptacle and in communication with said receptacle,

10 at least a portion of said outer perimeter edge of said laminate being in said receptacle and at least one of said first and second terminating conductors extending across a portion of said outer perimeter edge of said laminate and across a portion of a back side of said laminate, in said receptacle; and

15 wherein said at least one of said first and second terminating portions extends through said first opening to facilitate connection of said at least one of said first and second terminating conductors to an electrical connector adjacent said back side of said laminate and adjacent said outer perimeter edge of said laminate.

20 **39.** The apparatus of claim **38** wherein said frame member has a mounting portion, adjacent said receptacle, for mounting an electrical connector holder to said frame member, said mounting portion being disposed generally parallel to said laminate such that when the electrical
25 connector holder is mounted to said mounting portion, said electrical connector holder extends generally outwardly away from the back side of said laminate.

30 **40.** The apparatus of claim **39** wherein said first opening is in said mounting portion.

-61-

- 5 **41.** The apparatus of claim **40** further comprising an electrical connector holder on said mounting portion, for holding at least one electrical connector, said electrical connector holder being positioned on said mounting portion such that said at least one of said first and second terminating conductors can extend through said first opening into said electrical connector holder and into the electrical connector held therein.
- 10 **42.** The apparatus of claim **41** wherein said electrical connector holder is integral with said electrical connector mount.
- 15 **43.** The apparatus of claim **39** wherein said mounting portion has a plurality of openings for receiving respective terminating conductors.
- 20 **44.** The apparatus of claim **43** further comprising an electrical connector holder comprising a plurality of walls defining a plurality of compartments, said plurality of walls including a bottom wall, said bottom wall having pairs of openings in each compartment, each said pair of openings being disposed about a respective pair of openings of said plurality of openings in said mounting portion, and each compartment comprising a pair of electrical connectors, whereby positive and negative terminating conductor of respective strings of PV cells in said laminate extend through respective openings in said mounting portion and into a respective said compartment and wherein
- 25 said first and second terminating conductors are connected to the respective pair of electrical connectors in the compartment associated with the openings through which the first and second terminating portions extend.
- 30 **45.** The apparatus of claim **44** further comprising bypass diodes connected between respective connectors of said pairs of said electrical connectors associated with respective said compartments.

-62-

46. The apparatus of claim **45** wherein at least some of said walls have passageways between adjacent compartments.

5 **47.** The apparatus of claim **46** wherein said passageways have wires extending therethrough, for connecting the electrical connectors of adjacent compartments.

10 **48.** The apparatus of claim **47** wherein said wires connect said electrical connectors of adjacent compartments such that said strings of PV cells are electrically connected in a series string having positive and negative terminals and wherein said apparatus further comprises first and second pairs of externally accessible electrical connectors, each pair being on an opposite side of said electrical connector holder and
15 adjacent a respective edge of said laminate, one connector of each pair being electrically connected together, and one connector of each pair being connected to a respective one of said positive and negative terminating conductors of said series string of PV cells.

20 **49.** The apparatus of claim **48** wherein said first and second pairs of externally accessible connectors have coplanar connection axes that extend generally in a plane parallel to a plane of said laminate.

25 **50.** The apparatus of claim **39** wherein said mounting portion has a plurality of openings therein for receiving respective terminating conductors of respective strings of PV cells within said laminate therethrough.

30 **51.** The apparatus of claim **50** further comprising a plurality of electrical connector holders on said mounting portion, each electrical connector holder having a respective pair of electrical connectors and each electrical connector holder being located over a respective pair of

-63-

openings in said mounting portion to enable said respective terminating conductors portions of respective strings of PV cells to extend through respective openings of said pairs of openings, into respective electrical connector holders for connection to said electrical connectors therein.

5

52. The apparatus of claim **51** wherein said electrical connector holders have end walls with end openings therein and wherein conduits extend between end openings of adjacent electrical connector holders.

10

53. The apparatus of claim **52** further comprising wires extending through said conduits to electrically connect said electrical connectors in adjacent electrical connector holders.

15

54. The apparatus of claim **53** wherein said wires connect said electrical connectors of adjacent electrical connector holders such that said strings of PV cells are electrically connected in a series string having positive and negative terminating conductors and wherein said apparatus further comprises first and second pairs of externally accessible electrical connectors, each pair being on respective electrical connector holders on opposite edges of said laminate, one connector of each pair being electrically connected together, and one connector of each pair being connected to a respective one of said positive and negative terminating conductors of said series string of PV cells.

20

25

55. The apparatus of claim **54** wherein said first and second pairs of externally accessible connectors have coplanar connection axes that extend generally in a plane parallel to a plane of said laminate.

30

-64-

56. A frame system for a PV module, the system comprising:

a plurality of frame members, operably configured to surround and hold an outer perimeter edge of the PV module, each frame member comprising:

an elongate body having first and second opposite ends and a module holder between said first and second opposite ends, said module holder being operably configured to hold a respective edge portion of the outer perimeter edge of the PV module;

first and second frame connectors disposed at said first and second ends respectively, said first and second frame connectors being operably configured to receive and hold a frame connector element operably configured to connect two adjacent said frame members together;

at least one of said plurality of frame members further comprising:

an electrical connector holder adjacent said module holder, operably configured to hold at least one electrical connector;

an opening extending between said module holder and said electrical connector holder, said opening being operably configured to receive therethrough at least one conductor extending from the outer perimeter edge of the PV module such that the at least one conductor can extend from the outer perimeter edge of the PV module into the module holder and from the module holder into

-65-

an electrical connector in the electrical connector holder,
in a continuous curve.

57. A method for making a PV module, the method comprising:

5

arranging a plurality of PV cells in a planar array, said planar array having a front side and a back side;

10

electrically connecting said plurality of PV cells together in at least one string having a positive terminal and a negative terminal;

15

connecting positive and negative conductors to said positive and negative terminals respectively;

20

affixing front and back encapsulating sheets on said front and back sides respectively of said array, to form a sub-laminate comprised of said planar array and said front and back encapsulating sheets, said sub-laminate having a first outer perimeter edge, said front and back encapsulating sheets being affixed such that each of said positive and negative conductors has a respective portion extending from said positive and negative terminals respectively, between said front and back encapsulating sheets and such that first and second terminating portions of said positive and negative conductors respectively extend outwardly from said first outer perimeter edge of said sub-laminate to facilitate connection to said positive and negative conductors to an external circuit; and

25

30

affixing front and back protectors on opposite sides of said sub-laminate to form a laminate comprising said sub-laminate and said front and back protectors, said front and back protectors

-66-

having second and third outer perimeter edges respectively generally coterminous with said first outer perimeter edge and defining an outer perimeter edge of said laminate, said first and second terminating portions extending outwardly from said outer perimeter edge of said laminate.

5

58. The method of claim **57** further comprising causing said first and second terminating portions to extend from opposite edge portions of said outer perimeter edge of said laminate.

10

59. The method of claim **57** further comprising causing said first and second terminating portions to extend from a common edge portion of said outer perimeter edge of said laminate.

15

60. The method of claim **57** further comprising electrically connecting subsets of said array of PV cells into separate subset strings, each subset string having a positive terminal and a negative terminal and causing said subset strings to be electrically connected together by respective conductors disposed entirely between said first and second encapsulating sheets, said positive and negative conductors being electrically connected to first and last subset strings of said subset strings that are electrically connected together.

20

61. The method of claim **57** further comprising electrically connecting subsets of said array of PV cells into separate subset strings, each subset string having a positive terminal and a negative terminal and causing said subset strings to be electrically connected together by respective conductors disposed outside said outer perimeter edge of said laminate, said positive and negative conductors being electrically connected to first and last subset strings of said subset strings that are electrically connected together.

25

30

-67-

62. The method of claim **57** further comprising:

5 surrounding said outer perimeter edge of said laminate with a
frame having an integral holder operably configured to hold first
and second electrical connectors;

10 causing said first and second terminating portions of said
positive and negative conductors to extend into said holder, and
connecting said first and second terminating portions to said first
and second electrical connectors respectively; and

15 connecting said first and second electrical connectors to third
and fourth electrical connectors on said holder, said third and
fourth electrical connectors having portions externally of said
holder to enable said array to be electrically connected to a load.

20 **63.** The method of claim **62** wherein surrounding said laminate with a
frame comprises connecting a plurality of frame members together
such that each of said frame members holds a respective portion of
said outer perimeter edge of said laminate.

25 **64.** The method of claim **63** wherein connecting said plurality of frame
members together comprises corner connectors with openings
integrally formed in respective said frame members.

65. The method of claim **62** further comprising:

30 electrically connecting subsets of said array of PV cells into
separate subset strings, each subset string having a positive
terminal and a negative terminal;

-68-

connecting each positive and negative terminal of each string to a respective conductor having a respective terminating portion extending into said holder; and

5

connecting respective said terminating portions of said conductors to a respective electrical connector disposed in said holder.

10

66. The method of claim **62** further comprising installing a bypass diode in said holder and electrically connecting said bypass diode to a pair of electrical connectors associated with a subset string of PV cells to protect said subset string of PV cells from excessive electrical current when said subset string is not generating electric current.

15

67. The method of claim **62** further comprising protecting said electrical connectors in said holder from weather.

20

68. The method of claim **57** further comprising:

a) bending at least one of said first and second terminating portions to extend across a portion of said outer perimeter edge of said laminate and across a portion of a back side of said laminate;

25

b) receiving said portion of said outer perimeter edge of said laminate in a receptacle of a frame member having a first electrical connector such that said at least one of said first and second terminating portions extends through an opening in said frame member to facilitate connection of said at least one of said first and second terminating portions to said first electrical

30

-69-

connector when said outer perimeter edge of said laminate is fully received in said receptacle; and

- c) connecting said at least one of said first and second terminating portions to said electrical connector.

69. The method of claim **68** further comprising holding said first electrical connector in a holder on said frame member.

70. The method of claim **69** wherein holding said first electrical connector comprises holding said first electrical connector in a holder disposed on said frame member to extend away from said back side of said laminate when said outer perimeter edge of said laminate is received in said receptacle.

71. The method of claim **69** further comprising connecting said first electrical connector to a second electrical connector having at least a portion extending out of said holder to facilitate connection of said second electrical connector to a load.

72. A method of framing a PV module, the method comprising:

surrounding and holding an outer perimeter edge of the PV module with a plurality of frame members,

wherein surrounding comprises connecting said frame members together by receiving portions of frame connector elements in respective frame connectors of adjacent frame members and

wherein holding comprises causing module holders extending between first and second opposite end portions of respective

-70-

frame members to hold respective edge portions of the outer perimeter edge of the PV module; and

causing at least one conductor extending from an outer perimeter edge of the PV module to extend into said module holder of one of said plurality of frame members and into an electrical connector disposed in an electrical connector holder on an outer portion of said one of said plurality of frame members.

73. The method of claim **72** wherein causing comprises causing said at least one conductor to extend in a continuous curve from said outer edge of said PV module to said electrical connector.

74. The method of claim **73** further comprising connecting said electrical connector to an externally accessible terminal mounted on said one of said plurality of frame members to enable the PV module to be connected to a load.

75. The method of claim **74** further comprising covering said electrical connector holder to protect said electrical connectors from weather.

76. The method of claim **72** wherein causing comprises causing a plurality of conductors extending from an outer perimeter edge of the PV module to extend into said module holder of one of said plurality of frame members and into respective electrical connectors disposed in an electrical connector holder on an outer portion of said one of said plurality of frame members.

77. The method of claim **76** further comprising connecting said respective electrical connectors to respective externally accessible terminals

-71-

mounted on said one of said plurality of frame members to enable the PV module to be connected to a load.

5 **78.** The method of claim **76** further comprising installing a bypass diode in said electrical connector holder and connecting said bypass diode to two adjacent electrical connectors to provide for current bypassing of a string of PV cells in the PV module.

10 **79.** The method of claim **78** further comprising covering said electrical connector holder to protect said electrical connectors and said bypass diode from weather.

15

1/20

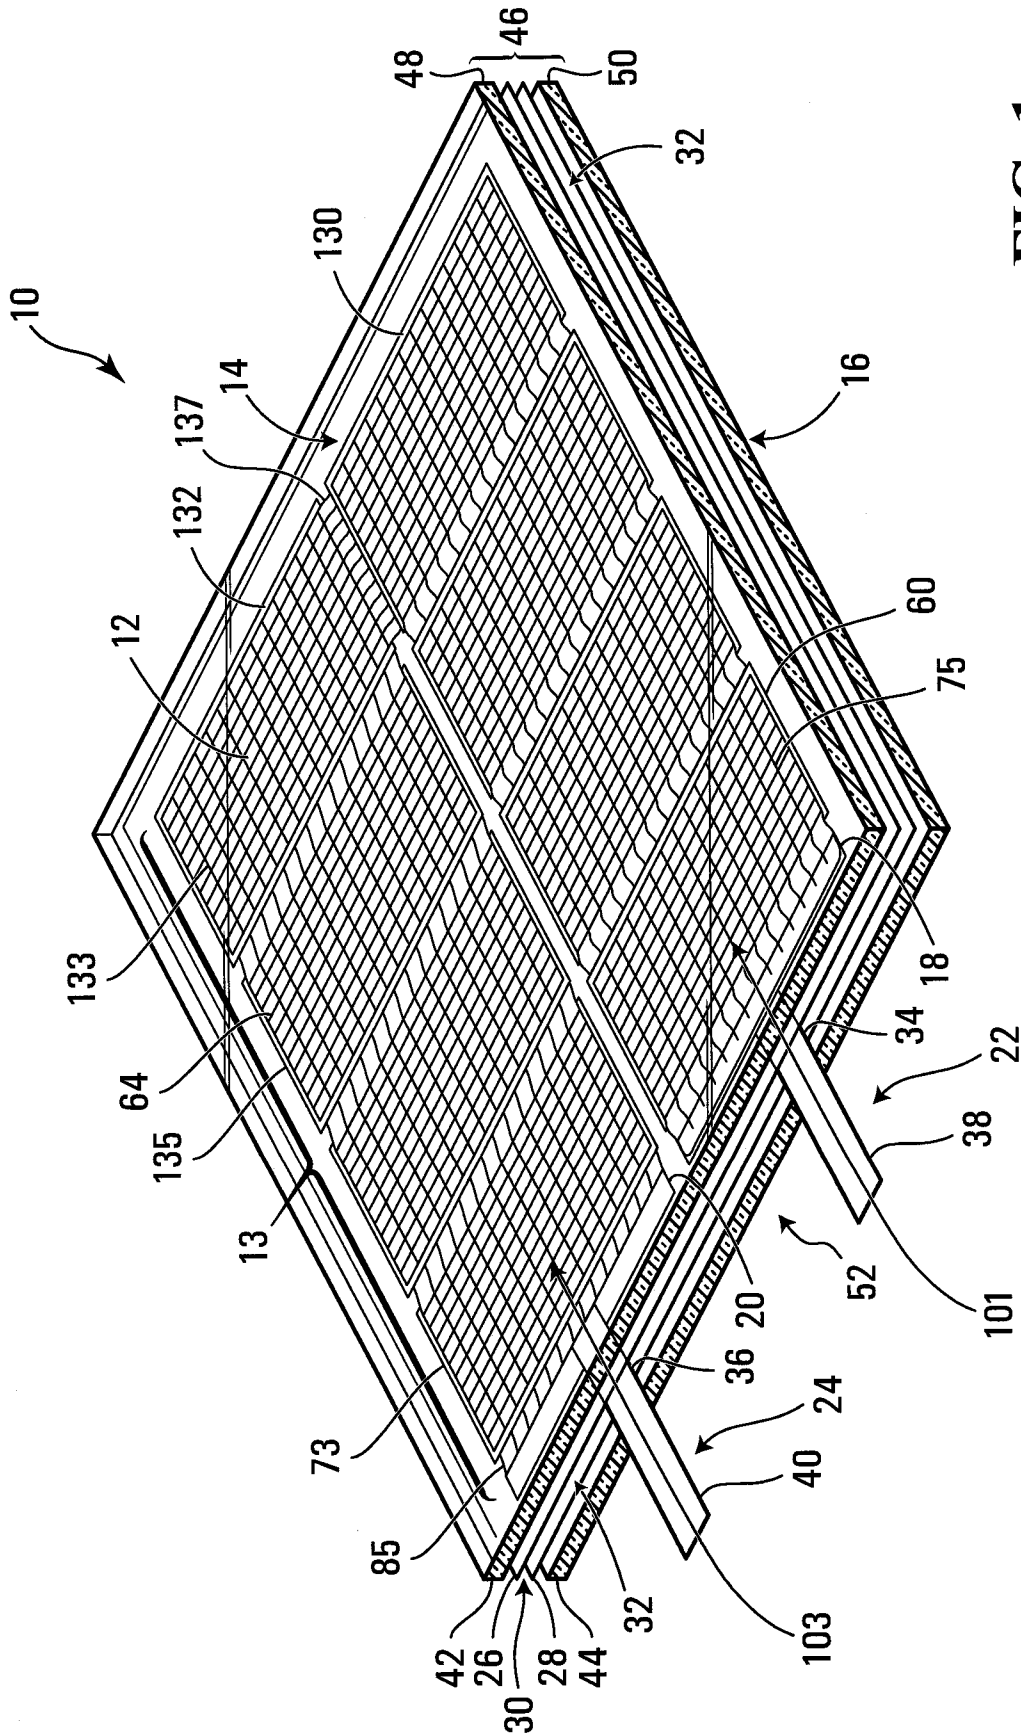
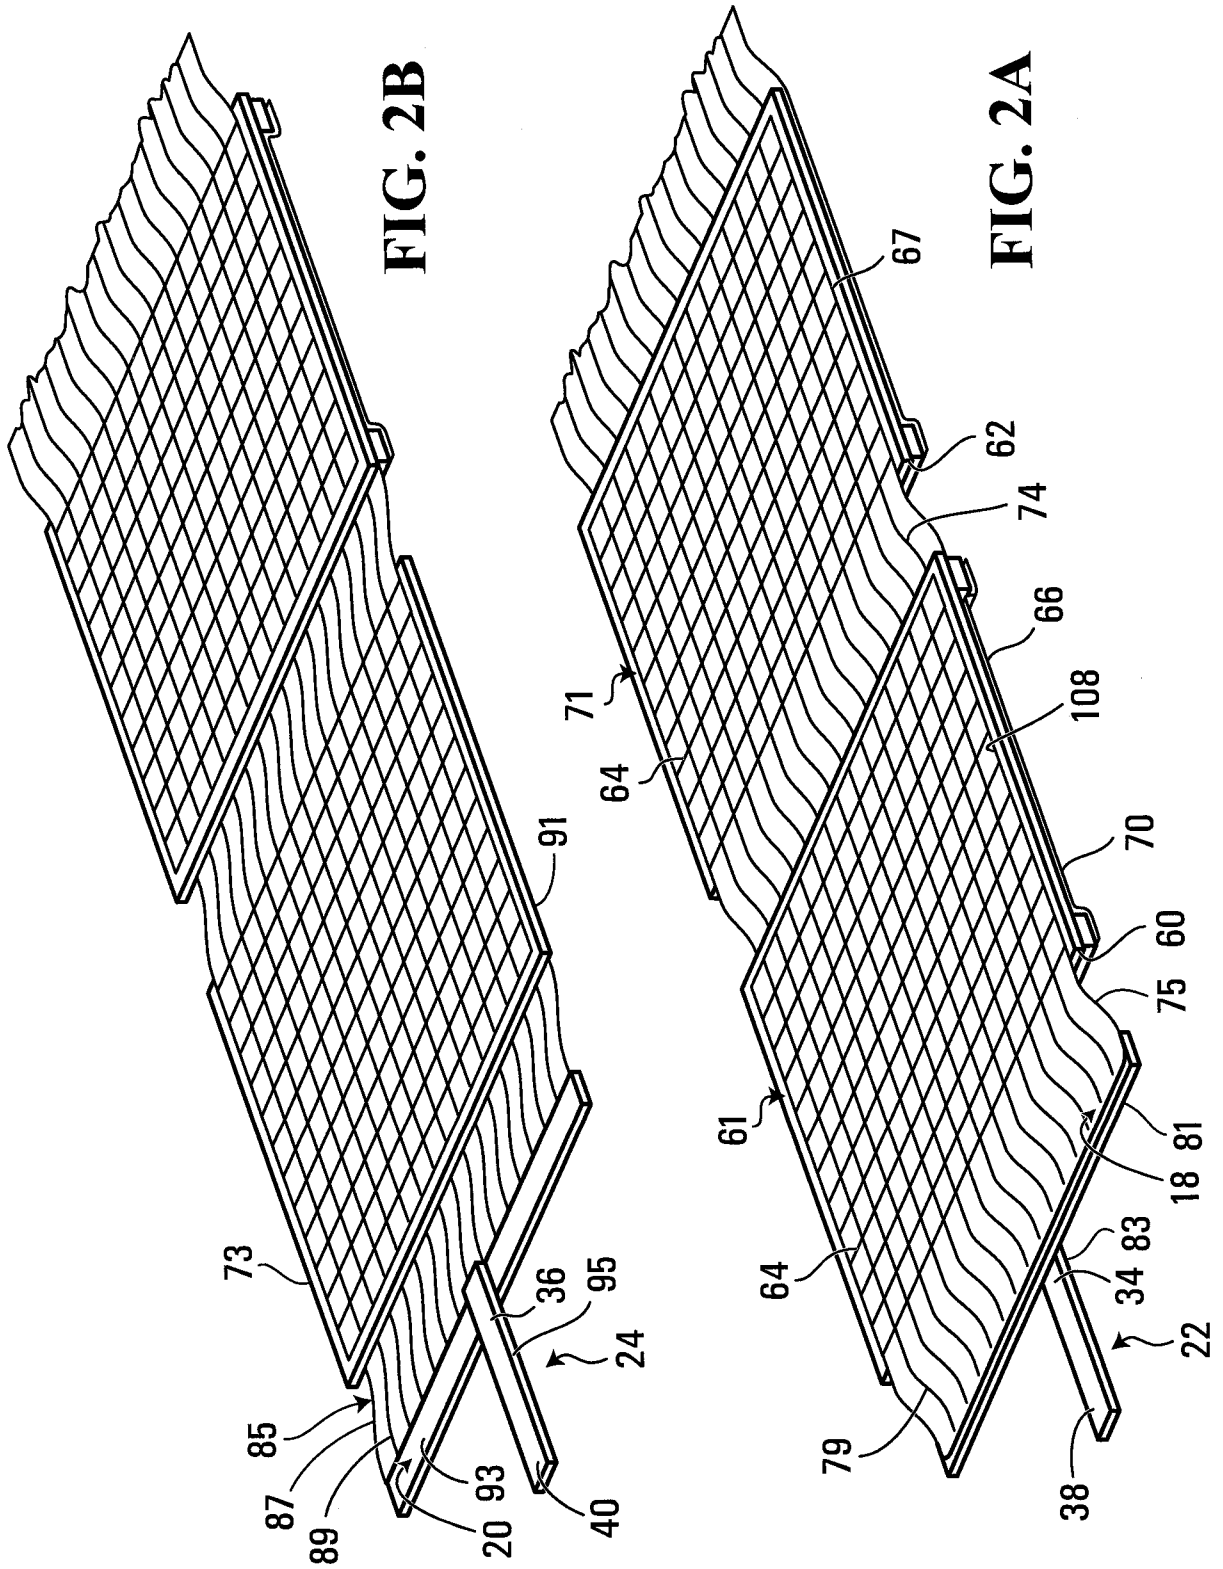


FIG. 1

2/20



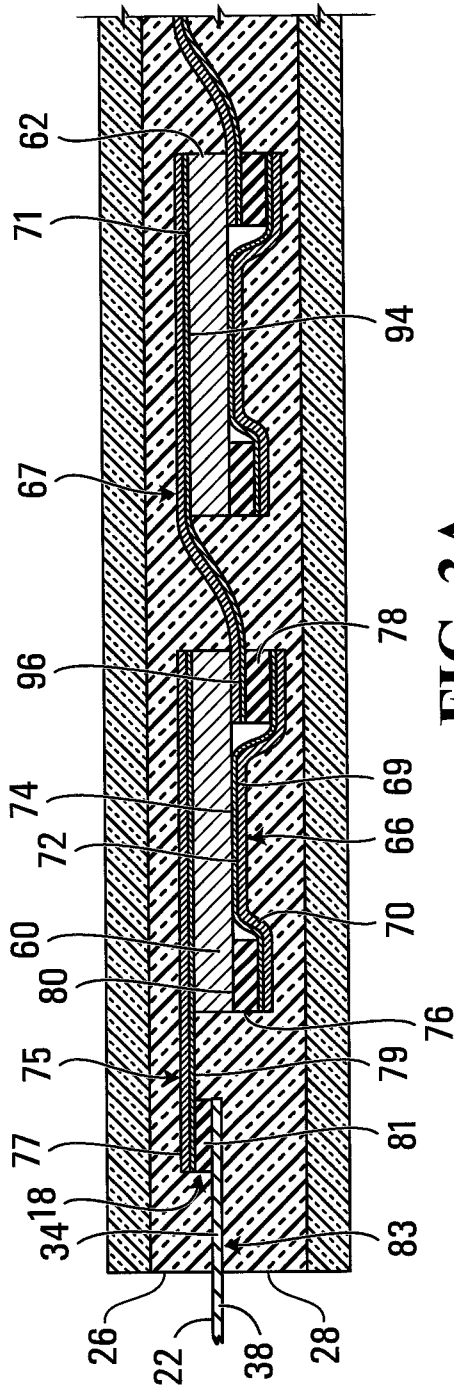


FIG. 3A

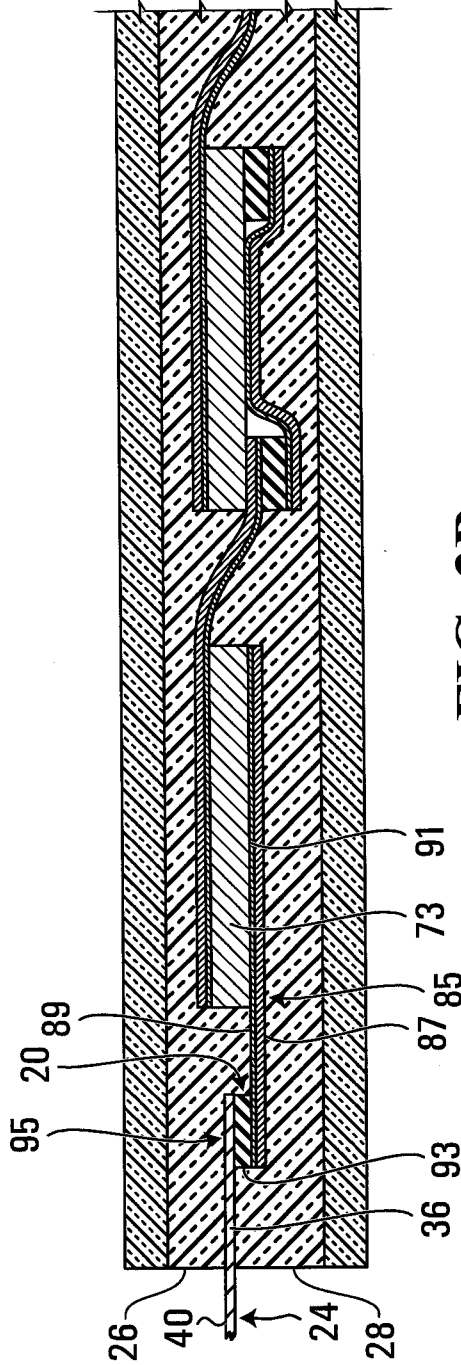


FIG. 3B

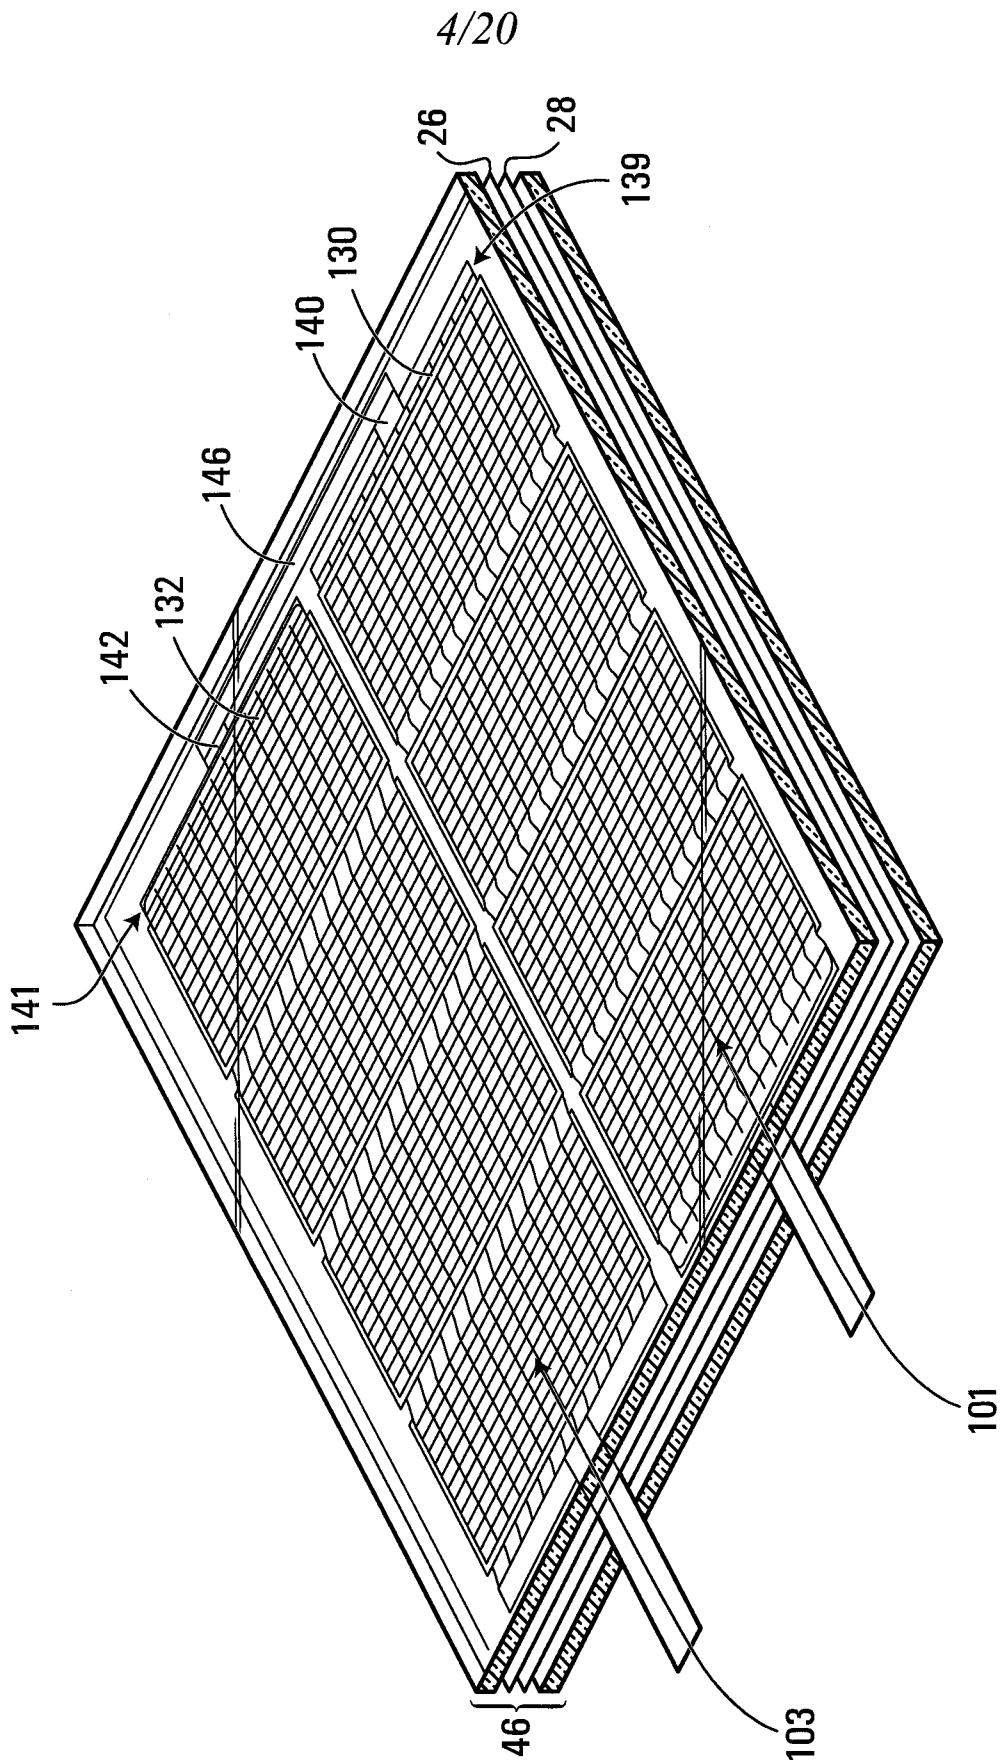


FIG. 4

5/20

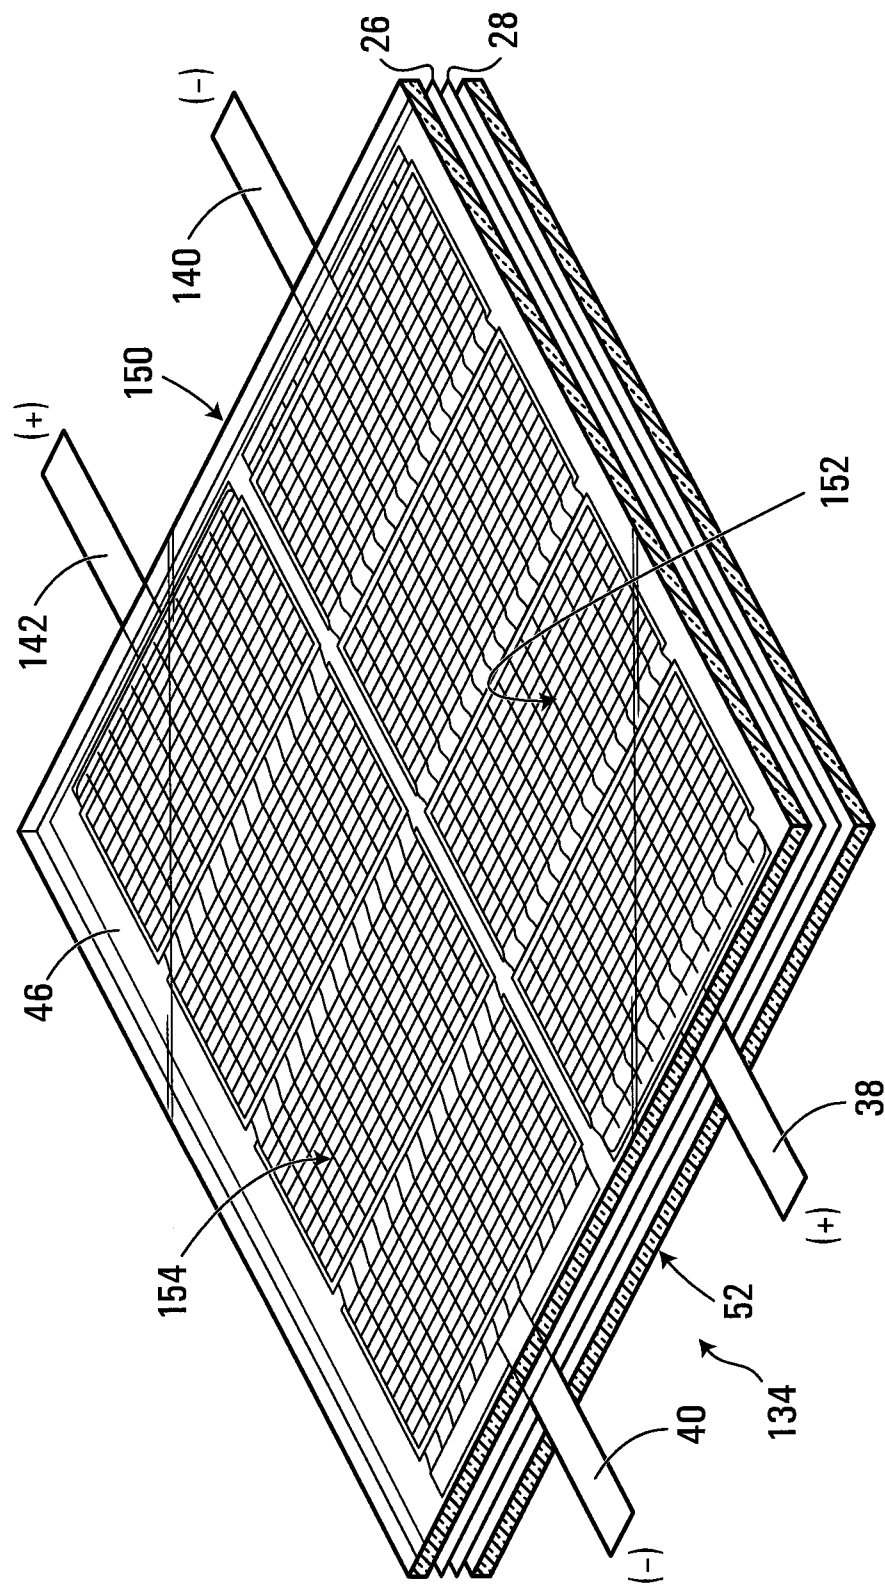


FIG. 5

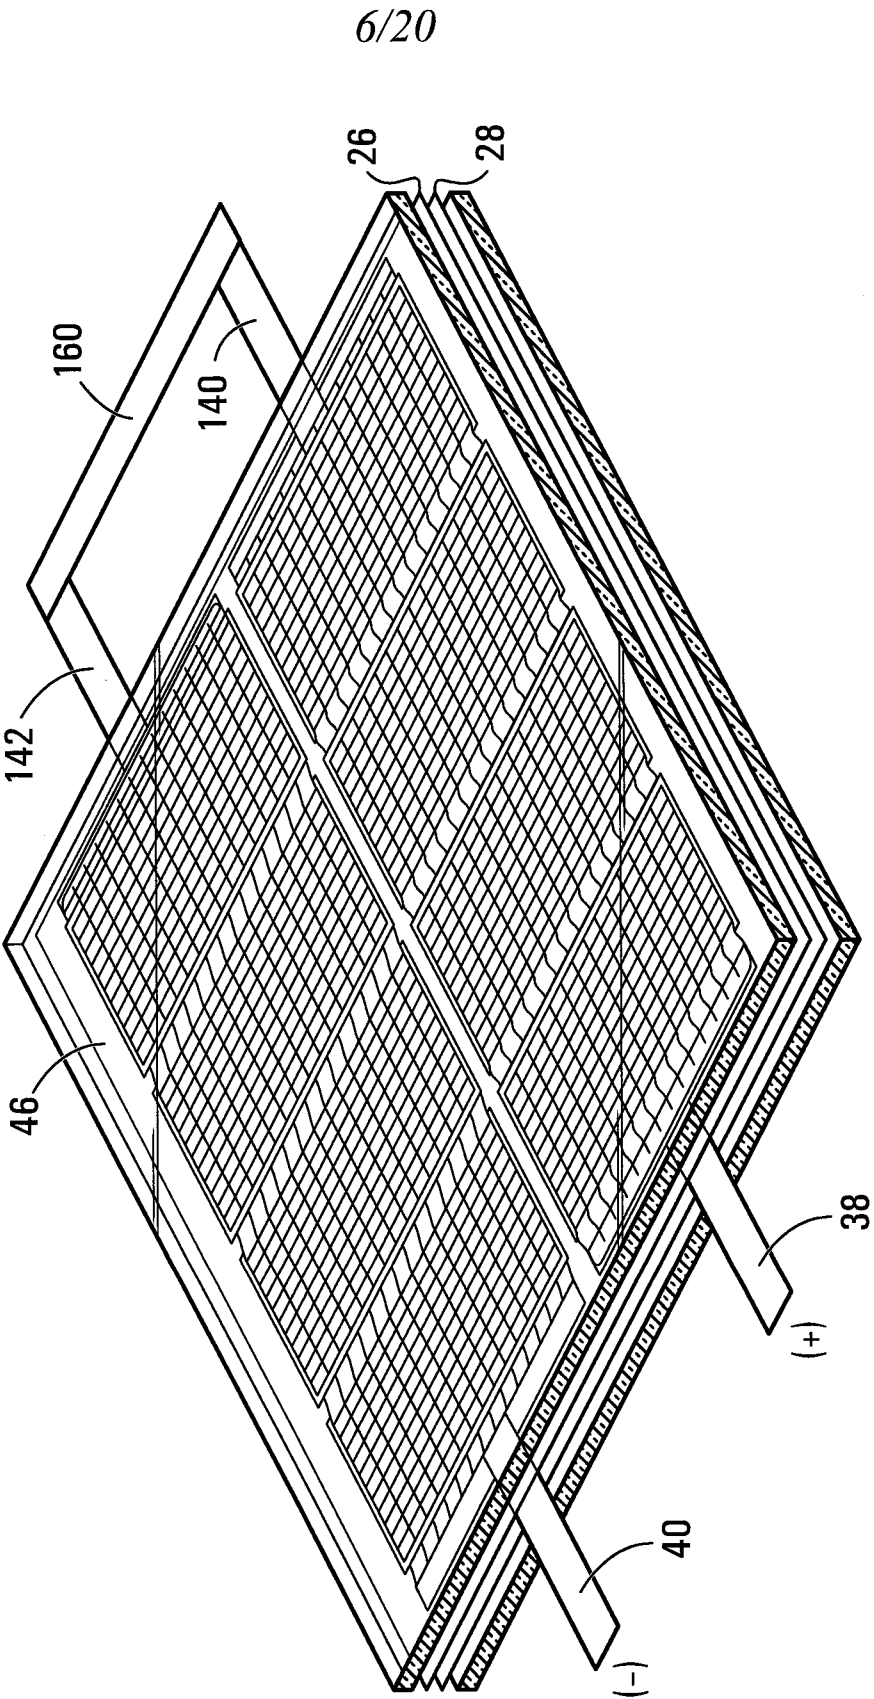
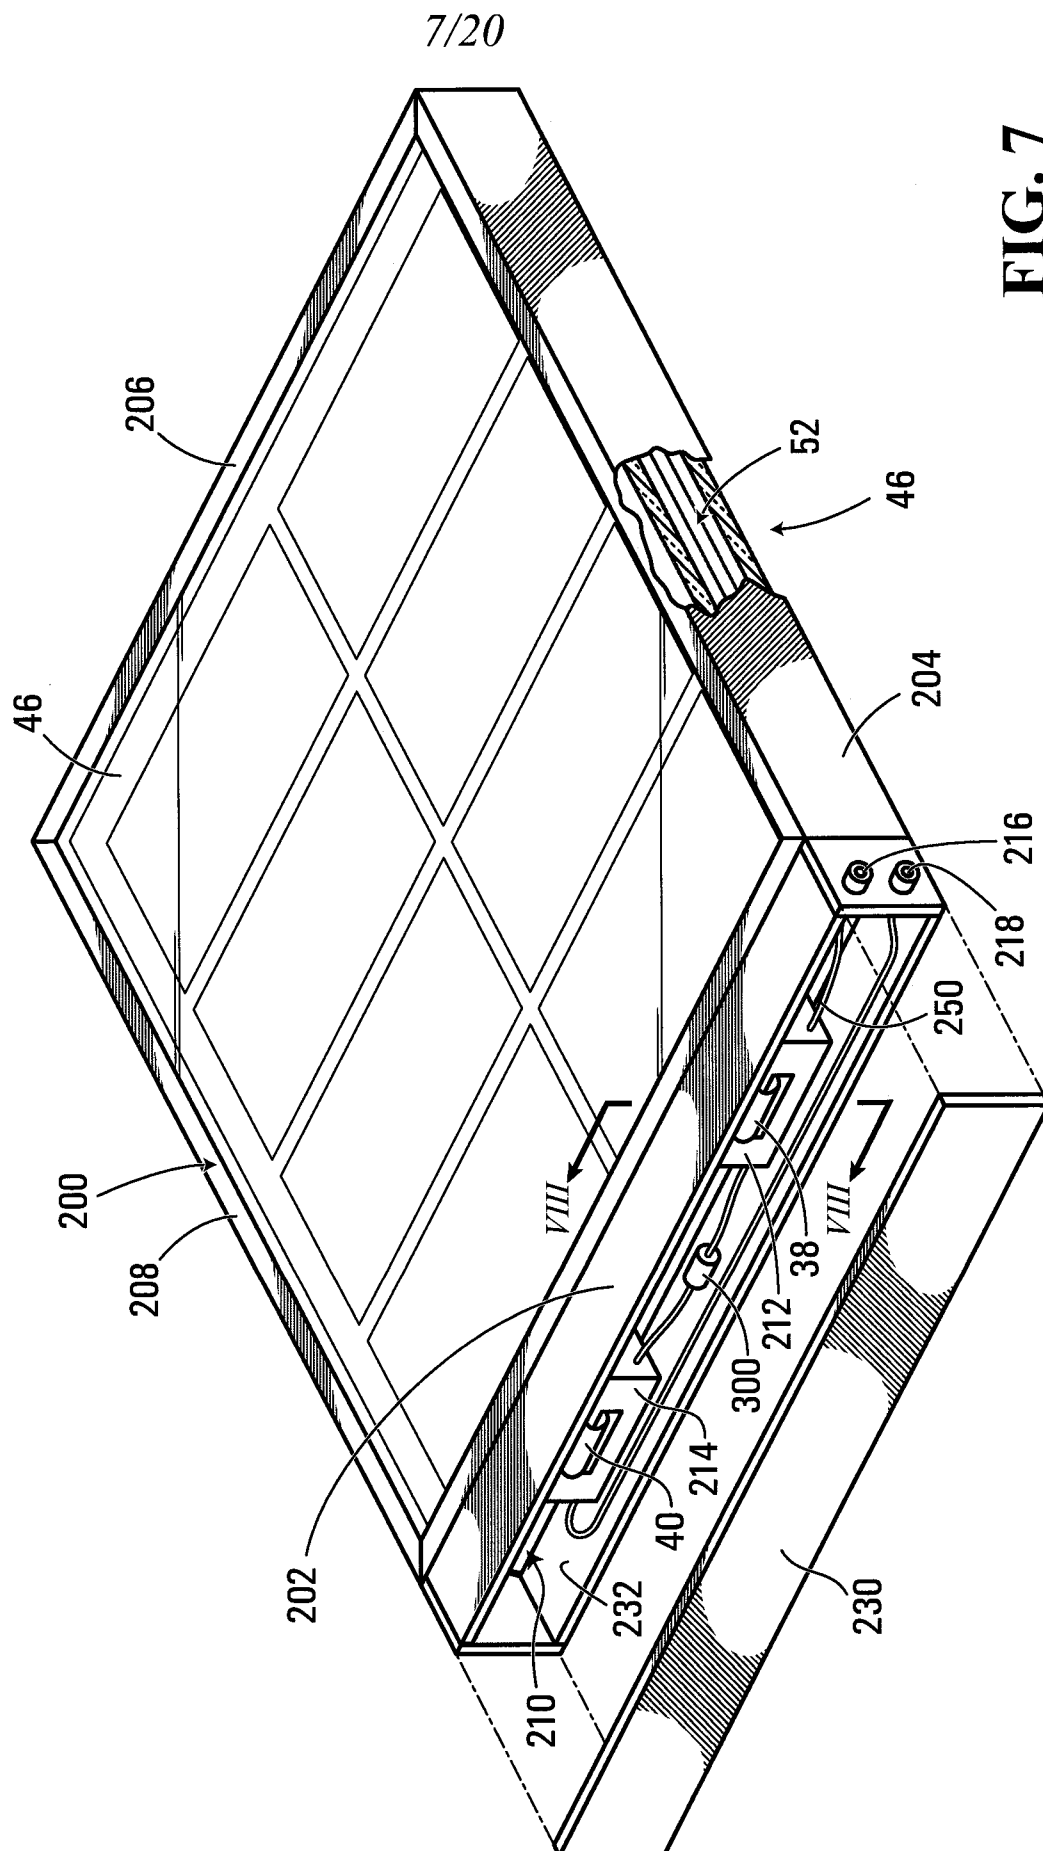


FIG. 6



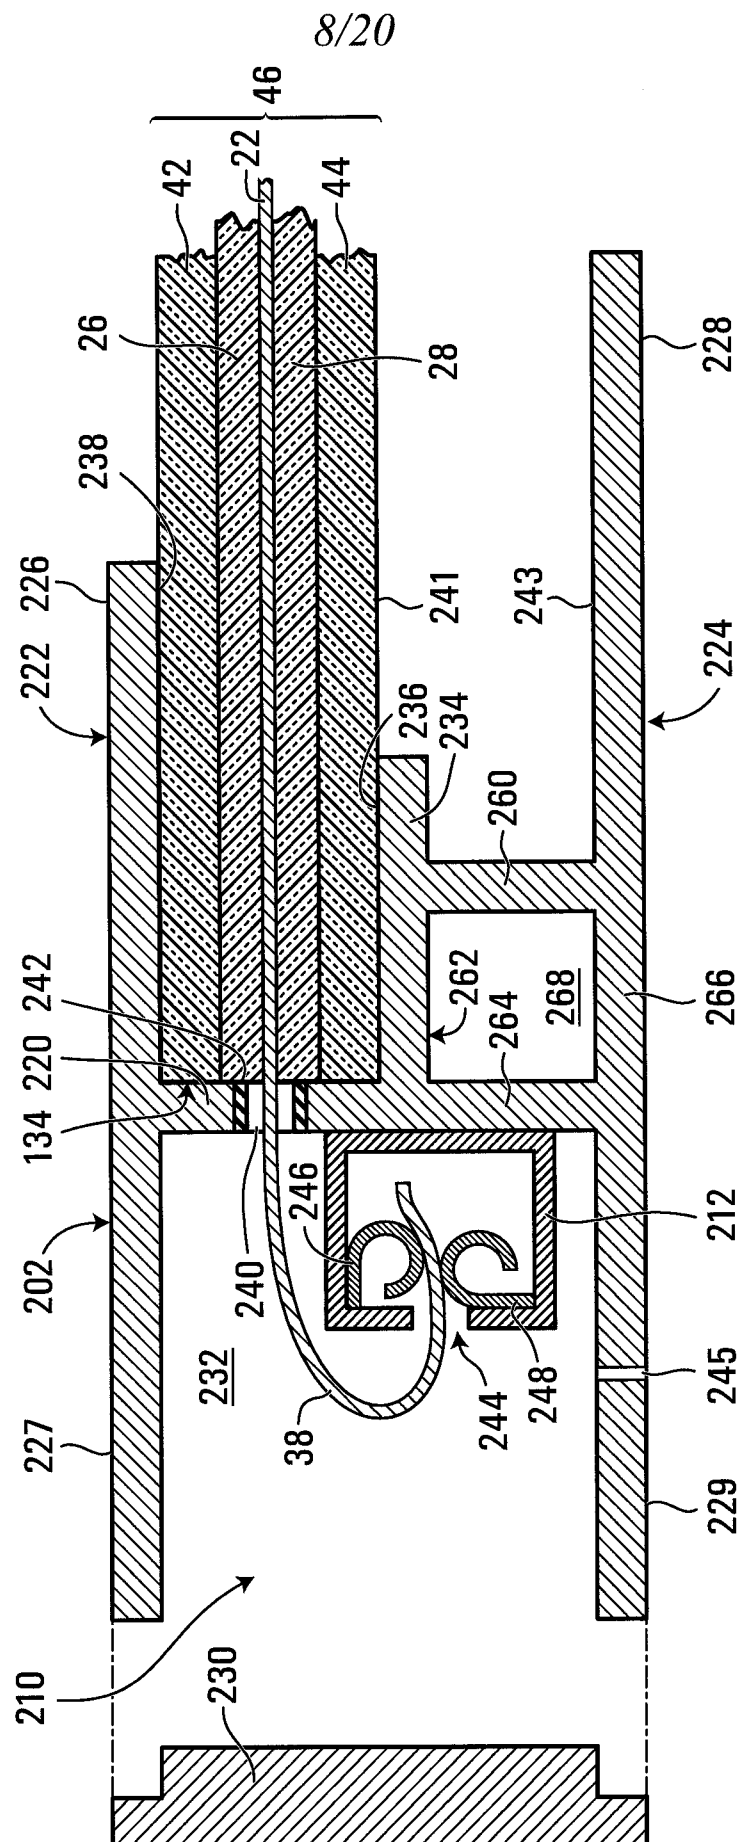
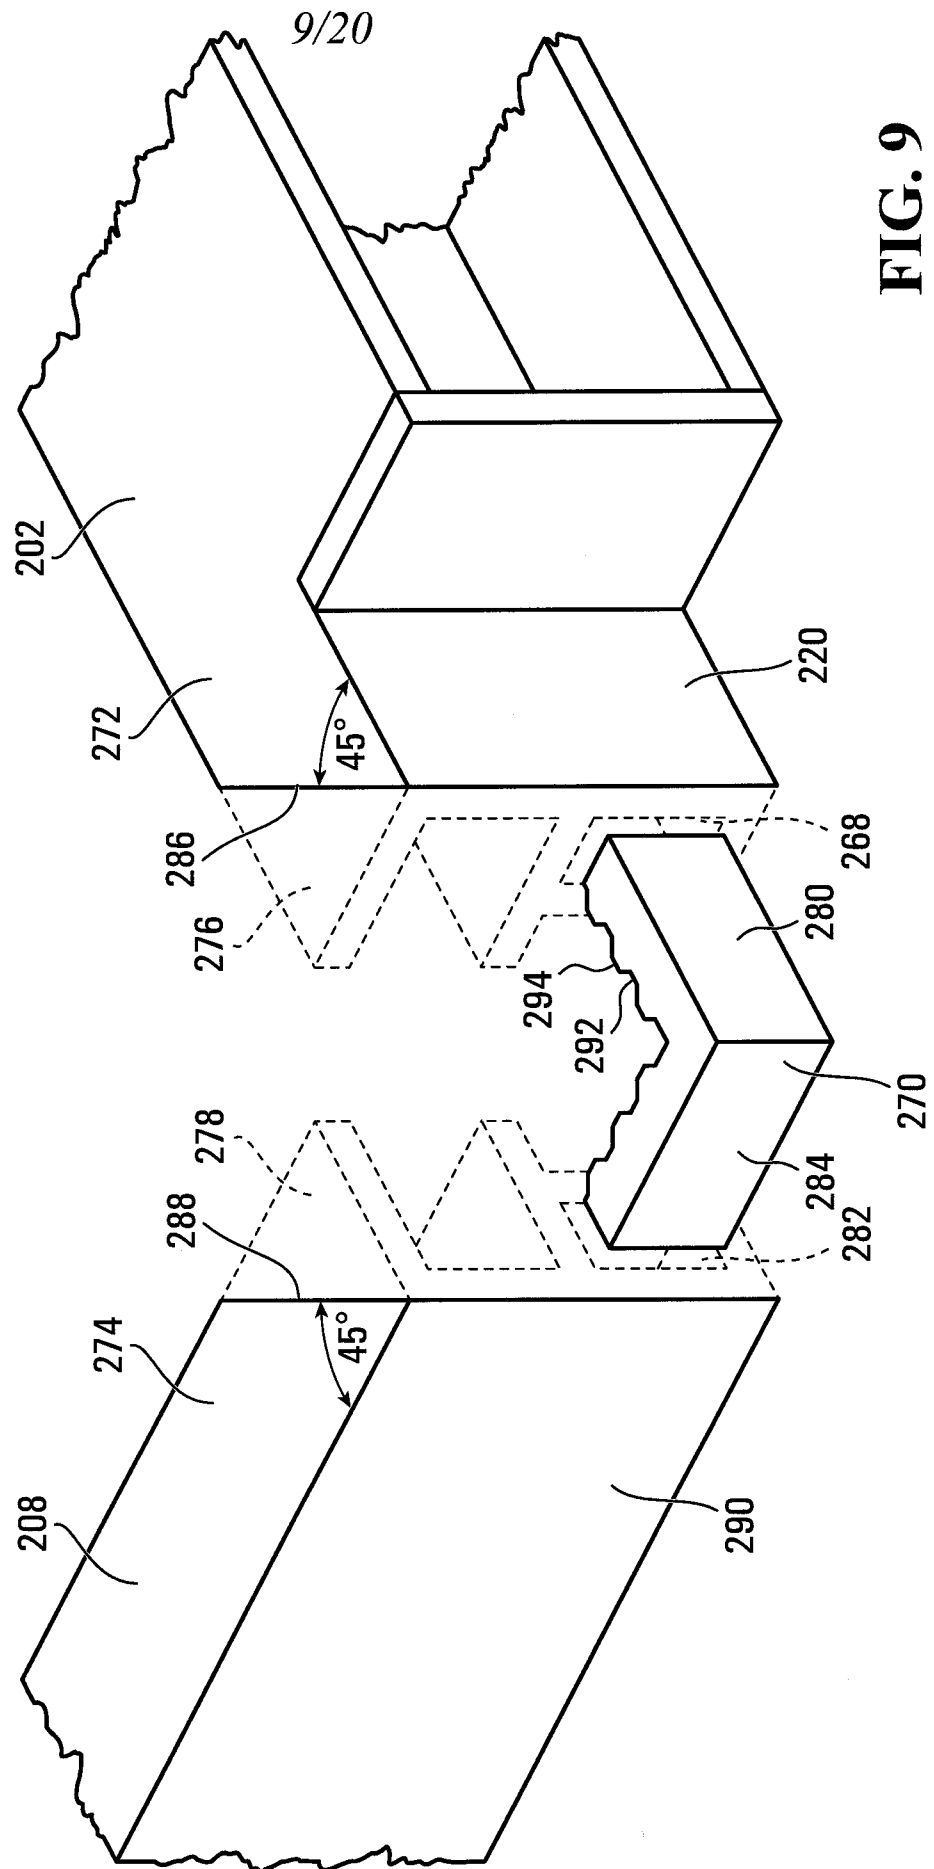


FIG. 8



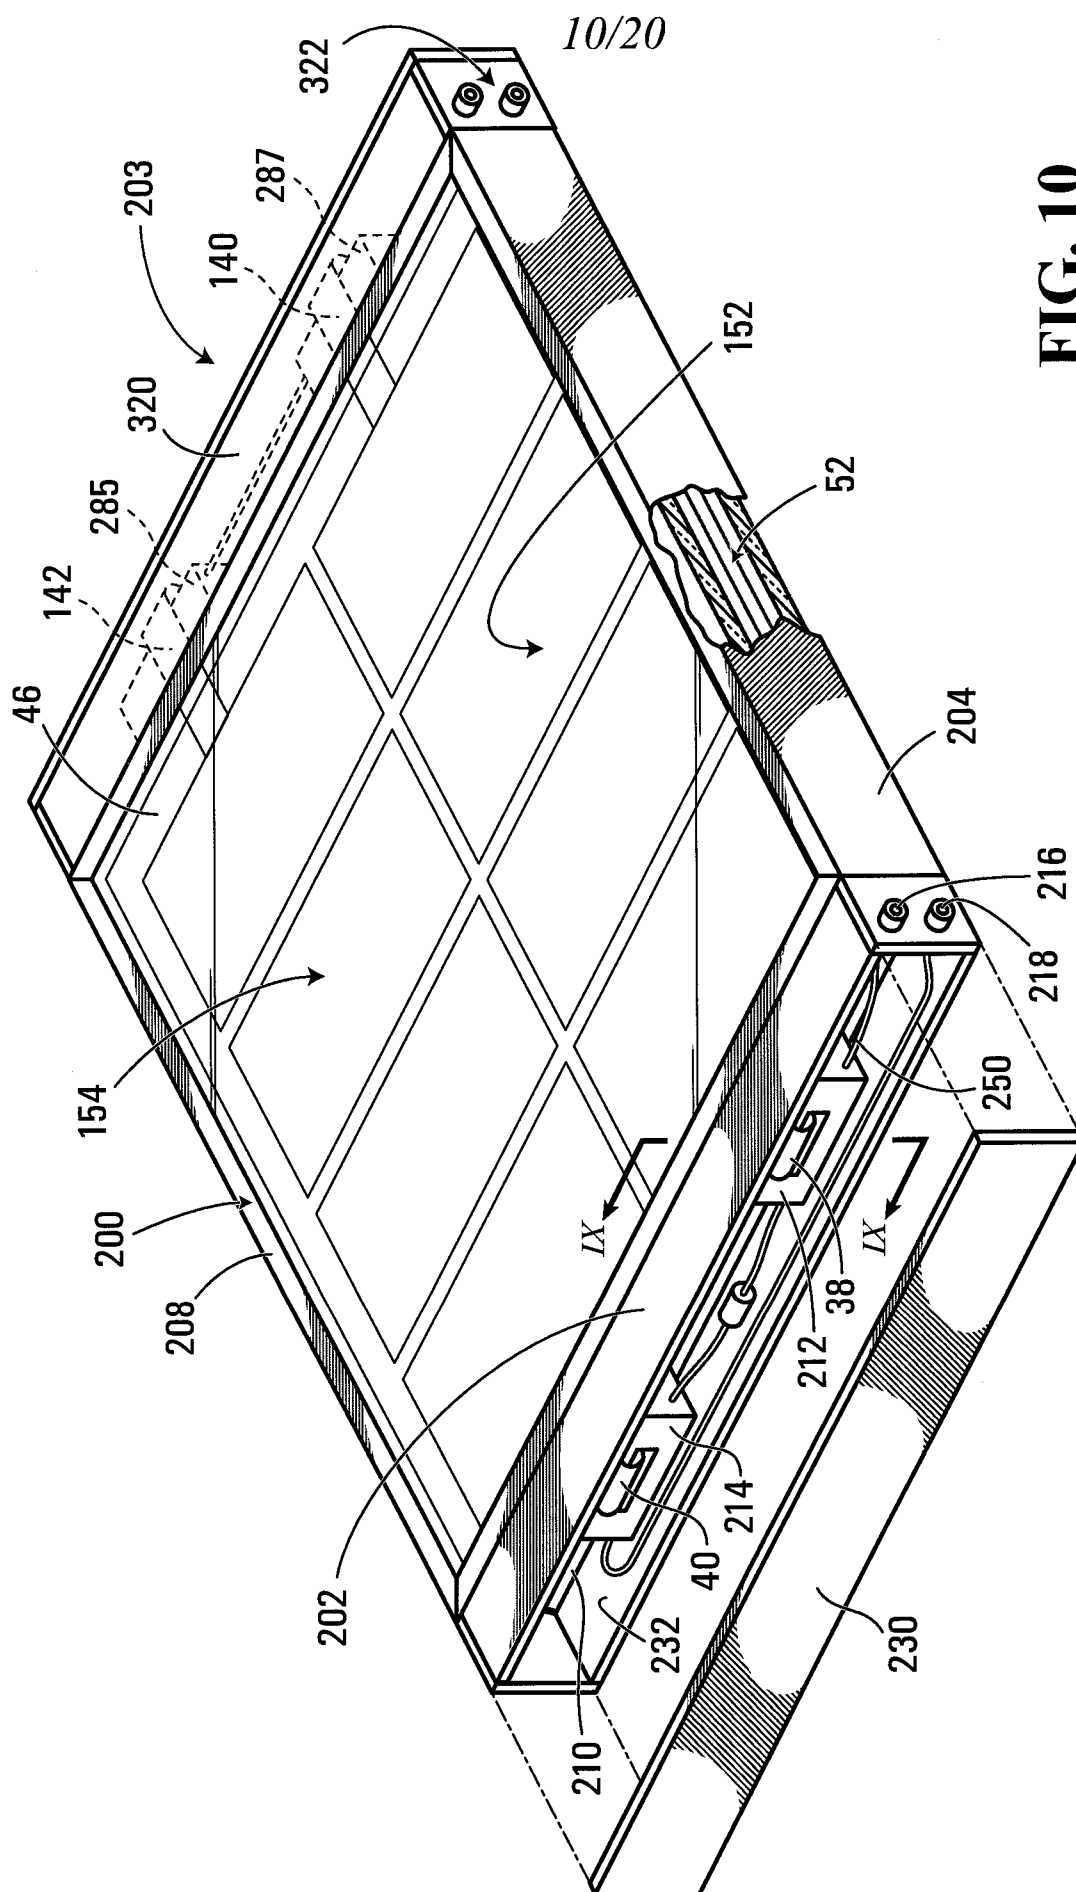


FIG. 10

12/20

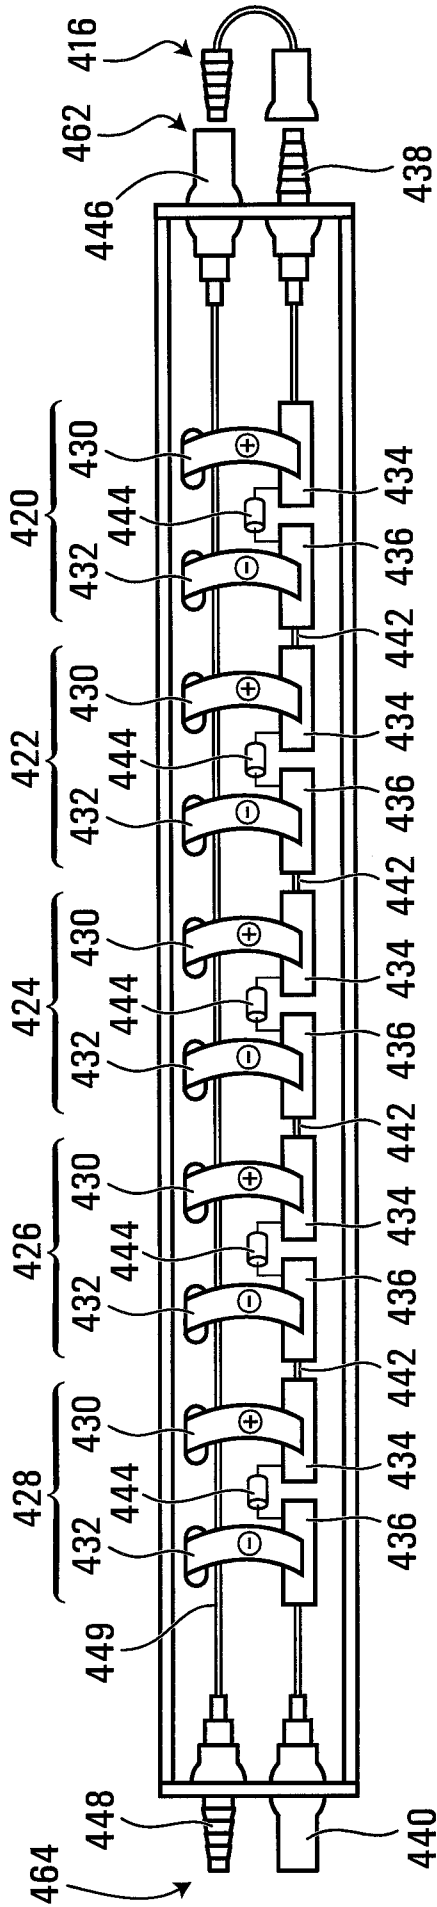


FIG. 13

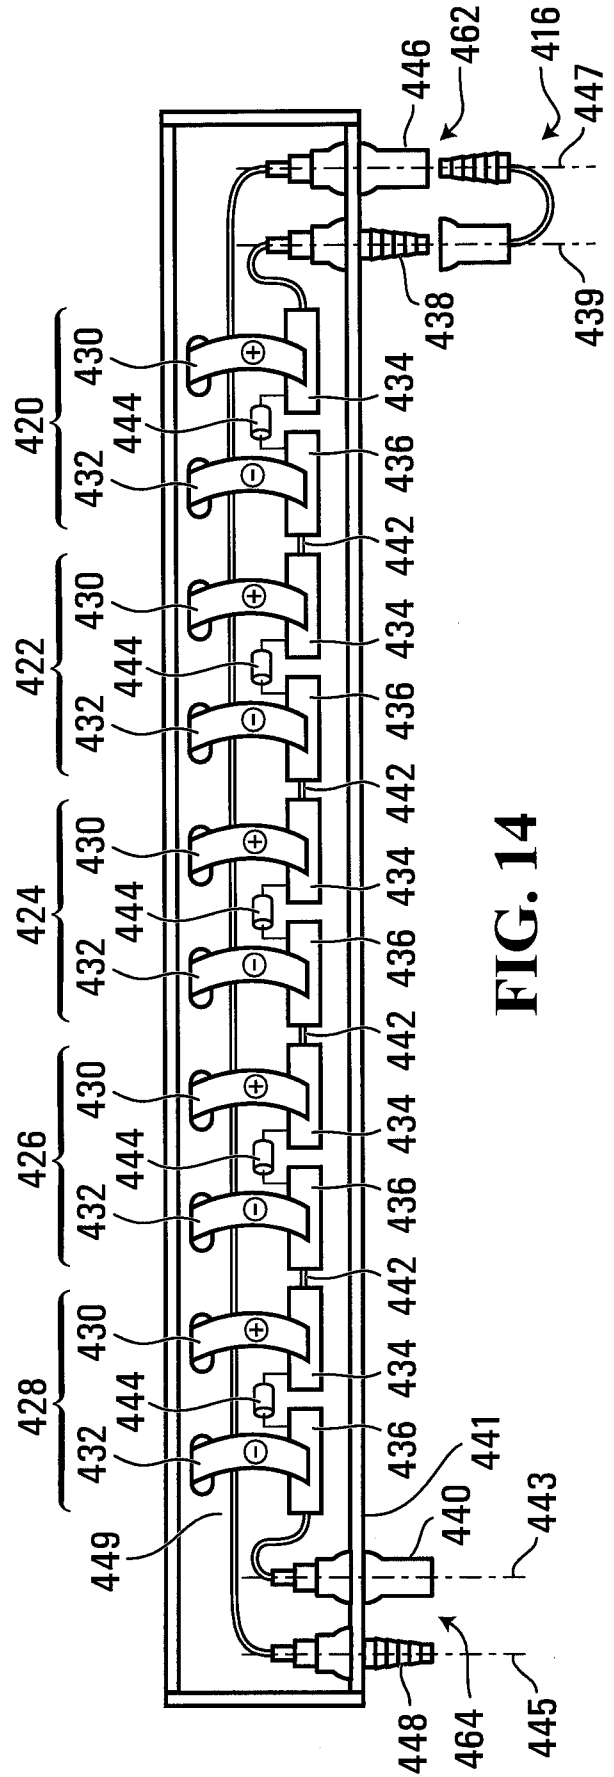


FIG. 14

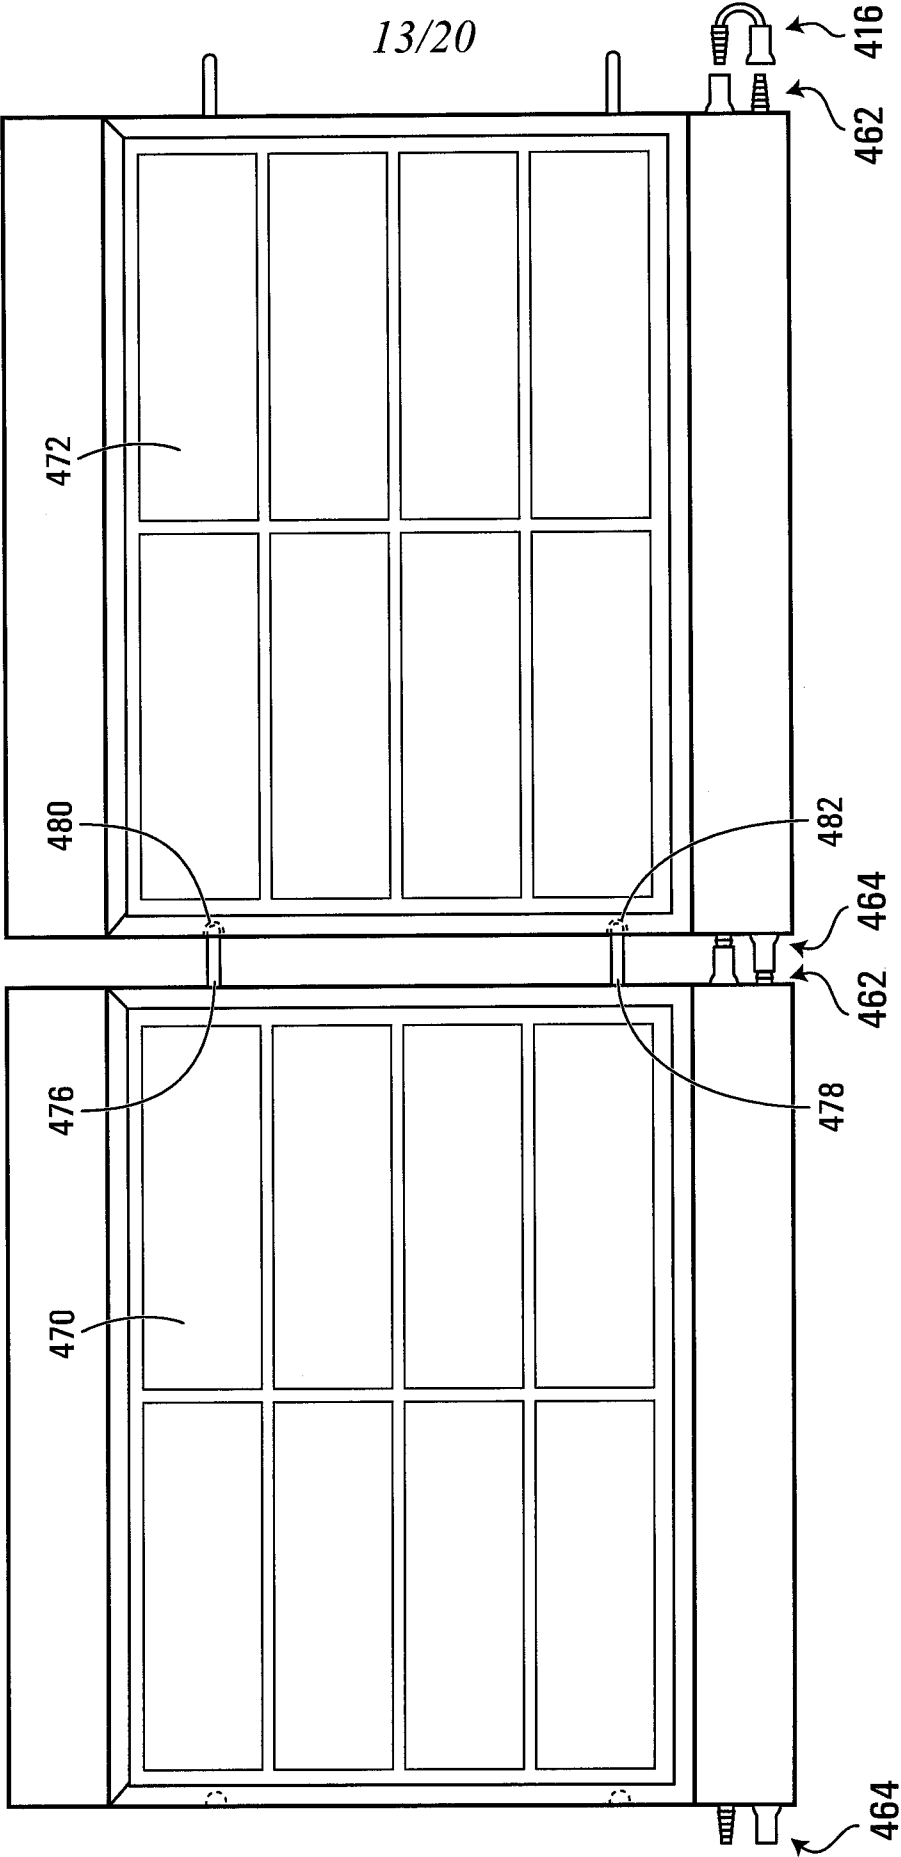


FIG. 15

14/20

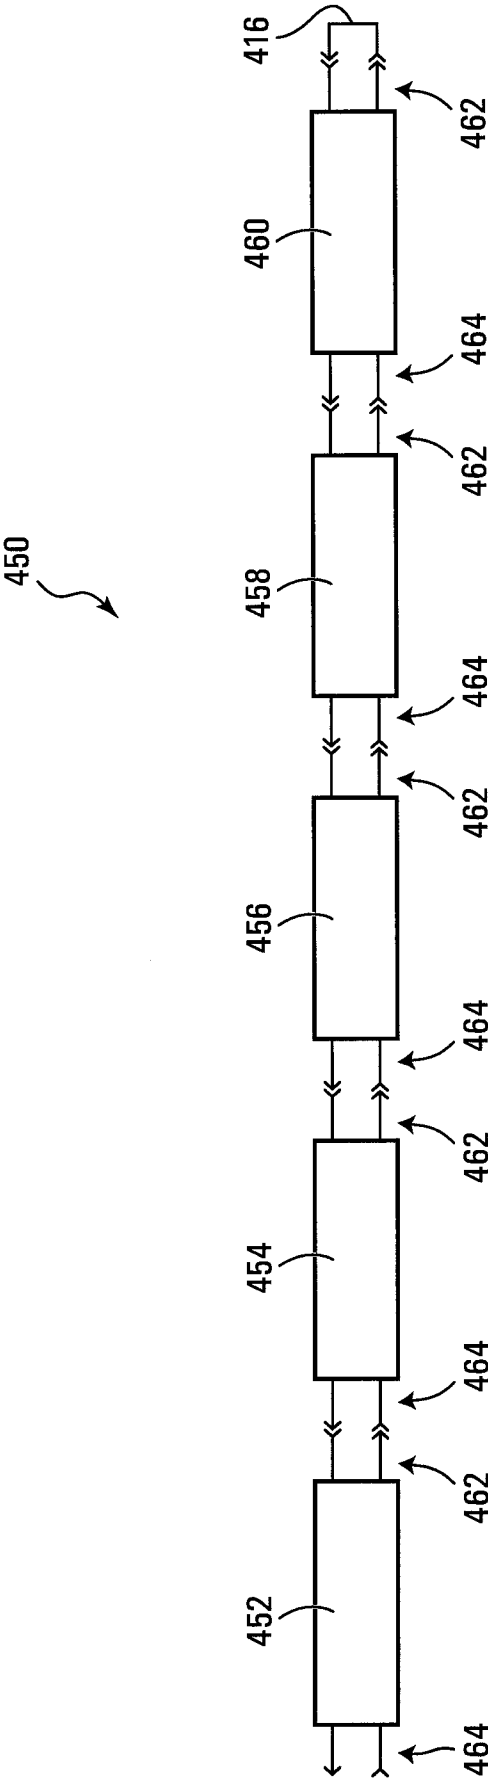


FIG. 16

15/20

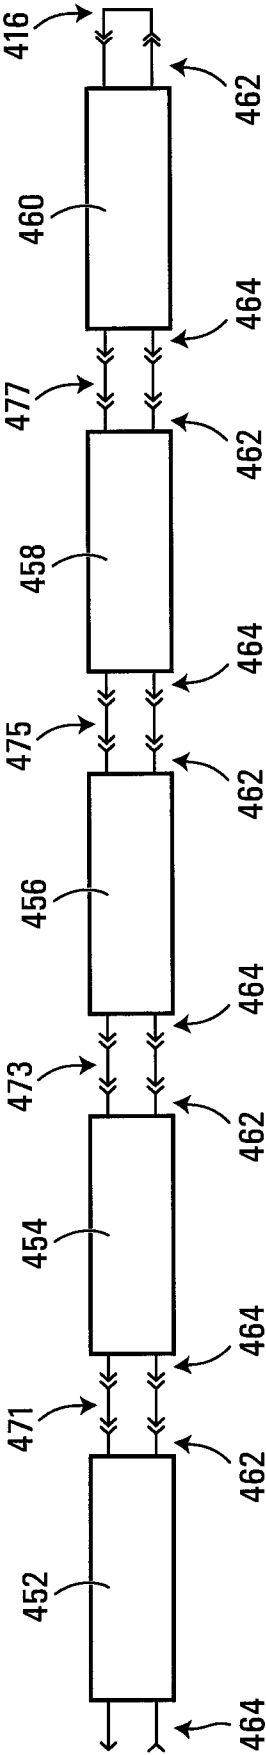


FIG. 17

16/20

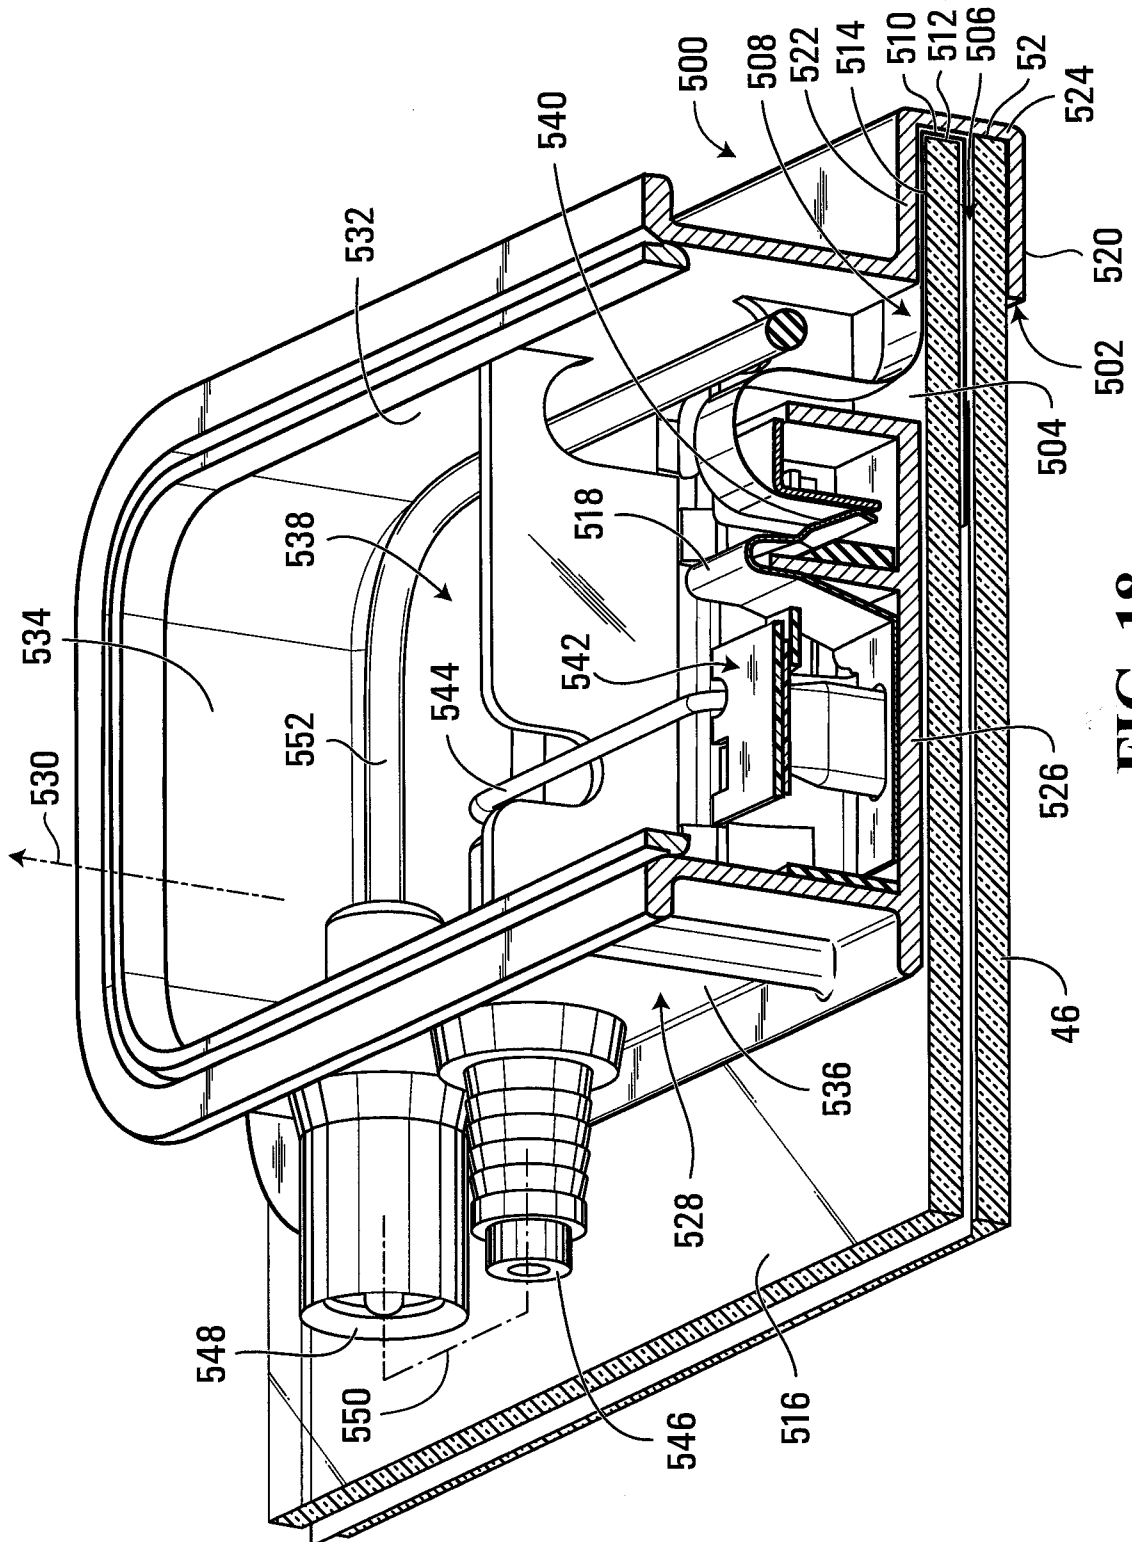


FIG. 18

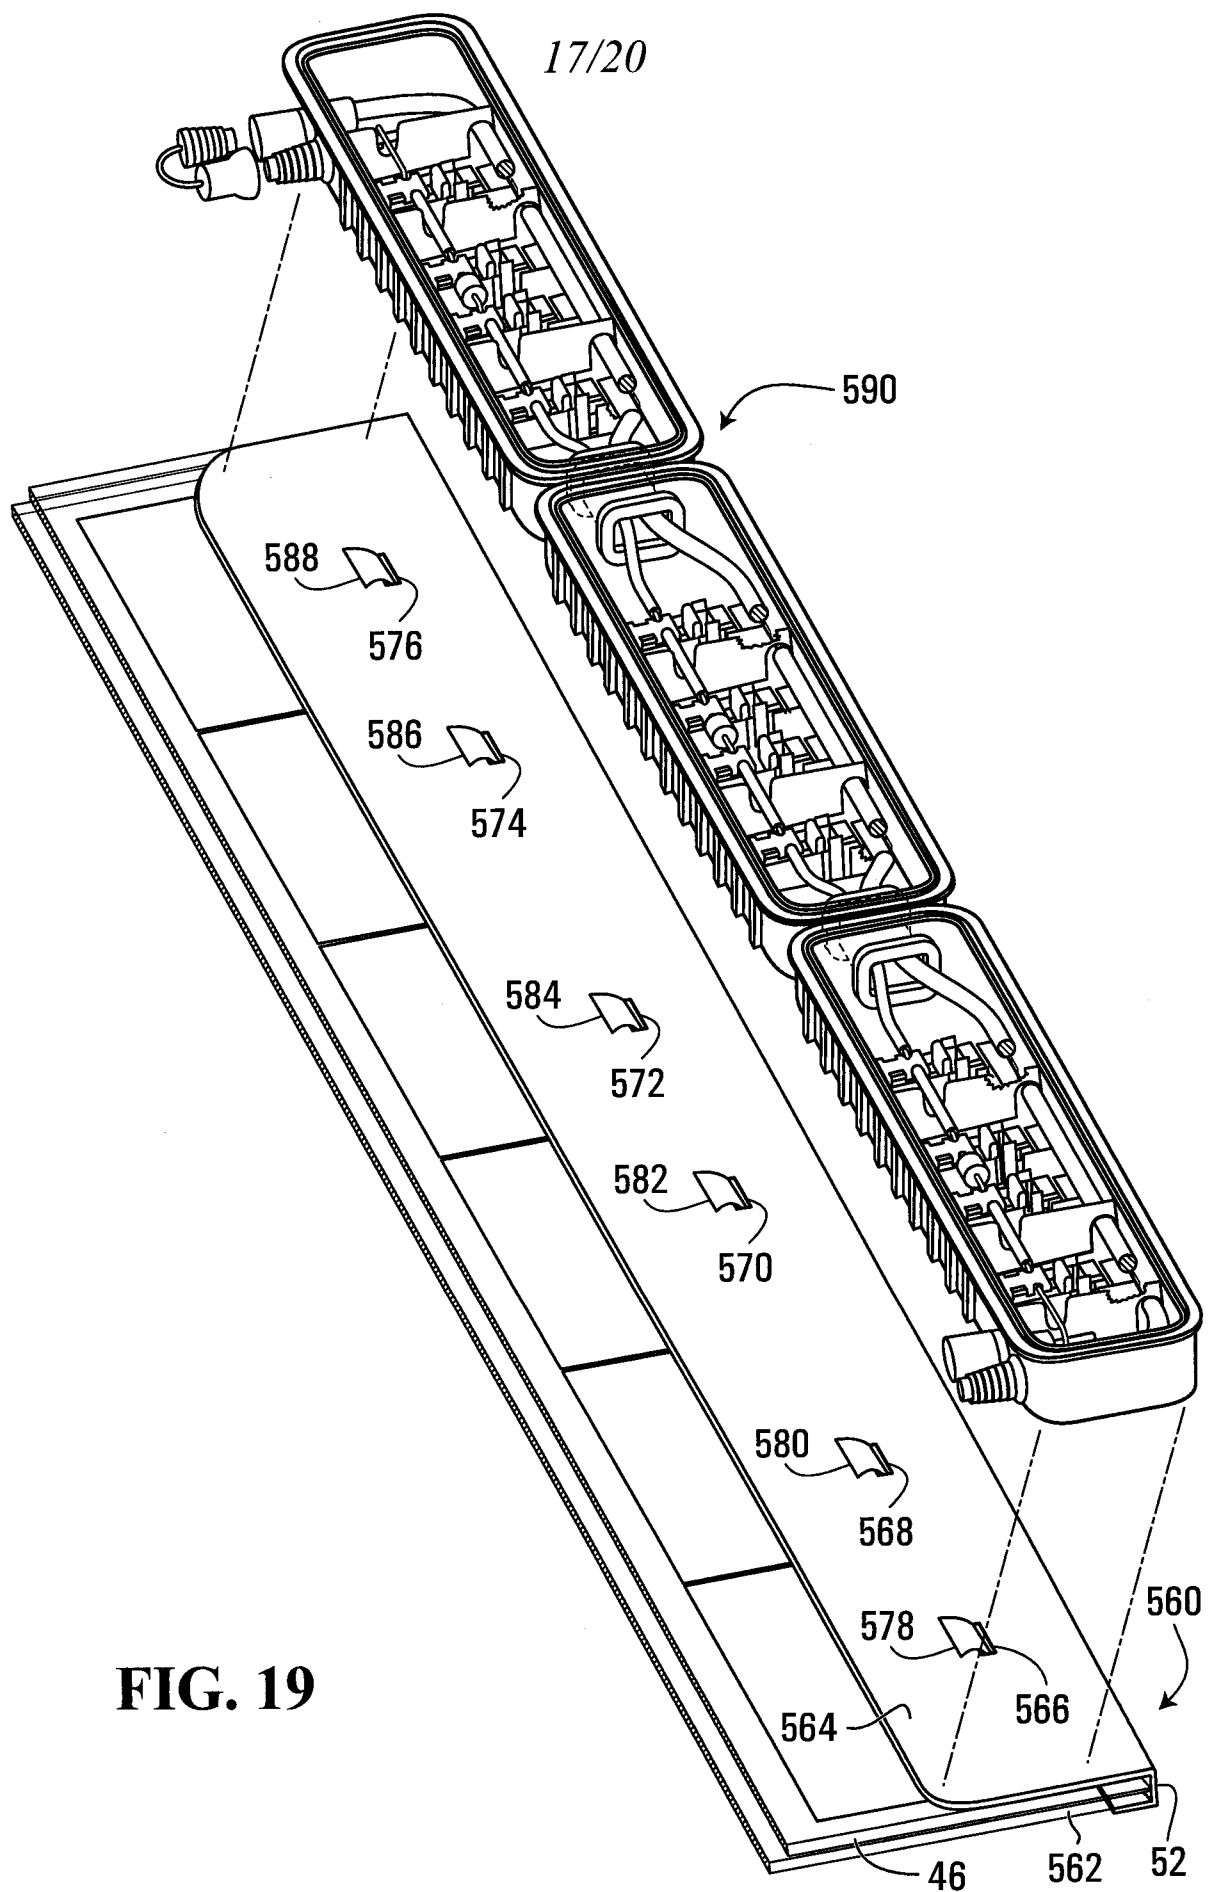


FIG. 19

18/20



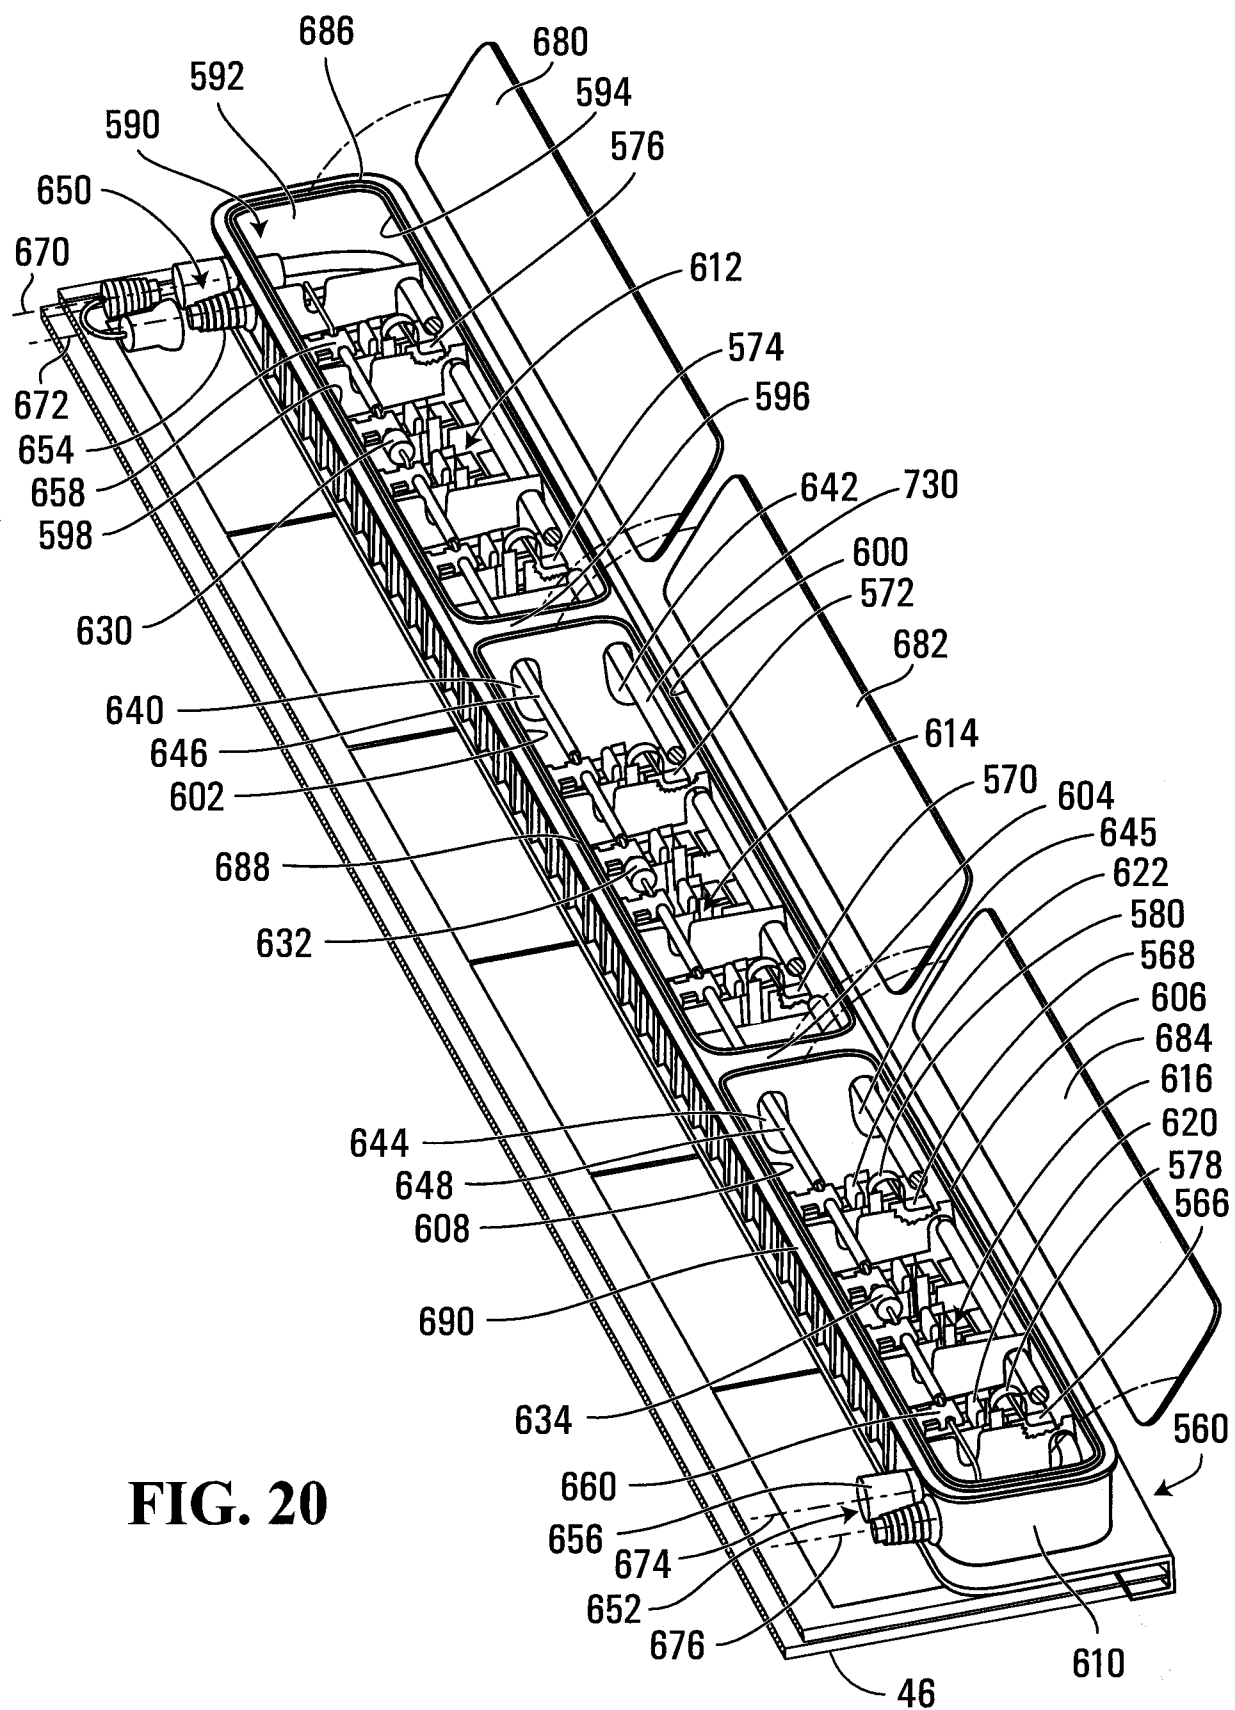


FIG. 20

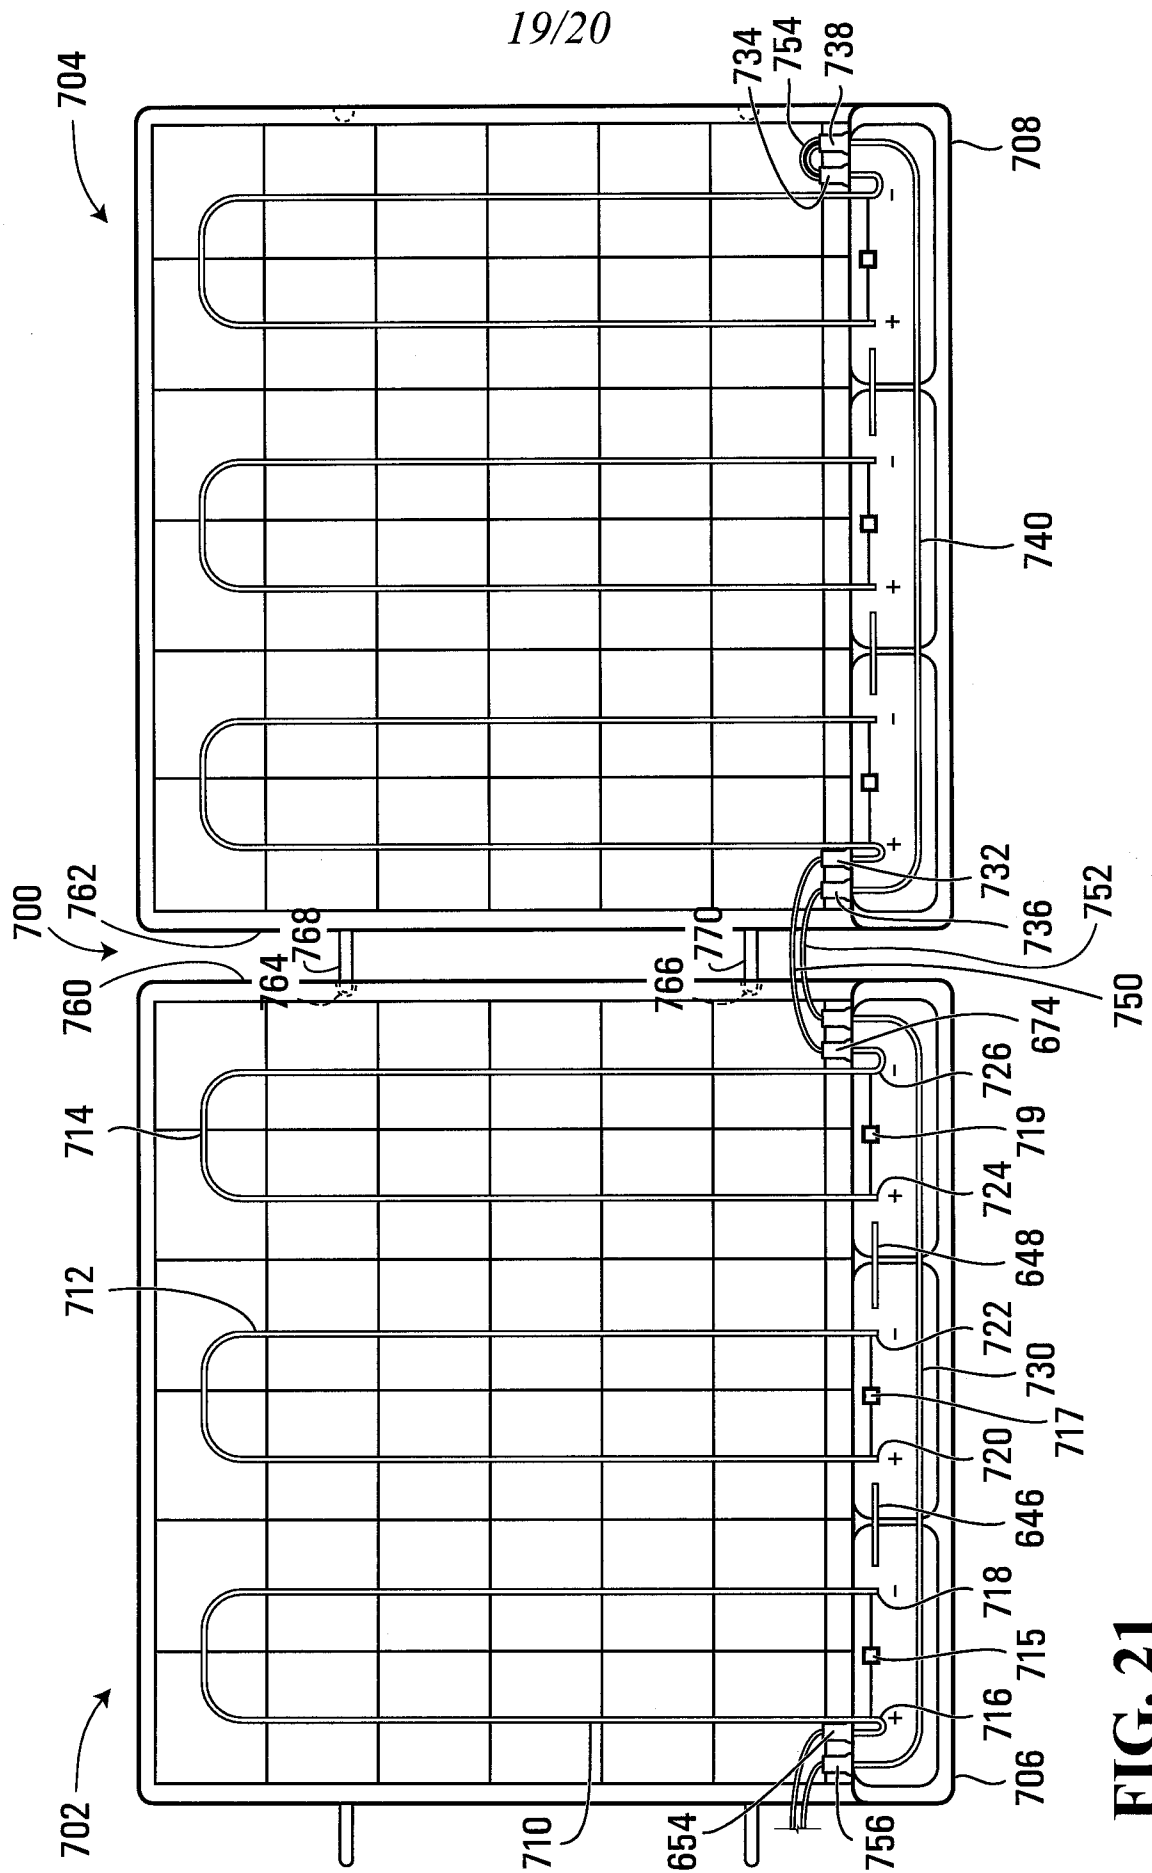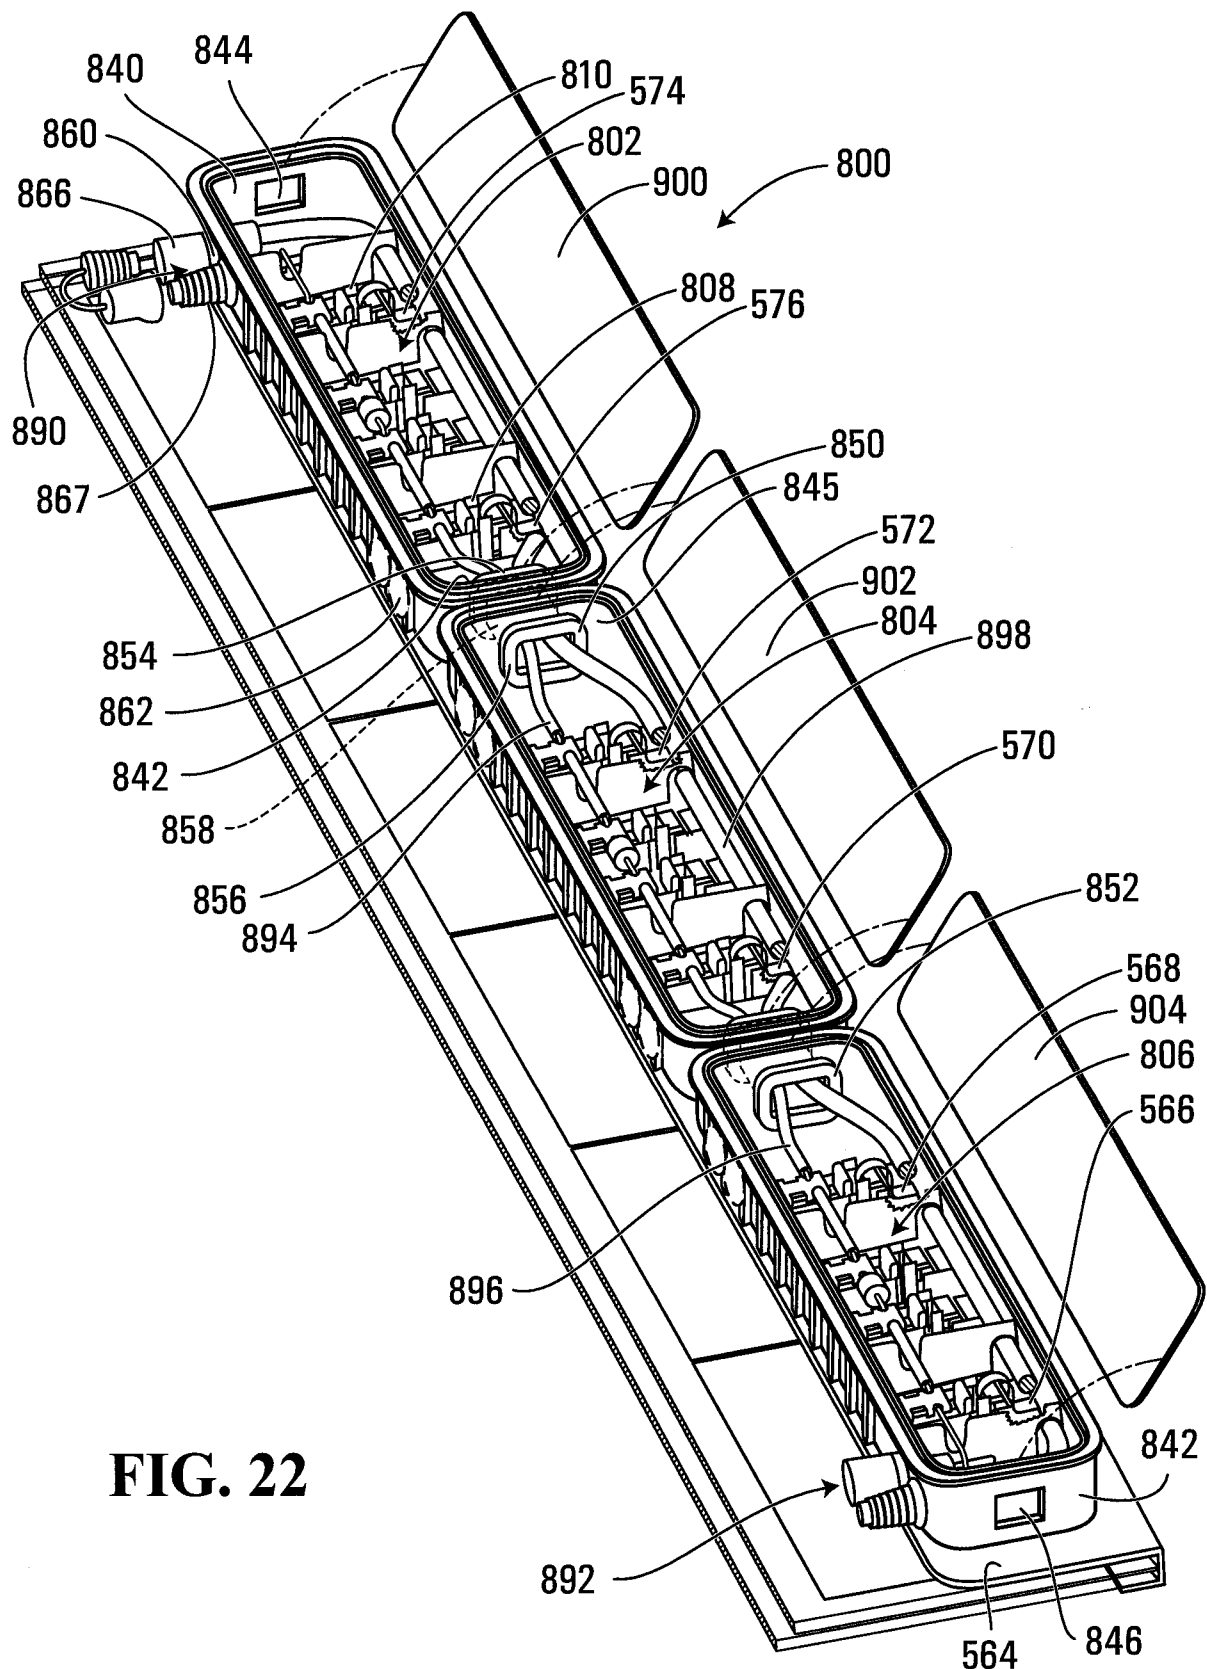

20/20

**FIG. 22**

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CA2007/002301

A. CLASSIFICATION OF SUBJECT MATTER IPC: H01L 31/042 (2006.01) , H01L 31/048 (2006.01) , H01L 31/05 (2006.01) According to International Patent Classification (IPC) or to both national classification and IPC																							
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC: H01L																							
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched																							
Electronic database(s) consulted during the international search (name of database(s) and, where practicable, search terms used) Databases: Canadian Patent Database, WEST, Delphion search terms used: PV, solar, interconnect, conductors, module, frame, housing																							
C. DOCUMENTS CONSIDERED TO BE RELEVANT <table border="1"> <thead> <tr> <th>Category*</th> <th>Citation of document, with indication, where appropriate, of the relevant passages</th> <th>Relevant to claim No.</th> </tr> </thead> <tbody> <tr> <td>X</td> <td>US 2003/0000568 A1, 2 January 2003, Gonsiorawski *see figure 3; and paragraphs 0028 and 0037</td> <td>1-31 and 57-71</td> </tr> <tr> <td>A</td> <td>US 2007/0095386 A1, 3 May 2007, Gibson *see entire document</td> <td>1-31 and 57-71</td> </tr> <tr> <td>A</td> <td>US 5,651,837, 29 July 1997, Ohtsuka et al. *see entire document</td> <td>1-31 and 57-71</td> </tr> <tr> <td>A</td> <td>US 2007/0102038 A1, 10 May 2007, Kirschning. *see figures 1-5; and paragraphs 0054-0070</td> <td>32-56 and 72-79</td> </tr> <tr> <td>A</td> <td>US 2005/0257453 A1, 24 November 2005, Cinnamon *see entire document</td> <td>32-56 and 72-79</td> </tr> <tr> <td>A</td> <td>US 2001/0009159 A1, 26 July 2001, Watanabe et al. *see entire document</td> <td>32-56 and 72-79</td> </tr> </tbody> </table>			Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.	X	US 2003/0000568 A1, 2 January 2003, Gonsiorawski *see figure 3; and paragraphs 0028 and 0037	1-31 and 57-71	A	US 2007/0095386 A1, 3 May 2007, Gibson *see entire document	1-31 and 57-71	A	US 5,651,837, 29 July 1997, Ohtsuka et al. *see entire document	1-31 and 57-71	A	US 2007/0102038 A1, 10 May 2007, Kirschning. *see figures 1-5; and paragraphs 0054-0070	32-56 and 72-79	A	US 2005/0257453 A1, 24 November 2005, Cinnamon *see entire document	32-56 and 72-79	A	US 2001/0009159 A1, 26 July 2001, Watanabe et al. *see entire document	32-56 and 72-79
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.																					
X	US 2003/0000568 A1, 2 January 2003, Gonsiorawski *see figure 3; and paragraphs 0028 and 0037	1-31 and 57-71																					
A	US 2007/0095386 A1, 3 May 2007, Gibson *see entire document	1-31 and 57-71																					
A	US 5,651,837, 29 July 1997, Ohtsuka et al. *see entire document	1-31 and 57-71																					
A	US 2007/0102038 A1, 10 May 2007, Kirschning. *see figures 1-5; and paragraphs 0054-0070	32-56 and 72-79																					
A	US 2005/0257453 A1, 24 November 2005, Cinnamon *see entire document	32-56 and 72-79																					
A	US 2001/0009159 A1, 26 July 2001, Watanabe et al. *see entire document	32-56 and 72-79																					
[] Further documents are listed in the continuation of Box C. [X] See patent family annex. <table border="1"> <tbody> <tr> <td>* Special categories of cited documents :</td> <td>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</td> </tr> <tr> <td>"A" document defining the general state of the art which is not considered to be of particular relevance</td> <td>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</td> </tr> <tr> <td>"E" earlier application or patent but published on or after the international filing date</td> <td>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</td> </tr> <tr> <td>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</td> <td>"&" document member of the same patent family</td> </tr> <tr> <td>"O" document referring to an oral disclosure, use, exhibition or other means</td> <td></td> </tr> <tr> <td>"P" document published prior to the international filing date but later than the priority date claimed</td> <td></td> </tr> </tbody> </table>			* Special categories of cited documents :	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	"E" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art	"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family	"O" document referring to an oral disclosure, use, exhibition or other means		"P" document published prior to the international filing date but later than the priority date claimed										
* Special categories of cited documents :	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention																						
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone																						
"E" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art																						
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family																						
"O" document referring to an oral disclosure, use, exhibition or other means																							
"P" document published prior to the international filing date but later than the priority date claimed																							
Date of the actual completion of the international search 26 August 2008 (26-08-2008)		Date of mailing of the international search report 8 September 2008 (08-09-2008)																					
Name and mailing address of the ISA/CA Canadian Intellectual Property Office Place du Portage I, C114 - 1st Floor, Box PCT 50 Victoria Street Gatineau, Quebec K1A 0C9 Facsimile No.: 001-819-953-2476		Authorized officer Kazem Ziaie 819- 934-2667																					

INTERNATIONAL SEARCH REPORTInternational application No.
PCT/CA2007/002301**Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of the first sheet)**

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons :

1. ☐ Claim Nos. :
because they relate to subject matter not required to be searched by this Authority, namely :

2. ☐ Claim Nos. :
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically :

3. ☐ Claim Nos. :
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows :

Group A- Claims 1-31 and 57-71 are directed to a photovoltaic (PV) module apparatus comprising: a plurality of PV cells; positive and negative conductors; front and back encapsulating sheets; and front and back protectors.

Group B- Claims 32-56 and 72-79 are directed to a frame apparatus for a photovoltaic (PV) module, the apparatus comprising: an elongate body; first and second frame connectors; an electrical connector holder; and an opening extending between a module holder and the electrical connector holder.

1. ☒ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claim Nos. :
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claim Nos. :

Remark on Protest ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
☒ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/CA2007/002301

Patent Document Cited in Search Report	Publication Date	Patent Family Member(s)	Publication Date
US2003000568	02-01-2003	EP1396034 A1 JP2004531893T T WO02103809 A1	10-03-2004 14-10-2004 27-12-2002
US2007095386	03-05-2007	CN101194368 A EP1902475 A2 KR20080021652 A US2006283495 A1 WO2006133126 A2	04-06-2008 26-03-2008 07-03-2008 21-12-2006 14-12-2006
US5651837	29-07-1997	AU708848B B2 AU3439295 A CA2161077 A1 CN1147698 A CN1314716 A DE69527715D D1 DE69527715T T2 EP0768721 A2 ES2180601T T3 JP9107119 A KR100225054B B1 MX9504477 A US6420645 B1 ZA9508948 A	12-08-1999 17-04-1997 12-04-1997 16-04-1997 26-09-2001 12-09-2002 02-01-2003 16-04-1997 16-02-2003 22-04-1997 15-10-1999 30-04-1997 16-07-2002 23-05-1996
US2007102038	10-05-2007	DE102005054315 A1 EP1786041 A2 JP2007134727 A	16-05-2007 16-05-2007 31-05-2007
US2005257453	24-11-2005	AU2005248343 A1 CA2566296 A1 EP1766153 A2 JP2008506057T T KR20070015462 A US7406800 B2 US2007102036 A1 US2007295392 A1 US2007295393 A1 WO2005116359 A2	08-12-2005 08-12-2005 28-03-2007 28-02-2008 02-02-2007 05-08-2008 10-05-2007 27-12-2007 27-12-2007 08-12-2005
US2001009159	26-07-2001	DE60122951D D1 DE60122951T T2 EP1120837 A2 JP2001210849 A US6437236 B2	26-10-2006 24-05-2007 01-08-2001 03-08-2001 20-08-2002